



(86) Date de dépôt PCT/PCT Filing Date: 2011/09/12
(87) Date publication PCT/PCT Publication Date: 2012/03/22
(85) Entrée phase nationale/National Entry: 2013/03/12
(86) N° demande PCT/PCT Application No.: CA 2011/001019
(87) N° publication PCT/PCT Publication No.: 2012/034216
(30) Priorité/Priority: 2010/09/13 (US61/382,102)

(51) Cl.Int./Int.Cl. *H02J 7/00* (2006.01),
B60S 5/00 (2006.01), *H01R 13/447* (2006.01),
H01R 13/639 (2006.01)
(71) Demandeur/Applicant:
ADDENERGIE TECHNOLOGIES INC., CA
(72) Inventeurs/Inventors:
TREMBLAY, LOUIS, CA;
DESJARDINS, MICHAEL, CA
(74) Agent: FASKEN MARTINEAU DUMOULIN LLP

(54) Titre : STATION DE CHARGE DE VEHICULE ELECTRIQUE ET PROCEDE DE CHARGE D'UN VEHICULE
ELECTRIQUE
(54) Title: ELECTRIC VEHICLE CHARGING STATION AND METHOD FOR CHARGING AN ELECTRIC VEHICLE

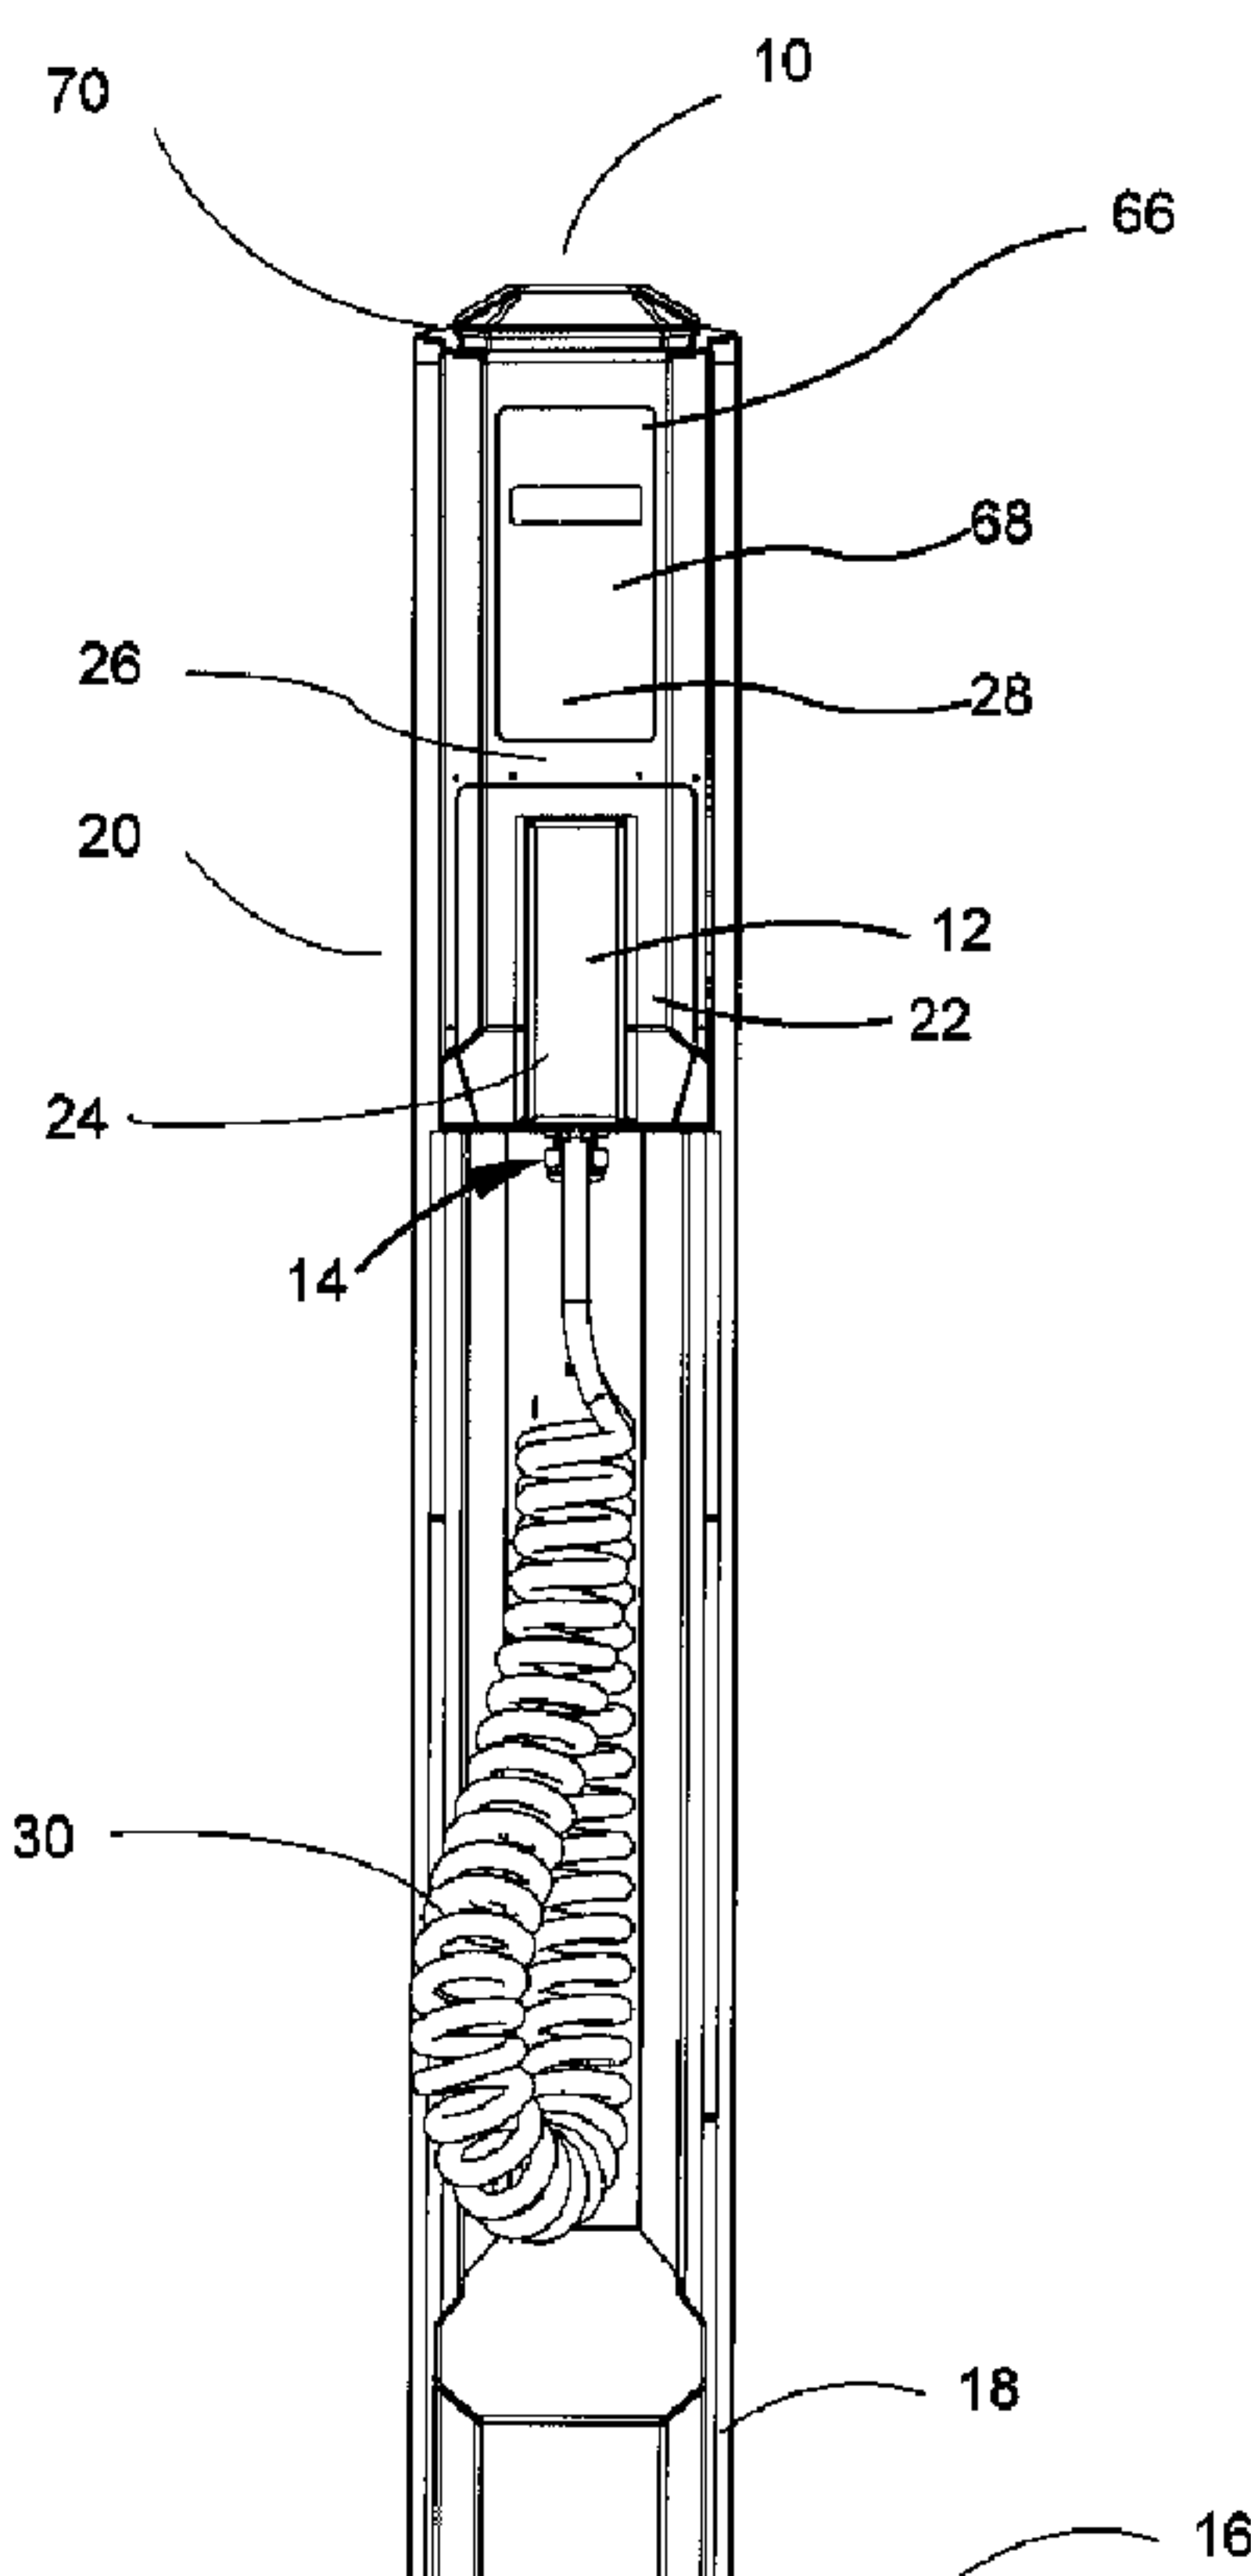


FIG.1

(57) **Abrégé/Abstract:**

There is described an electric vehicle charging station for charging an electric vehicle, comprising: an electrical connector electrically connectable to a source of electrical energy, the electrical connector adapted for connecting to a battery of the electric



(57) **Abrégé(suite)/Abstract(continued):**

vehicle; a frame having a connector receiving portion for receiving the electrical connector; a locking unit mounted to the frame for preventing a user access to the electrical connector; and a control unit operatively connected to the locking unit, the control unit for verifying rights of a user to access the electrical connector and unlocking the locking unit upon successful verification of the user rights to provide the user access to the electrical connector.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



WIPO | PCT



(10) International Publication Number
WO 2012/034216 A9

(43) International Publication Date
22 March 2012 (22.03.2012)

(51) International Patent Classification:

H02J 7/00 (2006.01) *H01R 13/447* (2006.01)
B60S 5/00 (2006.01) *H01R 13/639* (2006.01)

(21) International Application Number:

PCT/CA2011/001019

(22) International Filing Date:

12 September 2011 (12.09.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/382,102 13 September 2010 (13.09.2010) US

(71) Applicant (for all designated States except US): **ADDEN-
ERGIE TECHNOLOGIES INC.** [CA/CA]; 2750, rue
Einstein, Bureau 130, Quebec, Québec G1P 4R1 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TREMBLAY, Louis**
[CA/CA]; 735, Chanoine-Scott Avenue, Apt. 3, Québec,
Québec G1V 3M9 (CA). **DESJARDINS, Michael**
[CA/CA]; 735, Chanoine-Scott Avenue, Apt. 3, Québec,
Québec G1V 3M9 (CA).

(74) Agent: **FASKEN MARTINEAU DUMOULIN LLP**;
Stock Exchange Tower, Suite 3700, P.O. Box 242, 800
Square Victoria, Montreal, Québec H4Z 1E9 (CA).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,

[Continued on next page]

(54) Title: ELECTRIC VEHICLE CHARGING STATION AND METHOD FOR CHARGING AN ELECTRIC VEHICLE

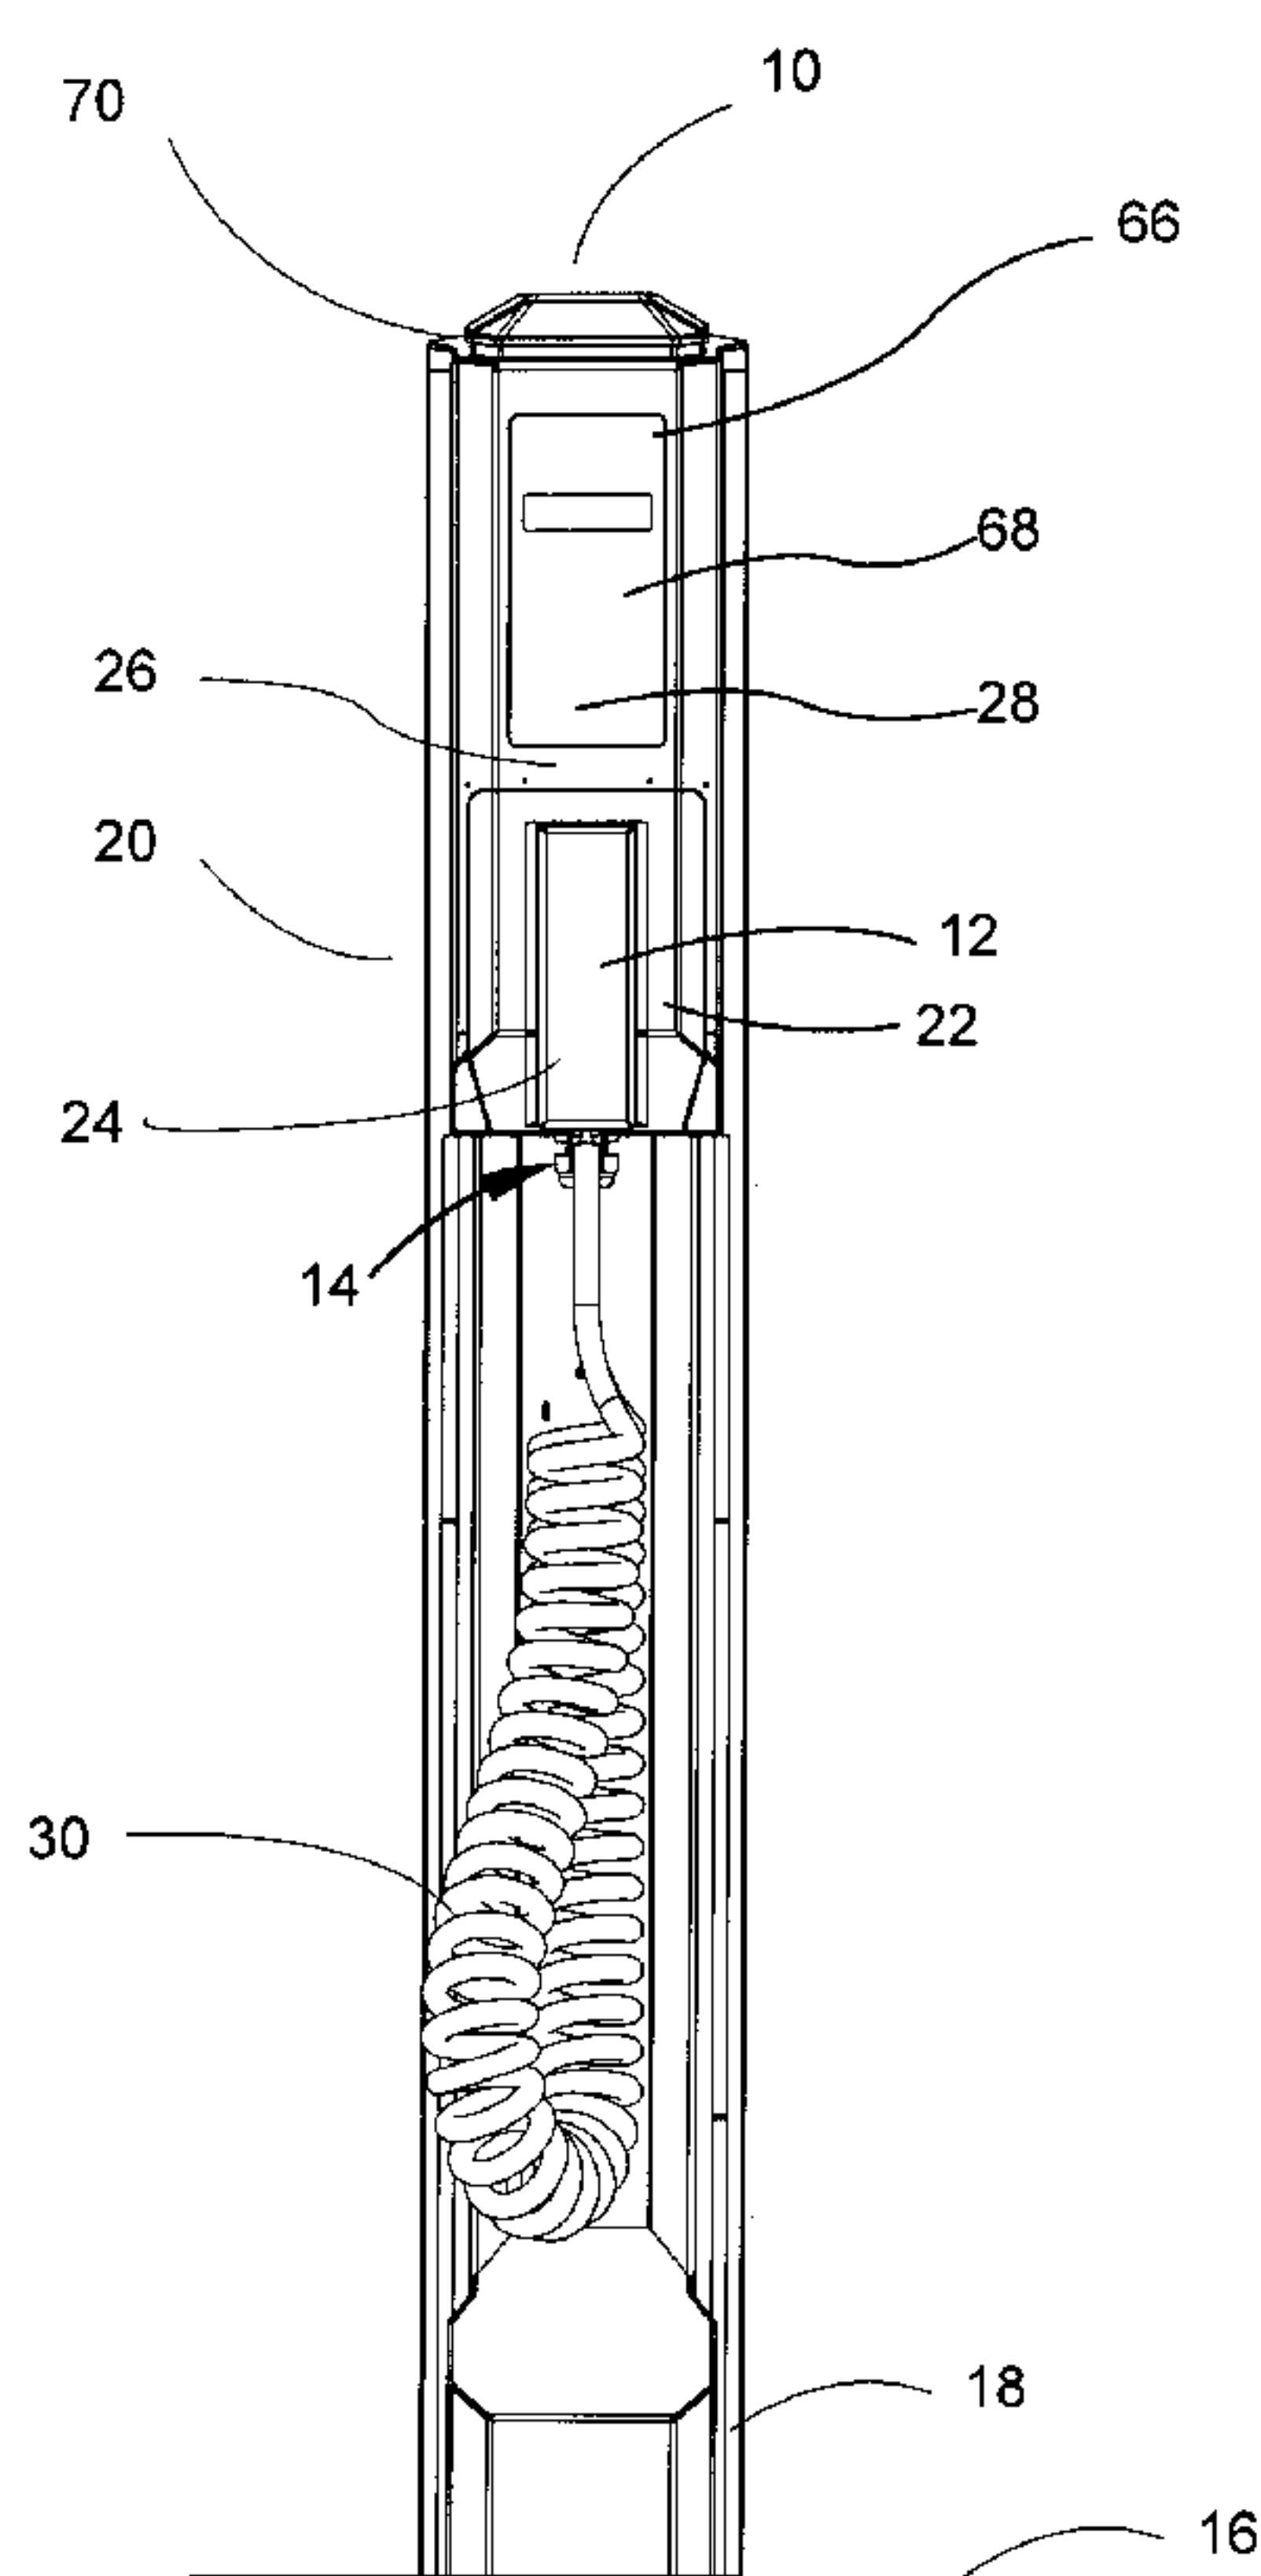


FIG.1

(57) Abstract: There is described an electric vehicle charging station for charging an electric vehicle, comprising: an electrical connector electrically connectable to a source of electrical energy, the electrical connector adapted for connecting to a battery of the electric vehicle; a frame having a connector receiving portion for receiving the electrical connector; a locking unit mounted to the frame for preventing a user access to the electrical connector; and a control unit operatively connected to the locking unit, the control unit for verifying rights of a user to access the electrical connector and unlocking the locking unit upon successful verification of the user rights to provide the user access to the electrical connector.

WO 2012/034216 A9

WO 2012/034216 A9

SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

Published:

— *with international search report (Art. 21(3))*

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(48) Date of publication of this corrected version:

28 June 2012

(15) Information about Correction:

see Notice of 28 June 2012

ELECTRIC VEHICLE CHARGING STATION AND METHOD FOR CHARGING AN ELECTRIC VEHICLE

CROSS REFERENCE TO RELATED APPLICATION

5 This application claims priority of US Provisional Patent Application having serial number 61/382,102, which was filed on September 13, 2010 and is entitled "DEVICE FOR SELECTIVELY ENABLING ACCESS TO AN ENERGY PROVIDING MEANS", the specification of which is hereby incorporated by reference.

FIELD OF THE INVENTION

10 This invention relates to the field of charging station for electric vehicles, and more particularly to charging stations having user access control capabilities.

BACKGROUND OF THE INVENTION

Electrical vehicles provided with rechargeable batteries become widely used. Typically, the user recharges the electric batteries of his vehicle in connecting the
15 batteries to the power grid via a suitable plug. In this case, the user generally uses the connection to the power grid that is available at his residence.

Some fully electric vehicles may not yet have an autonomy suitable for enabling the user to travel a long way without recharging the batteries, once they are depleted, to further postpone the recharging of the batteries of the vehicle. In this
20 case, the user may have to recharge his batteries outside his residence, for example in a charging station available to the public upon payment of a fee.

Different types of charging stations and associated methods adapted for distributing electricity to electric vehicles have been proposed.

Charging stations similar to gasoline stations and adapted for public use have
25 been proposed. In this case, the user may approach his electric car proximate the charging station as he would do with a conventional gasoline pump, present a credit card to the station or otherwise arrange for payment, operatively plug the vehicle to the charging station and be provided with electricity. After the vehicle is

sufficiently charged, the amount of power provided may be calculated, and either the credit card debited for the correct amount, or other arrangements to pay for the service may be accommodated such as debiting a prepaid account.

It has been shown that charging stations may be prone to vandalism and even theft of portions of the station. For example, it is known that copper conductive cables are often targeted as copper may be sold.

Moreover, the charging stations may also be prone to various damages. For example, if a user does not replace the distributing cable in its correct position after use, the cable and associated connector may remain unprotected on the ground. The cable may then be damaged and subjected to climatic conditions.

In harsh climatic conditions such as during winter in northern countries like Canada, if the cable is not properly placed between subsequent uses, it may be running on the floor, in ice and snow and be trapped in ice. The station will then not be available for a user until an operator frees the cable from ice, which is a great limitation. Moreover, the cable may be damaged by motorized snow removal, which is also a great disadvantage.

It would therefore be desirable to provide an improved charging station that would reduce at least one of the above mentioned drawbacks. For example, it would be desirable to provide a charging station devised to resist to heavy conditions such as snow, ice, and most of debris for example, while offering an easy and convenient experience to the user.

BRIEF SUMMARY

In accordance with a broad aspect, there is described an electric vehicle charging station for charging an electric vehicle, comprising: an electrical connector electrically connectable to a source of electrical energy, the electrical connector adapted for connecting to a battery of the electric vehicle; a frame having a connector receiving portion for receiving the electrical connector; a locking unit mounted to the frame for preventing a user access to the electrical connector; and a control unit operatively connected to the locking unit, the control unit for verifying rights of a user to access the electrical connector and unlocking the

locking unit upon successful verification of the user rights to provide the user access to the electrical connector.

5 In one embodiment, the locking unit comprises a protective cover covering the electrical connector when not in use. This enables preventing access to the electrical connector as long as an authorized user has not been successfully identified. This may be of great advantage since it may help reduce vandalism of the electrical connector.

10 In one embodiment, the protective cover is adapted for preventing infiltration of external elements such as debris, rain, ice, snow, and/or the like in the electrical connector, which may be of great advantage for reducing breaks and therefore down times during which the electrical connector is not operative. This may be even more advantageous when the electrical connector is used in harsh climatic conditions.

15 In one embodiment, the charging station comprises a flexible conductive cable provided with a connector adapted for operatively connecting with a corresponding connector provided on an electrical vehicle. The charging station comprises a receiving portion adapted for receiving the connector when not in use. The locking unit of the device for selectively enabling access to the electrical connector comprises a first protective cover covering the connector for selectively
20 preventing access thereto and protecting it from surroundings. The locking unit further comprises a second protective cover for protecting the cable from surroundings when not in use.

25 In one embodiment, the device for selectively enabling access to the electrical connector further comprises a position sensor adapted for sensing presence and/or absence of the connector in the corresponding receiving portion for monitoring position of the connector. This may be of great advantage since it enables the encouraging of users to put the connector back in its receiving portion after use so that the device for selectively preventing access may monitor a return of the connector before the control unit terminates the user transaction.

In one embodiment, the electrical cable is retractably mounted to the frame of the charging station so that the electrical cable be retracted in its receiving portion after use of the electrical connector.

5 In accordance with another broad aspect, there is provided a method for charging an electric vehicle, comprising: at an electric vehicle charging station, verifying rights of a user to use the charging station for charging the electric vehicle; upon successful verification, unlocking a locking unit mounted to a frame of the charging station and securing an electrical connector electrically connected to a source of electrical power in a receiving portion of the base structure, thereby
10 providing the user access to the electrical connector; and the user electrically connecting a battery of the electric vehicle to the electrical connector, thereby charging the electric vehicle.

In one embodiment, the step of verifying the user's rights to use the charging station comprises verifying the user identity. In another embodiment, the step of
15 verifying the user's rights comprises receiving a payment for the transaction, i.e. for the charge of the battery.

In one embodiment, the step of unlocking the locking unit comprises unlocking the locking mechanism operatively connected to a connector cover, thereby providing the user access to the electrical connector.

20 In one embodiment, the step of the user electrically connecting the battery comprises: the user opening the connector cover, electrically connecting the battery to the electrical connector, and closing the connector cover and providing electrical energy to the battery via the electrical connector.

In one embodiment the method further comprises the following steps:

25 locking the connector cover during said providing electrical energy to the battery;

unlocking the connector cover once the battery is recharged;

said user disconnecting the battery and positioning the electrical connector back in the receiving portion;

terminating the transaction only when the electrical connector has been positioned back in the receiving portion; and

locking the connector cover.

BRIEF DESCRIPTION OF THE DRAWINGS

5 In order that the invention may be readily understood, embodiments of the invention are illustrated by way of example in the accompanying drawings.

Figure 1 is a front view of a charging station provided with a device for selectively enabling access to an electrical connector, according to one embodiment.

10 Figure 2 is a cross sectional side view of another charging station provided with a device for selectively enabling access to an electrical connector, according to another embodiment, the locking unit being in a locked position.

Figure 3 is a cross sectional side view of the charging station shown in Figure 2, the locking unit being in an unlocked position.

15 Figure 4 is a front view of another charging station provided with two devices for selectively enabling access to an electrical connector, according to another embodiment.

Figure 5 is a cross sectional side view of another charging station provided with a device for selectively enabling access to an electrical connector, according to another embodiment.

20 Figure 6 is a perspective front view of another charging station provided with a device for selectively enabling access to an electrical connector, according to still another embodiment.

25 Figures 7A to 7C show another embodiment of a charging station provided with another device for selectively enabling access to an electrical connector, according to still another embodiment.

Further details of the invention and its advantages will be apparent from the detailed description included below.

DETAILED DESCRIPTION

In the following description of the embodiments, references to the accompanying drawings are by way of illustration of an example by which the invention may be practiced. It will be understood that other embodiments may be made without
5 departing from the scope of the invention disclosed.

There is disclosed a device for selectively enabling access to an electrical connector adapted for transferring energy to a battery powered device. Throughout the present description, the device for selectively enabling access will be described in a given application of a charging station having an electrical
10 connector for electricity dispensing but the skilled addressee will appreciate that various other applications may be envisaged.

In one embodiment, the device enables preventing access to the electrical connector as long as a user has not been successfully identified. This may be of great advantage since it may help reduce vandalism of the electrical connector,
15 as it will become apparent below to the skilled addressee.

As it will be understood upon reading of the present description, in one embodiment, the device may help ensuring the electrical connector is positioned back in a correct position after use. This may contribute to reduce damages caused to the electrical connector, which may be of great advantage. This may
20 also help reducing down operating time of the whole system onto which the device is installed while also reducing maintenance costs, which may also be of great advantage.

Moreover, the device may also enable to enhance the comfort of the experience of the user, which may also be of great advantage.

25 In one embodiment, the device for selectively enabling access to the electrical connector is adapted for use in harsh climatic conditions, such as during winter in northern countries like Canada. As it will become apparent below, the construction of the device is devised to protect the electrical connector against heavy climatic conditions such as snow, ice and rain for example.

Moreover, in one embodiment, the device for selectively enabling access is further adapted for protecting the electrical connector against infiltration of various debris, which may be of great advantage for enhancing robustness of the electrical connector, as it will become apparent below.

5 Referring to Figure 1, there is shown a charging station **10** for providing electrical energy to an electrical vehicle. The charging station **10** comprises a device **12** for selectively enabling access to an energy providing means or electrical connector **14**, also called a smart connector. The electrical connector **14** is adapted to connect to the electric vehicle to be charged, i.e. to a battery or a charger of the
10 electrical vehicle.

The charging station **10** comprises a base **16** for anchoring the charging station **10** at a given location and a station frame **18** attachable to the base **16**. The charging station **10** also comprises an electrical energy distributing unit **20** comprising the electrical connector **14** which is electrically connectable, via a
15 switch, to an adequate source of electrical energy such as an electrical grid for example. The electrical connector **14** is adapted for selectively providing electrical energy to a battery powered device such as a vehicle in the described example.

The skilled addressee will understand that the charging station **10** may comprise
20 electrical circuitry for converting the electrical current provided by the source of electrical energy to an electrical current adequate for charging the battery of the electrical vehicle. In this case, the electrical connector **14** is electrically connected to the electrical circuitry. Alternatively, the electrical circuitry may be located outside the charging station **10** so that the electrical current adequate for
25 charging the battery of the electrical vehicle be directly provided to the charging station **10**.

The frame **18** of the charging station **10** comprises a receiving portion **22** for receiving the electrical connector **14**. In the embodiment illustrated in Figure 1, the receiving portion **22** of the frame **18** comprises a recess portion shaped and
30 sized to receive the electrical connector **14**. It should be understood that any adequate receiving portion for receiving and holding the electrical connector **14**

may be used. For example, the receiving portion **22** may be a hook secured to the frame **18** and to which the electrical connector **14** may be removably secured. In another embodiment, the receiving portion **22** may be a recess in the frame **18** having a substantially horizontal wall on which the electrical connector **14** may be laid down. In the illustrated example, the frame to which the electrical connector **14** is attached is the station frame **18** of the charging station **10** but the skilled addressee will appreciate that various other configurations may be considered for a given application.

The device **12** for selectively enabling access to the electrical connector **14** comprises a locking unit **24** mounted to the frame **18** and adapted for selectively providing a user access to the electrical connector **14**, as it will be detailed below. Indeed, in one embodiment, the locking unit **24** comprises a door or cover pivotally secured to the frame **18** and a locking mechanism, which are operatively connected together so that the locking mechanism may lock the cover. The cover is movable between a closed position and an open position. The locking mechanism is adapted to lock the cover when in the closed position so that the cover may not be open by a user in order to prevent the user access to the electrical connector **14**. When the cover is in the open position, the electrical connector **14** is accessible by the user who may remove the electrical connector **14** from the receiving portion **22**. When the cover is in the closed position and the locking mechanism locks the cover, the electrical connector **14** is enclosed in the receiving portion between the frame **18** and the cover and cannot be removed therefrom. It should be understood that the cover is sized and shaped to cover the electrical connector **14** when in the receiving portion **22** so that the electrical connector cannot be removed from the receiving portion **22** by a user, thereby preventing physical access to the electrical connector **14**. In other words, in this position, the user cannot be provided with electricity. While the present description refers to cover pivotally connected to the frame **18**, other embodiments are possible. For example, the cover may slide with respect to the frame to form a sliding door and enclose the electrical connector **14** in the receiving portion **22**.

In another embodiment, the locking unit **24** comprises a door or cover and a motor operatively connected together. In this case, the opening and closing of the cover are controlled by the motor so that a user may not manually open or close the cover. The locking unit **24** may further comprise a locking mechanism.

5 It should be understood that any adequate locking unit **24** adapted to prevent a user access to the electrical connector **14** may be used. For example, the locking unit **24** may comprise a motorized hook movable between a locked position and an unlocked position. The hook may be pivotally secured to the frame **18** for example. When in the locked position, the hook secures the electrical connector
10 **14** to the frame **18** so that a user may not remove the electrical connector **14** from the receiving portion **22**, thereby preventing the user access to the electrical connector **14**. When in the unlocked position, the hook is away from the electrical connector **14** which is accessible to the user and may be removed from the receiving portion **22** of the frame **18**. In a further example, the electrical
15 connector **14** comprises a hole therethrough and the locking unit **24** comprises a motorized latch movably secured to the frame **18**. When in a locked position, the latch extends through the hole of the electrical connector **14**, thereby securing the electrical connector **14** to the frame **18** in the receiving portion thereof and preventing the user access to the electrical connector **14**. When in an unlocked
20 position, the latch is away from the electrical connector **14**, thereby providing the user access to the electrical connector **14**.

Still referring to Figure 1, the device **12** for selectively enabling access to the electrical connector **14** also comprises a control unit **26** for controlling the locking unit **24**. In one embodiment, the control unit **26** comprises a processing unit and a
25 memory. The processing unit is configured for verifying rights of the user to access the electrical connector **14**, and therefore charge the battery of his vehicle.

In one embodiment, the rights are considered as verified when a payment is done or to be done. For example, a cashier may provide the user access to the
30 electrical connector **14** by remotely unlocking the locking unit **24**. In this case, the control unit **26** receives an unlocking signal from the cashier. Upon reception of

the unlocking signal, the processing unit understands that the user is authorized to use the electrical connector **14** and unlocks the locking unit **24**.

In another example, the control unit **26** comprises a credit card reader and a communication unit operatively connected to the processing unit. The information
5 about the user's credit card is provided by the credit card reader to the control unit **26** which transmits the credit card information to a remote server. The remote server validates the credit card information and returns a validation signal to the control unit **26**. Upon reception of the validation signal, the processing unit understands that the user is authorized to use the electrical connector **14** and
10 unlocks the locking unit **24**.

In a further embodiment, the control unit **26** comprises an identification means **28** for identifying the user and providing the user access to the electrical connector **14** following a successful identification of the user, as it will be detailed below.

For example, a user may have to preregister before using the charging station **10**
15 and is provided with an identification (ID). The ID may be a barcode, a radio-frequency identification (RFID) tag, a password, a conventional credit card, or the like. The control unit **26** comprises an adequate ID input device adapted to receive the user ID. For example, the ID input device may be a keyboard that may be used by the user to enter his password. In another example, the ID input
20 device may be a barcode reader. In a further example, the ID input device may be an RFID tag reader.

The ID input device receives the user ID and transmits it to the processing unit. In one embodiment, a list of authorized users is stored on the memory of the control unit **26**. The processing unit compares the user ID received from the ID input
25 device to the stored list of authorized users to verify the user identity. Upon successful verification, the control unit **26** unlocks the locking unit **24**. In another embodiment, the verification may be remotely performed on a server. In this case, the control unit **26** sends, via a communication unit, the user ID to a remote server which verifies the user identity. Upon reception of a signal indicative of a
30 successful verification from the remote server, the control unit **26** unlocks the locking unit **24**.

In the illustrated embodiment, the charging station comprises a flexible conductive cable **30** having a first end (not shown) electrically connected to the source of electrical energy (not shown) and a second end electrically connected to the electrical connector **14**.

- 5 In one embodiment, the flexible conductive cable **30** is firmly attached proximate its first end to the distributing unit **20** or the frame **18** of the charging station **10**. In one embodiment, the conductive cable **30** has a helicoidal shape similar to a phone cable handset, although any other cable adapted for conducting the electrical energy may be used, as it will be apparent to the skilled addressee.
- 10 Figures 2 to 4 illustrate another embodiment of a charging station **200** provided with a device **202** for selectively enabling access to an electrical connector.

Referring to Figures 2 to 4, in one embodiment, the locking unit **24** comprises a protective cover **38** covering the electrical connector **14** when the electrical connector **14** is not in use and is held in the receiving portion **22**. As better shown

15 in Figure 4, in this embodiment, the protective cover **38** is pivotally connected to the frame **18** via an hinge **40** and is pivotable between a locked or closed position wherein the protective cover **38** extends substantially around the electrical connector **14** for preventing access thereto and an unlocked or open position wherein the protective cover **38** is pivoted upwardly for enabling access to the

20 connector **32**. In this position, the user may remove the electrical connector **14** from the receiving portion **22** and connect it to the vehicle for charging the batteries of the vehicle. It should be understood that any device for locking the protective cover **38** when in the closed position may be used.

As it will be appreciated by the skilled addressee, the protective cover **38** enables

25 preventing access to the connector **14** as long as the control unit **26** has not verified the rights of a user to use the charging station **200**.

In a further embodiment, the protective cover **38** is further adapted for preventing infiltration of debris, ice, snow, rain, and/or the like in the receiving portion **22** and eventually in or on the electrical connector **14**. This may be of great advantage

30 for reducing breaks and therefore down operating time during which the electrical

connector **14** may not be operative. This may be particularly advantageous when the electrical connector **14** is used in harsh climatic conditions.

Still referring to Figures 2 to 4, in one embodiment, the protective cover **38** has a substantially cross-sectional U-shape. The protective cover **38** has a front face **42** devised to extend in front of the electrical connector **14** in the locked position. The protective cover **38** has also a first side face **44** and a second opposed side face **46**, each devised to extend on a corresponding side of the electrical connector **14**. As it will become apparent to the skilled addressee, in the locked position, the electrical connector **14** is enclosed in the receiving portion **22** between the protective cover **38** and the walls the charging station **10** and is therefore prevented from being removed from the receiving portion **22**.

Although a hinged U-shaped cover has been described, it is worth mentioning that various other arrangements for preventing a removal of the electrical connector **14** when the locking unit **24** is in the locked position may be considered.

In a further embodiment, the locking unit **24** further comprises a cable protective cover **48** for protecting the conductive cable **30** from surroundings when not in use. As shown in Figures 2 to 4, in one embodiment, the frame **18** of the charging station **10** comprises a lower cable receiving portion **50** which is adapted to receive the conductive cable **30** when the electrical connector **14** is held in the receiving portion **22**. In this embodiment, the cable protective cover **48** is pivotally connected to the frame **18** via an hinge **52** and is pivotable between a locked or closed position wherein the cable protective cover **48** extends in front of the conductive cable **30** and defines a closed area around the conductive cable **30** with the walls of the lower cable receiving portion **50** and an unlocked or open position wherein the cable protective cover **48** is pivoted sidewardly for providing access to the conductive cable **30**. A locking mechanism (not shown) is operatively connected to the cable protective cover **48** for locking the cable protective cover **48** when in the closed position in order to prevent a user access to the conductive cable **30**.

As it will be appreciated by the skilled addressee, the cable protective cover **48** enables preventing access to the conductive cable **30** as long as the control unit **26** has not successfully verified the rights of a user to use the charging station for charging his vehicle.

5 In a further embodiment, the cable protective cover **48** is further adapted for preventing infiltration of debris and also of ice, snow, rain, and/or the like in the cable receiving portion **50**. This may be particularly advantageous when the electrical connector **14** is used in harsh climatic conditions for preventing the conductive cable **30**, and therefore the suit of the user, to be soiled by snow or
10 debris. This may also be of great advantage for preventing theft of the conductive cable **30**.

Although a hinged cable cover has been described, it is worth mentioning that various other arrangements for preventing a removal of the conductive cable **30** from the cable receiving portion **50** and protecting it when the locking unit **24** is in
15 the locked position may be considered.

In one embodiment, the connector protective cover **38** and the cable protective cover **48** may be independent from each other, as described above, even if controlled simultaneously by the control unit **26**. In another embodiment, the two covers **38** and **48** are integral together to form a single cover, such as the hinged
20 door **700** illustrated in Figures 7A to 7C, for concurrently accessing both the electrical connector **14** and the conductive cable **30**. The hinged door **700** may be sized and shaped to protect each of the electrical connector **14** and the conductive cable **30**. A locking mechanism is present for locking the hinged door **700** as long as the control unit **26** has not verified the rights of a user to use the
25 charging station. The cover may be operated like a door, with a vertical hinge for example. As previously mentioned, the skilled addressee will appreciate that various other arrangements may be considered, provided it prevents access to the electrical connector **14** in the locked position.

In another embodiment, the charging station does not comprise a flexible
30 conductive cable **30**. Instead, an electrical connector connected to a source of electrical energy is fixedly secured to the frame **18** in the receiving region **22**. For

example, the electrical connector may be an electrical plug (not shown). In this case, the user may use his own electrical cable to connect the battery of the vehicle to the electrical plug, as known to the skilled addressee. In this case, the protective cover **38** may be similar to the one previously described, except it is specifically sized and shaped to cover the plug and prevents a user from connecting a cable thereto.

Referring to Figure 5, in a further embodiment, the flexible conductive cable **30** is retractably mounted with respect to the frame **18**. This may help returning the conductive cable **30** in its initial position after use, i.e. in the cable receiving portion **50**. Indeed, after use, the user will replace the electrical connector **14** in the receiving portion **50**. The control unit **26** may detect that the user has finished his charging session and may operate a retracting mechanism **52** adapted for retracting the conductive cable **30** in the receiving portion **22**.

In one embodiment, the retracting mechanism **52** comprises a motor **54** fixedly mounted to the frame **18** and a roller **56** driven by the motor **54**. The retracting mechanism **52** further comprises a retracting cable **58**, a steel cable for example, having a first end **60** connected to the roller **56** and a second end **62** attached to the conductive cable **30**. In one embodiment and as illustrated, the retracting cable **58** may be attached to a middle portion of the conductive cable **30** although various other arrangements may be considered. The retracting cable **58** may be mounted inside the conductive cable **30** in one embodiment.

As previously mentioned, upon successful identification of the user, the control unit **26** will unlock the locking unit **24** for enabling access to the electrical connector **14**. In the meantime, in this embodiment, the control unit **26** will release the retracting cable **58** for enabling a convenient use of the conductive cable **30** by the user. In other words, the roller **56** onto which the retracting cable **58** is rolled will be loosen in order to enable free unrolling of the retracting cable **58** when the user will pull the conductive cable **30**. After use, the control unit **26** will operate the motor **54** to roll the retracting cable **58** on the roller **56**. Thus, the conductive cable **30** will naturally return to its original position inside the cable receiving portion **50**. This may be of great advantage since it may ensure that the conductive cable **30** is correctly replaced after use. It also enhances comfort of

the user since he has not to manually place the conductive cable **30** in the receiving portion **50** himself. Moreover, with such a mechanism, the comfort of the next user will also be enhanced since the conductive cable **30** will be correctly placed and will not run on the floor and be soiled.

- 5 In the case where the charging station **10** is used in harsh climatic conditions, this may further enhance comfort of the users since the connector **32** should always be in its receiving portion **22** instead of running on the floor, in ice or snow. Moreover, in such conditions, ensuring the electrical connector **14** is not on the floor may also help reducing breaks caused by motorized snow removal.
- 10 It should be understood that any adequate device adapted to retract the conductive cable in its receiving portion may be used. For example, the retracting mechanism **52** may comprise no motor and the retracting cable may be an elastic cable, for example. In this case, the retracting mechanism may not be controlled by the control unit **26**.
- 15 In a further embodiment, the device **12** for selectively enabling access to an electrical connector further comprises a position sensor **64** mounted proximate the receiving portion **22** and adapted for sensing presence and/or absence of the connector **14** in the corresponding receiving portion **22** of the charging station **10** in order to monitor the position of the connector **14**. The control unit **26** is
- 20 operatively connected to the position sensor **64** and may control a locking sequence of the locking unit **24** according to the repositioning of the connector **32** in its dedicated receiving portion.

In the same or another embodiment, the device **12** for selectively enabling access to an electrical connector comprises a cover position sensor adapted for

25 determining whether the cover is closed and/or a lock position sensor adapted for determining whether the cover is locked. The control unit **26** is operatively connected to the cover position sensor and the lock position sensor. In one embodiment, the control unit **26** is adapted to terminate the transaction only if the cover position sensor indicates that the cover is closed and/or only if the lock

30 position sensor determines that the cover is locked.

The skilled addressee will appreciate that various sensing devices may be used for detecting at least one of the presence and the absence of the electrical connector **14** in the receiving portion **22**. For example, the position sensor **64** may be an optical position sensor, a mechanical position sensor, or the like.

- 5 The skilled addressee will also appreciate that the position sensor **64** may enable various locking sequences of the locking unit **24**. For example, in one embodiment, once the control unit **26** has verified the user's rights to use the charging station, the locking unit **24** is unlocked. Then, the user operates the protective cover **38** in the open position, removes the connector **14** from the
10 receiving portion **22**, connects it to the vehicle, and operates the protective cover **38** back in the locked or closed position. In this embodiment, the control unit **26** detects the opening of the protective cover **38**, the removal of the connector **14**, and the closing of the protective cover **38**. The control unit **26** will then begin transfer of energy and may also lock the protective cover **38** until the charge of
15 the vehicle is finished. In one embodiment, the control unit **26** starts the transfer of energy only if the closing of the protective cover **38** has been detected to force the user to close the protective cover **38** after the removal of the electrical connector **14**. Once the charge of the battery has been completed, the control unit **26** unlocks the protective cover **38** to enable the user to disconnect the
20 battery and position the connector **32** back in the receiving portion **22**. The control unit **26** does not terminate the operation of the user until the connector **32** is not returned in the suitable position, i.e. until the position sensor determines that the electrical connector has been adequately positioned in the receiving portion **22**, in order to force the user to position the electrical connector **14** back
25 in the receiving portion **22**.

The skilled addressee will appreciate that various other operating sequences for the operation of the locking unit may be implemented.

- In a further embodiment, additional sensors may be used for monitoring the closed position and the open position of the protective cover **38** and the closed
30 position and the open position of the cable protective cover **48**. This may enable implementing enhanced operating sequences for the locking unit.

In one embodiment, the control unit **26** may communicate with a user interface **66** mounted on the front face of the charging station **10**. The user interface **66** may comprise a display **68** for displaying various information to the user, such as instructions for operating the charging station, the cost of the battery recharge, and the like, as well as a set of leds **70** used for providing visual indications such as the state of the charging station **10**.

Referring to Figure 6, in one embodiment, the electrical connector **14** comprises a handle **72** connected to the conductive cable **30** in order to provide an easy grip to the user. In one embodiment, the handle **72** is independent from the connector **32**. In a further embodiment, an additional handle **74** may also be provided on the conductive cable **30** distal from the first handle **72** to further enhance manipulation of the conductive cable **30**.

Still referring to Figure 6, in one embodiment, the charging station **10** comprises a communication unit **80** mounted on the top of the control unit **26** or on the top of the frame **18**. The communication unit **80** may comprise an antenna for enabling RF communication between the charging station **10** and the vehicle or a portable identification device for example. In a further embodiment, the communication unit **80** may enable a wireless communication over a network with a remote central control station operating a set of charging stations, as known to the skilled addressee. In one embodiment, the communication unit **80** may be used for updating the embedded software of the control unit **26**.

The skilled addressee will appreciate that in one embodiment, the described charging station is well adapted for used in harsh climatic conditions. Indeed, the frame, the control unit and the distributing unit are mounted together using snugly couplings between the elements. Moreover, covers are used to protect the elements of the electrical connector from surroundings. This may help preventing debris, sand and precipitation from accumulating inside the charging station. The communication unit which is installed on the top of the frame for enhancing communication may also be snugly mounted with the frame for preventing unwanted insertion of debris in the charging station.

Although the above description relates to specific preferred embodiments as presently contemplated by the inventors, it will be understood that the invention in its broad aspect includes mechanical and functional equivalents of the elements described herein. Moreover, although the invention has been described in the particular application of electricity dispensing for electric or hybrid vehicles, it should be understood that the invention may be used in various other applications.

WHAT IS CLAIMED IS:

1. An electric vehicle charging station for charging an electric vehicle, comprising:
 - 5 an electrical connector electrically connectable to a source of electrical energy, the electrical connector adapted for connecting to a battery of the electric vehicle;
 - a frame having a connector receiving portion for receiving the electrical connector;
 - 10 a locking unit mounted to the frame for preventing a user access to the electrical connector; the locking unit comprising a connector cover movable between a closed position in which the electrical connector is enclosed in the receiving portion to prevent the user access to the electrical connector, and an open position in which the electrical connector is accessible and removable from
 - 15 the receiving portion, and a connector locking mechanism for locking the connector cover when in the closed position; and
 - a control unit operatively connected to the locking unit, the control unit for verifying rights of a user to access the electrical connector and unlocking the locking unit upon successful verification of the user rights to provide the user
 - 20 access to the electrical connector.
2. The electric vehicle charging station of claim 1, further comprising an electrical cable having a first end connected to the electrical connector and a second end connectable to the source of electrical energy.
- 25 3. The electric vehicle charging station of claim 1, wherein the connector cover is shaped and sized to cover substantially an entirety of the electrical connector when inserted in the connector receiving portion.
- 30 4. The electric vehicle charging station of claim 3, wherein the connector cover is pivotally secured to the frame.

5. The electric vehicle charging station of any one of claims 4 to 5, wherein the frame further comprises a cable receiving portion for receiving the electrical cable.

5 6. The electric vehicle charging station of claim 5, further comprising a cable cover pivotally secured to the frame adjacent to the cable receiving portion and movable between a first position in which the electrical cable is enclosed in the cable receiving portion to prevent the user access to the electrical cable, and a
10 the cable receiving portion, and a cable locking mechanism controlled by the control unit for locking the cable cover when in the first position.

7. The electric vehicle charging station of claim 6, wherein the connector cover is integral with the cable cover.

15

8. The electric vehicle charging station of claim 5, wherein the electrical cable is retractably mounted to the frame in order to retract the electrical cable in the cable receiving portion of the frame.

20 9. The electric vehicle charging station of claim 8, further comprising a motor, a roller secured to the frame and drivable by the motor, and a retracting cable having a first end secured to the roller and a second end secured to the electrical cable, the motor being controlled by the control unit for rolling the retracting cable on the roller in order to retract the electrical cable in the cable receiving portion.

25

10. The electric vehicle charging station of any one of claims 2 to 9, further comprising a position sensor for determining whether the electrical connector is positioned in the connector receiving portion, the control unit being connected to the position sensor and adapted to terminate a transaction for the user only when
30 the position sensor determines that the electrical connector is positioned back in the connector receiving portion.

11. The electric vehicle charging station of claim 1, wherein the electrical connector is fixedly secured to the frame in the connector receiving portion.

12. The electric vehicle charging station of any one of claims 1 to 11, wherein the control unit is adapted to identify the user and unlock the locking unit upon successful identification of the user.

5

13. A method for charging an electric vehicle, comprising:

at an electric vehicle charging station, verifying rights of a user to use the charging station for charging the electric vehicle;

upon successful verification, unlocking a locking unit mounted to a frame
10 of the charging station, the locking unit preventing the user access to an electrical connector electrically connected to a source of electrical power and positioned in a receiving portion of the frame, thereby providing the user access to the electrical connector, said unlocking the locking unit comprising unlocking a locking mechanism operatively connected to a connector cover movable between
15 a closed position in which the electrical connector is enclosed in the receiving portion, thereby preventing the user access to the electrical connector, and an open position in which the electrical connector is accessible and removable from the receiving portion; and

the user electrically connecting a battery of the electric vehicle to the
20 electrical connector, thereby charging the electric vehicle.

14. The method of claim 13, wherein said verifying rights comprises identifying the user.

25 15. The method of claim 13, wherein said verifying rights comprises receiving a payment from the user.

16. The method of claim 13, wherein the step of the user electrically connecting the battery comprises:

30 the user opening the connector cover, electrically connecting the battery to the electrical connector, and closing the connector cover; and
providing electrical energy to the battery via the electrical connector.

17. The method of claim 16, further comprising:
- locking the connector cover during said providing electrical energy to the battery;
 - unlocking the connector cover once the battery is recharged;
 - 5 said user disconnecting the battery and positioning the electrical connector back in the receiving portion;
 - terminating an operation of the user only when the electrical connector has been positioned back in the receiving portion; and
 - locking the connector cover.

1/7

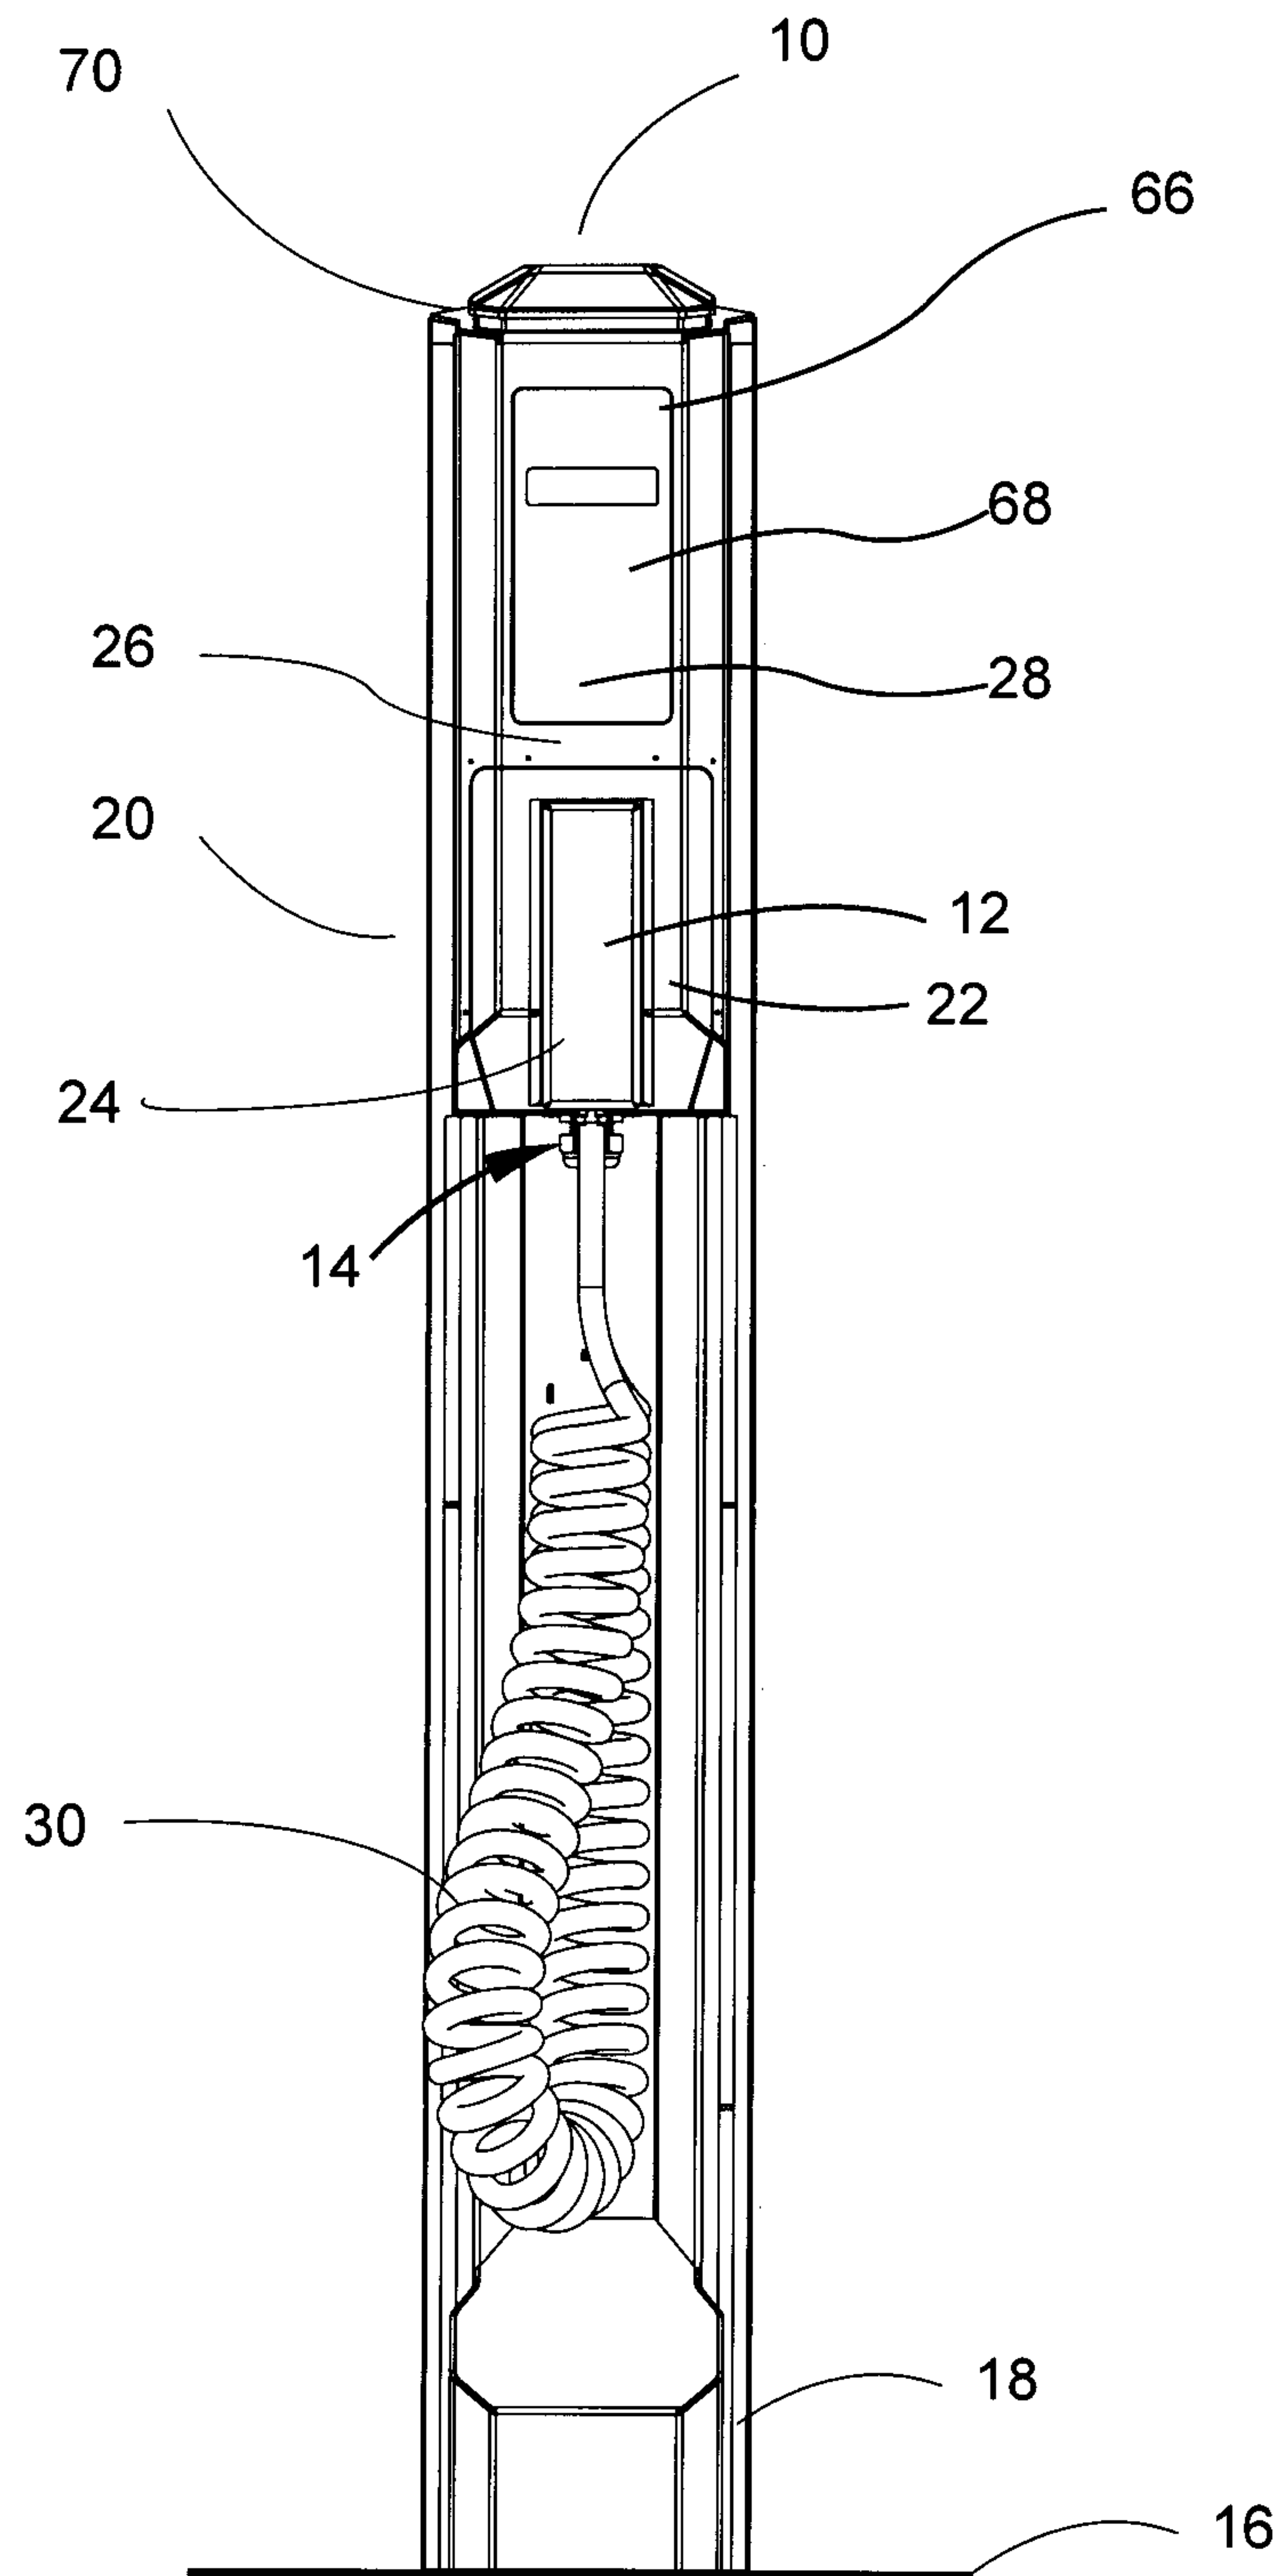


FIG.1

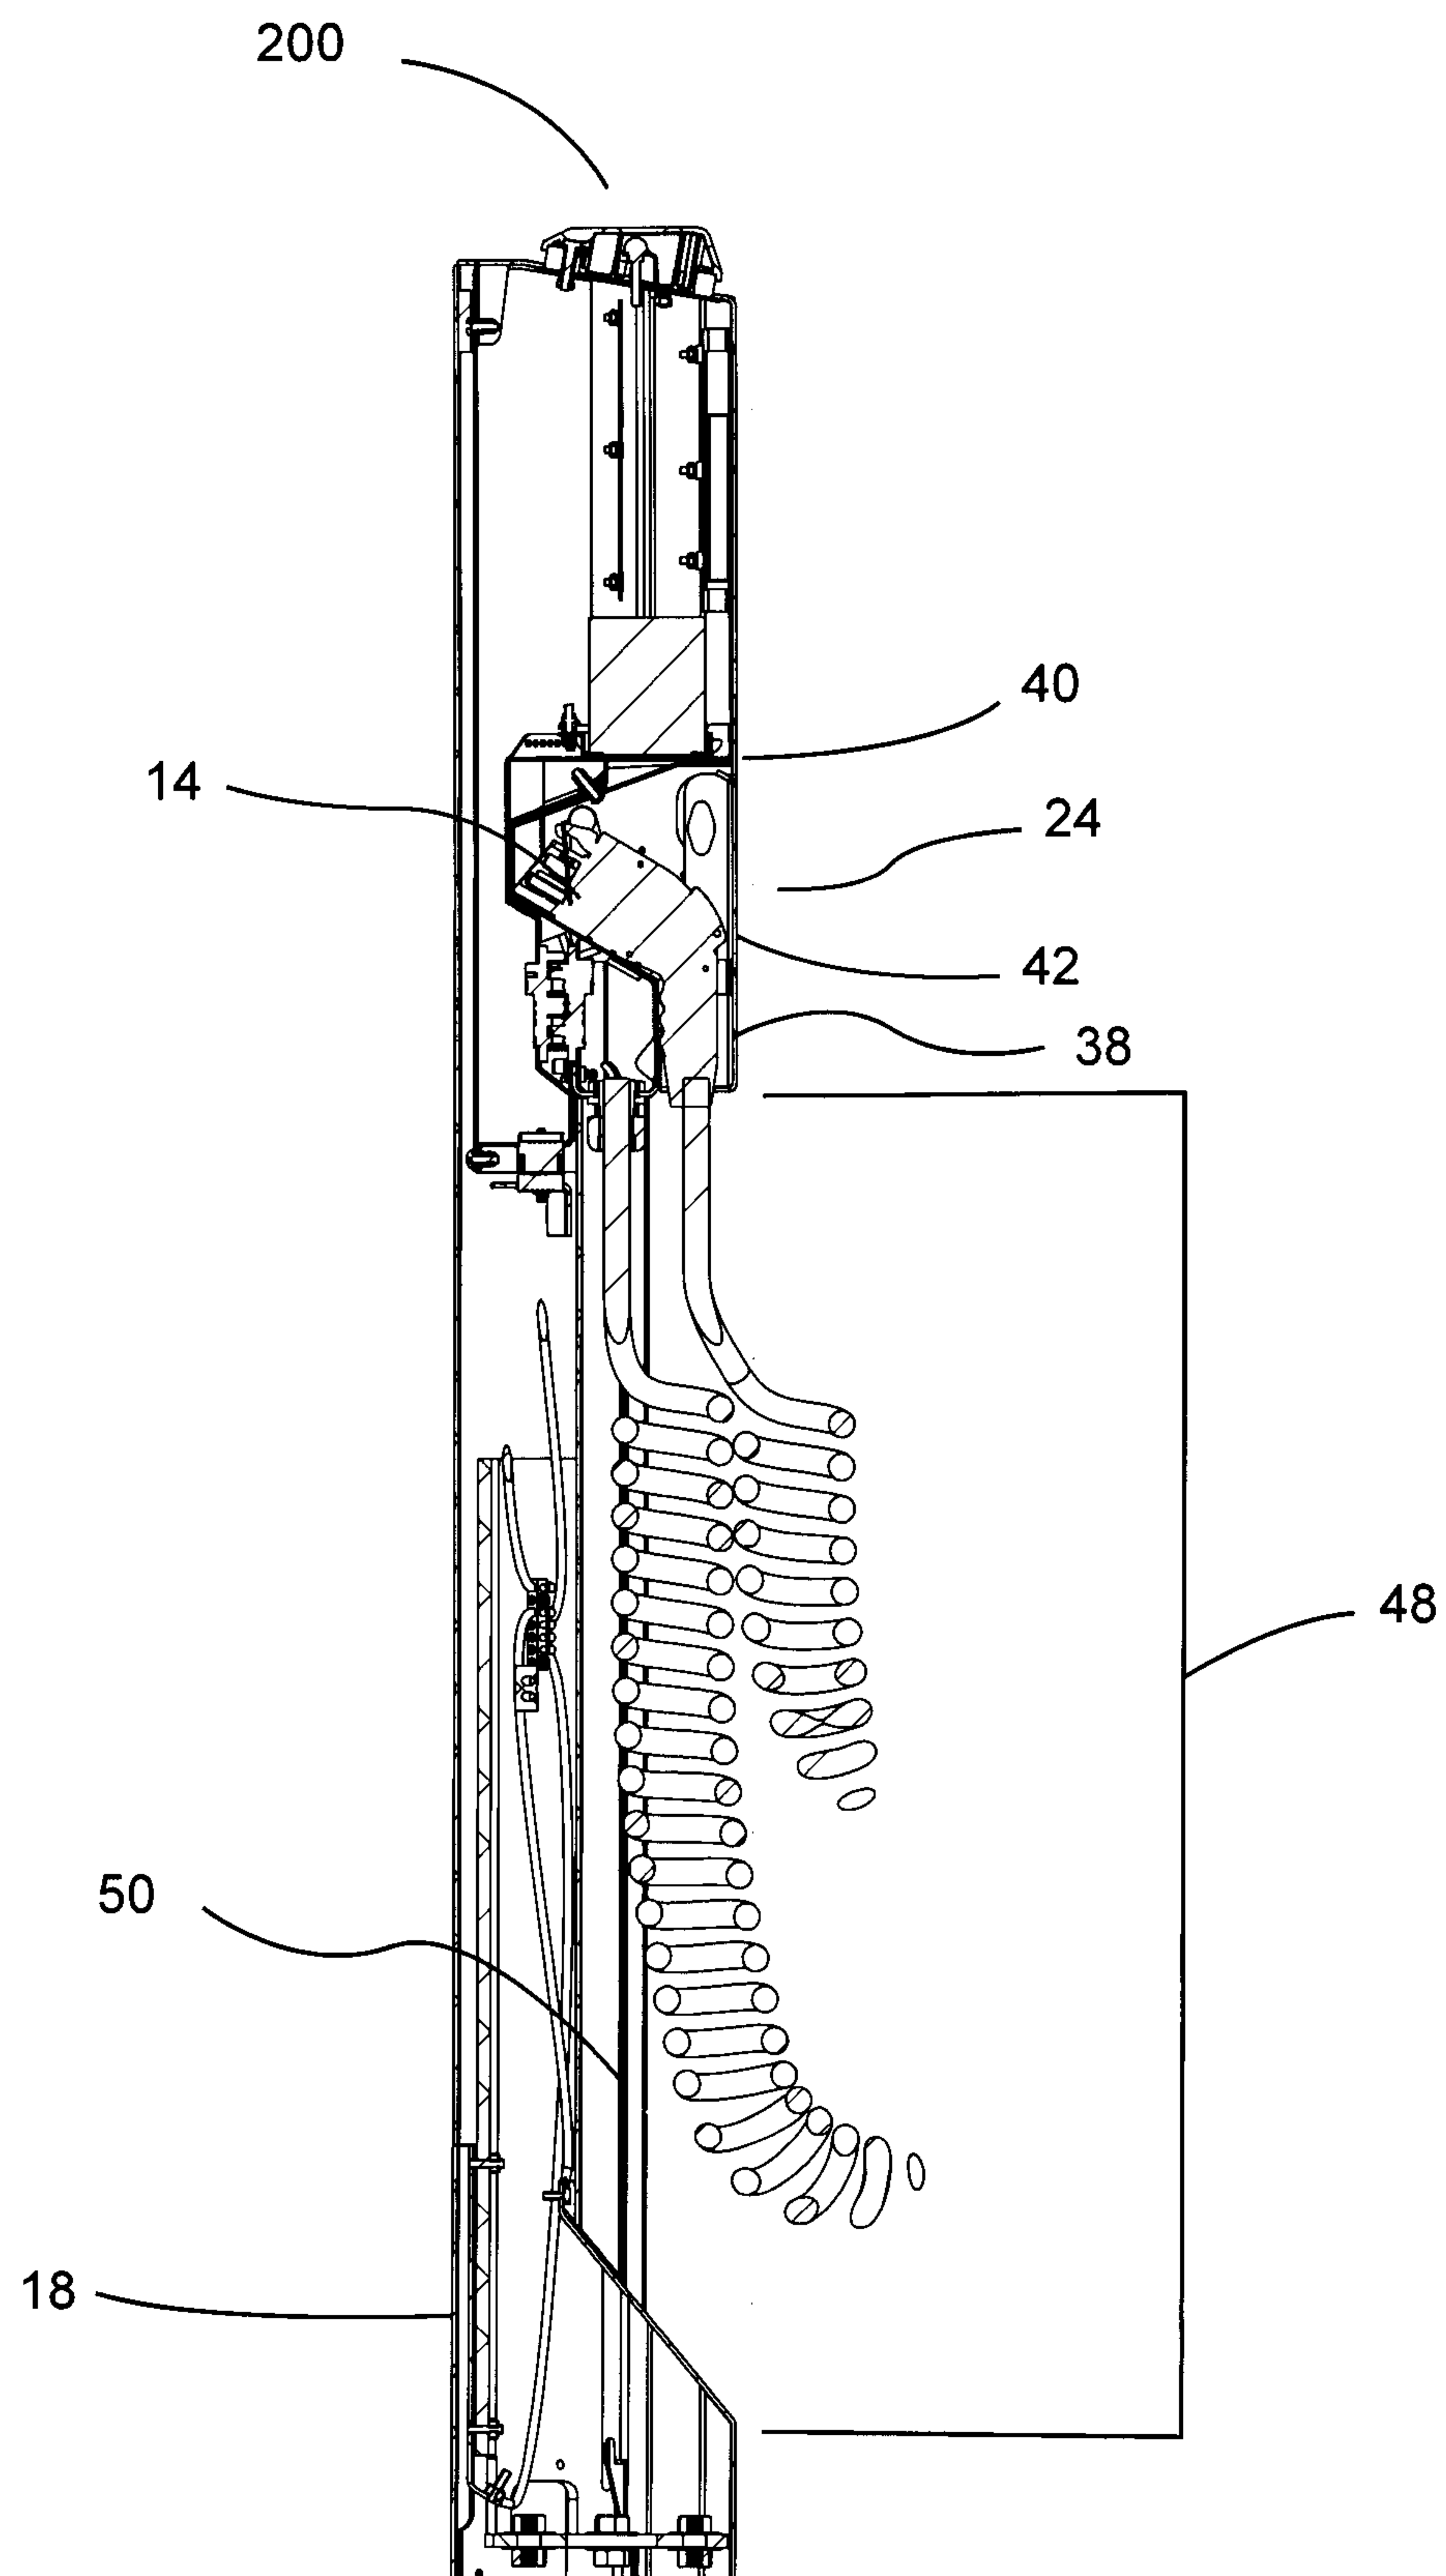


FIG. 2

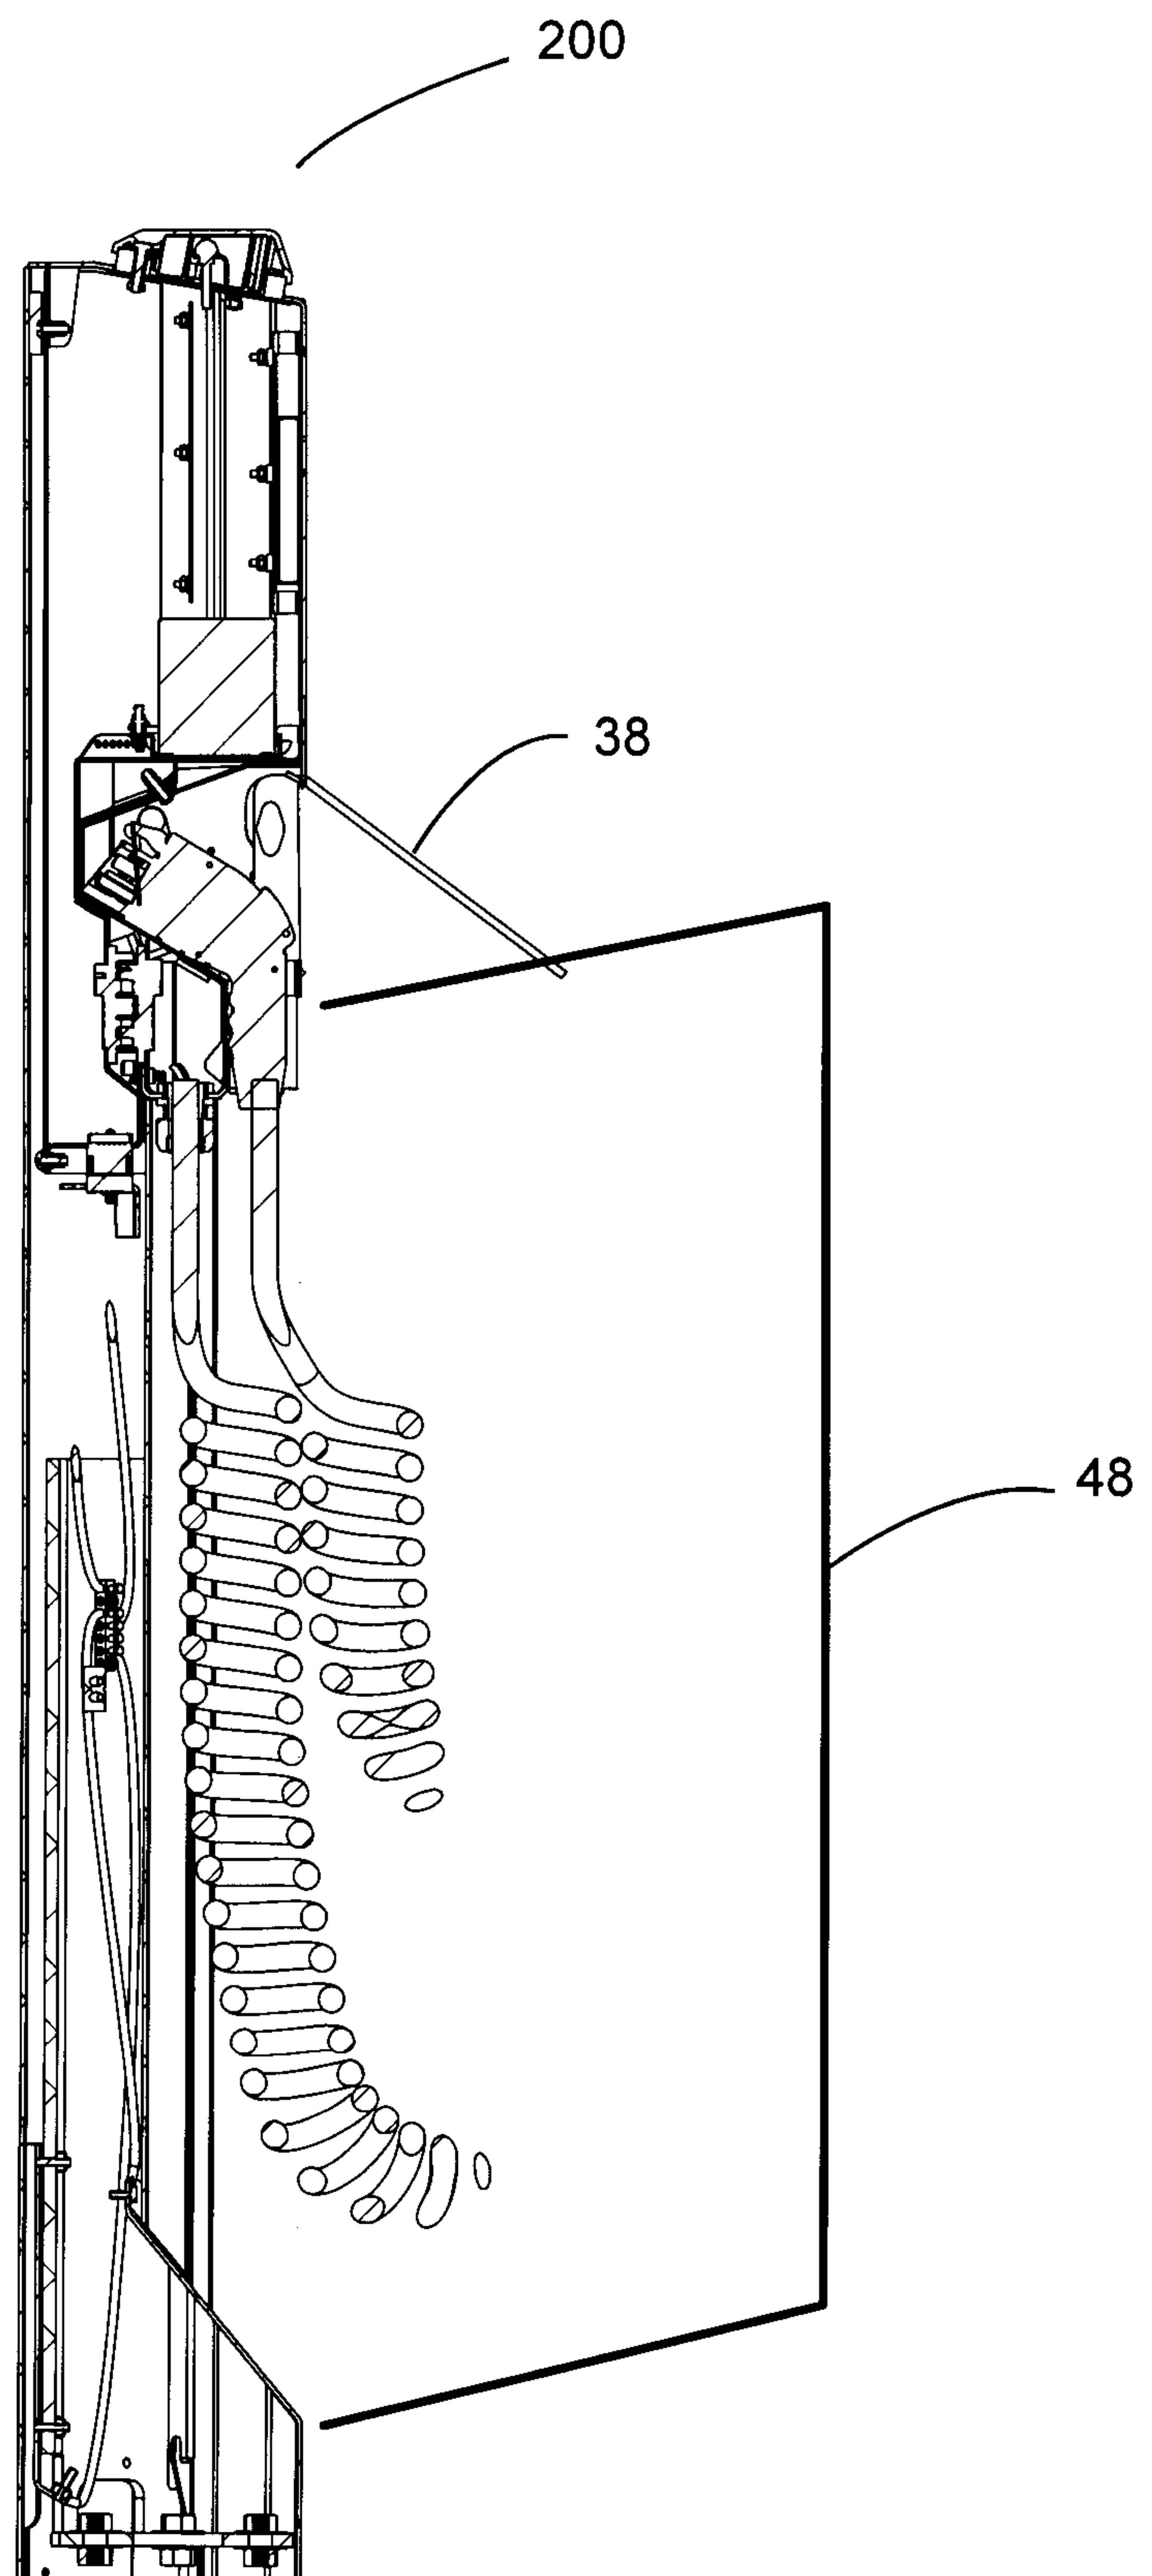


FIG. 3

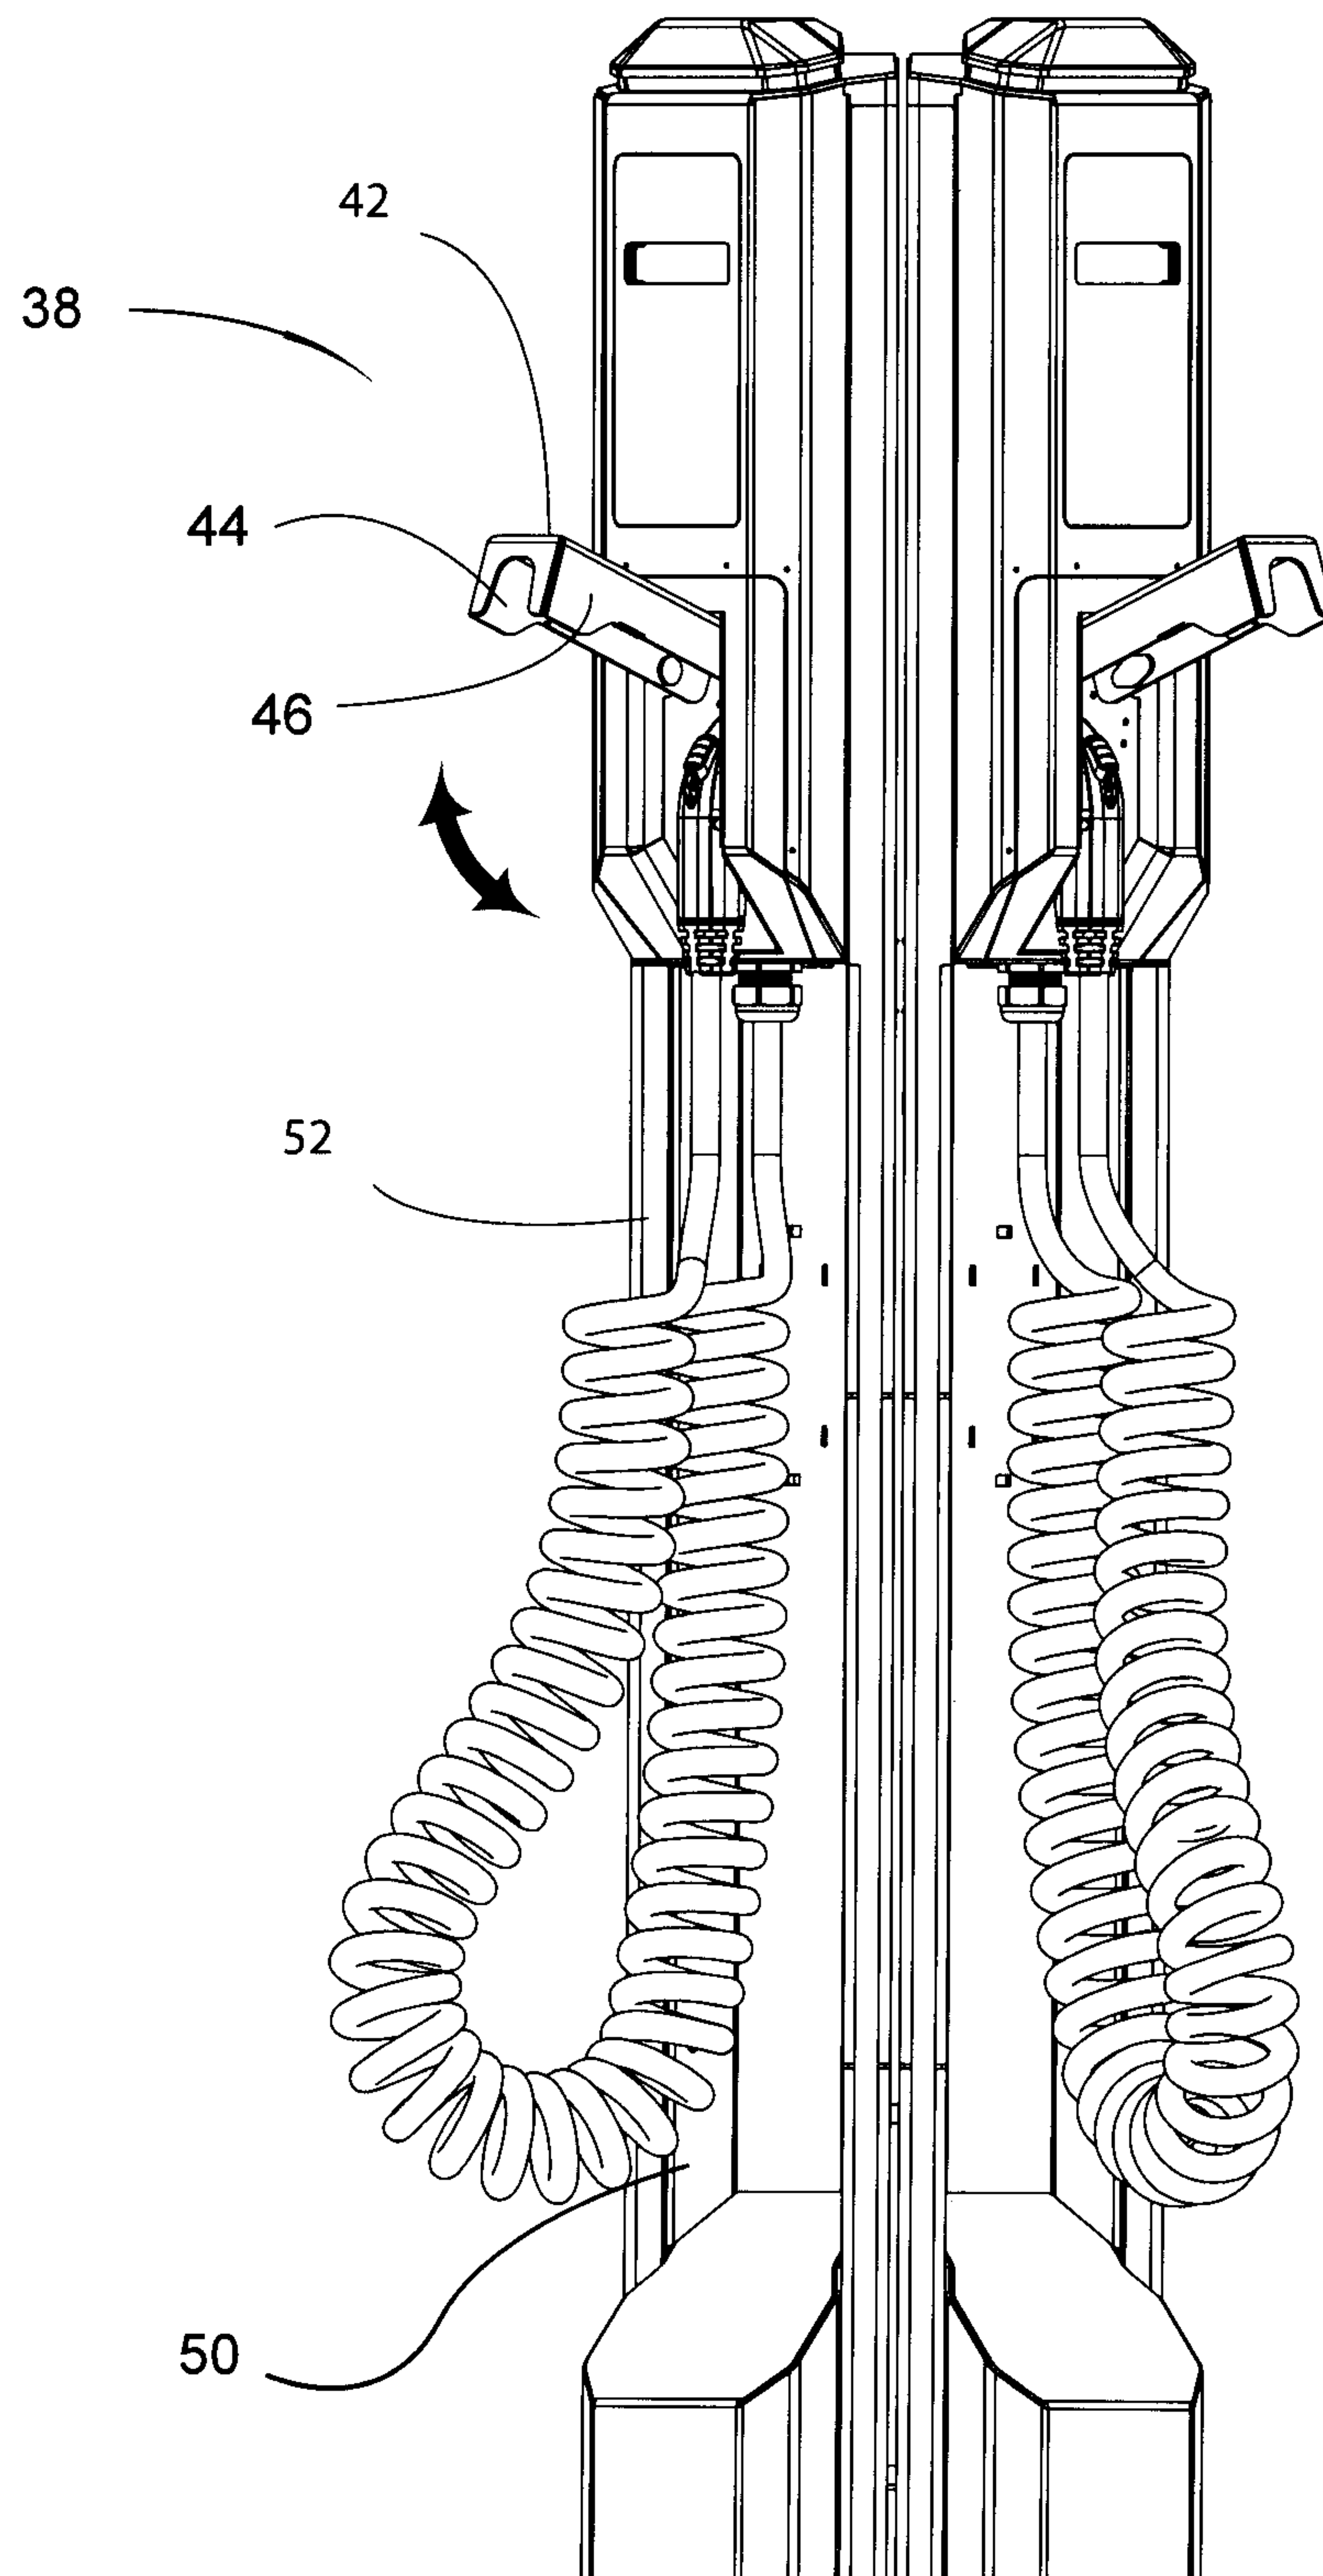


FIG.4

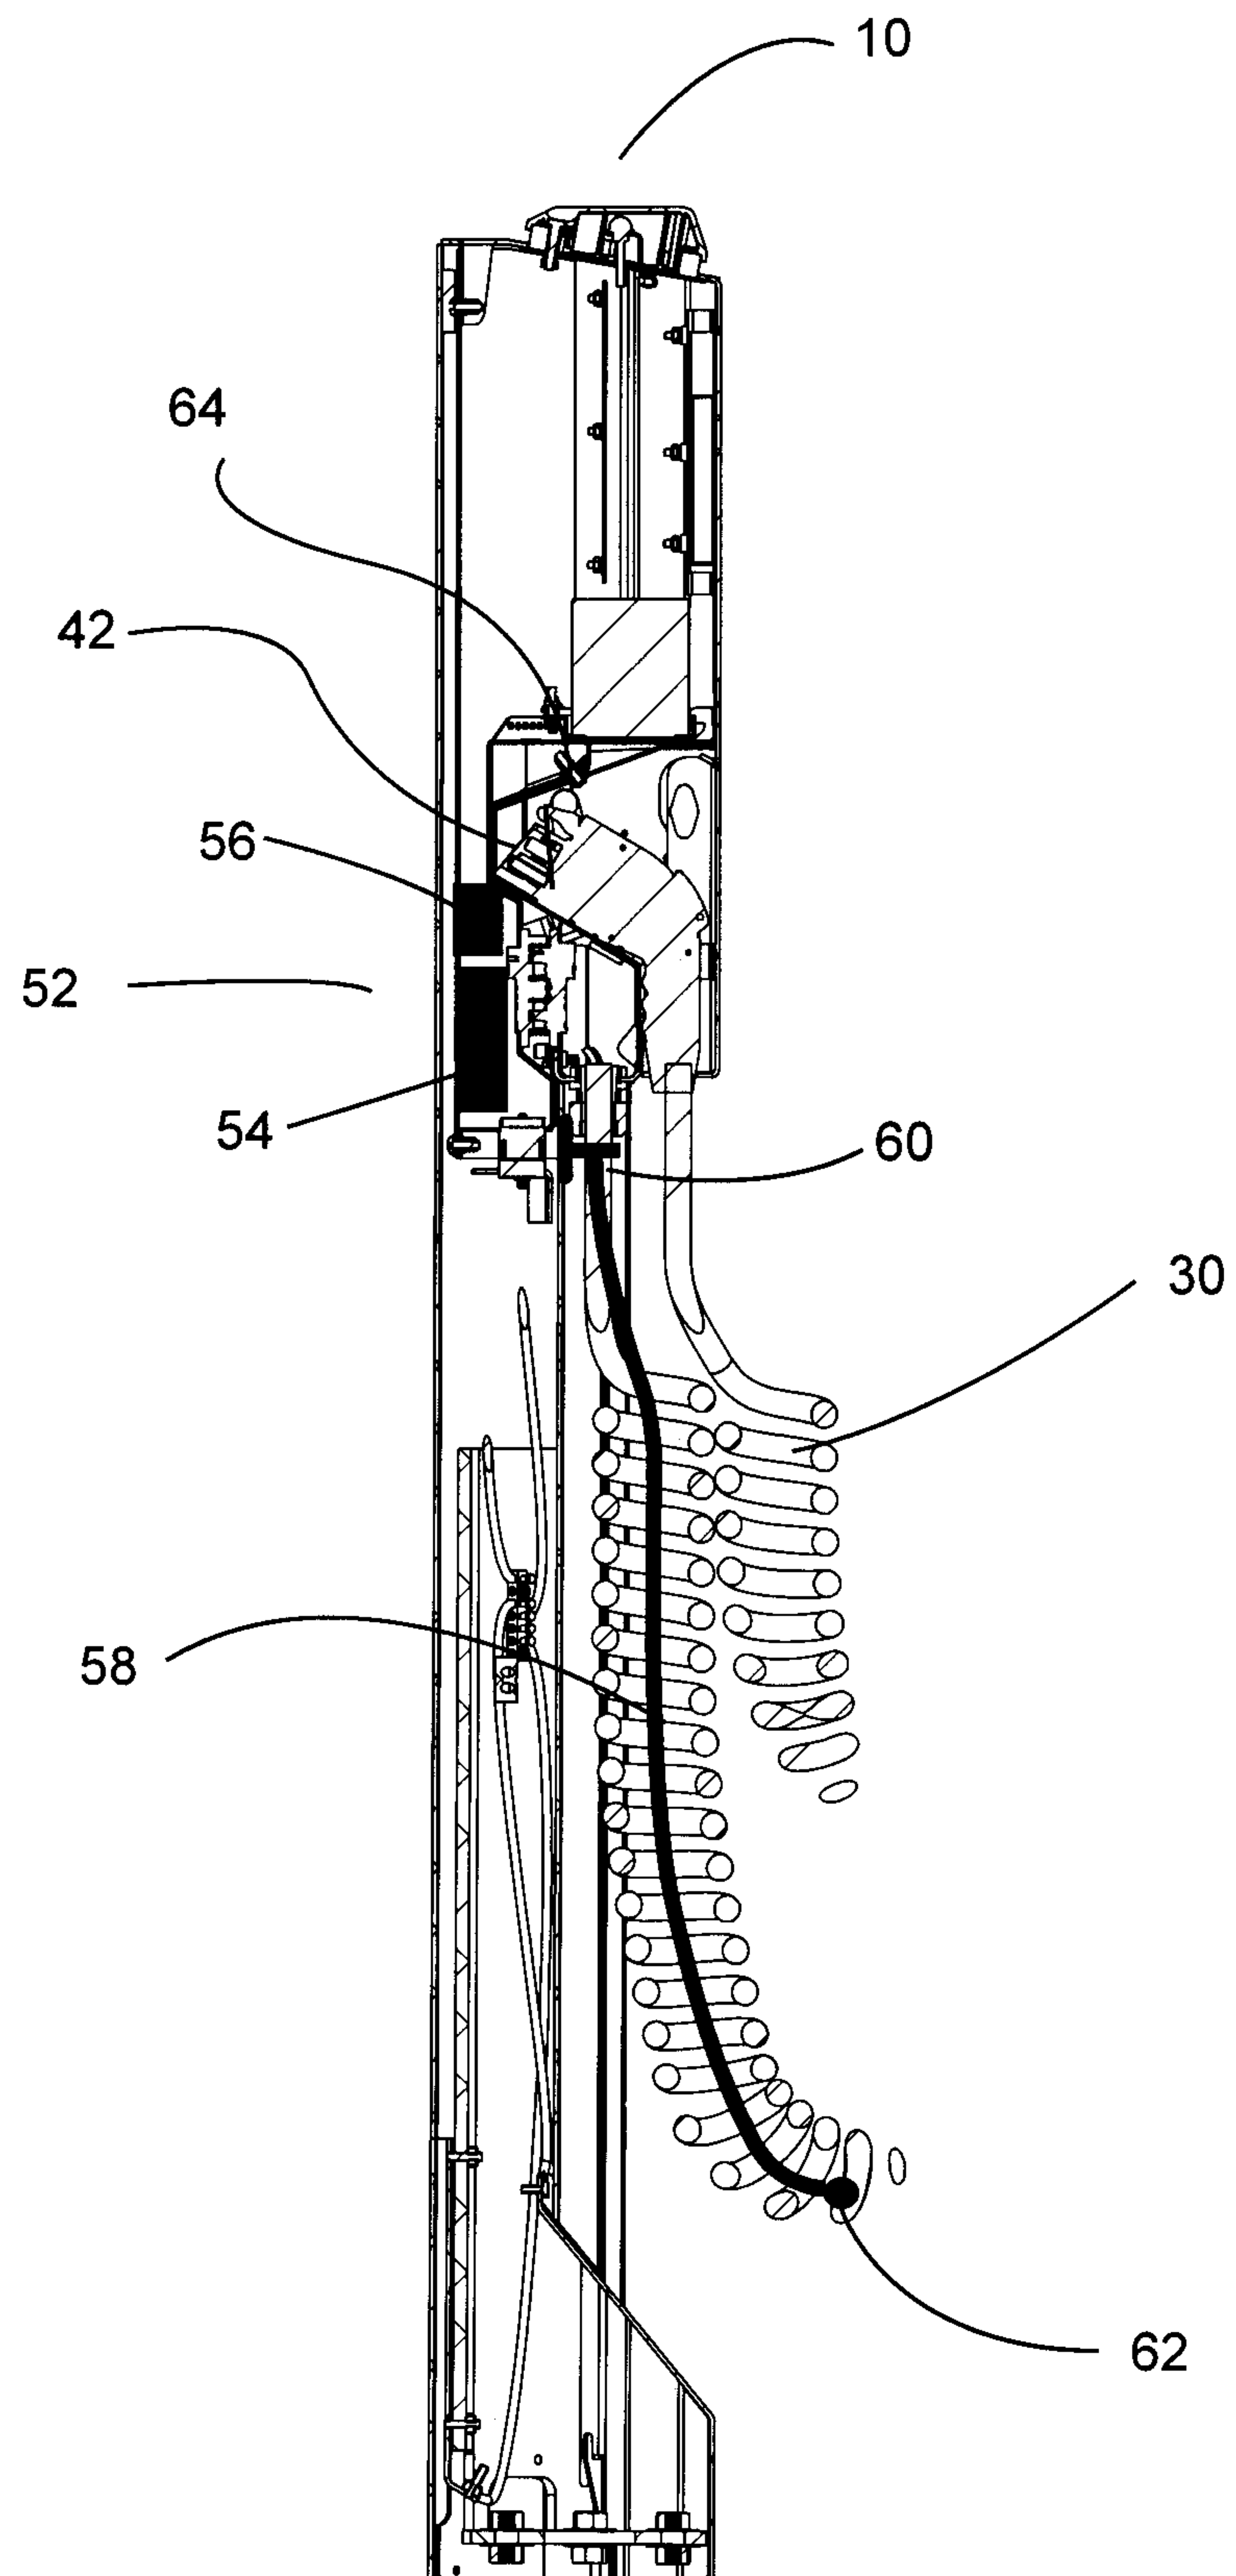


FIG.5

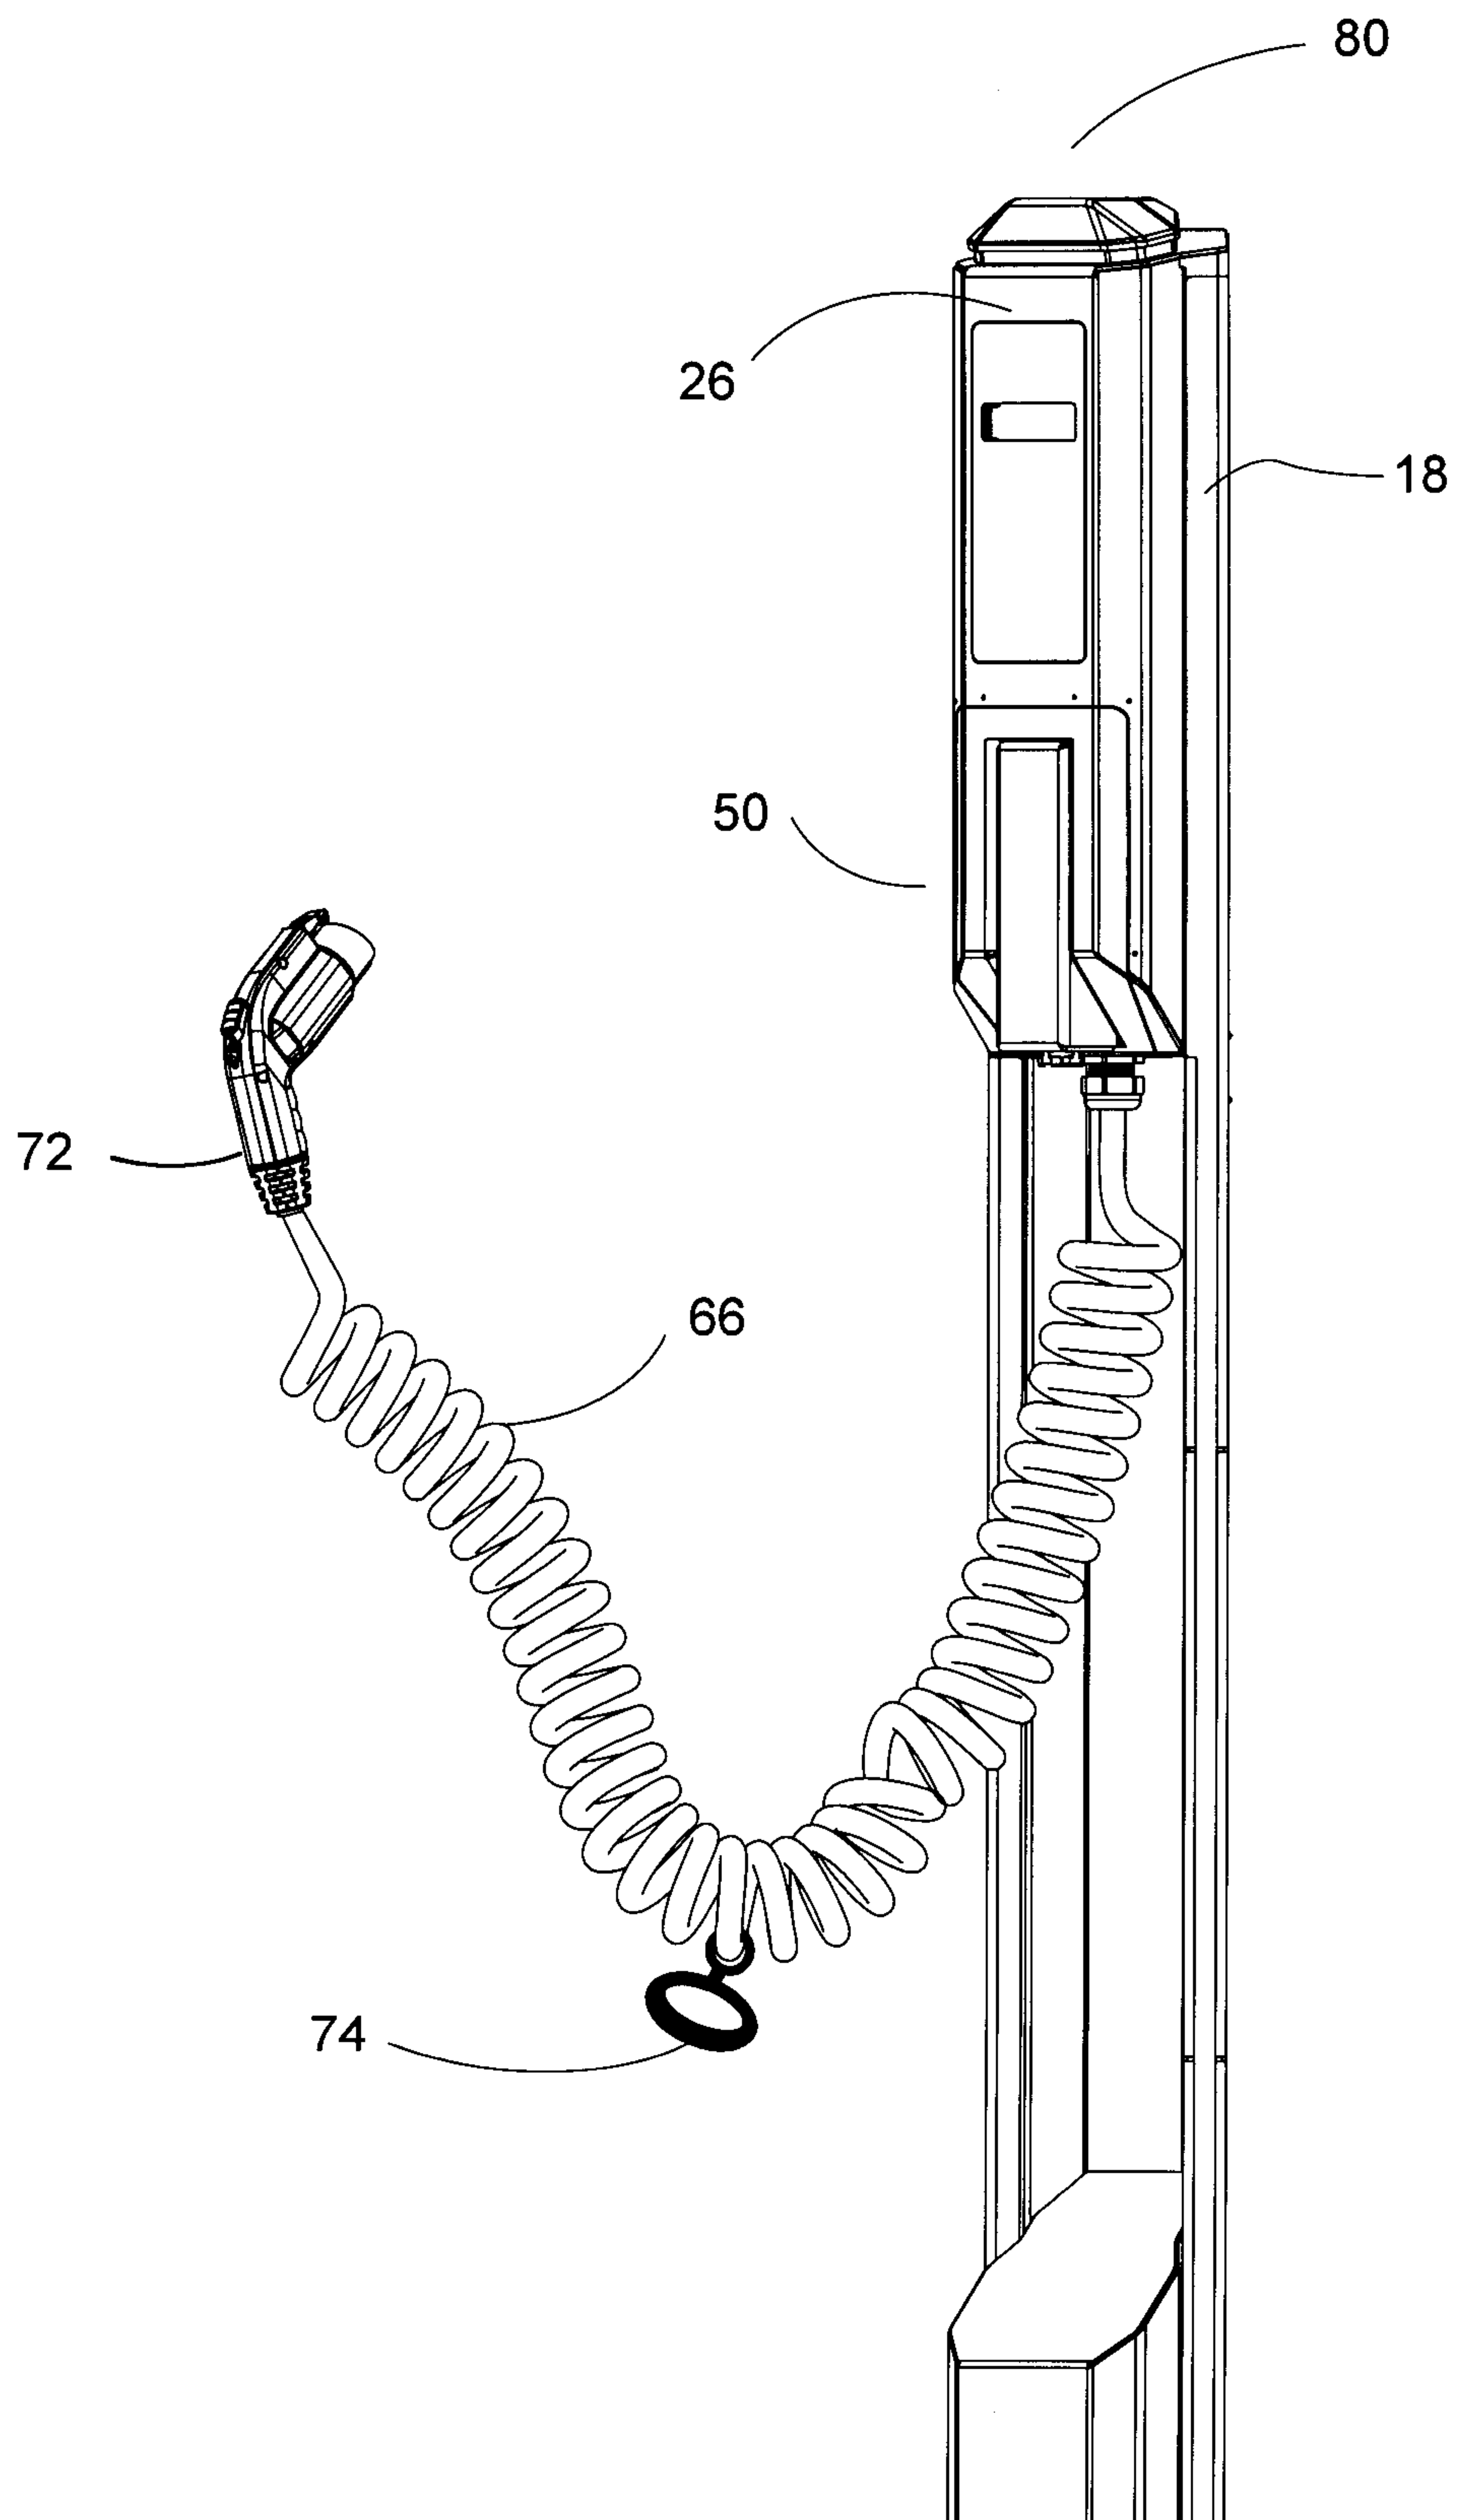


FIG. 6



FIG. 7A

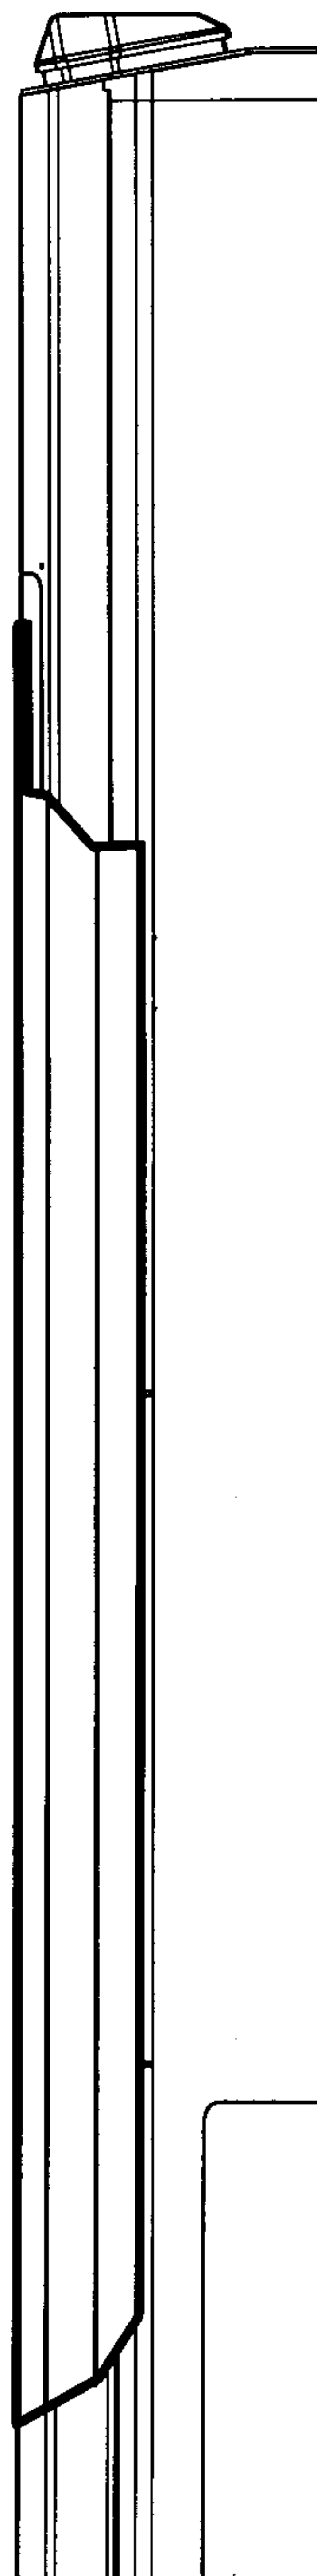


FIG. 7B

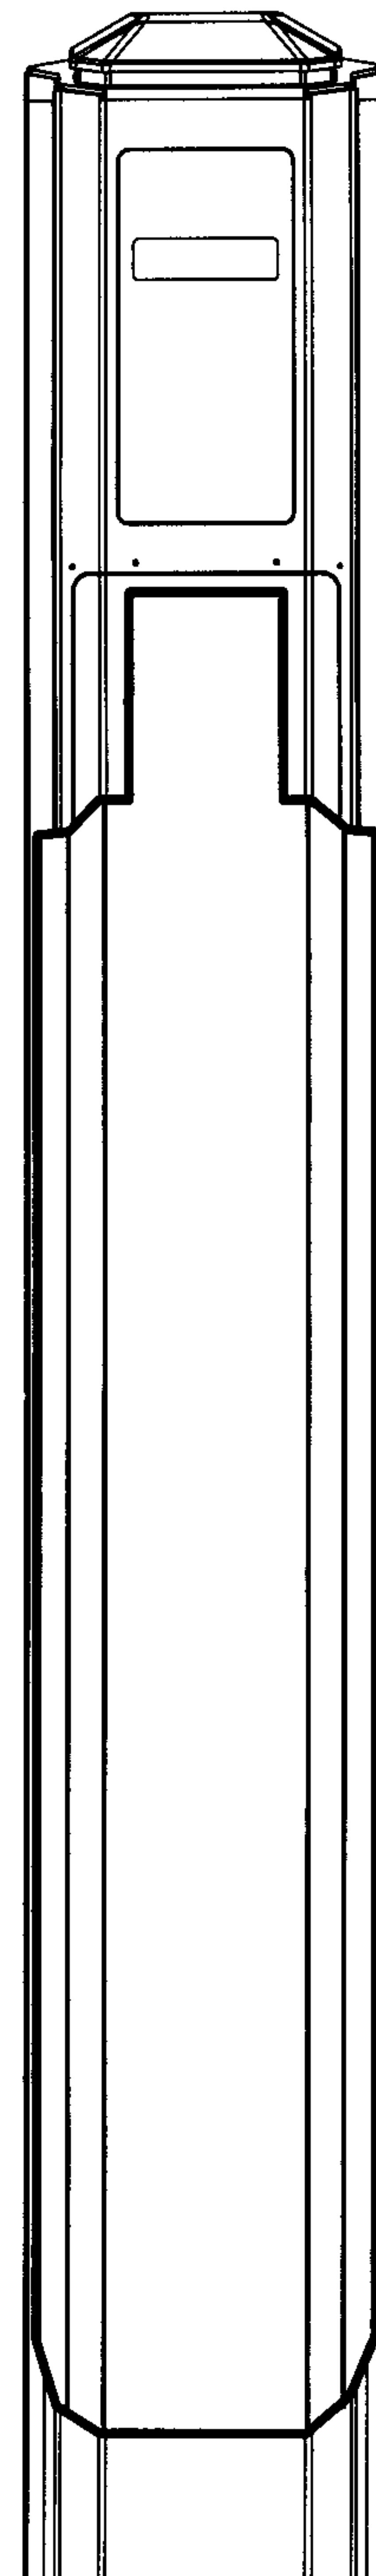


FIG. 7C

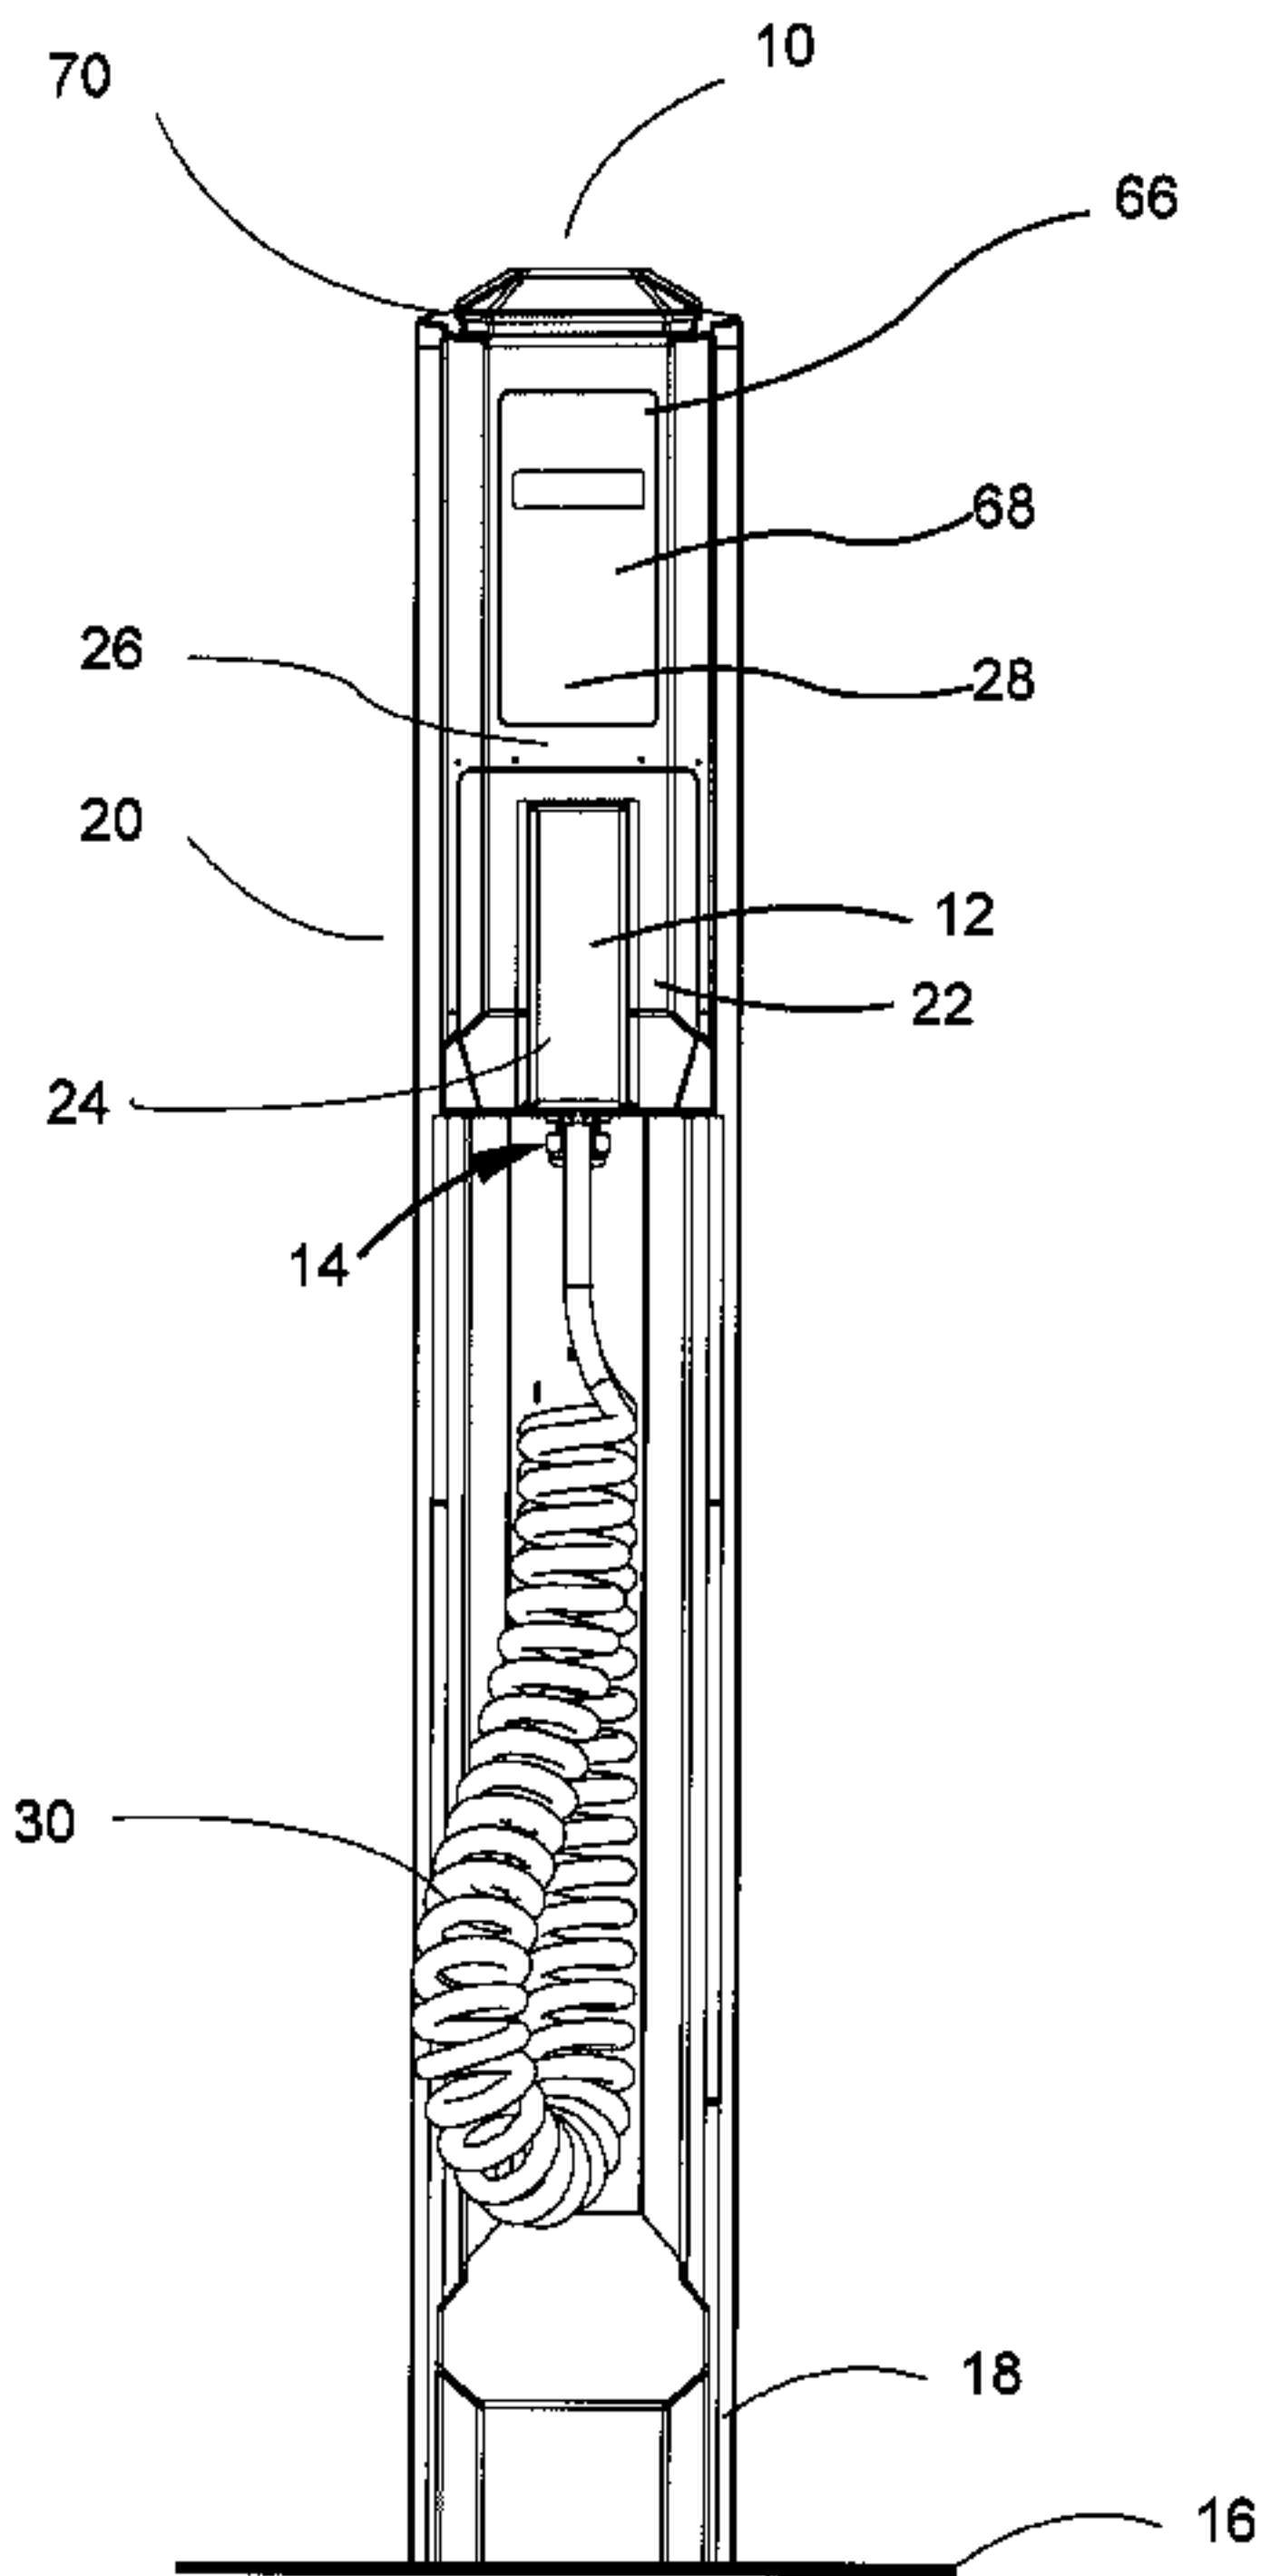


FIG.1