



- (51) International Patent Classification:
H04W 4/06 (2009.01) *H04L 29/06* (2006.01)
- (21) International Application Number:
PCT/EP2012/071065
- (22) International Filing Date:
24 October 2012 (24.10.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HUAWEI TECHNOLOGIES CO., LTD.** [CN/CN]; Huawei Administration Building, Bantian Longgang, Shenzhen, Guangdong 518129 (CN).
- (72) Inventors; and
- (71) Applicants (for US only): **BOUAZIZI, Imed** [TN/DE]; Huawei Technologies Duesseldorf GmbH, Riesstr. 25, 80992 Munich (DE). **CORDARA, Giovanni** [IT/DE]; Huawei Technologies Duesseldorf GmbH, Riesstr. 25, 80992 Munich (DE). **KONDRAD, Lukasz** [PL/DE]; Huawei Technologies Duesseldorf GmbH, Riesstr. 25, 80992 Munich (DE).
- (74) Agent: **KREUZ, Georg M.**; Huawei Duesseldorf GmbH, Dessauerstr. 3, 80992 Munich (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMMUNICATION RECEIVER

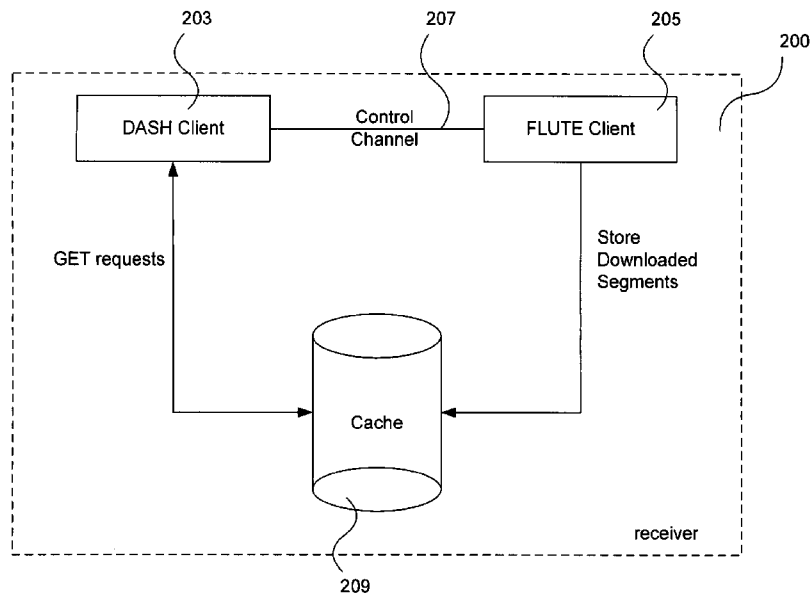


Fig. 2

(57) Abstract: The invention relates to a communication receiver (200), comprising a first client (203) being configured for reception according to the dynamic adaptive streaming over the HTTP protocol, and a second client (205) being configured for reception according to the File Delivery over Unidirectional Transport protocol; wherein the first client (203) is configured to provide a retrieve pattern to the second client (205), and wherein the second client (205) is configured to retrieve a media content according to the retrieve pattern.

WO 2014/063730 A1

Published:

— *with international search report (Art. 21(3))*

DESCRIPTION**Communication receiver**5 BACKGROUND OF THE INVENTION

The present invention relates to the field of multimedia media content delivery.

10 For multimedia content delivery, media presentation description (MPD) of dynamic adaptive streaming over http (DASH) can be used, specified in 3GPP TS 26.247, which appeared earlier as part of the Packet-Switched Streaming (PSS) service, 3GPP TS 26.234.

15 In order to deliver files over the internet, also the File Delivery over Unidirectional Transport (FLUTE) [RFC 3926] can be used. FLUTE is a protocol for unidirectional delivery of files over the Internet. The specification builds on Asynchronous Layered Coding (ALC) [RFC 3450], the base protocol designed for massively scalable multicast distribution.

20 For serving large groups with the same media content, the Multimedia Broadcast Multicast Service (MBMS) can be employed. The MBMS Download Delivery Method is designed to deliver an arbitrary number of objects via MBMS to a large receiver population. Two delivery methods are defined in MBMS, 3GPP TS 26.346, namely download and streaming.

25 MBMS download delivery method uses the FLUTE protocol [RFC 3926] when delivering media content over MBMS bearers.

DASH as defined in 3GPP TS 26.247 specifies formats and methods that enable the delivery of streaming service(s) from standard HTTP servers to DASH client(s). It involves the description of a collection of media segments and auxiliary metadata (all referenced by HTTP-URLs) through a Media Presentation Description (MPD).

30

The download delivery method, i.e. MBMS, allows the delivery of DASH segments and Media Presentation Descriptions as defined in 3GPP TS 26.247. Segment URIs are described using FLUTE.

35 The network may announce the usage of MBMS download delivery method for providing the Media Segments for DASH through the MBMS User Service Description. In such an event,

the MBMS User Service Description fragment shall include a media Presentation Description element. This element contains a reference to a Media Presentation Description metadata fragment as defined in 3GPP TS 26.247. Consequently, the User Equipment (UE) can expect that the files provided with the MBMS download delivery method are formatted according to the 3GP file format for Dynamic Adaptive Streaming over HTTP as specified in 3GPP TS 26.244. Furthermore, the Media Presentation Description fragment may contain reference(s) to Initialisation Segment Description fragment(s) as defined in 3GPP TS 26.247.

In order to start consuming a DASH service delivered over MBMS, an MBMS client has to perform the following steps:

1. Receive the User Service Bundle Description.
2. Map the Media Presentation Description to the corresponding Delivery Method.
3. Set-up the reception of MBMS user service data.
4. Receive FDT instance from ALC/LCT session.
5. Map the URL of the chosen representation to the Transport Object Identifier (TOI) using received FDT instance.
6. Store the received object in the UE cache, which can be fetching by DASH client using GET request.

In the process of initializing DASH media content reception transmitted over MBMS a reception of the FDT instance introduces delay which negatively impacts the quality of experience. Before any segment ('object') of the chosen representation is received from the MBMS session, an FDT instance must first be received. An FDT instance is transmitted periodically over the ALC/LCT session. The introduced delay depends on the time interval the FDT instance is sent on.

Delivering DASH media content over MBMS for devices that support MBMS reception may be performed by operating a FLUTE client in one of the supported modes. The FLUTE client supports 2 operation modes:

1. Download-all mode: in this mode the FLUTE client is instructed to download all files (transport objects) in the session, or
2. Request-based mode: in this mode the FLUTE client is instructed about which files the FLUTE client should download.

However, by the time the DASH client sends the request for a media segment, it might be already being transmitted over the FLUTE session (ALC/LCT session) or the transmission might be already over. This can cause additional delays to enable the FLUTE client to
5 recover the file.

On the other hand, the Download-all mode may not be appropriate in all scenarios as the FLUTE client will download all file sent over the session and this would lead to excessive storage usage, especially when multiple representations are transmitted simultaneously over
10 the same MBMS session.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide an efficient concept for multimedia media
15 content delivery.

This object is achieved by the features of the independent claims. Further implementation forms are apparent from the dependent claims, the description and the figures.

20 According to a first aspect, the invention relates to a communication receiver, comprising a first client being configured for reception according to the dynamic adaptive streaming over the HTTP protocol and a second client being configured for reception according to the File Delivery over Unidirectional Transport protocol, wherein the first client is configured to provide a retrieve pattern to the second client, and wherein the second client is configured to
25 retrieve, e.g. receive or download or extract, media content according to the retrieve pattern.

In a first implementation form of the first aspect, the first client is configured to provide the retrieve pattern to the second client 205 over a control channel.

30 In a second implementation form of the first aspect as such or of the first implementation form of the first aspect, the second client is configured to download the media content from a remote transmitter according to the retrieve pattern over a FLUTE session in order to receive the media content.

In a third implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the first client is configured to receive a media presentation description (MPD) comprising the retrieve pattern from a remote transmitter, and to retrieve the retrieve pattern from the received media presentation description (MPD).

In a fourth implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the media content is a transport object according to the File Delivery over Unidirectional Transport (FLUTE) protocol, the transport object being identifiable by a Transport Object Identifier (TOI) value. The transport objects can be segments of one Representation or Sub-Representation of a dynamic adaptive streaming over the HTTP media content.

In a fifth implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the retrieve pattern comprises a prefix of transport object URLs of the media content, in particular a URL of a set of transport objects. The retrieve pattern can be based in a prefix of the transport object URL, for example being the path of the URL.

In a sixth implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the retrieve pattern comprises a transport object identifier range of transport object identifier values or a prefix of transport object identifier values.

In a seventh implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the retrieve pattern comprises URL of the media content.

In an eighth implementation form of the sixth or seventh implementation form of the first aspect, the transport object identifier (TOI) range or the prefix of transport object identifier values, or the prefix of transport object URLs, represent segments of a representation of a media presentation description (MPD) . The TOI range can be extracted from the extended MPD.

In an ninth implementation form of the eighth implementation form of the first aspect, the second client is configured to download a set of segments that are described by transport object identifier (TOI) values that fall into the transport object identifier range.

10 In a tenth implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the second client is configured to receive DASH streaming media content.

In a eleventh implementation form of the first aspect as such or of one of the preceding implementation forms of the first aspect, the second client is configured to download a set of segments that match the prefix of transport object identifier values, or that match the prefix of transport object URLs indicated by the first client.

According to a second aspect, the invention relates to a communication transmitter, comprising a first transmitter for transmission according to the dynamic adaptive streaming over the HTTP protocol (DASH), and a second transmitter for transmission according to the File Delivery over Unidirectional Transport protocol (FLUTE), wherein the first transmitter is configured to provide segments of a media presentation description (MPD) for transmission to the second transmitter, and wherein the second transmitter is configured to assign a retrieve pattern to the segments, and wherein the transmitter is configured to transmit an enhanced media presentation description (MPD) (101) towards a communication network, the enhanced media presentation description (MPD) (101) comprising the retrieve pattern.

In a first implementation form of the second aspect, the first transmitter and the second transmitter are configured to communicate over a control channel.

According to a third aspect, the invention relates to a transmission method for transmission by a communication transmitter, the communication transmitter comprising a first transmitter for transmission according to the dynamic adaptive streaming over the HTTP (DASH) protocol, and a second transmitter for according to the File Delivery over Unidirectional Transport (FLUTE) protocol, the method comprising providing segments of a media presentation description (MPD) to the second transmitter by the first transmitter, assigning a retrieve pattern to the segments by the second transmitter, and transmitting an enhanced media presentation description towards a communication network, the enhanced media presentation description comprising the retrieve pattern.

10

According to a fourth aspect, the invention relates to a reception method for media content reception by a communication receiver, the communication receiver comprising a first client being configured for reception according to the dynamic adaptive streaming over the HTTP (DASH) protocol and a second client being configured for reception media content according to the File Delivery over Unidirectional Transport (FLUTE) protocol, wherein the method comprises providing a retrieve pattern to the second client by the first client, and to receive media content by the second client according to the retrieve pattern.

15

According to a fifth aspect, the invention relates to a program for performing the transmission method or the reception method when executed on a computer.

20

The invention can be implemented in hardware and/or in software.

BRIEF DESCRIPTION OF THE FIGURES

25

Fig. 1 shows a DASH Data Model;

Fig. 2 shows a receiver architecture;

30

Fig. 3 shows a transmitter architecture.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Fig. 1 shows a Media Presentation Description 101, which is based on a DASH Data Model implementing the specification 3GPP TS 26.247.

5

The Media Presentation Description 101 comprises a sequence of Periods 103, 119 in time that make up the Media Presentation Description. A Period 103, 119 typically represents a media content period during which a consistent set of encoded versions of the media content is available i.e. the set of available bitrates, languages, captions, subtitles etc. does not
10 change during a Period.

Within a Period 103, 119, material is arranged into Adaptation Sets 104, 111. An Adaptation Set 104, 111 represents a set of interchangeable encoded versions of one or several media content components. For example, there may be one Adaptation Set 104, 111 for the main
15 video component and a separate one for the main audio component. If there is other material available, for example captions or audio descriptions, then these may each have a separate Adaptation Set 104, 111. Material may also be provided in multiplexed form, in which case interchangeable versions of the multiplex may be described as a single Adaptation Set, for
20 example an Adaptation Set containing both the main audio and main video for a Period. Each of the multiplexed components may be described individually by a media content component description.

An Adaptation Set 104, 111 comprises a set of Representations 105, 109. A Representation 105, 109 describes a deliverable encoded version of one or several media content
25 components. A Representation 105, 109 includes one or more media streams, e.g. one for each media content component in the multiplex. Any single Representation 105, 109 within an Adaptation Set is sufficient to render the contained media content components. Typically, clients may switch from Representation to Representation during a Period in order to adapt to network conditions or other factors. Clients may also ignore Representations that rely on
30 codecs or other rendering technologies they do not support or that are otherwise unsuitable.

Within a Representation 105, 109, the media content may be divided in time into Segments 106, 107. A Segment 106, 107 is the basic unit of data that is advertised in the Media Presentation Description. A URL is provided for each Segment 106, 107 meaning that a
35 Segment is the largest unit of data that can be retrieved with a single HTTP request.

According to some implementation forms, different timelines can further be defined. One of DASH features is that encoded versions of different media content components share a common timeline. The presentation time of access unit within the media content is mapped to the global common presentation timeline for synchronization of different media components and to enable seamless switching of different coded versions of the same media components. This timeline is referred as Media Presentation timeline. The Media Segments themselves contain accurate Media Presentation timing information enabling synchronization of components and seamless switching.

5 A second timeline is used to signal to clients the availability time of segments at the specified HTTP-URLs called Segment availability times. These times are provided in wall-clock time and clients typically compare the wall-clock time to Segment availability times before accessing the segments at the specified HTTP-URLs. For On-Demand services with a static MPD, the availability times of all Segments are identical. For live services when the MPD is updated, the availability times of segments depend on the position of the Segment in the Media Presentation timeline.

The Segments 106, 107 can have assigned a duration, which is the duration of the media contained in the Segment when presented at normal speed. Typically, all Segments 106, 107 in a Representation have the same or roughly similar duration. However Segment duration may differ from Representation 105, 109 to Representation 105, 109. A DASH presentation can be constructed with relative short segments (for example a few seconds), or longer Segments including a single Segment for the whole Representation.

25 Short Segments are usually required in the case of live media content, where there are restrictions on end-to-end latency. The duration of a Segment is typically a lower bound on the end-to-end latency. DASH does not support the possibility for Segments to be extended over time: a Segment is a complete and discrete unit that must be made available in its entirety.

30 Segments 106, 107 may be further subdivided into Subsegments each of which contains a whole number of complete access units. If a Segment is divided into Subsegments, then this division is described by a compact Segment index, which provides the presentation time range in the Representation and corresponding byte range in the Segment occupied by each Subsegment. Clients may download this index in advance and then issue requests for individual Subsegments.

Clients may switch from Representation 105, 109 to Representation 105, 109 within an Adaptation Set at any time in the media content.

5 According to some implementation forms, the Media Presentation Description 101 can be enhanced about a retrieve pattern indicating to a receiver the media content that can be retrieved. The retrieve pattern can comprise a prefix of the transport object identifier to indicate a range of transport object identifier values, or URL information or can be based on a prefix of the transport object URL, for example being the path of the URL. The retrieve
10 pattern can be indicated as metadata information.

For On-Demand services, the Media Presentation Description 101 can be a static document describing the various aspects of the Media Presentation. All Segments of the Media Presentation are available on the server once any Segment is available. For live services,
15 however, Segments become available with time as the media content is produced. The Media Presentation Description may be updated regularly to reflect changes in the presentation over time, for example Segment URLs for new segments may be added to the MPD and those for old, no longer available Segments may be removed. However, if Segment URLs are described using a template, this updating may not be necessary except
20 for some redundancy/failover cases.

Delivering files over the internet can be ruled by the FLUTE protocol described in the RFC 3926. FLUTE builds on the ALC as specified in the RFC 3450. ALC defines transport of arbitrary binary objects. For file delivery applications mere transport of objects is not enough,
25 however. The end systems need to know what the objects actually represent. FLUTE specifies a mechanism for signaling and mapping the properties of files to concepts of ALC in a way that allows receivers to assign those parameters for received objects. Consequently, throughout this document the term 'file' relates to an 'object' as discussed in ALC.

30 ALC is a protocol instantiation of Layered Coding Transport building block (LCT) [RFC 3451]. Thus, ALC inherits the session concept of LCT. In the following, the concept ALC/LCT session is exemplarily used to collectively denote the interchangeable terms ALC session and LCT session. An ALC/LCT session consists of a set of logically grouped ALC/LCT channels associated with a single sender sending packets with ALC/LCT headers for one or
35 more objects. An ALC/LCT channel is defined by the combination of a sender and an address associated with the channel by the sender. A receiver joins a channel to start

receiving the data packets sent to the channel by the sender, and a receiver leaves a channel to stop receiving data packets from the channel.

One of the fields carried in the ALC/LCT header is the Transport Session Identifier (TSI).

- 5 The TSI is scoped by the source IP address. The source IP address and TSI pair uniquely identifies a session, i.e., the receiver uses this pair carried in each packet to uniquely identify from which session the packet was received. In case multiple objects are carried within a session, then the Transport Object Identifier (TOI) field within the ALC/LCT header identifies from which object the data in the packet was generated. Each object is associated with a
10 unique TOI within the scope of a session.

Over an ALC/LCT session (also referred as FLUTE session in this document), a File Delivery Table (FDT) Instances together with TOI fields provides parameters to identify, locate and restore the objects at the receiver.

15

In each ALC/LCT session, the TOI value '0' is reserved for delivery of FDT Instances. Each object in an ALC/LCT session is associated with a TOI (>0) in the scope of that session.

- 20 The FDT provides a means to describe various attributes associated with files that are to be delivered within the file delivery session. Two required attributes are "Content-Location" (URI identifying the object) and associated "TOI" value, the other attributes are optional. The TOI is included in each ALC/LCT data packet during the delivery of the object, and thus the TOI carried in the FDT is how the receiver determines which ALC/LCT data packets contain information about which object. An example of FDT containing mapping between URLs and
25 TOI values is presented below.

```
<?xml version="1.0" encoding="UTF-8"?>
<FDT-Instance xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:fl="http://www.example.com/flute"
xsi:schemaLocation="http://www.example.com/flute-fdt.xsd"
Expires="2890842807">
<File Content-Location="www.example.com/segment1.mp4"
TOI="1"
Content-Type=" video/mp4"/>
<File Content-Location="www.example.com/segment2.mp4"
TOI="2"
Content-Type=" video/mp4"/>
</FDT-Instance>
```

The delivery of the DASH segments and Media Presentation Descriptions shown in Fig. 1 can be based upon the MBMS as defined in in 3GPP TS 26.247.

5

Fig. 2 shows a possible architecture of a receiver 200 for implementing DASH over MBMS according to an implementation form. The receiver 200 comprises a DASH client 203 (first client) and a FLUTE client 205 (second client). The DASH client 203 and the FLUTE client 205 can communicate with each other using the control channel 207. The channel 207 can bi-directionally or uni-directionally connect the DASH client 203 and the FLUTE client 205. Optionally, also the cash 209 can be provided.

10

According to an implementation form, an additional operation mode is introduced for the FLUTE session, as compared with the existent 3GPP specification.

15

In the additional mode (retrieve pattern mode), the FLUTE client 205 is instructed to download and reconstruct a set of transport objects based on a certain retrieve pattern. In one embodiment, the retrieve pattern is the prefix of the transport object identifier (TOI). In another embodiment, the retrieve pattern is the URL or in the URL of the transport objects, e.g. the path part of the URL.

20

The retrieve pattern can be signalled to the DASH client 203 and can be used to instruct the FLUTE client 205 to operate in the additional mode.

According to an implementation form, the retrieve pattern can be described in an enhanced Media Presentation Description, additionally comprising information on the retrieve pattern.

5 According to an implementation form, a MBMS client not shown in Fig. 2 can start consuming a DASH service delivered over MBMS, and may receive the User Service Bundle Description, map the enhanced Media Presentation Description additionally comprising the retrieve pattern, e.g. one or more TOI ranges, each TOI range assigned to a specific Representation to the corresponding Delivery Method. Inform a FLUTE client about the retrieve pattern, e.g. about the TOI range for the chosen Representation. Thereafter, the
10 reception of MBMS user service data can be set up.

According to an implementation form, the received object can be stored in the in the UE cache 209, which can be fetched at a later time by DASH client 203 using a GET request.

15 According to an implementation form, in order to deliver DASH media content over MBMS, the FLUTE client 205 can be operated in one of the following operation modes:

1. Download-all mode: in this mode the FLUTE client 205 is instructed to download all files (transport objects) in the session,
- 20 2. Request-based mode: in this mode the FLUTE client 205 is instructed about which files the FLUTE client should download, or
3. Retrieve pattern mode: In this mode, the FLUTE client 205 is instructed to download and reconstruct a set of transport objects based on a retrieve pattern.

25 According to an implementation form, the control channel between the DASH client 203 and the FLUTE client 205 is used to communicate the requested segment URLs, when e.g. operating in a request-based mode.

In the Download-all mode, DASH client 203 does not pass any information to FLUTE client
30 205 over the control channel 207. Thus, the FLUTE client 205 can download all segments transmitted over FLUTE channel and stores them to the cache 209. In particular, the DASH client 203 can send a GET request with the URLs of segments of chosen Representation. According to some implementation forms, also Multiple Representations can be transmitted over the same FLUTE channel.

35

In the Request-based mode, the DASH client 203 can inform FLUTE client 205 over the control channel 207 about a URL of a segment of the chosen Representation that DASH client 203 wants to request. The FLUTE client 205 maps the URL to TOI, forming an implementation form of the retrieve pattern, based on information from FDT. Next, the
5 FLUTE client 205 downloads the segment transmitted over FLUTE channel described by the mapped TOI and can store it to cache 209. Next, the DASH client 203 sends GET requests with URL of the segment of chosen Representation. Then, the above steps are repeated in the Request-based mode for the next segment of interest to the DASH client 203.

10 According to some implementation forms, Segment duration can be even as short as 1 second.

In the additional retrieve pattern mode, the DASH client 203 informs the FLUTE client 205 over the control channel about the retrieve pattern, e.g. about the TOI range representing all
15 segments of the chosen Representation. The TOI range can be extracted from the extended MPD. The extended MPD can be provided by e.g. the transmitter as shown in Fig. 3. Then, the FLUTE client 205 downloads the segment transmitted over FLUTE channel that are described by the retrieve pattern, e.g. by the TOI value that fall into the TOI range indicated by DASH client 203. The downloaded segments are stored to the cache 209. The DASH
20 client 203 can send GET request with the URLs of segments of chosen Representation.

According to an implementation form, by introducing the additional signaling information (retrieve pattern) about the FLUTE session to the Media Presentation Description as shown in Fig. 1 to obtain the enhanced Media Presentation Description, the DASH client 203 and/or
25 the MBMS client can start reception even before the FDT instance is received. Due to this, tune-in time to DASH service delivered over MBMS is reduced.

Fig. 3 shows a transmitter 300 according to an implementation form. The transmitter 300 comprises a DASH transmitter 301 (first transmitter) and a FLUTE transmitter 303 (second
30 transmitter). Further, a control channel between the FLUTE transmitter 303 and the DASH transmitter 301 is provided.

According to an implementation form, the transmitter 300 is configured to create the extended Media Presentation Description (MPD), which can be e.g. used by the receiver as
35 shown in Fig. 2.

According to an implementation form, the DASH transmitter 301 creates segments and MPD metadata information. The DASH transmitter 301 and the FLUTE transmitter 303 can communicate to each other to set up the retrieve pattern, e.g. fix TOI ranges for each Representation 105, 109, as shown in Fig.1, that can be used by the FLUTE client 205 shown in Fig. 2 and be included in the extended MPD metadata information. The FLUTE transmitter 303 receives the segments and the extended MPD metadata information to be sent over a FLUTE channel from the DASH transmitter 301. The FLUTE transmitter 303 can assign to all segments and MPD metadata information the retrieve pattern, e.g. the TOI values from the fixed TOI range based to which Representation the segments belongs to.

According to some embodiments, the retrieve pattern can be formed by the TOI. In one implementation form, the TOI value or the range of TOI values for a given Adaptation Set, Representation, or Sub-Representation can be signalled in EssentialProperty or SupplementalProperty descriptors.

In order to signal the TOI value or the range of TOI values for a given Adaptation Set, Representation, or Sub-Representation, a value for SchemelIdentifier as well as the syntax and semantics of the value field can be defined. The SchemelIdentifier for announcing a download delivery method can be the URN "urn:3GPP:ns:MBMS:userService:download:2002".

The semantics and XML syntax of the EssentialProperty or SupplementalProperty descriptors scheme with SchemelIdentifier equal "urn:3GPP:ns:MBMS:userService:download:2002" can be as specified in Table 1, 2 and Table 3, respectively.

Table 1: Example Semantics

Element or Attribute Name	Use	Description
TOIRange	1 ...N	Sepecifices a range of TOI values

Table 2: Semantics of TOIRangeType

Element or Attribute Name	Use	Description
TOIRangeType		
@startTOI	M	The smallest value of the TOI in the range

Element or Attribute Name	Use	Description
@endTOI	M	The highest value of the TOI in the range

Table 3: Syntax

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema targetNamespace="urn:mpeg:dash:viewpoint:3DVideoInformation"
  attributeFormDefault="unqualified"
  elementFormDefault="qualified"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:xlink="http://www.w3.org/1999/xlink"
  xmlns="urn:3GPP:ns:MBMS:userService:download:2002">

  <xs:annotation>
    <xs:appinfo> ALC/LCT session information </xs:appinfo>
    <xs:documentation xml:lang="en">
      This Scheme defines TOI values of interested to Adaptation Set, Representation,
      or Sub-Representation.
    </xs:documentation>
  </xs:annotation>

  <xs:complexType name="TOI">
    <xs:sequence>
      <xs:element name="TOIRange" type="TOIRangeType" minOccurs="0"
maxOccurs="unbounded"/>
      <xs:any namespace="##other" processMedia contents="lax"
minOccurs="0"maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>

  <xs:complexType name=" TOIRangeType ">
    <xs:attribute name=""startTOI" type="xs: unsignedInteger " use="required"/>
    <xs:attribute name=""endTOI" type="xs: unsignedInteger " use="required"/>
    <xs:anyAttribute namespace="##other" processMedia contents="lax"/>
  </xs:complexType>

```

`</xs:schema>`

5 According to some implementation forms, the transmitter 300 shown in Fig. 3 creates the extended MPD metadata information for a DASH service transmitted over a broadcast channel according to the FLUTE protocol. The information on the retrieve pattern in the enhanced MDP can be provided in extended MPD metadata information.

10 According to some implementation forms, the receiver 200 shown in Fig. 2 is configured to consume a DASH service delivered over a broadcast channel upon the basis of the FLUTE protocol based on the extended MPD metadata information. In particular, the FLUTE client 205 is instructed to retrieve transport objects based on the certain retrieve pattern. The retrieve pattern can be based on a prefix of the Transport Object Identifier (TOI), thus indicating a specific range of TOI values, or on a prefix of the transport object URL, for example being the path of the URL. According to some implementation forms, retrieve pattern identifies transport objects that correspond to segments of one Representation or 15 Sub-Representation of a DASH media content.

According to some implementation forms, the FLUTE or ALC/LCT receiver 205 is configured to receive files of a DASH streaming media content.

CLAIMS:

1. A communication receiver (200), comprising:

a first client (203) being configured for reception according to the dynamic adaptive
5 streaming over the HTTP (DASH) protocol;

a second client (205) being configured for reception according to the File Delivery over
Unidirectional Transport (FLUTE) protocol;

wherein the first client (203) is configured to provide a retrieve pattern to the second client
(205), and wherein the second client (205) is configured to retrieve a media content
10 according to the retrieve pattern.

2. The communication receiver (200) according to claim 1, wherein the first client (203)
is configured to provide the retrieve pattern to the second client (205) over a control channel
(207).
15

3. The communication receiver (200) according to claim 1 or 2, wherein the second
client (205) is configured to download the media content from a remote transmitter according
to the retrieve pattern over a File Delivery over Unidirectional Transport (FLUTE) session in
order to receive the media content.
20

4. The communication receiver (200) according to one of the preceding claims, wherein
the first client (203) is configured to receive a media presentation description (MPD) (101)
comprising the retrieve pattern from a remote transmitter, and to extract the retrieve pattern
from the received media presentation description (MPD) (101).
25

5. The communication receiver (200) according to one of the preceding claims, wherein
the media content is a transport object according to the File Delivery over Unidirectional
Transport (FLUTE) protocol, the transport object being identifiable by a Transport Object
Identifier (TOI) value.

6. The communication receiver (200) according to one of the preceding claims, wherein the retrieve pattern comprises a prefix of transport object URLs.
- 5 7. The communication receiver (200) according to one of the preceding claims, wherein the retrieve pattern comprises a transport object identifier range of transport object identifier values, or a prefix of transport object identifier values.
- 10 8. The communication receiver (200) according to claim 6 or 7, wherein the transport object identifier range, or the prefix of transport object identifier values, or the prefix of transport object URLs, represent segments (106, 107) of a representation (105) of a media presentation description (MPD) (101).
- 15 9. The communication receiver (200) according to claim 8, wherein the second client (205) is configured to download a set of segments (106, 107) that are described by transport object identifier (TOI) values that fall into the transport object identifier range.
- 20 10. The communication receiver (200) according to claim 8, wherein the second client (205) is configured to download a set of segments (106, 107) that match the prefix of transport object identifier values, or that match the prefix of transport object URLs indicated by the first client (203).
11. A communication transmitter (300) comprising
- 25 a first transmitter (301) for transmission according to the dynamic adaptive streaming over the HTTP (DASH) protocol; and
- a second transmitter (303) for transmission according to the File Delivery over Unidirectional Transport protocol;

wherein the first transmitter (301) is configured to provide segments (106, 107) of a media presentation description (MPD) (101) for transmission to the second transmitter (303), and wherein the second transmitter (303) is configured to assign a retrieve pattern to the segments (106, 107), and wherein the transmitter (300) is configured to transmit an
5 enhanced media presentation description (MPD) (101) towards a communication network, the enhanced media presentation description (MPD) (101) comprising the retrieve pattern.

12. The communication transmitter (300) according to claim 11, wherein the first transmitter (301) and the second transmitter (303) are configured to communicate over a
10 control channel (305).

13. Transmission method for transmission by a communication transmitter (300), the communication transmitter (300) comprising a first transmitter (301) for transmission according to the dynamic adaptive streaming over the HTTP (DASH) protocol; and a second
15 transmitter (303) for according to the File Delivery over Unidirectional Transport (FLUTE) protocol, the method comprising:

providing segments (106, 107) of a media presentation description (MPD) (101) to the second transmitter (303) by the first transmitter (301);

assigning a retrieve pattern to the segments (106, 107) by the second transmitter (303); and

20 transmitting an enhanced media presentation description (101) towards a communication network, the enhanced media presentation description (101) comprising the retrieve pattern.

14. A reception method for a set of transport objects media content reception by a communication receiver (200), the communication receiver comprising a first client (203)
25 being configured for reception according to the dynamic adaptive streaming over the HTTP (DASH) protocol and a second client (205) being configured for reception media content according to the File Delivery over Unidirectional Transport (FLUTE) protocol, wherein the method comprises providing a retrieve pattern to the second client (205) by the first client (203), and to receive media content by the second client (205) according to the retrieve
30 pattern.

15. A computer program for performing the transmission method of claim 13 or the communication method of claim 14 when executed on a computer.

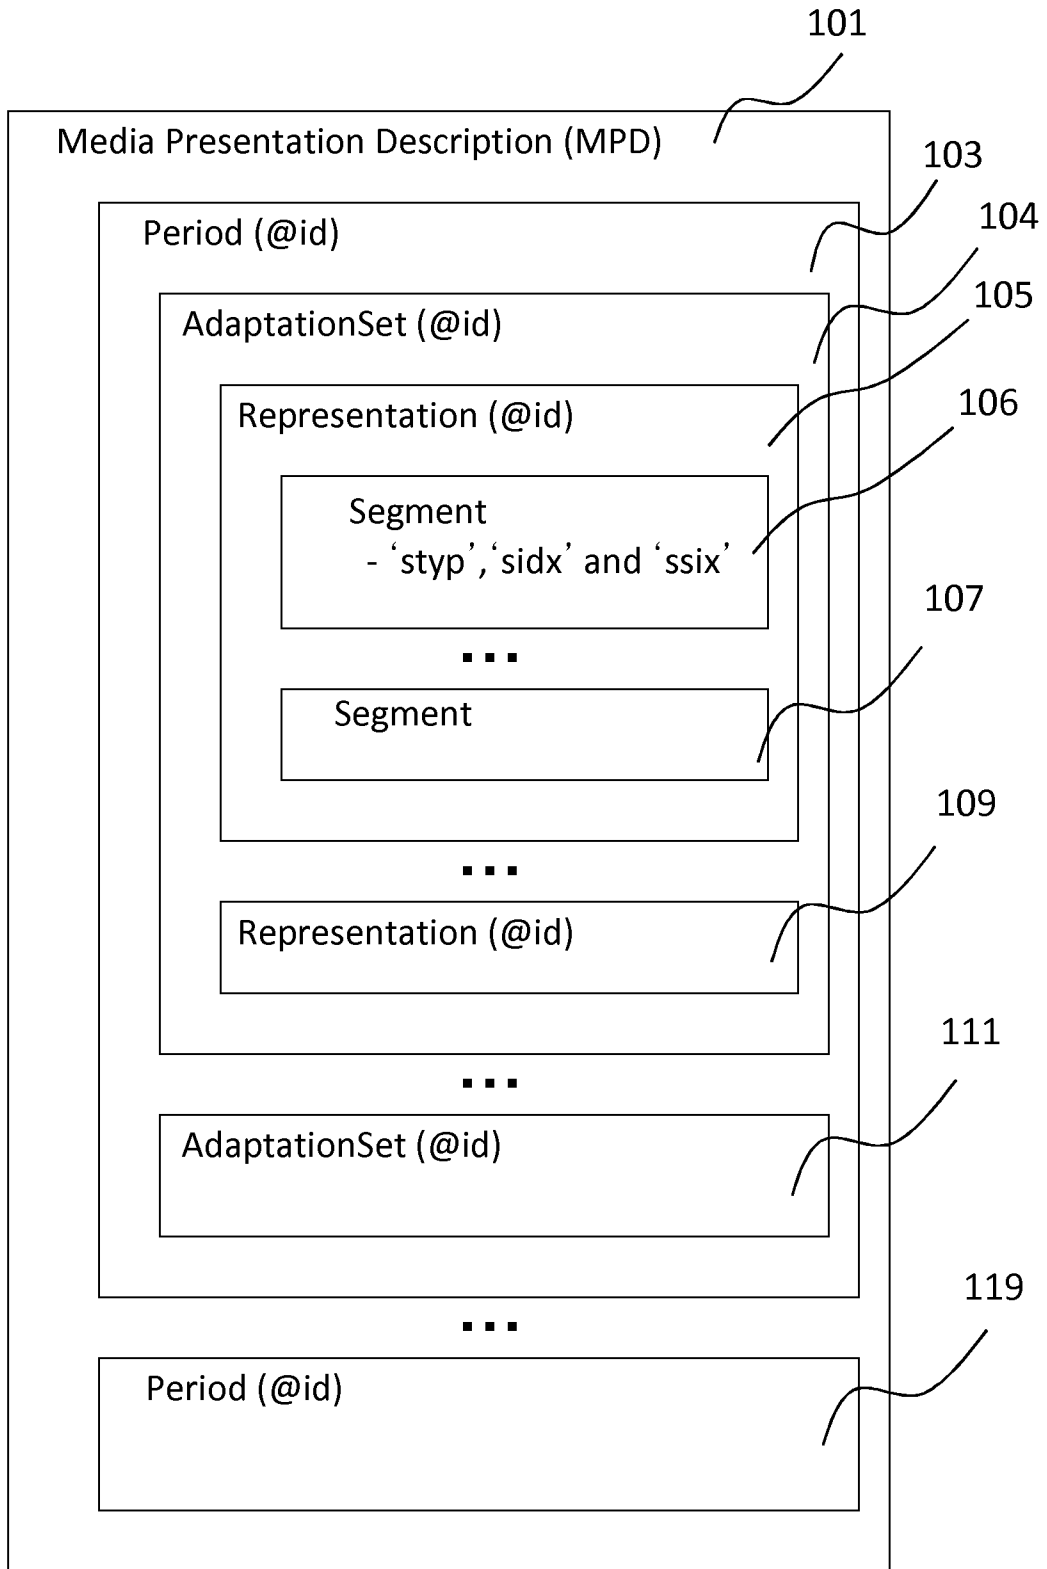


Fig. 1

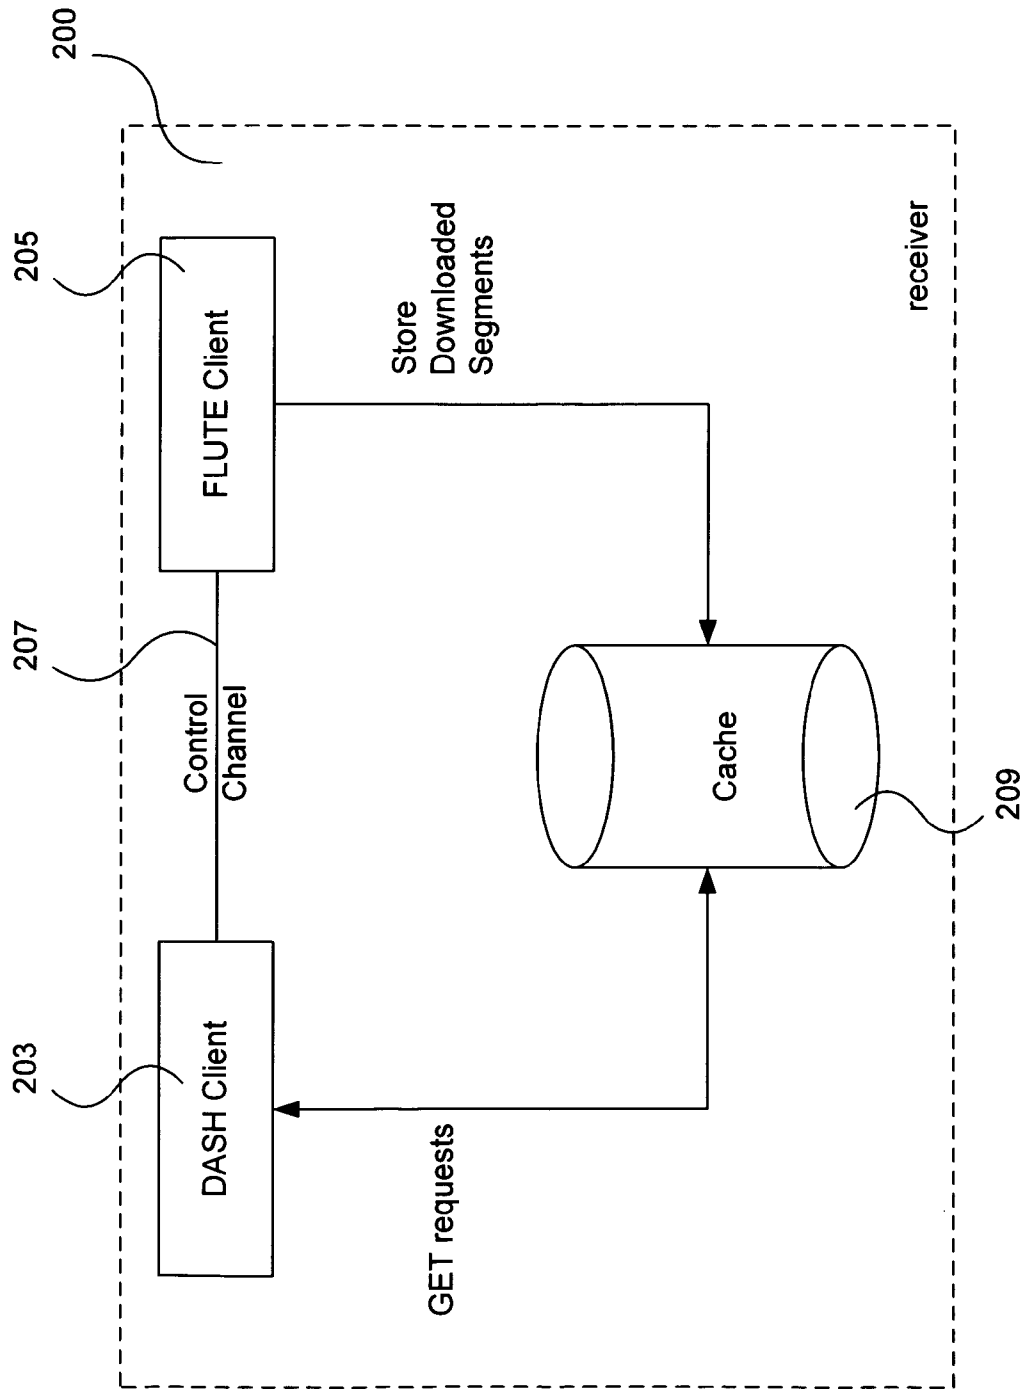


Fig. 2

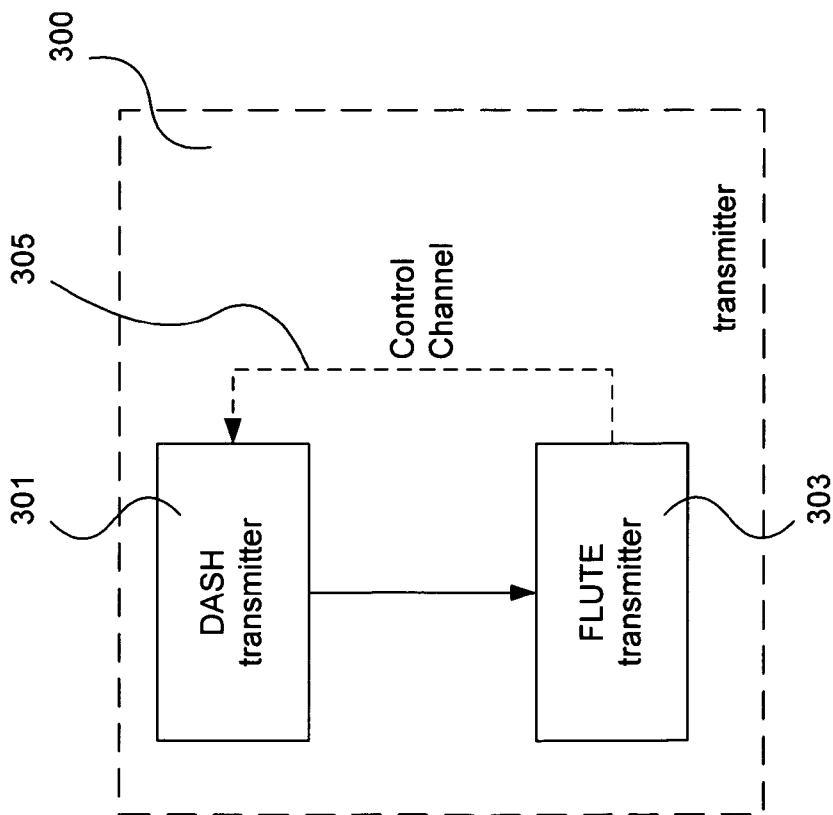


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2012/071065
--

A. CLASSIFICATION OF SUBJECT MATTER INV. H04W4/06 H04L29/06 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H04W H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, COMPENDEX, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/259994 A1 (GILLIES DONALD W [US] ET AL) 11 October 2012 (2012-10-11) figures 1, 3, 7-10 paragraph [0009] - paragraph [0011] paragraph [0031] - paragraph [0036] paragraph [0044] - paragraph [0056] paragraph [0104] - paragraph [0117] paragraph [0138] - paragraph [0165] ----- -/--	1-15
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
Date of the actual completion of the international search	Date of mailing of the international search report	
26 June 2013	05/07/2013	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Riegler, Jörg	

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2012/071065

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Multimedia Broadcast/Multicast Service (MBMS); Protocols and codecs (Release 11)", 3GPP STANDARD; 3GPP TS 26.346, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. SA WG4, no. V11.2.0, 13 September 2012 (2012-09-13), pages 1-158, XP050649333, [retrieved on 2012-09-13] page 35 - page 49 -----</p>	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2012/071065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2012259994 A1	11-10-2012	US 2012259994 A1	11-10-2012
		WO 2012138909 A1	11-10-2012
