



(22) Date de dépôt/Filing Date: 2002/01/29

(41) Mise à la disp. pub./Open to Public Insp.: 2002/07/30

(45) Date de délivrance/Issue Date: 2006/07/11

(30) Priorité/Priority: 2001/01/30 (JP2001-022338)

(51) Cl.Int./Int.Cl. *F02C 7/00* (2006.01),
F23N 5/16 (2006.01), *F02C 9/34* (2006.01),
F02C 9/28 (2006.01), *F02C 9/18* (2006.01)


(72) Inventeurs/Inventors:
NOMURA, MASUMI, JP;
TANAKA, KATSUNORI, JP

(73) Propriétaire/Owner:
MITSUBISHI HEAVY INDUSTRIES, LTD., JP

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : DISPOSITIF D'EVALUATION DES VIBRATIONS DUES AUX GAZ DE COMBUSTION, INSTALLATIONS ET
INSTALLATIONS DE TURBINE A GAZ

(54) Title: COMBUSTION VIBRATION ESTIMATING APPARATUS, PLANT AND GAS TURBINE PLANT

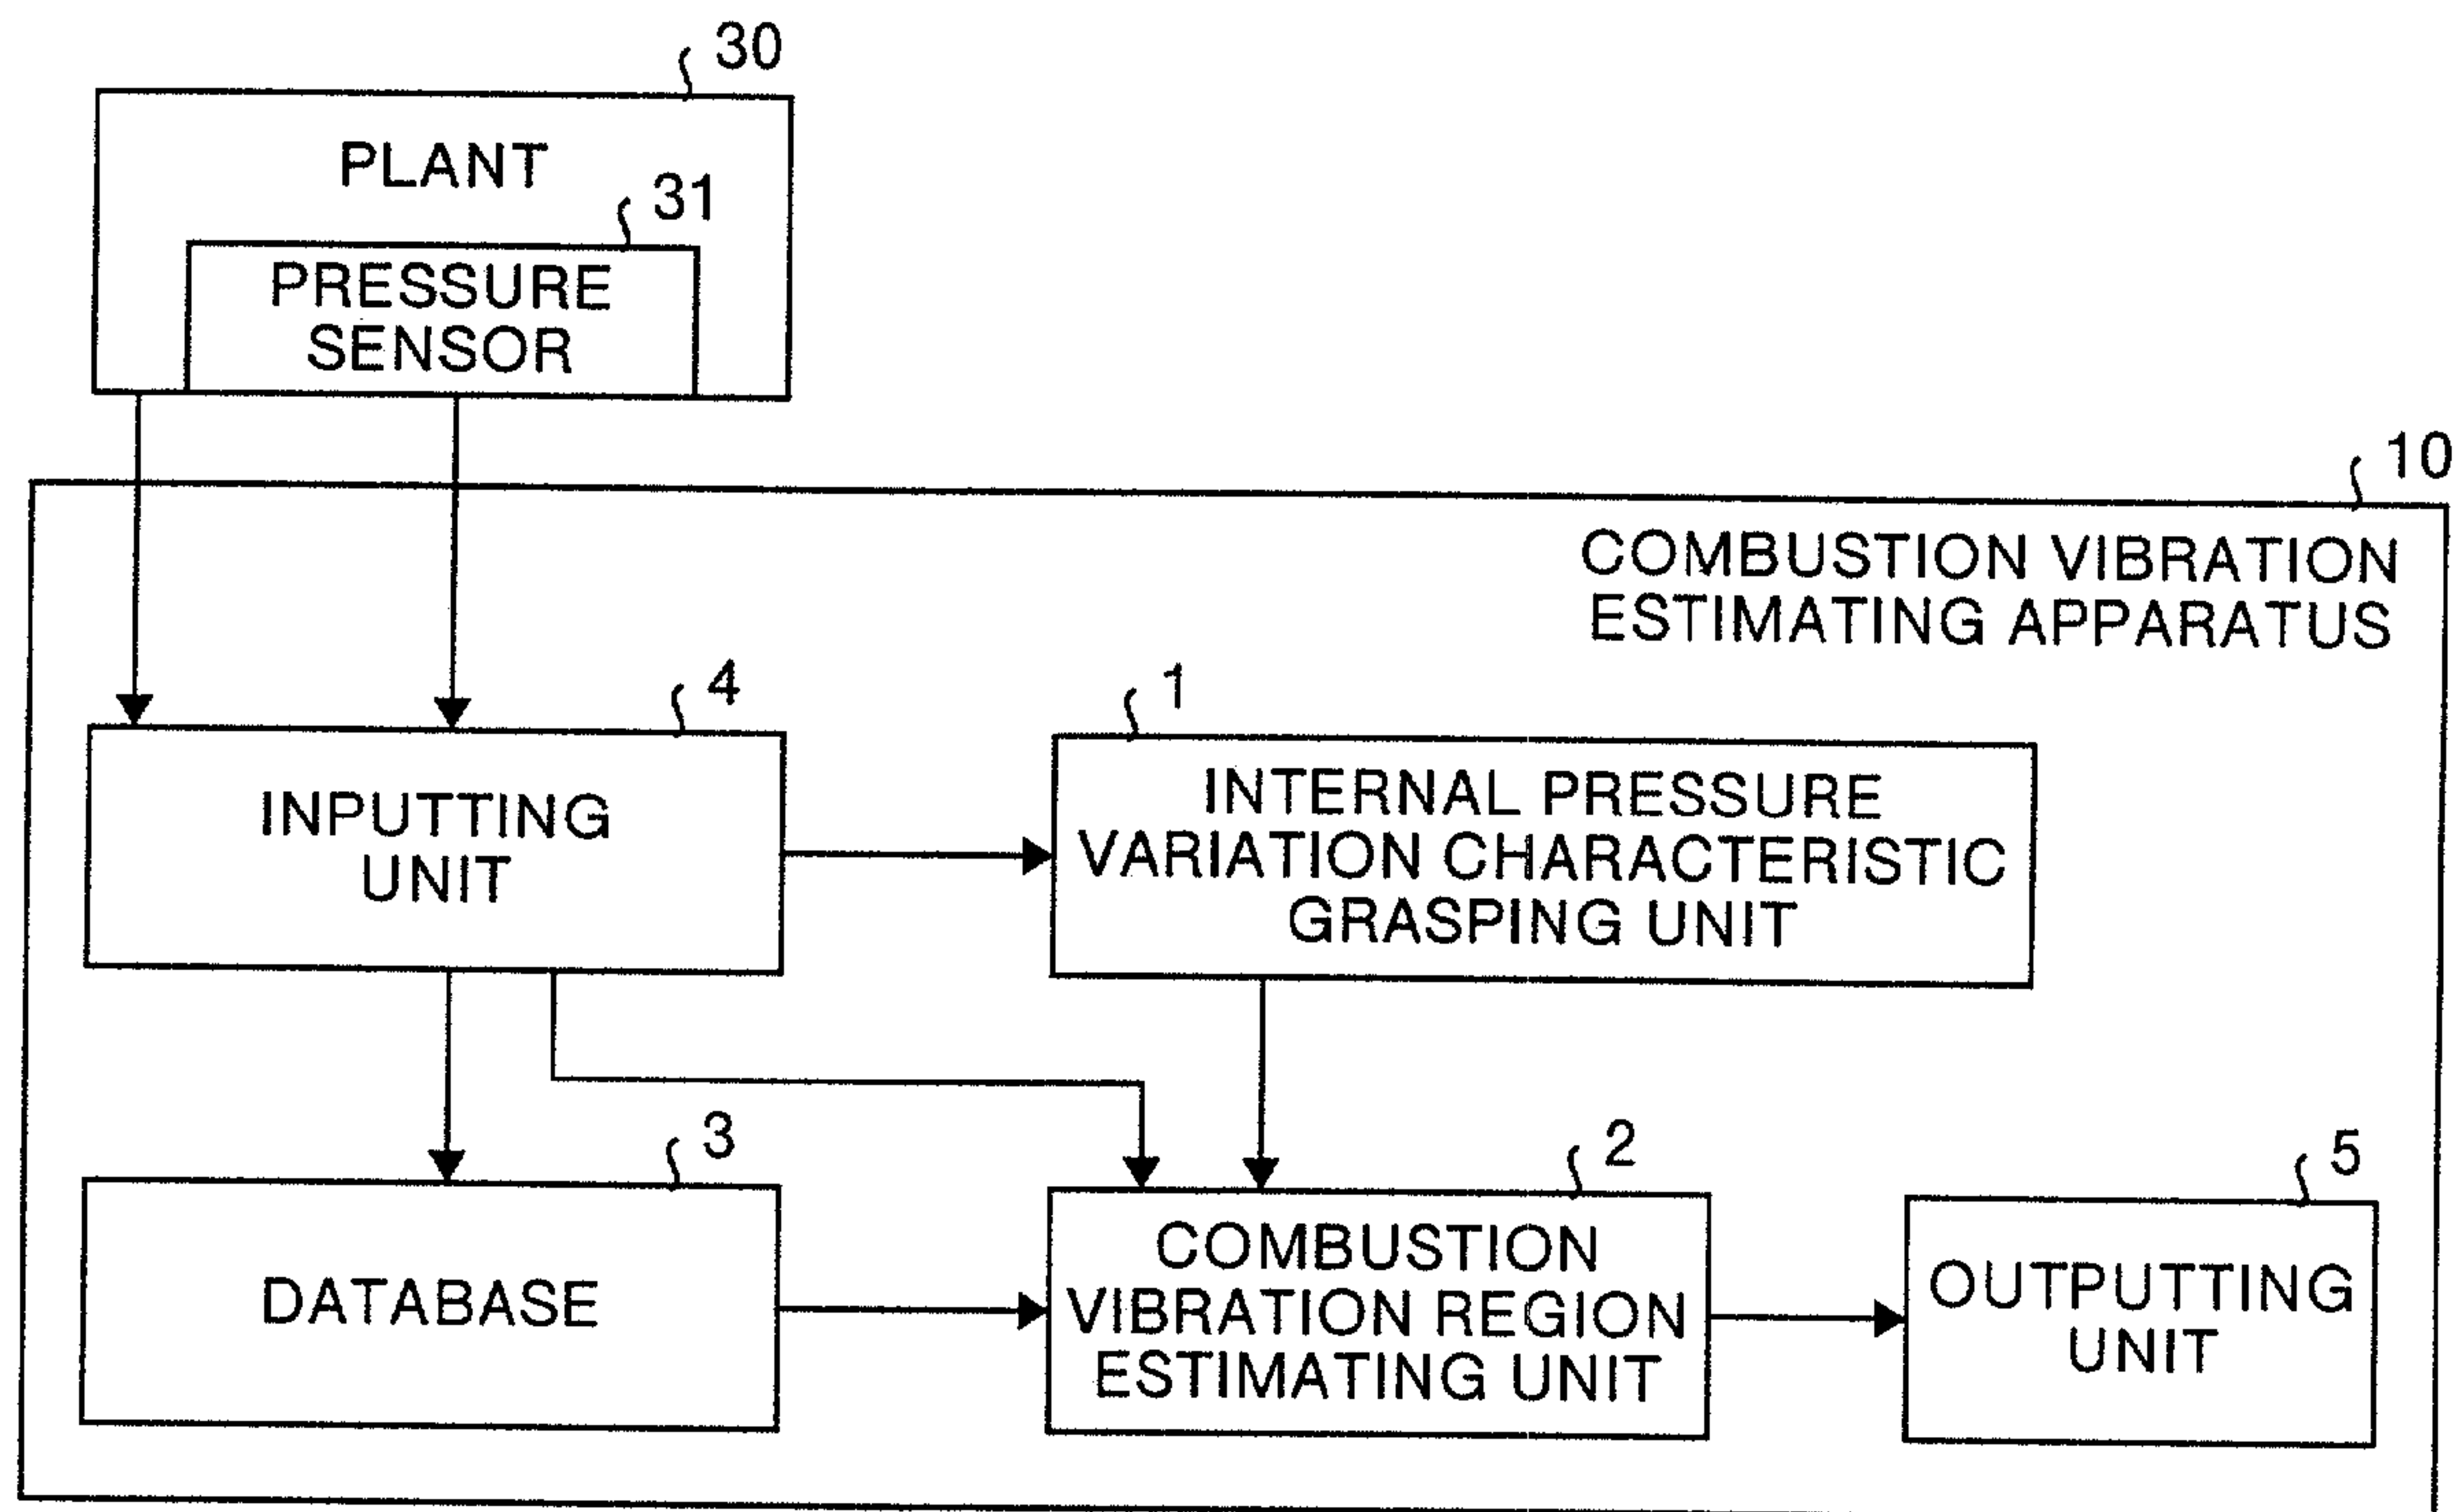

(57) Abrégé/Abstract:

The combustion vibration estimating apparatus comprises an inputting unit for inputting limiting values of plant data, weather data and internal pressure variation, an internal pressure variation characteristic grasping unit for making internal pressure variation of a combustor into a mathematical model from the input plant data and weather data, a combustion vibration region estimating unit for applying a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit to obtain combustion vibration-prone to be generated region, and an outputting unit for outputting a combustion vibration region estimation result by the combustion vibration region estimating unit.

ABSTRACT OF THE DISCLOSURE

The combustion vibration estimating apparatus comprises an inputting unit for inputting limiting values of plant data, weather data and internal pressure variation, an internal pressure variation characteristic grasping unit for making internal pressure variation of a combustor into a mathematical model from the input plant data and weather data, a combustion vibration region estimating unit for applying a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit to obtain combustion vibration-prone to be generated region, and an outputting unit for outputting a combustion vibration region estimation result by the combustion vibration region estimating unit.

**COMBUSTION VIBRATION ESTIMATING APPARATUS,
PLANT AND GAS TURBINE PLANT**

FIELD OF THE INVENTION

5 The present invention relates to a combustion vibration estimating apparatus, a plant and a gas turbine plant. More particularly, this invention relates to a combustion vibration estimating apparatus for estimating combustion vibration generated in a combustor of a gas
10 turbine for business or aircraft, and relates to a plant including the combustion vibration estimating apparatus.

BACKGROUND OF THE INVENTION

For adjusting a control system, various approaches
15 were conventionally taken such as Kalman filter or neural network. However, concerning the combustion vibration of a gas turbine, as matters now stand, its phenomenon is complicated, and field shakedown is adjusted based on experience and know-how of an operator now as in the past.

20 Concerning monitor of combustion vibration during driving, there is a known technique in which data is collected by a pressure sensor disposed in a combustor, an abnormal condition of the combustion vibration is grasped at an early stage by analyzing frequency of the combustion vibration
25 by this data, and the driving state of the combustor is

monitored while attaching importance to soundness.

Fig. 19 shows a combustion abnormality monitoring apparatus (gas turbine abnormality monitoring apparatus) disclosed in Japanese Patent Application Laid-open No. 11-324725. This monitoring apparatus uses a pressure sensor 100 disposed in the gas turbine combustor, an A/D converter 101 for converting a detection signal from the pressure sensor 100 into digital data and receiving the same, a frequency analyzer 102 for decomposing the digital data into frequency component and analyzing the same, a judging condition setting section 103 for variably setting reference data concerning a frequency component to be monitored based on an output of a gas turbine combustor and a parameter defined by a fuel supply amount thereof, a judging processing section 104 for extracting a frequency component caused by combustion vibration phenomenon from analysis data of the frequency component based on the reference data, comparing an amplitude value of the frequency component and an amplitude value of data concerning the frequency component to be monitored under normal conditions with each other, thereby judging the combustion vibration state, and a result display section 105 for displaying data concerning the judgement result.

In this monitoring apparatus, frequency of the combustion vibration is analyzed by data from the pressure sensor 100, the amplitude value of vibration at the time

28964-62

under normal conditions is compared with an actually measured value at every frequency, and it is possible to judge whether the combustion vibration is abnormal.

In the conventional monitoring apparatus, however,
5 it is necessary to previously input an amplitude value of the combustion vibration under normal condition for each frequency, and the value under normal conditions is substantially a management value for alarm, and combustion vibration can not be detected at an early stage.

10

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a combustion vibration estimating apparatus in which a combustion control system can be adjusted easier by
15 estimating combustion vibration generated in a combustor of a gas turbine by a mathematical model, generation of the combustion vibration is detected at an early stage during driving, breakage of facilities can be avoided, utilization ratio of facilities can be enhanced, and safety can be
20 enhanced. It is another object of the invention to provide a plant having such a combustion vibration estimating apparatus.

According to one aspect of this invention, there is a combustion vibration estimating apparatus that
25 estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus comprising of a combustion vibration region estimating unit
30 that estimates possibility of combustion vibration to occur using a mathematical model and an outputting unit which

28964-62

outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration
5 region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

According to the above-mentioned aspect, the
10 combustion vibration-prone to be generated region and the combustion vibration-less prone to be generated region are obtained based on the mathematical model constructed from the plant data and weather data, and a result thereof is output.

15 According to still another aspect of this invention, there is a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid
20 causing the combustion vibration, the combustion vibration estimating apparatus comprising of an inputting unit which inputs plant data, weather data, and limiting value of internal pressure variation, an internal pressure variation characteristic grasping unit which sets up a mathematical
25 model representing internal pressure variation of a combustor using the inputted plant data and weather data as variables, a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model by applying the limiting value
30 of the internal pressure variation to the mathematical model to estimate a possible combustion vibration-prone region and an outputting unit which outputs the possible combustion

28964-62

vibration-prone region estimated by the combustion vibration region estimating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit
5 makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the combustion vibration region estimating unit applies the limiting value of the internal pressure variation to the mathematical model to obtain the
10 combustion-prone to be generated region, and the combustion vibration region estimation result is output from the outputting unit.

According to still another aspect of this invention there is a combustion variation estimating
15 apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus comprising: an inputting unit which
20 inputs plant data and weather data, an internal pressure variation estimating unit which estimates internal pressure variation of a combustor from the plant data and weather data and an outputting unit which outputs internal pressure variation estimation result estimated by the internal
25 pressure variation estimating unit.

According to the above-mentioned aspect, the internal pressure variation estimating unit estimates the internal pressure variation of the combustor by the plant data and weather data input by the inputting unit, and the
30 estimated internal pressure variation estimation result is output from the outputting unit.

. 28964-62

According to still another aspect of this invention, there is a combustion vibration estimating apparatus that constructs a mathematical model for explaining internal pressure variation and NOx discharge amount from plant data and weather data, and that obtains and outputs a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region based on the constructed mathematical model.

According to the above-mentioned aspect, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains internal pressure variation and NOx discharge amount constructed from the plant data and weather data to outputs the result.

In one embodiment, there is provided a combustion vibration estimating apparatus that constructs a mathematical model for explaining internal pressure variation and NOx discharge amount from plant data and weather data, and that obtains and outputs a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region based on the constructed mathematical model, the combustion vibration estimating apparatus comprising: a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the

. 28964-62

mathematical model, and outputs the estimated results to the outputting unit.

The combustion vibration estimating apparatus according to still another aspect of this invention
5 comprises an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as a restricting value of NOx, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model
10 from the input plant data and weather data, a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the input plant data and weather data, a safe region estimating unit which applies

a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, and applies a restricting value of the NOx to the mathematical model
5 obtained by the NOx discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount is equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation
10 result by the safe region estimating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input
15 from the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure
20 variation and the restricting value of the NOx to the mathematical model to obtain the combustion vibration-less prone to be generated region, and the safe region estimation result is output from the outputting unit.

In the combustion vibration estimating apparatus
25 according to still another aspect of this invention, a

28964-62

mathematical model for explaining internal pressure variation, NOx and CO discharge amount is constructed from plant data and weather data, a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region are obtained based on the constructed mathematical model and are output.

According to the above-mentioned aspect, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains the internal pressure variation, NOx discharge amount and the CO discharge amount constructed from the plant data and weather data, and a result thereof is output.

In one embodiment, there is provided a combustion vibration estimating apparatus, that constructs a mathematical model for explaining internal pressure variation, NOx and a CO discharge amount from plant data and weather data, a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region are obtained based on the constructed mathematical model and are output, the combustion vibration estimating apparatus comprising: a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

. 28964-62

The combustion vibration estimating apparatus according to still another aspect of this invention comprises an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as restricting values of NOx and CO, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the input plant data and weather data, a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the input plant data and weather data, a CO discharge amount characteristic grasping unit which makes an CO discharge

amount into a mathematical model from the input plant data and weather data, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, and applies a restricting value of the CO to the mathematical model obtained by the CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the CO discharge amount characteristic grasping unit makes the CO discharge amount into the mathematical model from the plant data and weather

data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting values of NOx and CO to the mathematical model, and the region where the discharge
5 amounts of NOx and CO are equal to or less than the restricting value and the combustion vibration is prone to be generated, and the safe region estimation result is output from the outputting unit.

The combustion vibration estimating apparatus
10 according to still another aspect of this invention comprises an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the
15 input plant data and weather data, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the selected plant data and weather data, a discharge amount characteristic grasping unit which makes NOx and CO
20 discharge amounts into a mathematical model from the selected plant data and weather data, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies
25 restricting values of the NOx and CO to the mathematical

models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit is input by the inputting unit, the internal pressure variation of the combustor is made into the mathematical model from the plant data and weather data selected by the focus setting unit, the discharge amount characteristic grasping unit makes the discharge amounts of NOx and CO into the mathematical model from the plant data and weather data selected by the focus setting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and restricting values of NOx and CO to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the safe region estimation result is output from the outputting unit.

The combustion vibration estimating apparatus according to still another aspect of this invention comprises

an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the input plant data and weather data, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the selected plant data and weather data, a discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical model from the selected plant data and weather data, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, a proposed adjustment generating unit which obtains a point to be measured next, using a safe region estimation result by the safe region estimating unit, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit and a point to be measured by the

28964-62

proposed adjustment generating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data selected by the focus determining unit, the discharge amount characteristic grasping unit makes the NOx and CO discharge amounts into the mathematical model from the plant data and weather data selected by the focus determining unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the NOx and CO restricting values to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the proposed adjustment generating unit obtains the point to be measured next using the safe region estimation result by the safe region estimating unit, and the safe region estimation result by the safe region estimating unit and the point to be measured next by the proposed adjustment generating unit are output from the outputting unit.

According to still another aspect of this invention, there is a plant comprising: a combustor, and a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus using a mathematical model which represents internal pressure variation using plant data and weather data as variables, and estimating and outputting a possible

. 28964-62

combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, the combustion vibration estimating apparatus comprising: a combustion vibration region estimating unit that estimates
5 possibility of combustion vibration to occur using the mathematical model; and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather
10 data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

15 According to the above-mentioned aspect, the combustion vibration-prone to be generated region and the combustion vibration-less prone to be generated region are obtained based on the mathematical model constructed from the plant data and weather data, and a result thereof is
20 output.

 According to still another aspect of this invention, there is a plant comprising: a combustor, and a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at
25 present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus including: an inputting unit which inputs plant data, weather data and limiting values of internal pressure
30 variation obtained with combustion in the combustor, an internal pressure variation characteristic grasping unit which sets up a mathematical model representing internal pressure variation of a combustor using the plant data and

28964-62

weather data inputted as variables, a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model by applying the limiting value of the internal pressure variation to the mathematical model to estimate a possible combustion vibration-prone region and an outputting unit which outputs the possible combustion vibration-prone region estimated by the combustion vibration region estimating unit.

10 According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit

28964-62

makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the combustion vibration region estimating unit applies the limiting value of the internal pressure variation to the mathematical model to obtain the combustion-prone to be generated region, and the combustion vibration region estimation result is output from the outputting unit.

According to still another aspect of this invention, there is a plant comprising: a combustor and a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus including: an inputting unit which inputs plant data and weather data, an internal pressure variation estimating unit which estimates internal pressure variation of the combustor from the plant data and weather data which are inputted from the inputting unit and an outputting unit which outputs internal pressure variation estimation result estimated by the internal pressure variation estimating unit.

According to the above-mentioned aspect, the internal pressure variation estimating unit estimates the internal pressure variation of the combustor by the plant data and weather data input by the inputting unit, and the estimated internal pressure variation estimation result is output from the outputting unit.

According to still another aspect of this invention, there is a plant comprising: a combustor, and a combustion vibration estimating apparatus, wherein the combustion vibration estimating apparatus constructs a

. 28964-62

mathematical model which explains internal pressure variation and an NOx discharge amount from plant data and weather data, wherein the plant data and the weather data are obtained with combustion in the combustor, and the
5 combustion vibration estimating apparatus obtains and outputs a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region based on the constructed mathematical model, the combustion vibration estimating apparatus comprising: a combustion
10 vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal
15 pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results
20 to the outputting unit.

According to the above-mentioned aspect, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains
25 internal pressure variation and NOx discharge amount constructed from the plant data and weather data.

The plant according to still another aspect of this invention comprises a combustor, and a combustion vibration estimating apparatus having an inputting unit
30 which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as a restricting value of NOx,

. 28964-62

an internal pressure variation characteristic grasping unit
which makes internal

pressure variation of a combustor into a mathematical model
from the plant data and weather data input from the inputting
unit, a NOx discharge amount characteristic grasping unit
which makes an NOx discharge amount into a mathematical model
5 from the input plant data and weather data input from the
inputting unit, a safe region estimating unit which applies
a limiting value of the internal pressure variation to the
mathematical model obtained by the internal pressure
variation characteristic grasping unit, and applies a
10 restricting value of the NOx to the mathematical model
obtained by the NOx discharge amount characteristic grasping
unit, thereby obtaining a region where the NOx discharge
amount is equal to or less than the restricting value and
the combustion vibration is less prone to be generated, and
15 an outputting unit which outputs a safe region estimation
result by the safe region estimating unit.

According to the above-mentioned aspect, the internal
pressure variation characteristic grasping unit makes the
internal pressure variation of the combustor into the
20 mathematical model from the plant data and weather data input
from the inputting unit, the NOx discharge amount
characteristic grasping unit makes the NOx discharge amount
into the mathematical model from the plant data and weather
data input by the inputting unit, the safe region estimating
25 unit applies the limiting value of the internal pressure

. 28964-62

variation and the restricting value of the NOx to the mathematical model to obtain the combustion vibration-less prone to be generated region, and the safe region estimation result is output from the outputting unit.

5 According to still another aspect of this invention, there is a plant comprising: a combustor and a combustion vibration estimating apparatus, wherein the combustion vibration estimating apparatus constructs a mathematical model which explains internal pressure
10 variation, and an NOx and a CO discharge amount from plant data and weather data, wherein the plant data and the weather data are obtained with combustion in the combustor, and the combustion vibration estimating apparatus obtains and outputs a combustion vibration-prone to be generated
15 region and a combustion vibration-less prone to be generated region based on the constructed mathematical model, the combustion vibration estimating apparatus comprising: a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the
20 mathematical model; and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration region
25 estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

 According to the above-mentioned aspect, the
30 combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains the internal pressure variation, NOx discharge amount and the CO

28964-62

discharge amount constructed from the plant data and weather data, and a result thereof is output.

The plant according to still another aspect of this invention comprises a combustor, and a combustion
5 vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation,

as well as restricting values of NOx and CO, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data input by the inputting unit, a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the plant data and weather data input by the inputting unit, a CO discharge amount characteristic grasping unit which makes an CO discharge amount into a mathematical model from the plant data and weather data input by the inputting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, and applies a restricting value of the CO to the mathematical model obtained by the CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

According to the above-mentioned aspect, the internal

pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the NOx discharge amount
5 characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the CO discharge amount characteristic grasping unit makes the CO discharge amount into the mathematical model from the plant data and weather
10 data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting values of NOx and CO to the mathematical model, and the region where the discharge amounts of NOx and CO are equal to or less than the restricting
15 value and the combustion vibration is prone to be generated, and the safe region estimation result is output from the outputting unit.

The plant according to still another aspect of this invention comprises a combustor, and a combustion vibration
20 estimating apparatus having inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model
25 from the plant data and weather data input by the inputting

unit, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data selected by the focus setting unit, a
5 discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical model from the plant data and weather data selected by the focus setting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical
10 model obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount
15 and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

According to the above-mentioned aspect, the internal
20 pressure variation characteristic grasping unit is input by the inputting unit, the internal pressure variation of the combustor is made into the mathematical model from the plant data and weather data selected by the focus setting unit, the discharge amount characteristic grasping unit
25 makes the discharge amounts of NOx and CO into the

mathematical model from the plant data and weather data selected by the focus setting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and restricting values of NOx and CO to
5 the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the safe region estimation result is output from the outputting unit.

10 The plant according to still another aspect of this invention comprises a combustor, and a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation,
15 as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the plant data and weather data input by the inputting unit, an internal pressure variation characteristic grasping unit which makes internal pressure variation of
20 a combustor into a mathematical model from the plant data and weather data selected by the focus setting unit, a discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical model from the plant data and weather data selected by the focus setting
25 unit, a safe region estimating unit which applies a limiting

value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, a proposed adjustment generating unit which obtains a point to be measured next, using a safe region estimation result by the safe region estimating unit, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit and a point to be measured by the proposed adjustment generating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data selected by the focus determining unit, the discharge amount characteristic grasping unit makes the NOx and CO discharge amounts into the mathematical model from the plant data and weather data selected by the focus determining unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the NOx and CO restricting values to the mathematical model, a region where

28964-62

the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the proposed adjustment generating unit obtains the point to be measured next using the safe region estimation result by the safe region estimating unit, and the safe region estimation result by the safe region estimating unit and the point to be measured next by the proposed adjustment generating unit are output from the outputting unit.

According to still another aspect of this invention, there is provided a gas turbine plant comprising: a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor bypassing the combustor; and a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using a mathematical model representing internal pressure variation employing plant data and weather data as variables, and estimates and outputs a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, the combustion vibration estimating apparatus comprising: a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model;

. 28964-62

and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the
5 combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

10 According to the above-mentioned aspect, the combustion vibration-prone to be generated region and the combustion vibration-less prone to be generated region are

28964-62

obtained on the mathematical model constructed from the plant data and weather data, and a result thereof is output.

According to still another aspect of this invention, there is a gas turbine plant comprising: a gas turbine plant comprising: a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor; and a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus comprising: an inputting unit which inputs plant data, weather data and limiting value of internal pressure variation obtained with combustion in the combustor; an internal pressure variation characteristic grasping unit which sets up a mathematical model representing internal pressure variation of a combustor using the inputted plant data and weather data as variables; a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model by applying the limiting value of the internal pressure variation to the mathematical model to estimate a possible combustion vibration-prone region; and an outputting unit which outputs the possible combustion

28964-62

vibration-prone region estimated by the combustion vibration region estimating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit
5 makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the combustion vibration region estimating unit applies the limiting value of the internal pressure variation to the mathematical model to obtain the
10 combustion-prone to be generated region, and the combustion vibration region estimation result is output from the outputting unit.

According to still another aspect of this invention, there is a gas turbine plant comprising: a gas
15 turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for
20 controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air
25 supplied from the compressor without through the combustor and a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion
30 vibration, the combustion vibration estimating apparatus comprising: an inputting unit which inputs plant data and weather data, an internal pressure variation estimating unit which estimates internal pressure variation of the combustor

28964-62

from the plant data and weather data which are input from the inputting unit, and an outputting unit which outputs internal pressure variation estimation result estimated by the internal pressure variation estimating unit.

5 According to the above-mentioned aspect, the internal pressure variation estimating unit estimates the internal pressure variation of the combustor by the plant data and weather data input by the inputting unit, and the estimated internal pressure variation estimation result is
10 output from the outputting unit.

 The gas turbine plant according to still another aspect

of this invention comprises a gas turbine having a combustor,
a compressor for supplying compressed air to the combustor,
an inlet guide blade for supplying air to the compressor,
a turbine which is connected to the compressor and is rotated
5 by emission gas of the combustor, a main fuel flow rate control
valve for controlling a main flame fuel supply amount which
is main flame of combustion in the combustor, a pilot fuel
flow rate control valve for controlling a pilot flame fuel
supply amount which holds the main flame, and a combustor
10 bypass valve for supplying, to the turbine, the compressed
air supplied from the compressor without through the
combustor, and a combustion vibration estimating apparatus
which constructs a mathematical model which explains
internal pressure variation and an NOx discharge amount from
15 plant data and weather data which are obtained with
combustion in the combustor, and obtains and outputs a
combustion vibration-prone to be generated region and a
combustion vibration-less prone to be generated region based
on the constructed mathematical model.

20 According to the above-mentioned aspect, the
combustion vibration-less prone to be generated region and
combustion vibration-prone to be generated region are
obtained based on the mathematical model which explains
internal pressure variation and NOx discharge amount
25 constructed from the plant data and weather data.

The gas turbine plant according to still another aspect of this invention comprises a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor, and a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as a restricting value of NOx, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data input from the inputting unit, a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the input plant data and weather data input from the inputting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical

model obtained by the internal pressure variation characteristic grasping unit, and applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, thereby
5 obtaining a region where the NOx discharge amount is equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

10 According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input from the inputting unit, the NOx discharge amount
15 characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting value of the NOx to the
20 mathematical model to obtain the combustion vibration-less prone to be generated region, and the safe region estimation result is output from the outputting unit.

The gas turbine plant according to still another aspect of this invention comprises a gas turbine having a combustor,
25 a compressor for supplying compressed air to the combustor,

. 28964-62

an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor, and a combustion vibration estimating apparatus which constructs a mathematical model for explaining internal pressure variation, NOx and a CO discharge amount from plant data and weather data obtained with combustion in the combustor, a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region are obtained based on the constructed mathematical model and are output, the combustion vibration estimating apparatus comprising: a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

30 According to the above-mentioned aspect, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains the

. 28964-62

internal pressure variation, NOx discharge amount and the CO discharge amount constructed from the plant data and weather data, and a result thereof is output.

5 The gas turbine plant according to still another aspect

of this invention comprises a gas turbine having a combustor,
a compressor for supplying compressed air to the combustor,
an inlet guide blade for supplying air to the compressor,
a turbine which is connected to the compressor and is rotated
5 by emission gas of the combustor, a main fuel flow rate control
valve for controlling a main flame fuel supply amount which
is main flame of combustion in the combustor, a pilot fuel
flow rate control valve for controlling a pilot flame fuel
supply amount which holds the main flame, and a combustor
10 bypass valve for supplying, to the turbine, the compressed
air supplied from the compressor without through the
combustor, and a combustion vibration estimating apparatus
having an inputting unit which inputs limiting values of
plant data, weather data obtained with combustion in the
15 combustor and internal pressure variation, as well as
restricting values of NOx and CO, an internal pressure
variation characteristic grasping unit which makes internal
pressure variation of a combustor into a mathematical model
from the plant data and weather data input by the inputting
20 unit, a NOx discharge amount characteristic grasping unit
which makes an NOx discharge amount into a mathematical model
from the plant data and weather data input by the inputting
unit, a CO discharge amount characteristic grasping unit
which makes an CO discharge amount into a mathematical model
25 from the plant data and weather data input by the inputting

unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, and applies a restricting value of the CO to the mathematical model obtained by the CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the CO discharge amount characteristic grasping unit makes the CO discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating

unit applies the limiting value of the internal pressure variation and the restricting values of NOx and CO to the mathematical model, and the region where the discharge amounts of NOx and CO are equal to or less than the restricting value and the combustion vibration is prone to be generated, and the safe region estimation result is output from the outputting unit.

The gas turbine plant according to still another aspect of this invention comprises a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor, and a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the

plant data and weather data input by the inputting unit,
an internal pressure variation characteristic grasping unit
which makes internal pressure variation of a combustor into
a mathematical model from the plant data and weather data
5 selected by the focus setting unit, a discharge amount
characteristic grasping unit which makes NOx and CO discharge
amounts into a mathematical model from the plant data and
weather data selected by the focus setting unit, a safe region
estimating unit which applies a limiting value of the
10 internal pressure variation to the mathematical model
obtained by the internal pressure variation characteristic
grasping unit, applies restricting values of the NOx and
CO to the mathematical models obtained by the NOx and CO
discharge amount characteristic grasping unit, thereby
15 obtaining a region where the NOx discharge amount and the
CO discharge amount are equal to or less than the restricting
value and the combustion vibration is less prone to be
generated, and an outputting unit which outputs a safe region
estimation result by the safe region estimating unit.

20 According to the above-mentioned aspect, the internal
pressure variation characteristic grasping unit is input
by the inputting unit, the internal pressure variation of
the combustor is made into the mathematical model from the
plant data and weather data selected by the focus setting
25 unit, the discharge amount characteristic grasping unit

makes the discharge amounts of NOx and CO into the mathematical model from the plant data and weather data selected by the focus setting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and restricting values of NOx and CO to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the safe region estimation result is output from the outputting unit.

The gas turbine plant according to still another aspect of this invention comprises a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor, and a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the

combustor and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the plant data and weather data input by the inputting unit, 5 an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data selected by the focus setting unit, a discharge amount characteristic grasping unit which makes NOx and CO discharge 10 amounts into a mathematical model from the plant data and weather data selected by the focus setting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic 15 grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting 20 value and the combustion vibration is less prone to be generated, a proposed adjustment generating unit which obtains a point to be measured next, using a safe region estimation result by the safe region estimating unit, and an outputting unit which outputs a safe region estimation 25 result by the safe region estimating unit and a point to

be measured by the proposed adjustment generating unit.

According to the above-mentioned aspect, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the pwd selected by the focus determining unit, the discharge amount characteristic grasping unit makes the NOx and CO discharge amounts into the mathematical model from the plant data and weather data selected by the focus determining unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the NOx and CO restricting values to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the proposed adjustment generating unit obtains the point to be measured next using the safe region estimation result by the safe region estimating unit, and the safe region estimation result by the safe region estimating unit and the point to be measured next by the proposed adjustment generating unit are output from the outputting unit.

Other objects and features of this invention will become apparent from the following description with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a combustion vibration estimating apparatus according to a first embodiment of the present invention,

5 Fig. 2 is a principle view of an estimation method of a combustion vibration region according to the first embodiment of the invention,

Fig. 3 is a graph showing an example of output of the combustion vibration region in the combustion vibration
10 estimating apparatus according to the first embodiment of the invention,

Fig. 4 is a block diagram of the combustion vibration estimating apparatus according to a second embodiment of the invention,

15 Fig. 5 is a graph showing an example of output of the combustion vibration region in the combustion vibration estimating apparatus according to the second embodiment of the invention,

Fig. 6 is a block diagram of the combustion vibration
20 estimating apparatus according to a third embodiment of the invention,

Fig. 7 is a principle view of an estimation method of a safe region in the combustion vibration region according to the third embodiment of the invention,

25 Fig. 8 is a principle view of an estimation method

of the safe region in the combustion vibration estimating apparatus according to the third embodiment of the invention,

Fig. 9 is a principle view of an estimation method of an NOx restriction level in the combustion vibration
5 estimating apparatus according to the third embodiment of the invention,

Fig. 10 is a graph showing an example of output of the safe region in the combustion vibration estimating apparatus according to the third embodiment of the invention,

10 Fig. 11 is a block diagram schematically showing one example of a structure of a gas turbine system to which the invention can be applied,

Fig. 12 is a graph showing a concrete application example of the combustion vibration estimating apparatus
15 according to the third embodiment of the invention,

Fig. 13 is a block diagram of the combustion vibration estimating apparatus according to a forth embodiment of the present invention,

Fig. 14 is a graph showing an example of output of
20 the safe region in the combustion vibration estimating apparatus according to the forth embodiment of the invention,

Fig. 15 is a block diagram of the combustion vibration estimating apparatus according to a fifth embodiment of the invention,

25 Fig. 16 is a graph showing an example of output of

the safe region in the combustion vibration estimating apparatus according to the fifth embodiment of the invention,

Fig. 17 is a block diagram of the combustion vibration estimating apparatus according to a sixth embodiment of the invention,

Fig. 18 is a graph showing an example of output of the safe region in the combustion vibration estimating apparatus according to the sixth embodiment of the invention, and

Fig. 19 is a block diagram showing prior art.

DETAILED DESCRIPTION

Embodiments of an optical amplifier apparatus according to the present invention will be explained in detail below with reference to the attached drawings.

Fig. 1 shows a structure of a first embodiment of a combustion vibration estimating apparatus of the present invention. In Fig. 1, a symbol 10 represents the entire combustion vibration estimating apparatus. The combustion vibration estimating apparatus 10 comprises a internal pressure variation characteristic grasping unit 1 for making an internal pressure variation of a combustor into a mathematical model, a combustion vibration region estimating unit 2 for obtaining combustion vibration-prone to be generated region, a database 3 in which plant data

and weather data are stored in a time series, inputting unit 4 for inputting the plant data, the weather data and a limiting value and the like of internal pressure variation, and outputting unit 5 which outputs a combustion vibration region estimation result. A plant 30 of to-be estimated combustion vibration is connected to the inputting unit 4.

The internal pressure variation characteristic grasping unit 1 constructs a mathematical model which explains the internal pressure variation using data stored in the database 3. For example, if the number of combustors is defined as n_1 and the number of frequency bands is defined as n_2 , the internal pressure variation is made into a mathematical model with a multi-regression model.

$$Y_{ji} = a_{ij.0} + a_{ij.1} \times X_{11} + a_{ij.2} \times X_{12} + a_{ij.3} \times X_{21} + a_{ij.4} \times X_{22} \dots (1)$$

In equation (1),

Y_{ji} : internal pressure variation value of a j -th frequency band of a first i combustor ($i=1, \dots, n_1, j=1, \dots, n_2$)

X_{11} : value of manipulated variable 1

X_{12} : value of manipulated variable 2

X_{21} : value of quantity of non-manipulatable state 1

X_{22} : value of quantity of non-manipulatable state 2

$a_{ij.0}, a_{ij.1}, a_{ij.2}, a_{ij.3}, a_{ij.4}$: coefficient parameter

The internal pressure variation characteristic grasping unit 1 obtains coefficient parameters $a_{ij.0}, a_{ij.1}, a_{ij.2}, a_{ij.3}, a_{ij.4}$ of the equation (1) using internal

pressure variation values, manipulated variables, quantity
of non-manipulatable states organized and stored at time
periods in the database 3, and sends these parameters to
the combustion vibration region estimating unit 2. As a
5 solution of the coefficient parameters, a method of least
squares is used for example.

The term "internal pressure variation value" is
explained below. Data obtained from a pressure sensor
(internal pressure sensor) 31 disposed in the plant 30 is
10 A/D converted, a result of frequency analysis of the
converted value is divided into n_2 -number of frequency bands,
and a maximum amplitude value for a certain time period in
each frequency band is the internal pressure variation value.
For the sake of explanation, a model formula is described
15 based on that the number of manipulated variables is two
and the quantity of non-manipulatable states is two, but
the number is not limited to two.

The combustion vibration region estimating unit 2
obtains combustion vibration-prone to be generated region
20 using the mathematical model obtained by the internal
pressure variation characteristic grasping unit 1.

For example, internal pressure variation estimated
value Y'_{ij} of a j -th frequency band of an i -th combustor
of when a manipulated variable 1, a manipulated variable
25 2, quantity of non-manipulatable state 1 and quantity of

non-manipulatable state 2 are X'_{11} , X'_{12} , X'_{21} , X'_{22} , respectively, is obtained by the following equation (2):

$$Y'_{ij} = a_{ij.0} + a_{ij.1}X'_{11} + a_{ij.2}X'_{12} + a_{ij.3}X'_{21} + a_{ij.4}X'_{22} \dots (2)$$

In equation (2), $a_{ij.0}$, $a_{ij.1}$, $a_{ij.2}$, $a_{ij.3}$, $a_{ij.4}$ are
 5 coefficient parameters sent from the internal pressure variation characteristic grasping unit 1.

A limiting value is provided in an internal pressure variation of the f -th frequency band of the i -th combustor for a structural reason of the combustor or peripheral
 10 equipment. If the limiting value of internal pressure variation of the f -th frequency band of the i -th combustor sent from the inputting unit 4 is defined as Z_{ij} , this means that there exist X'_{11} , X'_{12} , X'_{21} , X'_{22} which satisfied the following equation:

$$15 \quad Z_{ij} = a_{ij.0} + a_{ij.1}X'_{11} + a_{ij.2}X'_{12} + a_{ij.3}X'_{21} + a_{ij.4}X'_{22} \dots (3)$$

If values of the quantity of non-manipulatable state 1 and quantity of non-manipulatable state 2 are input in the inputting unit 4, and if these input values are sent to the combustion vibration region estimating unit 2, every
 20 value in the equation (3) except X'_{11} and X'_{12} is a constant, and it is easy to obtain the (X'_{11} and X'_{12}) which satisfy the equation (3). If the (X'_{11} and X'_{12}) are obtained from gain which is α_k ($k=1, \dots, n_3$) sent from the inputting unit 4 using the following equation, n_3 number of lines can be
 25 obtained in each frequency band of each combustor:

$$\alpha_k X Z_{ij} = a_{ij.0} + a_{ij.1} X'_{11} + a_{ij.2} X'_{12} + a_{ij.3} X'_{21} + a_{ij.4} X'_{22} \quad (4)$$

Fig. 2 shows this. If the coefficient parameter $a_{ij.2}$ is positive, an upper side of the straight line is a combustion vibration-prone to be generated region and a lower side is a combustion vibration-less prone to be generated region. If the coefficient parameter $a_{ij.2}$ is negative on the contrary, the lower side of the straight line is the combustion vibration-prone to be generated region, and the upper side is the combustion vibration-less prone to be generated region.

The combustion vibration region estimating unit 2 obtains the above-described straight lines for full frequency bands of all the combustors from limiting values Z_{ij} ($i=1, \dots, n_1, j=1, \dots, n_2$), gain α_k ($k=1, \dots, n_3$) and values of variables except of the j -th frequency band of the i -th combustor sent from the inputting unit 4, and from coefficient parameter $a_{ij.0}, a_{ij.1}, a_{ij.2}, a_{ij.3}, a_{ij.4}$ ($i=1, \dots, n_1, j=1, \dots, n_2$) sent from the internal pressure variation characteristic grasping unit 1, and finally obtains combustion vibration-prone to be generated region and combustion vibration-less prone to be generated region based on the procedure of linear programming, and sends the same to the outputting unit 5.

In the database 3, the internal pressure variation values, manipulated variables, quantity of

non-manipulatable state are organized and stored in the time series at time periods, and if the data is sent from the inputting unit 4, the data is additionally stored in the database 3.

5 The inputting unit 4 receives the plant data and weather data sent from the plant 30 outside the combustion vibration estimating apparatus 10 to output to the database 3. The plant data and weather data include the internal pressure variation values, manipulated variables and quantity of
10 non-manipulatable state. The limiting values Z_{ij} ($i=1, \dots, n_1, j=1, \dots, n_2$), gain α_k ($k=1, \dots, n_3$) and values of variables except of the j -th frequency band of the i -th combustor are sent from a device such as a keyboard or touch screen provided in the inputting unit 4 to the combustion vibration region
15 estimating unit 2.

The outputting unit 5 outputs an estimation result sent from the combustion vibration region estimating unit 2. Fig. 3 shows an example of output in which a combustion vibration region is output. In Fig. 3, the horizontal axis
20 is X_{11} and the vertical axis is X_{12} . In this example, the combustion vibration regions are shown like contour lines per each gain α_k . A central portion is the combustion vibration-less prone to be generated region and outer portion is combustion vibration-prone to be generated region. The
25 region is output to a display device such as a CRT or a printer

provided in the outputting unit.

As explained above, according to this combustion vibration estimating apparatus 10, combustion vibration generated in a combustor of a gas turbine is estimated by the mathematical model, and based on this, the combustion control system can easily be controlled, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Although the plant data and weather data are input from the plant 30 in the above embodiment, the data may be input directly manually from a keyboard provided in the inputting unit 4. The model structure is described as being one liner order, but it may be a higher-order model of two orders or more. The model formula is described as being formula using manipulated variable or quantity of non-manipulatable state input from the plant 30, but a value converted based on physical characteristics may be used.

Fig. 4 shows a structure of a second embodiment of the combustion vibration estimating apparatus of the present invention. In Fig. 4, a symbol 20 represents the entire combustion vibration estimating apparatus. The combustion vibration estimating apparatus 20 comprises an internal pressure variation estimating unit 12 for estimating an internal pressure variation of a combustor, a database 13 for storing plant data and weather data in time series,

inputting unit 14 for inputting the plant data and weather data, and an outputting unit 15 for outputting an internal pressure variation estimation result. A plant 30 whose combustion vibration is to be estimated is connected to the
 5 inputting unit 14.

The internal pressure variation estimating unit 12 estimates a value of an internal pressure variation using the latest internal pressure variation value, manipulated variable and quantity of non-manipulatable state stored in
 10 the database 13, and sends the internal pressure variation estimated value to the database 13. For example, if the number of combustor is n_1 and the number of frequency bands is n_2 , the internal pressure variation estimated value is estimated with the multi-regression model:

$$15 \quad Y'_{ij} = a_{ij.0} + a_{ij.1} \times X_{11} + a_{ij.2} \times X_{12} + a_{ij.3} \times X_{21} + a_{ij.4} \times X_{22} \quad \dots (5)$$

In equation (5),

Y_{ji} : internal pressure variation value of a j -th frequency band of a first i combustor ($i=1, \dots, n_1, j=1, \dots, n_2$)

X_{11} : value of manipulated variable 1

20 X_{12} : value of manipulated variable 2

X_{21} : value of quantity of non-manipulatable state 1

X_{22} : value of quantity of non-manipulatable state 2

$a_{ij.0}, a_{ij.1}, a_{ij.2}, a_{ij.3}, a_{ij.4}$: coefficient parameter

The coefficient parameter has previously been obtained
 25 by analysis, and stored in the internal pressure variation

estimating unit 12. The term "internal pressure variation value" is explained below. Data obtained from a pressure sensor (internal pressure sensor) 31 disposed in the plant 30 is A/D converted, a result of frequency analysis of the converted value is divided into n_2 -number of frequency bands, and a maximum amplitude value for a certain time period in each frequency band is the internal pressure variation value.

For the sake of explanation, a model formula is described based on that the number of manipulated variables is two and the quantity of non-manipulatable states is two, but the number is not limited to two. The model structure is described as being one liner order, but it may be a higher-order model of two orders or more or may be non-liner model such as neural network. The model formula is described as being formula using manipulated variable or quantity of non-manipulatable state input from the plant 30, but a value converted based on law of mass balance may be used.

In the database 13, the internal pressure variation values, manipulated variables, quantity of non-manipulatable state are organized and stored in the time series at time periods, and if the data is sent from the inputting unit 14 or the internal pressure variation estimating unit 12, the data is additionally stored in the database 13.

The inputting unit 14 receives the plant data and weather data sent from the plant 30 outside the combustion vibration estimating apparatus 20. The plant data and weather data include the internal pressure variation values, manipulated variables and quantity of non-manipulatable state.

The outputting unit 15 outputs data stored in the database 13. Fig. 5 shows an example in which an actually measured value Y_{ji} and its estimated value Y'_{ij} of an internal pressure variation of the j -th frequency band of the i -th combustor. In Fig. 5, the horizontal axis shows time and the vertical axis shows the internal pressure variation Y_{ij} . The value is output to a display device such as a CRT or a printer provided in the outputting unit.

As described above, according to this embodiment, the estimated value and the actually measured value of the internal pressure variation can be output at the same time, it is possible to judge whether the internal pressure variation of the gas turbine combustor is at a level as planned, generation of the combustion vibration can be detected at an early stage, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Fig. 6 shows a structure of a third embodiment of the combustion vibration estimating apparatus of the present

invention. In Fig. 6, a symbol 40 represents the entire combustion vibration estimating apparatus. The combustion vibration estimating apparatus 40 comprises an internal pressure variation characteristic grasping unit 41 for making an internal pressure variation of a combustor into a mathematical model, a safe region estimating unit 42 for obtaining a region where an NOx discharge amount is equal to or less than a restricting value and combustion vibration is less prone to be generated, a database 43 for storing plant data and weather data in a time series, inputting unit 44 for inputting a limiting value of the plant data, the weather data and the internal pressure variation and a restricting value of NOx, outputting unit 45 for outputting a safe region estimation result, and a NOx discharge amount characteristic grasping unit 46 for making the NOx discharge amount into a mathematical model. A plant 50 of a to-be estimated combustion vibration is connected to the inputting unit 44. A symbol 49 represents a connection portion for connecting the above means to each other (in other drawings also).

The internal pressure variation characteristic grasping unit 41 constructs a mathematical model which explains the internal pressure variation using data stored in the database 43. For example, if the number of combustor is n_1 and the number of frequency bands is n_2 , the internal

pressure variation estimated value is made into the multi-regression model as shown in the equation (1).

The internal pressure variation characteristic grasping unit 41 obtains coefficient parameters $a_{ij.0}, a_{ij.1}, a_{ij.2}, a_{ij.3}, a_{ij.4}$ of the equation (1) using internal pressure variation values, manipulated variables, quantity of non-manipulatable states organized and stored at time periods in the database 43, and sends these parameters to the safe region estimating unit 42. As a solution of the coefficient parameters, a method of least squares is used for example.

The term "internal pressure variation value" is explained below. Data obtained from a pressure sensor (internal pressure sensor) disposed in the plant 50 is A/D converted, a result of frequency analysis of the converted value is divided into n_2 -number of frequency bands, and a maximum amplitude value for a certain time period in each frequency band is the internal pressure variation value. For the sake of explanation, a model formula is described based on that the number of manipulated variables is two and the quantity of non-manipulatable states is two, but the number is not limited to two.

The NOx discharge amount characteristic grasping unit 46 constructs a mathematical model which explains NOx discharge amount using data stored in the database 43. For

example, the NOx discharge amount is made into a mathematical model with a multi-regression model shown in the following equation (6):

$$E=b_0+b_1\times X_{11}+b_2\times X_{12}+b_3\times X_{21}+b_4\times X_{22} \quad \dots (6)$$

5 In equation (6),

E: NOx discharge amount

X₁₁: value of manipulated variable 1

X₁₂: value of manipulated variable 2

X₂₁: value of quantity of non-manipulatable state 1

10 X₂₂: value of quantity of non-manipulatable state 2

b₀, b₁, b₂, b₃, b₄: coefficient parameter

The NOx discharge amount characteristic grasping unit 46 obtains the coefficient parameters b₀, b₁, b₂, b₃, b₄ of the equation (6) using the NOx discharge amount, the manipulated variable, non-manipulatable states organized and stored at time periods in the database 43, and sends the same to the safe region estimating unit 42. As a solution of the coefficient parameters, a method of least squares is used for example.

20 For the sake of explanation, a model formula is described based on that the number of manipulated variables is two and the quantity of non-manipulatable states is two, but the number is not limited to two.

The safe region estimating unit 42 obtains a region where an NOx discharge amount is equal to or less than a

restricting value and combustion vibration is less prone
to be generated, using the mathematical models obtained by
the internal pressure variation characteristic grasping
unit 41 and the NOx discharge amount characteristic grasping
5 unit 46.

For example, the estimated value Y'_{ij} of an internal
pressure variation of the j -th frequency band of the i -th
combustor when the manipulated variable 1, the manipulated
variable 2, the quantity of non-manipulatable state 1 and
10 the quantity of non-manipulatable state 2 are X'_{11} , X'_{12} ,
 X'_{21} and X'_{22} , respectively, is obtained by the equation (2).
At that time, the $a_{ij.0}$, $a_{ij.1}$, $a_{ij.2}$, $a_{ij.3}$, $a_{ij.4}$ are coefficient
parameters sent from the internal pressure variation
characteristic grasping unit 41.

15 In the internal pressure variation of the j -th
frequency band of the i -th combustor, a limiting value is
provided for a structural reason of the combustor or
peripheral equipment. If the limiting value of internal
pressure variation of the f -th frequency band of the i -th
20 combustor sent from the inputting unit 44 is defined as Z_{ij} ,
this means that there exist X'_{11} , X'_{12} , X'_{21} , X'_{22} which
satisfied the equation (3).

If values of the quantity of non-manipulatable state
1 and the quantity of non-manipulatable state 2 are input
25 in the inputting unit 44 and these input values are sent

to the safe region estimating unit 42, every value in the equation (3) except X'_{11} and X'_{12} is a constant, and it is easy to obtain the (X'_{11} and X'_{12}) which satisfy the equation (3). If the (X'_{11} , X'_{12}) are obtained from the equation (4) using the gain which is $\text{gain}\alpha_k (k=1, \dots, n_3)$ sent from the inputting unit 44, n-number of lines can be obtained in every frequency band. Fig. 7 shows this. If the coefficient parameter $a_{ij.2}$ is positive, an upper side of the straight line is a combustion vibration-prone to be generated region and a lower side is a combustion vibration-less prone to be generated region. If the coefficient parameter $a_{ij.2}$ is negative on the contrary, the lower side of the straight line is the combustion vibration-prone to be generated region, and the upper side is the combustion vibration-less prone to be generated region.

The safe region estimating unit 42 obtains the above-described straight lines for full frequency bands of all the combustors from limiting values Z_{ij} ($i=1, \dots, n_1$, $j=1, \dots, n_2$), $\text{gain}\alpha_k (k=1, \dots, n_3)$ and values of variables except of the j-th frequency band of the i-th combustor sent from the inputting unit 44, and from coefficient parameter $a_{ij.0}, a_{ij.1}, a_{ij.2}, a_{ij.3}, a_{ij.4}$ ($i=1, \dots, n_1$, $j=1, \dots, n_2$) sent from the internal pressure variation characteristic grasping unit 41, and finally obtains combustion vibration-prone to be generated region and combustion

vibration-less prone to be generated region based on the procedure of linear programming. Fig. 8 shows this.

Further, the safe region estimating unit 42 obtains an NOx-less-prone to be generated region and an NOx-prone to be generated region from the coefficient parameters b_0 , b_1 , b_2 , b_3 , b_4 sent from the NOx discharge amount characteristic grasping unit 46 and a restricting value F , a gain β_k ($k=1, \dots, n_3$) and variables except particular two variables. Fig. 9 shows this. Here, if the coefficient parameter b_2 is positive, an upper side of the straight line is a NOx-prone to be generated region and a lower side is a NOx-less prone to be generated region. If the coefficient parameter b_2 is negative on the contrary, the lower side of the straight line is the NOx-prone to be generated region, and the upper side is the NOx-less prone to be generated region.

The safe region estimating unit 42 obtains and transmits to the outputting unit 45 a region where the NOx discharge amount is equal to or less than the restricting value and the combustion vibration is less prone to be generated based on procedure of linear programming, for the combustion vibration-less prone to be generated region, the combustion vibration-prone to be generated region, the NOx-prone to be generated region and the NOx-less-prone to be generated region. Fig. 10 shows this.

In the database 43, the internal pressure variation values, manipulated variables, quantity of non-manipulatable state are organized and stored in the time series at time periods, and if the data is sent from the inputting unit 44, the data is additionally stored in the database 43.

The inputting unit 44 receives the plant data and weather data sent from the plant 50 outside the combustion vibration estimating apparatus 40, and sends the same to the database 43. The plant data and weather data include the internal pressure variation values, manipulated variables and quantity of non-manipulatable state. From a device such as a keyboard or a touch screen provided in the inputting unit 44, limiting values Z_{ij} ($i=1, \dots, n_1$, $j=1, \dots, n_2$), the restricting value F of the NOx discharge amount, gains α_k, β_k ($k=1, \dots, n_3$) and values of variables except particular two variables of the j -th frequency band of the i -th combustor are input, and these are sent to the safe region estimating unit 42.

For example, in a gas turbine 51, the plant data includes, in addition to the internal pressure variation value and the NOx discharge amount, an intake air temperature, an intake air pressure, an intake air flow rate, a temperature of outlet of a compressor, pressure of the outlet of the compressor, a fuel flow rate, a fuel temperature, a fuel

pressure, a temperature of exhaust gas, angle of an inlet guide blade, an opening of a combustor bypass valve, an opening of a fuel flow rate control valve. There exist fuel flow rate, fuel pressure and fuel flow rate control valve
5 which are for main flame mainly used for combustion, and fuel flow rate, fuel pressure and fuel flow rate control valve which are for pilot flame used for holding the main flame. The weather data includes an atmosphere temperature, atmospheric pressure, and moisture. The manipulated
10 variable and the quantity of non-manipulatable state used for the multi-regression model are selected from the weather data. In Fig. 11, a symbol 53 represents a compressor, a symbol 54 represents a turbine, a symbol 55 represents a combustor, a symbol 56 represents a main fuel flow rate
15 control valve, a symbol 57 represents a pilot fuel flow rate control valve, a symbol 58 represents a combustor bypass valve, and a symbol 59 represents an inlet guide blade.

The outputting unit 45 outputs an estimation result sent from the safe region estimating unit 42. Fig. 10 shows
20 an example of output in which a safe region is output. In Fig. 10, the horizontal axis is X_{11} and the vertical axis is X_{12} . In this example, the safe regions are shown like contour lines per each gain α_k and β_k . A central portion is the combustion vibration-less prone to be generated region
25 and outer portion is combustion vibration-prone to be

generated region. The region is output to a display device such as a CRT or a printer provided in the outputting unit 45.

As explained above, according to this combustion vibration estimating apparatus 40, combustion vibration and the NOx discharge amount generated in a combustor of a gas turbine are estimated by the mathematical model, and based on this, the combustion control system can easily be controlled, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced. Therefore, if the combustion vibration estimating apparatus 40 is used, a safe region where the NOx discharge amount is equal to or less than the restricting value and the combustion vibration is less prone to be generated is suggested for a combustion control parameter of a gas turbine which was conventionally adjusted based on experience of a skilled adjusting operator. Therefore, for example, it is possible to shorten the field adjusting period, and even a person who is not skilled can carry out the field adjustment easily. Fig. 12 concretely shows one example of an output result that can be applied to adjustment of a combustion control system of a gas turbine.

Although the plant data and weather data are input from the plant 50 in the above embodiment, the data may be input directly manually from a keyboard provided in the

inputting unit 44. The model structure is described as being one liner order, but it may be a higher-order model of two orders or more. The model formula is described as being formula using manipulated variable or quantity of
5 non-manipulatable state input from the plant 50, but a value converted based on physical characteristics may be used.

Fig. 13 shows a structure of a forth embodiment of the combustion vibration estimating apparatus of the present invention. In Fig. 13, a symbol 60 represents the entire
10 combustion vibration estimating apparatus. The combustion vibration estimating apparatus 60 comprises an internal pressure variation characteristic grasping unit 41 for making an internal pressure variation of a combustor into a mathematical model, a safe region estimating unit 62 for
15 obtaining a region where an NOx discharge amount and a CO discharge amount are equal to or less than a restricting value and combustion vibration is less prone to be generated, a database 63 for storing plant data and weather data in a time series, inputting unit 64 for inputting a limiting
20 value of the plant data, the weather data and the internal pressure variation and a restricting values of NOx and CO, outputting unit 65 for outputting a safe region estimation result, a NOx discharge amount characteristic grasping unit 46 for making the NOx discharge amount into a mathematical
25 model, and a CO discharge amount characteristic grasping

unit 67 for making the CO discharge amount into a mathematical model. A plant 50 of a to-be estimated combustion vibration is connected to the inputting unit 64.

The internal pressure variation characteristic grasping unit 41 and the NOx discharge amount characteristic grasping unit 46 are the same as those in the third embodiment. A redundancy explanation will be omitted, and only a portion different from the third embodiment will be explained.

The CO discharge amount characteristic grasping unit 67 constructs a mathematical model which explains a CO discharge amount using data stored in the database 63. For example, the CO discharge amount is made into a model with a multi-regression model expressed by the following equation (7):

$$G = C_0 + C_1 \times X_{11} + C_2 \times X_{12} + C_3 \times X_{21} + C_4 \times X_{22} \quad \dots (7)$$

In equation (7),

G: CO discharge amount

X_{11} : value of manipulated variable 1

X_{12} : value of manipulated variable 2

20 X_{21} : value of quantity of non-manipulatable state 1

X_{22} : value of quantity of non-manipulatable state 2

C_0, C_1, C_2, C_3, C_4 : coefficient parameter

The CO discharge amount characteristic grasping unit 67 obtains the C_0, C_1, C_2, C_3 and C_4 , using the CO discharge amount, the manipulated variable and quantity of

non-manipulatable state organized and stored into the database 63 in the time series at time periods, and sends the same to the safe region estimating unit 62. As a solution of the coefficient parameters, a method of least squares
5 is used for example.

For the sake of explanation, a model formula is described based on that the number of manipulated variables is two and the quantity of non-manipulatable states is two, but the number is not limited to two.

10 The safe region estimating unit 62 obtains a region where both the NOx discharge amount and CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, using mathematical models obtained by the internal pressure
15 variation characteristic grasping unit 41, the NOx discharge amount characteristic grasping unit 46 and the CO discharge amount characteristic grasping unit 67.

The methods for obtaining the combustion vibration-less prone to be generated region, the combustion
20 vibration-prone to be generated region, the NOx-less-prone to be generated region and the NOx-prone to be generated region are the same as those of the third embodiment. Therefore, methods for obtaining the combustion vibration-less prone to be generated region and the
25 combustion vibration-prone to be generated region will be

explained below.

Like the procedure of the combustion vibration and NOx, the safe region estimating unit 62 obtains the combustion vibration-less prone to be generated region and
5 the combustion vibration-prone to be generated region from a restricting value H of the CO discharge amount, gain γ_k ($k=1, \dots, n_3$) and particular two variables sent from the inputting unit 64, and from the coefficient parameters c_0 , c_1 , c_2 , c_3 and c_4 sent from the CO discharge amount
10 characteristic grasping unit 67.

The safe region estimating unit 62 obtains a region where both the NOx discharge amount and CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated based
15 on the procedure of linear programming, for the combustion vibration-less-prone to be generated region, the combustion vibration-prone to be generated region, the NOx-less-prone to be generated region, the NOx-prone to be generated region, the CO-less-prone to be generated region and the CO-prone
20 to be generated region, and sends the same to the outputting unit 65. Fig. 14 shows this. In Fig. 14, if the coefficient parameter c_2 is positive, an upper side of the straight line is a CO-prone to be generated region and a lower side is a CO-less prone to be generated region. If the coefficient
25 parameter c_2 is negative on the contrary, the lower side

of the straight line is the CO-prone to be generated region,
and the upper side is the CO-less prone to be generated region.

In the database 63, the internal pressure variation
values, manipulated variables, the NOx discharge amount,
5 the CO discharge amount, the manipulated variable and the
quantity of non-manipulatable state are organized and stored
in the time series at time periods, and if the data is sent
from the inputting unit 64, the data is additionally stored
in the database 63.

10 The inputting unit 64 receives the plant data and
weather data sent from the plant 50 outside the combustion
vibration estimating apparatus 60, and sends the same to
the database 63. From a device such as a keyboard or a touch
screen provided in the inputting unit 64, limiting values
15 Z_{ij} ($i=1, \dots, n_1, j=1, \dots, n_2$), the restricting value F
of the NOx discharge amount, the restricting value H of the
CO discharge amount, gains α_k, β_k ($k=1, \dots, n_3$) and values
of variables except particular two variables of the j -th
frequency band of the i -th combustor are input, and these
20 are sent to the safe region estimating unit 62. The plant
data and weather data include the internal pressure variation
value, the NOx discharge amount, the CO discharge amount,
the manipulated variable and the quantity of
non-manipulatable state. For example, in the third
25 embodiment, the plant data and weather data are the various

data explained in association with Fig. 11 to which the CO discharge amount is added.

The outputting unit 65 outputs an estimation result sent from the safe region estimating unit 62. Fig. 14 shows an example of output in which a safe region is output. In Fig. 14, the horizontal axis is X_{11} and the vertical axis is X_{12} . In this example, the safe regions are shown like contour lines per each gain α_k , β_k , γ_k . A central portion is the combustion vibration-less prone to be generated region and outer portion is combustion vibration-prone to be generated region. The region is output to a display device such as a CRT or a printer provided in the outputting unit 65.

As explained above, according to this combustion vibration estimating apparatus 60, combustion vibration, the NOx discharge amount and the CO discharge amount generated in a combustor of a gas turbine are estimated by the mathematical model, and based on this, the combustion control system can easily be controlled, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced. Therefore, if the combustion vibration estimating apparatus 60 is used, a safe region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting values and the combustion vibration is less prone

to be generated is suggested for a combustion control parameter of a gas turbine which was conventionally adjusted based on experience of a skilled adjusting operator. Therefore, for example, it is possible to shorten the field
5 adjusting period, and even a person who is not skilled can carry out the field adjustment easily.

Although the plant data and weather data are input from the plant 50 in the above embodiment, the data may be input directly manually from a keyboard provided in the
10 inputting unit 64. The model structure is described as being one liner order, but it may be a higher-order model of two orders or more. The model formula is described as being formula using manipulated variable or quantity of non-manipulatable state input from the plant 50, but a value
15 converted based on physical characteristics may be used.

Fig. 15 shows a structure of a fifth embodiment of the combustion vibration estimating apparatus of the present invention. In Fig. 15, a symbol 70 represents the entire combustion vibration estimating apparatus. The combustion
20 vibration estimating apparatus 70 comprises an internal pressure variation characteristic grasping unit 71 for making an internal pressure variation of a combustor into a mathematical model, a safe region estimating unit 72 for obtaining a region where an NOx discharge amount and a CO
25 discharge amount are equal to or less than a restricting

value and combustion vibration is less prone to be generated,
a database 63 for storing plant data and weather data in
a time series, inputting unit 74 for inputting a limiting
value of the plant data, the weather data and the internal
5 pressure variation and a restricting values of NOx and CO,
outputting unit 65 for outputting a safe region estimation
result, a NOx discharge amount characteristic grasping unit
76 for making the NOx discharge amount into a mathematical
model, and focus setting unit 78 for selecting data used
10 for mathematical model. A plant 50 of a to-be estimated
combustion vibration is connected to the inputting unit 74.

The internal pressure variation characteristic
grasping unit 71 has a function for selecting a database
used for making data into mathematical model, based on a
15 selection result described in a certain area of the database
63. Since the other structure and function and the like
of the internal pressure variation characteristic grasping
unit 71 are the same as those of the internal pressure
variation characteristic grasping unit 41 of the third
20 embodiment, redundant explanation will be omitted.

The discharge amount characteristic grasping unit 76
has a function for selecting a database used for making data
into mathematical model, based on a selection result
described in a certain area of the database 63. Since the
25 other structure and function and the like of the discharge

amount characteristic grasping unit 76 are the same as those
of the NOx discharge amount characteristic grasping unit
46 in the third embodiment and the CO discharge amount
characteristic grasping unit 67 in the forth embodiment,
5 redundant explanation will be omitted.

The safe region estimating unit 72 obtains a region
where both the NOx discharge amount and the CO discharge
amount are equal to or less than the restricting values and
the combustion vibration is less prone to be generated, using
10 mathematical models obtained by the internal pressure
variation characteristic grasping unit 71 and the discharge
amount characteristic grasping unit 76.

Methods for obtaining the combustion
vibration-less-prone to be generated region, the combustion
15 vibration-prone to be generated region, the NOx-less-prone
to be generated region, the NOx-prone to be generated region,
the CO-less-prone to be generated region and the CO-prone
to be generated region are the same as those of the forth
embodiment, redundant explanation will be omitted.

20 The focus setting unit 78 selects data from data stored
in the database 63 which corresponds to the focus setting
information input from the inputting unit 74, and describes
the selection result in a certain memory in the database
63. Here, the focus setting information is not specially
25 limited, but is information such as upper limit values, lower

limit values of the various variables, a center of the selection range and a maximum distance from the center.

The inputting unit 74 inputs the focus setting information for selecting data used for making a mathematical
 5 model from a device such as a keyboard and a touch screen provided in the inputting unit to transmit to the focus setting unit 78. Other structure, function and the like of the inputting unit 74 are the same as those of the inputting unit 64 in the forth embodiment except that the various data
 10 input from the device such as the keyboard and the touch screen is sent to the safe region estimating unit 72 (safe region estimating unit 62 in the forth embodiment). Therefore, redundant explanation will be omitted. The plant data and weather data are also the same as those of
 15 the forth embodiment.

The outputting unit 65 is the same as that of the forth embodiment except that the estimation result is supplied to the safe region estimating unit 72 (safe region estimating unit 62 in the forth embodiment). Therefore, redundant
 20 explanation will be omitted. Fig. 16 shows an example of output in which a safe region is output. In Fig. 16, the horizontal axis is X_{11} and the vertical axis is X_{12} . In this example, the safe regions are shown like contour lines per each gain α_k , β_k , γ_k . A central portion is the combustion
 25 vibration-less prone to be generated region and outer portion

is combustion vibration-prone to be generated region.

As explained above, according to this combustion vibration estimating apparatus 70, the combustion vibration, the NOx discharge amount and the CO discharge amount generated in the combustor of the gas turbine are estimated, the safe region where the combustion vibration is less prone to be generated can widely be obtained macroscopically and can be obtained with high precision macroscopically. Therefore, it is easy to grasp the combustion vibration characteristics. Further, by grasping the combustion vibration characteristics, the combustion control system can be adjusted easily, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced. For example, if the combustion vibration estimating apparatus 70 is used, a safe region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting values and the combustion vibration is less prone to be generated is suggested for a combustion control parameter of a gas turbine which was conventionally adjusted based on experience of a skilled adjusting operator. Therefore, for example, it is possible to shorten the field adjusting period, and even a person who is not skilled can carry out the field adjustment easily.

Although the plant data and weather data are input

from the plant 50 in the above embodiment, the data may be input directly manually from a keyboard provided in the inputting unit 74. The model structure is described as being one liner order, but it may be a higher-order model of two
5 orders or more. The model formula is described as being formula using manipulated variable or quantity of non-manipulatable state input from the plant 50, but a value converted based on physical characteristics may be used.

Fig. 17 shows a structure of a sixth embodiment of
10 the combustion vibration estimating apparatus of the present invention. In Fig. 17, a symbol 80 represents the entire combustion vibration estimating apparatus. The combustion vibration estimating apparatus 80 comprises an internal pressure variation characteristic grasping unit 71 for
15 making an internal pressure variation of a combustor into a mathematical model, a safe region estimating unit 82 for obtaining a region where an NOx discharge amount and a CO discharge amount are equal to or less than a restricting value and combustion vibration is less prone to be generated,
20 a database 63 for storing plant data and weather data in a time series, inputting unit 84 for inputting a limiting value of the plant data, the weather data and the internal pressure variation and a restricting values of NOx and CO, outputting unit 85 for outputting a safe region estimation
25 result and data used for making a mathematical model, a NOx

discharge amount characteristic grasping unit 76 for making
the NOx discharge amount into a mathematical model, focus
setting unit 88 for selecting data used for mathematical
model, and proposed adjustment generating unit 89 for
5 obtaining a point to be measured next using a safe region
estimation result. A plant 50 of a to-be estimated
combustion vibration is connected to the inputting unit 84.

Since the internal pressure variation characteristic
grasping unit 71 and the discharge amount characteristic
10 grasping unit 76 are the same as those of the fifth embodiment,
redundant explanation will be omitted.

The safe region estimating unit 82 obtains an estimated
optimal point where both the NOx discharge amount and CO
discharge amount are equal to or less than the restricting
15 values and a level of generation of the combustion vibration
is the smallest, and sends the estimated optimal point to
the focus setting unit 88 and the outputting unit 85. Other
structure, function and the like of the safe region
estimating unit 82 are the same as those of the safe region
20 estimating unit 72 in the fifth embodiment, redundant
explanation will be omitted.

Methods for obtaining the combustion
vibration-less-prone to be generated region, the combustion
vibration-prone to be generated region, the NOx-less-prone
25 to be generated region, the NOx-prone to be generated region,

the CO-less-prone to be generated region and the CO-prone to be generated region are the same as those of the forth embodiment, redundant explanation will be omitted.

At an initial stage of adjustment, the focus setting unit 88 selects data from data stored in the database 63 which corresponds to initial focus setting information input from the inputting unit 84, and describes the selection result in a certain memory in the database 63. Here, the focus setting information is not specially limited, but is information such as upper limit values, lower limit values of the various variables, and coordinates of a center of the focus.

The focus setting unit 88 changes the initial focus setting information based on the estimated optimal point obtained by the safe region estimating unit 82. The changed focus setting information is defined as new focus setting information. The focus setting unit 88 changes the existing focus setting information based on the estimated optimal point obtained by the safe region estimating unit 82, and changed focus setting information is defined as new focus setting information. The focus setting unit 88 selects data from data stored in the database 63 which corresponds to the changed focus setting information, and describes the selection result in a certain memory in the database 63. If the estimated optimal point is located outside of the

current focus, the focus is moved toward the estimated optimal point. Even if the estimated optimal point is located inside the focus, if its location is near the periphery of the focus, the location of the focus is again set by moving the focus slightly. Fig. 18 shows one example of the movement of the focus. In this example, the focuses are moved while partially superposing on one another, but the movement is not limited to this.

The proposed adjustment generating unit 89 searches, in a focus which was newly set by the focus setting unit 88, points where measurement of data of the turbine is insufficient, and sends the insufficient point as a point to be additionally measured to the outputting unit 85. Fig. 18 shows this. For example, assume that the current focus is set in an area of a focus 1 in Fig. 18, data of point shown with $\times$ was already measured, and the estimated optimal point is located in an upper right direction in Fig. 18. In this case, the focus moves toward the estimated optimal point (upper right direction in Fig. 18, an area located in the upper right direction in Fig. 18 from the focus 1 is newly determined as a focus 2. At that time, the proposed adjustment generating unit 89 proposes to measure data of points shown with Δ which are newly included in the focus 2.

The inputting unit 84 inputs initial focus setting

information for selecting data used for making a mathematical model from the device such as the keyboard and the touch screen provided in the inputting unit, and sends the information to the focus setting unit 88. Other structure, function and the like of the inputting unit 84 are the same as those of the inputting unit 64 in the forth embodiment except that the various data input from the device such as the keyboard and the touch screen is sent to the safe region estimating unit 82 (safe region estimating unit 62 in the forth embodiment), redundant explanation will be omitted. The plant data and weather data are also the same as those of the forth embodiment.

The outputting unit 85 outputs, to a CRT or a printer provided in the outputting unit 85, an estimation result sent from the safe region estimating unit 82, a focus area set by the focus setting unit 88 and a measuring point sent from the proposed adjustment generating unit 89. In this example, the safe regions are shown like contour lines per each gain α_k , β_k , γ_k . A central portion is the combustion vibration-less prone to be generated region and outer portion is combustion vibration-prone to be generated region. In Fig. 18, rectangular regions shown with the focuses 1, 2 and 3 show that the focuses move sequentially. The symbol $\times$ represents a point where data was already measure, and symbols Δ and O show proposed points where data should

additionally be measured in the focuses 2 and 3, respectively.

As explained above, according to this combustion vibration estimating apparatus 80, the combustion vibration, the NOx discharge amount and the CO discharge amount generated in the combustor of the gas turbine are estimated, the safe region where the combustion vibration is less prone to be generated is obtained with high precision, and a new measuring point is proposed for searching safer driving point. Therefore, it is possible to obtain a point where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting values and the combustion vibration is least prone to be generated, i.e., the optimal driving point. Therefore, the combustion control system can be adjusted easily, and the adjustment can be carried out within a shorter as compared with the conventional method. Further, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced. For example, if the combustion vibration estimating apparatus 80 is used, a safe region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting values and the combustion vibration is less prone to be generated is suggested for a combustion control parameter of a gas turbine which was conventionally adjusted based on experience of

a skilled adjusting operator. Therefore, for example, it is possible to shorten the field adjusting period, and even a person who is not skilled can carry out the field adjustment easily.

5 Although the plant data and weather data are input from the plant 50 in the above embodiment, the data may be input directly manually from a keyboard provided in the inputting unit 84. The model structure is described as being one liner order, but it may be a higher-order model of two
10 orders or more. The model formula is described as being formula using manipulated variable or quantity of non-manipulatable state input from the plant 50, but a value converted based on physical characteristics may be used.

As explained above, according to the combustion
15 vibration estimating apparatus of the present invention, the combustion vibration-prone to be generated region and the combustion vibration-less prone to be generated region are obtained based on the mathematical model constructed from the plant data and weather data, and a result thereof
20 is output. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the combustion vibration estimating
25 apparatus of the present invention, the internal pressure

variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the combustion vibration region estimating
5 unit applies the limiting value of the internal pressure variation to the mathematical model to obtain the combustion-prone to be generated region, and the combustion vibration region estimation result is output from the outputting unit. Therefore, adjustment the combustion
10 control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the plant data and the weather data input by the inputting unit are stored into a time series, the
15 internal pressure variation characteristic grasping unit obtains data from the database to make the internal pressure variation of the combustor into the mathematical model. Therefore, a region where the combustion vibration is prone to be generated is obtained more reliably.

20 According to the combustion vibration estimating apparatus of the present invention, the internal pressure variation estimating unit estimates the internal pressure variation of the combustor by the plant data and weather data input by the inputting unit, and the estimated internal
25 pressure variation estimation result is output from the

outputting unit. Therefore, it is possible to judge whether the internal pressure variation of the gas turbine combustor is at a level as planned, generation of the combustion vibration can be detected at an early stage, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the plant data and weather data input by the inputting unit are stored in the time series, the internal pressure variation estimating unit estimates the estimated value of the internal pressure variation of the latest data stored in the database. Therefore, the internal pressure variation is estimated reliably.

According to the combustion vibration estimating apparatus of the present invention, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains internal pressure variation and NOx discharge amount constructed from the plant data and weather data. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the combustion vibration estimating apparatus of the present invention, the internal pressure variation characteristic grasping unit makes the internal

pressure variation of the combustor into the mathematical model from the plant data and weather data input from the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting value of the NOx to the mathematical model to obtain the combustion vibration-less prone to be generated region, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the combustion vibration estimating apparatus of the present invention, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains the internal pressure variation, NOx discharge amount and the CO discharge amount constructed from the plant data and weather data, and a result thereof is output. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the combustion vibration estimating apparatus of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the CO discharge amount characteristic grasping unit makes the CO discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting values of NOx and CO to the mathematical model, and the region where the discharge amounts of NOx and CO are equal to or less than the restricting value and the combustion vibration is prone to be generated, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the combustion vibration estimating apparatus of the present invention, the internal pressure variation characteristic grasping unit is input by the

inputting unit, the internal pressure variation of the combustor is made into the mathematical model from the plant data and weather data selected by the focus setting unit, the discharge amount characteristic grasping unit makes the
5 discharge amounts of NOx and CO into the mathematical model from the plant data and weather data selected by the focus setting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and restricting values of NOx and CO to the mathematical model,
10 a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the
15 combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, focus setting unit selects plant data and weather data input by the inputting unit based on the region
20 designated by the inputting unit or the setting mode. Therefore, the safe region where the combustion vibration is less prone to be generated can widely be obtained macroscopically and can be obtained with high precision macroscopically.

25 According to the combustion vibration estimating

apparatus of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data selected by the focus determining unit, the discharge amount characteristic grasping unit makes the NOx and CO discharge amounts into the mathematical model from the plant data and weather data selected by the focus determining unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the NOx and CO restricting values to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the proposed adjustment generating unit obtains the point to be measured next using the safe region estimation result by the safe region estimating unit, and the safe region estimation result by the safe region estimating unit and the point to be measured next by the proposed adjustment generating unit are output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the focus determining unit determines the next focus based on the mathematical model obtained based

on the plant data and weather data selected by the determination of the last focus. Therefore, it is easy to search the optimal driving point.

According to the plant of the present invention, the combustion vibration-prone to be generated region and the combustion vibration-less prone to be generated region are obtained based on the mathematical model constructed from the plant data and weather data, and a result thereof is output. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the plant of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the combustion vibration region estimating unit applies the limiting value of the internal pressure variation to the mathematical model to obtain the combustion-prone to be generated region, and the combustion vibration region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the plant data and the weather data input by the inputting unit are stored into a time series, the internal pressure variation characteristic grasping unit obtains data from the database to make the internal pressure variation of the combustor into the mathematical model. Therefore, a region where the combustion vibration is prone to be generated is obtained more reliably.

According to the plant of the present invention, the internal pressure variation estimating unit estimates the internal pressure variation of the combustor by the plant data and weather data input by the inputting unit, and the estimated internal pressure variation estimation result is output from the outputting unit. Therefore, it is possible to judge whether the internal pressure variation of the gas turbine combustor is at a level as planned, generation of the combustion vibration can be detected at an early stage, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the plant data and weather data input by the inputting unit are stored in the time series, the internal pressure variation estimating unit estimates the estimated value of the internal pressure variation of the latest data stored in the database. Therefore, the internal pressure variation is estimated reliably.

According to the plant of the present invention, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains
5 internal pressure variation and NOx discharge amount constructed from the plant data and weather data. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also
10 be enhanced.

According to the plant of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data
15 input from the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure
20 variation and the restricting value of the NOx to the mathematical model to obtain the combustion vibration-less prone to be generated region, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated,
25 the breakage of facilities can be avoided, the utilization

ratio of facilities can be enhanced, and safety can also be enhanced.

According to the plant of the present invention, the combustion vibration-less prone to be generated region and
5 combustion vibration-prone to be generated region are obtained based on the mathematical model which explains the internal pressure variation, NOx discharge amount and the CO discharge amount constructed from the plant data and weather data, and a result thereof is output. Therefore,
10 adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the plant of the present invention, the
15 internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount
20 into the mathematical model from the plant data and weather data input by the inputting unit, the CO discharge amount characteristic grasping unit makes the CO discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating
25 unit applies the limiting value of the internal pressure

variation and the restricting values of NOx and CO to the mathematical model, and the region where the discharge amounts of NOx and CO are equal to or less than the restricting value and the combustion vibration is prone to be generated, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the plant of the present invention, the internal pressure variation characteristic grasping unit is input by the inputting unit, the internal pressure variation of the combustor is made into the mathematical model from the plant data and weather data selected by the focus setting unit, the discharge amount characteristic grasping unit makes the discharge amounts of NOx and CO into the mathematical model from the plant data and weather data selected by the focus setting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and restricting values of NOx and CO to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the safe region estimation result is output from the outputting unit.

Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

5 Moreover, the focus setting unit selects plant data and weather data input by the inputting unit based on the region designated by the inputting unit or the setting mode. Therefore, the safe region where the combustion vibration is less prone to be generated can widely be obtained
10 macroscopically and can be obtained with high precision macroscopically.

 According to the plant of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into
15 the mathematical model from the plant data and weather data selected by the focus determining unit, the discharge amount characteristic grasping unit makes the NOx and CO discharge amounts into the mathematical model from the plant data and weather data selected by the focus determining unit, the
20 safe region estimating unit applies the limiting value of the internal pressure variation and the NOx and CO restricting values to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion
25 vibration is less prone to be generated is obtained, and

the proposed adjustment generating unit obtains the point to be measured next using the safe region estimation result by the safe region estimating unit, and the safe region estimation result by the safe region estimating unit and the point to be measured next by the proposed adjustment generating unit are output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the focus determining unit determines the next focus based on the mathematical model obtained based on the plant data and weather data selected by the determination of the last focus. Therefore, it is easy to search the optimal driving point.

According to the gas turbine plant of the present invention, the combustion vibration-prone to be generated region and the combustion vibration-less prone to be generated region are obtained based on the mathematical model constructed from the plant data and weather data, and a result thereof is output. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the gas turbine plant of the present

invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the combustion vibration region estimating unit applies the limiting value of the internal pressure variation to the mathematical model to obtain the combustion-prone to be generated region, and the combustion vibration region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the plant data and the weather data input by the inputting unit are stored into a time series, the internal pressure variation characteristic grasping unit obtains data from the database to make the internal pressure variation of the combustor into the mathematical model. Therefore, a region where the combustion vibration is prone to be generated is obtained more reliably.

According to the gas turbine plant of the present invention, the internal pressure variation estimating unit estimates the internal pressure variation of the combustor by the plant data and weather data input by the inputting unit, and the estimated internal pressure variation estimation result is output from the outputting unit.

Therefore, it is possible to judge whether the internal pressure variation of the gas turbine combustor is at a level as planned, generation of the combustion vibration can be detected at an early stage, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the plant data and weather data input by the inputting unit are stored in the time series, the internal pressure variation estimating unit estimates the estimated value of the internal pressure variation of the latest data stored in the database. Therefore, the internal pressure variation is estimated reliably.

According to the gas turbine plant of the present invention, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains internal pressure variation and NOx discharge amount constructed from the plant data and weather data. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the gas turbine plant of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the

combustor into the mathematical model from the plant data and weather data input from the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting value of the NOx to the mathematical model to obtain the combustion vibration-less prone to be generated region, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the gas turbine plant of the present invention, the combustion vibration-less prone to be generated region and combustion vibration-prone to be generated region are obtained based on the mathematical model which explains the internal pressure variation, NOx discharge amount and the CO discharge amount constructed from the plant data and weather data, and a result thereof is output. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the gas turbine plant of the present invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data input by the inputting unit, the NOx discharge amount characteristic grasping unit makes the NOx discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the CO discharge amount characteristic grasping unit makes the CO discharge amount into the mathematical model from the plant data and weather data input by the inputting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and the restricting values of NOx and CO to the mathematical model, and the region where the discharge amounts of NOx and CO are equal to or less than the restricting value and the combustion vibration is prone to be generated, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

According to the gas turbine plant of the present invention, the internal pressure variation characteristic grasping unit is input by the inputting unit, the internal

pressure variation of the combustor is made into the mathematical model from the plant data and weather data selected by the focus setting unit, the discharge amount characteristic grasping unit makes the discharge amounts of NOx and CO into the mathematical model from the plant data and weather data selected by the focus setting unit, the safe region estimating unit applies the limiting value of the internal pressure variation and restricting values of NOx and CO to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the safe region estimation result is output from the outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the focus setting unit selects plant data and weather data input by the inputting unit based on the region designated by the inputting unit or the setting mode. Therefore, the safe region where the combustion vibration is less prone to be generated can widely be obtained macroscopically and can be obtained with high precision macroscopically.

According to the gas turbine plant of the present

invention, the internal pressure variation characteristic grasping unit makes the internal pressure variation of the combustor into the mathematical model from the plant data and weather data selected by the focus determining unit, 5 the discharge amount characteristic grasping unit makes the NOx and CO discharge amounts into the mathematical model from the plant data and weather data selected by the focus determining unit, the safe region estimating unit applies the limiting value of the internal pressure variation and 10 the NOx and CO restricting values to the mathematical model, a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated is obtained, and the proposed adjustment generating unit 15 obtains the point to be measured next using the safe region estimation result by the safe region estimating unit, and the safe region estimation result by the safe region estimating unit and the point to be measured next by the proposed adjustment generating unit are output from the 20 outputting unit. Therefore, adjustment the combustion control system can be facilitated, the breakage of facilities can be avoided, the utilization ratio of facilities can be enhanced, and safety can also be enhanced.

Moreover, the focus determining unit determines the 25 next focus based on the mathematical model obtained based

on the plant data and weather data selected by the determination of the last focus. Therefore, it is easy to search the optimal driving point.

Although the invention has been described with respect
5 to a specific embodiment for a complete and clear disclosure, the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

10

28964-62

CLAIMS:

1. A combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby
5 for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using
10 a mathematical model; and

an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal
15 pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results
20 to the outputting unit.

2. A combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion
25 vibration, the combustion vibration estimating apparatus comprising:

an inputting unit which inputs plant data, weather data, and limiting value of internal pressure variation,

an internal pressure variation characteristic
30 grasping unit which sets up a mathematical model

28964-62

representing internal pressure variation of a combustor using the inputted plant data and weather data as variables,

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using
5 the mathematical model by applying the limiting value of the internal pressure variation to the mathematical model to estimate a possible combustion vibration-prone region; and

an outputting unit which outputs the possible combustion vibration-prone region estimated by the
10 combustion vibration region estimating unit.

3. The combustion vibration estimating apparatus according to claim 2, further comprising:

a database which stores the plant data and the weather data inputted by the inputting unit into a time
15 series, wherein

the internal pressure variation characteristic grasping unit obtains data from the database to set up a mathematical model representing the internal pressure variation of the combustor.

20 4. A combustion variation estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus
25 comprising:

an inputting unit which inputs plant data and weather data;

28964-62

an internal pressure variation estimating unit which estimates internal pressure variation of a combustor from the plant data and weather data; and

an outputting unit which outputs internal pressure variation estimation result estimated by the internal pressure variation estimating unit.

5. The combustion vibration estimating apparatus according to claim 4, further comprising a database which stores the plant data and weather data inputted by the inputting unit, wherein the internal pressure variation estimating unit estimates estimated value of the internal pressure variation by data of latest time stored in the database.

6. A combustion vibration estimating apparatus that constructs a mathematical model for explaining internal pressure variation and NOx discharge amount from plant data and weather data, and that obtains and outputs a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region based on the constructed mathematical model, the combustion vibration estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and

an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating

28964-62

unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

5 7. A combustion vibration estimating apparatus comprising:

an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as a restricting value of NOx,

10 an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the input plant data and weather data,

a NOx discharge amount characteristic grasping
15 unit which makes an NOx discharge amount into a mathematical model from the input plant data and weather data,

a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure
20 variation characteristic grasping unit, and applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount is equal to or less than the restricting value and
25 the combustion vibration is less prone to be generated, and

an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

8. A combustion vibration estimating apparatus, that constructs a mathematical model for explaining internal
30 pressure variation, NOx and a CO discharge amount from plant

28964-62

data and weather data, a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region are obtained based on the constructed mathematical model and are output, the combustion vibration
5 estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and

an outputting unit which outputs an estimation
10 result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating
15 unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

9. A combustion vibration estimating apparatus
20 comprising:

an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as restricting values of NOx and CO,

an internal pressure variation characteristic
25 grasping unit which makes internal pressure variation of a combustor into a mathematical model from the input plant data and weather data,

28964-62

a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the input plant data and weather data,

a CO discharge amount characteristic grasping unit
5 which makes an CO discharge amount into a mathematical model from the input plant data and weather data,

a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure
10 variation characteristic grasping unit, applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, and applies a restricting value of the CO to the mathematical model obtained by the CO discharge amount
15 characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and

an outputting unit which outputs a safe region
20 estimation result by the safe region estimating unit.

10. A combustion vibration estimating apparatus comprising:

a inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as
25 well as restricting values of NOx and CO,

a focus setting unit which selects data used for making a mathematical model from the input plant data and weather data,

an internal pressure variation characteristic
30 grasping unit which makes internal pressure variation of a

28964-62

combustor into a mathematical model from the selected plant data and weather data,

a discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical
5 model from the selected plant data and weather data,

a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies restricting
10 values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the Nox discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less
15 prone to be generated, and

an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

11. The combustion vibration estimating apparatus according to claim 10, wherein the focus setting unit
20 selects the plant data and weather data input from the inputting unit based on a region or a setting mode designated by the inputting unit.

12. A combustion vibration estimating apparatus comprising:

25 an inputting unit which inputs limiting values of plant data, weather data and internal pressure variation, as well as restricting values of NOx and CO,

a focus setting unit which selects data used for making a mathematical model from the input plant data and
30 weather data,

28964-62

an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the selected plant data and weather data,

5 a discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical model from the selected plant data and weather data,

a safe region estimating unit which applies a limiting value of the internal pressure variation to the
10 mathematical model obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge
15 amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated,

a proposed adjustment generating unit which obtains a point to be measured next, using a safe region
20 estimation result by the safe region estimating unit, and

an outputting unit which outputs a safe region estimation result by the safe region estimating unit and a point to be measured by the proposed adjustment generating unit.

25 13. The combustion vibration estimating apparatus according to claim 12, wherein the focus determining unit determines a next focus based on the mathematical model obtained based on plant data and weather data selected by determination of a last focus.

30 14. A plant comprising:

28964-62

a combustor, and

a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using data at present, and that outputs a result estimated thereby
5 for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus using a mathematical model which represents internal pressure variation using plant data and weather data as variables, and estimating and outputting a possible
10 combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, the combustion vibration estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using
15 the mathematical model; and

an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal
20 pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results
25 to the outputting unit.

15. A plant comprising:

a combustor, and

a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using
30 data at present, and that outputs a result estimated thereby

28964-62

for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus including:

an inputting unit which inputs plant data,
5 weather data and limiting values of internal pressure variation obtained with combustion in the combustor;

an internal pressure variation characteristic grasping unit which sets up a mathematical model representing internal pressure variation of a combustor
10 using the plant data and weather data inputted as variables;

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model by applying the limiting value of the

28964-62

internal pressure variation to the mathematical model to estimate a possible combustion vibration-prone region; and

an outputting unit which outputs the possible combustion vibration-prone region estimated by the
5 combustion vibration region estimating unit.

16. The plant according to claim 15, wherein the combustion vibration estimating apparatus further comprising:

a database which stores the plant data and the
10 weather data inputted by the inputting unit into a time series, wherein

the internal pressure variation characteristic grasping unit obtains data from the database to set up a mathematical model representing the internal pressure
15 variation of the combustor.

17. A plant comprising:

a combustor; and

a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using
20 data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus including:

an inputting unit which inputs plant data and
25 weather data;

an internal pressure variation estimating unit which estimates internal pressure variation of the combustor

28964-62

from the plant data and weather data which are inputted from the inputting unit; and

an outputting unit which outputs internal pressure variation estimation result estimated by the internal pressure variation estimating unit.

18. The plant according to claim 17, wherein the combustion vibration estimating apparatus further comprises a database which stores the plant data and weather data inputted by the inputting unit, wherein the internal pressure variation estimating unit estimates the estimated value of the internal pressure variation by data of latest time stored in the database.

19. A plant comprising:

a combustor, and

a combustion vibration estimating apparatus, wherein the combustion vibration estimating apparatus constructs a mathematical model which explains internal pressure variation and an NOx discharge amount from plant data and weather data, wherein the plant data and the weather data are obtained with combustion in the combustor, and the combustion vibration estimating apparatus obtains and outputs a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region based on the constructed mathematical model, the combustion vibration estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and

28964-62

an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal
5 pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results
10 to the outputting unit.

20. A plant comprising:

a combustor, and

a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant
15 data, weather data obtained with combustion in the combustor and internal pressure variation, as well as a restricting value of NOx, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and
20 weather data input from the inputting unit, a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the input plant data and weather data input from the inputting unit, a safe region estimating unit which applies a limiting value
25 of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, and applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, thereby obtaining a region
30 where the NOx discharge amount is equal to or less than the restricting value and the combustion vibration is less prone

28964-62

to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

21. A plant comprising:

a combustor; and

5 a combustion vibration estimating apparatus,
wherein the combustion vibration estimating apparatus
constructs a mathematical model which explains internal
pressure variation, and an NOx and a CO discharge amount
from plant data and weather data, wherein the plant data and
10 the weather data are obtained with combustion in the
combustor, and the combustion vibration estimating apparatus
obtains and outputs a combustion vibration-prone to be
generated region and a combustion vibration-less prone to be
generated region based on the constructed mathematical
15 model, the combustion vibration estimating apparatus
comprising:

a combustion vibration region estimating unit that
estimates possibility of combustion vibration to occur using
the mathematical model; and

20 an outputting unit which outputs an estimation
result by the combustion vibration region estimating unit,
wherein

the mathematical model representing internal
pressure variation employs plant data and weather data as
25 variables, and the combustion vibration region estimating
unit estimates a possible combustion vibration-prone region
and a possible combustion vibration-less prone region based
on the mathematical model, and outputs the estimated results
to the outputting unit.

28964-62

22. A plant comprising:

a combustor, and

a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as restricting values of NOx and CO, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data input by the inputting unit, a NOx discharge amount characteristic grasping unit which makes an NOx discharge amount into a mathematical model from the plant data and weather data input by the inputting unit, a CO discharge amount characteristic grasping unit which makes an CO discharge amount into a mathematical model from the plant data and weather data input by the inputting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model characteristic grasping unit, applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, and applies a restricting value of the CO to the mathematical model obtained by the CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

23. A plant comprising:

a combustor, and

28964-62

a combustion vibration estimating apparatus having inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the plant data and weather data input by the inputting unit, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data selected by the focus setting unit, a discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical model from the plant data and weather data selected by the focus setting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

24. The plant according to claim 23, wherein the focus setting unit selects the plant data and weather data input from the inputting unit based on a region or a setting mode designated by the inputting unit.

30 25. A plant comprising:

a combustor, and

28964-62

a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the plant data and weather data input by the inputting unit, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data selected by the focus setting unit, a discharge amount characteristic grasping unit which makes NOx and CO discharge amounts into a mathematical model from the plant data and weather data selected by the focus setting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, a proposed adjustment generating unit which obtains a point to be measured next, using a safe region estimation result by the safe region estimating unit, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit and a point to be measured by the proposed adjustment generating unit.

26. The plant according to claim 25, wherein the focus determining unit determines a next focus based on the mathematical model obtained based on plant data and weather data selected by determination of a last focus.

28964-62

27. A gas turbine plant comprising:

a gas turbine having a combustor,

a compressor for supplying compressed air to the combustor,

5 an inlet guide blade for supplying air to the compressor,

a turbine which is connected to the compressor and is rotated by emission gas of the combustor,

a main fuel flow rate control valve for
10 controlling a main flame fuel supply amount which is main flame of combustion in the combustor,

a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame,

15 a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor bypassing the combustor; and

a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using
20 a mathematical model representing internal pressure variation employing plant data and weather data as variables, and estimates and outputs a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, the
25 combustion vibration estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and

28964-62

an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal
5 pressure variation employs plant data and weather data as variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results
10 to the outputting unit.

28. A gas turbine plant comprising:

a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which
15 is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply
20 amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air

28964-62

supplied from the compressor without through the combustor;
and

a combustion vibration estimating apparatus that estimates possibility of combustion vibration to occur using
5 data at present, and that outputs a result estimated thereby for controlling a combustor to avoid causing the combustion vibration, the combustion vibration estimating apparatus comprising:

an inputting unit which inputs plant data,
10 weather data and limiting value of internal pressure variation obtained with combustion in the combustor;

an internal pressure variation characteristic grasping unit which sets up a mathematical model representing internal pressure variation of a combustor
15 using the inputted plant data and weather data as variables;

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model by applying the limiting value of the internal pressure variation to the mathematical model
20 to estimate a possible combustion vibration-prone region;
and

an outputting unit which outputs the possible combustion vibration-prone region estimated by the combustion vibration region estimating unit.

25 29. The gas turbine plant according to claim 28, wherein the combustion vibration estimating apparatus further comprises a database which stores the plant data and the weather data inputted by the inputting unit into a time series, wherein the internal pressure variation
30 characteristic grasping unit obtains data from the database

28964-62

to set up a mathematical model representing the internal pressure variation of the combustor.

30. A gas turbine plant comprising:

a gas turbine having a combustor, a compressor for
5 supplying compressed air to the combustor, an inlet guide
blade for supplying air to the compressor, a turbine which
is connected to the compressor and is rotated by emission
gas of the combustor, a main fuel flow rate control valve
for controlling a main flame fuel supply amount which is
10 main flame of combustion in the combustor, a pilot fuel flow
rate control valve for controlling a pilot flame fuel supply
amount which holds the main flame, and a combustor bypass
valve for supplying, to the turbine, the compressed air
supplied from the compressor without through the combustor;
15 and

a combustion vibration estimating apparatus that
estimates possibility of combustion vibration to occur using
data at present, and that outputs a result estimated thereby
for controlling a combustor to avoid causing the combustion
20 vibration, the combustion vibration estimating apparatus
comprising:

an inputting unit which inputs plant data and
weather data;

an internal pressure variation estimating unit
25 which estimates internal pressure variation of the combustor
from the plant data and weather data which are input from
the inputting unit; and

an outputting unit which outputs internal
pressure variation estimation result estimated by the
30 internal pressure variation estimating unit.

28964-62

31. The gas turbine plant according to claim 30,
wherein the combustion vibration estimating apparatus
further comprises a database which stores in the time series
the plant data and weather data inputted by the inputting
5 unit, wherein the internal pressure variation estimating
unit estimates the estimated value of the internal pressure
variation by data of latest time stored in the database.

32. A gas turbine plant comprising:

a gas turbine having a combustor, a compressor for
10 supplying compressed air to the combustor, an inlet guide
blade for supplying air to the compressor, a turbine which
is connected to the compressor and is rotated by emission
gas of the combustor, a main fuel flow rate control valve
for controlling a main flame fuel supply amount which is
15 main flame of combustion in the combustor, a pilot fuel flow
rate control valve for controlling a pilot flame fuel supply
amount which holds the main flame, and a combustor bypass
valve for supplying, to the turbine, the compressed air
supplied from the compressor without through the combustor,
20 and

a combustion vibration estimating apparatus which
constructs a mathematical model which explains internal
pressure variation and an NOx discharge amount from plant
data and weather data which are obtained with combustion in
25 the combustor, and obtains and outputs a combustion
vibration-prone to be generated region and a combustion
vibration-less prone to be generated region based on the
constructed mathematical model.

33. A gas turbine plant comprising:

30 a gas turbine having a combustor, a compressor for
supplying compressed air to the combustor, and inlet guide

28964-62

blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is
5 main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor,
10 and

a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as a restricting
15 value of NOx, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical method from the plant data and weather data input from the inputting unit, a NOx discharge amount characteristic grasping unit which makes an NOx
20 discharge amount into a mathematical model from the input plant data and weather data input from the inputting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model obtained by the internal pressure variation characteristic
25 grasping unit, and applies a restricting value of the NOx to the mathematical model obtained by the NOx discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount is equal to or less than the restricting value and the combustion vibration is less prone
30 to be generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

34. A gas turbine plant comprising:

28964-62

a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission
5 gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass
10 valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor, and

a combustion vibration estimating apparatus which constructs a mathematical model for explaining internal
15 pressure variation, NOx and a CO discharge amount from plant data and weather data obtained with combustion in the combustor, a combustion vibration-prone to be generated region and a combustion vibration-less prone to be generated region are obtained based on the constructed mathematical
20 model and are output, the combustion vibration estimating apparatus comprising:

a combustion vibration region estimating unit that estimates possibility of combustion vibration to occur using the mathematical model; and

25 an outputting unit which outputs an estimation result by the combustion vibration region estimating unit, wherein

the mathematical model representing internal pressure variation employs plant data and weather data as
30 variables, and the combustion vibration region estimating unit estimates a possible combustion vibration-prone region

. 28964-62

and a possible combustion vibration-less prone region based on the mathematical model, and outputs the estimated results to the outputting unit.

35. A gas turbine plant comprising:

5 a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve
10 for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air

28964-62

supplied from the compressor without through the combustor,
and

a combustion vibration estimating apparatus having
an inputting unit which inputs limiting values of plant
5 data, weather data obtained with combustion in the combustor
and internal pressure variation, as well as restricting
values of NOx and CO, an internal pressure variation
characteristic grasping unit which makes internal pressure
variation of a combustor into a mathematical model from the
10 plant data and weather data input by the inputting unit, a
NOx discharge amount characteristic grasping unit which
makes an NOx discharge amount into a mathematical model from
the plant data and weather data input by the inputting unit,
a CO discharge amount characteristic grasping unit which
15 makes an CO discharge amount into a mathematical model from
the plant data and weather data input by the inputting unit,
a safe region estimating unit which applies a limiting value
of the internal pressure variation to the mathematical model
obtained by the internal pressure variation characteristic
20 grasping unit, applies a restricting value of the NOx to the
mathematical model obtained by the NOx discharge amount
characteristic grasping unit, and applies a restricting
value of the CO to the mathematical model obtained by the CO
discharge amount characteristic grasping unit, thereby
25 obtaining a region where the NOx discharge amount and the CO
discharge amount are equal to or less than the restricting
value and the combustion vibration is less prone to be
generated, and an outputting unit which outputs a safe
region estimation result by the safe region estimating unit.

30 36. A gas turbine plant comprising:

a gas turbine having a combustor, a compressor for
supplying compressed air to the combustor, an inlet guide

28964-62

blade for supplying air to the compressor, a turbine which
is connected to the compressor and is rotated by emission
gas of the combustor, a main fuel flow rate control valve
for controlling a main flame fuel supply amount which is
5 main flame of combustion in the combustor, a pilot fuel flow
rate control valve for controlling a pilot flame fuel supply
amount which holds the main flame, and a combustor bypass
valve for supplying, to the turbine, the compressed air
supplied from the compressor without through the combustor,
10 and

a combustion vibration estimating apparatus having
an inputting unit which inputs limiting values of plant
data, weather data obtained with combustion in the combustor
and internal pressure variation, as well as restricting
15 values of NOx and CO, a focus setting unit which selects
data used for making a mathematical model from the plant
data and weather data input by the inputting unit, and
internal pressure variation characteristic grasping unit
which makes internal pressure variation of a combustor into
20 a mathematical model from the plant data and weather data
selected by the focus setting unit, a discharge amount
characteristic grasping unit which makes NOx and CO
discharge amounts into a mathematical model from the plant
data and weather data selected by the focus setting unit, a
25 safe region estimating unit which applies a limiting value
of the internal pressure variation to the mathematical model
obtained by the internal pressure variation characteristic
grasping unit, applies restricting values of the NOx and CO
to the mathematical models obtained by the NOx and CO
30 discharge amount characteristic grasping unit, thereby
obtaining a region where the NOx discharge amount and the CO
discharge amount are equal to or less than the restricting
value and the combustion vibration is less prone to be

28964-62

generated, and an outputting unit which outputs a safe region estimation result by the safe region estimating unit.

37. The gas turbine plant according to claim 36, wherein the focus setting unit selects the plant data and weather data input from the inputting unit based on a region or a setting mode designated by the inputting unit.

38. A gas turbine plant comprising:

a gas turbine having a combustor, a compressor for supplying compressed air to the combustor, an inlet guide blade for supplying air to the compressor, a turbine which is connected to the compressor and is rotated by emission gas of the combustor, a main fuel flow rate control valve for controlling a main flame fuel supply amount which is main flame of combustion in the combustor, a pilot fuel flow rate control valve for controlling a pilot flame fuel supply amount which holds the main flame, and a combustor bypass valve for supplying, to the turbine, the compressed air supplied from the compressor without through the combustor, and

a combustion vibration estimating apparatus having an inputting unit which inputs limiting values of plant data, weather data obtained with combustion in the combustor and internal pressure variation, as well as restricting values of NOx and CO, a focus setting unit which selects data used for making a mathematical model from the plant data and weather data input by the inputting unit, an internal pressure variation characteristic grasping unit which makes internal pressure variation of a combustor into a mathematical model from the plant data and weather data selected by the focus setting unit, a discharge amount characteristic grasping unit which makes NOx and CO

28964-62

discharge amounts into a mathematical model from the plant data and weather data selected by the focus setting unit, a safe region estimating unit which applies a limiting value of the internal pressure variation to the mathematical model
5 obtained by the internal pressure variation characteristic grasping unit, applies restricting values of the NOx and CO to the mathematical models obtained by the NOx and CO discharge amount characteristic grasping unit, thereby obtaining a region where the NOx discharge amount and the CO
10 discharge amount are equal to or less than the restricting value and the combustion vibration is less prone to be generated, a proposed adjustment generating unit which obtains a point to be measured next, using a safe region estimation result by the safe region estimating unit, and an
15 outputting unit which outputs a safe region estimation result by the safe region estimating unit and a point to be measured by the proposed adjustment generating unit.

39. The gas turbine plant according to claim 38, wherein the focus determining unit determines a next focus
20 based on the mathematical model obtained based on plant data and weather data selected by determination of a last focus.

FETHERSTONHAUGH & CO.

PATENT AGENTS

OTTAWA, CANADA

FIG.1


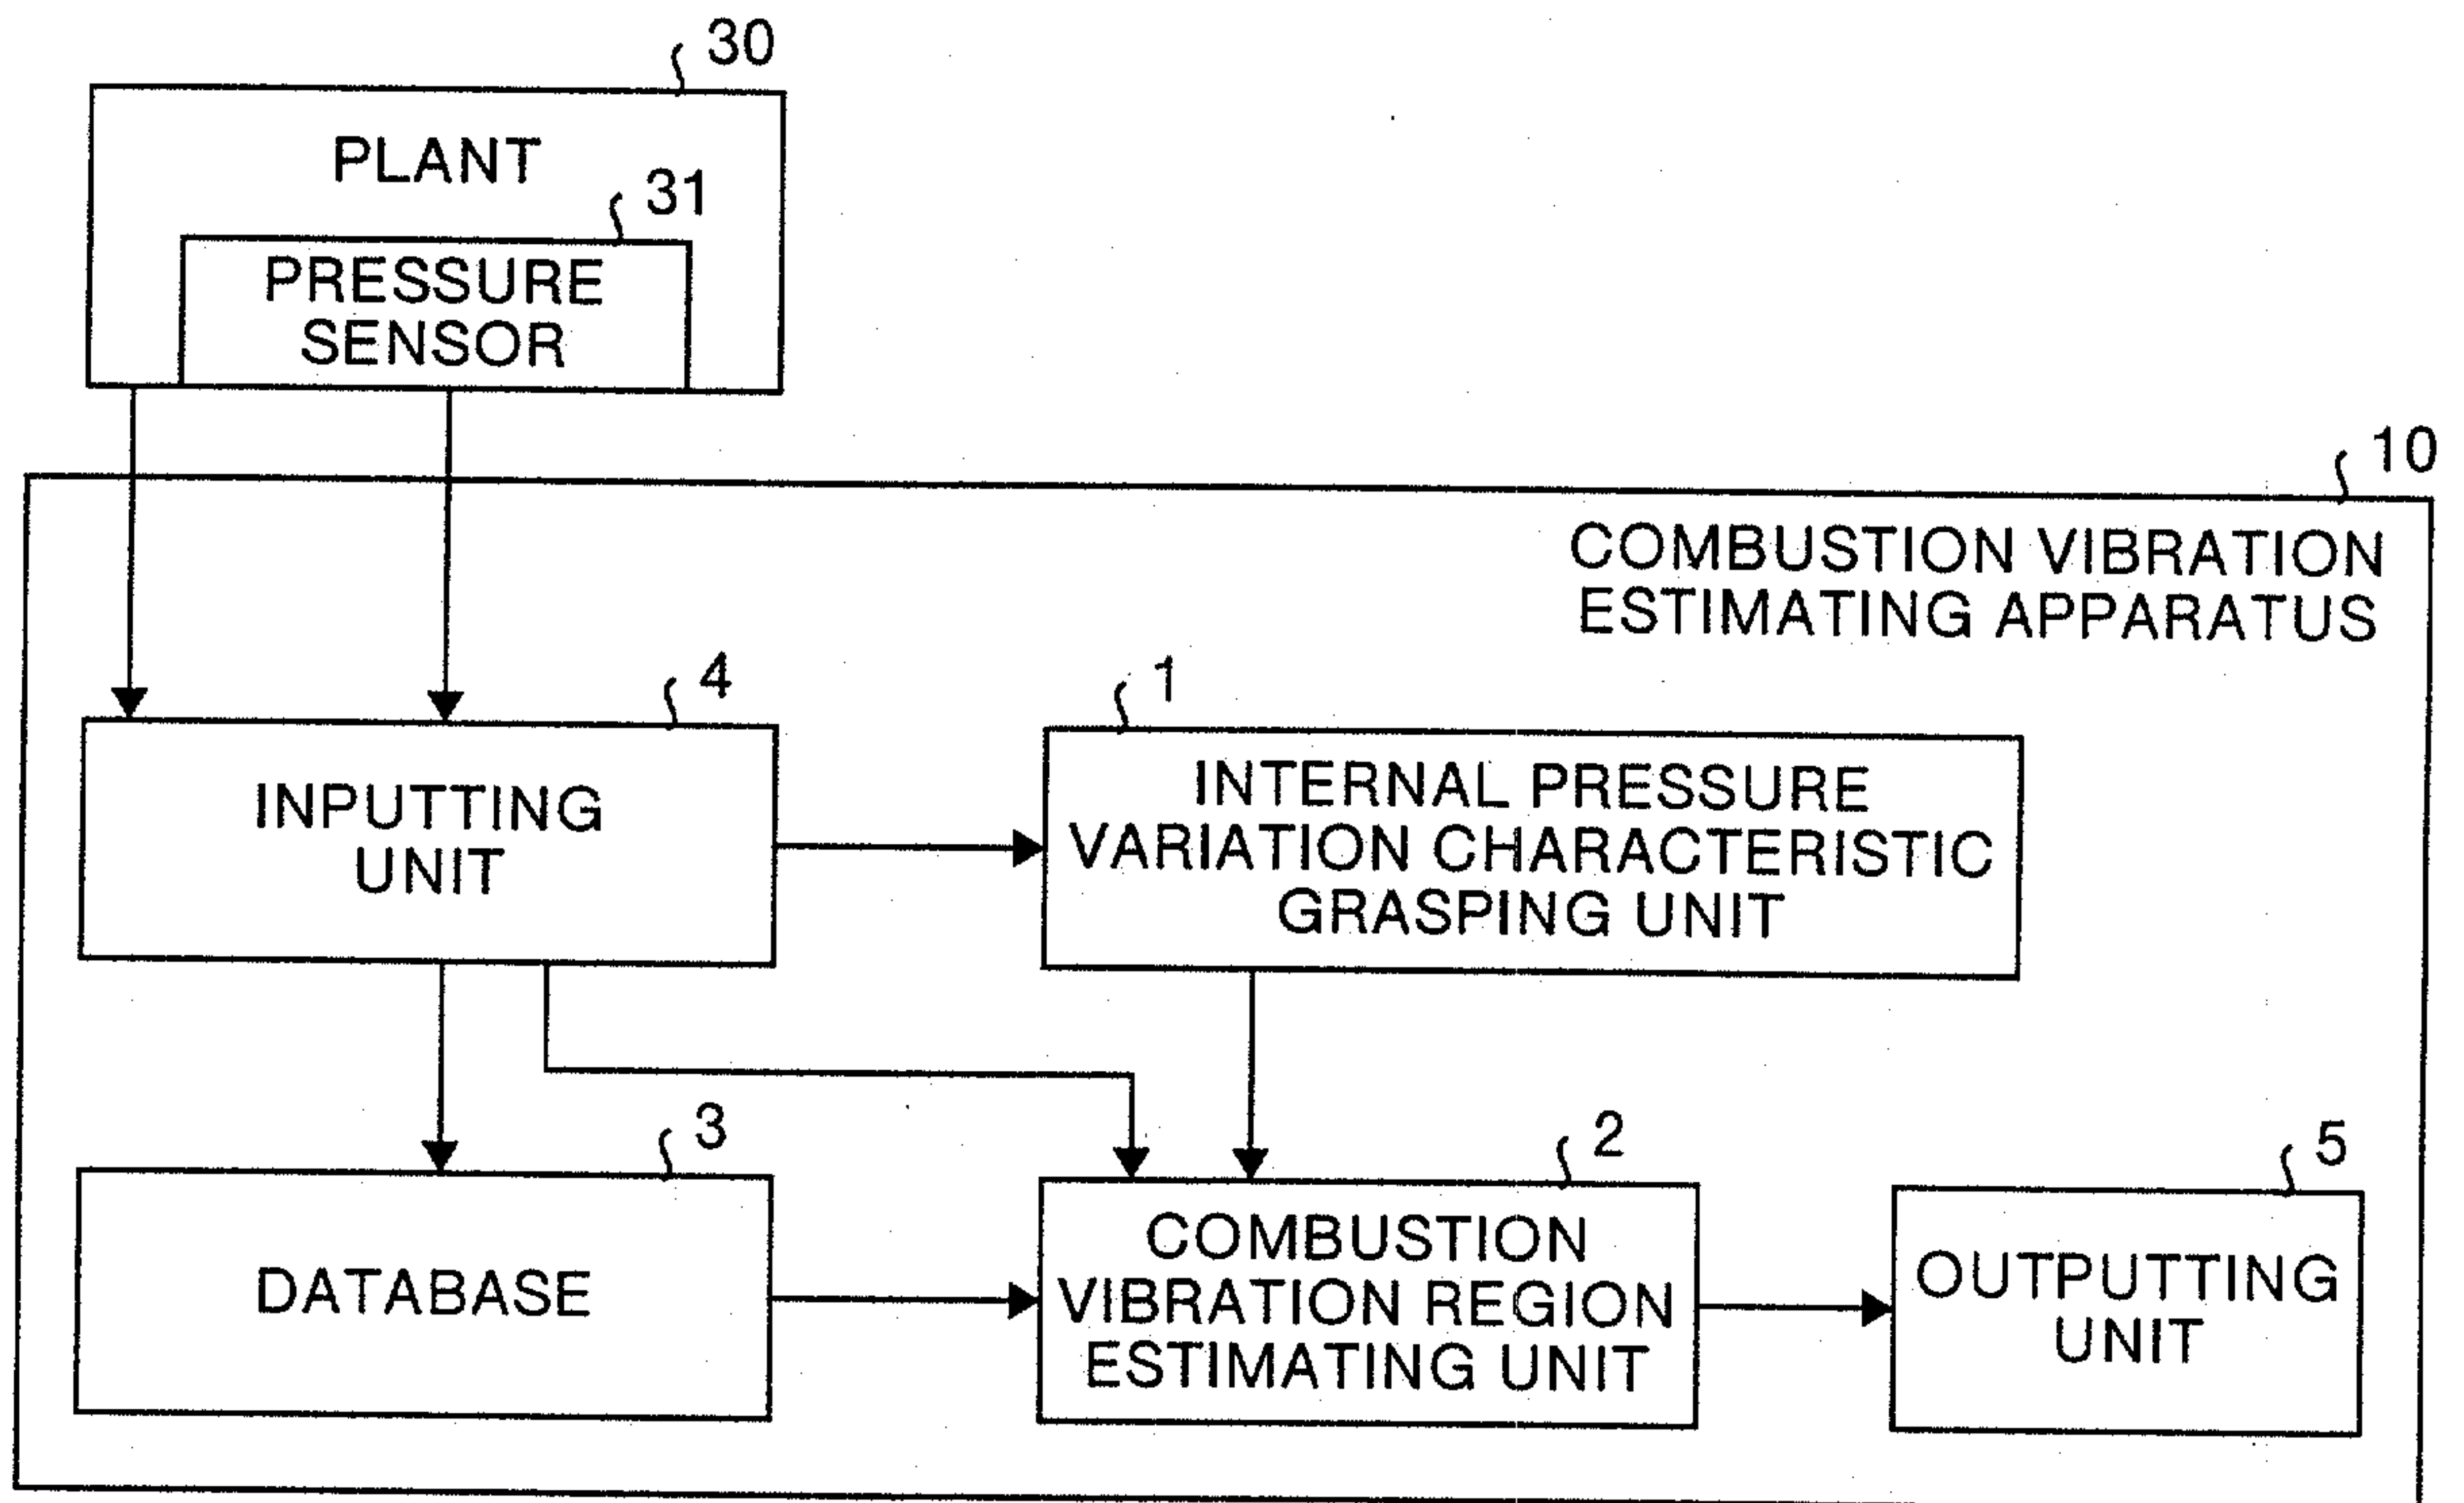


FIG.2

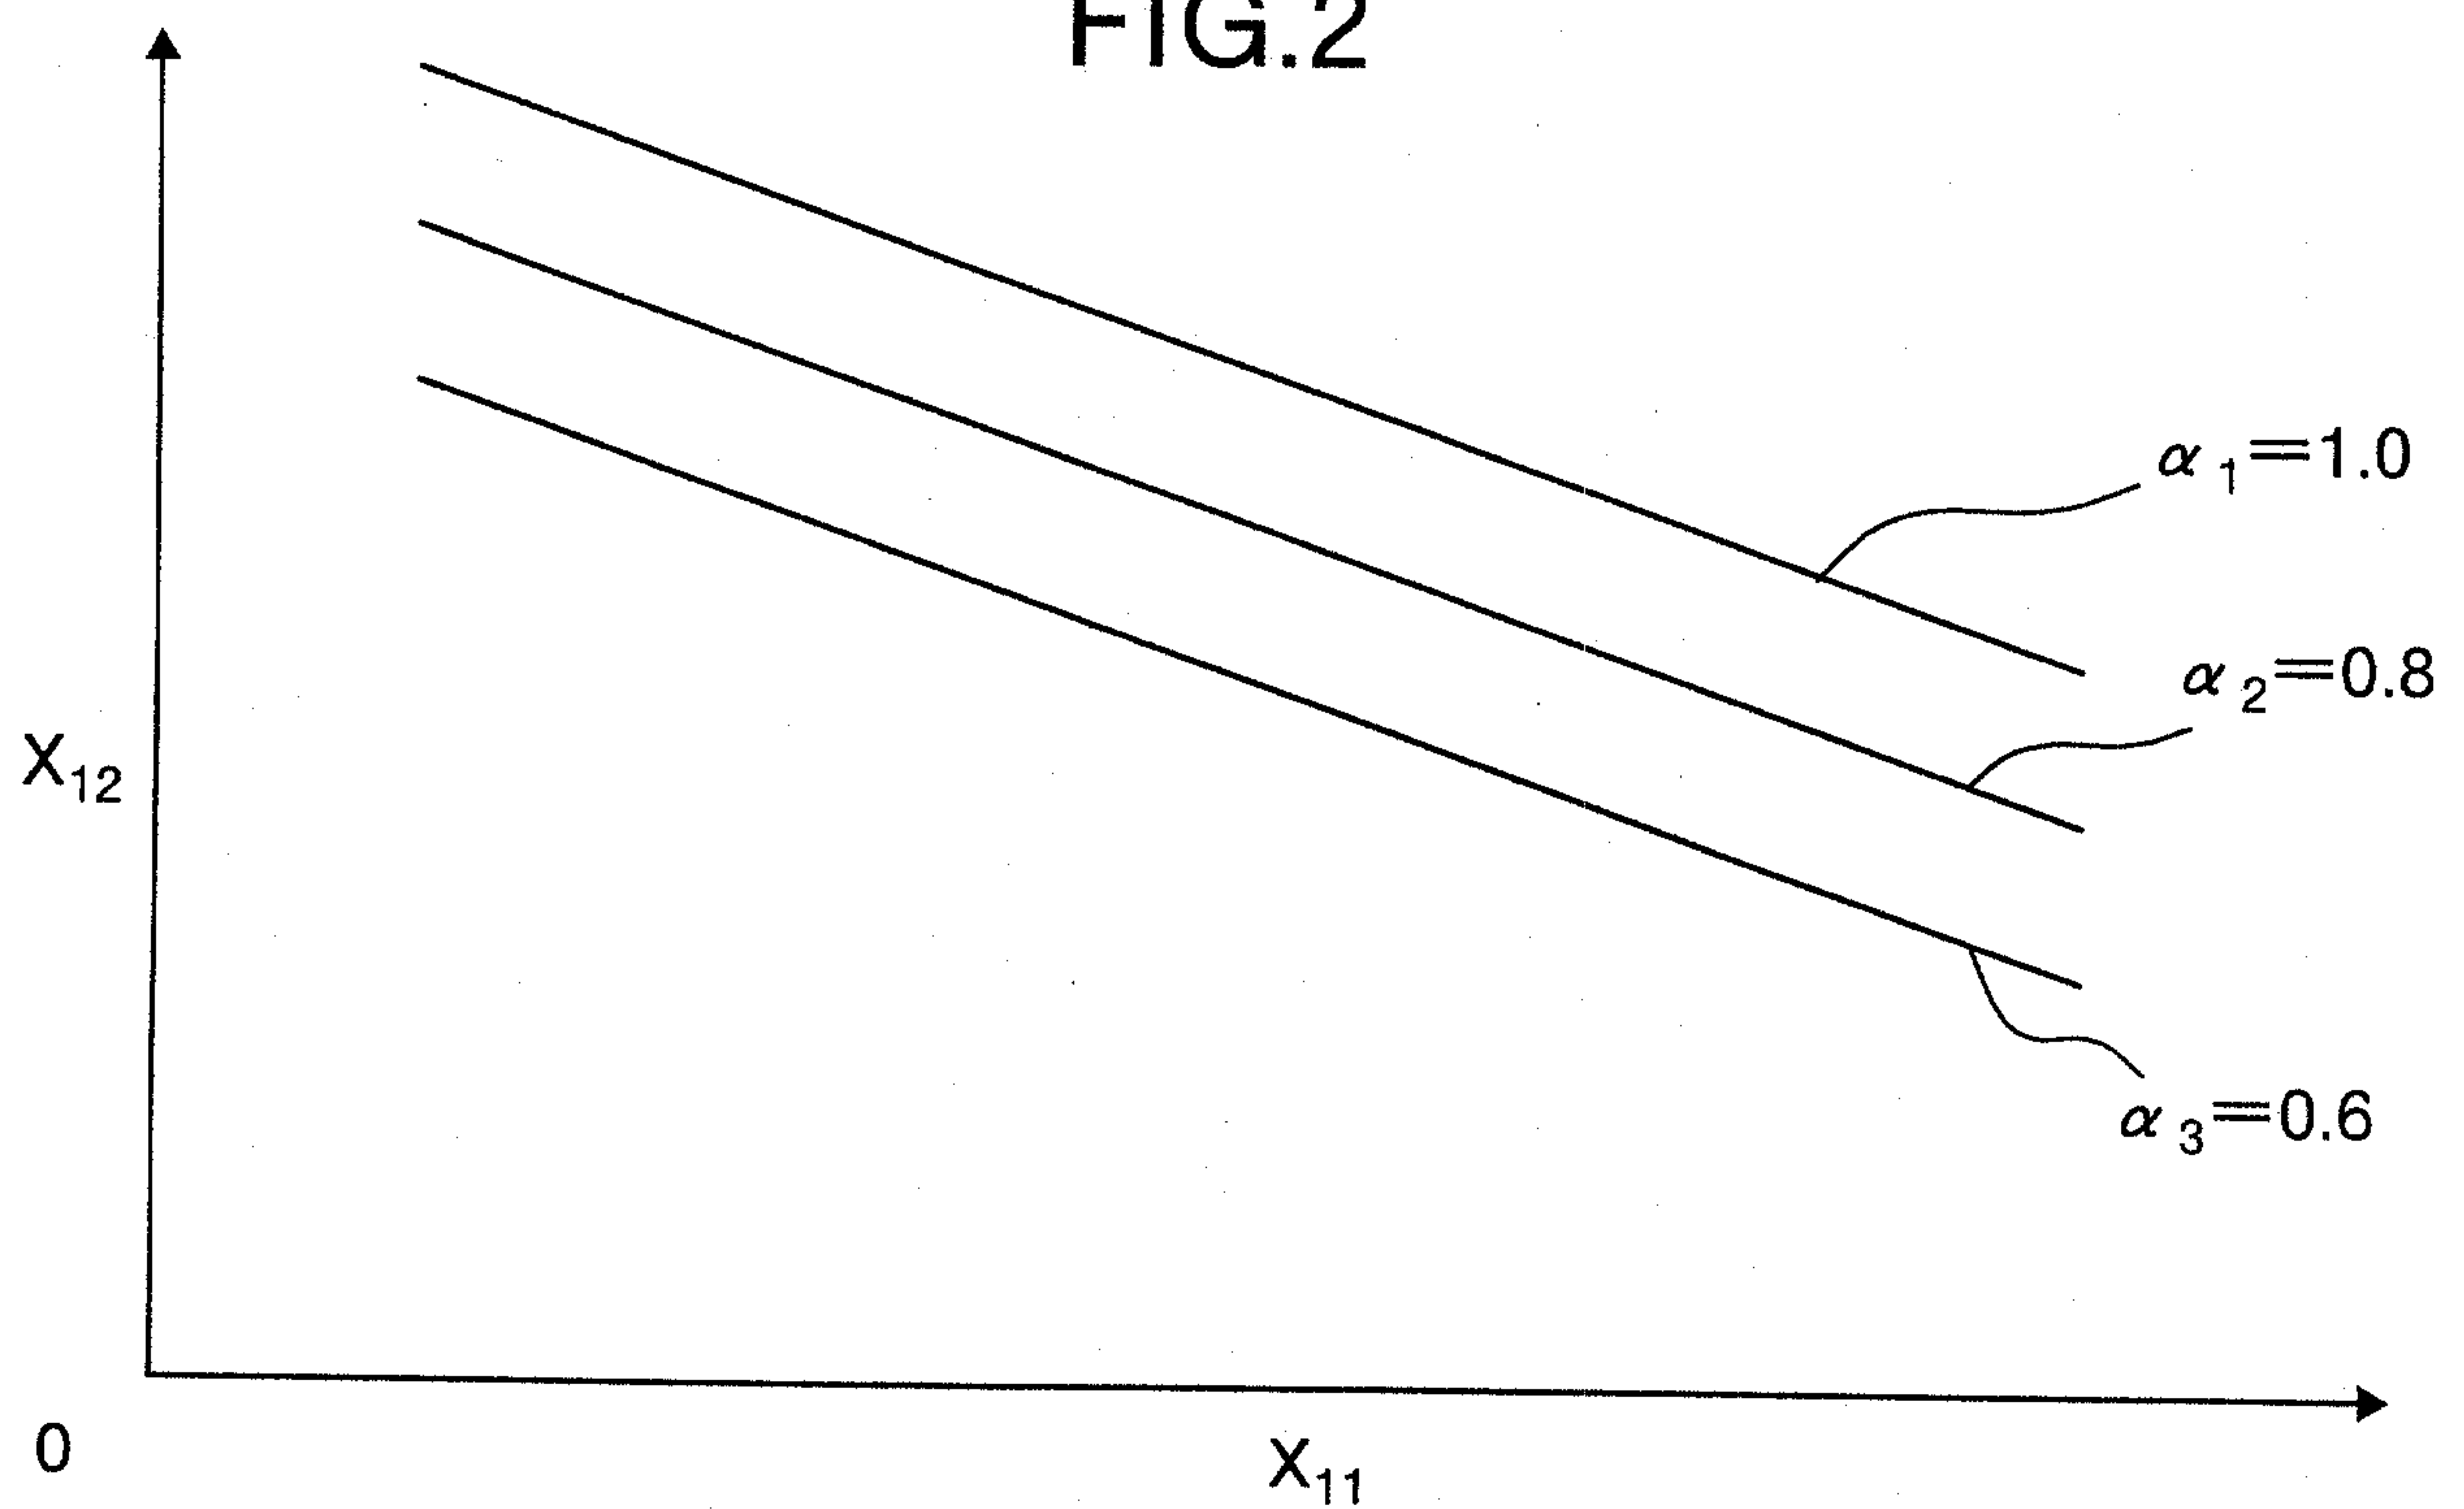

2/15

FIG.3



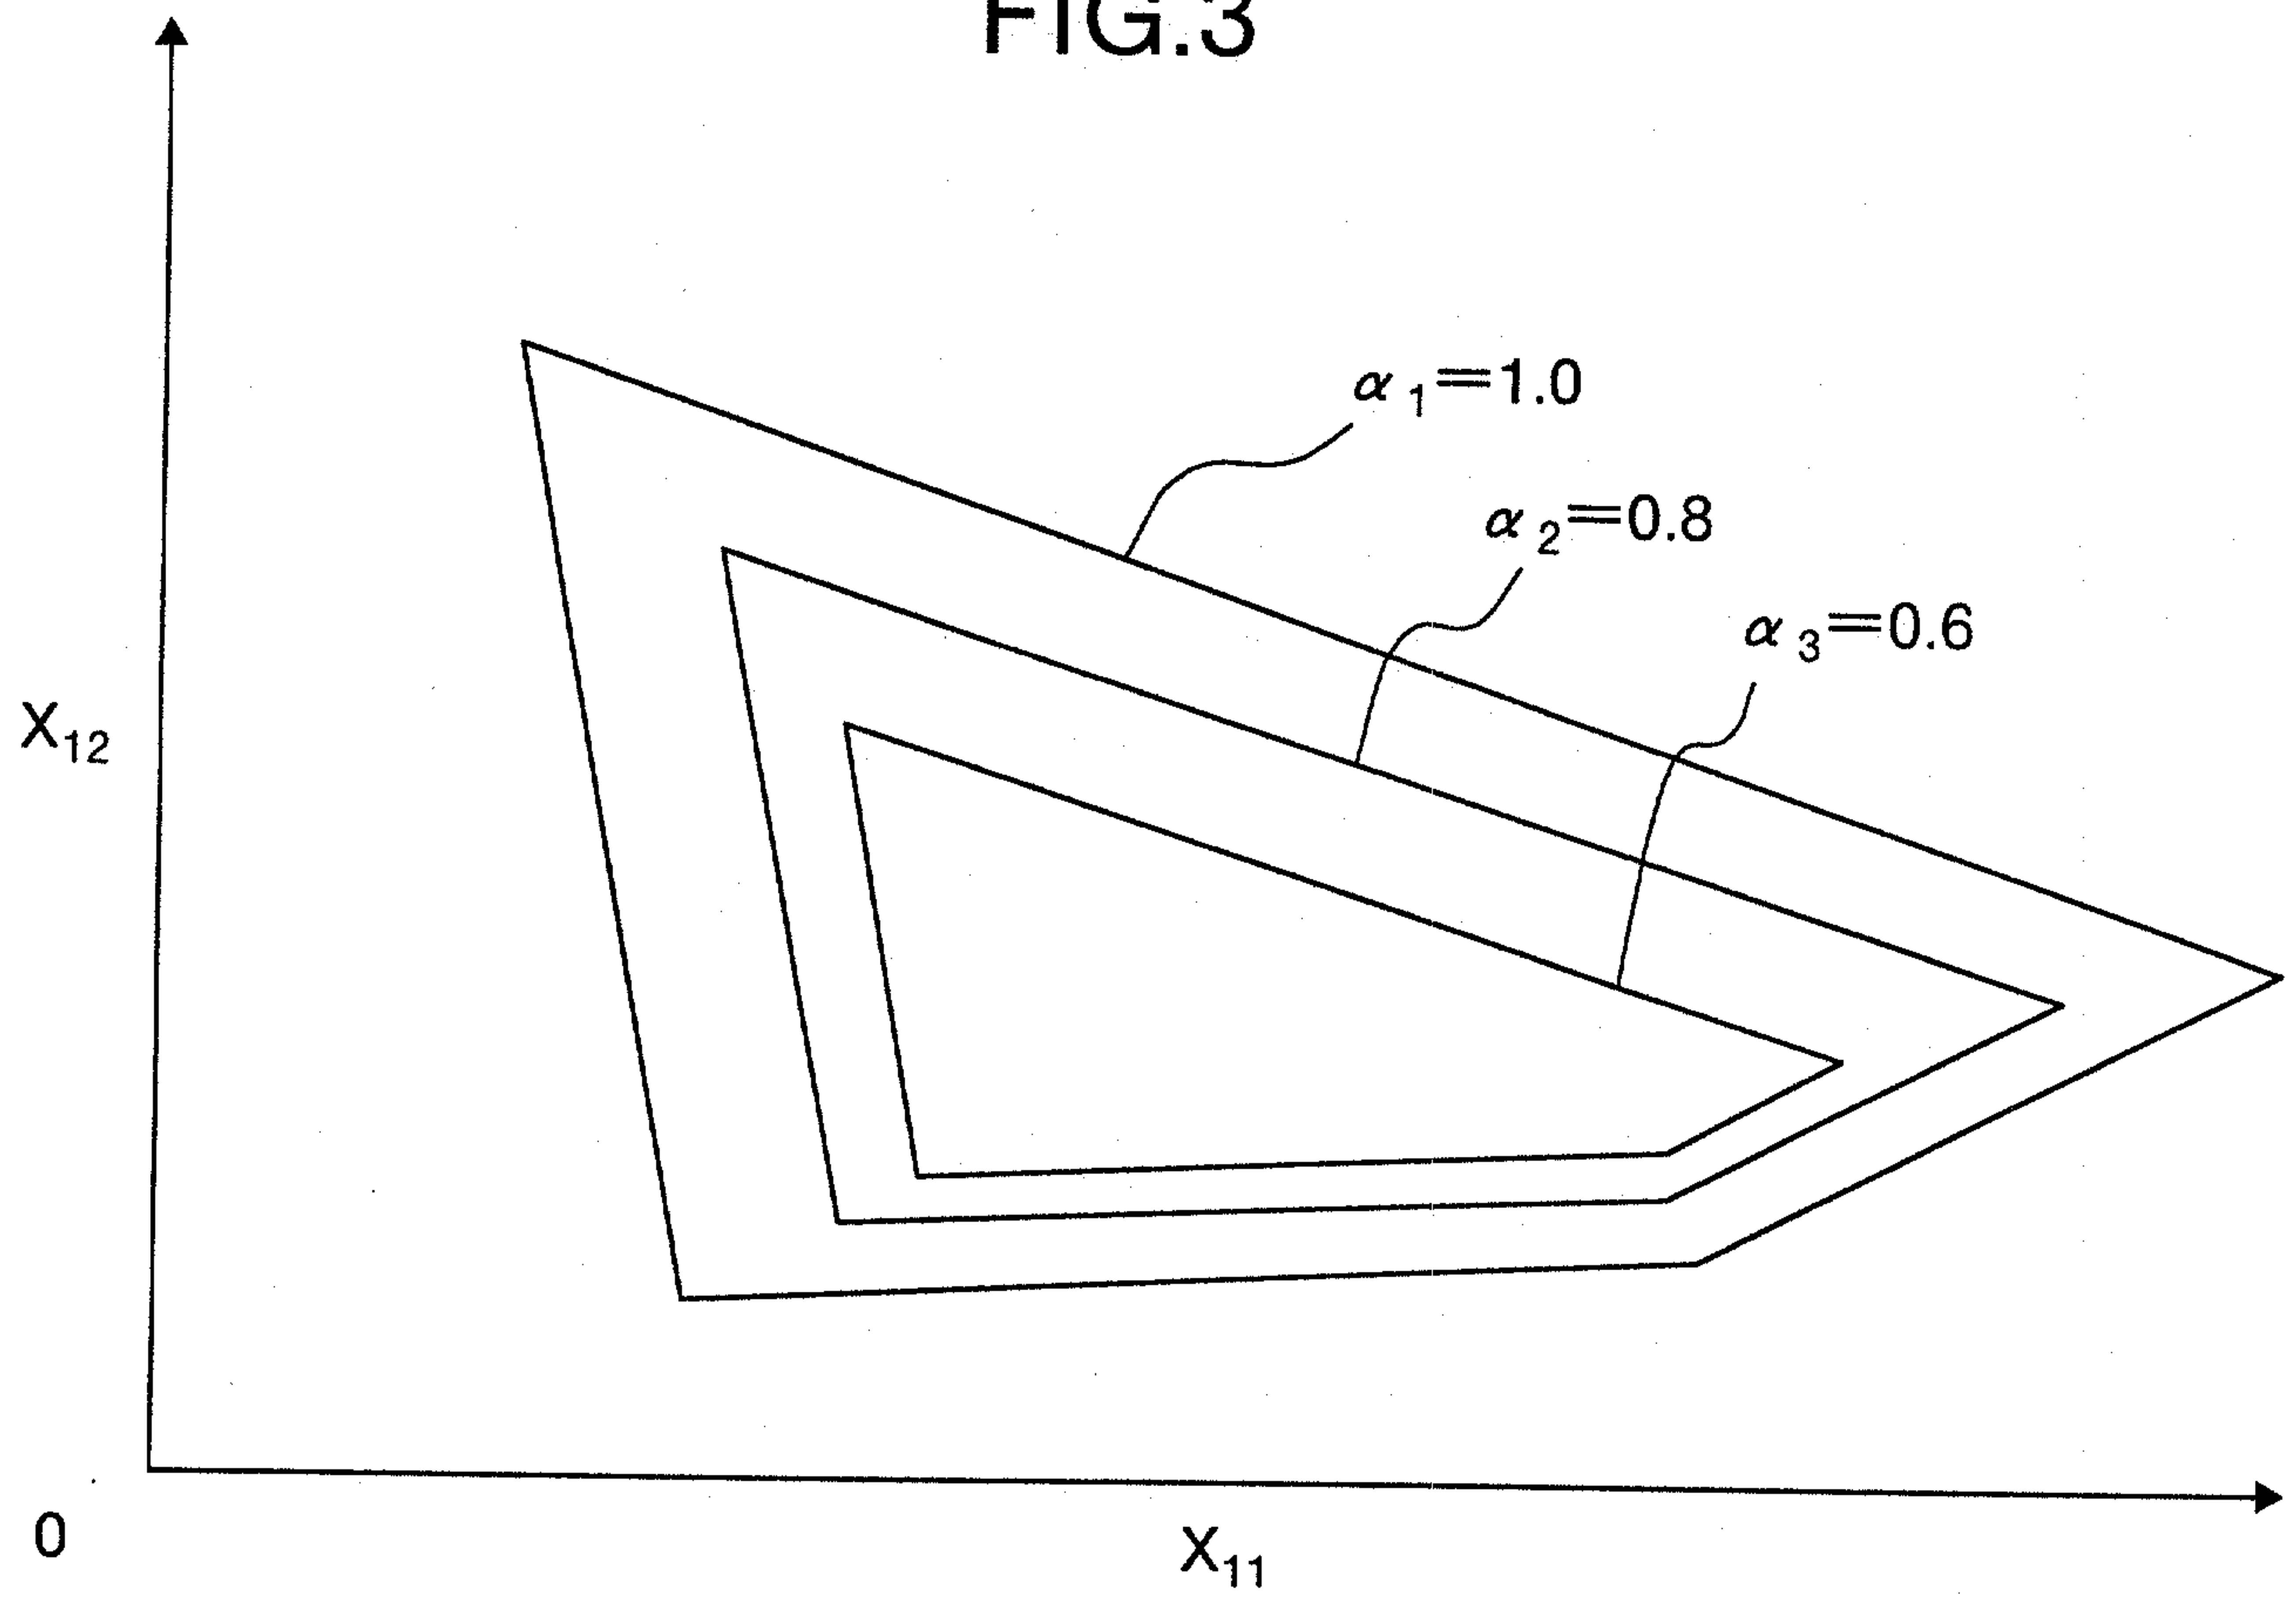


FIG.4

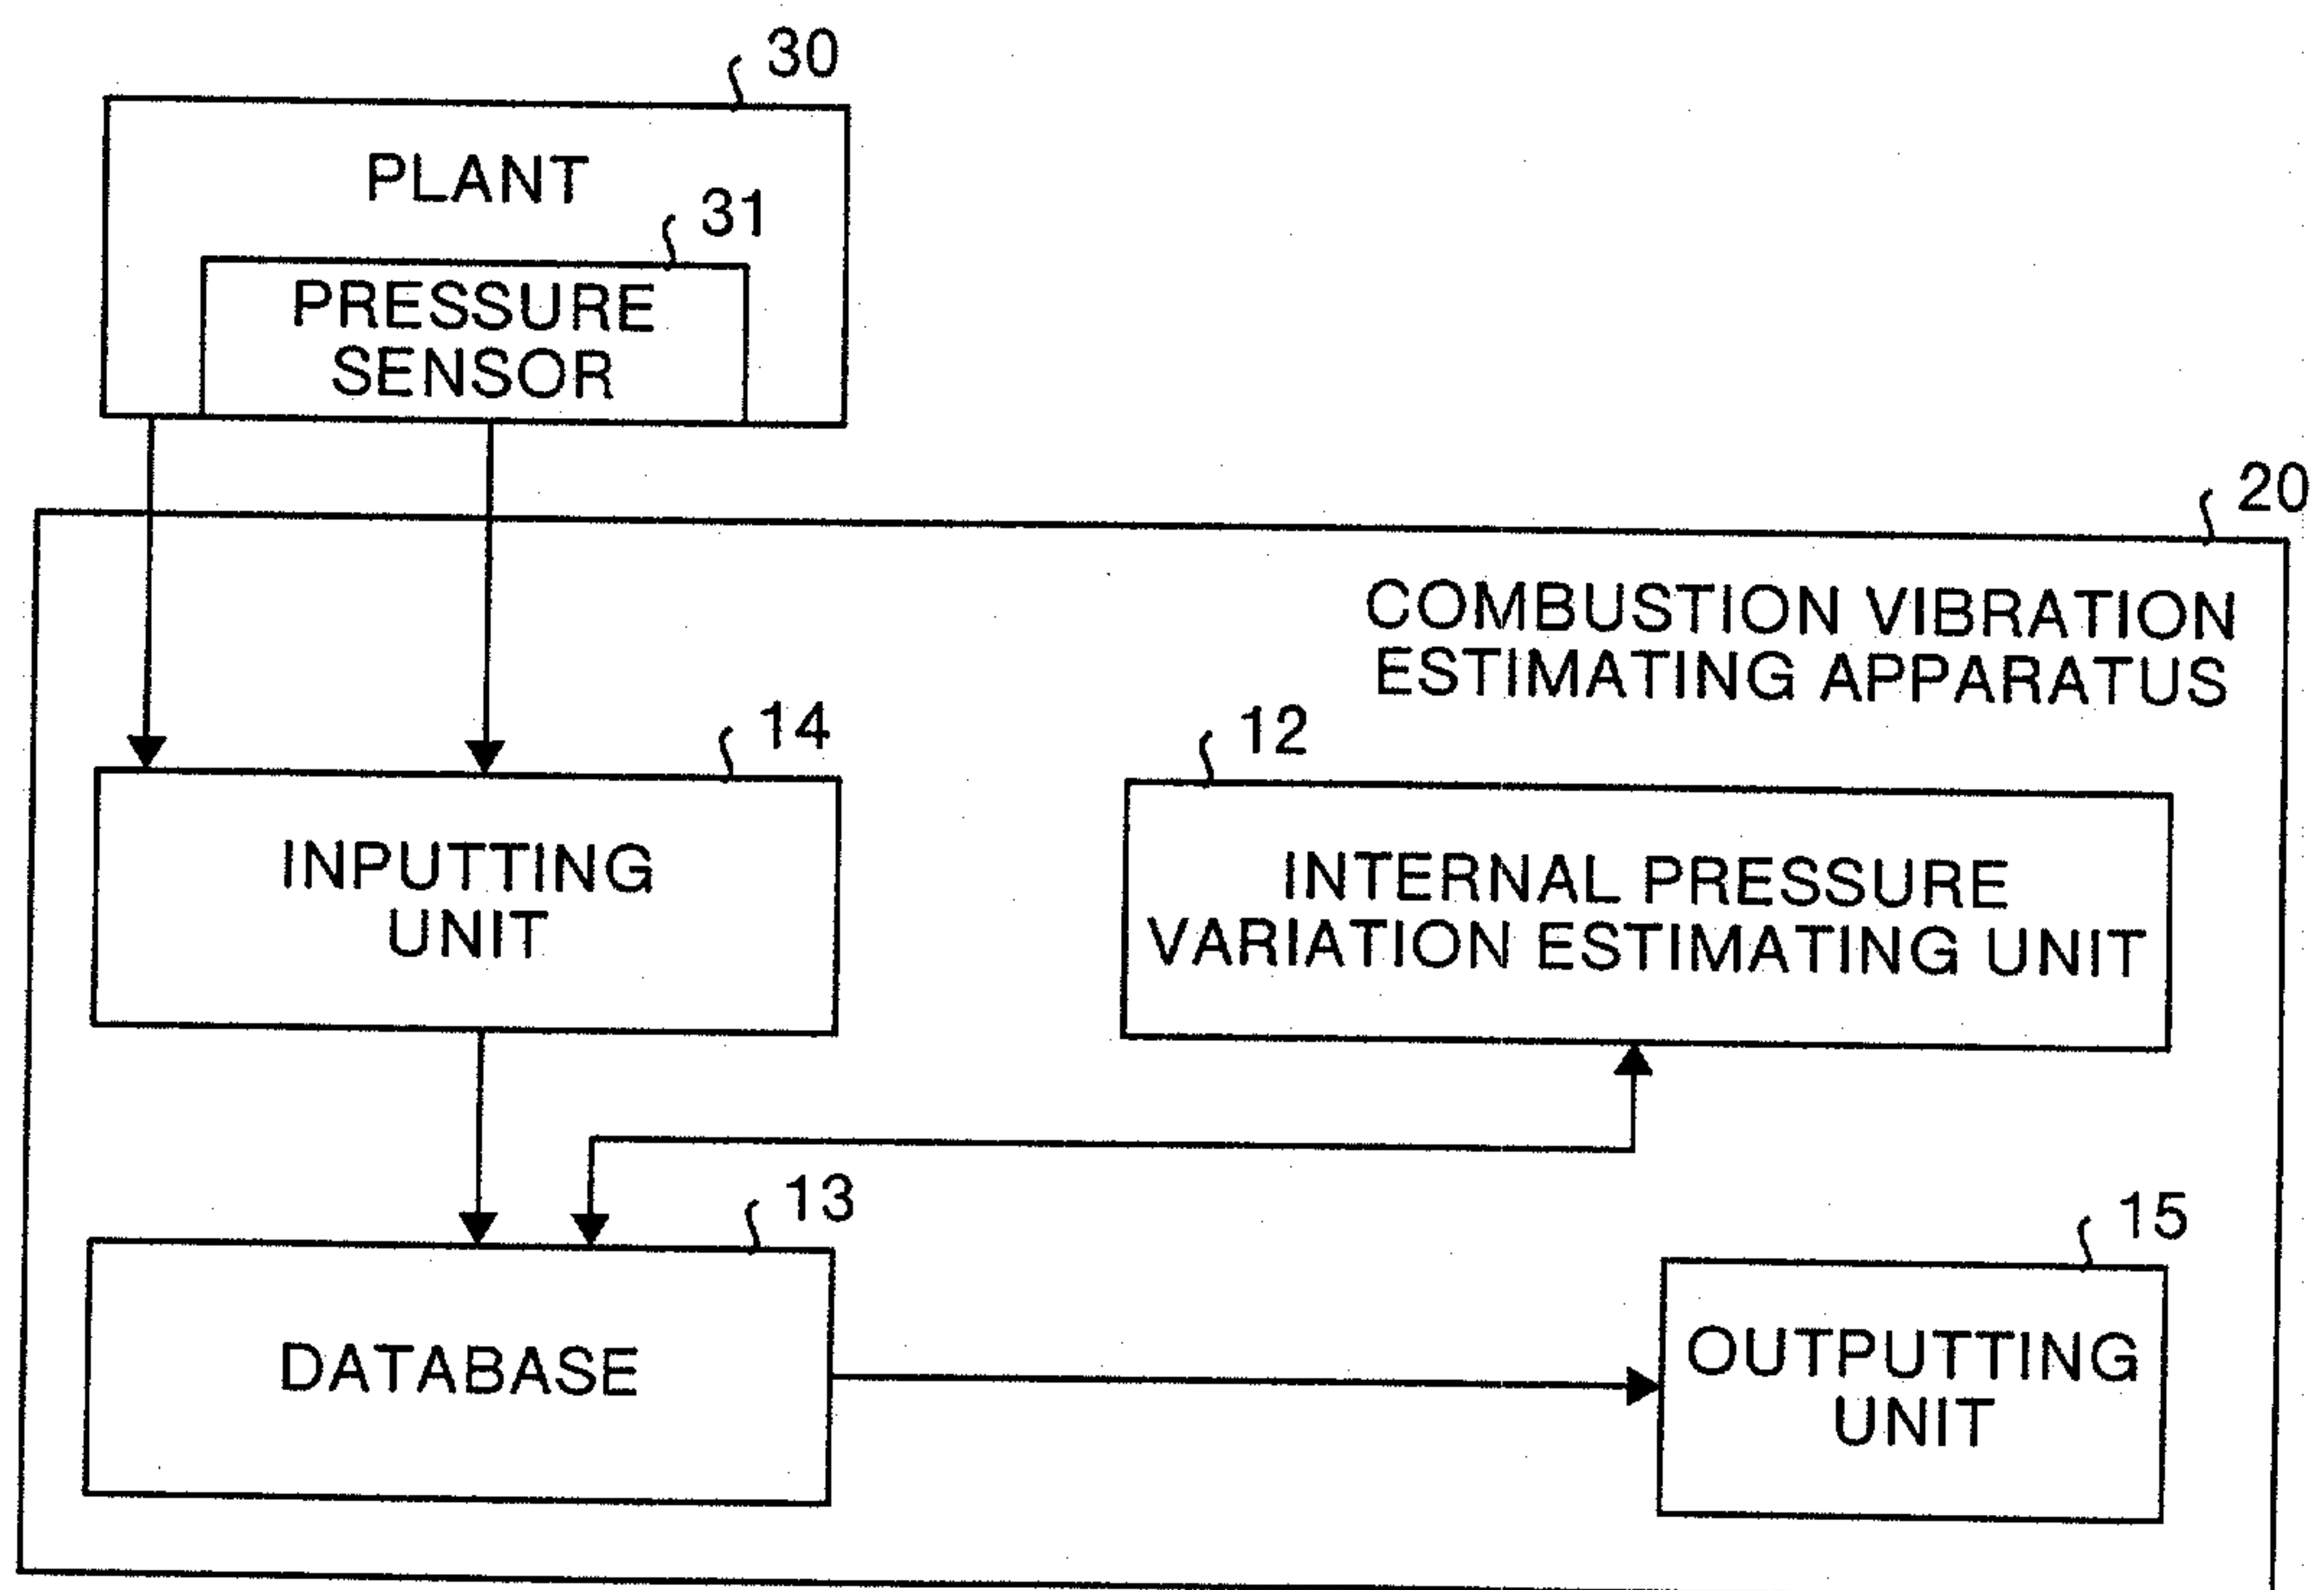


3/15

FIG.5

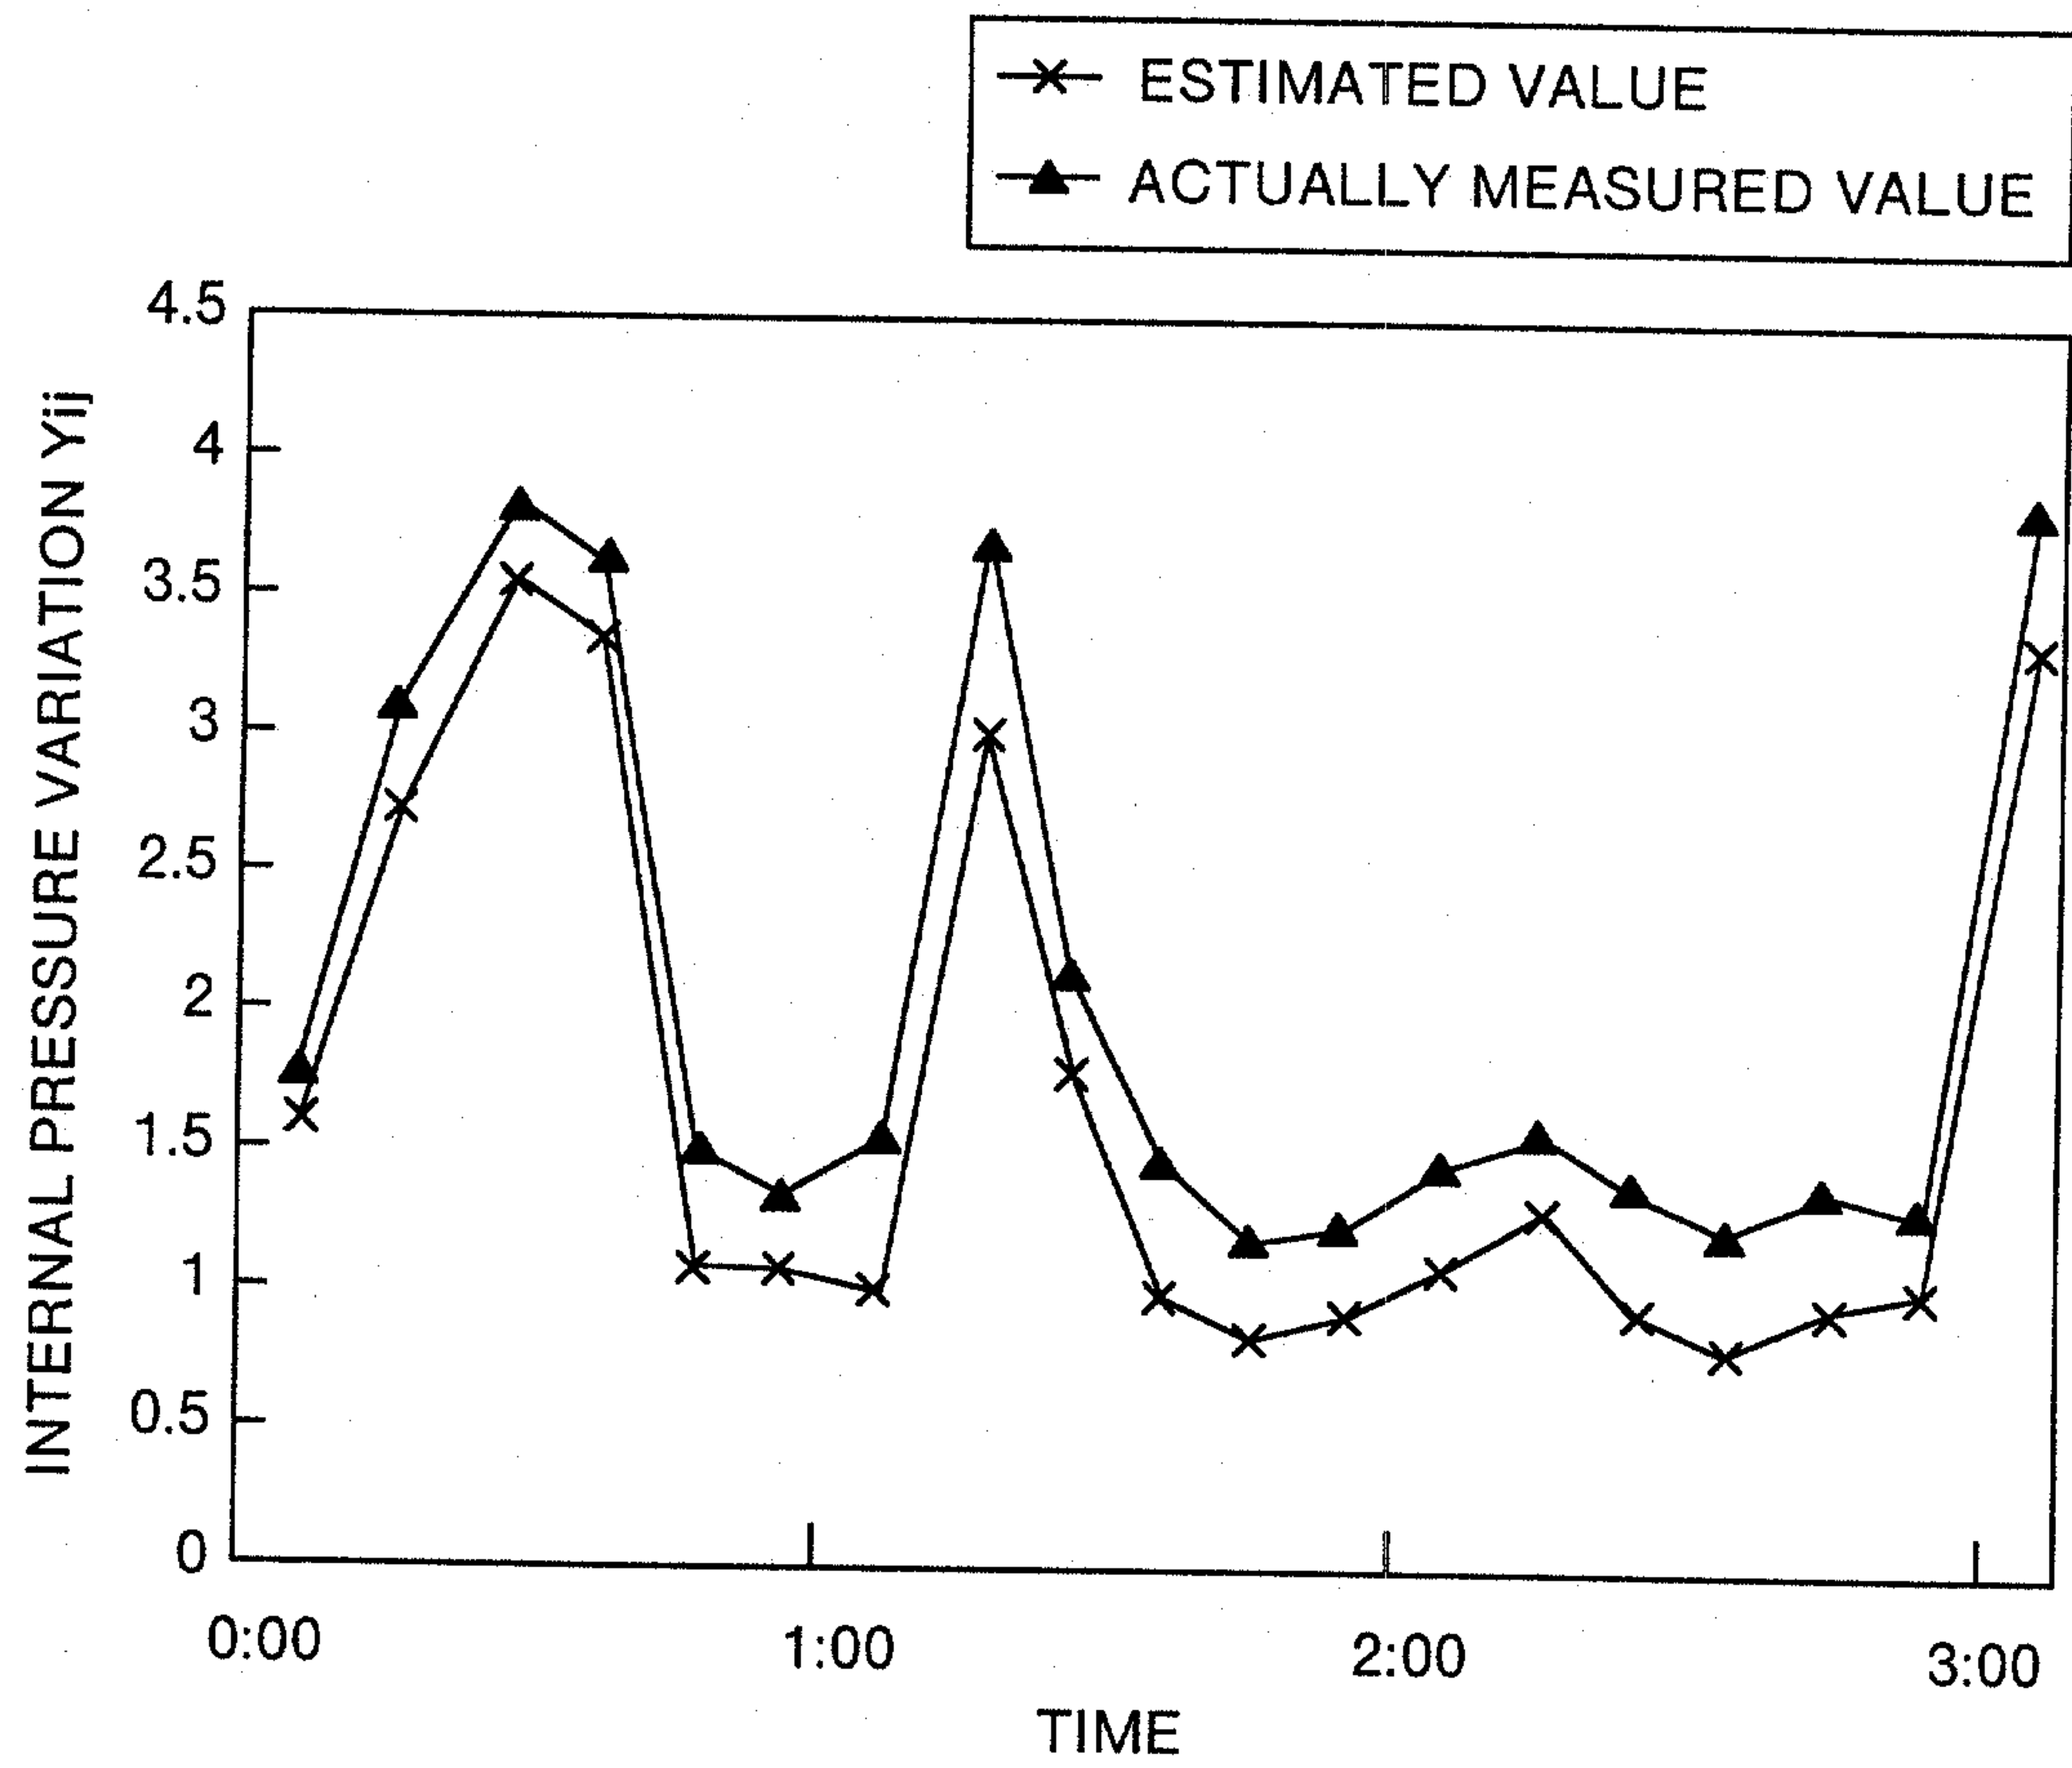

4/15

FIG.6

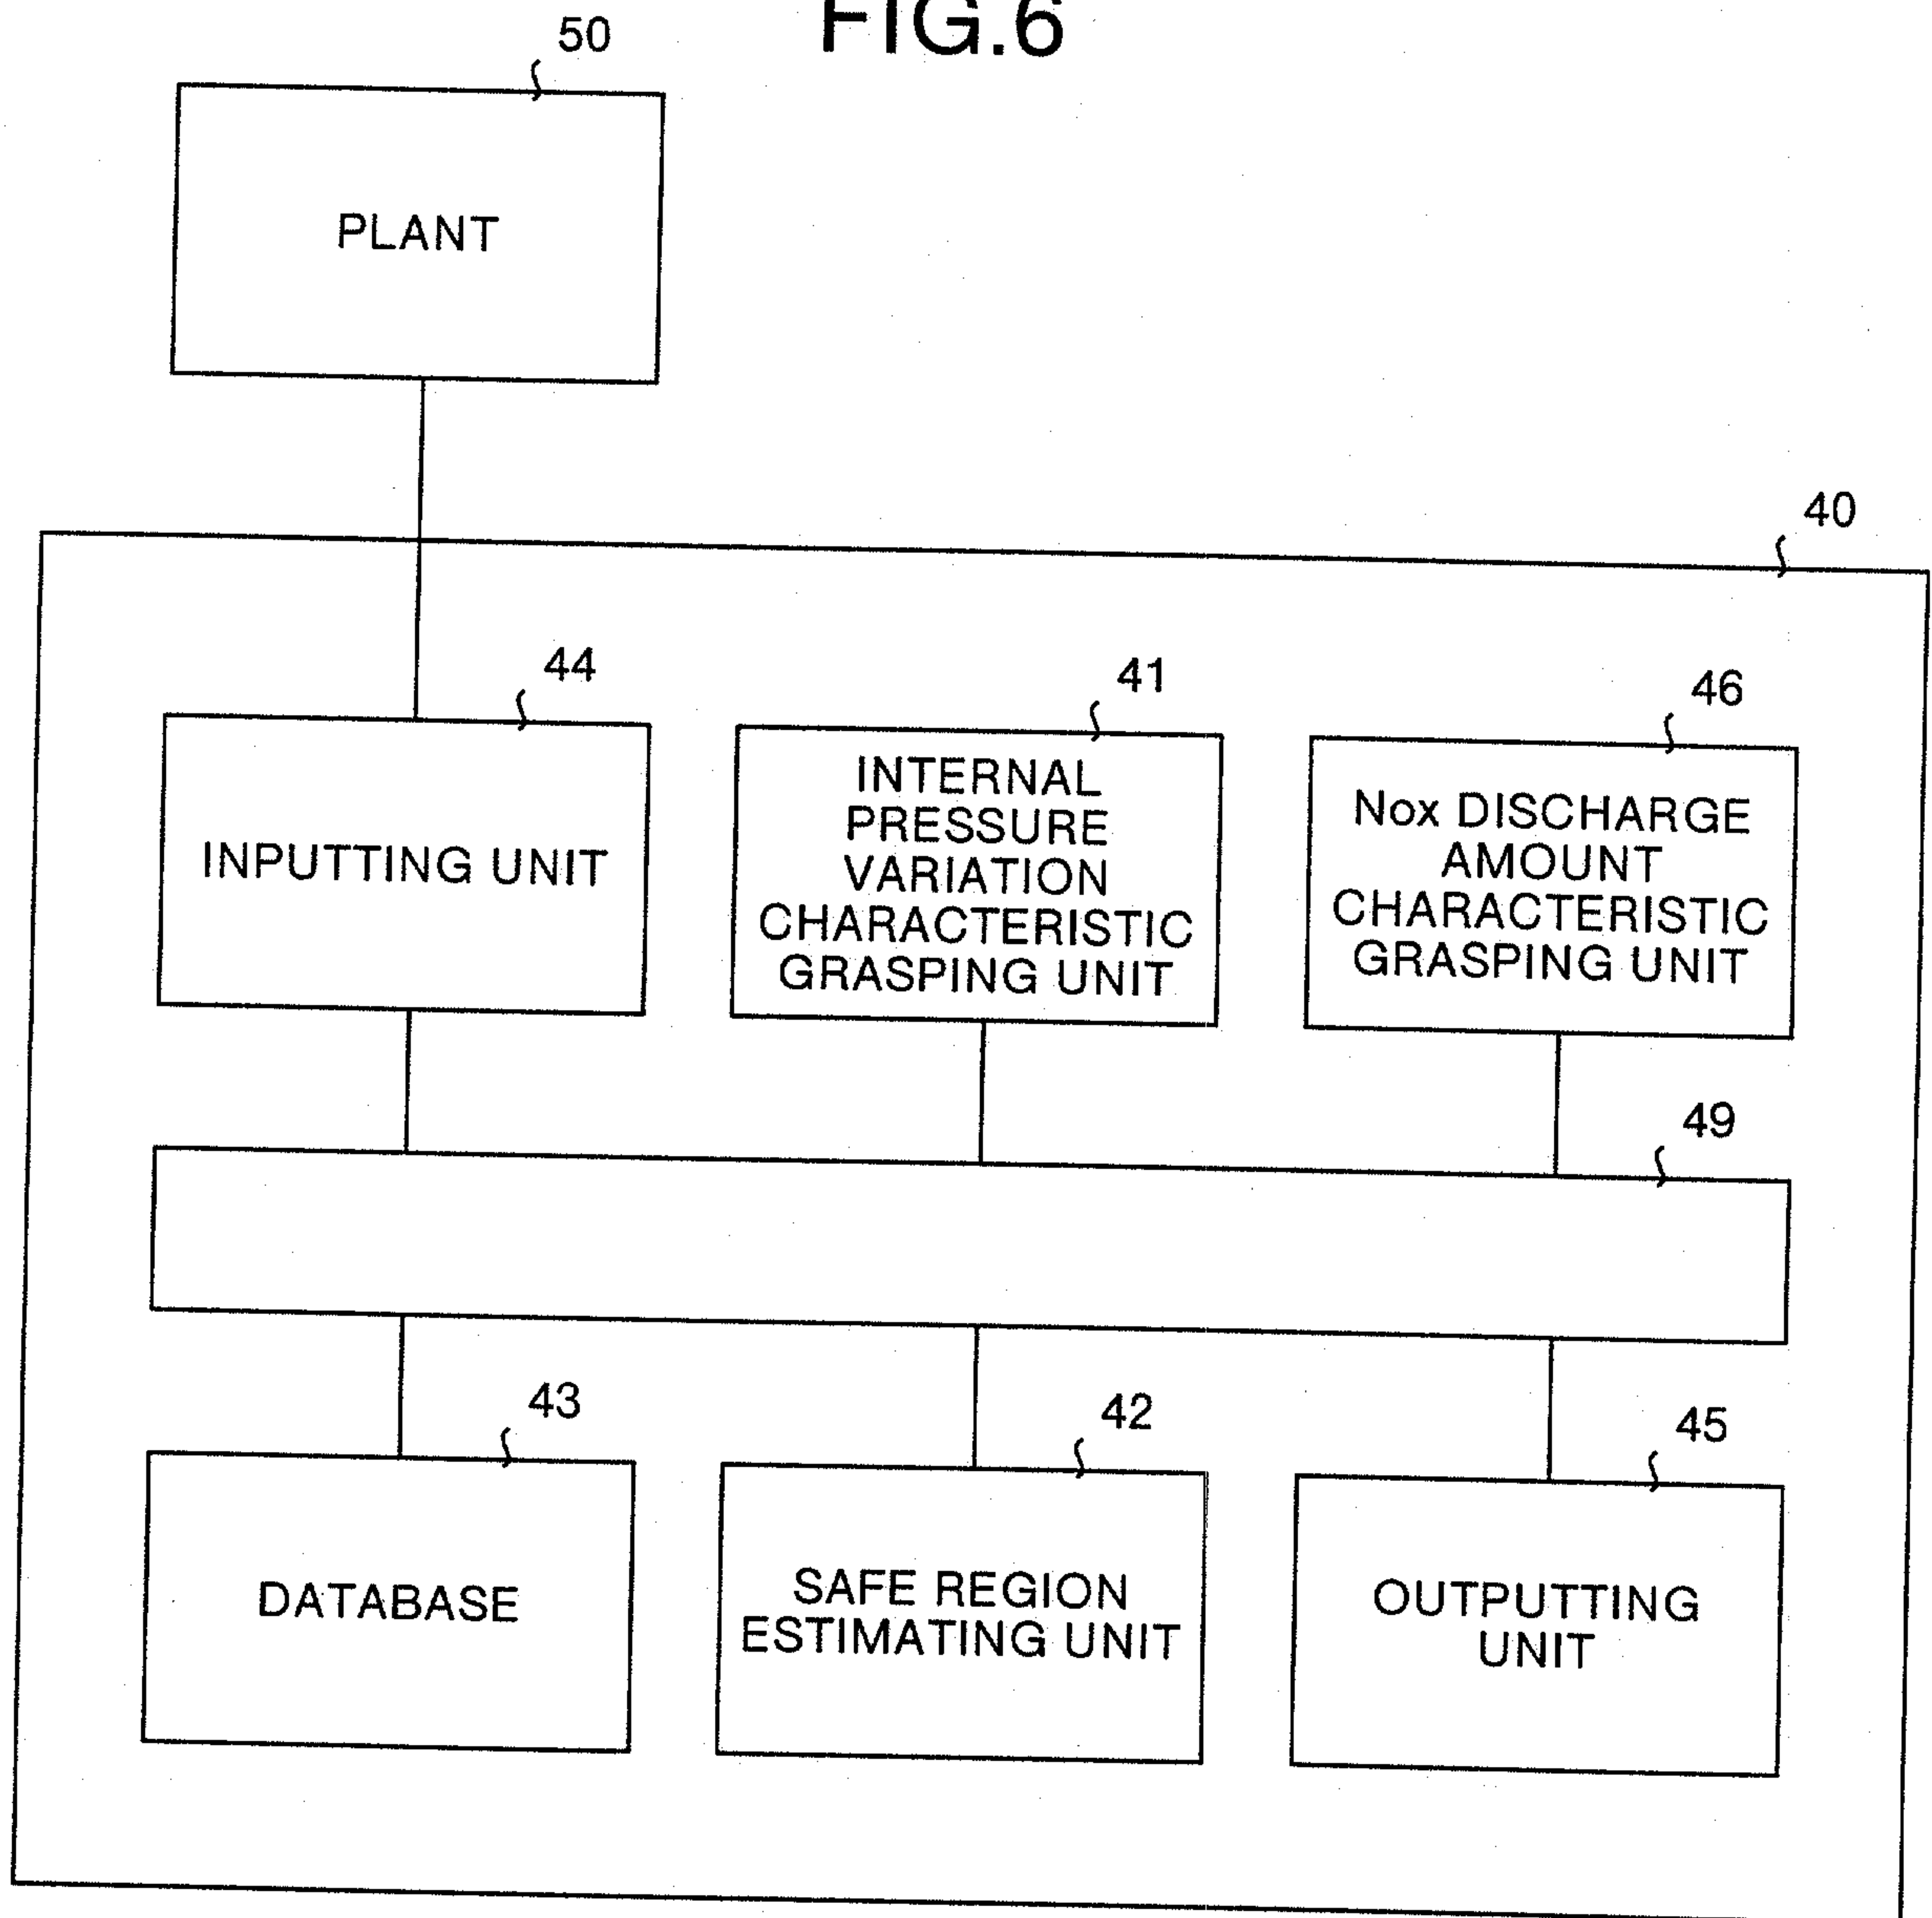

5/15

FIG.7


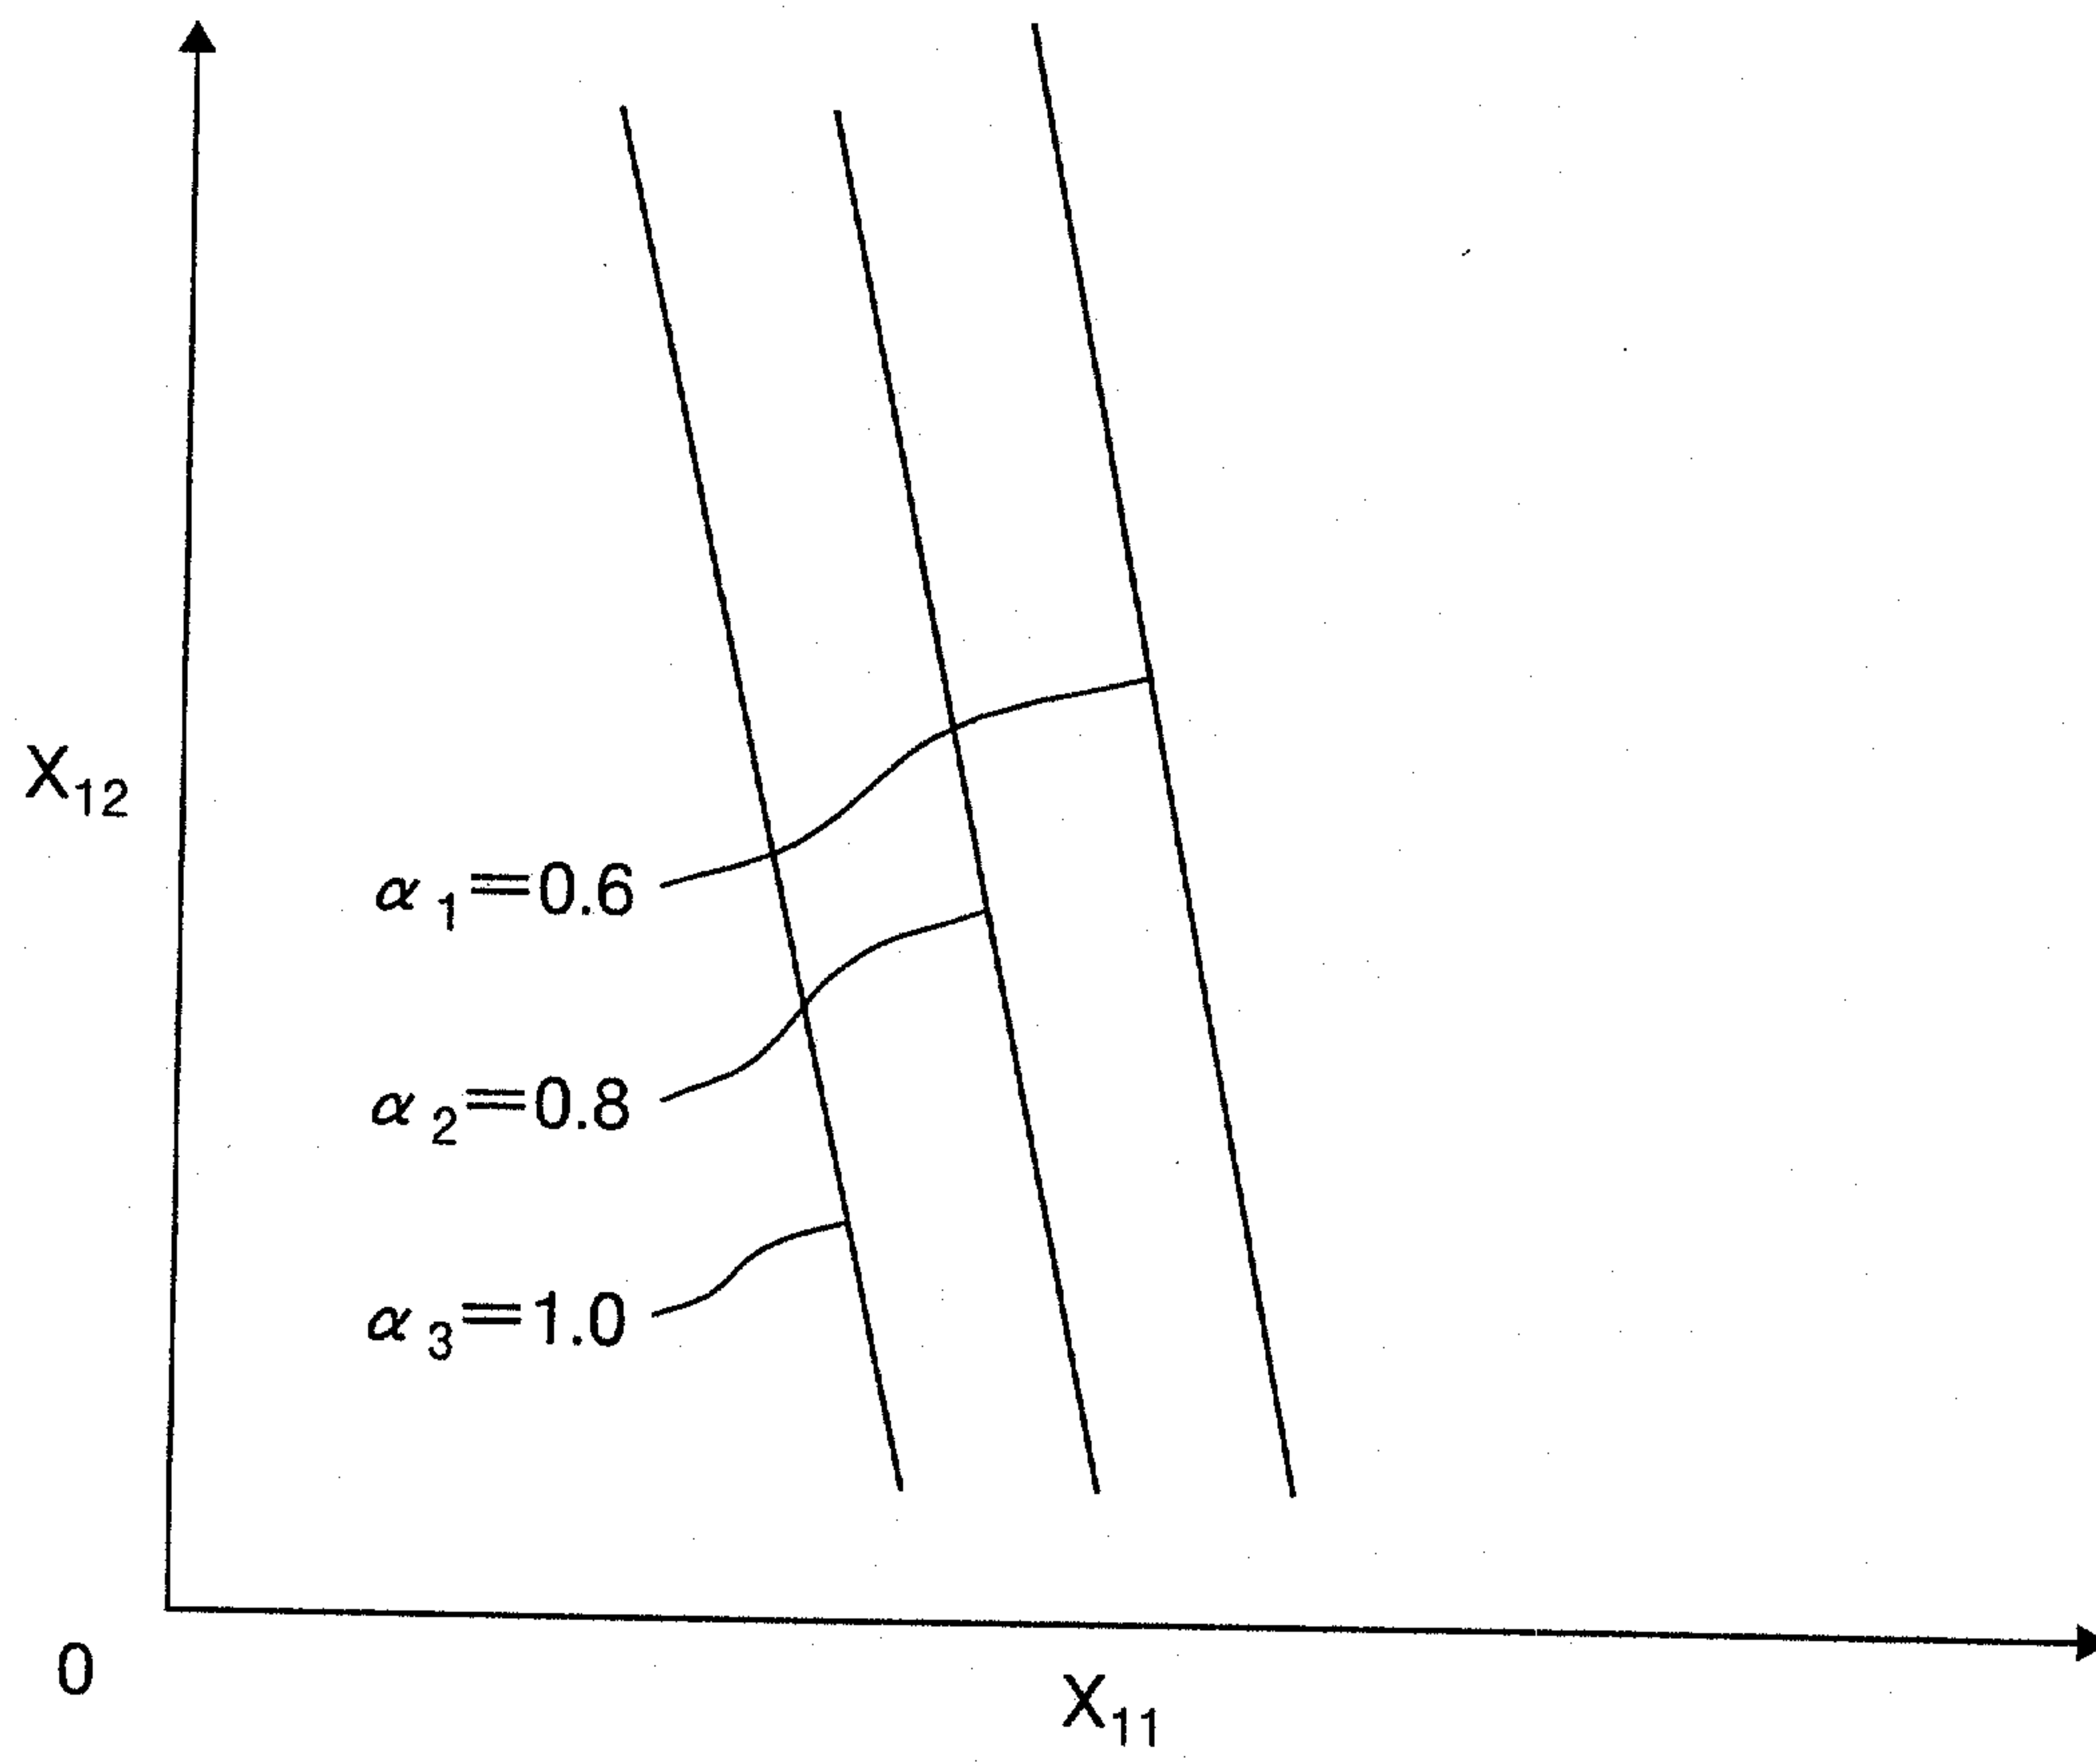


FIG.8

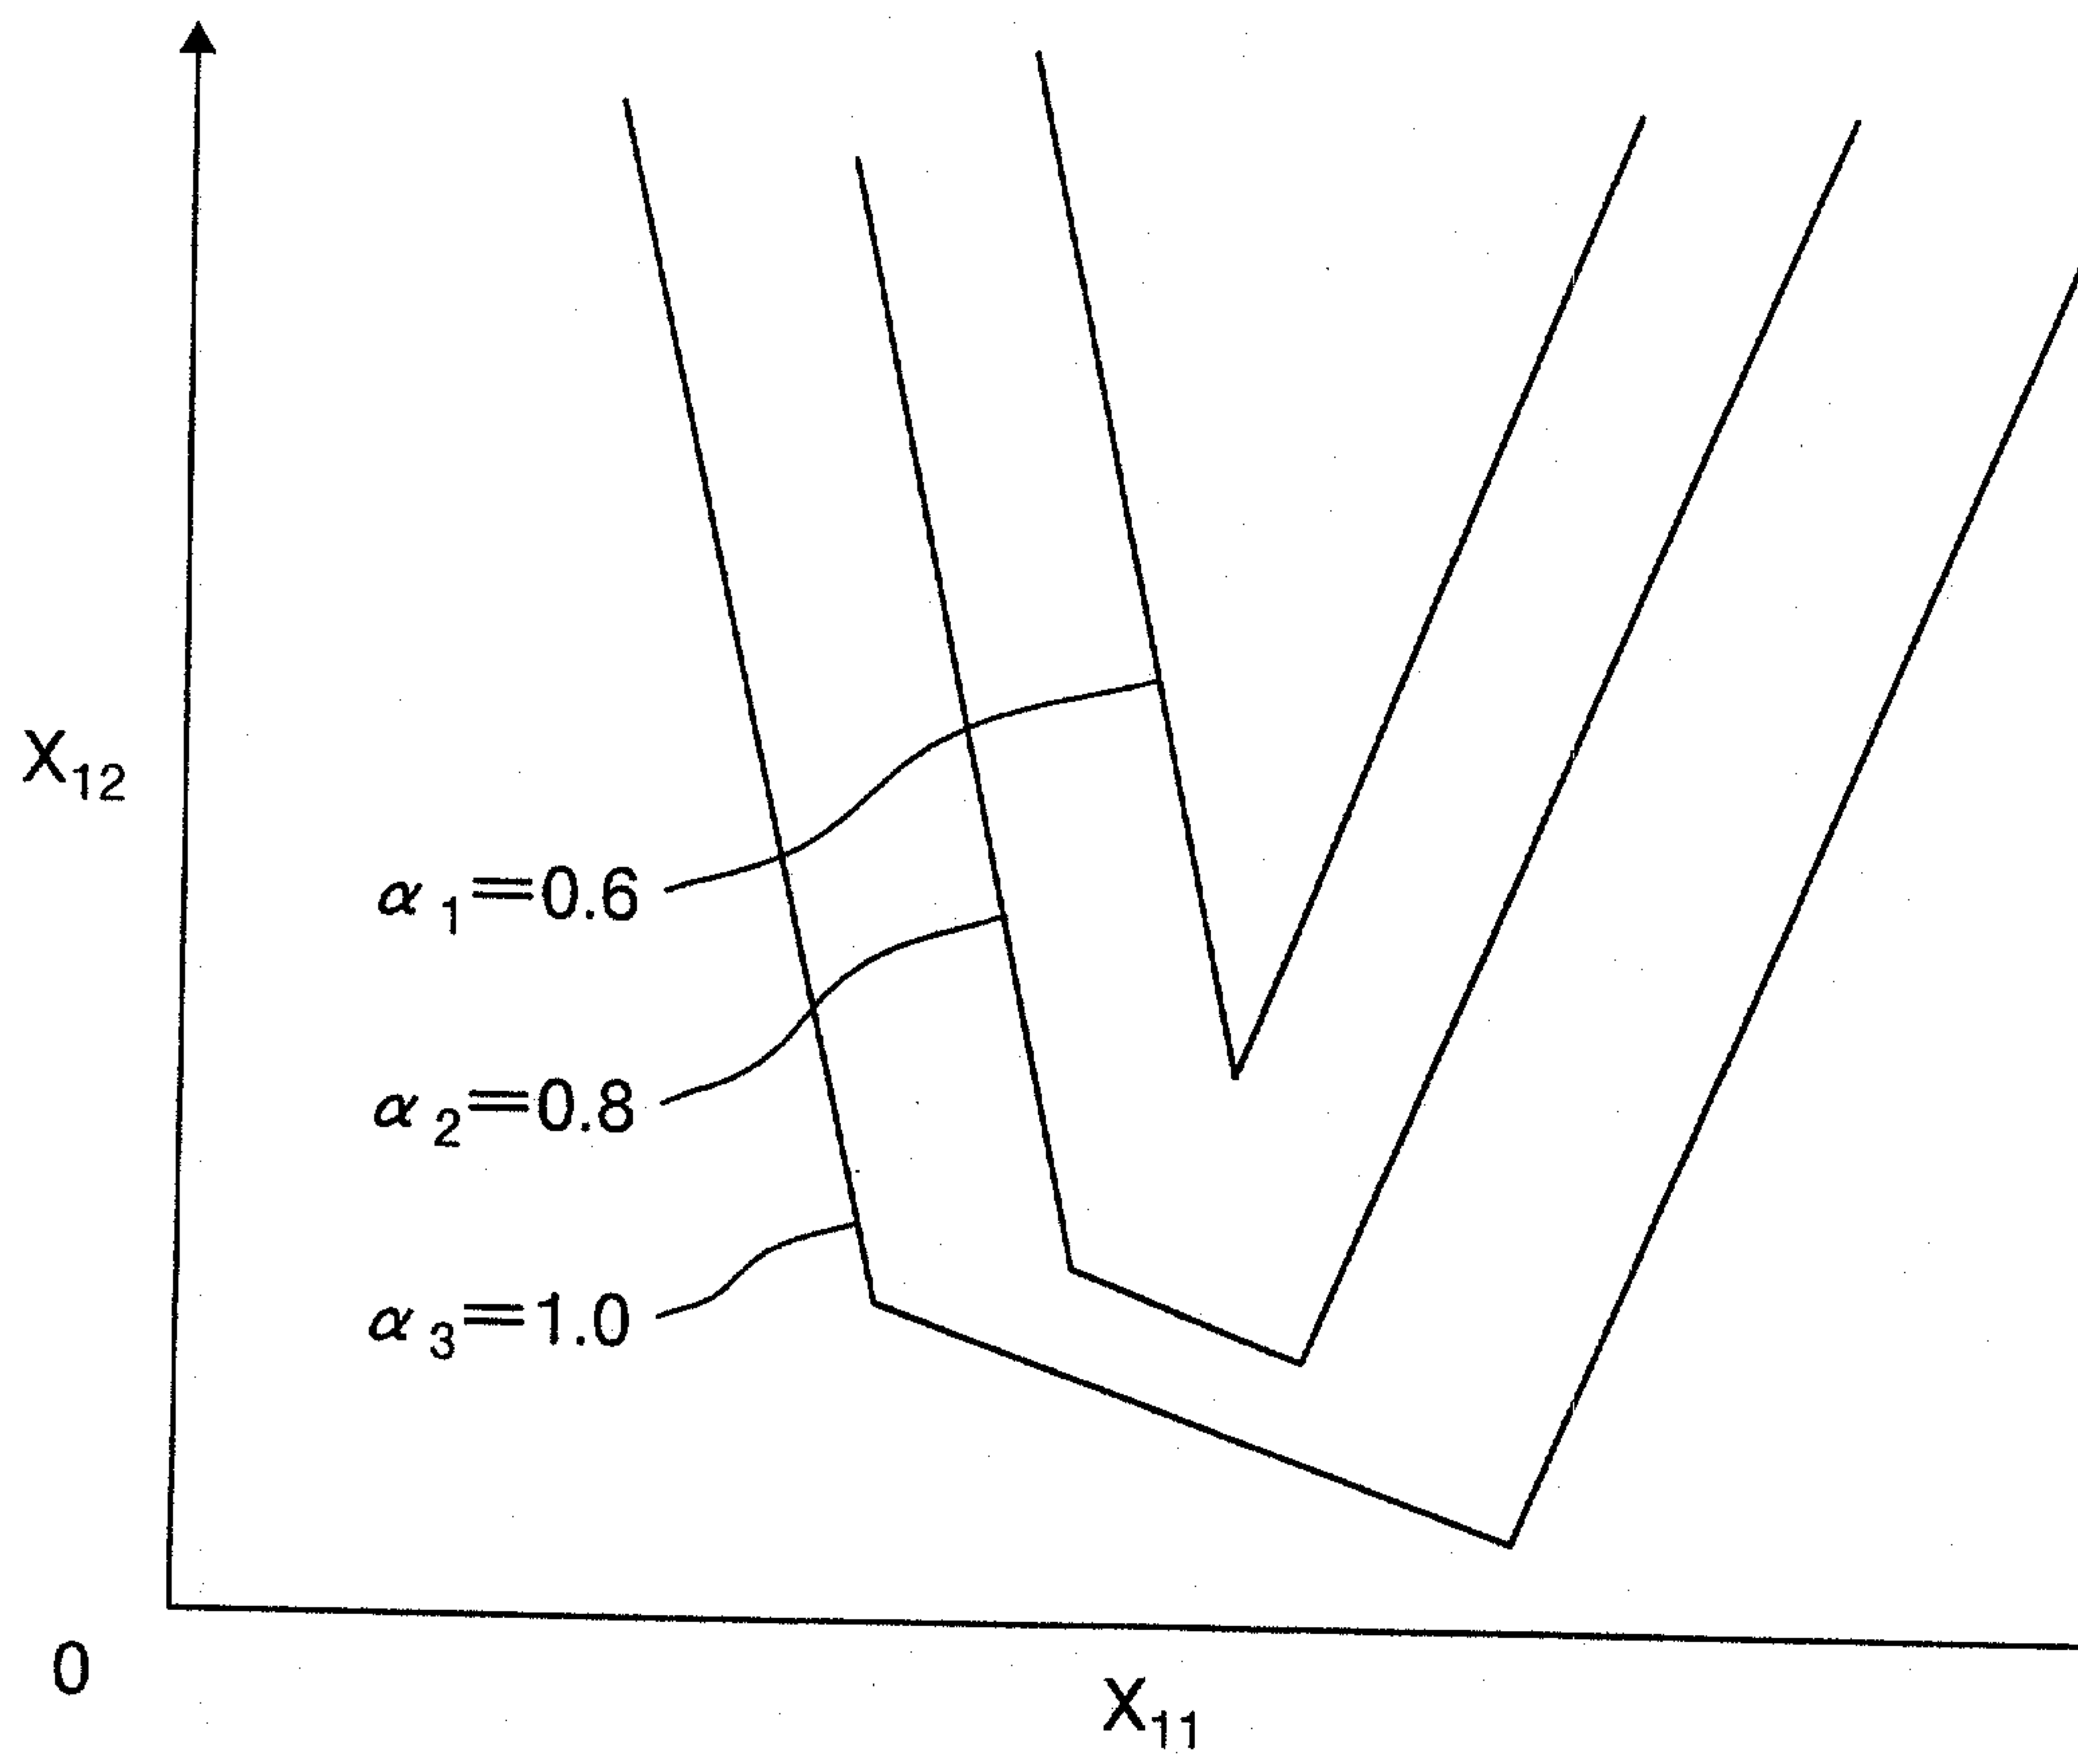

6/15

FIG.9


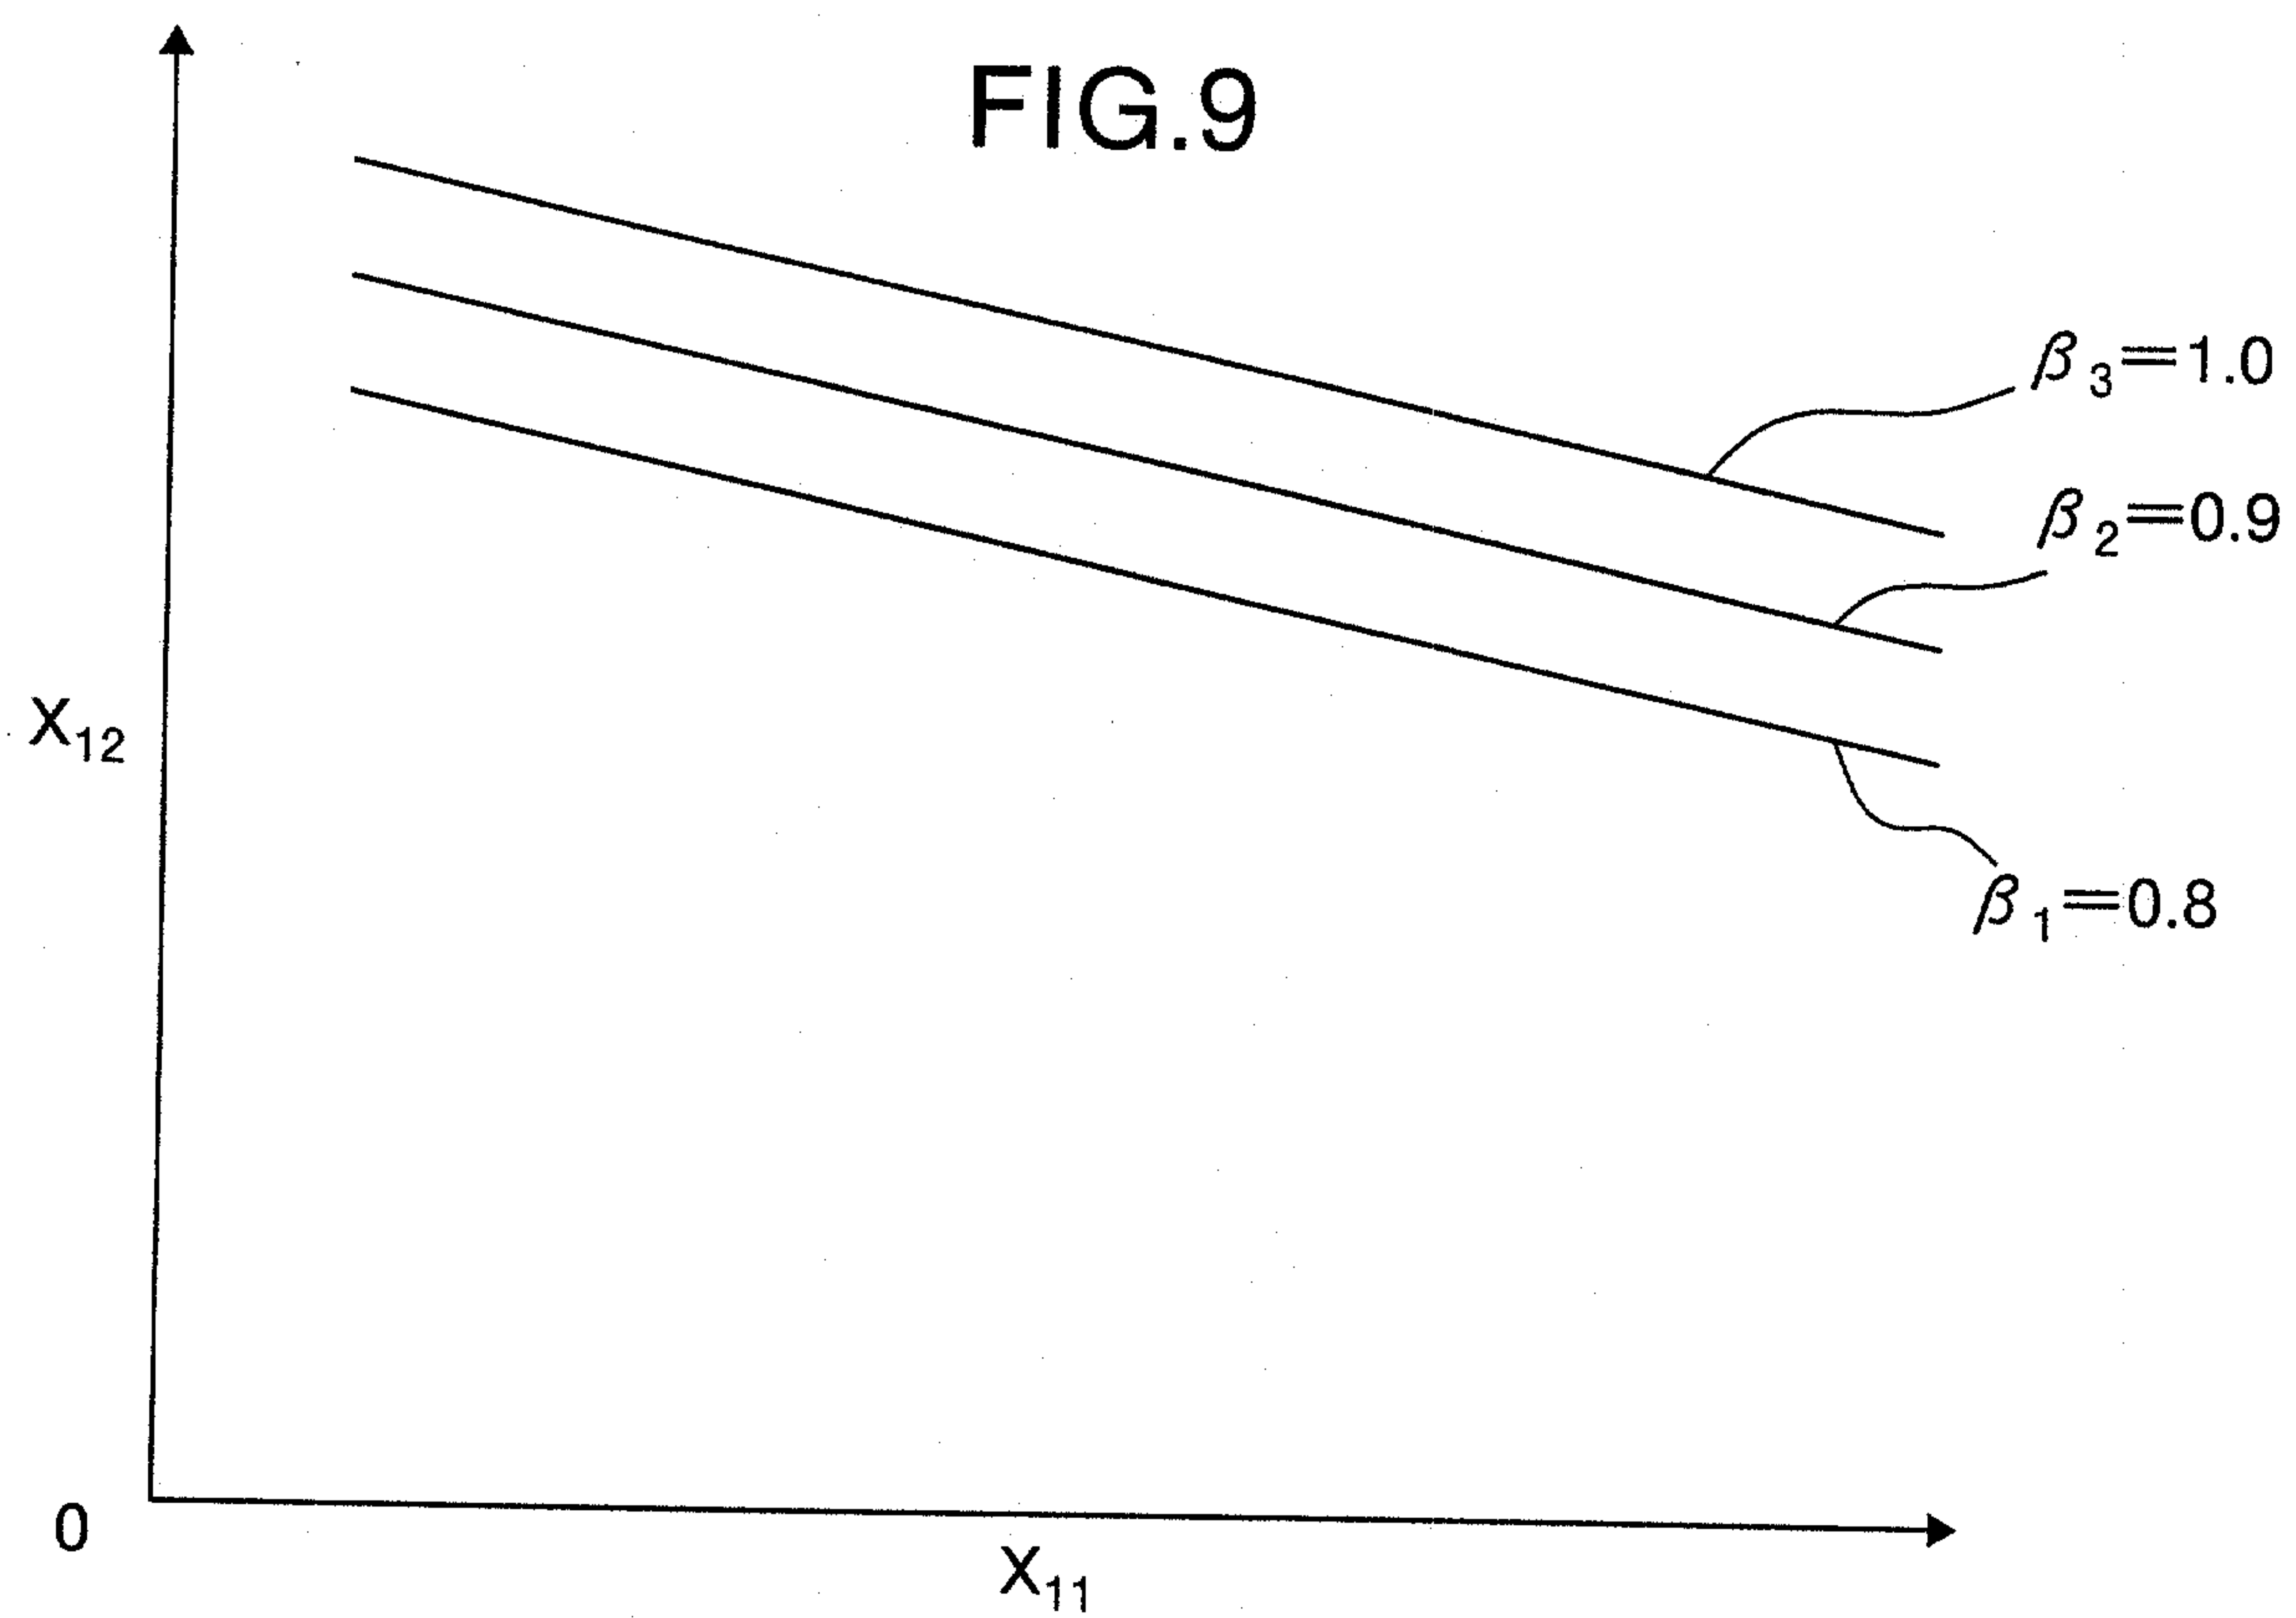


FIG.10

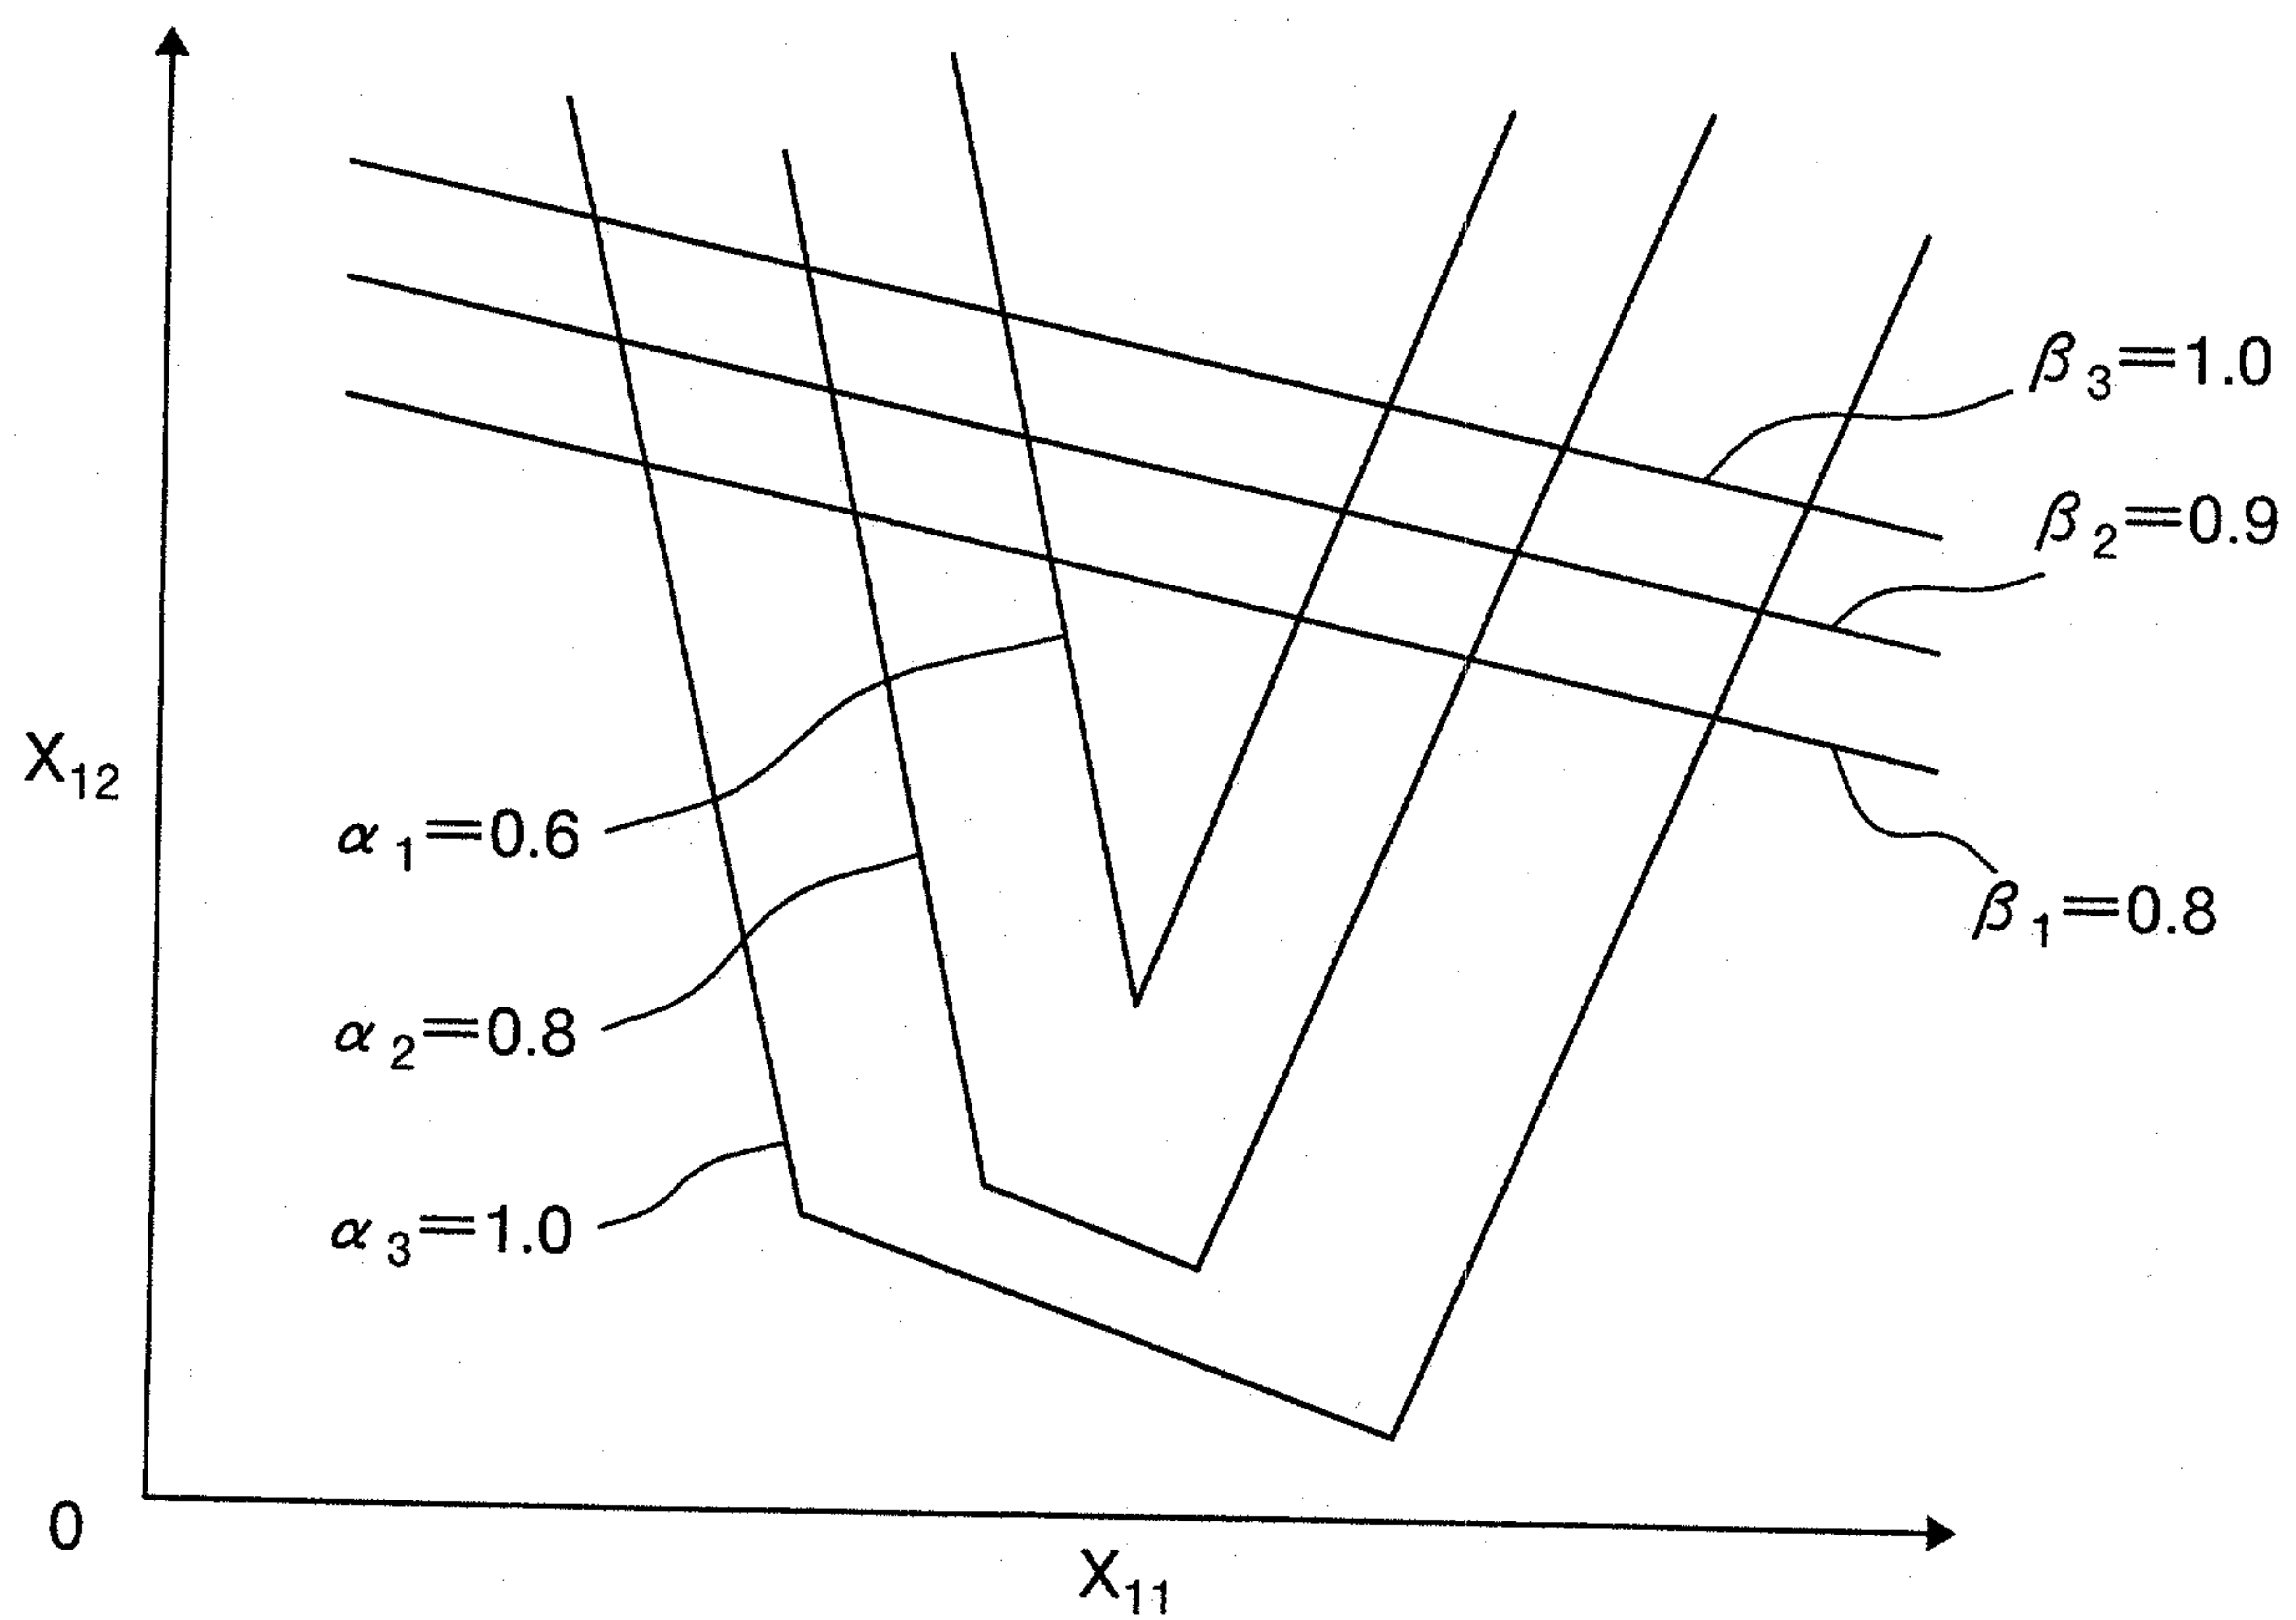

7/15

FIG.11


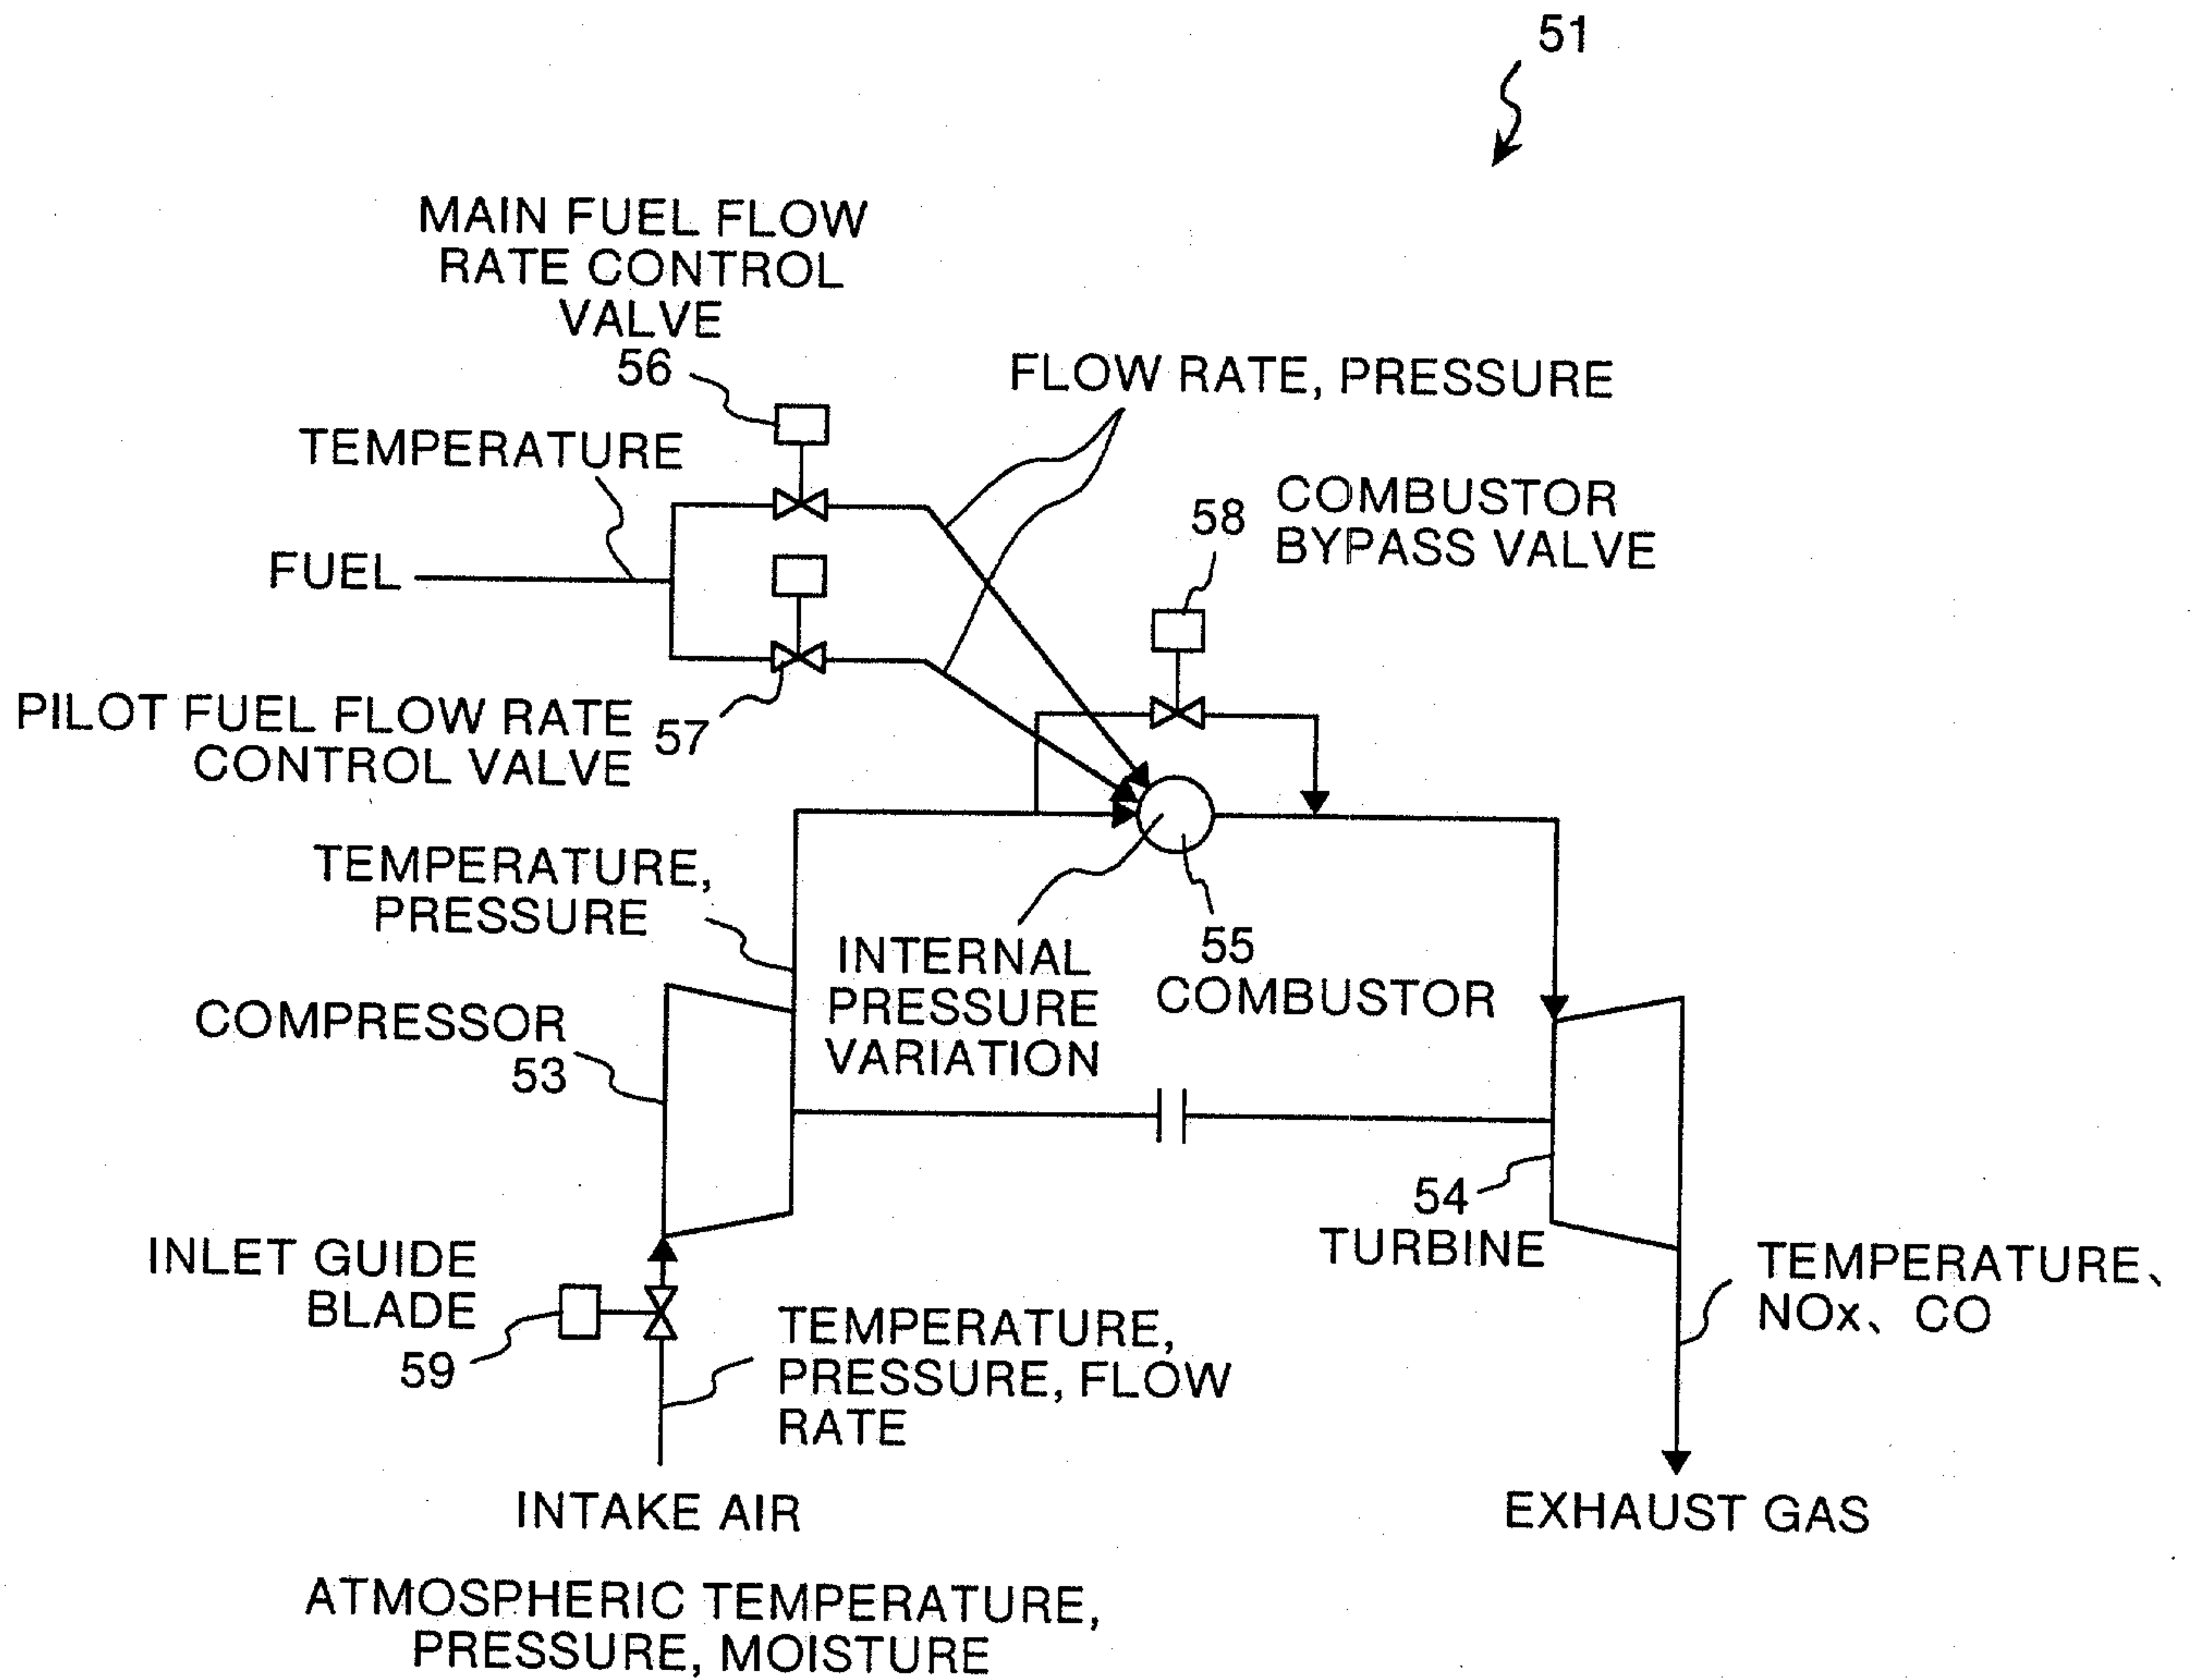


FIG.12

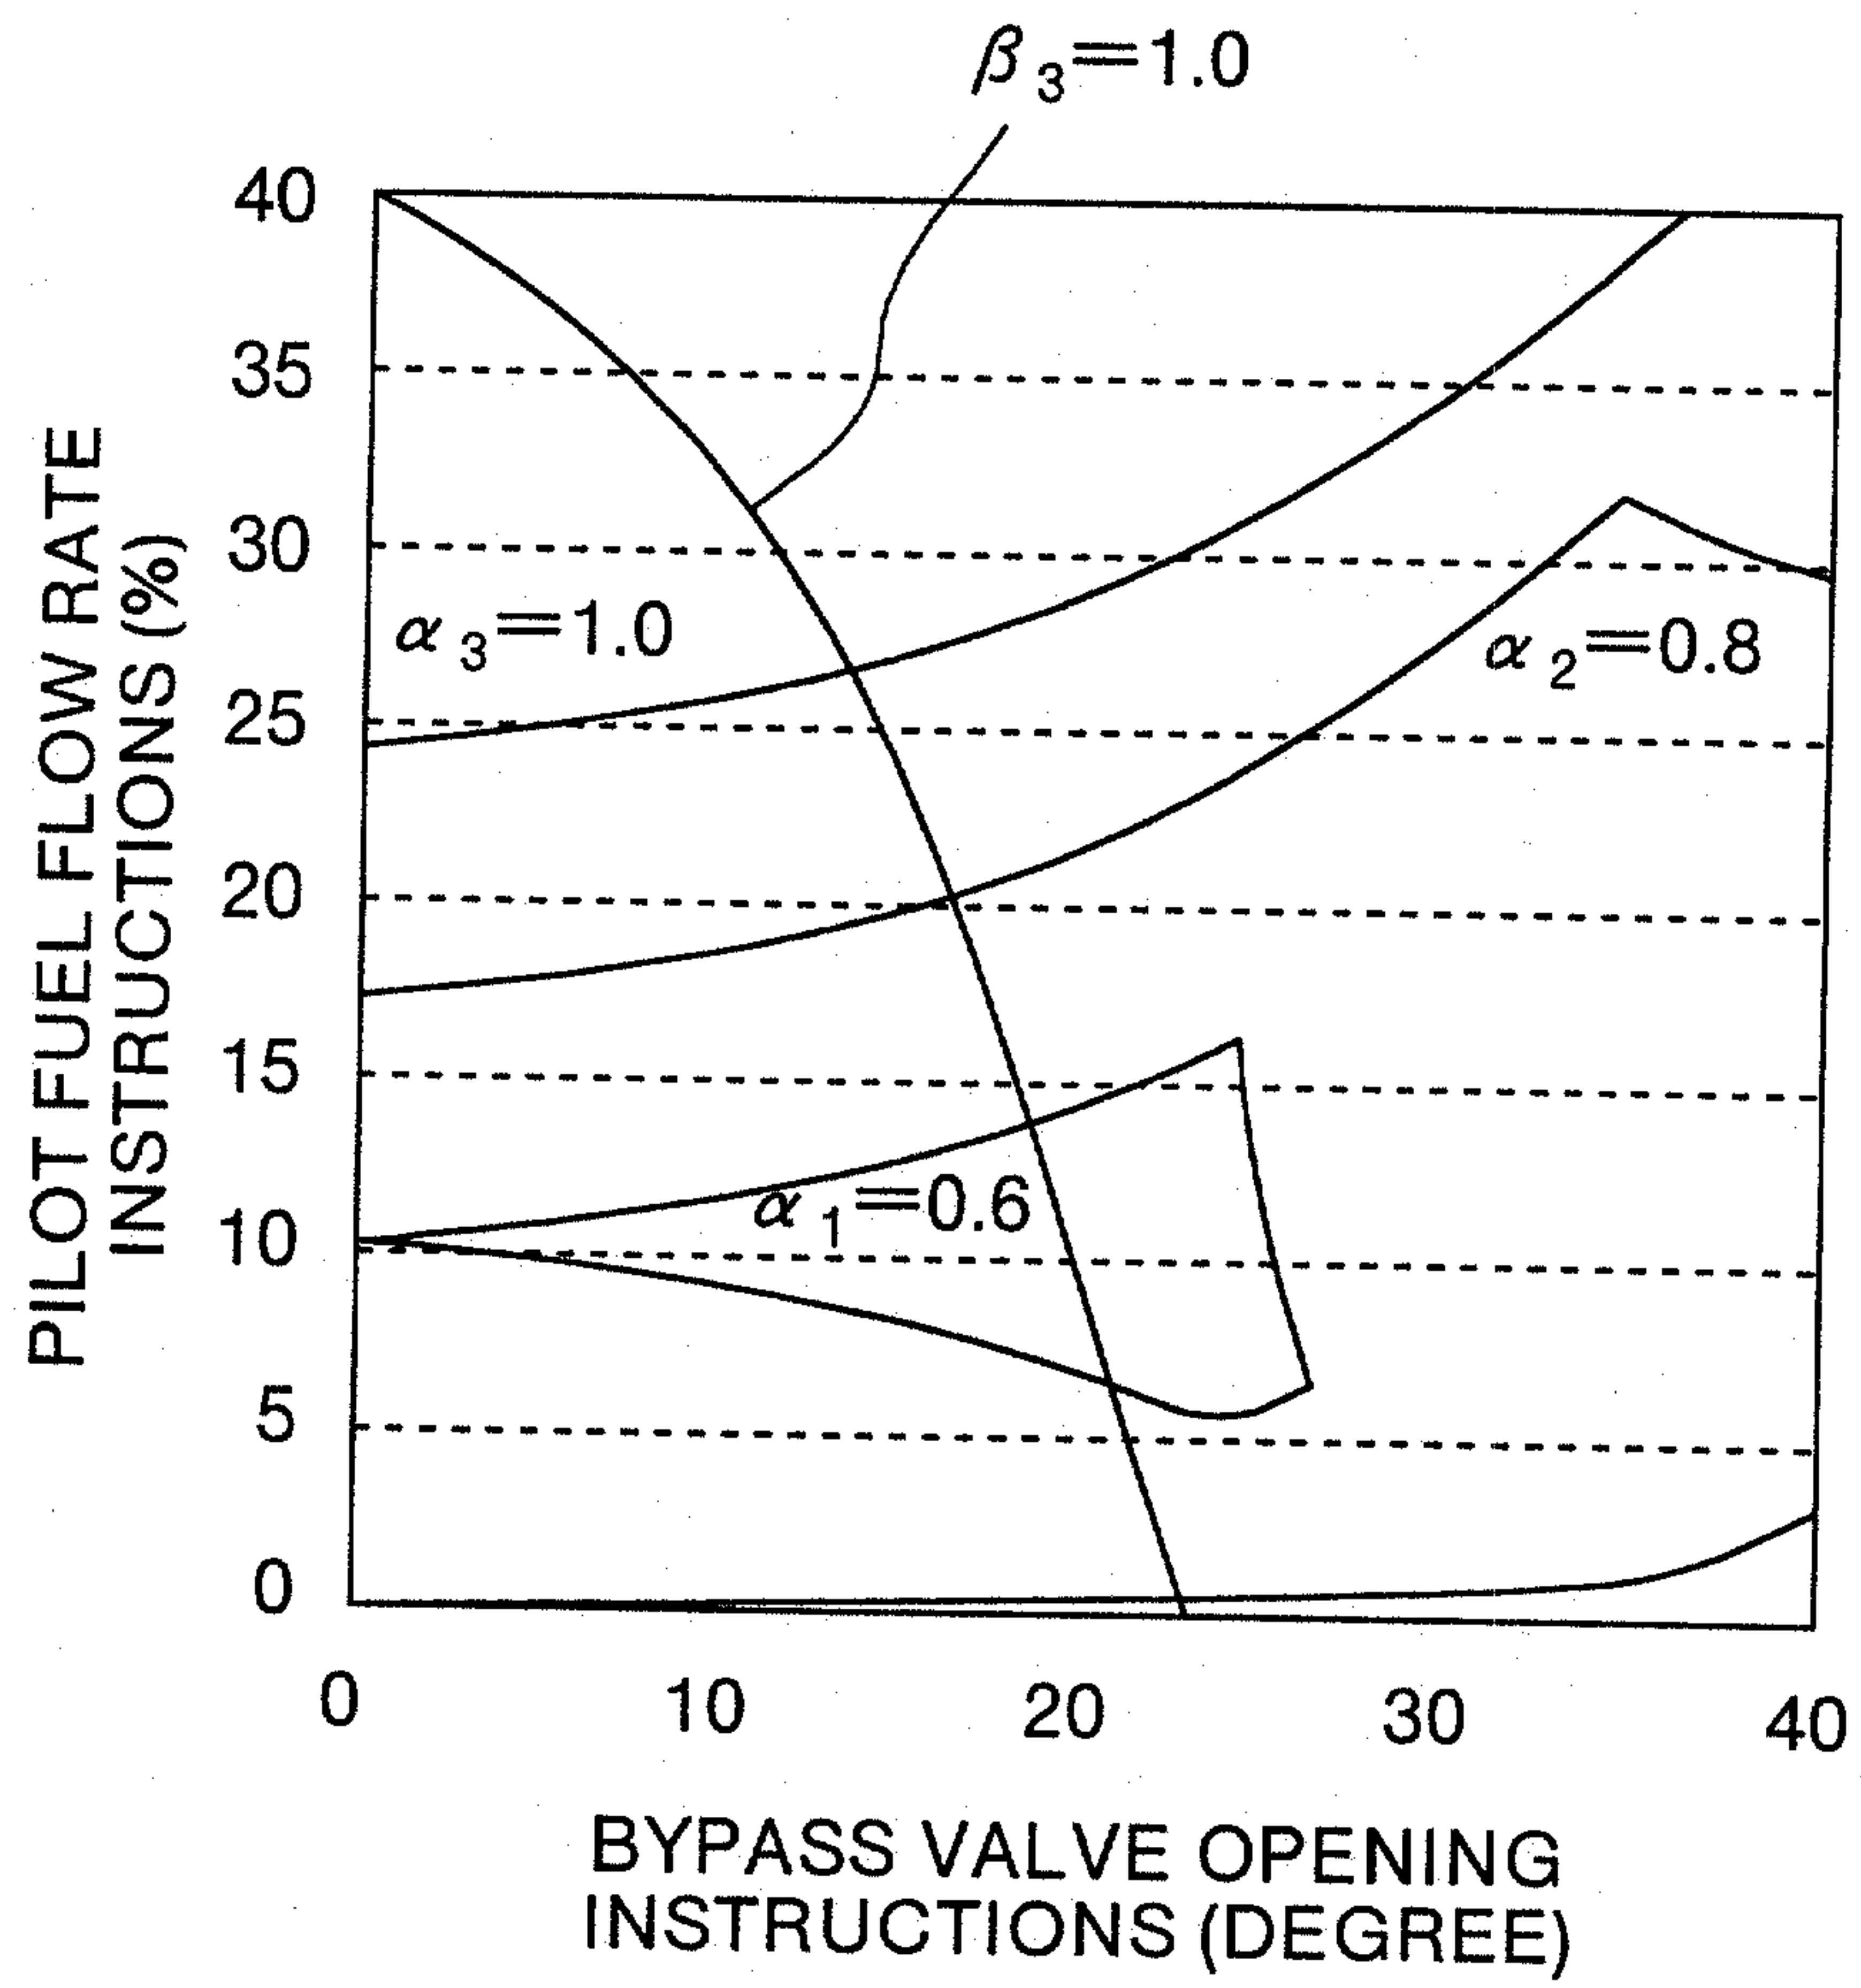

9/15



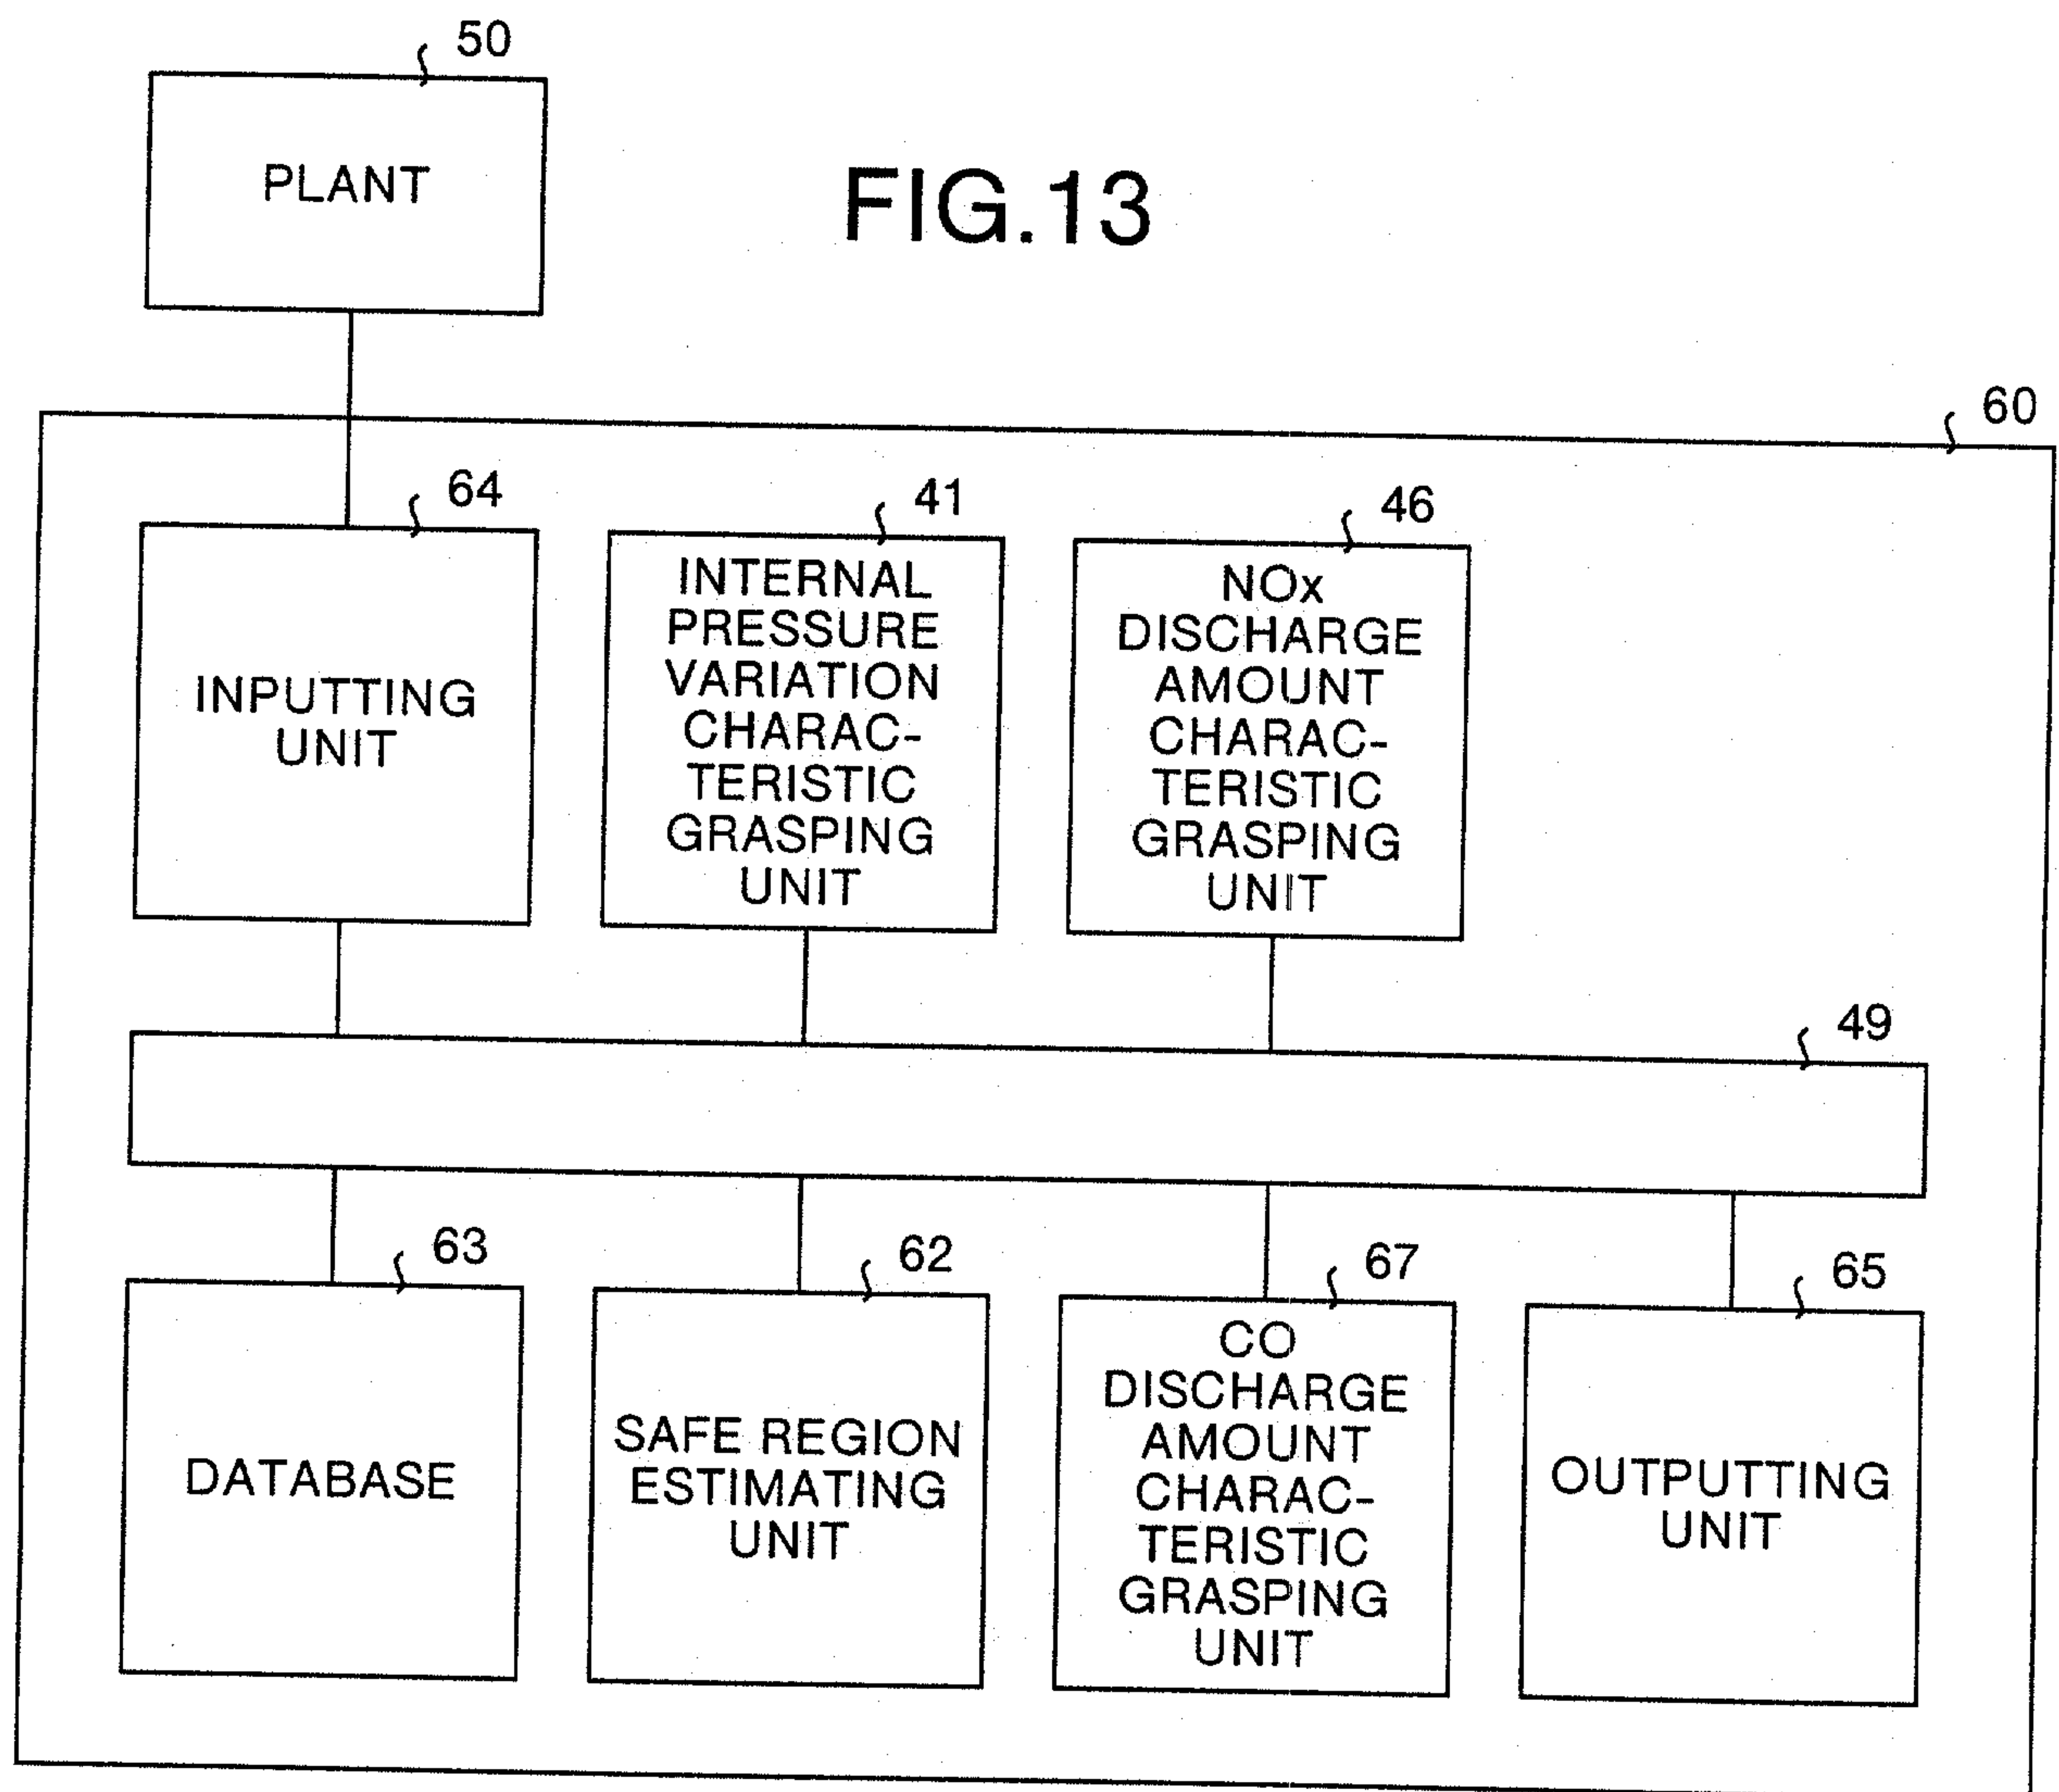


FIG.14

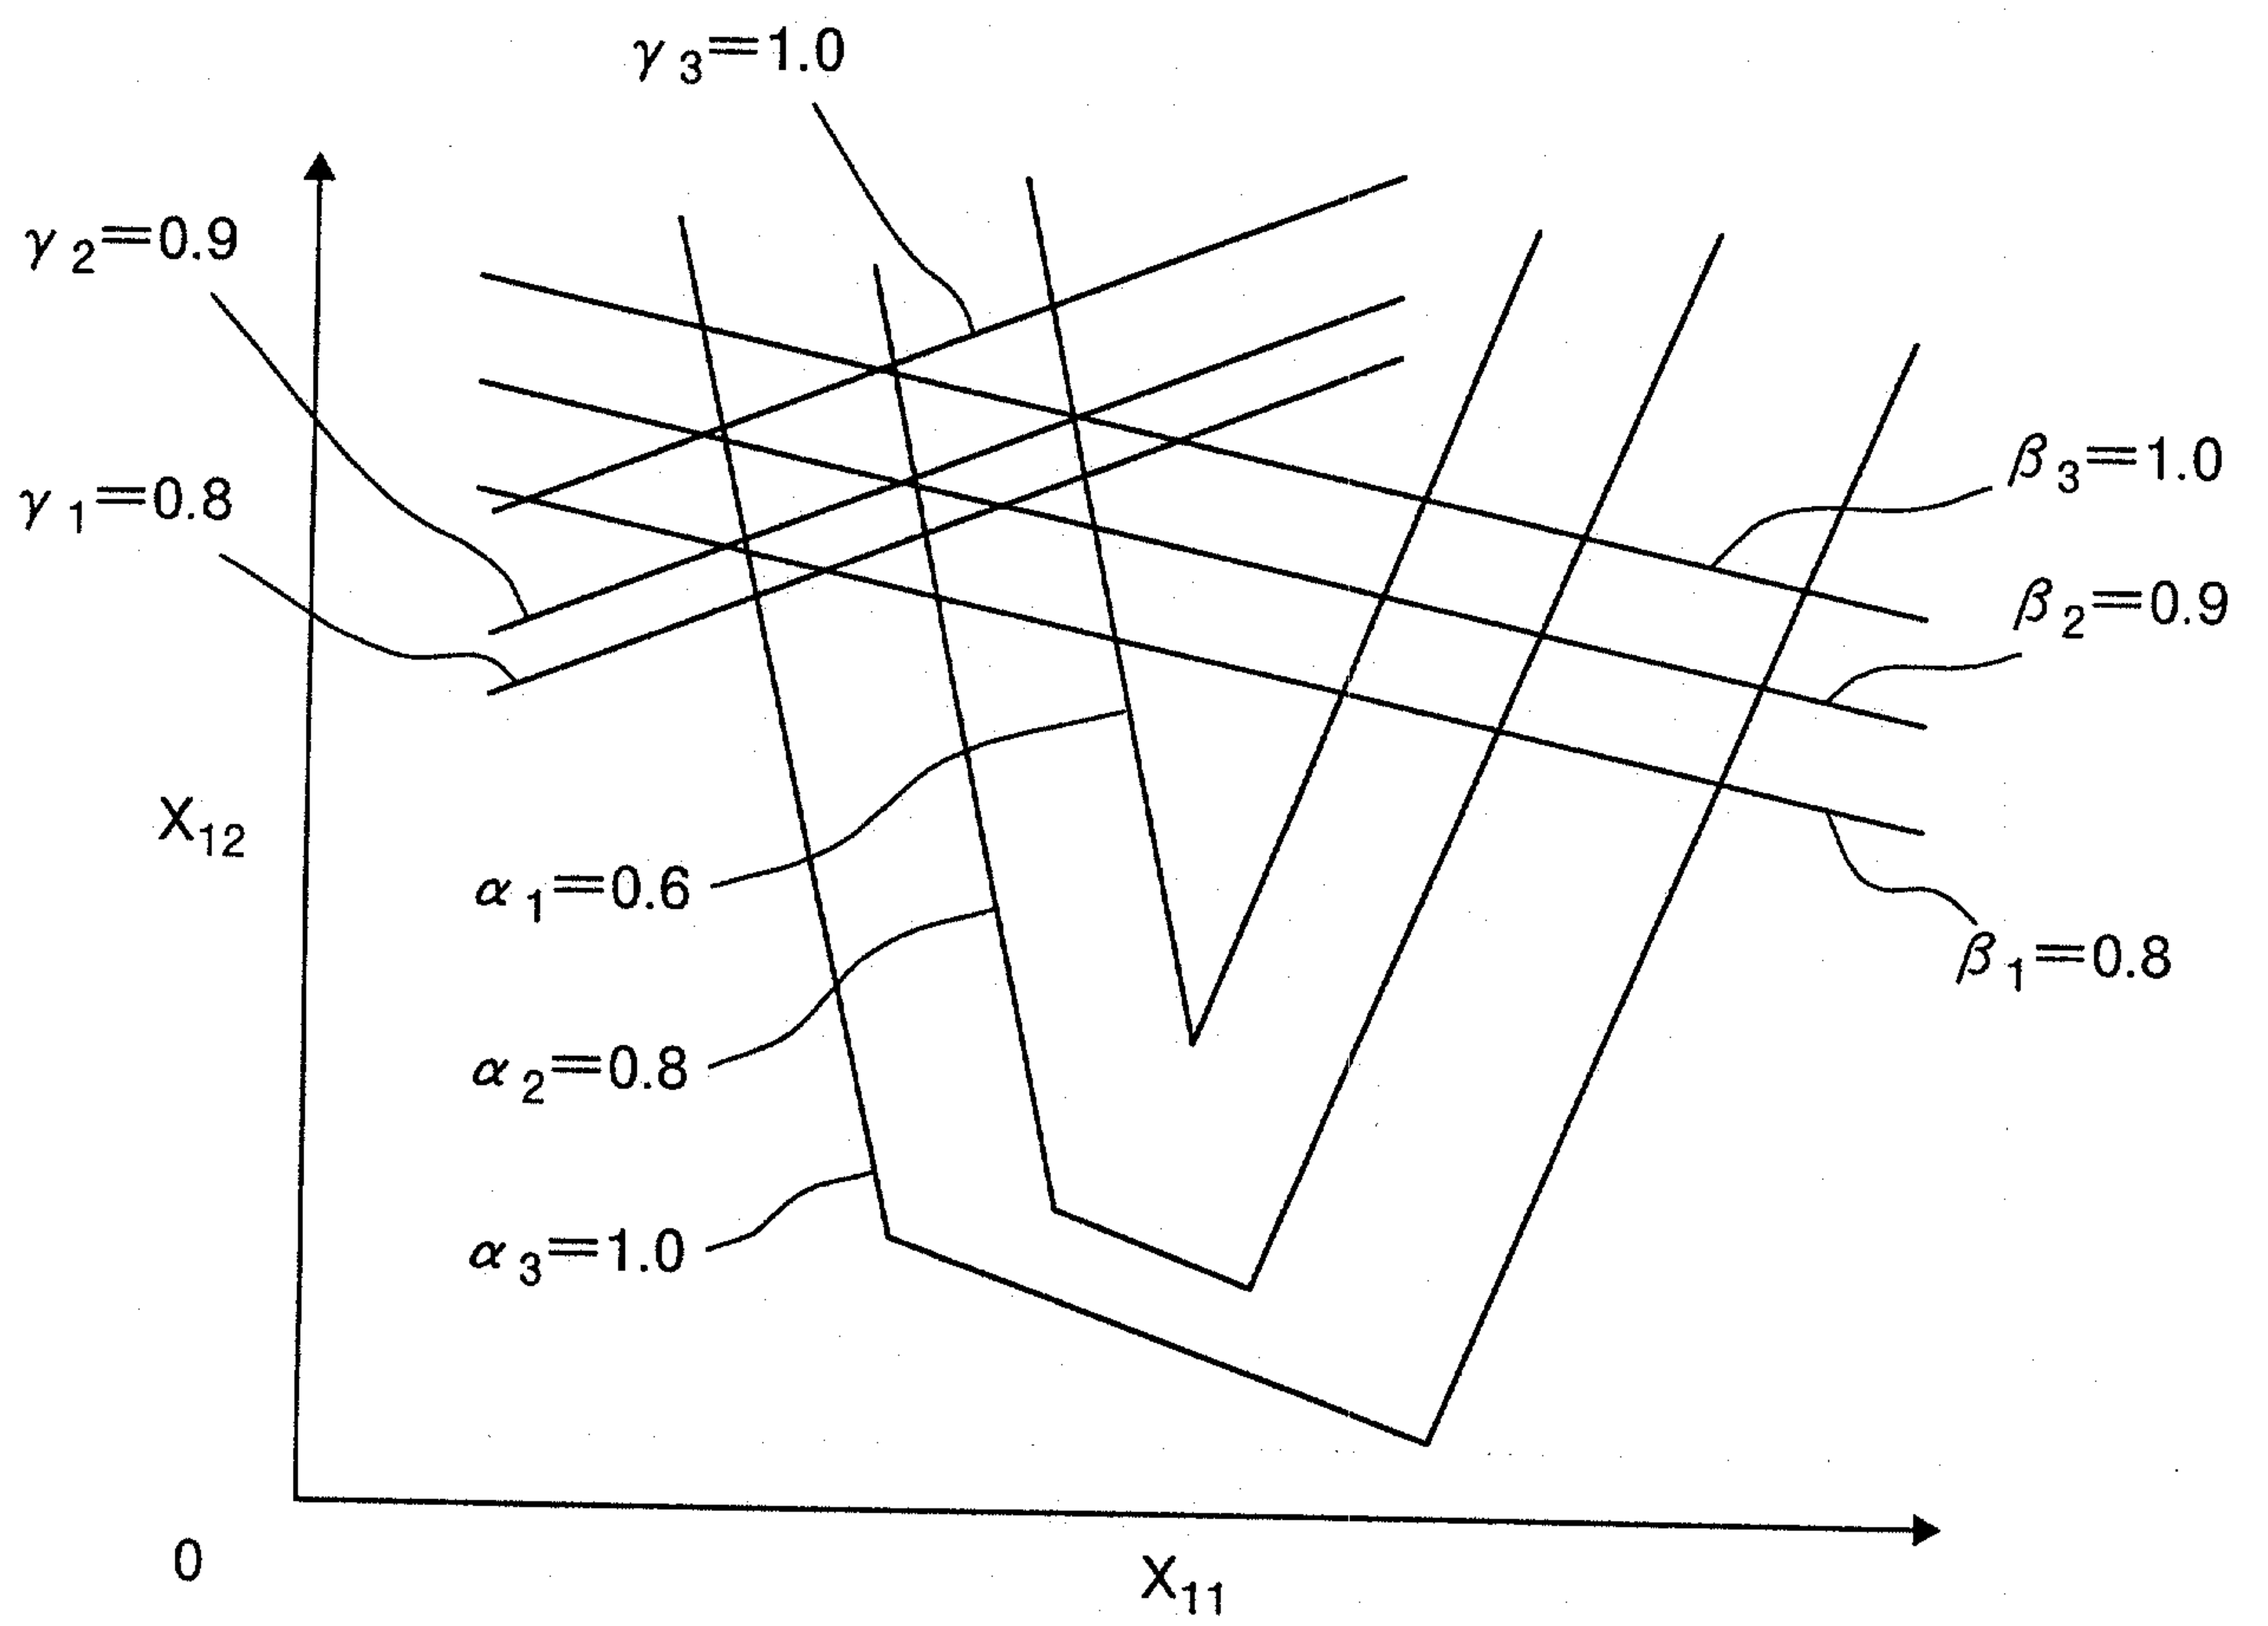

11/15

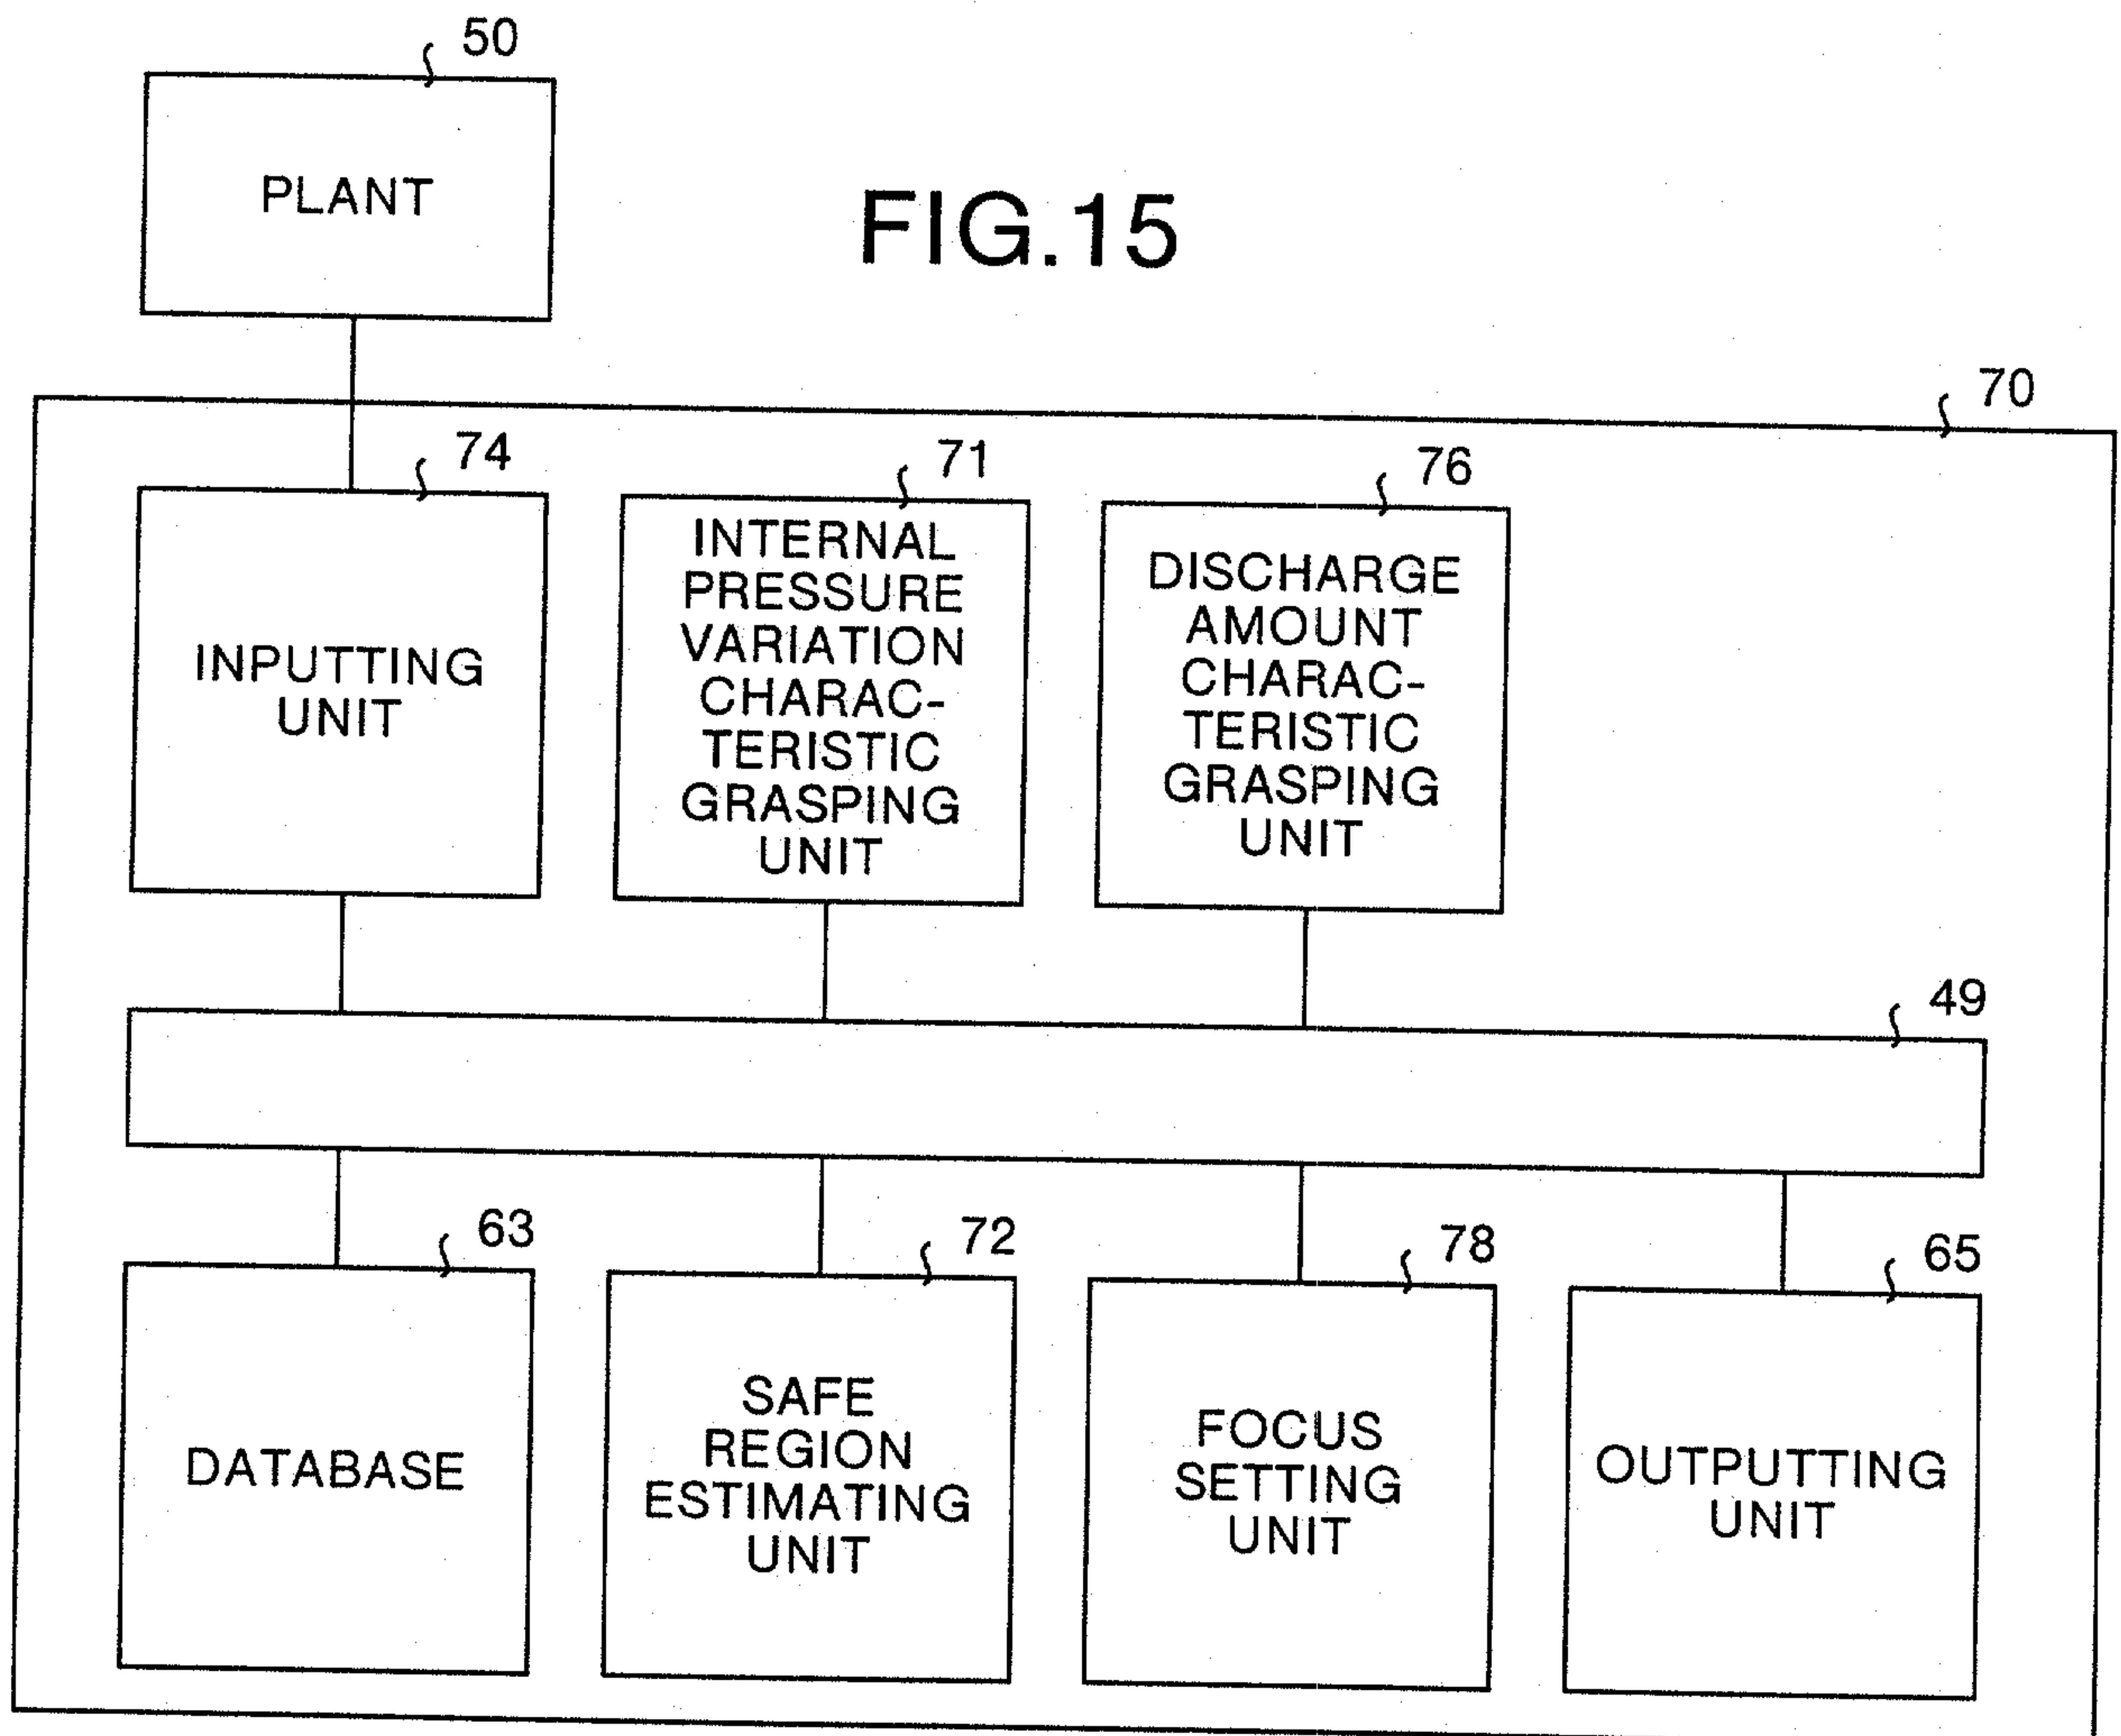

12/15

FIG.16

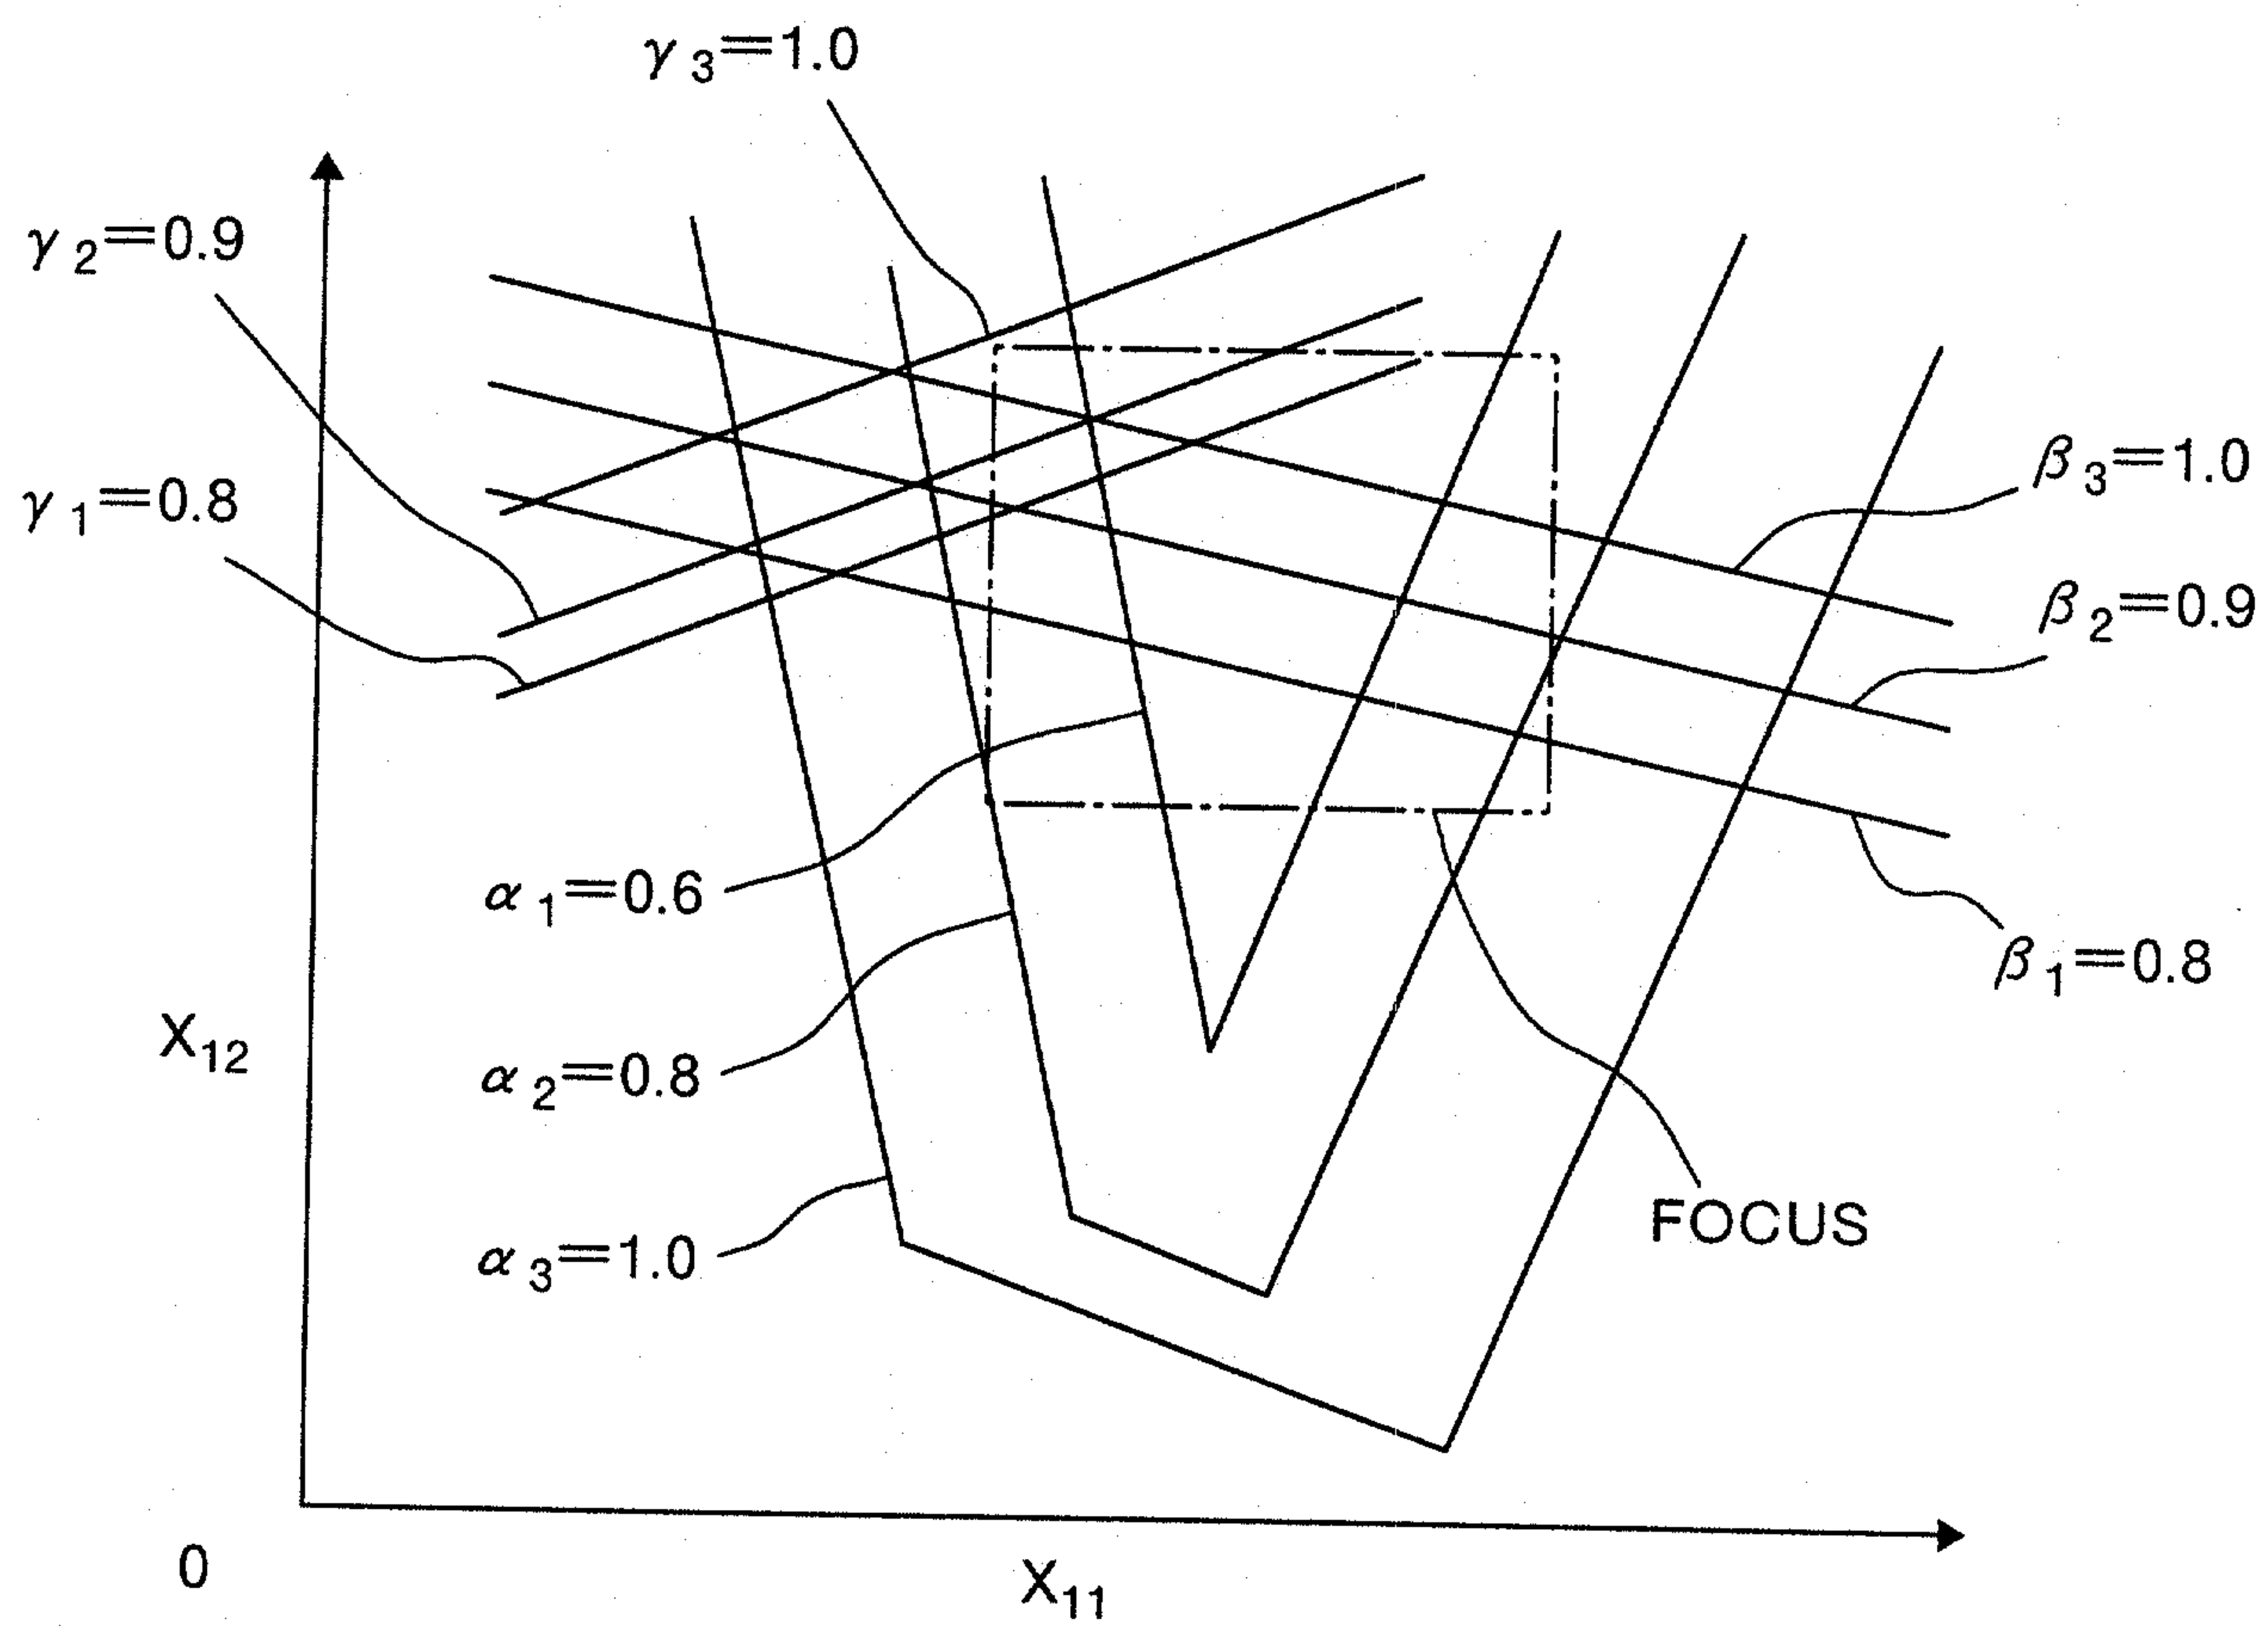


FIG.17

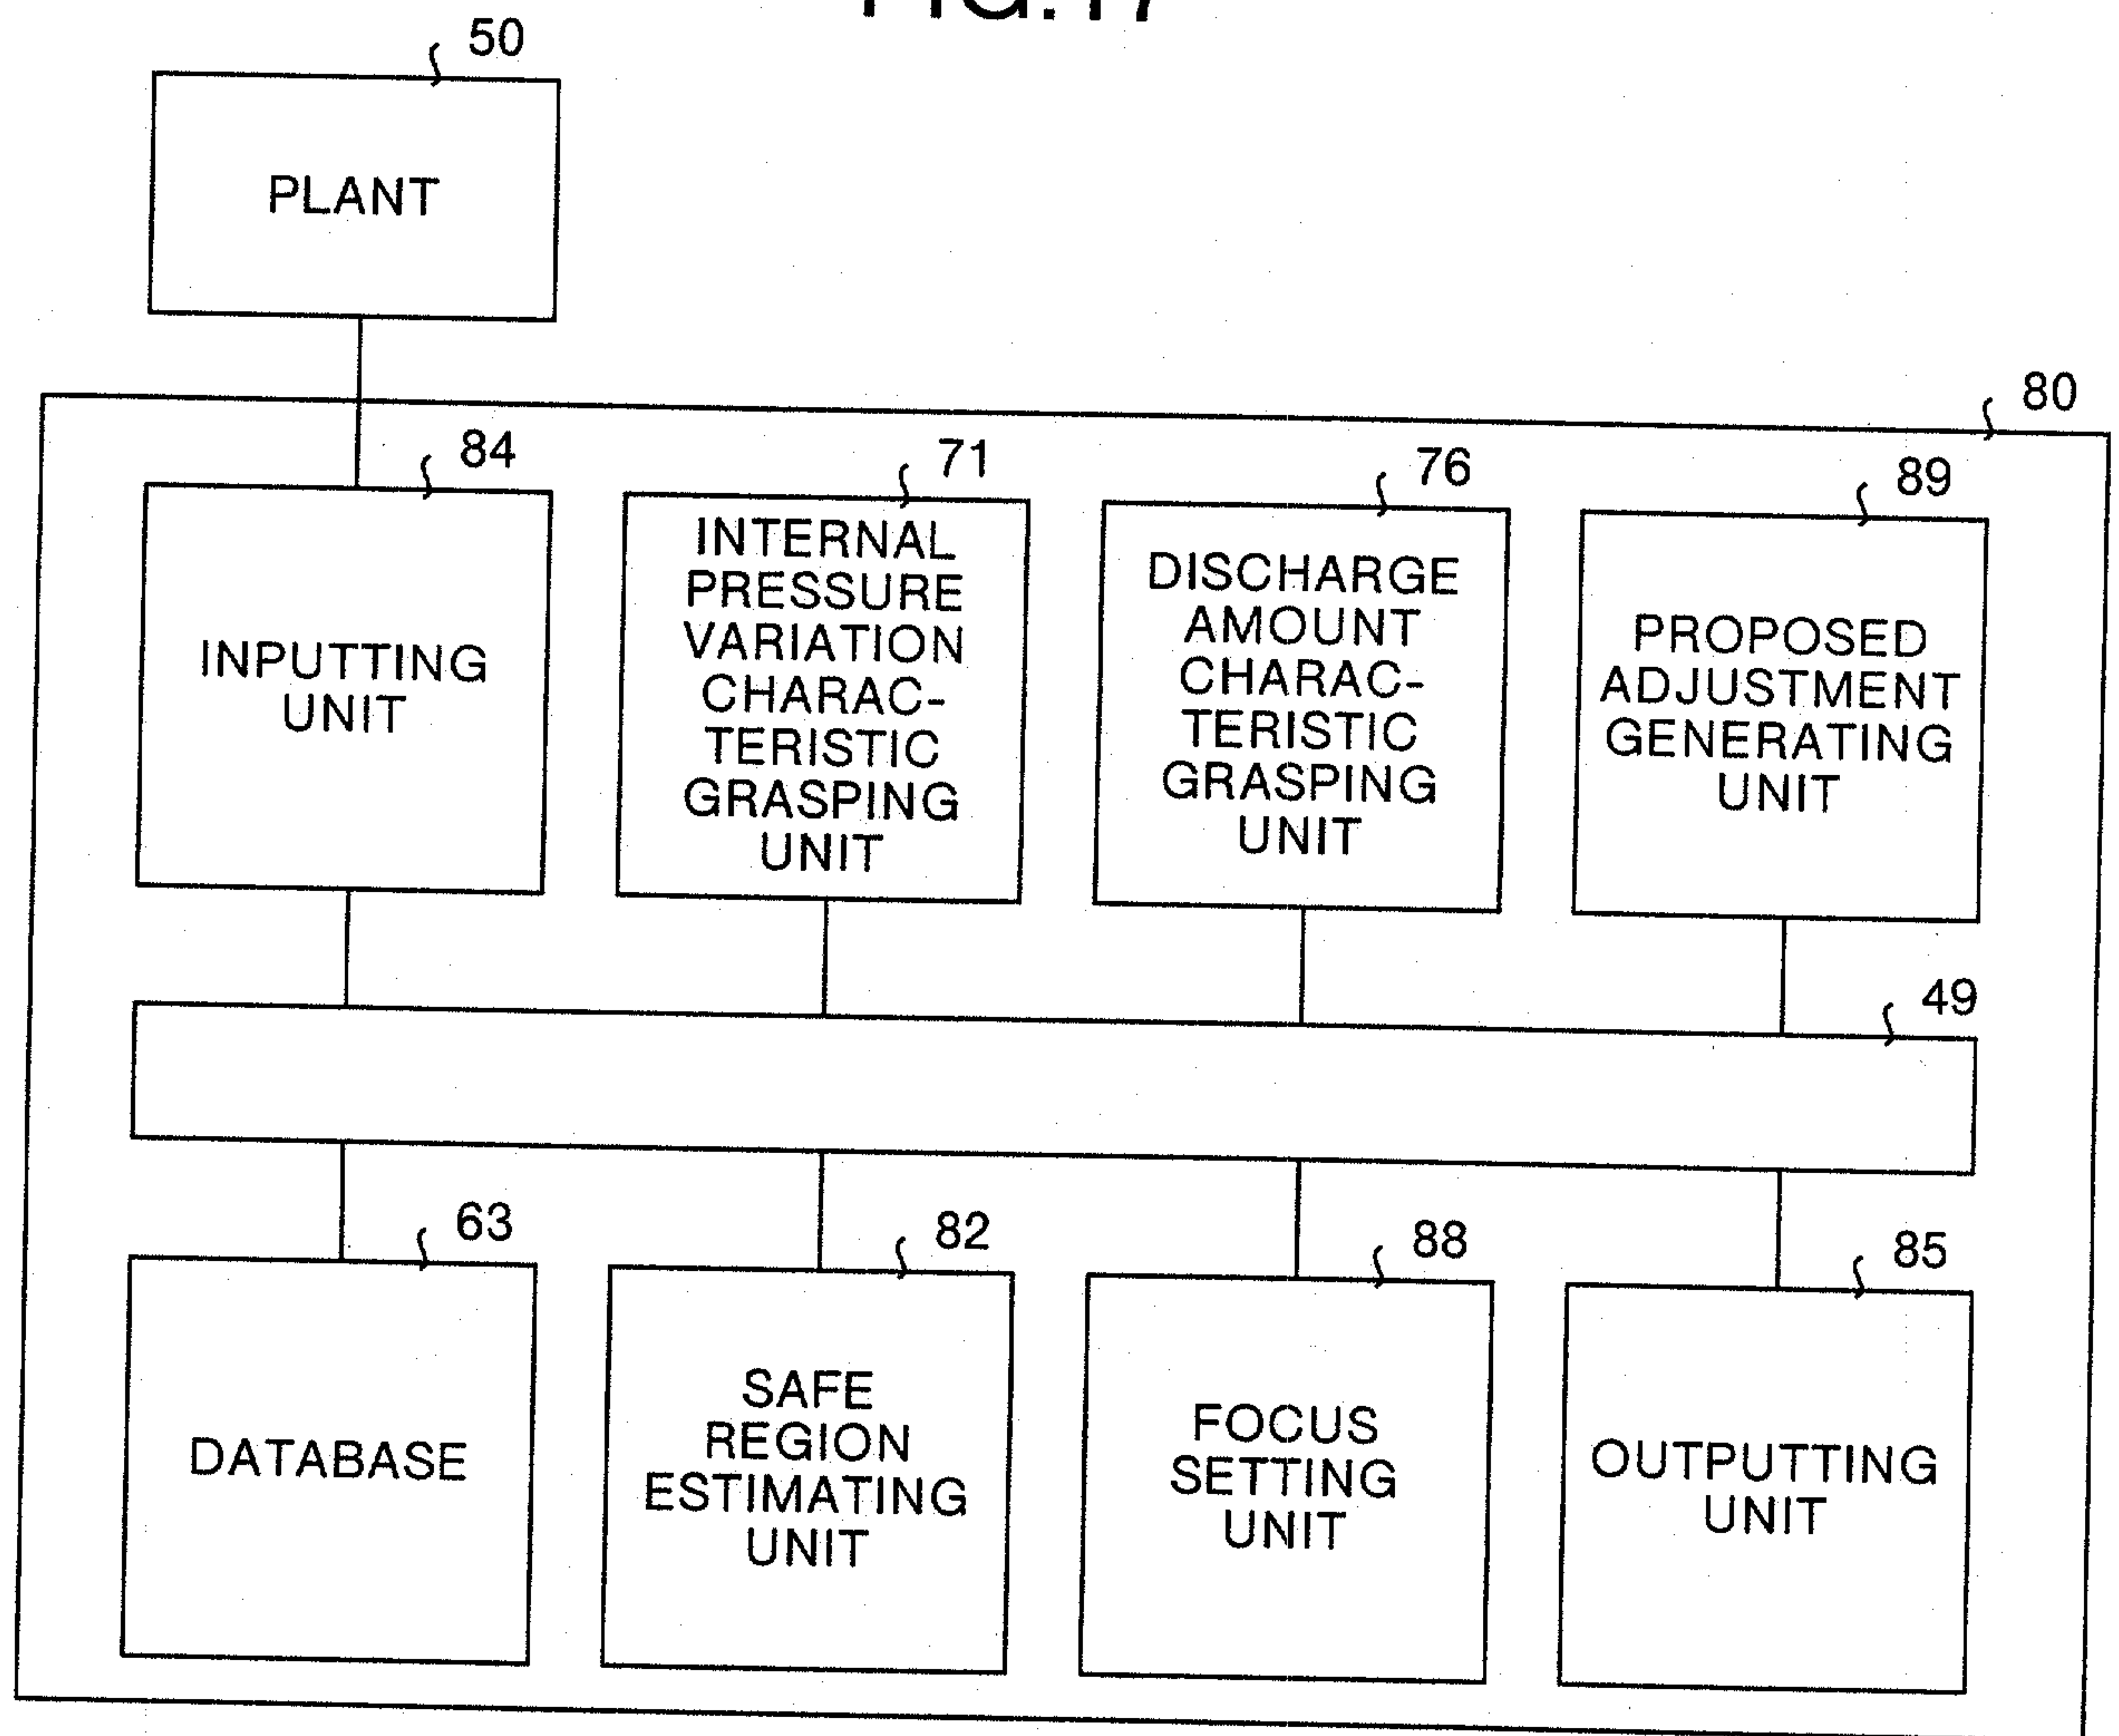


FIG.18

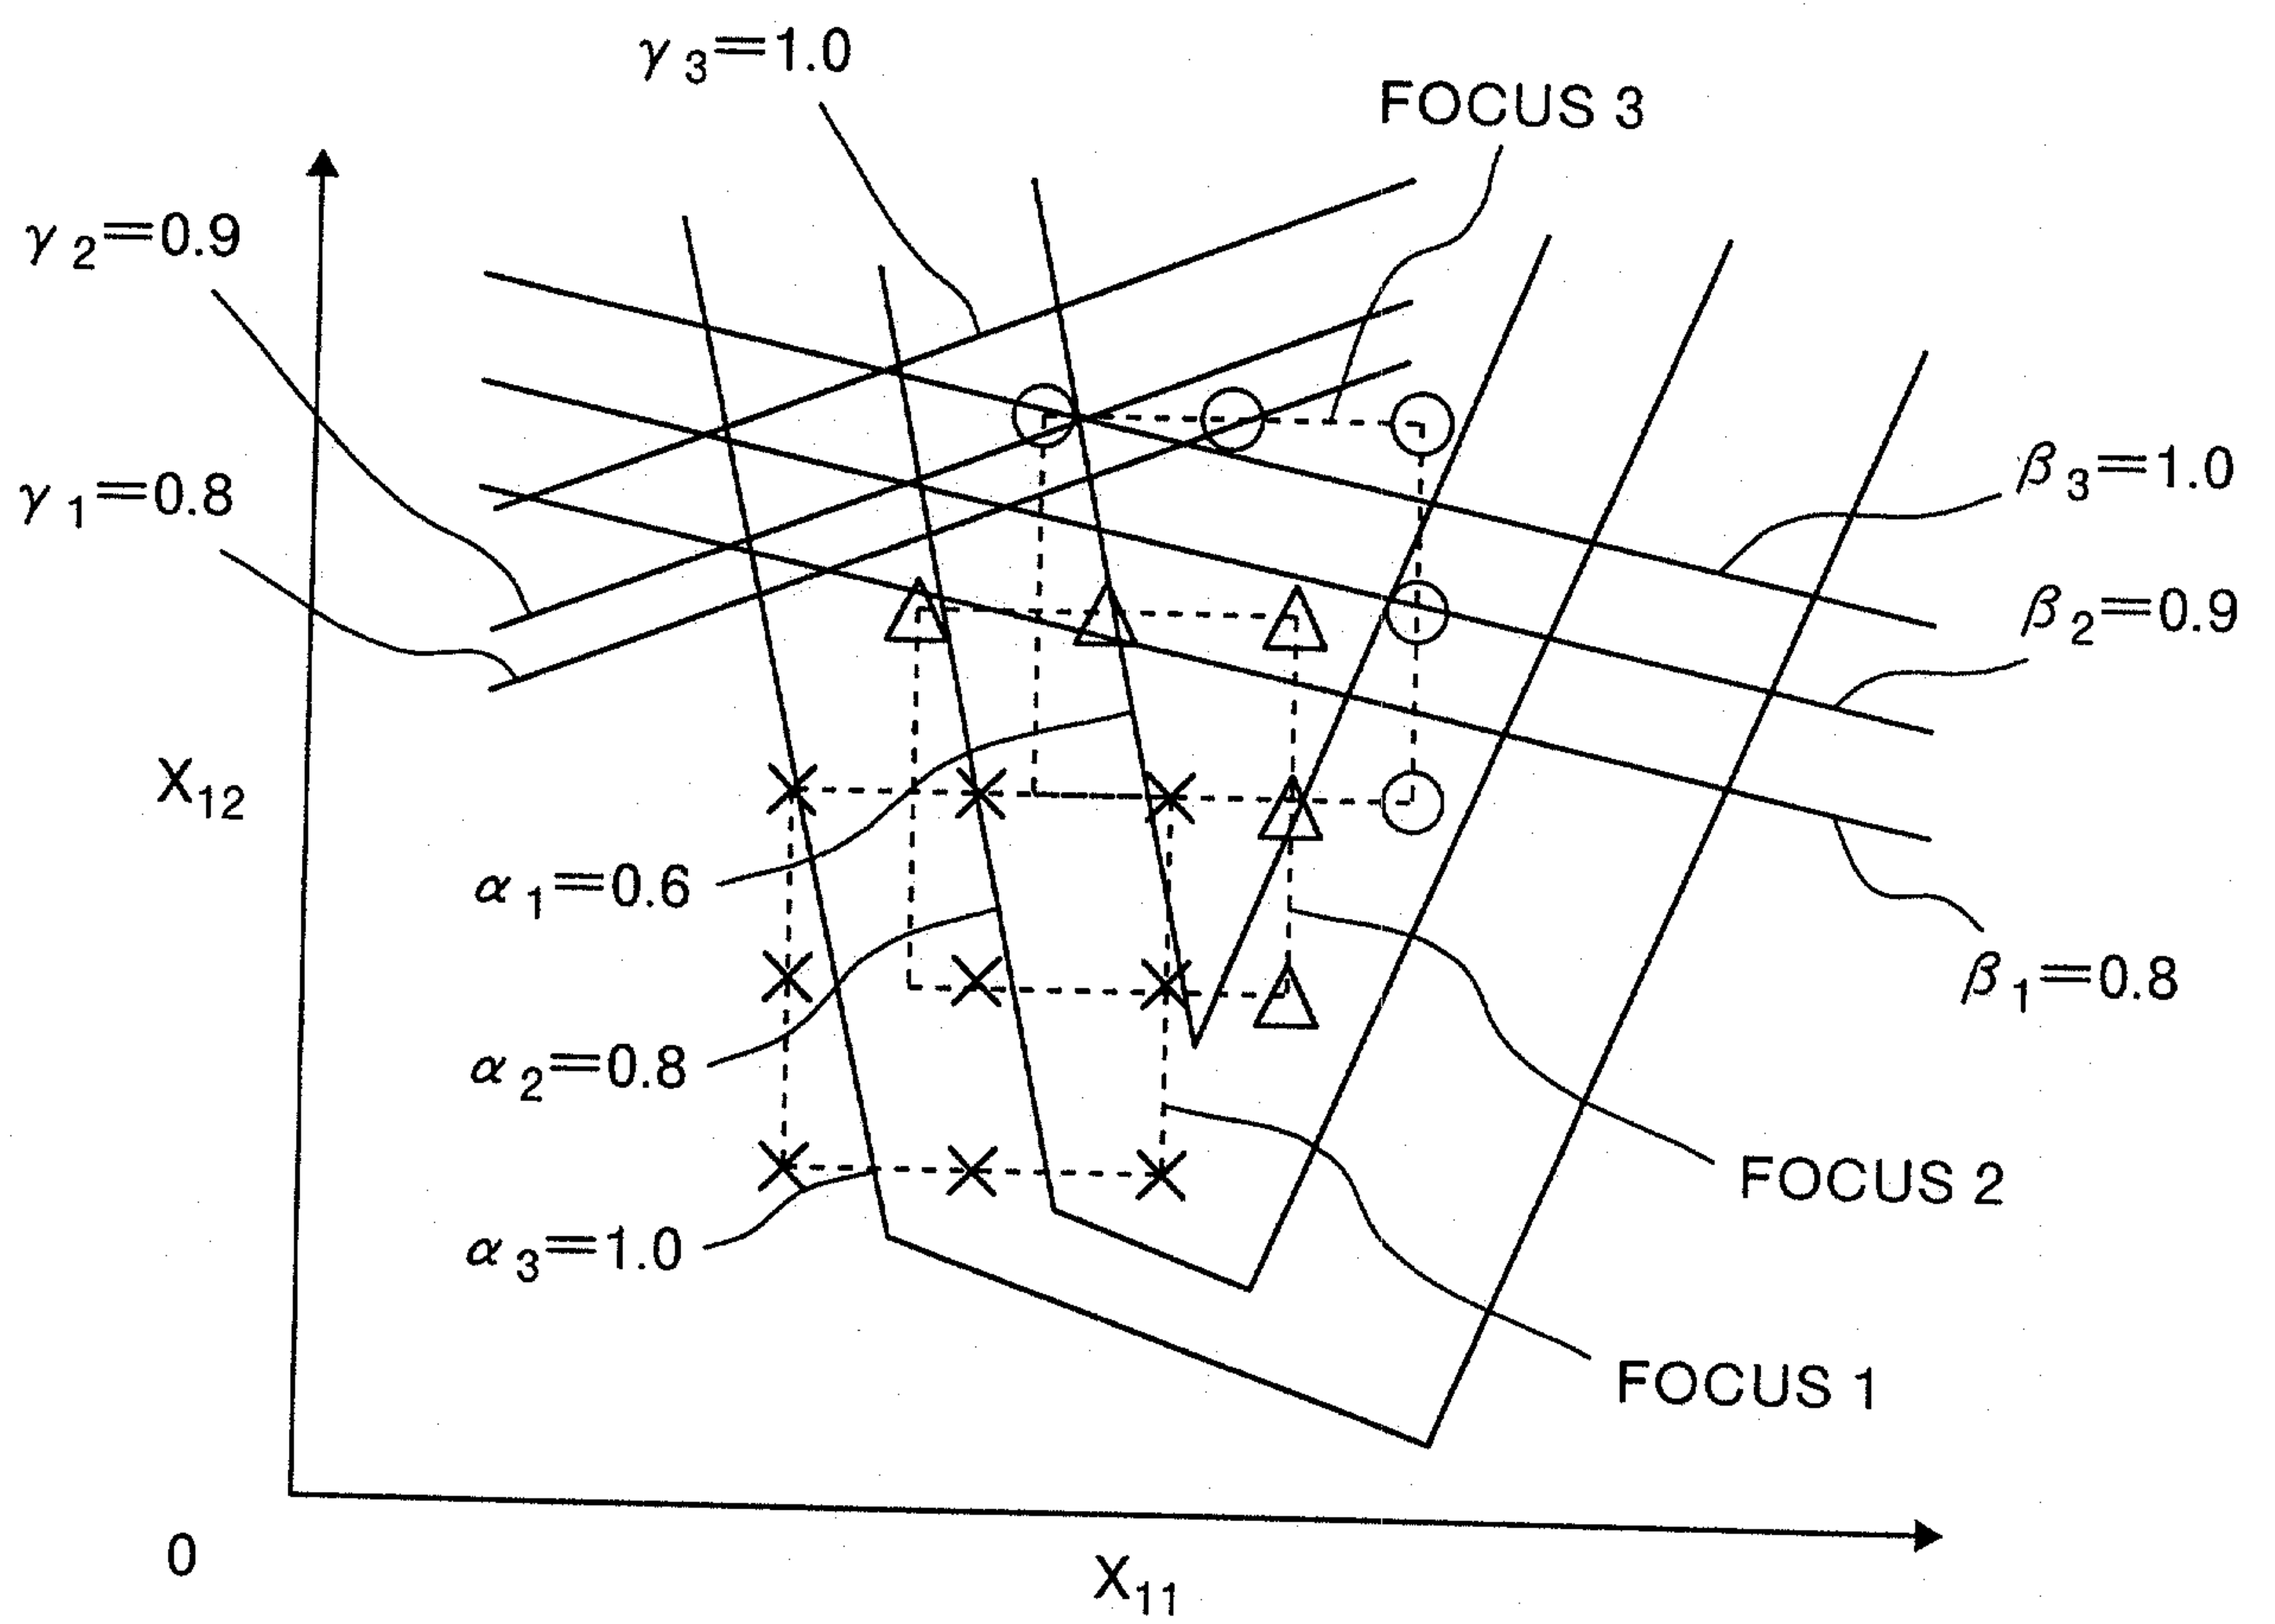


FIG.19

