



(22) Date de dépôt/Filing Date: 2003/12/30

(41) Mise à la disp. pub./Open to Public Insp.: 2004/06/30

(45) Date de délivrance/Issue Date: 2013/08/13

(62) Demande originale/Original Application: 2 454 503

(30) Priorité/Priority: 2002/12/31 (US10/335,199)

(51) Cl.Int./Int.Cl. *E05F 15/20* (2006.01),
E05F 15/10 (2006.01)


(72) Inventeurs/Inventors:
JURADO, CAROLS, US;
GREGORI, ERIC M., US;
STEPHAN, MATTHEW C., US

(73) Propriétaire/Owner:
THE CHAMBERLAIN GROUP, INC., US

(74) Agent: MACRAE & CO.

(54) Titre : METHODE ET DISPOSITIF D'AUTO-APPLICATION DE FORCE A UN ACTIONNEUR DE BARRIERE MOBILE

(54) Title: MOVABLE BARRIER OPERATOR AUTO-FORCE SETTING METHOD AND APPARATUS

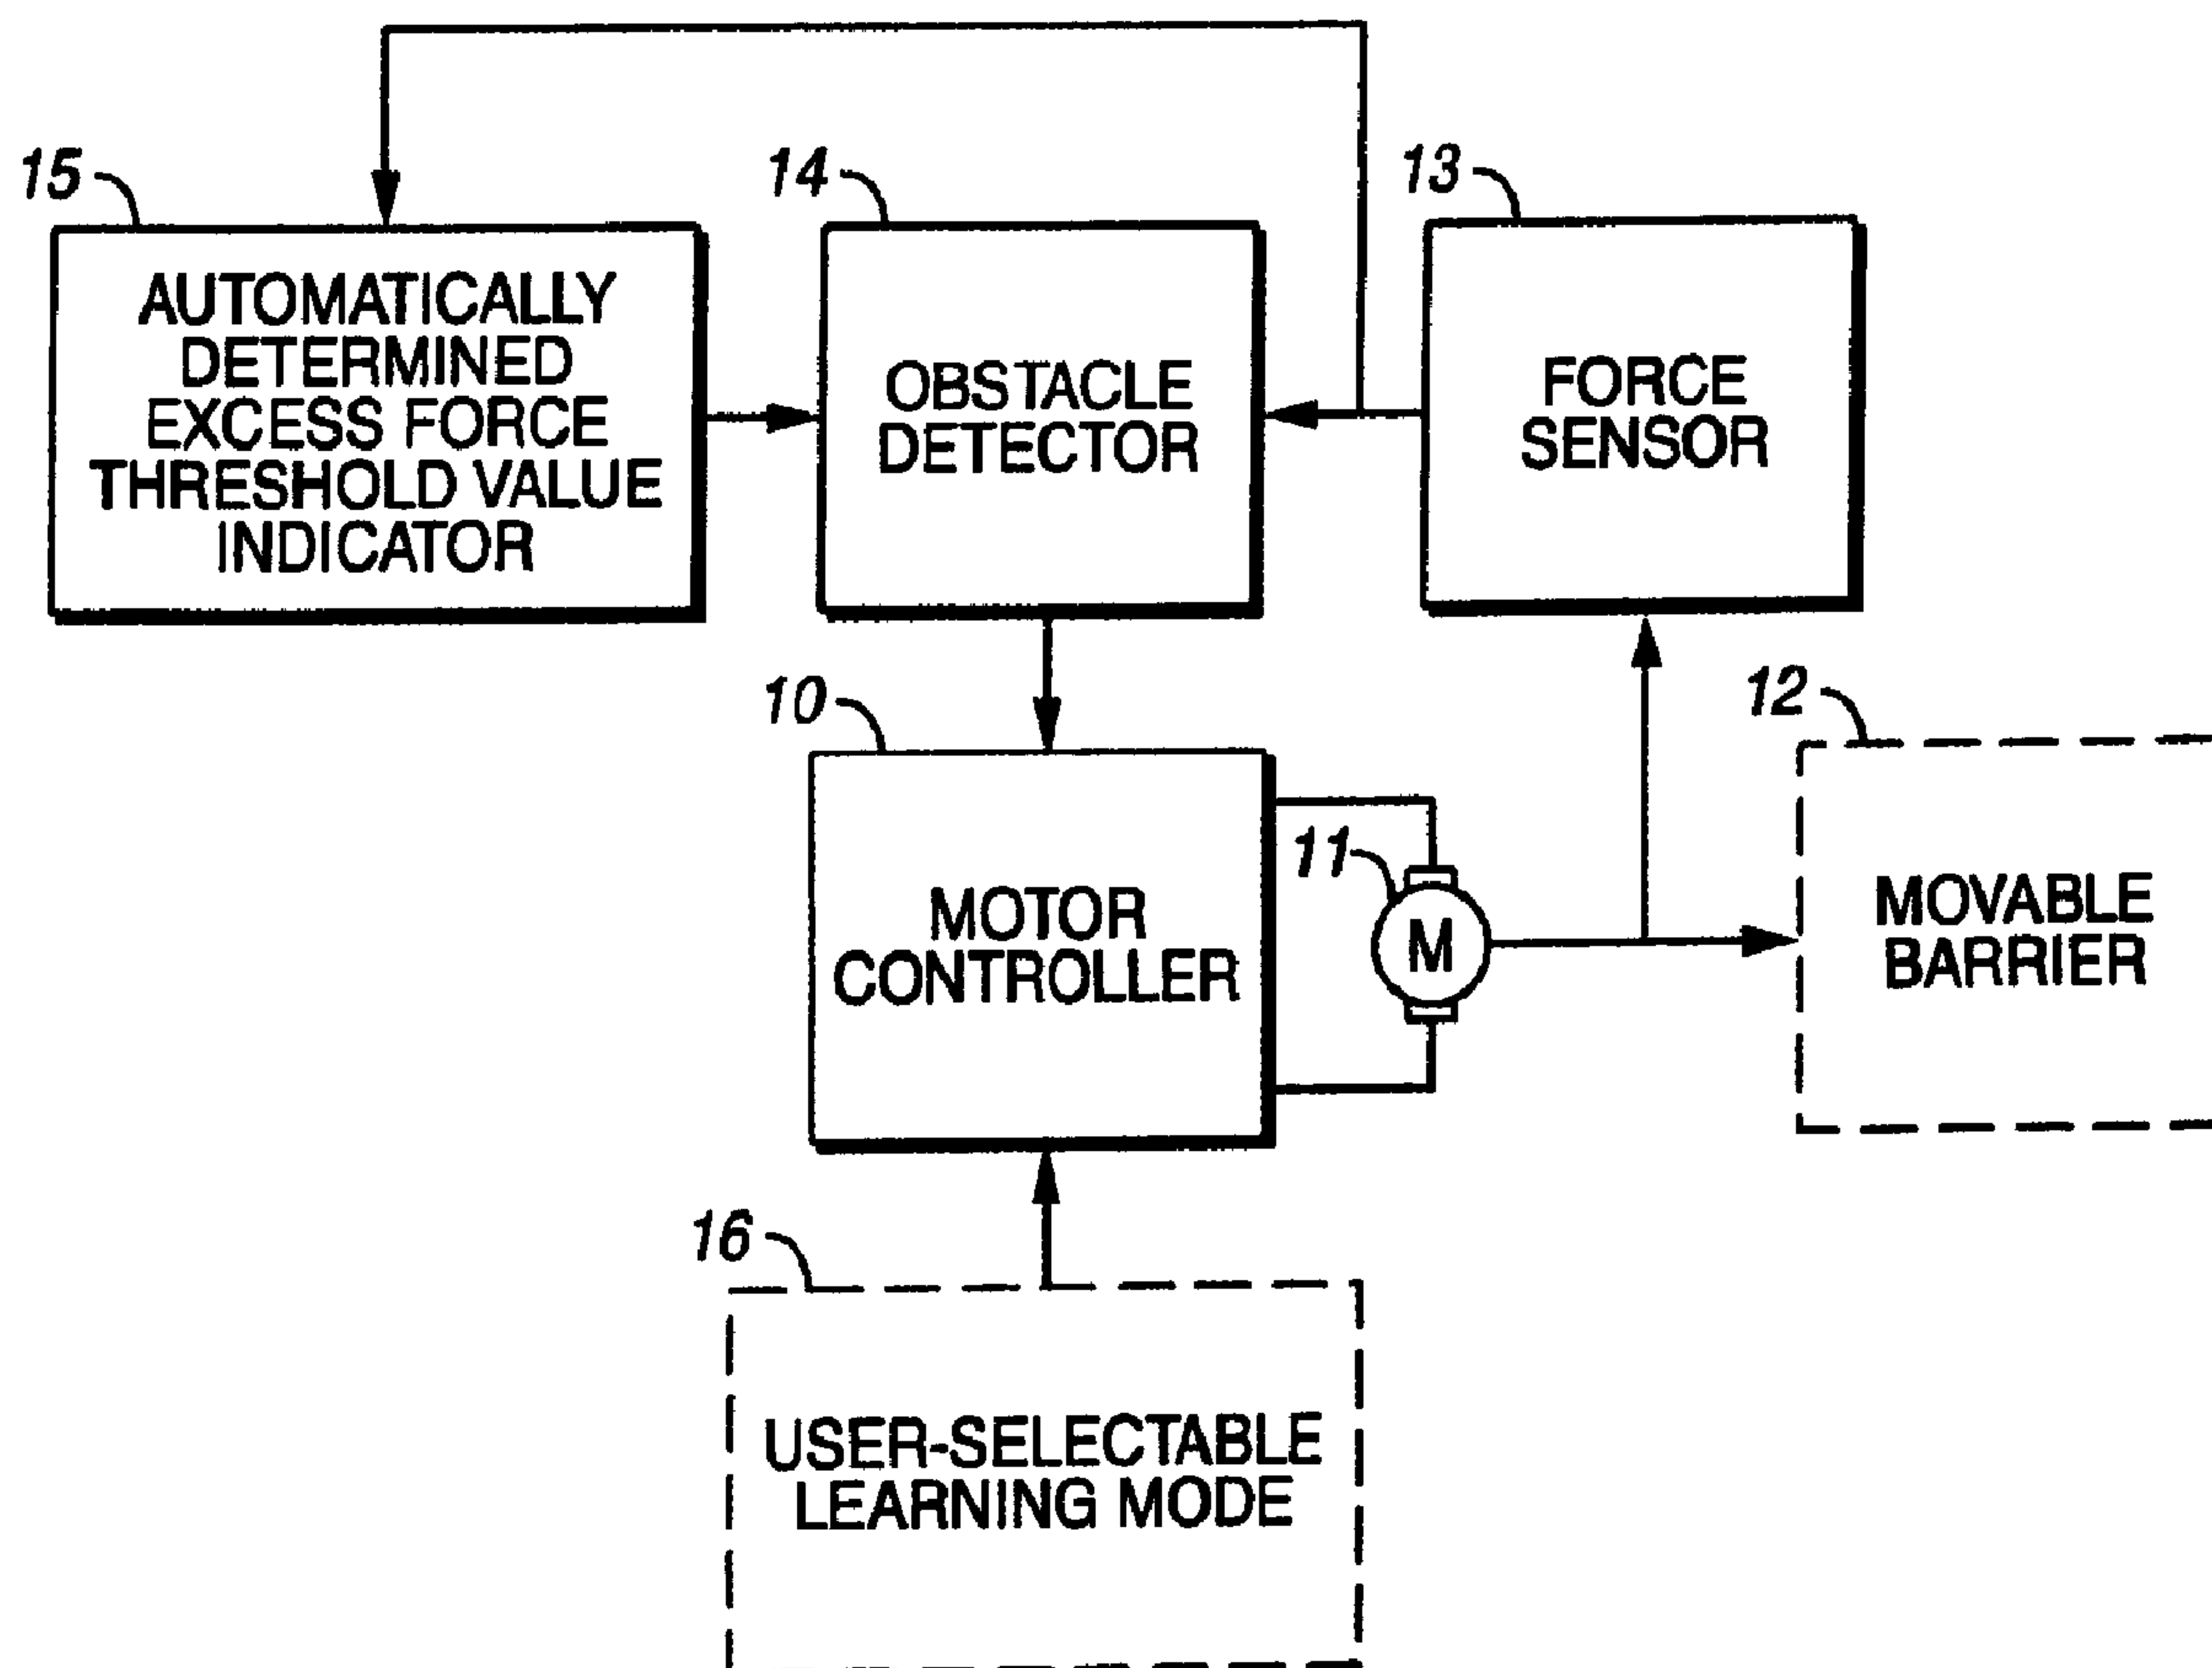

(57) Abrégé/Abstract:

A movable barrier operator having a motor controller (10) and motor (11) that control selective movement of a movable barrier (12) also has an obstacle detector (14) that utilizes an automatically determined excess force threshold value to permit reliable detection

(57) **Abrégé(suite)/Abstract(continued):**

of an obstacle under a wide variety of operational circumstances, including changing physical circumstances, aging components, temperature variations, and motor runtime. In a preferred embodiment, a characteristic force value for the system is frequently updated as a function of actual measured force requirements (and further compensated, pursuant to various embodiments, with respect to other conditions such as temperature and motor runtime). This characteristic force value is then utilized to determine the excess force threshold value.

Abstract of the Disclosure

A movable barrier operator having a motor controller (10) and motor (11) that
5 control selective movement of a movable barrier (12) also has an obstacle detector
(14) that utilizes an automatically determined excess force threshold value to permit
reliable detection of an obstacle under a wide variety of operational circumstances,
including changing physical circumstances, aging components, temperature
variations, and motor runtime. In a preferred embodiment, a characteristic force
10 value for the system is frequently updated as a function of actual measured force
requirements (and further compensated, pursuant to various embodiments, with
respect to other conditions such as temperature and motor runtime). This
characteristic force value is then utilized to determine the excess force threshold
value.

MOVABLE BARRIER OPERATOR AUTO-FORCE SETTING METHOD AND APPARATUS

This is a division of Canadian Patent Application No. 2,454,503, Filed December 30, 2003.

Technical Field

5 This invention relates generally to movable barrier operators and more particularly to auto-force setting.

Background

Many movable barrier operators monitor applied force (typically by
10 monitoring a parameter that varies as a function of force) as corresponds to movement of a movable barrier and use such information to determine when the movable barrier has encountered an obstacle (such as a person or item of personal property). Upon sensing such an obstacle, the operator will typically initiate a predetermined action such as reversing the movement of the barrier. In particular,
15 the operator usually compares present applied force against a threshold that represents excessive force to identify such an occurrence.

Unfortunately, a factory-set static excessive force threshold will typically not provide satisfactory results under all operating conditions and/or for all installations. The reasons are numerous and varied. The physical dimensions of a given
20 installation can vary dramatically (both with respect to barrier travel distance and barrier weight as well as other manifest conditions) and these physical conditions can and will in turn impact the amount of force required to move the barrier. The physical interface between the barrier and its corresponding track or pathway can also vary, sometimes considerably, over the length of barrier travel. Such variations

can each, in turn, be attended by significantly varying force requirements.

Temperature, too, can have a significant impact on necessary force, as temperature (and especially colder temperatures) can alter the physical relationships noted above and can also significantly impact upon at least the initial operating characteristics of
5 a motor as is used to move the barrier. Force needs, measurements, and/or behaviors can also vary with respect to time, as the physical conditions themselves change, as the motor ages, and even with respect to how long a motor has been recently operating.

To attempt to accommodate such circumstances, many movable barrier
10 operators have a user-adjustment interface (usually one or two potentiometer-style knobs) that a user or installer can manipulate to adjust allowed applied force during one or more directions of barrier travel. Unfortunately, even when used correctly, force settings established in this way can become outdated. Another solution has been to provide a learning mode during which a movable barrier operator can
15 monitor force conditions during movement of the barrier and use such information to automatically establish an excess-force threshold to be used during subsequent normal operations. Unfortunately, again, force setting values established in this way can become outdated (and sometimes within a short period of time).

According to one aspect of the present invention there is provided a movable
20 barrier operator for use with a movable barrier, which movable barrier is selectively moved through selective application of force by a motor via the movable barrier operator, wherein the motor has a corresponding range of output forces, the movable barrier operator comprising at least one force sensor; a maximum force-setting limit that is within the corresponding range of output forces; an excess force threshold

determination unit that is responsive to the maximum force-setting limit and having a maximum force-setting limited excess force threshold value output, wherein the excess force threshold determination unit comprises an automatic excess force threshold determination unit that is responsive to the maximum force-setting limit and having an automatically determined maximum force-setting limited excess force threshold value output; a movable barrier obstacle detector that is at least partially responsive to the at least one force sensor and to the maximum force-setting limited excess force threshold value output; and a motor controller operably coupled and responsive to the movable barrier obstacle detector.

10 According to a further aspect of the present invention there is provided a method for use with a movable barrier operator that controls a motor having a corresponding range of force values, comprising providing a maximum force-setting limit that is within the corresponding range of output forces of the motor; monitoring at least one parameter that corresponds to force as applied by the motor to selectively
15 cause a movable barrier to move; limiting an excess force threshold value such that an updated excess force threshold does not exceed the maximum force-setting limit; using the updated excess force threshold value and the at least one parameter to determine when excess force is being applied to the movable barrier via the movable barrier operator; taking a predetermined action when excess force is seemingly being
20 applied to the movable barrier via the movable barrier operator; providing a fault-detected force indicia threshold, when fault-detected force indicia threshold exceeds the maximum force-setting limit.

According to another aspect of the present invention there is provided a method for use with a movable barrier operator that controls a motor having a

corresponding range of force values, comprising providing a maximum force-setting limit that is within the corresponding range of output forces of the motor; monitoring at least one parameter that corresponds to force as applied by the motor to selectively cause a movable barrier to move; limiting an excess force threshold value such that an
5 updated excess force threshold does not exceed the maximum force-setting limit; using the updated excess force threshold value and the at least one parameter to determine when excess force is seemingly being applied to the movable barrier via the movable barrier operator; taking a predetermined action when excess force is seemingly being applied to the movable barrier via the movable barrier operator;
10 providing a fault-detected force indicia threshold, which fault-detected force indicia threshold is less than a minimum force needed to cause selective movement of the movable barrier.

According to a still further aspect of the present invention there is provided a method for use with a movable barrier operator, comprising monitoring at least one
15 parameter that corresponds to force as applied to a movable barrier by a motor to selectively cause the movable barrier to move; automatically changing an excess force threshold value in response to the monitored at least one parameter to provide an updated excess force threshold value; using the updated excess force threshold value and the monitored at least one parameter to determine when excess force is seemingly
20 being applied to the movable barrier via the movable barrier operator; taking a predetermined action when excess force is seemingly being applied to the movable barrier via the movable barrier operator; determining that a fault condition exists when the at least one parameter that corresponds to force fails to attain a peak value

that exceeds a first threshold during a predetermined time period.

Brief Description of the Drawings

5 The above needs are at least partially met through provision of the movable
barrier operator auto-force setting method and apparatus described in the following
detailed description, particularly when studied in conjunction with the drawings,
wherein:

10

FIG. 1 comprises a block diagram as configured in accordance with an embodiment of the invention;

FIG. 2 comprises a flow diagram as configured in accordance with an embodiment of the invention;

5 FIG. 3 comprises a graph depicting illustrative force behavior;

FIG. 4 comprises a flow diagram illustrating detail in accordance with an embodiment of the invention;

FIG. 5 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

10 FIG. 6 comprises a flow diagram illustrating detail in accordance with an embodiment of the invention;

FIG. 7 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

15 FIG. 8 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

FIG. 9 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

FIG. 10 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

20 FIG. 11 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

FIG. 12 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

FIG. 13 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

FIG. 14 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

5 FIG. 15 comprises a flow diagram illustrating detail in accordance with an embodiment of the invention;

FIG. 16 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

10 FIG. 17 comprises a block diagram as configured in accordance with an embodiment of the invention;

FIG. 18 comprises a graph illustrating certain particulars in accord with an embodiment of the invention;

FIG. 19 comprises a flow diagram illustrating detail in accordance with an embodiment of the invention;

15 FIG. 20 comprises a graph illustrating certain particulars as accord with an embodiment of the invention;

FIG. 21 comprises a graph illustrating certain representative phenomena;

FIG. 22 comprises a flow diagram illustrating detail in accord with an embodiment of the invention;

20 FIG. 23 comprises a block diagram as configured in accordance with an embodiment of the invention;

FIG. 24 comprises a flow diagram illustrating detail in accord with an embodiment of the invention;

FIG. 25 comprises a flow diagram illustrating detail in accord with an embodiment of the invention;

FIG. 26 comprises a flow diagram illustrating detail in accord with an embodiment of the invention;

5 FIG. 27 comprises a flow diagram illustrating detail in accord with an embodiment of the invention;

FIG. 28 comprises a graph illustrating certain particulars as accord with an embodiment of the invention; and

10 FIG. 29 comprises a graph illustrating certain particulars as accord with an embodiment of the invention.

Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present invention. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are typically not depicted in order to facilitate a less obstructed view of these various embodiments of the present invention.

20 Detailed Description

Generally speaking, pursuant to these various embodiments, an automatic force-setting capability permits regular (or essentially constant) updating of one or more force thresholds that are used, for example, to detect an excess application of force as ordinarily associated with obstacle encounters. This capability exists

compatibly with, or without, concurrent availability of an automatic force-setting learning mode of operation and/or user-manipulable force-setting controls.

In general, actual exerted force (typically as ascertained via monitoring of a corresponding parameter, such as motor current) informs the automatic
5 updating/changing of the force-setting(s) value(s) (in general, for ease of presentation, only a single force-setting value or threshold will typically be mentioned herein with it being understood that such a reference includes both the singular and plurality of such values or thresholds). As actual exerted force increases or decreases over time and/or with circumstances (such as changing physical
10 conditions and/or ambient temperature), the force-setting value can be similarly changed to aid in ensuring that the force-setting value remains relevant to present operating circumstances.

Such changes are effected in a variety of ways pursuant to these various embodiments. In one embodiment, no changes are made to a present force-setting
15 value when a present force measurement is not sufficiently different from a present point of comparison. In another embodiment, the force-setting value is changed in substantially identical correlation to a given present force measurement (for example, by causing a characteristic force value that is used to determine an excess force-setting threshold to be rendered substantially equal to a present force
20 measurement). Pursuant to yet another embodiment, such a characteristic force value (and/or a resultant excess force threshold) is altered in a step-fashion when, for example, a relatively significant gap exists between the characteristic force value and the present force measurement. So configured, an automatically determined force-setting value can track actual force changes while avoiding relatively pointless

alterations and/or over-reacting to any particular anecdotal actual force measurement.

In various embodiments, a single force threshold can be automatically determined for an entire length of travel, or multiple thresholds can be similarly
5 calculated for corresponding portions of the travel time when significant differing force behaviors are detected. In yet other embodiments, a changing threshold mechanism can be provided through identification of a linear or non-linear curve that substantially fits and accommodates the behavior of the installation itself and/or through detection and corresponding accommodation of a ringing behavior that
10 characterizes a given installation.

In other embodiments, various other limits and/or thresholds can be utilized to control and/or detect conditions of possible concern. For example, an upper limit can be placed on the extent to which an excess force threshold can be adjusted pursuant to these various embodiments. Thresholds can also be used to detect stall
15 conditions and/or likely component and/or system faults.

In addition to (or supplemental thereto) automatically altering a force threshold or value as a function of actual perceived force readings, pursuant to other embodiments, such thresholds/values can be modified as a function of temperature and/or runtime history of the motor(s) that effect movement of the moveable barrier.
20 Pursuant to a preferred embodiment, such alterations are substantially limited to use during lower temperature conditions, as higher temperatures tend to impact conditions of interest with less severity. Pursuant to another preferred approach, when a significant temperature drop of interest has occurred between a present setting and a previous occurrence of interest, a larger alteration to a force value or

threshold may be permitted than under other circumstances to thereby more quickly accommodate likely normal behavior of the overall system.

These various embodiments provide a variety of resultant combinations that readily suit a wide variety of expected operating conditions and design criteria. In
5 general, these embodiments permit a force threshold value to be automatically calculated on a regular (or continuous) basis, in conjunction with or apart from a learning mode of operation, and in a fashion that tends to encourage relatively constant availability of a relevant and suitable threshold value. Various operating conditions can change slightly or significantly, suddenly or slowly, without unduly
10 adversely impacting the availability of relevant and useful force setting or settings.

Referring now to FIG. 1, a motor controller 10 couples to and selectively controls a motor 11. The motor 11 in turn couples via an appropriate mechanism (not shown) to one or more movable barriers 12 (such as, but not limited to, garage doors (both single-piece and segmented), sliding and swinging gates, rolling
15 shutters, and so forth). The motor controller 10 comprises, in this embodiment, a programmable platform (having, for example, a microprocessor or programmable gate array or the like) that can be readily programmed to serve as described herein (of course an appropriately configured static platform can be utilized as well if desired). Such elements are generally well understood in the art and hence additional
20 description will not be presented here for the sake of brevity and the preservation of focus.

A force sensor 13 couples to monitor one or more parameters that are indicative of force as exerted by the motor 11 to effect desired movement of the movable barrier 12 (if desired, of course, a plurality of force sensors can be

employed to provide either redundant monitoring capability and/or multi-point or multi-parameter monitoring). In this embodiment, the force sensor 13 comprises a mechanism (such as a current-sensing resistor) to detect current flow through the motor 11 (in general, current flow through a motor will correspond to loading and hence will tend to provide a relatively reliable indication of force being exerted by the motor). In alternate embodiments the force can be measured by velocity, a strain gauge, or any other force detection method.

The output of the force sensor 13 couples to an obstacle detector 14 and further serves to inform an automatically determined excess force threshold value indicator 15 (as described below in more detail). So configured, the obstacle detector 14 can compare force as sensed by the force sensor 13 with an excess force threshold as provided by the excess force threshold value indicator 15 to detect when the motor 11 at least appears to be outputting excess force (thereby indicating the possible presence of an obstacle in the path of the movable barrier).

In a preferred embodiment, the excess force threshold value indicator 15 automatically determines the threshold value in response to actual force as sensed by the force sensor 13. Such determinations can be made on a regular or irregular basis, but in a preferred embodiment are made at least once during each full traversal of the movable barrier. If desired, a typical user-initiable dedicated learning mode 16 can also be provided, such that an initial excess force threshold value can be initially determined via such an approach. Regardless, however, in a preferred embodiment, the excess force threshold value indicator 15 serves to determine initially (when needed) and to continually update thereafter during normal operating modes of

operation the excess force threshold value. So configured, these teachings are suitable for use both with and without a platform having such a learning mode.

Similarly, it should be noted that such a system could be provided with a user-accessible excess force threshold value adjustment interface (not shown) as well understood in the art. Though such an interface can be provided, when properly configured, these teachings should, at least in a significant number of instances, mitigate against the need to make any such provision.

In a preferred embodiment, the excess force threshold value indicator 15 automatically determines a characteristic force value (in response, at least in part, to the force sensor) that corresponds to this given installation. The excess force threshold value can then be determined as a function, at least in part, of the characteristic force value. For example, the characteristic force value is summed with a predetermined offset in a preferred approach to thereby determine the excess force threshold value. So configured, the motor 11 can apply force in excess of the characteristic force value without the obstacle detector 14 interpreting such an event as an obstacle so long as the force over and above the characteristic force value does not exceed the predetermined offset.

In a preferred embodiment, it is the characteristic force value that the operator automatically adjusts to reflect changing conditions regarding the application of force during normal operation. The predetermined measure is then readily combined with the frequently updated characteristic force value to yield a correspondingly updated excess force threshold value.

So configured, and referring now to FIG. 2, during a normal mode of operation (and regardless of whether a user-initiable learning mode of operation has

been earlier applied) the operator will monitor 21 a force parameter (as detected by the force sensor 13) and automatically update 22 the excess force threshold value. (As will be shown below in more detail, the operator may use a single threshold value or, in the alternative, a plurality of thresholds may be used and applied at

5 different times during movement of the movable barrier. In a preferred embodiment, the update will occur at the end of a movement cycle, though another time or times could be utilized when and as appropriate to a given implementation.) As noted above, in a preferred embodiment, the operator will effect such updating by automatically changing a characteristic force value in response to the monitored

10 force parameter and then using the updated characteristic force value as a basis for determining an updated excess force threshold value. The operator then uses 23 the updated excess force threshold value to determine when excess force appears to be applied by the motor 11. When the operator detects 24 the application of apparent excess force, one or more predetermined actions 25 are initiated (for example,

15 movement of the movable barrier can be halted or reversed, alarms can be activated, an incident log can be updated, and so forth).

With reference to FIG. 3, a not untypical force response 30 for a such a system will typically exhibit a significant peak 31 during an initial period 32 of

20 activation (or, more particularly, the motor will initially spike in a manner as suggested due to inertia and other factors, therefore causing the apparent force to appear to reach a corresponding peak). For many purposes, it may be desired to essentially ignore the force response 30 for a predetermined period of time T_1 (such

as, for example, approximately one second) such that these peaks do not influence the resultant characteristic force value TH_c and/or the excess force threshold value.

As depicted in FIG. 3, the characteristic force value TH_c comprises a single value that is used as described earlier to determine a corresponding excess force threshold value during the entire period of movement of the movable barrier (from, for example, an open position to a closed position or from a closed position to an open position). As depicted, the characteristic force value TH_c appears to be considerably larger than the bulk of the actual measured force response 30. Pursuant to these teachings, many of the embodiments taught herein would tend to reduce the characteristic force value TH_c over time to more closely approximate the actual force response 30 (presuming, of course, that the actual force response 30 itself did not change appreciably during this period of change and re-characterization).

It is unlikely, of course, that such an actual force response 30 will be utterly flat; instead, there will usually be peaks and valleys. To the extent that such undulations, and especially the peaks, do not vary significantly from what otherwise amounts to an average value for the force response 30, there is no particular value in reflecting such minor variations in the characteristic force value TH_c or the resultant excess force threshold value. A process to permit such a result appears in FIG. 4. As noted above, the force response 30 will typically begin with a brief large peak. Therefore, the process will preferably begin by waiting 41 for a minimum time (such as time T_1 as suggested in FIG. 3) before responding to the force response 30. Subsequent to this optional initial window of time, the process then detects the highest force response peak and measures 42 that peak force F_p . The process then determines 43 whether that peak force F_p falls within a predetermined small range.

When true, meaning that only negligible peak excursions have been observed with respect to the characteristic force value TH_c , the update process can simply conclude 44 without any substantive change being made to the characteristic force value TH_c and/or the excess force threshold value.

5 In this embodiment, the range is established as a small amount X that is added or subtracted from the characteristic force value TH_c . As shown in FIG. 5, this results in an upper limit 51 equal to the characteristic force value TH_c plus the amount X and a lower limit 52 equal to the characteristic force value TH_c less the amount X . So configured, when the highest peak of the actual force response 30
10 remains within this range, the update process can conclude without resultant change to the values of interest.

With reference again to FIG. 4, when the actual force response 30 has a peak that falls outside the indicated range (being either higher than the upper limit 51 or less than the lower limit 52), the process can again automatically change 45 the
15 characteristic force value TH_c as a function, at least in part, of the peak force F_p . This updated value can then be used 46 to determine when excess force is seemingly being exerted as related above either for this operation or for future operations.

So configured, a movable barrier operator will effectively yield an updated characteristic force value TH_c that is substantially identical to the original
20 characteristic force value TH_c when a difference as between the original characteristic force value TH_c and the force measurement parameter is within a predetermined minimum range. In a preferred embodiment, the value X can be, for example five percent (5 %) of the total typical initial peak force response value as occurs during the initial period 32 of energization. As described, the value X serves

to bound both the upper and lower limits 51 and 52 of this range. If desired, differing values can be used to specify the upper and lower limits (this may be appropriate, for example, when seeking to render the operator more or less sensitive to a peak excursion in a given direction away from the characteristic force value

5 TH_c).

When the actual force response includes a peak that exceeds the minimum range noted above, in a preferred embodiment the operator will use that information to automatically adjust the characteristic force value TH_c (to thereby effect a change of the excess force threshold value). One approach to guiding the adjustment process

10 appears in FIG. 6. Initially, the operator determines 60 whether the peak force F_p exceeds the characteristic force value TH_c (in a preferred approach, the operator uses a first determination process 61 when the force peak F_p exceeds the characteristic force value TH_c and a second determination process 62 when the force peak F_p is less than the characteristic force value TH_c).

15 Pursuant to the first determination process 61, the operator determines 63 whether the force peak F_p exceeds a first predetermined threshold. In this embodiment, and referring momentarily to FIG. 7, the first predetermined threshold 70 equals the characteristic force value TH_c summed with a first predetermined amount Y (wherein Y is larger than the value X that establishes the minimum range

20 described earlier).

Referring again to FIG. 6, when the force response 72 has a force peak 71 that is less than the first predetermined threshold, the operator adjusts 64 the characteristic force value TH_c by setting the adjusted characteristic force value TH_c to equal the current peak force F_p 71. So configured, the characteristic force value

TH_c automatically directly tracks and corresponds to smaller force peak excursions. Therefore, as force requirements may change via small increments with circumstance or time, the characteristic force value TH_c will similarly change. This, of course, leads to a corresponding change of the excess force threshold value and
 5 hence aids in ensuring that obstacle detection remains likely accurate and calibrated to current operating conditions and circumstances.

Referring again to FIG. 6, when the operator determines 63 that the force peak F_p exceeds the first predetermined threshold, the operator adjusts 65 the characteristic force value TH_c by incrementing the existing characteristic force value
 10 TH_c towards the current force measurement without actually reaching the current force measurement. In a preferred embodiment, this increment corresponds to a step of predetermined size or percentage (of either the difference or the absolute value and as either preset or dynamically calculated as desired). Therefore, and as illustrated in FIG. 8, when a given force response 80 has a force peak 81 that
 15 exceeds the first predetermined threshold 70, the characteristic force value TH_c is incremented by a predetermined amount K, such that the resultant value 82 will approach, but not necessarily reach the current force peak 81.

So configured, the operator will tend to substantially closely track smaller force peaks and more loosely track larger force peaks when the force peaks exceed
 20 the characteristic force value TH_c (when coupled with the minimum range process described earlier, of course, the operator will essentially ignore minimal force peak variations). This approach permits the operator to automatically maintain an excess force threshold value that is substantially current and relevant while also avoiding possibly over-significant adjustments that are possibly only associated with

anecdotal incidents that may not again occur in the near term. (Significant temperature variations can represent one potential exception to this approach, and additional embodiments described below are directed to accommodating that circumstance.)

5 Referring again to FIG. 6, when the operator determines 60 that the force peak F_p does not exceed the characteristic force value TH_c , the operator utilizes a second determination process 62 to facilitate adjustment of the excess force threshold value. Pursuant to the second determination process 62, the operator determines 66 whether the force peak F_p is less than a second predetermined
10 threshold.

With momentary reference to FIG. 7, in a preferred embodiment, the second predetermined threshold 73 comprises the characteristic force value TH_c less a predetermined amount Y (in this embodiment, the same value Y is used to determine both the first and second predetermined thresholds 70 and 73; it would of course be
15 possible to use different values to permit, for example, sensitizing or de-sensitizing the response of the process as desired to force response excursions).

Referring again to FIG. 6, when the operator determines 66 that the present force peak F_p is not less than the second predetermined threshold, the operator sets the present force peak F_p value as the new characteristic force value TH_c . For
20 example, as illustrated in FIG. 7, a force response 74 having a force peak 75 that falls between the present characteristic force value TH_c and the second predetermined threshold 73 will cause the adjusted characteristic force value TH_c to substantially equal the force peak 75.

When the operator determines 66, however, that the force peak F_p is less than the second predetermined threshold, then as shown in FIG. 6, the operator adjusts 67 the characteristic force value TH_c by decrementing or changing the latter towards the current force peak F_p by a predetermined step size L . As illustrated in FIG. 8, a force response 83 having a peak 84 that is less than the second predetermined threshold 73 will cause the characteristic force value TH_c to be decremented or changed towards the force peak 84 by a step size L . In this embodiment, this step size L is smaller than the step size K used when incrementing the characteristic force value TH_c towards a larger value as described above, and it is at least this difference that distinguishes the second determination process 62 from the first determination process 61. So configured, the operator can track (closely or loosely, depending upon the nature of the force peak excursions) changing force needs and reflect those changes in the excess force threshold value (by, in these embodiments, adjusting a characteristic force value TH_c). These processes, however, permit more significant immediate increases in the characteristic force value TH_c than decreases. This preferred approach aids in ensuring that the operator does not quickly (and possibly inappropriately) reduce the excess force threshold value to a point where the movable barrier cannot be moved without triggering a false obstacle detection event.

As described above, the operator can be configured to essentially automatically respond to only a single peak in the force response during movement of a movable barrier from a first position to a second position, such that adjustment of the characteristic force value TH_c (and/or the excess force threshold value) will be essentially based only on that one peak and value. For many situations, this approach

will provide satisfactory results. In other instances, however, it may be desirable to detect and/or respond to more than just this one peak.

For example, and referring now to FIG. 9, a given operator may detect a force response 90 that is more complex than the simpler responses illustrated above.

- 5 As one illustration, in FIG. 9, the force response 90 has a first peak plateau 91 that is followed by a second plateau 92 and then by a third relative plateau 93. With such a force response 90, an excess force threshold value that tracks the force peak represented by the first peak plateau 91 may possibly be too high for one or more of the later plateau areas 92 or 93. Pursuant to one embodiment, the operator
- 10 automatically segments or partitions the force response 90 as a function of time and determines characteristic force value TH_c 's that correspond to each resultant time window. So configured, the resultant characteristic force values would then correspond to particular times during the time the operator moves the movable barrier and would, in a preferred embodiment, be recalled and utilized at such times.
- 15 If desired, the number of threshold values (and hence the number of corresponding steps) can be fixed at a predetermined level.

- For example, and with continued reference to FIG. 9, during the time window 94 bounded by time T_1 and T_2 , a force response peak that corresponds to the first force plateau 91 can be used as described above to adjust a characteristic force
- 20 value TH_c for this first time window 94. In a similar fashion, during the next succeeding time window 95 (as bounded by time T_2 and T_3), a force response peak that corresponds to the second force plateau 92 can be used as described above to adjust a characteristic force value TH_c for this second time window 95. In a similar

fashion, other characteristic force values TH_c can be determined for other corresponding windows of time.

In a preferred embodiment, the number of resultant characteristic force values TH_c and the time windows to which such values correlate are dependent upon the force response itself as detected by the operator. For a simple response as illustrated earlier, a single characteristic force value TH_c can be automatically utilized as a satisfactory guide. For more complicated responses such as the one illustrated in FIG. 9, a plurality of such values can be automatically determined to more likely ensure ultimate provision of a relevant excess force threshold value. In another approach, the number of characteristic force values TH_c and/or the specific correlation of such values to specific times or barrier positions/locations can be previously determined and set by the manufacturer or installer and/or during a user-initiated learning mode of operation.

In the embodiment above, multiple characteristic force values TH_c are determined with each such value being calculated as a specific function of a corresponding portion of the force response itself. Pursuant to another embodiment, a curve can be fit to match, to a greater or lesser extent, the force response. This curve can then be used to permit dynamic determination of a plurality of characteristic force values TH_c .

To illustrate this approach, consider first a force response 100 as depicted in FIG. 10 that comprises a representative function of the force exerted by an operator to effect movement of a movable barrier from a first position to a second position. It can be seen that a first force peak P_1 occurs at approximately time T_1 and that a second relative peak P_2 occurs at approximately time T_2 . These peaks P_1 and P_2 are

then used to establish corresponding characteristic force values TH_c as described above. Between the two resultant values, however, a curve is fit to substantially connect such values.

For example, with reference to FIG. 11, a curve 110 can be used to connect
5 the two peak values P_1 and P_2 . This curve 110 can then be used to permit determination of corresponding characteristic force values and/or excess force threshold values. In particular, at any given time between T_1 and T_2 , the operator can utilize the curve 110 to ascertain a corresponding characteristic force value TH_c and then use that value as taught above to determine an excess force threshold value that
10 corresponds to that particular time. Various curves can be used as desired, including exponential curves. In one embodiment, the operator may have only a single curve definition to use in this manner. Pursuant to another embodiment, the operator may have a plurality of curve definitions to choose from. By one preferred approach, the operator can compare these various resultant curves against the actual force response
15 to identify a curve that best approximates the actual force response. The curve that best fits the present operating conditions would then be used as otherwise described above. With reference to FIG. 12, it would also be possible to utilize a line 120 to connect the peak values as otherwise described above. Again, such a line might represent a best fit under some operating conditions.

20 Undue mechanical resonance (or ringing) can contribute to a resultant corresponding ringing force response that may not be satisfactorily accommodated by the various embodiments set forth above. Such ringing can occur, for example, when especially heavy barriers are moved. FIG. 13 depicts an illustrative ringing force response 130 characterized by a series of dampening resonant oscillations

featuring consecutive peaks and valleys. Upon detecting such a condition (or upon otherwise being instructed to operate as now described), the operator then detects the peaks and valleys of the force response 130 and thereby ascertains a time T_x when the ringing phenomena has dampened sufficiently to no longer represent a significant concern. For example, when the distance between a consecutive peak and valley (or valley and peak) is less than a predetermined distance, the operator can conclude that the oscillation has dampened to a sufficient level. The operator can then select an appropriate curve 140 to represent the force response 130 between an initial time T_1 and the time T_x as illustrated in FIG. 14. Again, various curves can be provided, such that alternative curves 141 can be sampled and compared to permit selection of a most appropriate curve. Once selected, the curve can then again be used as described above to permit adjustment of the characteristic force value TH_c and/or the excess force threshold value.

As noted earlier, the initial portion of a force response tends to exhibit a significant transient peak. As already suggested, this initial peak can be essentially ignored when seeking to automatically set an appropriate threshold to detect an apparent application of excess force. The ordinary occurrence of this phenomena, however, can be used, if desired, to ascertain a likely status of the force monitoring sensor and/or the signal pathways that pertain thereto. During time periods subsequent to the initial peak, it is also possible that force response peaks can provide an indication of operational status other than the likely presence of an obstacle.

With reference to FIG. 15, during a predetermined time period of interest 150 (comprising, in this example, the initial time period during which the transient

force peak ordinarily occurs), the operator determines 151 whether the present force measurement exceeds some threshold T_F . As suggested by FIG. 16, this threshold T_F is set, in a preferred embodiment, considerably lower than the expected transient peak 160 (and preferably at a level that is less than the minimum force ordinarily
 5 needed to cause selective movement of the movable barrier). When the measured peak exceeds this threshold, the process can conclude 152 as set forth in FIG. 15. When, however, the initial peak 161 is less than the threshold T_F , and referring again to FIG. 15, the operator can determine 153 a corresponding status and then optionally take a predetermined action 154. For example, the operator can conclude
 10 that the force sensor is faulty (such a greatly limited or reduced initial transient response would likely suggest, for example, a problem or fault with the current sensing resistor or other related electrical failure). The predetermined action 154 could include, for example, not automatically updating the characteristic force value TH_c at this time or as might otherwise be based upon present or immediately
 15 subsequent data.

There also are other conditions that such monitoring of force can potentially reveal. To illustrate, FIG. 17 depicts a supportive embodiment. In this embodiment, the excess force threshold value is provided by an excess force threshold determination unit 171 as otherwise generally related above. In this embodiment,
 20 however, the excess force threshold determination unit 171 further utilizes a maximum force-setting limit 172. With momentary reference to FIG. 18, this maximum force-setting limit 172 comprises a limit beyond which the operator can not automatically drive the characteristic force value TH_c . This maximum adaptation limit is larger than either of the earlier adaptation thresholds 51 or 70 described

earlier, but is also smaller than a physical limit 181 that would otherwise limit the characteristic force value TH_c (the physical limit 181 being such as the maximum force that the motor 11 can conceivably deliver under the most favorable of conditions). As a result, the excess force threshold value provided by the excess force threshold determination unit 171 essentially comprises a maximum force-setting limited excess force threshold value, in that the excess force threshold value itself becomes limited with respect to the maximum force-setting limit 172. The maximum force-setting limit can comprise a non-alterable limit or can be otherwise established, such as during a learning mode of operation as desired and appropriate to a given application.

If desired, and referring again to FIG. 17, the motor controller 10 can also be made responsive to a fault/stall detector 173. The fault/stall detector 173 utilizes, in a preferred embodiment, one or more other thresholds to identify circumstances that likely indicate at least one of a fault condition and a stall condition. For example, with reference to FIG. 19, the detector 173 can optionally provide 191 a first fault/stall detected force indicia threshold and a second 192 fault/stall detected force indicia threshold. With reference to FIG. 20, the first such threshold 201 can more specifically comprise an F_{stall} threshold that corresponds to a level of force that likely indicates that the motor 11 is stalled. The second such threshold 202 can more specifically comprise an F_{fault} threshold that corresponds to a level of apparent force that likely indicates that one or more faults exist in the force-sensing signal path. Such thresholds can of course be set to correspond empirically to a given movable barrier opener.

Referring again to FIG. 19, a maximum force-setting limit 172 can also be provided 193 as already earlier described. During normal operation, the operator then determines 194 an excess force threshold value (or values as described above) subject to the maximum force-setting limit 172 and provided also that the operator

5 will now further determine 195 whether a fault/stall condition likely exists based, at least in part, on current force measurements. As illustrated in FIG. 20, the excess force threshold value F_R can be determined 194 by combining the characteristic force value TH_c with a predetermined offset A (the value of A can be selected as appropriate to a given application but in general will serve to provide room for

10 ordinary force peak excursions that are not likely indicative of an obstacle while also being small enough to likely ensure that an obstacle will be detected relatively soon following impact). As also illustrated (and as otherwise described above), the operator will automatically change the characteristic force value TH_c as a function, at least in part, of the actual force response. For example, the characteristic force

15 value TH_c may be moved upwardly by an amount B to provide an updated characteristic force value TH_c 203 due to such circumstances. When this occurs, the predetermined offset A is again applied to establish an updated excess force threshold 204.

So configured, the operator will automatically set an excess force threshold

20 value as a function of the measured force response. When the force response exhibits a peak that exceeds either of the F_{stall} or F_{fault} thresholds, however, the operator will determine 195 that a corresponding stall or fault has occurred and then take an optional predetermined action 196. For example, and referring again to FIG. 20, when the force response exceeds the F_{stall} threshold 201, the operator can cause

the motor 11 to reverse 205 and thereby move the movable barrier in an opposite direction. When the force response exceeds the F_{fault} threshold 202, the operator can cause the motor 11 to stop 206 and thereby stop movement (or attempted movement) of the moveable barrier.

5 It can therefore be seen that a movable barrier operator can monitor force (typically by monitoring a parameter that itself varies in a way that corresponds to the apparent application of force) and use that measurement to automatically and dynamically modify an excess force threshold during normal operations. In addition, such force monitoring can be further used to detect various fault conditions and or
10 stalled circumstances.

As noted earlier, temperature can also significantly impact such processes, at least under some circumstances. For example, current flow requirements of a motor can increase as ambient temperature drops (at least during periods when the motor has not recently operated). Such phenomena is generally suggested in the illustration
15 of FIG. 21. A force response 210 of a given motor at zero degrees Celsius will tend to be considerably lower than a force response 211 for that same motor at minus twenty-five degrees Celsius (note that in these illustrations the force responses 210 and 211 are only shown subsequent to the initial period of time during which the transient peak tends to be manifested). Unfortunately, the differences tend to be non-
20 linear. That is, the difference 212 between the two force responses at one time T_2 will tend to be different than the difference 213 between the two force responses at a later time T_3 . These temperature dependent behaviors present yet additional challenges to the provision of a successful automatic force-setting platform.

Therefore, pursuant to another set of embodiments, and referring now to FIG. 22, any of the above embodiments can be modified to further accommodate monitoring 221 both force and temperature (such as ambient temperature proximal to the motor) and, in conjunction with determination 222 of the characteristic force value TH_c (and/or the excess force threshold value) a determination 223 can also be made of a temperature compensation factor to thereby yield a temperature compensated excess force threshold value. To facilitate this, and referring now to FIG. 23, a temperature sensor 232 can serve to provide current temperature information to an automatic characteristic force value indicator 231. So configured, the automatic characteristic force value indicator 231 can utilize the temperature information to appropriately compensate the characteristic force value TH_c and thereby facilitate the determination of a temperature compensated excess force threshold value. If desired, of course, it would also be possible to provide the temperature information to the automatic excess force threshold value indicator 15 and provide for temperature compensation directly to the latter.

There are a number of ways to effect such an approach. With reference to FIG. 24, pursuant to one embodiment, current temperature is measured 241 and then compared 242 against a first condition. In this embodiment, the first condition prompts a determination as to whether the current temperature is less than a predetermined value, such as zero degrees Celsius. When true, the characteristic force value TH_c is immediately set 243 to the current peak force (regardless of whether smaller movements would have otherwise been utilized pursuant to any of the above embodiments). (The characteristic force value TH_c can be set in this fashion on either a temporary basis (such as only for the present operation) or until

otherwise changed pursuant to the other teachings set forth herein as appropriate to a given application.) When the current temperature does not meet the first condition, the process next determines 244 whether the current temperature is substantially different than a previously measured temperature as corresponds to a previous force peak that was previously utilized to facilitate adjustment of the excess force threshold value. When true, thereby indicating that a substantial difference in temperature exists as between the present setting and a most recent prior setting, the process again sets the characteristic force value TH_c to equal the current force peak (as before, this change can be temporary, such as for only a single operation, or of a potentially more lasting nature). Otherwise, when the present temperature and prior temperature are not significantly different from one another, the characteristic force value TH_c is set to a different value, albeit one that may still be temperature compensated.

In general, as the temperature drops, the temperature compensation will tend to comprise an ever-increasing additive value that the process combines with the characteristic force value TH_c (and/or the excess force threshold value) to thereby increase the resultant excess force threshold value. Pursuant to a preferred embodiment, the following equation can be utilized to determine the magnitude of this additive value when the characteristic force value TH_c is not otherwise simply set to equal the current force peak.

$$\text{Temperature compensation value} = \frac{MTF - TH_c}{8} \cdot \frac{\text{Temp(diff)}}{K}$$

where:

MTF = a maximum upper threshold boundary;

TH_c = current characteristic force value;

Temp(diff) = the current temperature less the previous temperature; and

K = a constant that corresponds to the temperature sensor 232 itself (such as when the sensor comprises a thermistor).

This equation will tend to produce a higher value as the ambient temperature drops quickly by a significant amount. Referring now to FIG. 25, in an alternative approach using temperature compensation, the operator first determines 251 whether the current temperature is less than a predetermined amount X (such as, in a preferred embodiment, zero degrees Celsius). If not, temperature differences often lend considerably less impact upon force and/or force sensing and hence normal 252 processing sans temperature compensation as described earlier will proceed. When the current temperature falls below the desired threshold, however, the operator measures 253 force. For purposes of this particular activity, the force need only be measured subsequent to the initial time period during which the characteristic transient peak ordinarily occurs. The operator then determines 254 whether the current measured force exceeds the current characteristic force value TH_c as combined with a current temperature compensation value (wherein the current temperature compensation value can be calculated or otherwise obtained as described above). When true, the process continues in normal fashion (wherein the characteristic force value TH_c is combined with the temperature compensation value and the excess force threshold value is determined accordingly). When the current peak force is less than the characteristic force value TH_c as combined with the temperature compensation value, however, this process then sets 255 the characteristic force value TH_c to equal the current force peak. So configured, the process will permit ordinary temperature compensation when significant differences

are not present but will prompt rapid significant alteration when significant force differences are present under these conditions.

With reference to FIG. 26, yet another temperature compensation approach has the operator again measure 261 the current temperature and determine 262 whether it is cold enough to warrant temperature compensation. If not cold enough, the temperature compensation process can simply conclude 263. When it is cold enough, however, the operator then determines 264 a temperature differential TEMP(delta) by determining a difference between a previous temperature TEMP(ref) (as ordinarily corresponds to a previously utilized force measurement) and the current temperature. The operator then determines 265 whether this difference exceeds a predetermined amount Y (such as, in a preferred approach, 2.5 degrees Celsius). If not, then ordinary temperature compensation via use of a temperature compensation adder value can continue as described above. When the difference exceeds this predetermined amount, the operator facilitates rapid force-setting compensation by adopting 266 the current force peak as the updated characteristic force value TH_c (while also establishing the current temperature as the reference temperature for use in a subsequent iteration of this same process). So configured, ordinary incremental temperature compensation can be utilized at colder temperatures with an immediate significant alteration to the characteristic force value when a significant shift in temperature during a colder interval occurs. In a preferred embodiment, such an immediate significant alteration will comprise the only force-setting alteration made during this corresponding cycle.

As mentioned earlier, runtime for the motor 11 can also impact accurate assessment of force, and particularly so during colder temperatures. Pursuant to yet

another embodiment the operator can compensate for such phenomena. With reference to FIG. 27, the operator can optionally determine 271 whether the current temperature is less than a predetermined threshold X (in a preferred embodiment, X equals zero degrees Celsius). With warmer temperatures, the operator can typically
5 dispense with any need for running motor compensation and simply proceed with normal 272 automatic force-setting procedures as related herein. At colder temperatures, however, the operator then determines 273 whether the motor 11 has had a predetermined operational state for more than a predetermined period of time Y. In a preferred approach, the operator determines 274 whether the motor 11 has
10 been off for more than the time Y (Y can be selected as appropriate to a given application and generally should be no less than a period of time, such as thirty to sixty minutes, during which a motor will reach a quiescent state with respect to these phenomena).

When the motor 11 has been off for more than the time Y, the operator
15 determines 274 an appropriate runtime adder value (or values as appropriate to the application). With momentary reference to FIG. 28, these adder values can be dynamically determined if desired or by access to an appropriate look-up table or similar mechanism. In general, these adder values comprise force values that are suitable to add to the characteristic force value to yield a suitably motor runtime
20 compensated characteristic force value. Such adder values will vary with the current temperature and further vary over time (the length of time that the motor has been running). Two exemplary adder value curves are shown in this figure, comprising a first curve 281 for minus 40 degrees Celsius conditions and a second curve 282 for minus 20 degrees Celsius conditions. It can be seen that, in general, the adder value

is larger at lower temperatures and at lower durations of runtime for the motor.

When a motor has been off for the predetermined period of time, the adder value will begin at time zero and with a curve that most closely corresponds to the current temperature (a large number of such curves can be determined and stored or, in the alternative, a few such curves can be stored and interpolation utilized to determine specific adder values for a given current temperature). So configured, an appropriate adder value is determined for a specific point in time (for example, at minus forty degrees Celsius and at time T_n , a specific corresponding point 283 on the corresponding curve 281 will comprise the motor runtime adder value).

Referring again to FIG. 27, when the motor has not been off for the predetermined period of time (meaning usually that the motor was just recently used), the operator determines 275 an appropriate offtime correction value. In particular, and referring now to FIG. 29, a similar set of curves are provided for various ambient temperature conditions (with one such curve 291 for minus forty degrees Celsius being shown in this illustration). So configured, an appropriate time location is determined (as corresponds to how long the motor has been off since having just recently been on), such as time T_n , and the corresponding point 292 on the appropriate curve 291 again utilized to determine an appropriate motor offtime correction value.

Referring again to FIG. 27, the operator then uses the runtime adder value or the offtime correction value to determine 276 a characteristic force value that comprises a motor compensated characteristic force value. The latter can then be utilized as otherwise described above to permit eventual provision of a motor runtime compensated excess force threshold value.

Pursuant to these various embodiments, a movable barrier operator can effect automatic force-setting with or without a user-initiated learning mode and/or a user manipulable force-setting interface. Such automatic force-setting can loosely or closely follow force peak excursions that do not otherwise appear to evince a
5 problem. The force-setting process can be compensated to account for variations that are ordinarily associated with environmental conditions such as temperature as well as with operational status such as motor runtime. In addition, the operator can utilize such force measurements to ascertain other potential conditions of concern, including faulty components and stalling. Such benefits accrue with only a modest
10 addition of corresponding sensor(s) and/or other components or programming and tend to assure that an auto-force setting movable barrier operator can reliably detect and respond to an obstacle under a variety of changing operational circumstances.

The scope of the claims should not be limited by the preferred embodiments set forth in the examples, but should be given the broadest interpretation consistent
15 with the description as a whole.

WHAT IS CLAIMED IS:

1. A movable barrier operator for use with a movable barrier, which movable barrier is selectively moved through selective application of force by a motor via the movable barrier operator, wherein the motor has a corresponding range of output forces, the movable barrier operator comprising:
 - at least one force sensor;
 - a maximum force-setting limit that is within the corresponding range of output forces;
 - an excess force threshold determination unit that is responsive to the maximum force-setting limit and having a maximum force-setting limited excess force threshold value output, wherein the excess force threshold determination unit comprises an automatic excess force threshold determination unit that is responsive to the maximum force-setting limit and having an automatically determined maximum force-setting limited excess force threshold value output;
 - a movable barrier obstacle detector that is at least partially responsive to the at least one force sensor and to the maximum force-setting limited excess force threshold value output; and
 - a motor controller operably coupled and responsive to the movable barrier obstacle detector.
2. The movable barrier operator of claim 1 and further comprising a fault-detected force indicia threshold, which fault-detected force indicia threshold exceeds the maximum force-setting limit.
3. The movable barrier operator of claim 1 and further comprising a fault-detected force indicia threshold, which fault-detected force indicia threshold is less than a minimum force needed to cause selective movement of the movable barrier.
4. The movable barrier operator of claim 1 and further comprising:
 - a first fault-detected force indicia threshold, which first fault-detected force indicia threshold exceeds the maximum force-setting limit; and

a second fault-detected force indicia threshold, which second fault-detected force indicia threshold is less than a minimum force needed to cause selective movement of the movable barrier.

5. The movable barrier operator of claim 1 wherein the maximum force-setting limit comprises a non-alterable limit.

6. The movable barrier operator of claim 1 wherein the maximum force-setting limit is set during a movable barrier operator learning mode of operation.

7. The movable barrier operator of claim 1 wherein the maximum force-setting limit comprises one of:

a default preset value; and

a dynamically set value.

8. A method for use with a movable barrier operator that controls a motor having a corresponding range of force values, comprising:

providing a maximum force-setting limit that is within the corresponding range of output forces of the motor;

monitoring at least one parameter that corresponds to force as applied by the motor to selectively cause a movable barrier to move;

limiting an excess force threshold value such that an updated excess force threshold does not exceed the maximum force-setting limit;

using the updated excess force threshold value and the at least one parameter to determine when excess force is being applied to the movable barrier via the movable barrier operator;

taking a predetermined action when excess force is seemingly being applied to the movable barrier via the movable barrier operator;

providing a fault-detected force indicia threshold, when fault-detected force indicia threshold exceeds the maximum force-setting limit.

9. The method of claim 8 wherein limiting an excess force threshold value

includes automatically changing an excess force threshold value in response to the monitored at least one parameter to provide the updated excess force threshold value, wherein the updated excess force threshold does not exceed the maximum force-setting limit.

10. The method of claim 8 and further comprising providing:

a first fault-detected force indicia threshold, which first fault-detected force indicia threshold exceeds the maximum force-setting limit; and

a second fault-detected force indicia threshold, which second fault-detected force indicia threshold is less than a minimum force needed to cause selective movement of the movable barrier.

11. The method of claim 8 wherein providing a maximum force-setting limit includes providing a non-alterable maximum force-setting limit.

12. The method of claim 8 wherein providing a maximum force-setting limit includes determining the maximum force-setting limit during a learning mode of operation.

13. The method of claim 8 wherein providing a maximum force-setting limit includes using one of:

a default preset value; and

a dynamically set value.

14. A method for use with a movable barrier operator that controls a motor having a corresponding range of force values, comprising:

providing a maximum force-setting limit that is within the corresponding range of output forces of the motor;

monitoring at least one parameter that corresponds to force as applied by the motor to selectively cause a movable barrier to move;

limiting an excess force threshold value such that an updated excess force threshold does not exceed the maximum force-setting limit;

using the updated excess force threshold value and the at least one parameter to determine when excess force is seemingly being applied to the movable barrier via the movable barrier operator;

taking a predetermined action when excess force is seemingly being applied to the movable barrier via the movable barrier operator;

providing a fault-detected force indicia threshold, which fault-detected force indicia threshold is less than a minimum force needed to cause selective movement of the movable barrier.

15. The method of claim 14 wherein limiting an excess force threshold value includes automatically changing an excess force threshold value in response to the monitored at least one parameter to provide the updated excess force threshold value, wherein the updated excess force threshold does not exceed the maximum force-setting limit.

16. The method of claim 14 and further comprising providing:

a first fault-detected force indicia threshold, which first fault-detected force indicia threshold exceeds the maximum force-setting limit; and

a second fault-detected force indicia threshold, which second fault-detected force indicia threshold is less than a minimum force needed to cause selective movement of the movable barrier.

17. The method of claim 14 wherein providing a maximum force-setting limit includes providing a non-alterable maximum force-setting limit.

18. The method of claim 14 wherein providing a maximum force-setting limit includes determining the maximum force-setting limit during a learning mode of operation.

19. The method of claim 14 wherein providing a maximum force-setting limit includes using one of:

a default preset value; and

a dynamically set value.

20. A method for use with a movable barrier operator, comprising:
- monitoring at least one parameter that corresponds to force as applied to a movable barrier by a motor to selectively cause the movable barrier to move;
 - automatically changing an excess force threshold value in response to the monitored at least one parameter to provide an updated excess force threshold value;
 - using the updated excess force threshold value and the monitored at least one parameter to determine when excess force is seemingly being applied to the movable barrier via the movable barrier operator;
 - taking a predetermined action when excess force is seemingly being applied to the movable barrier via the movable barrier operator;
 - determining that a fault condition exists when the at least one parameter that corresponds to force fails to attain a peak value that exceeds a first threshold during a predetermined time period.

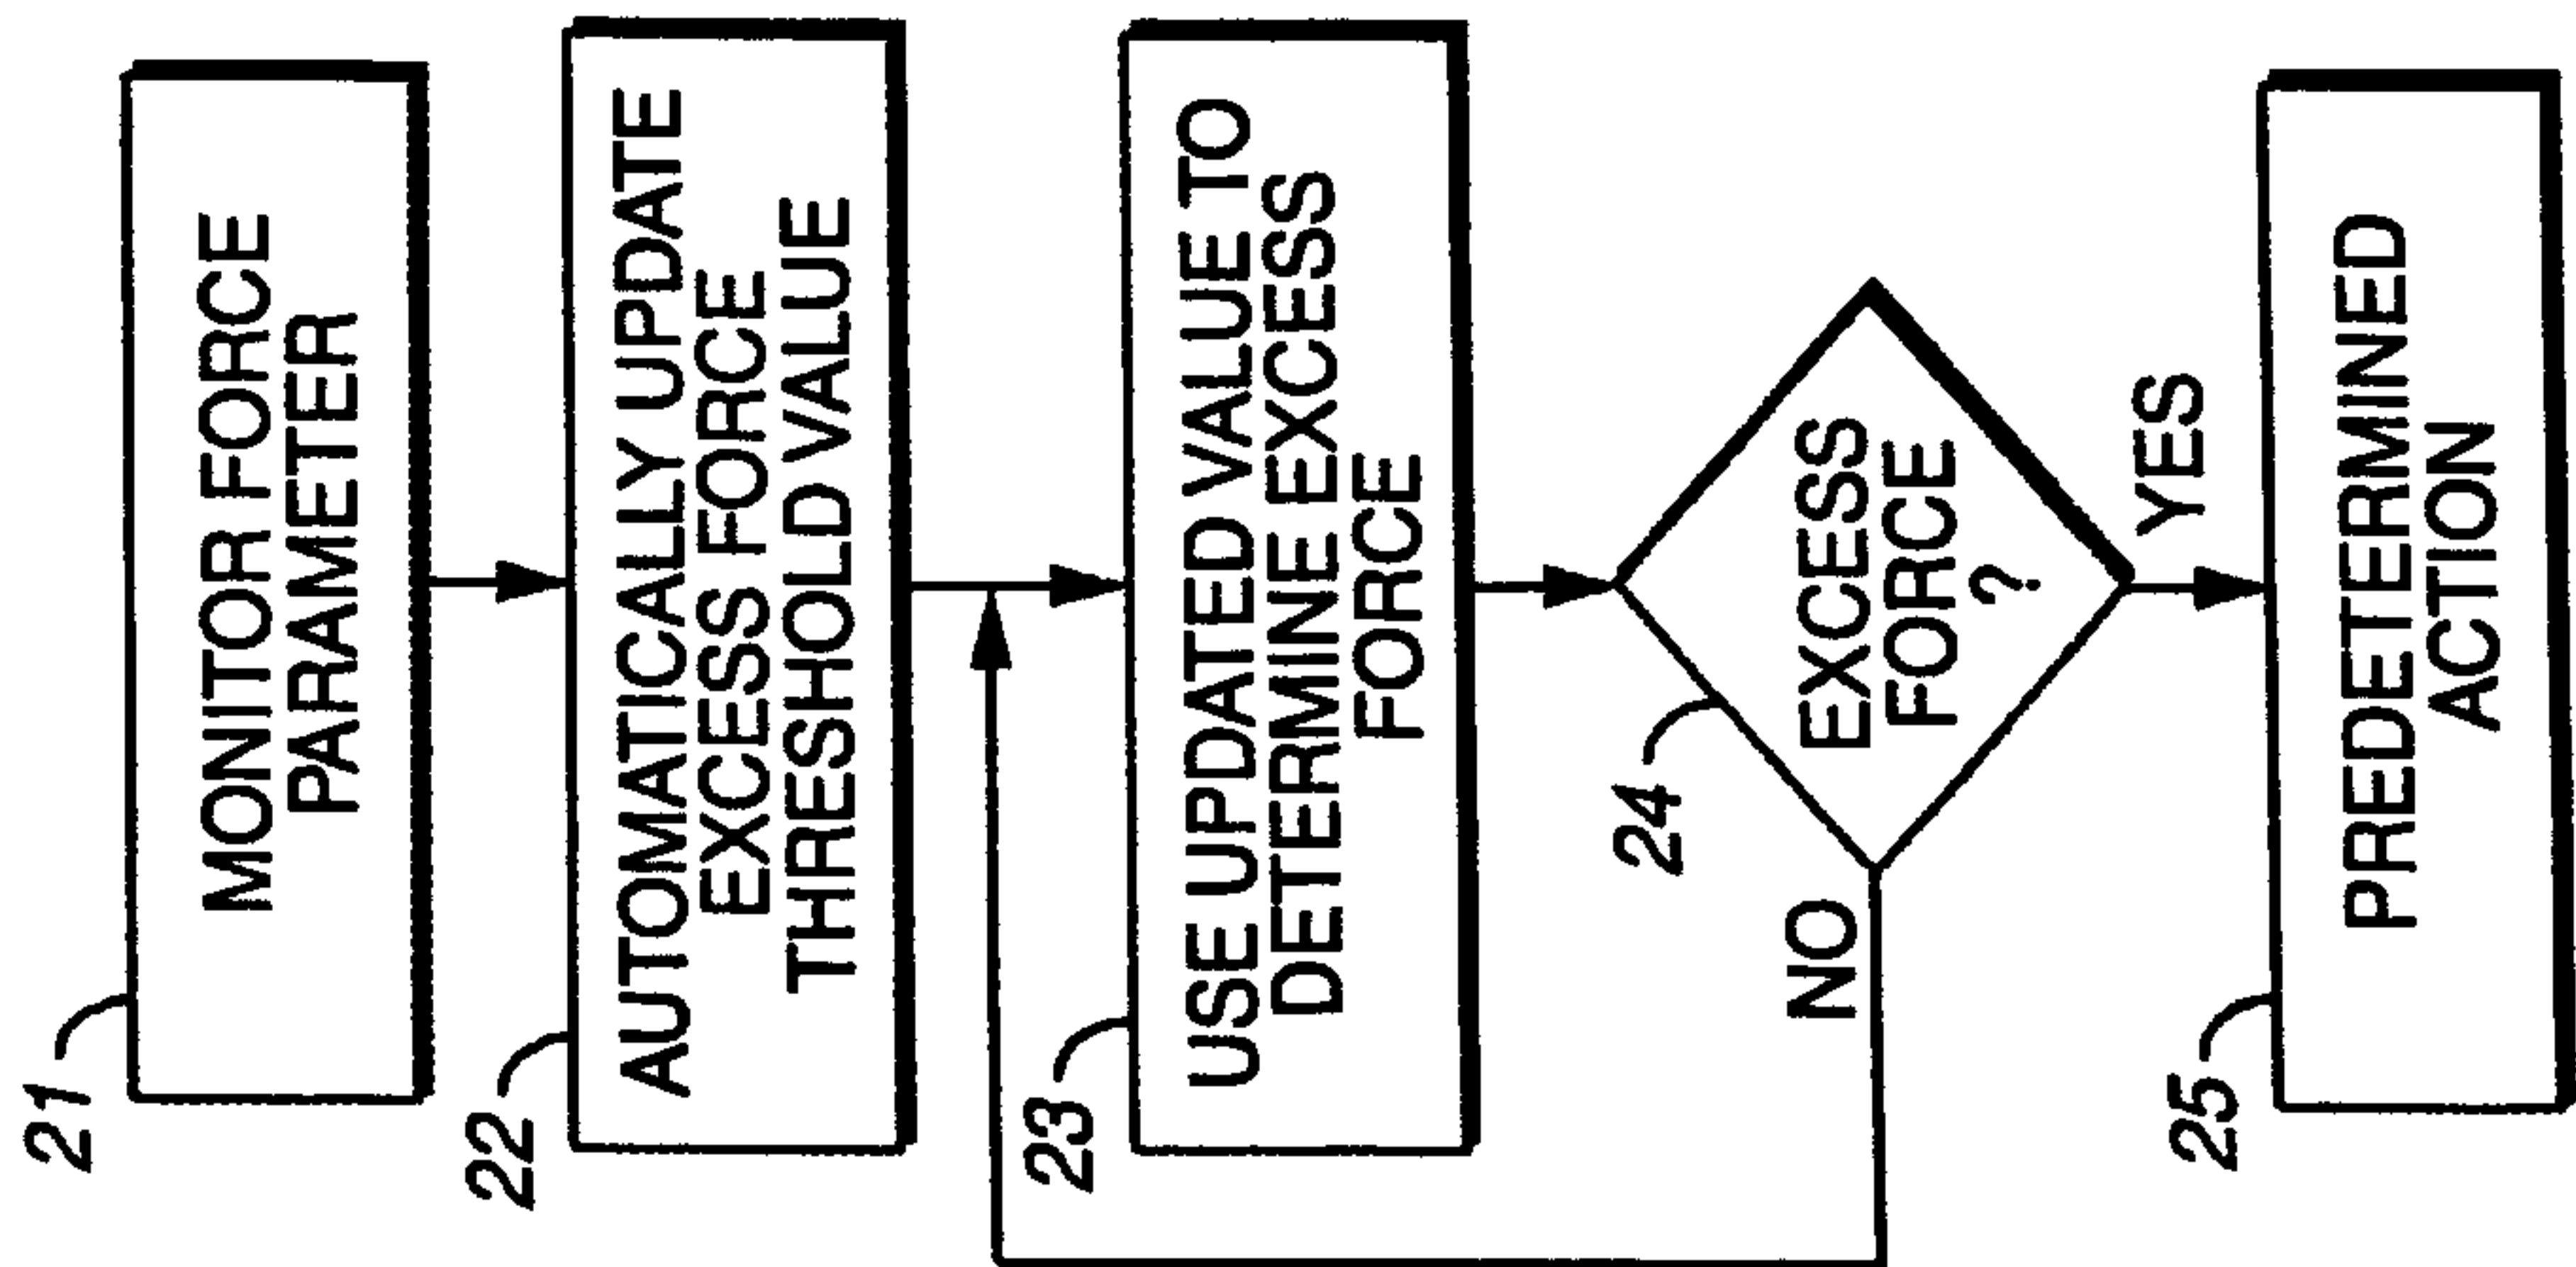


FIG. 2

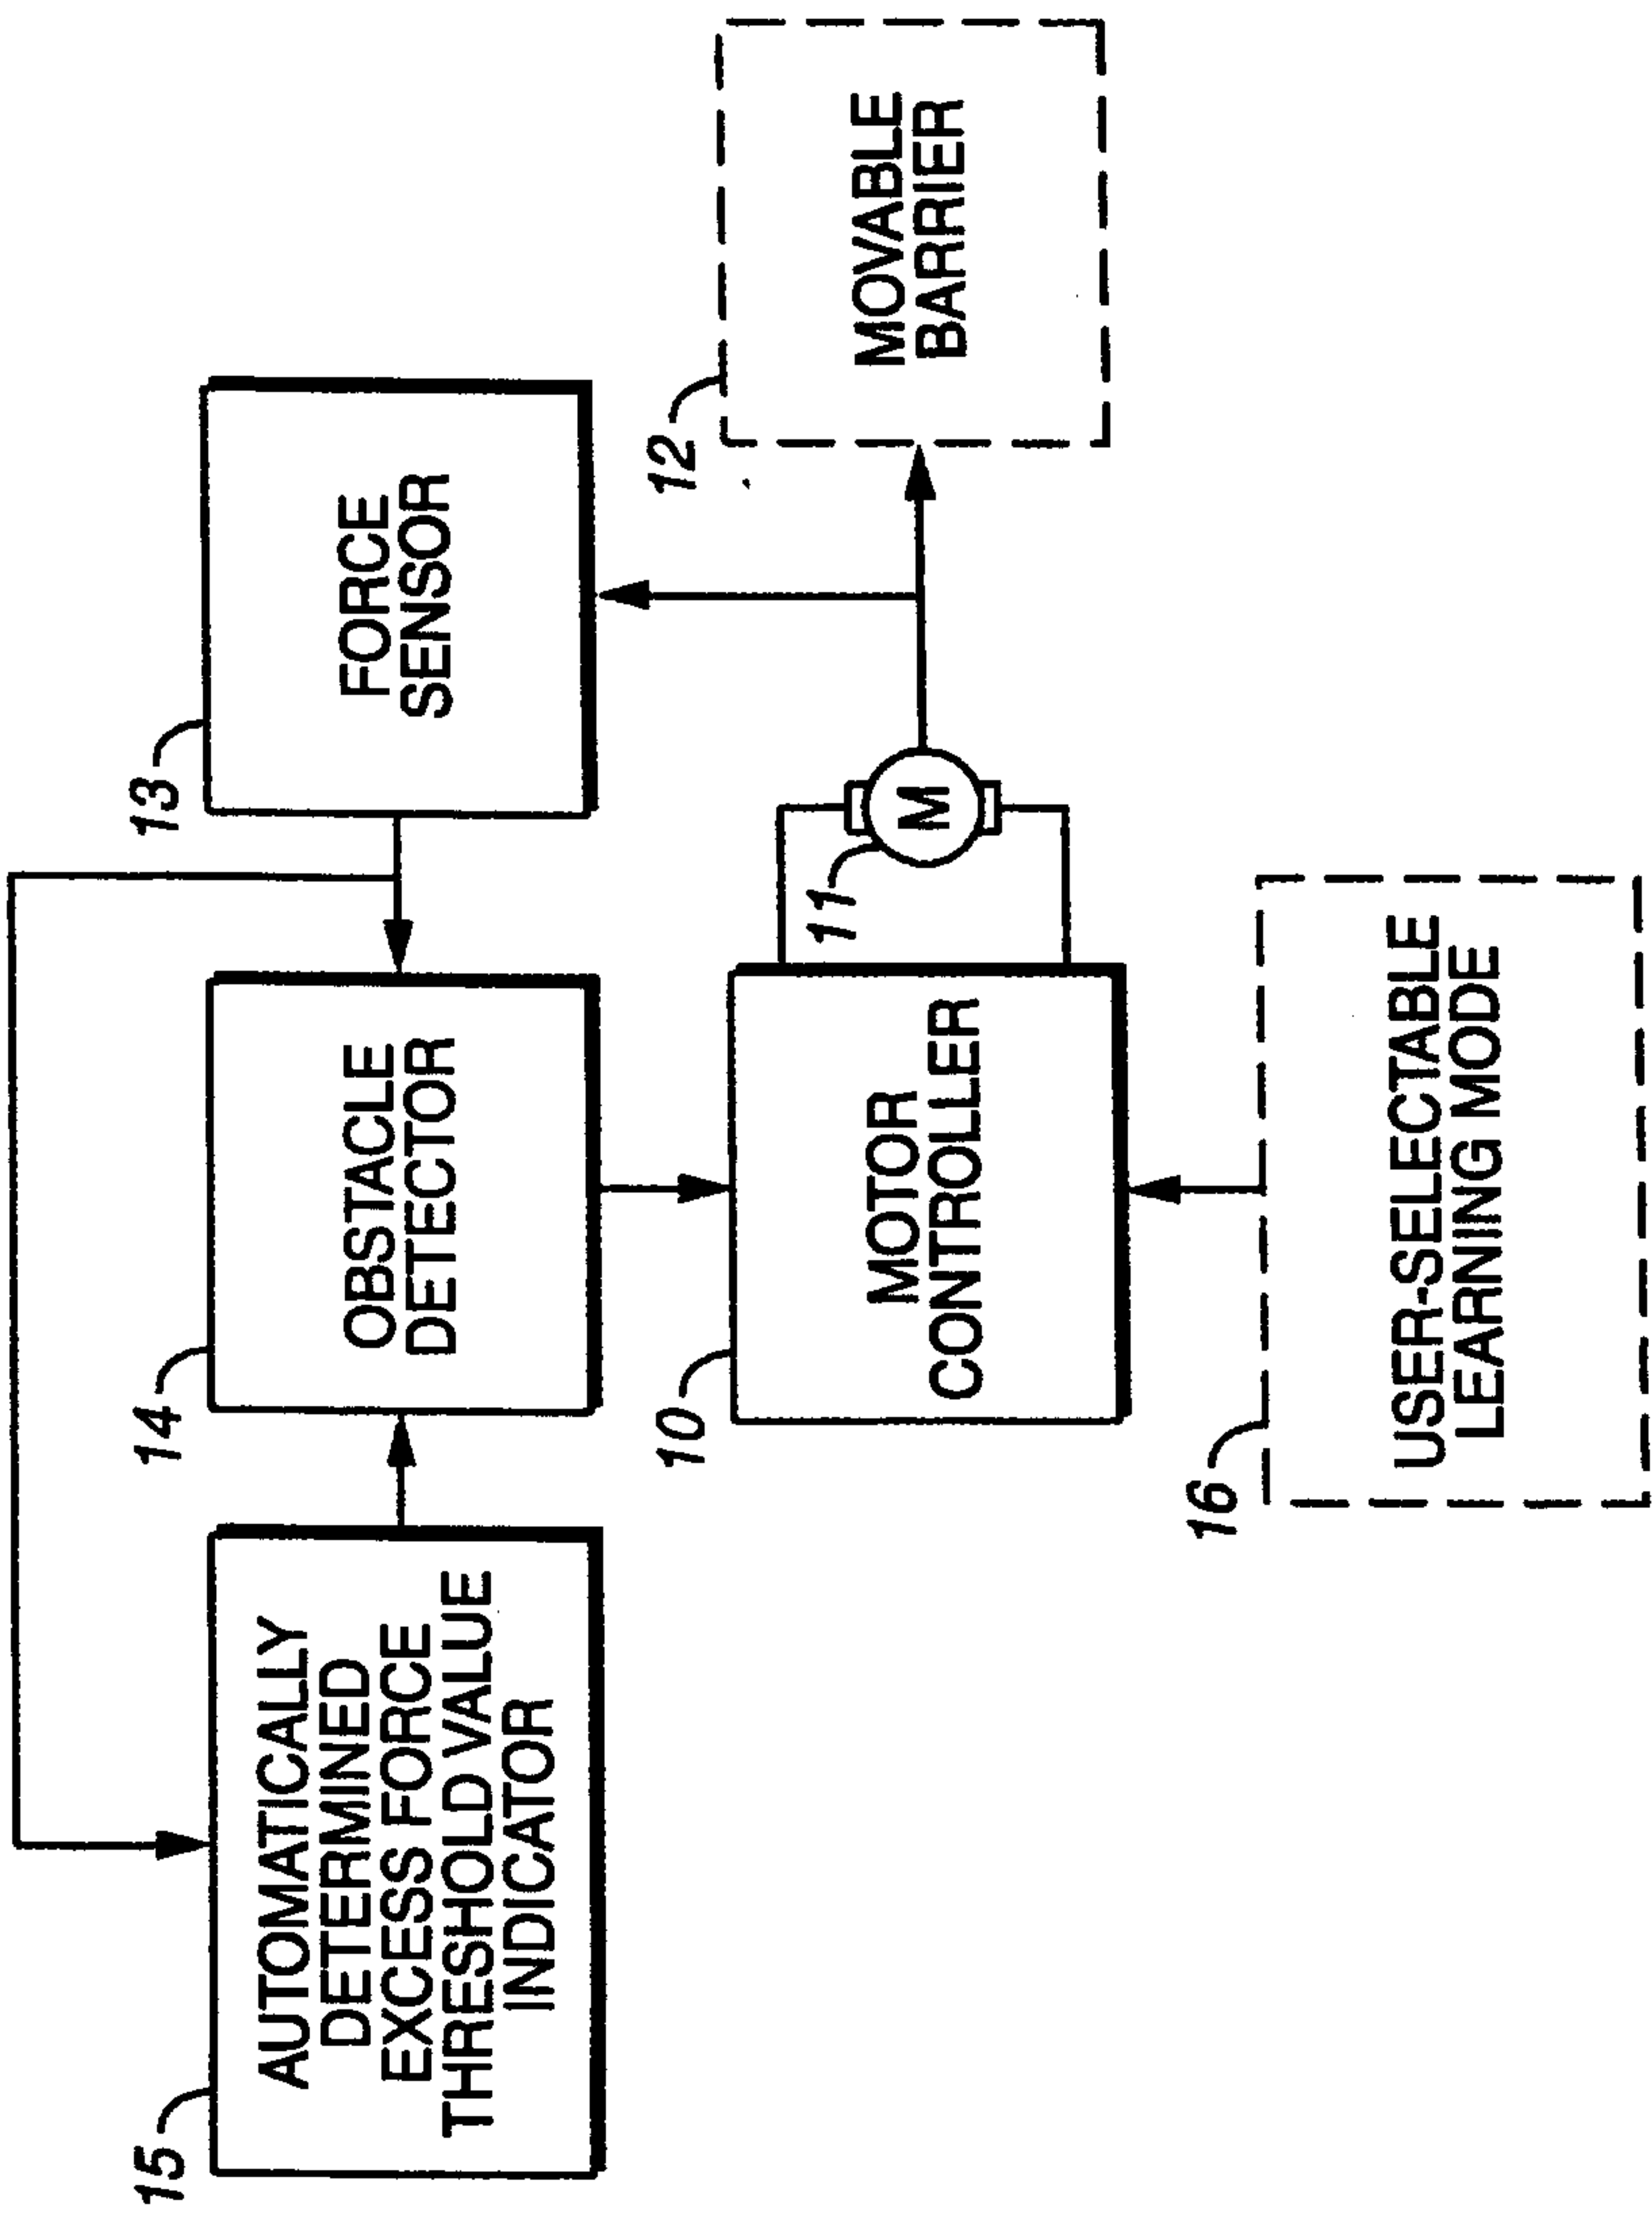


FIG. 1

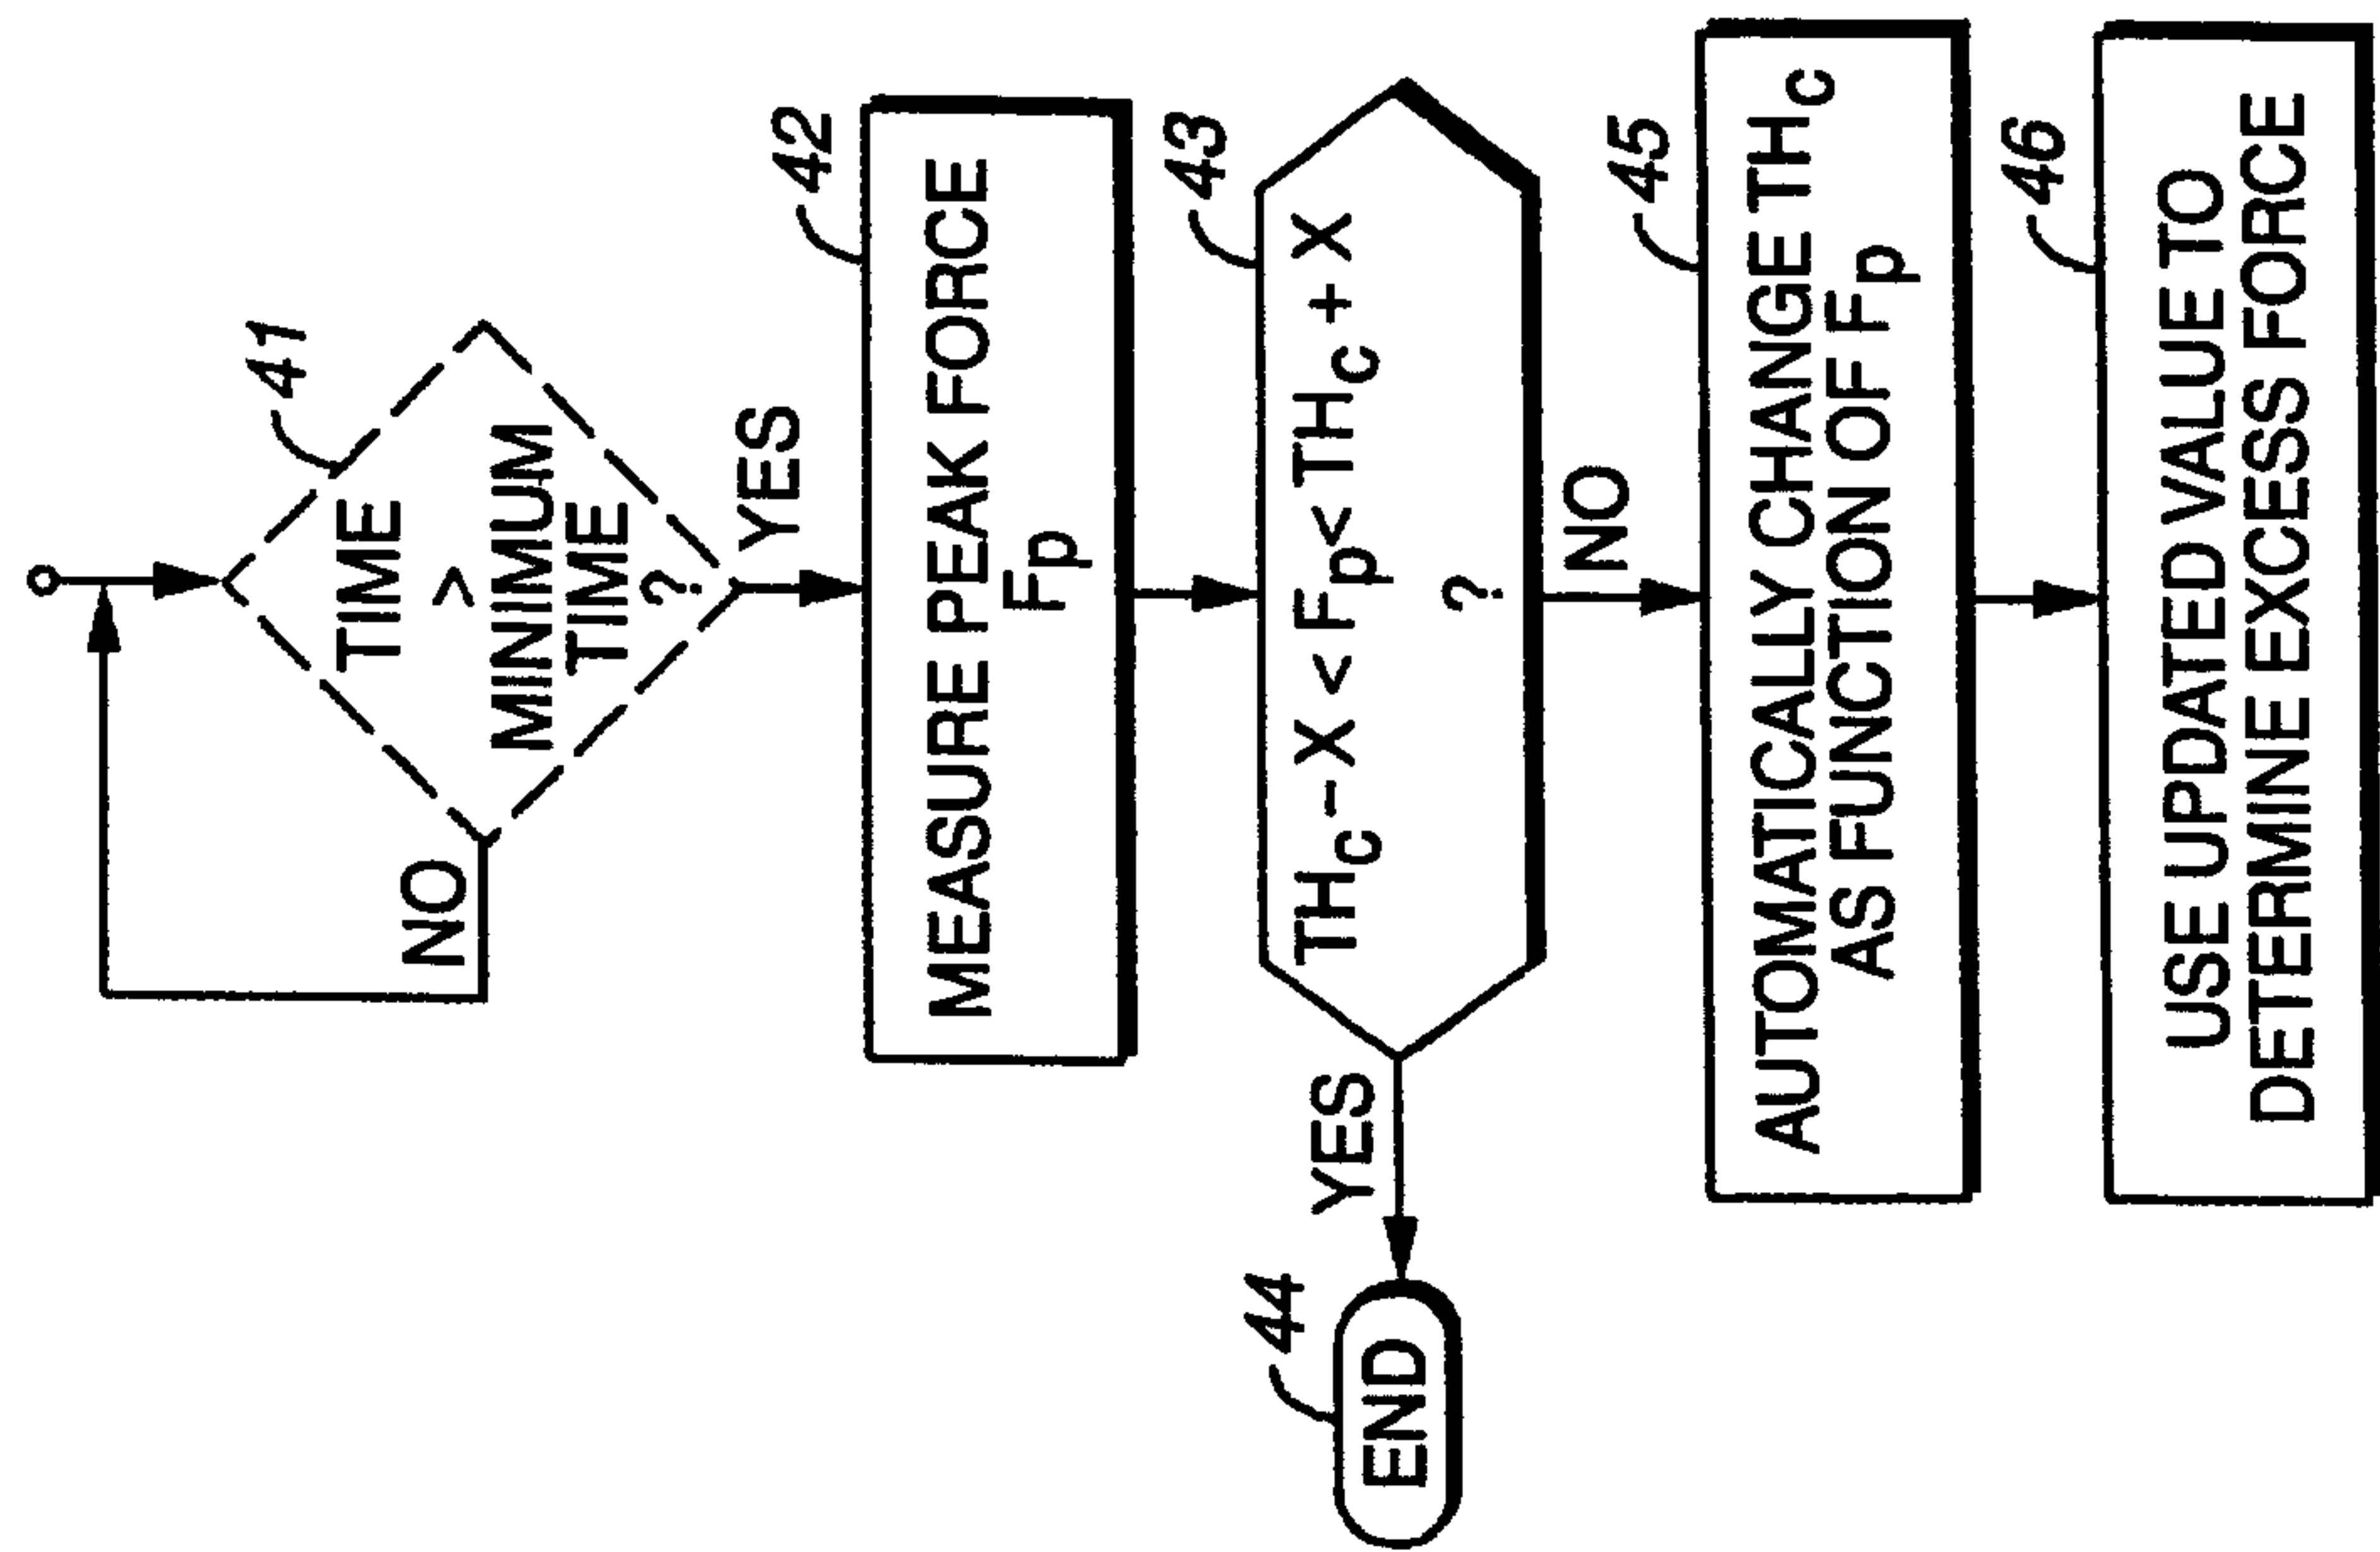


FIG. 4

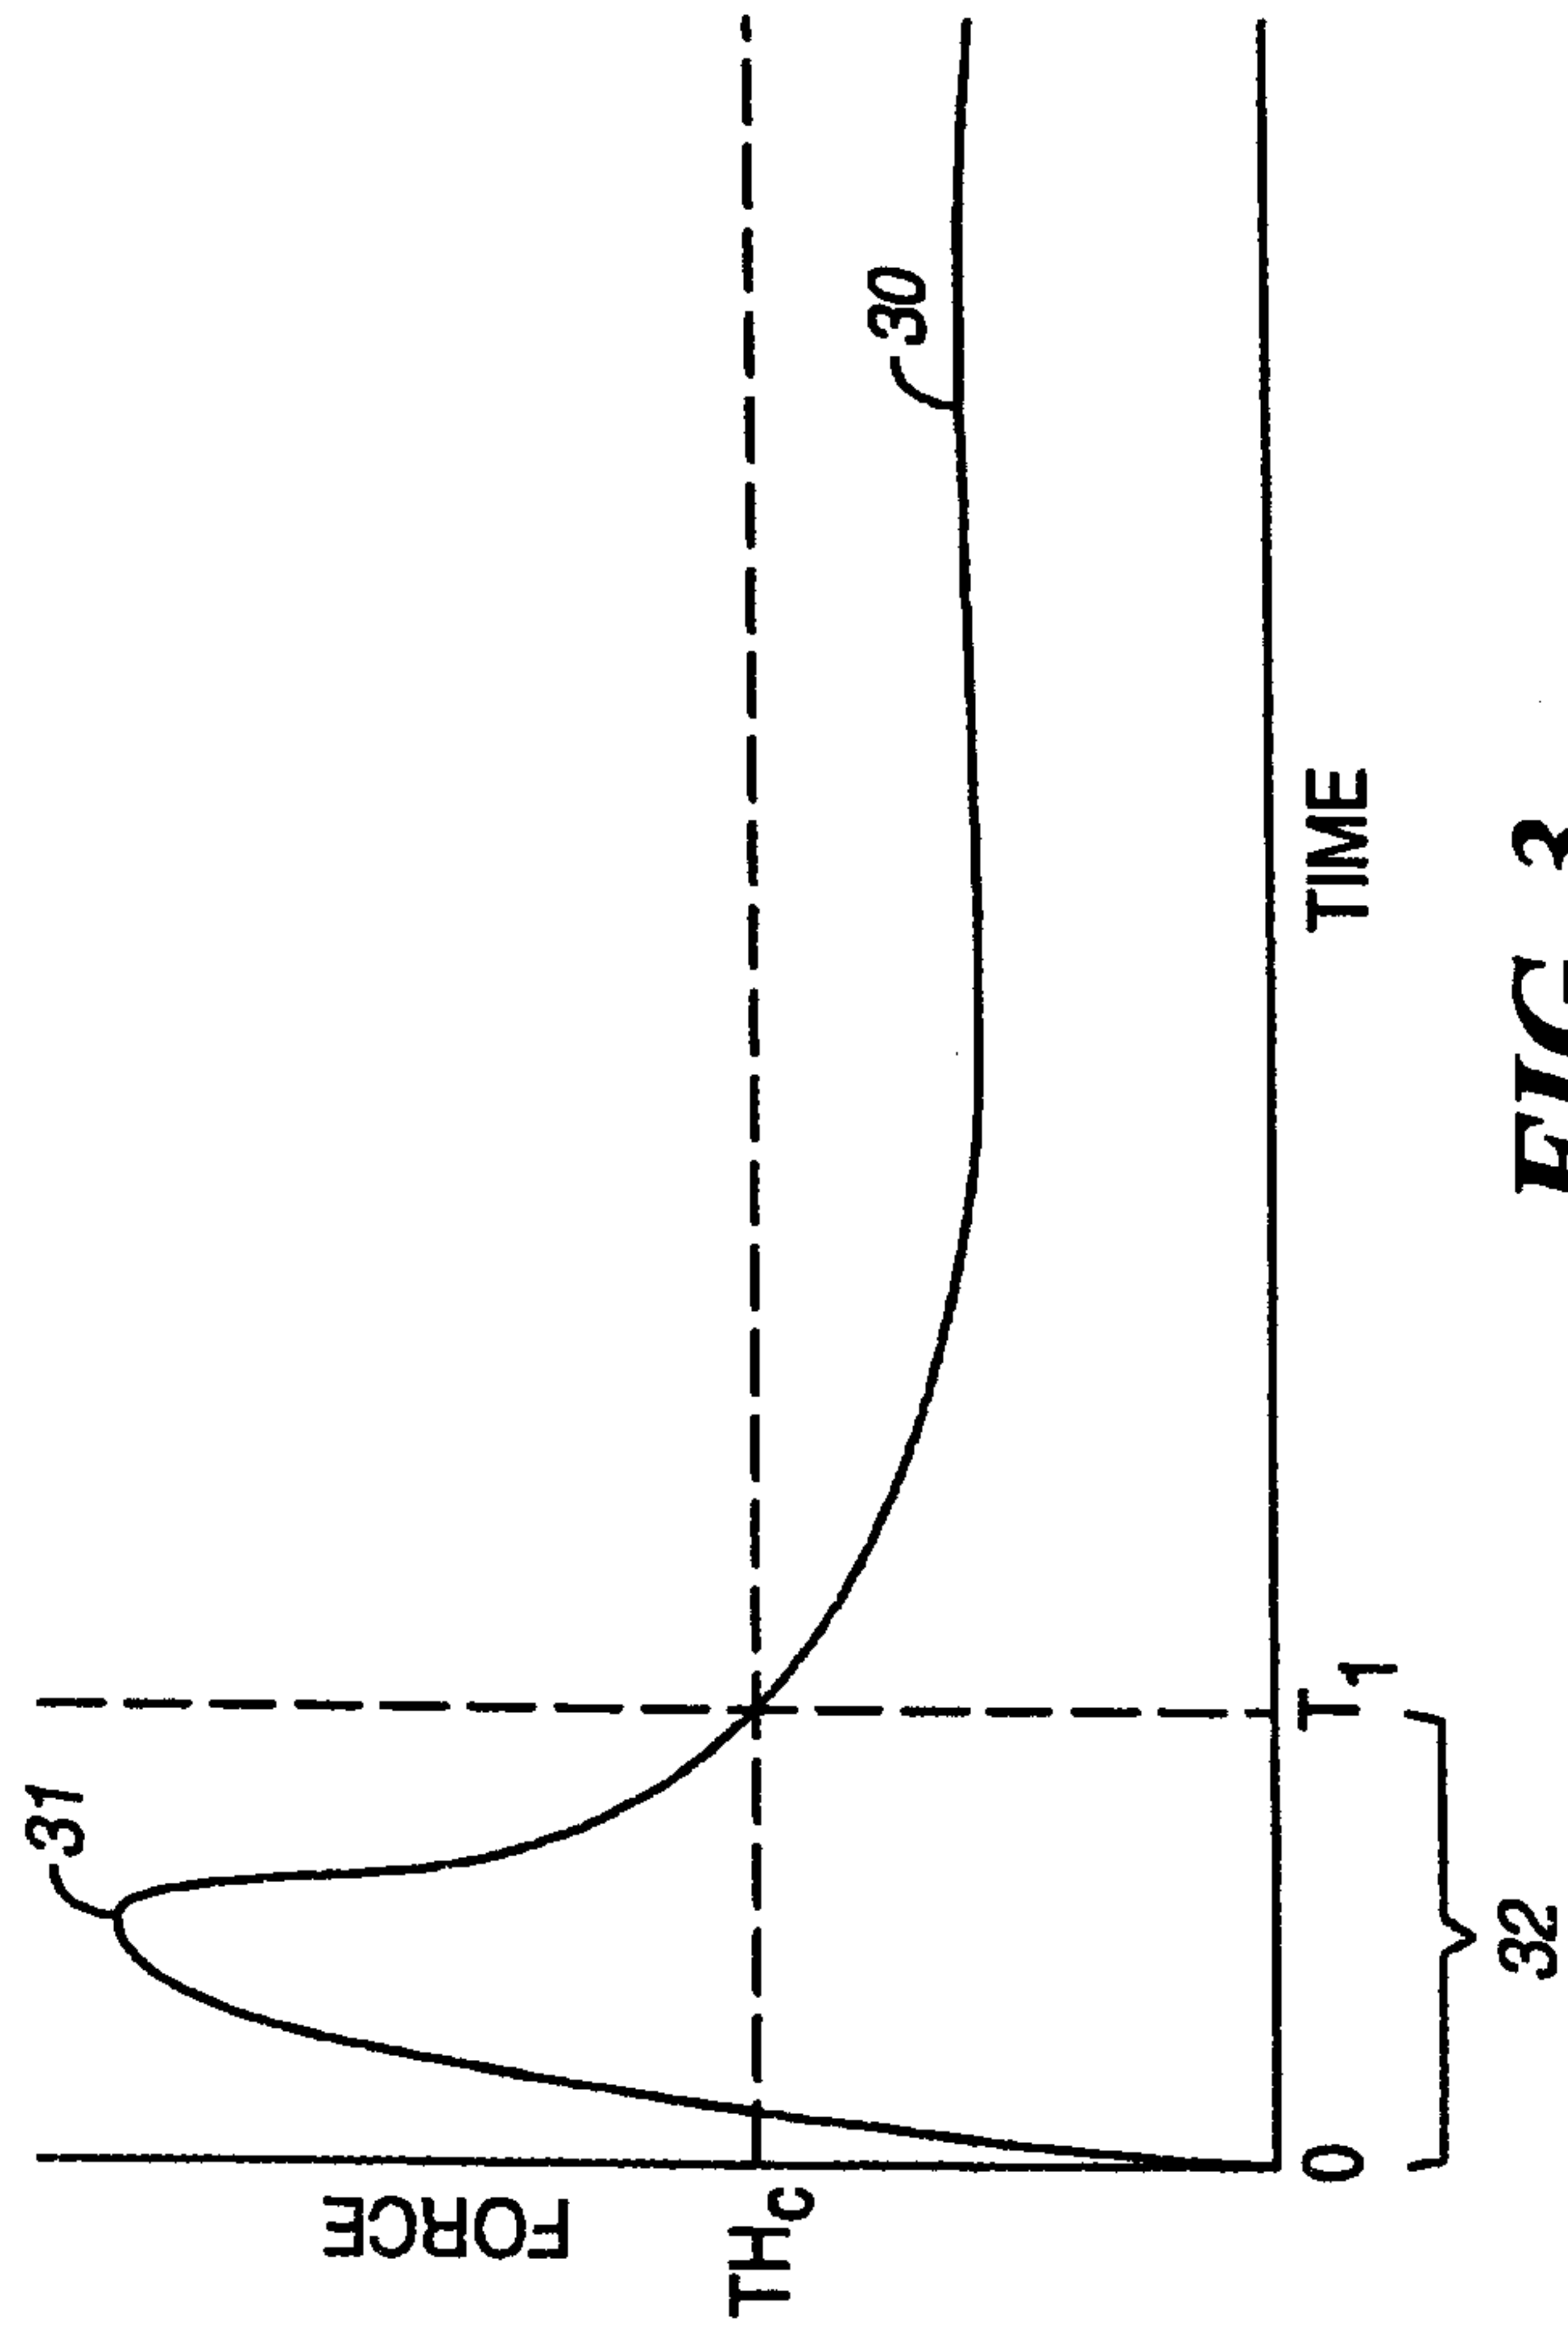


FIG. 3

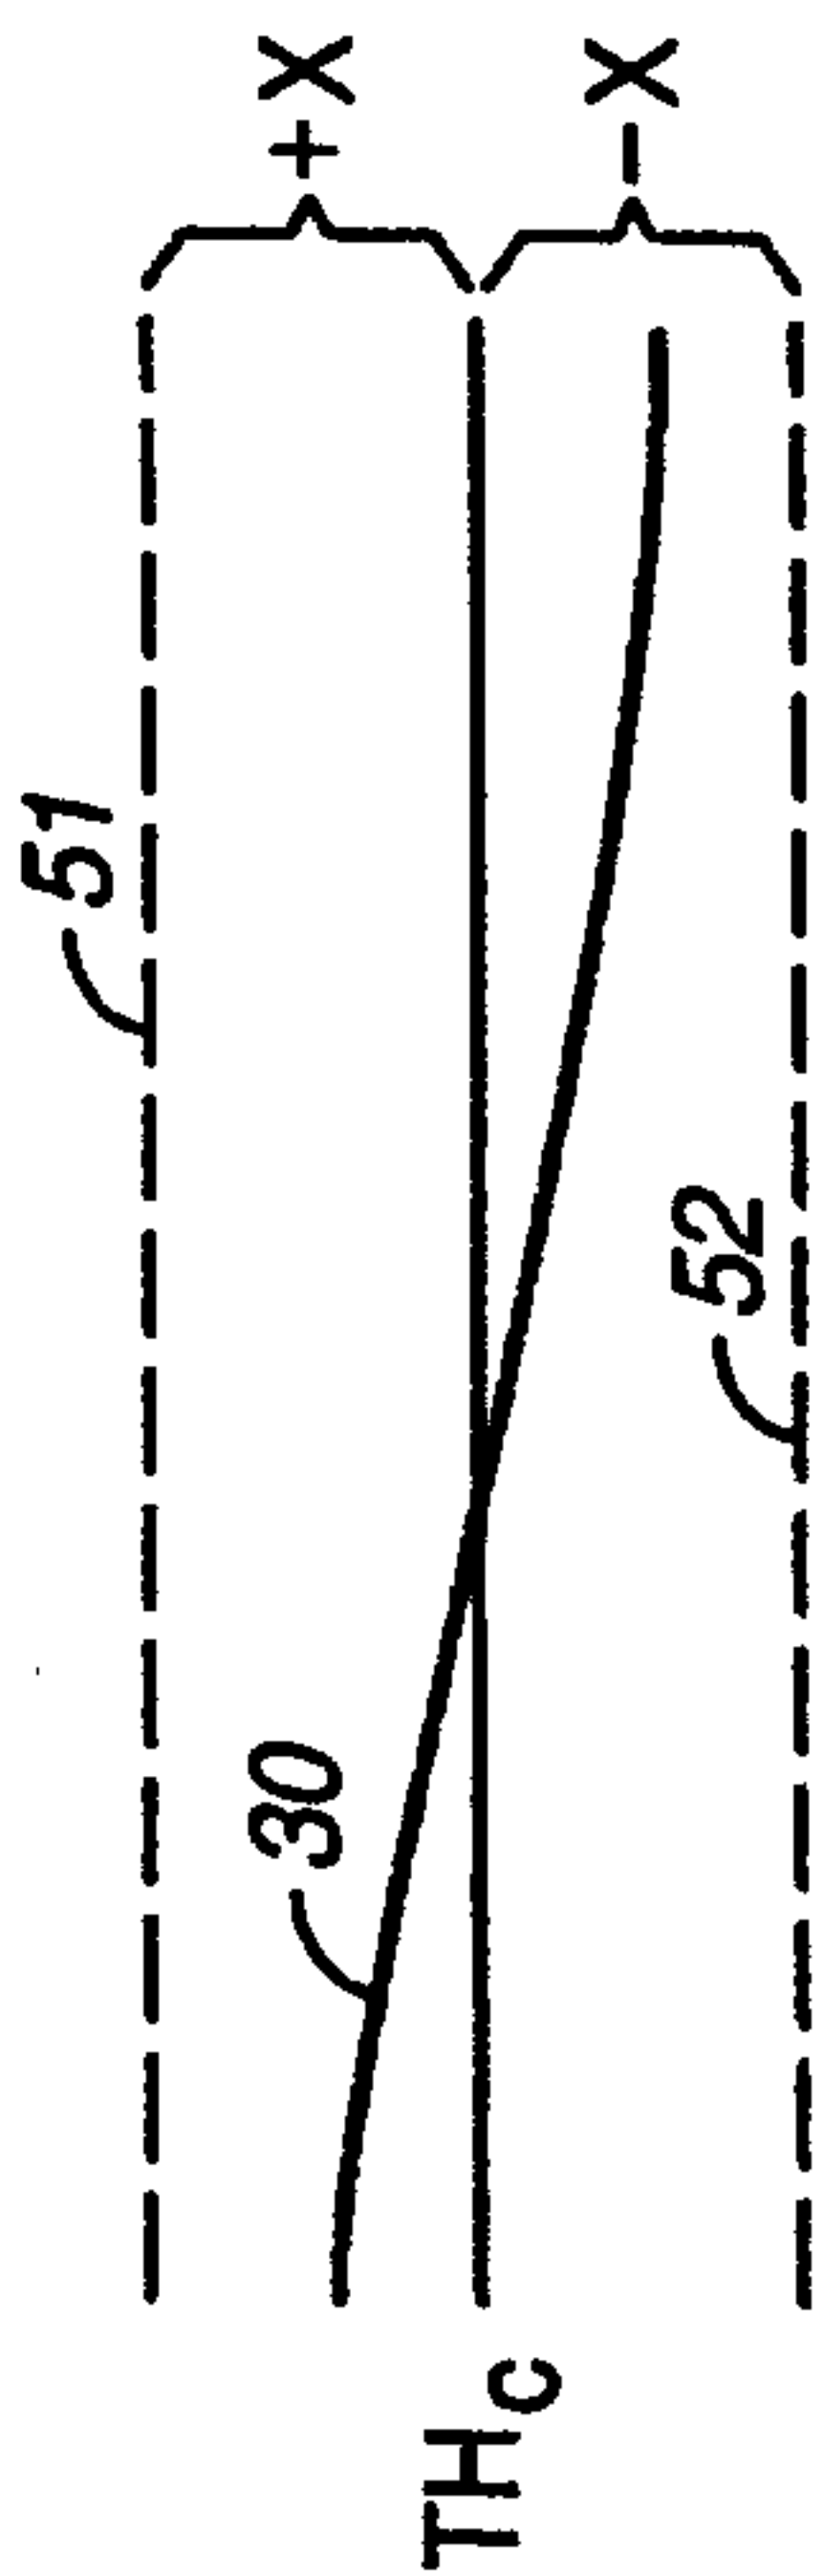


FIG. 5

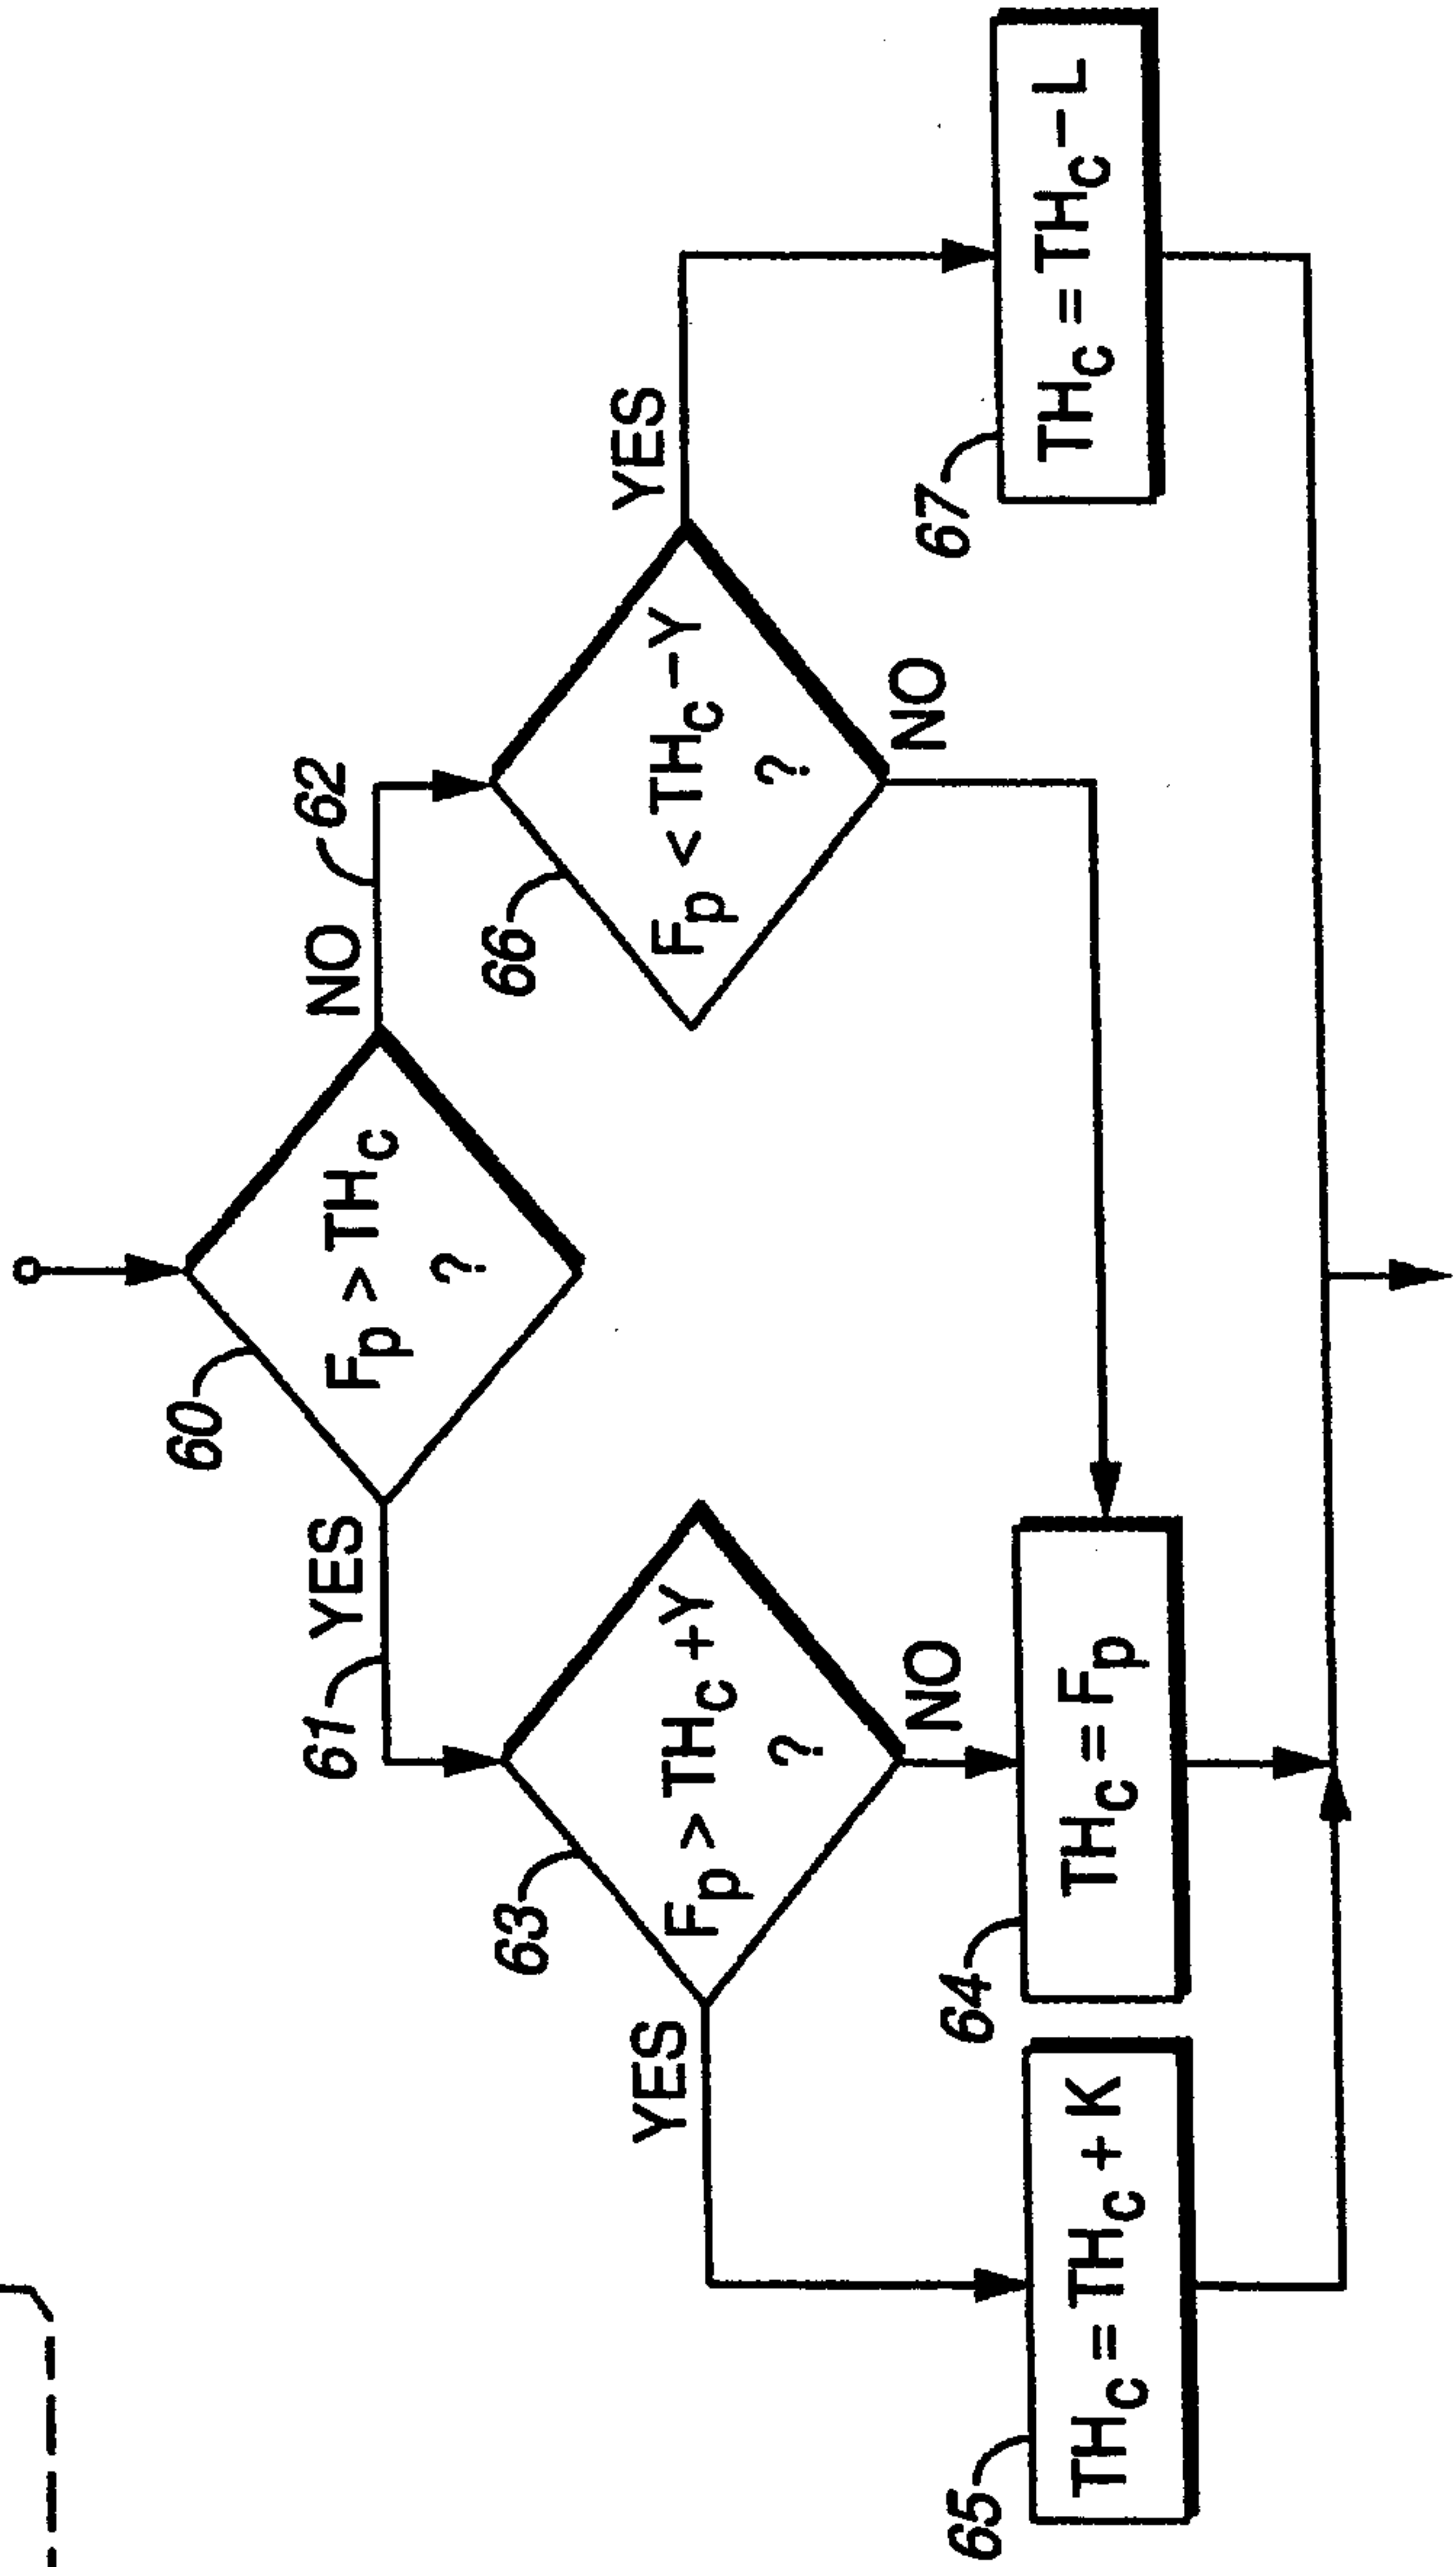


FIG. 6

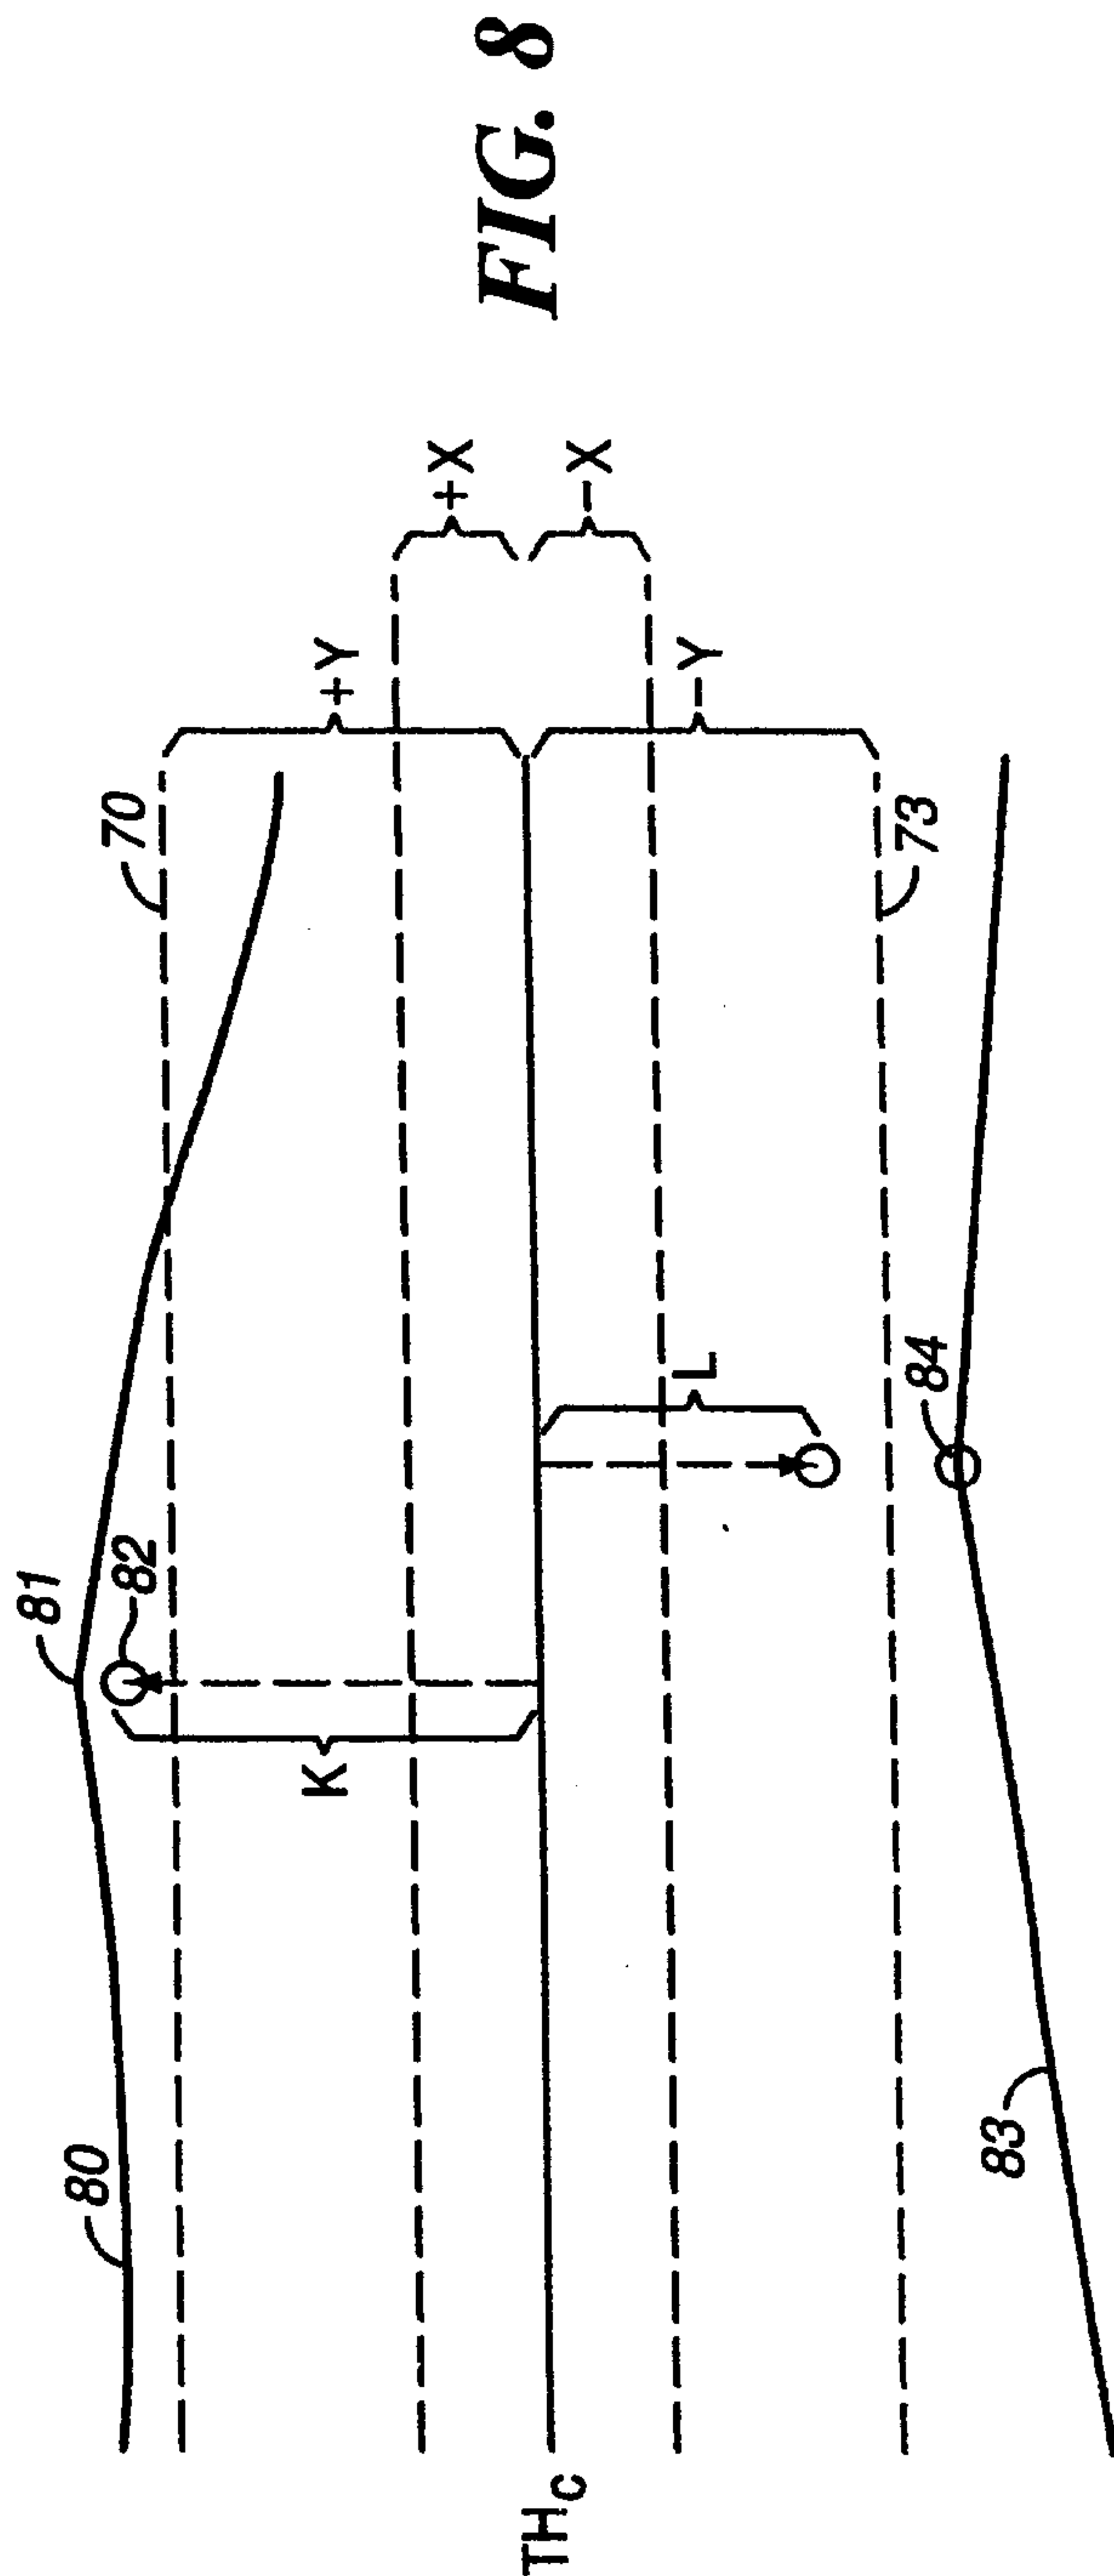
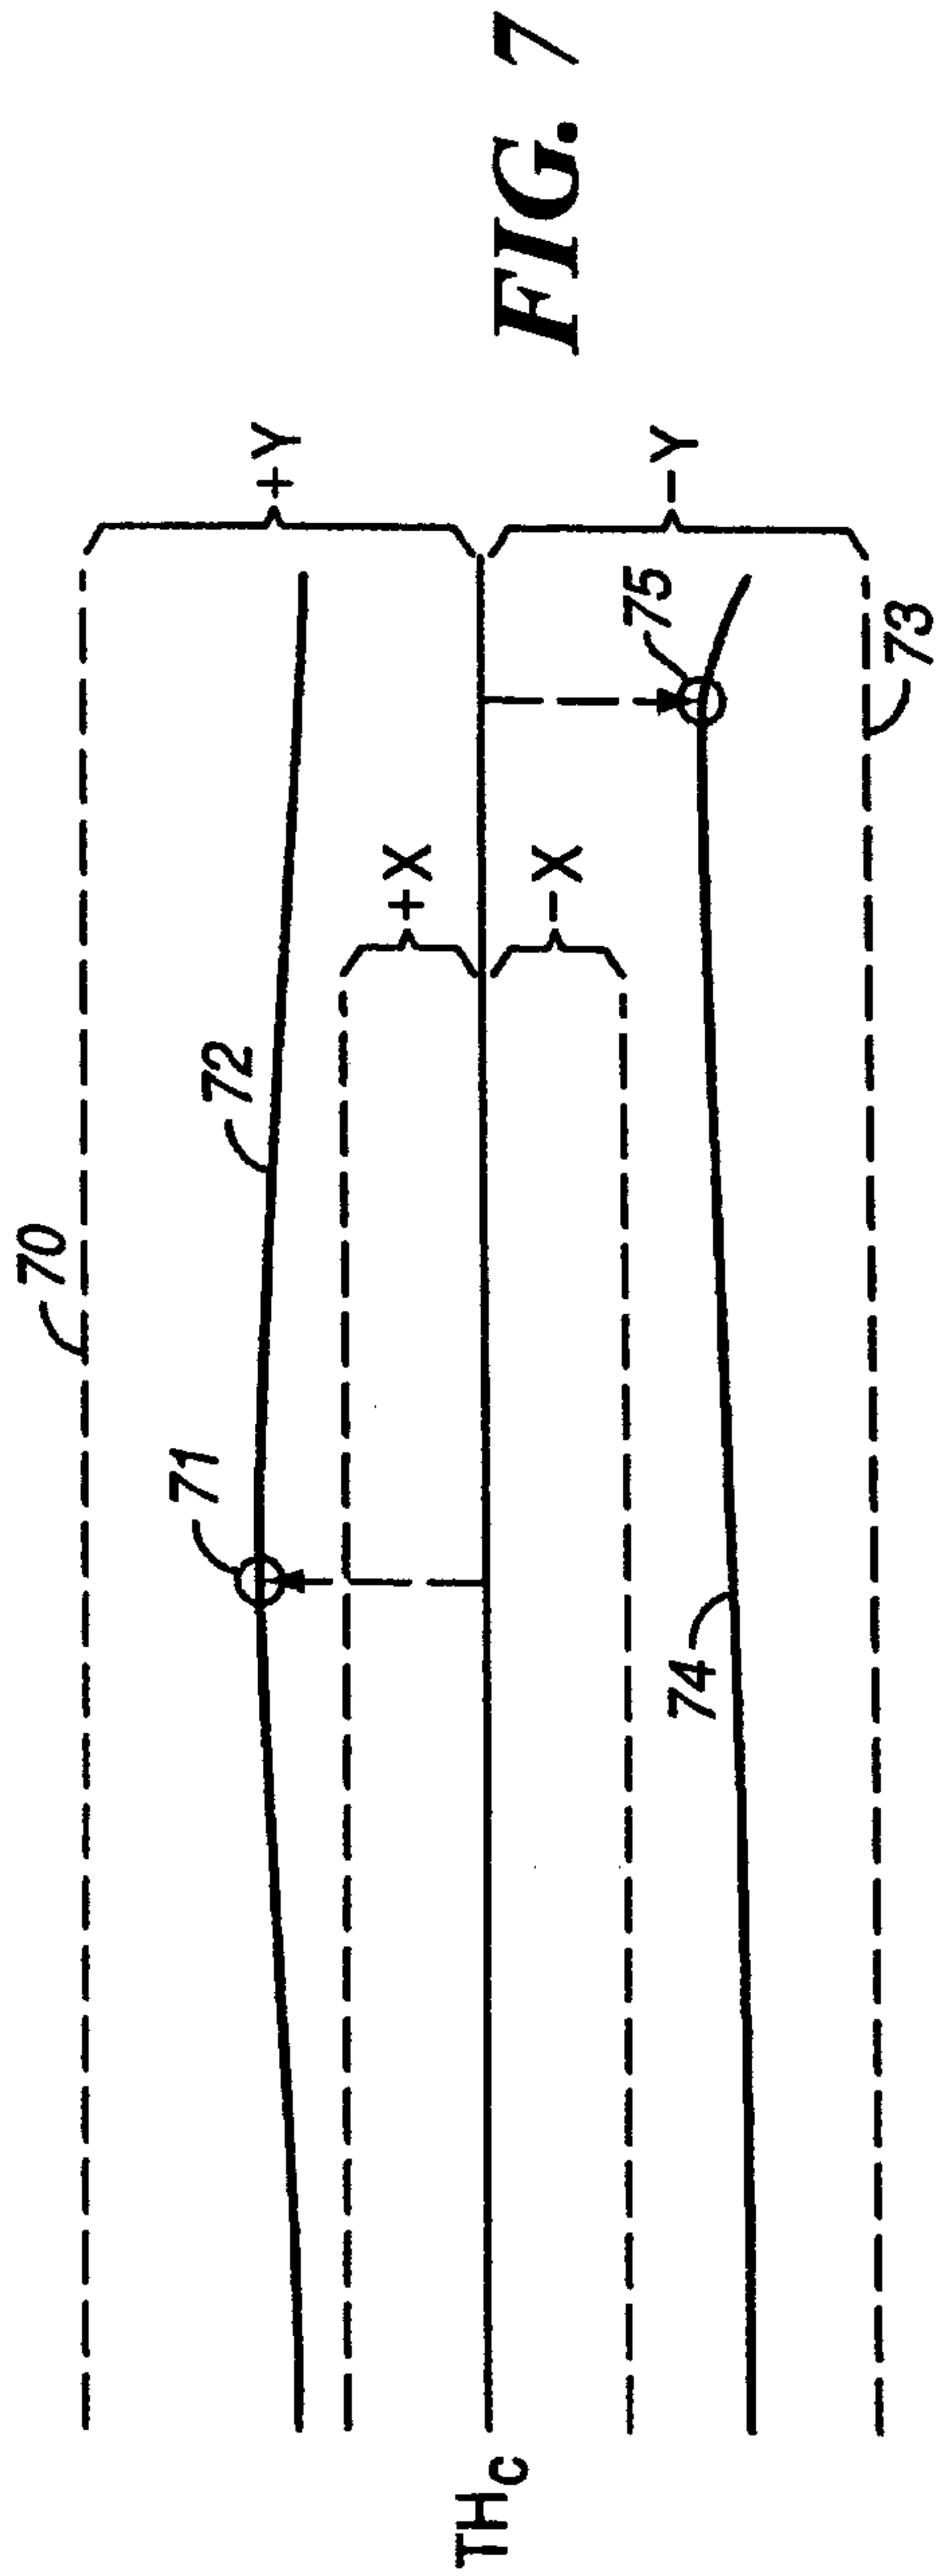


FIG. 9

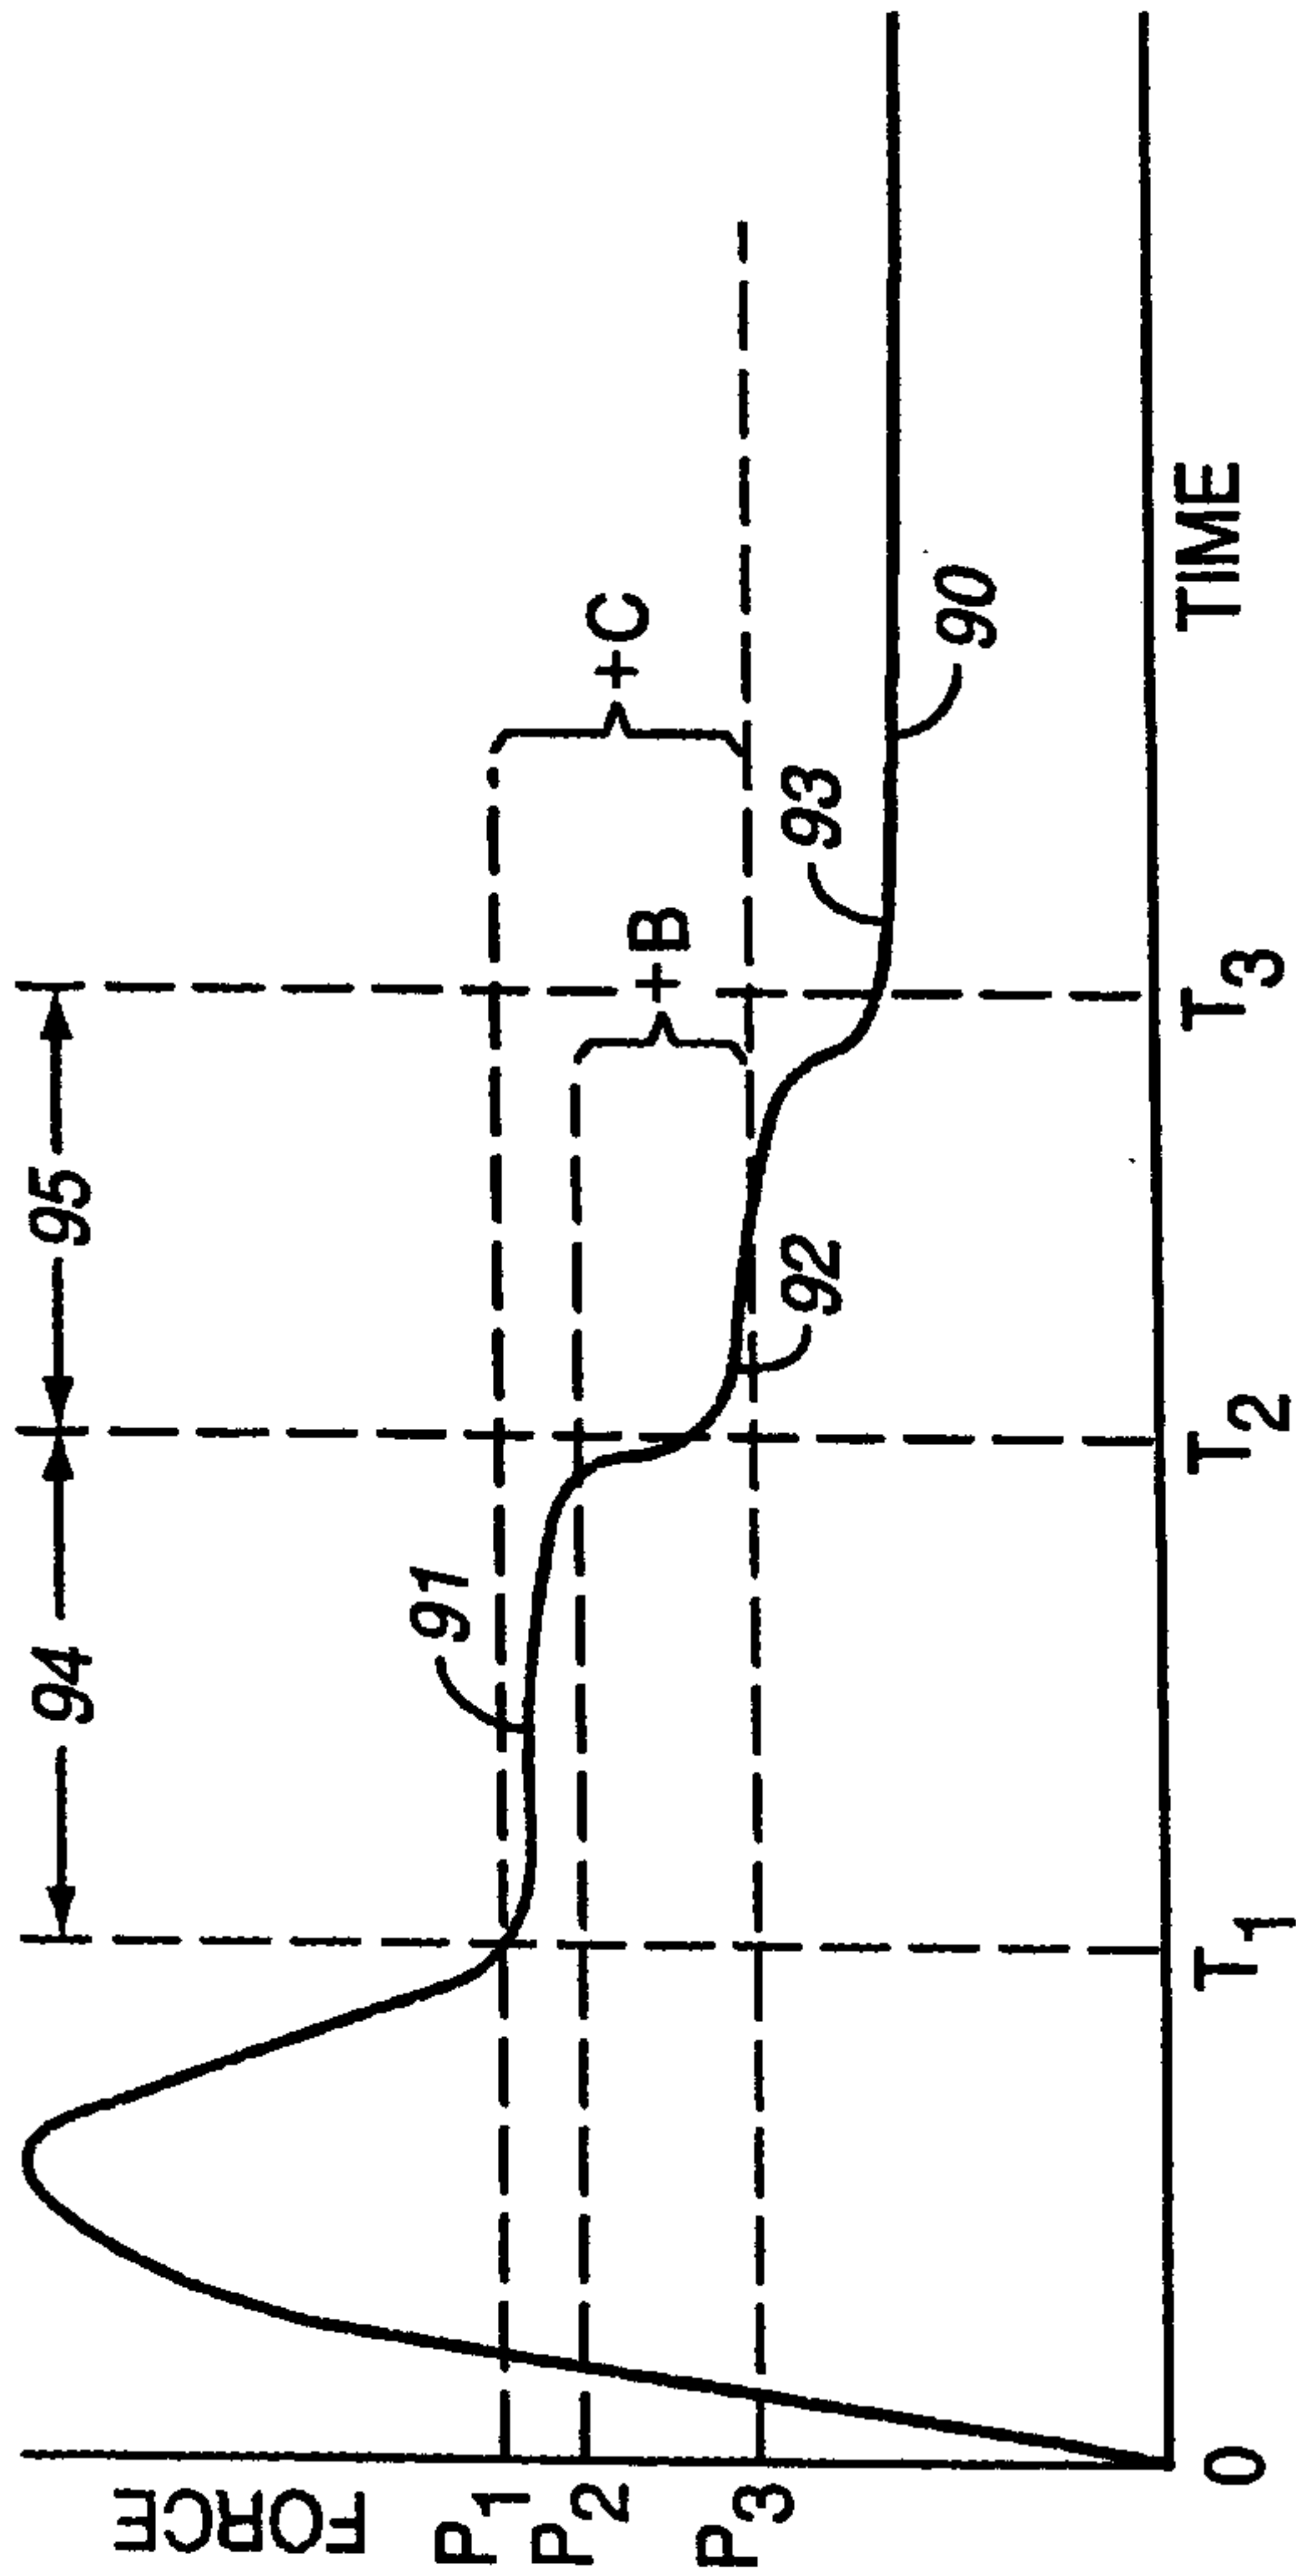


FIG. 10

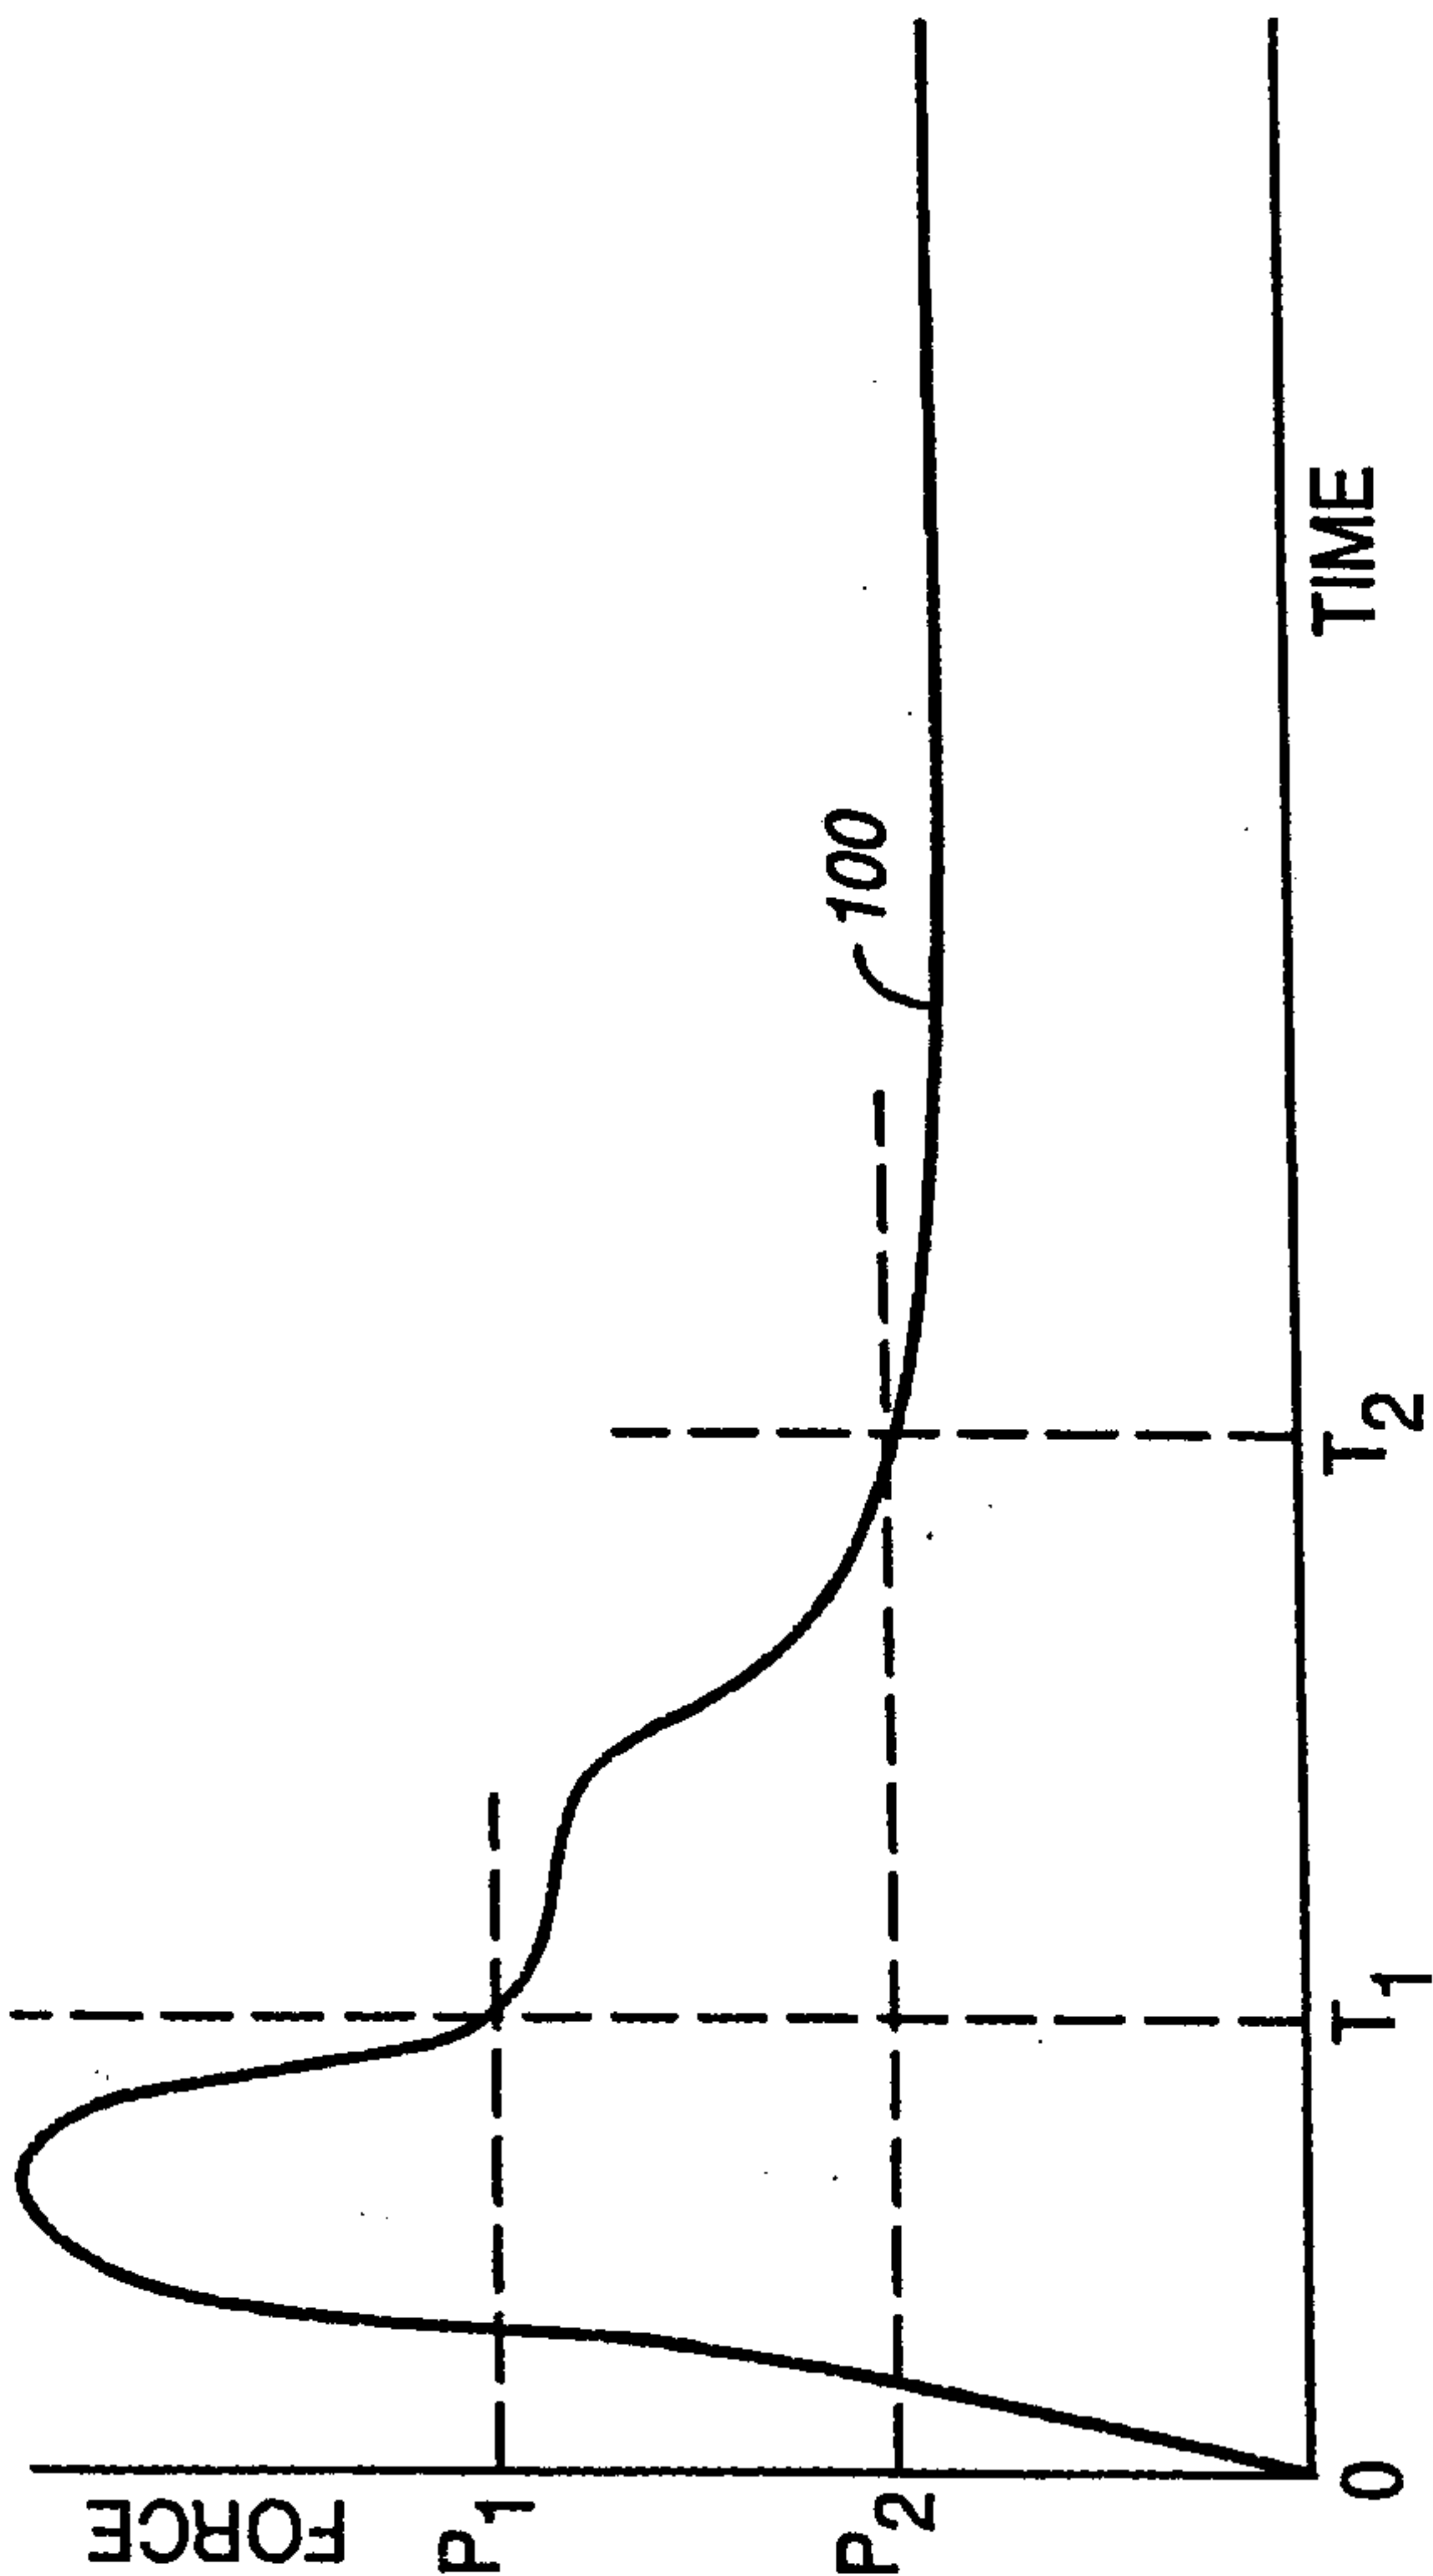


FIG. 11

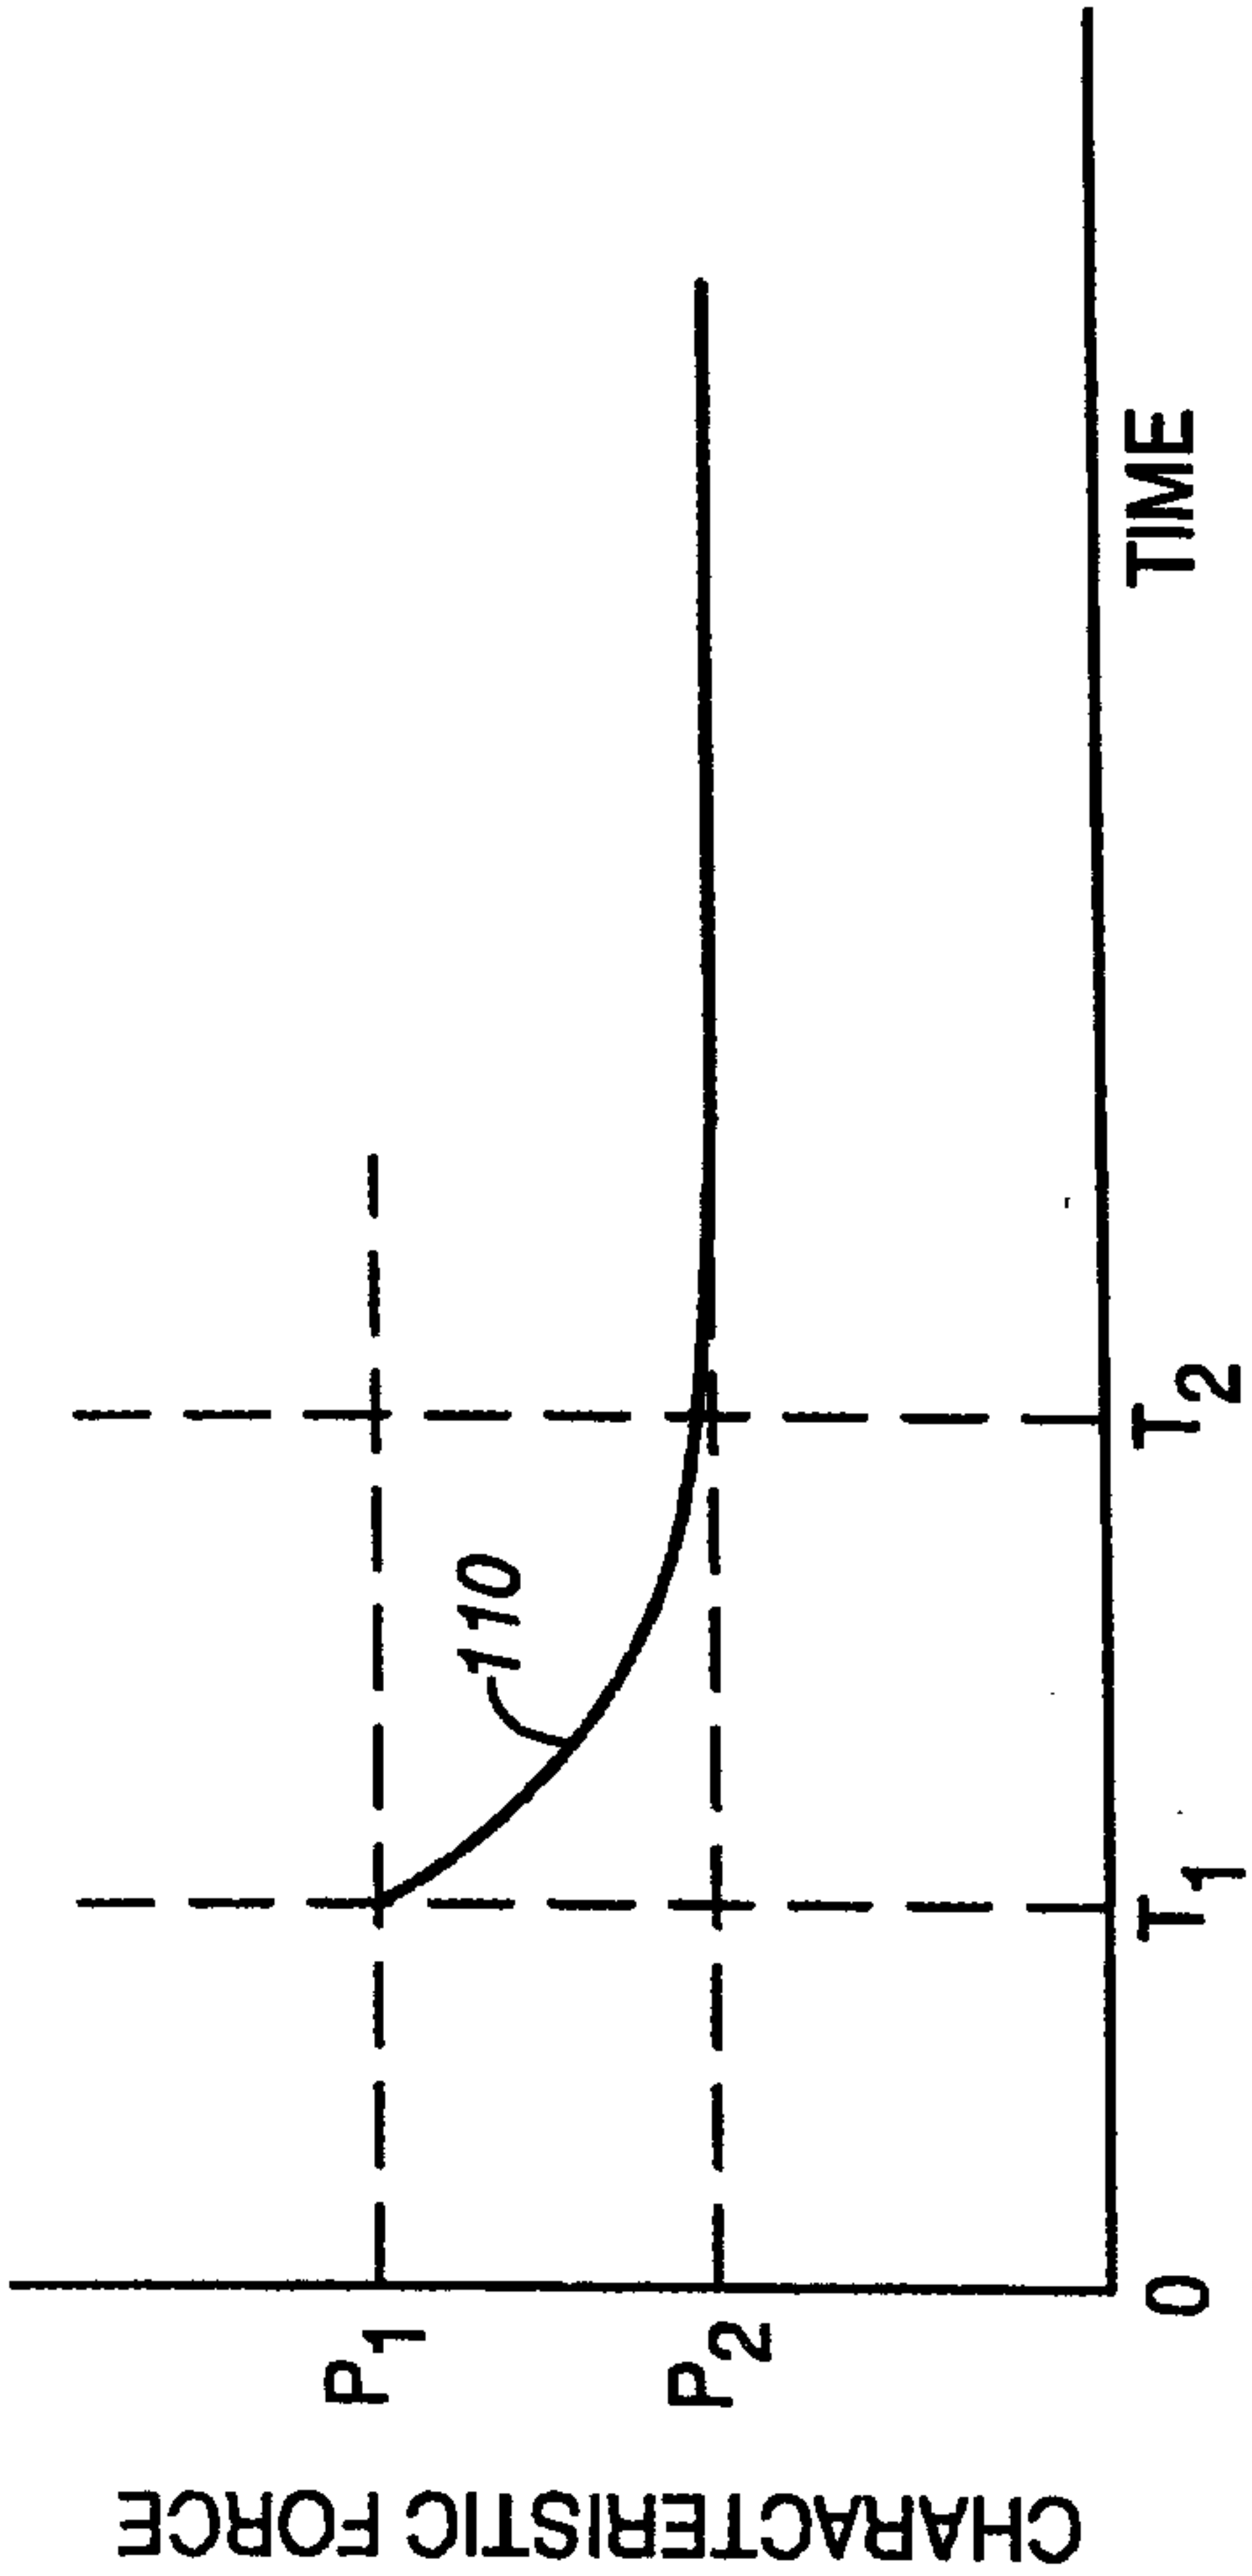


FIG. 12

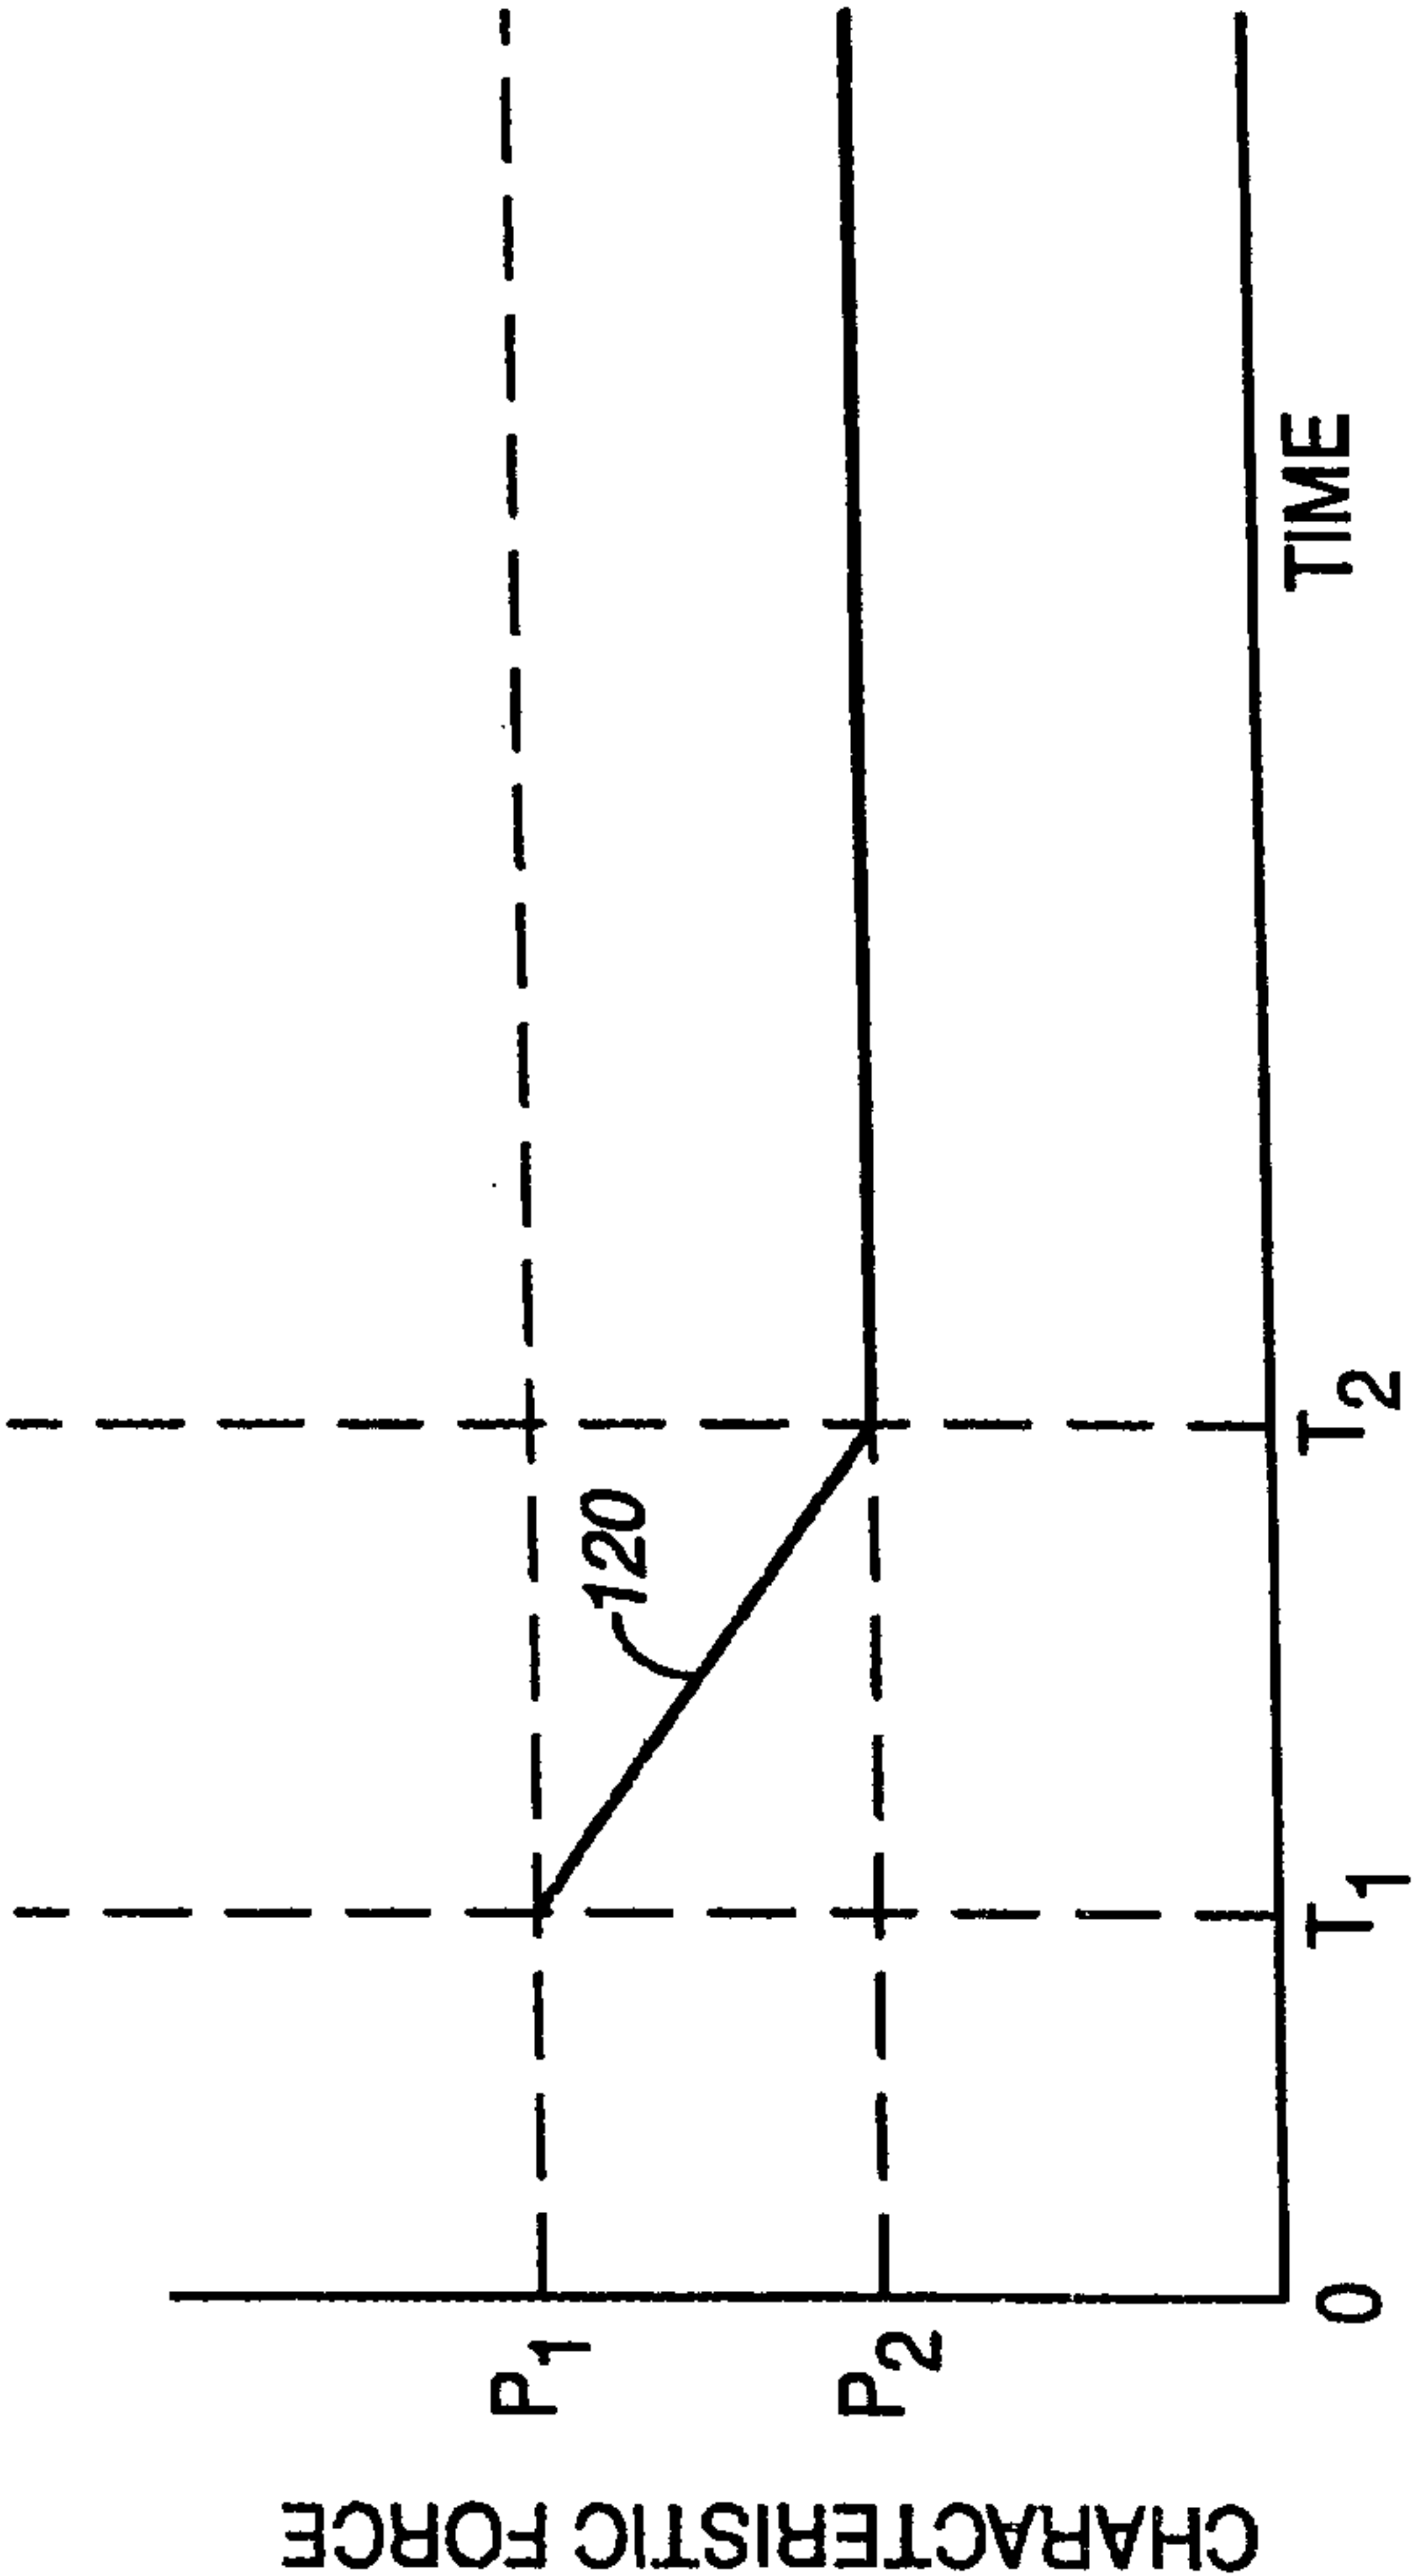


FIG. 13

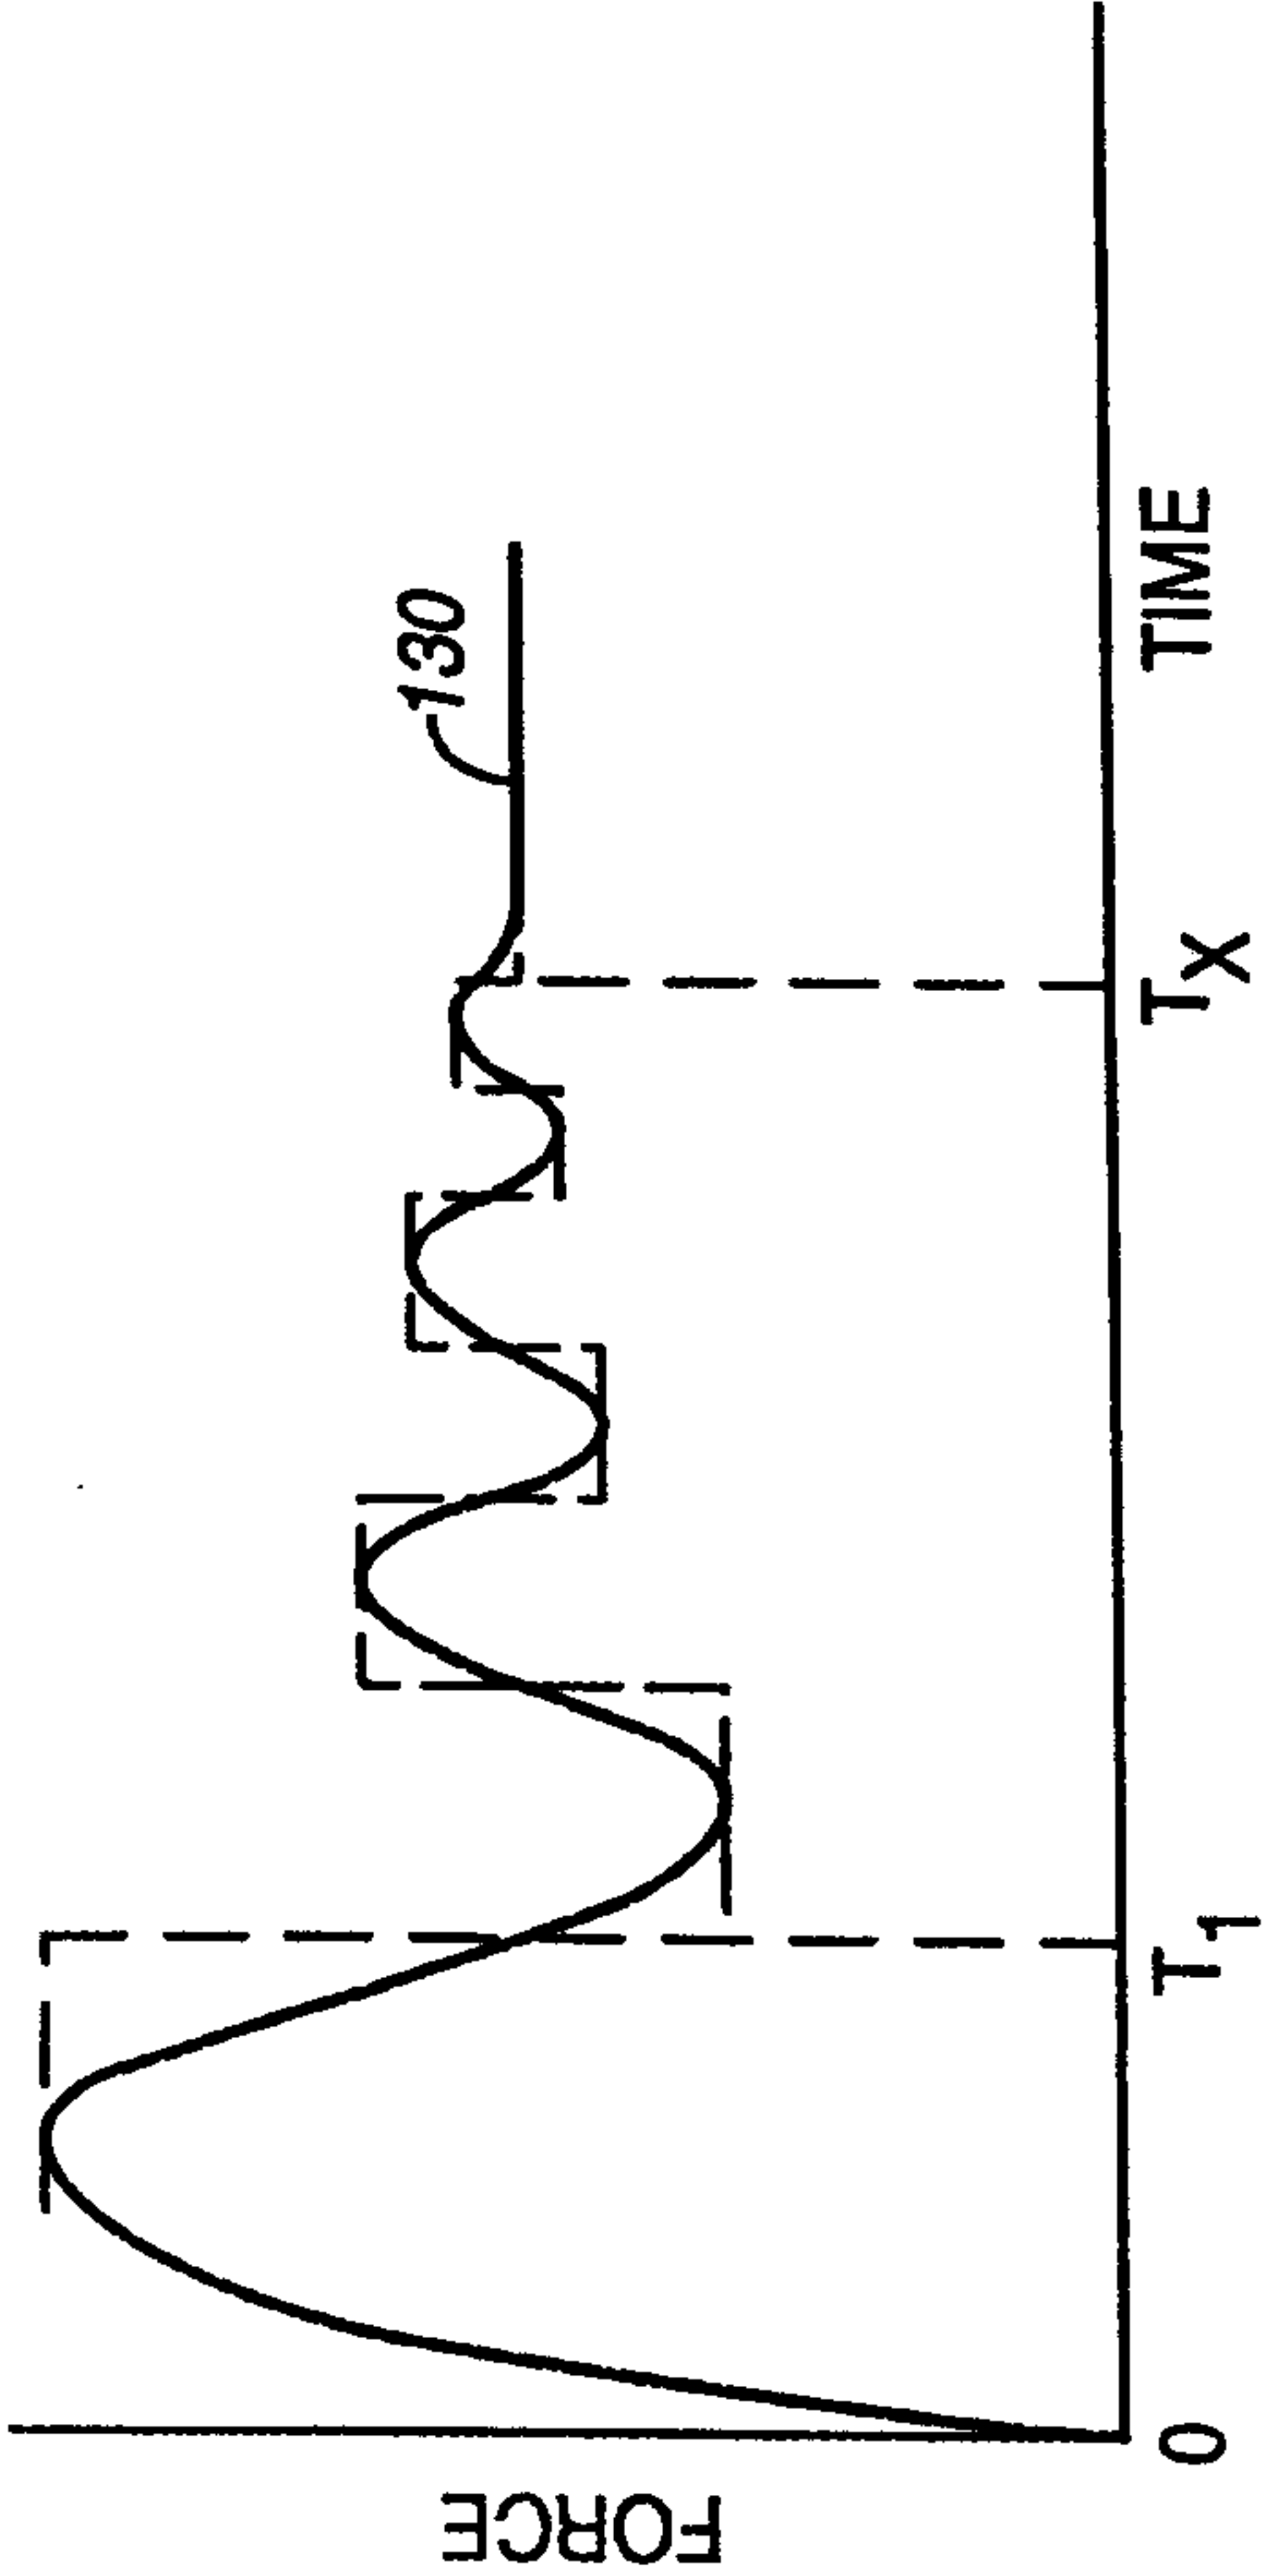
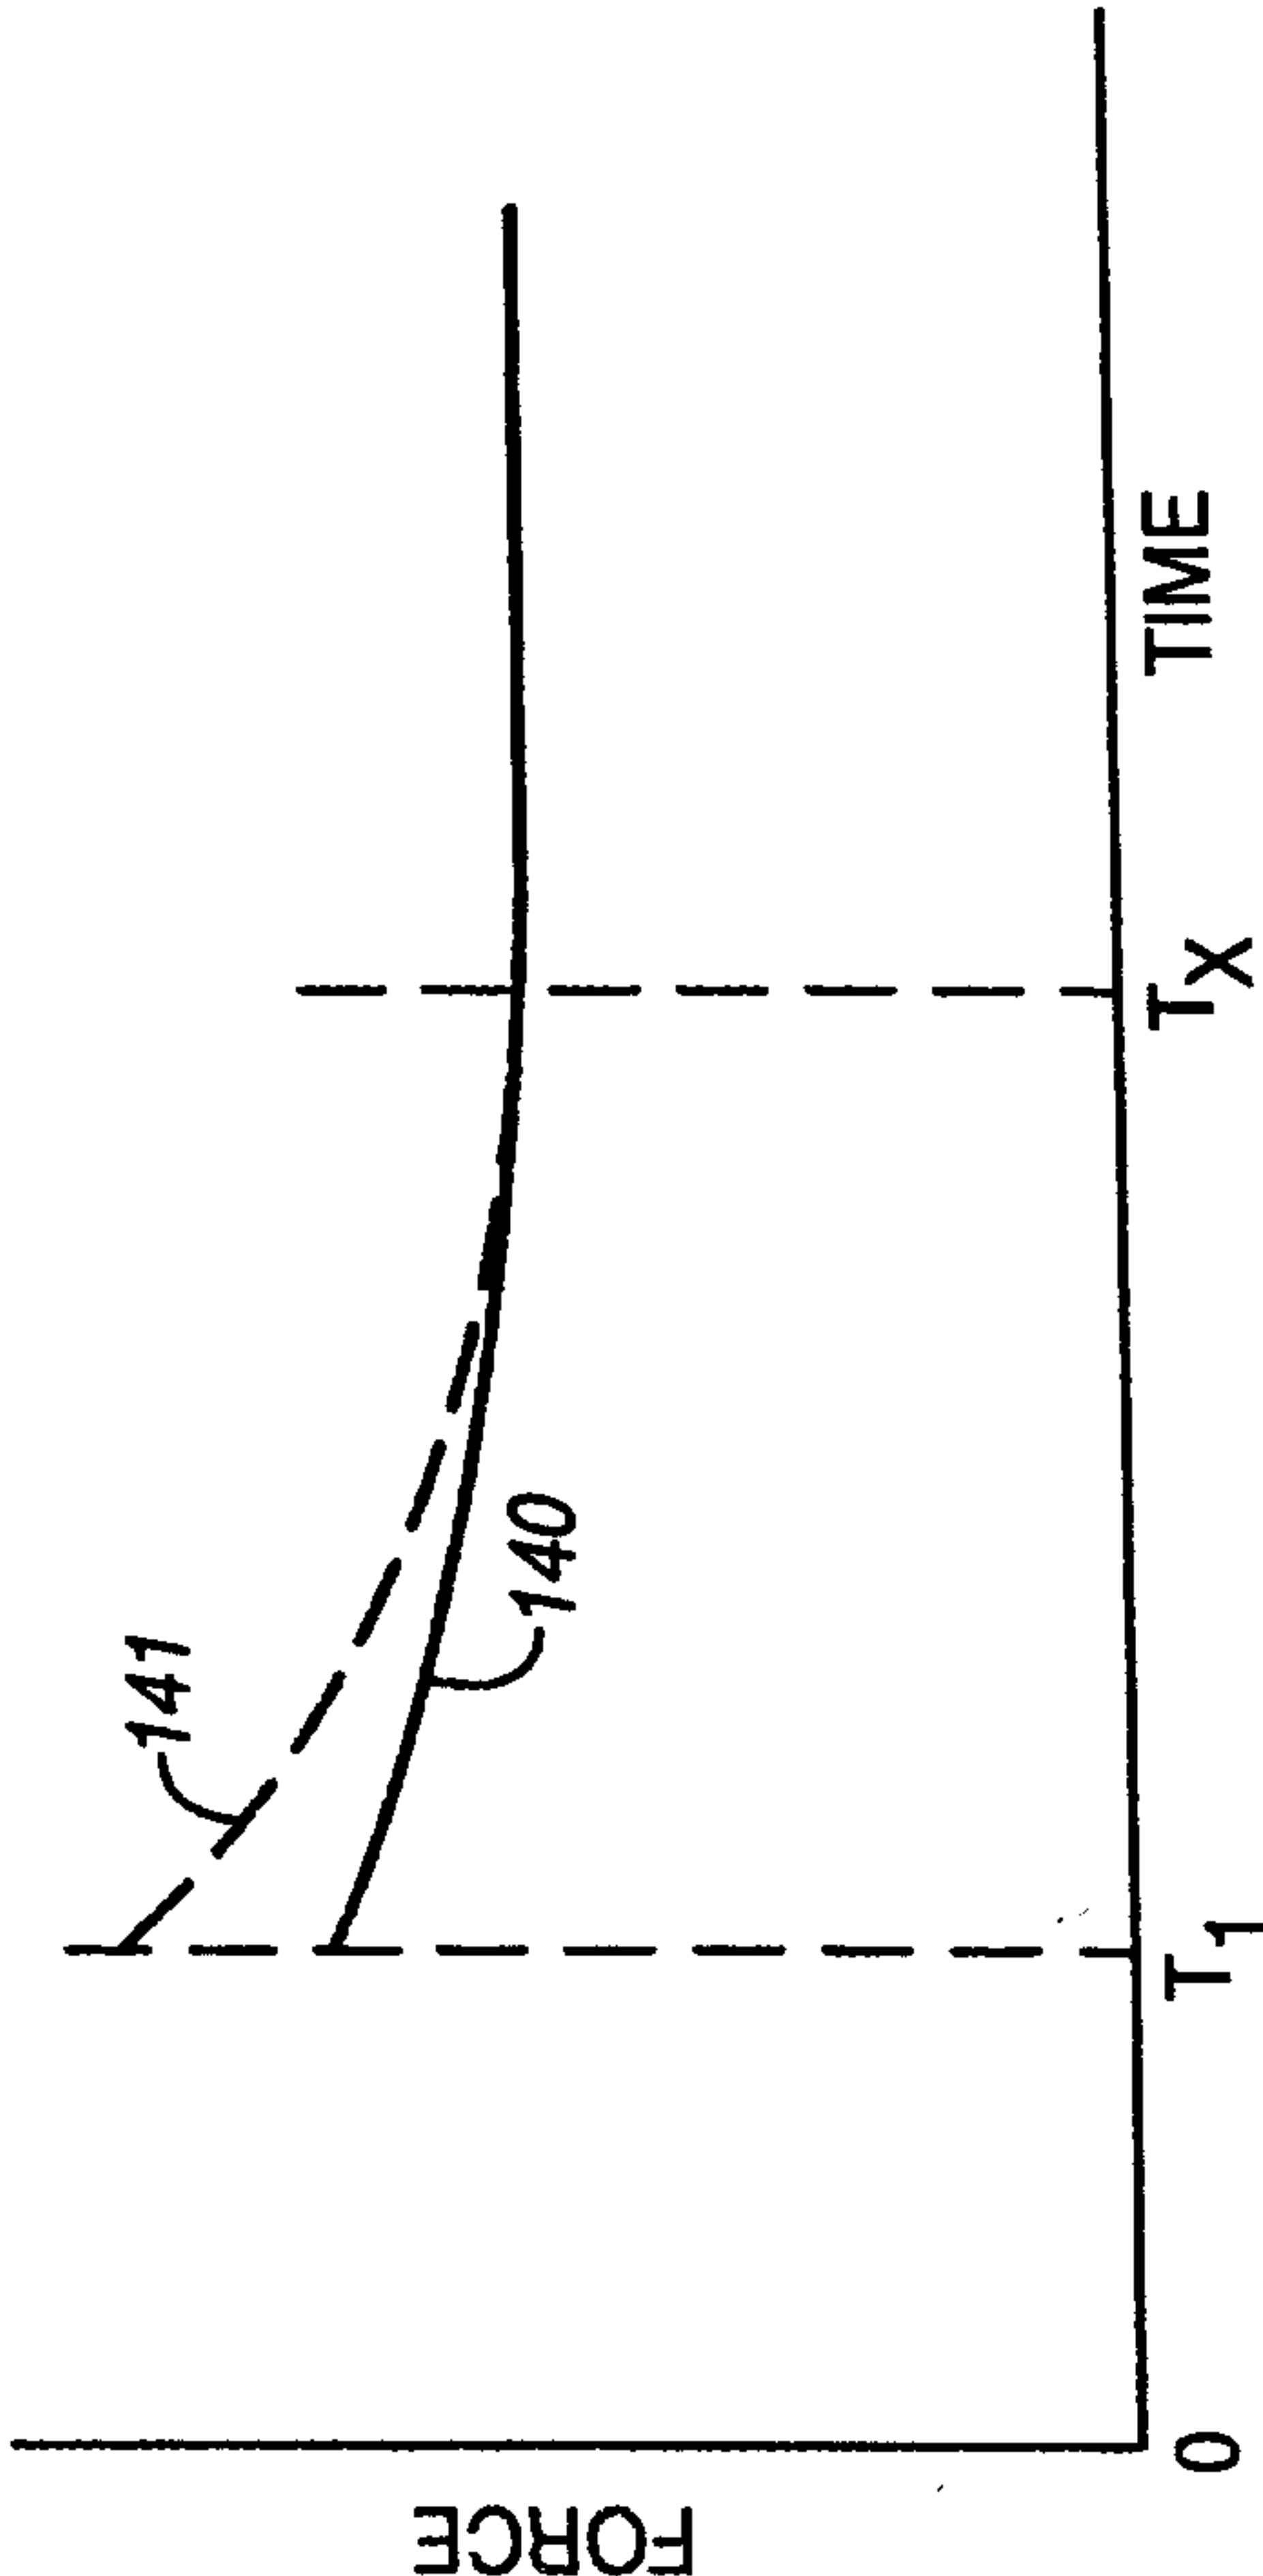


FIG. 14



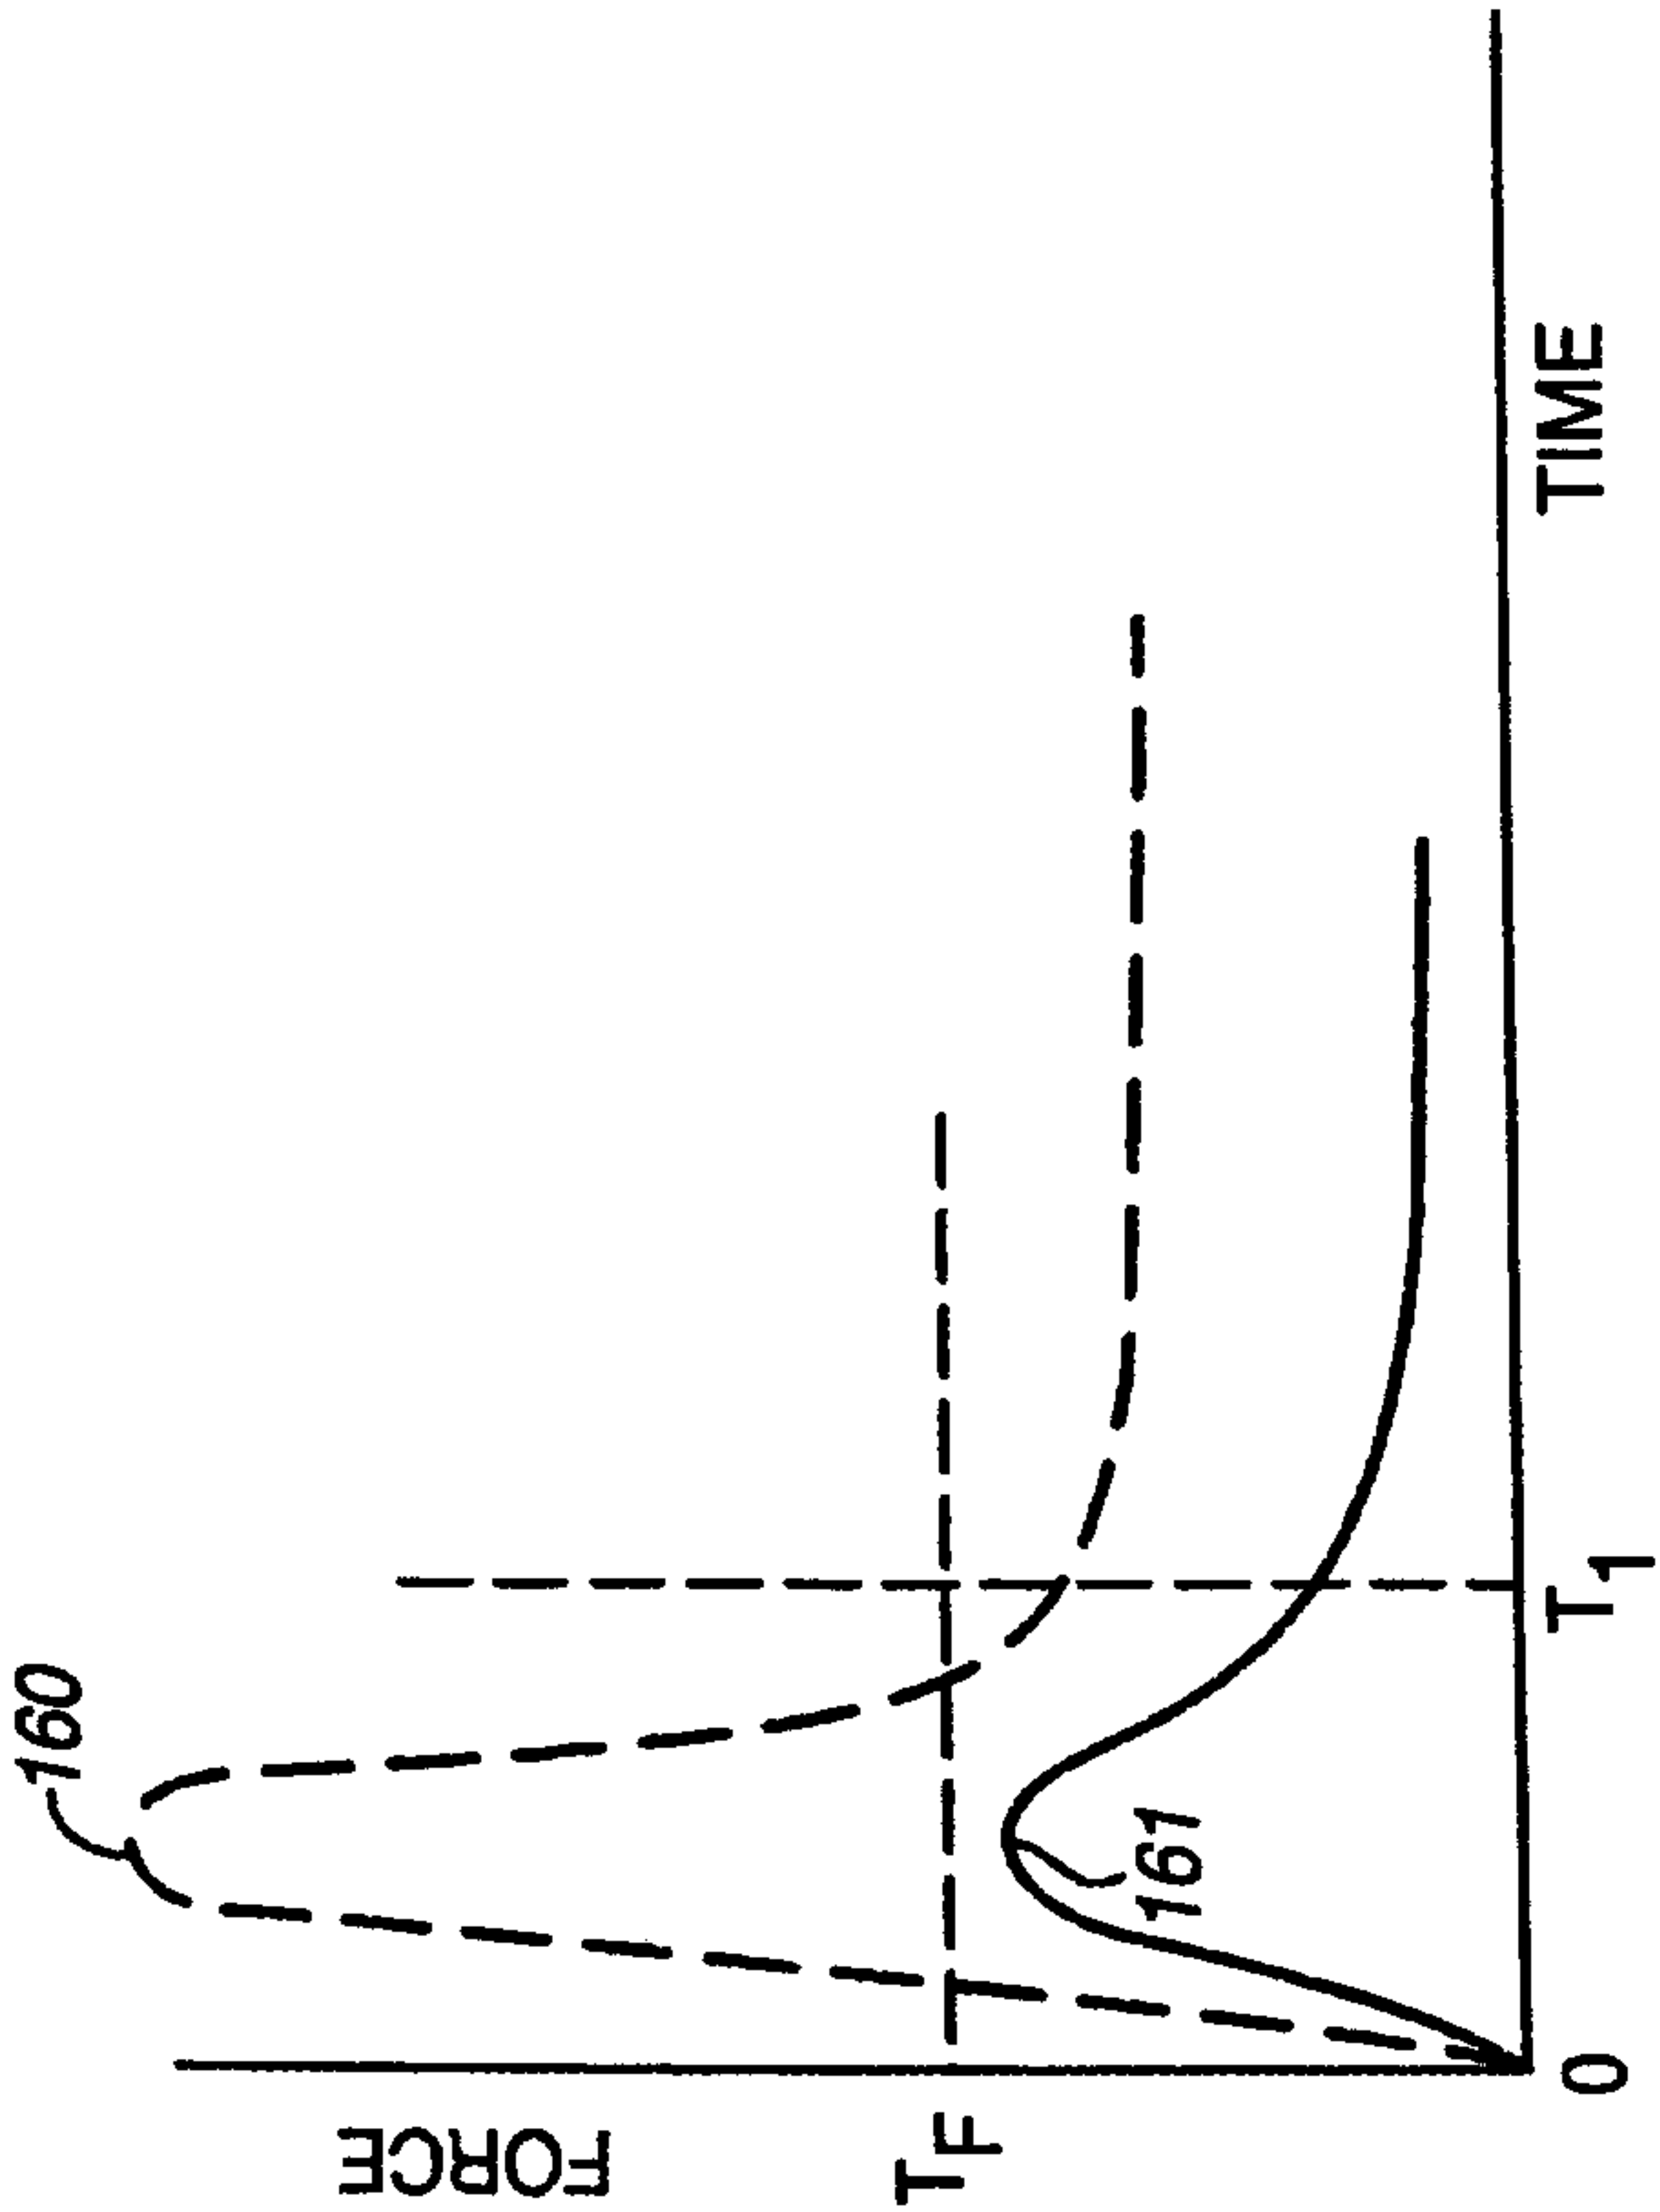


FIG. 16

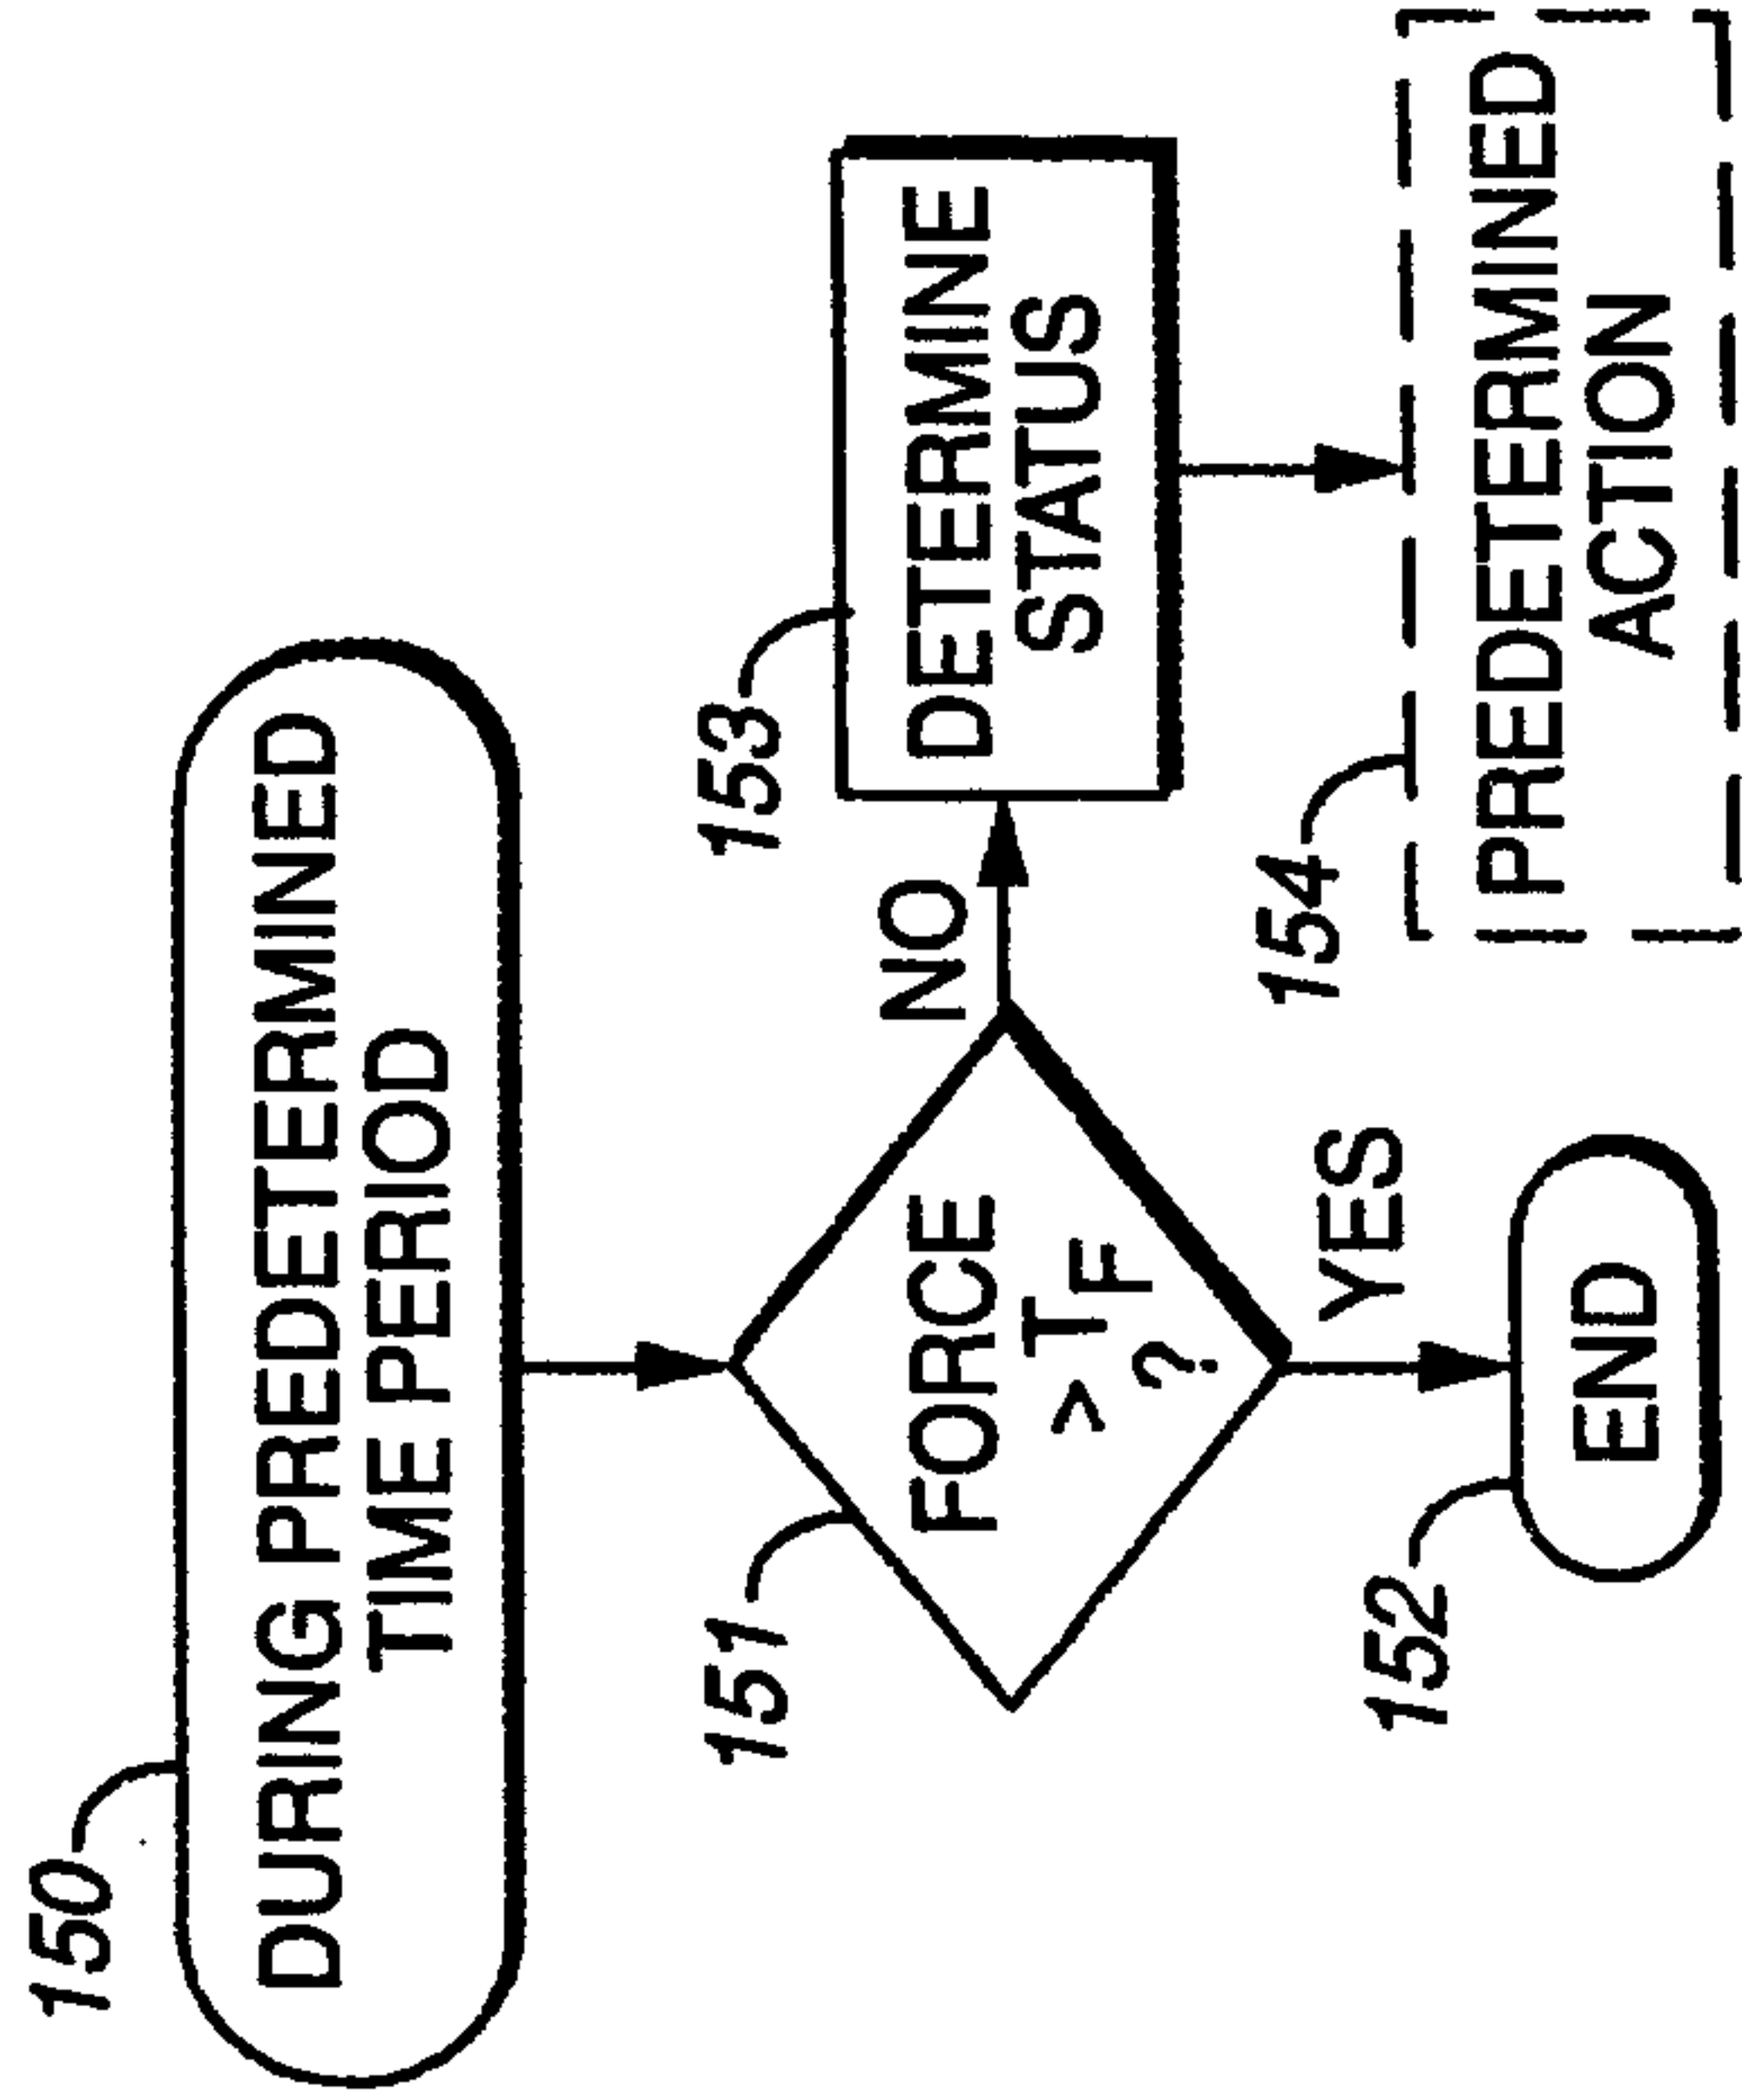


FIG. 15

9/15

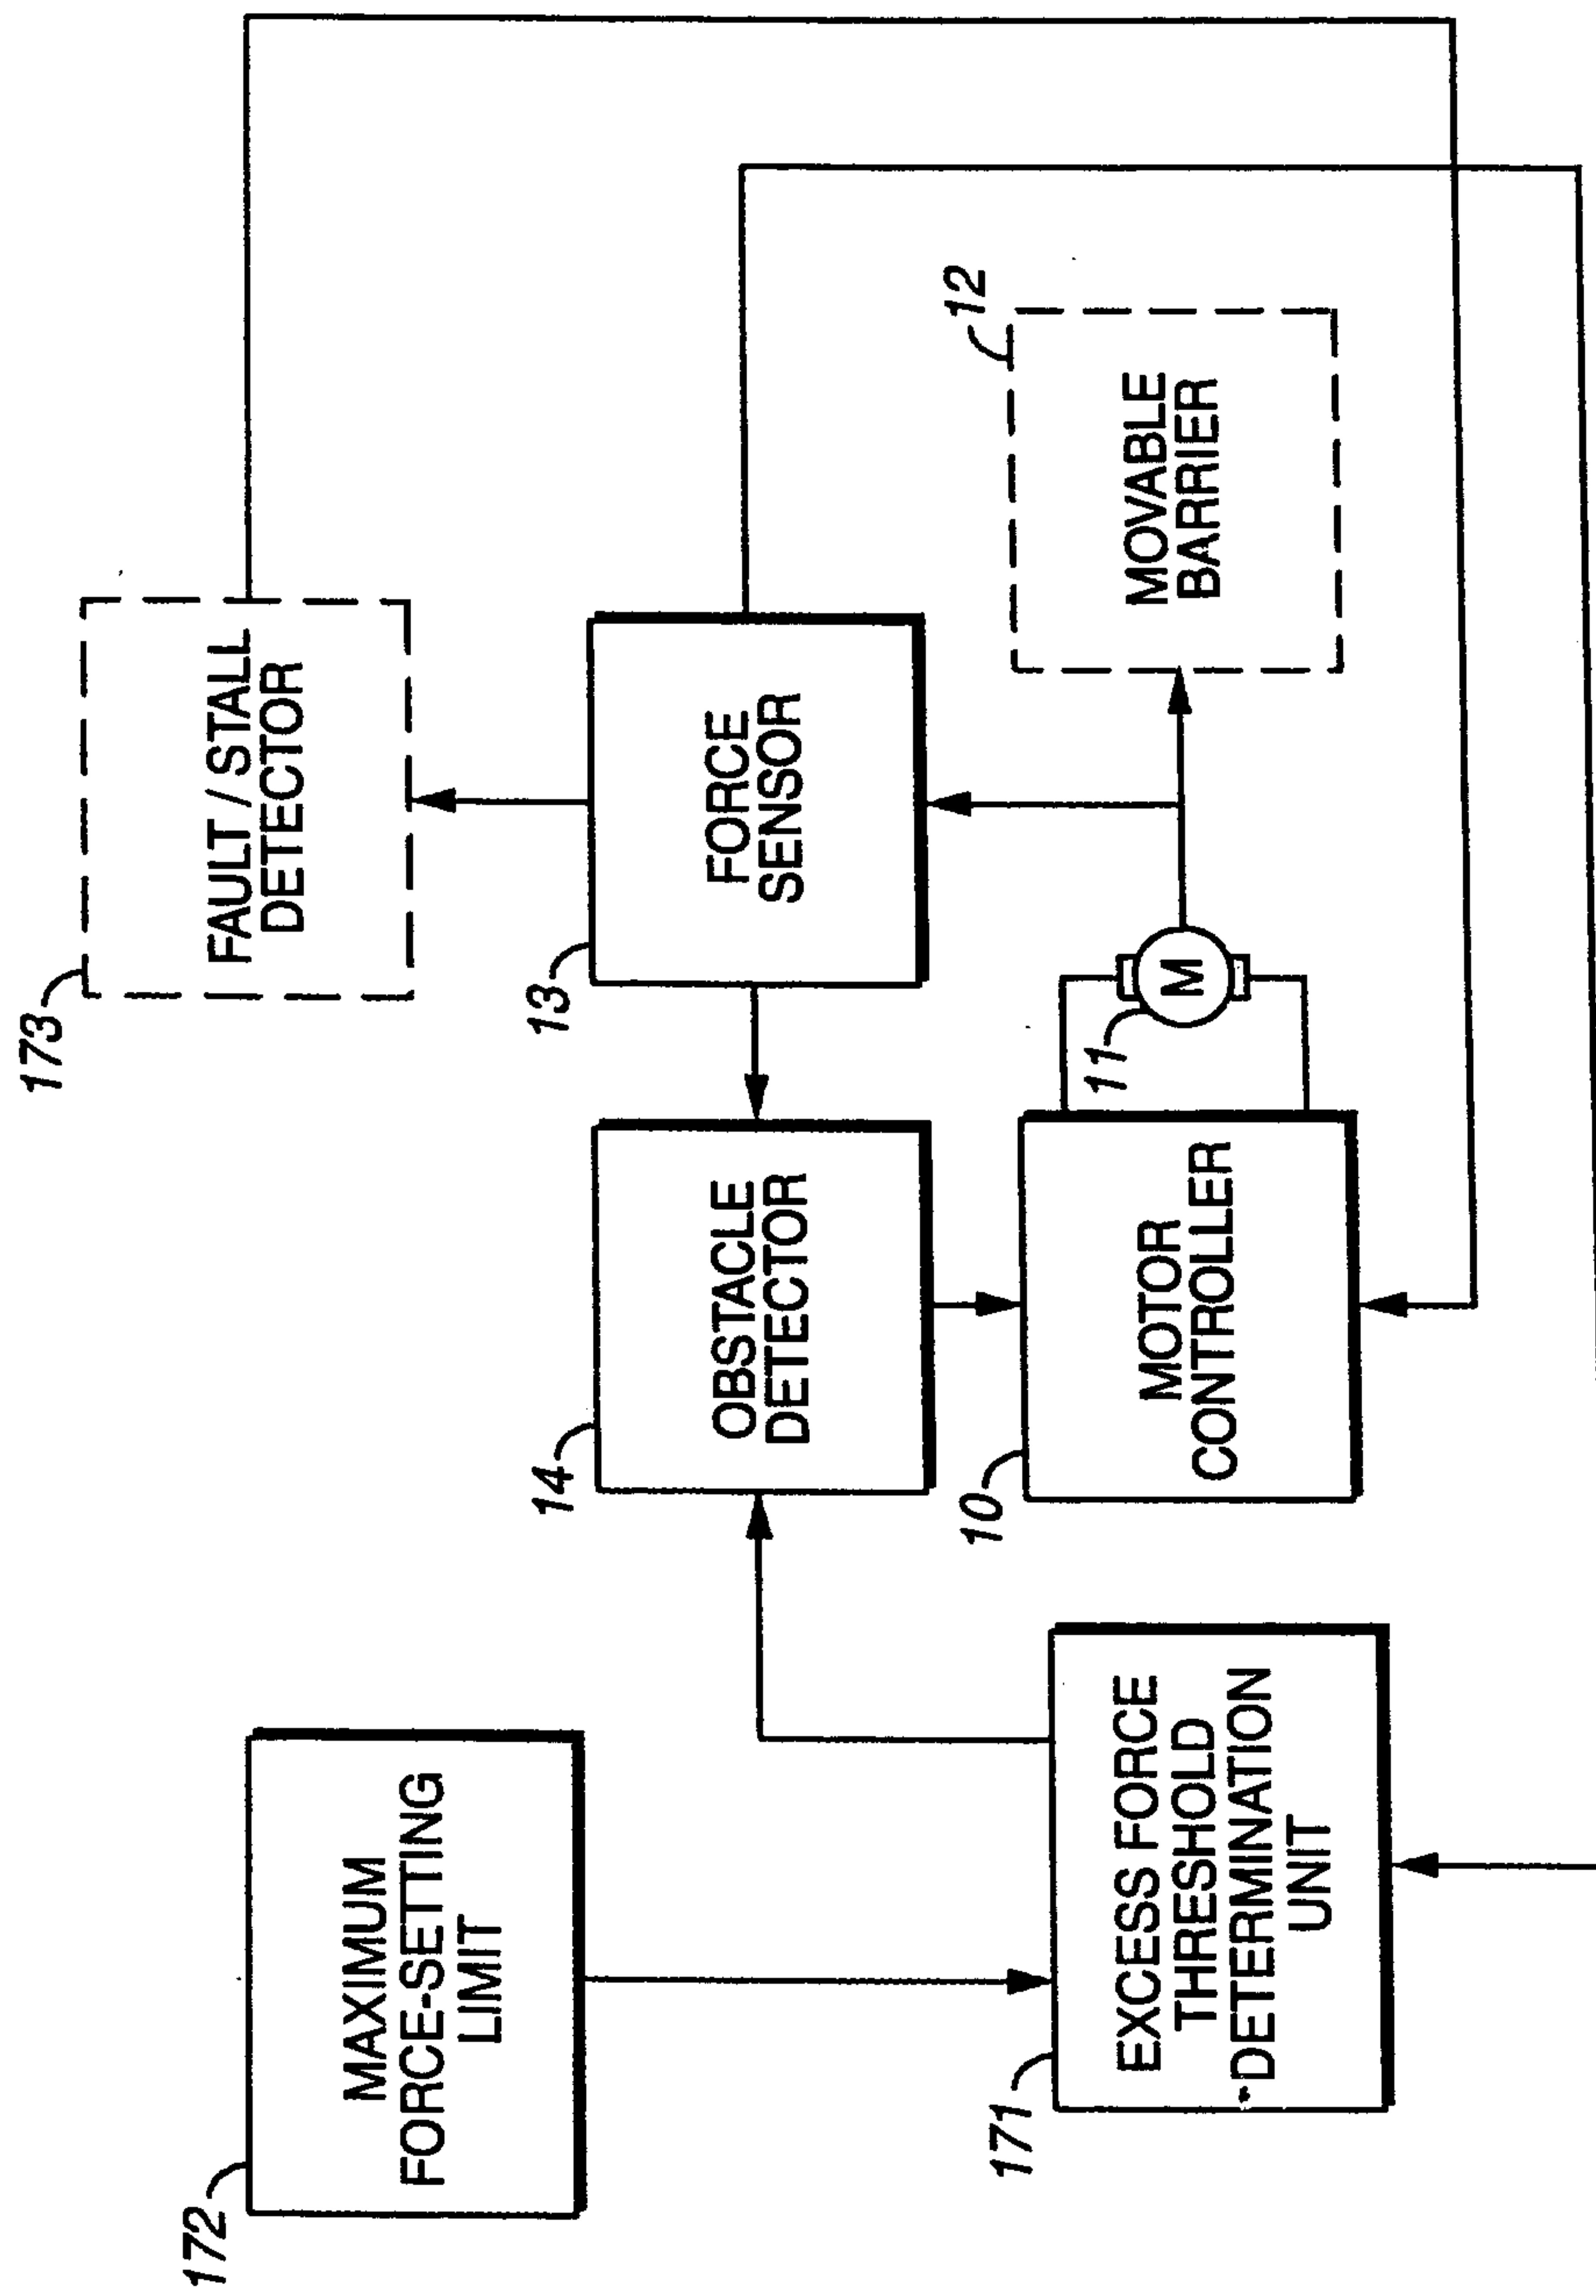


FIG. 17

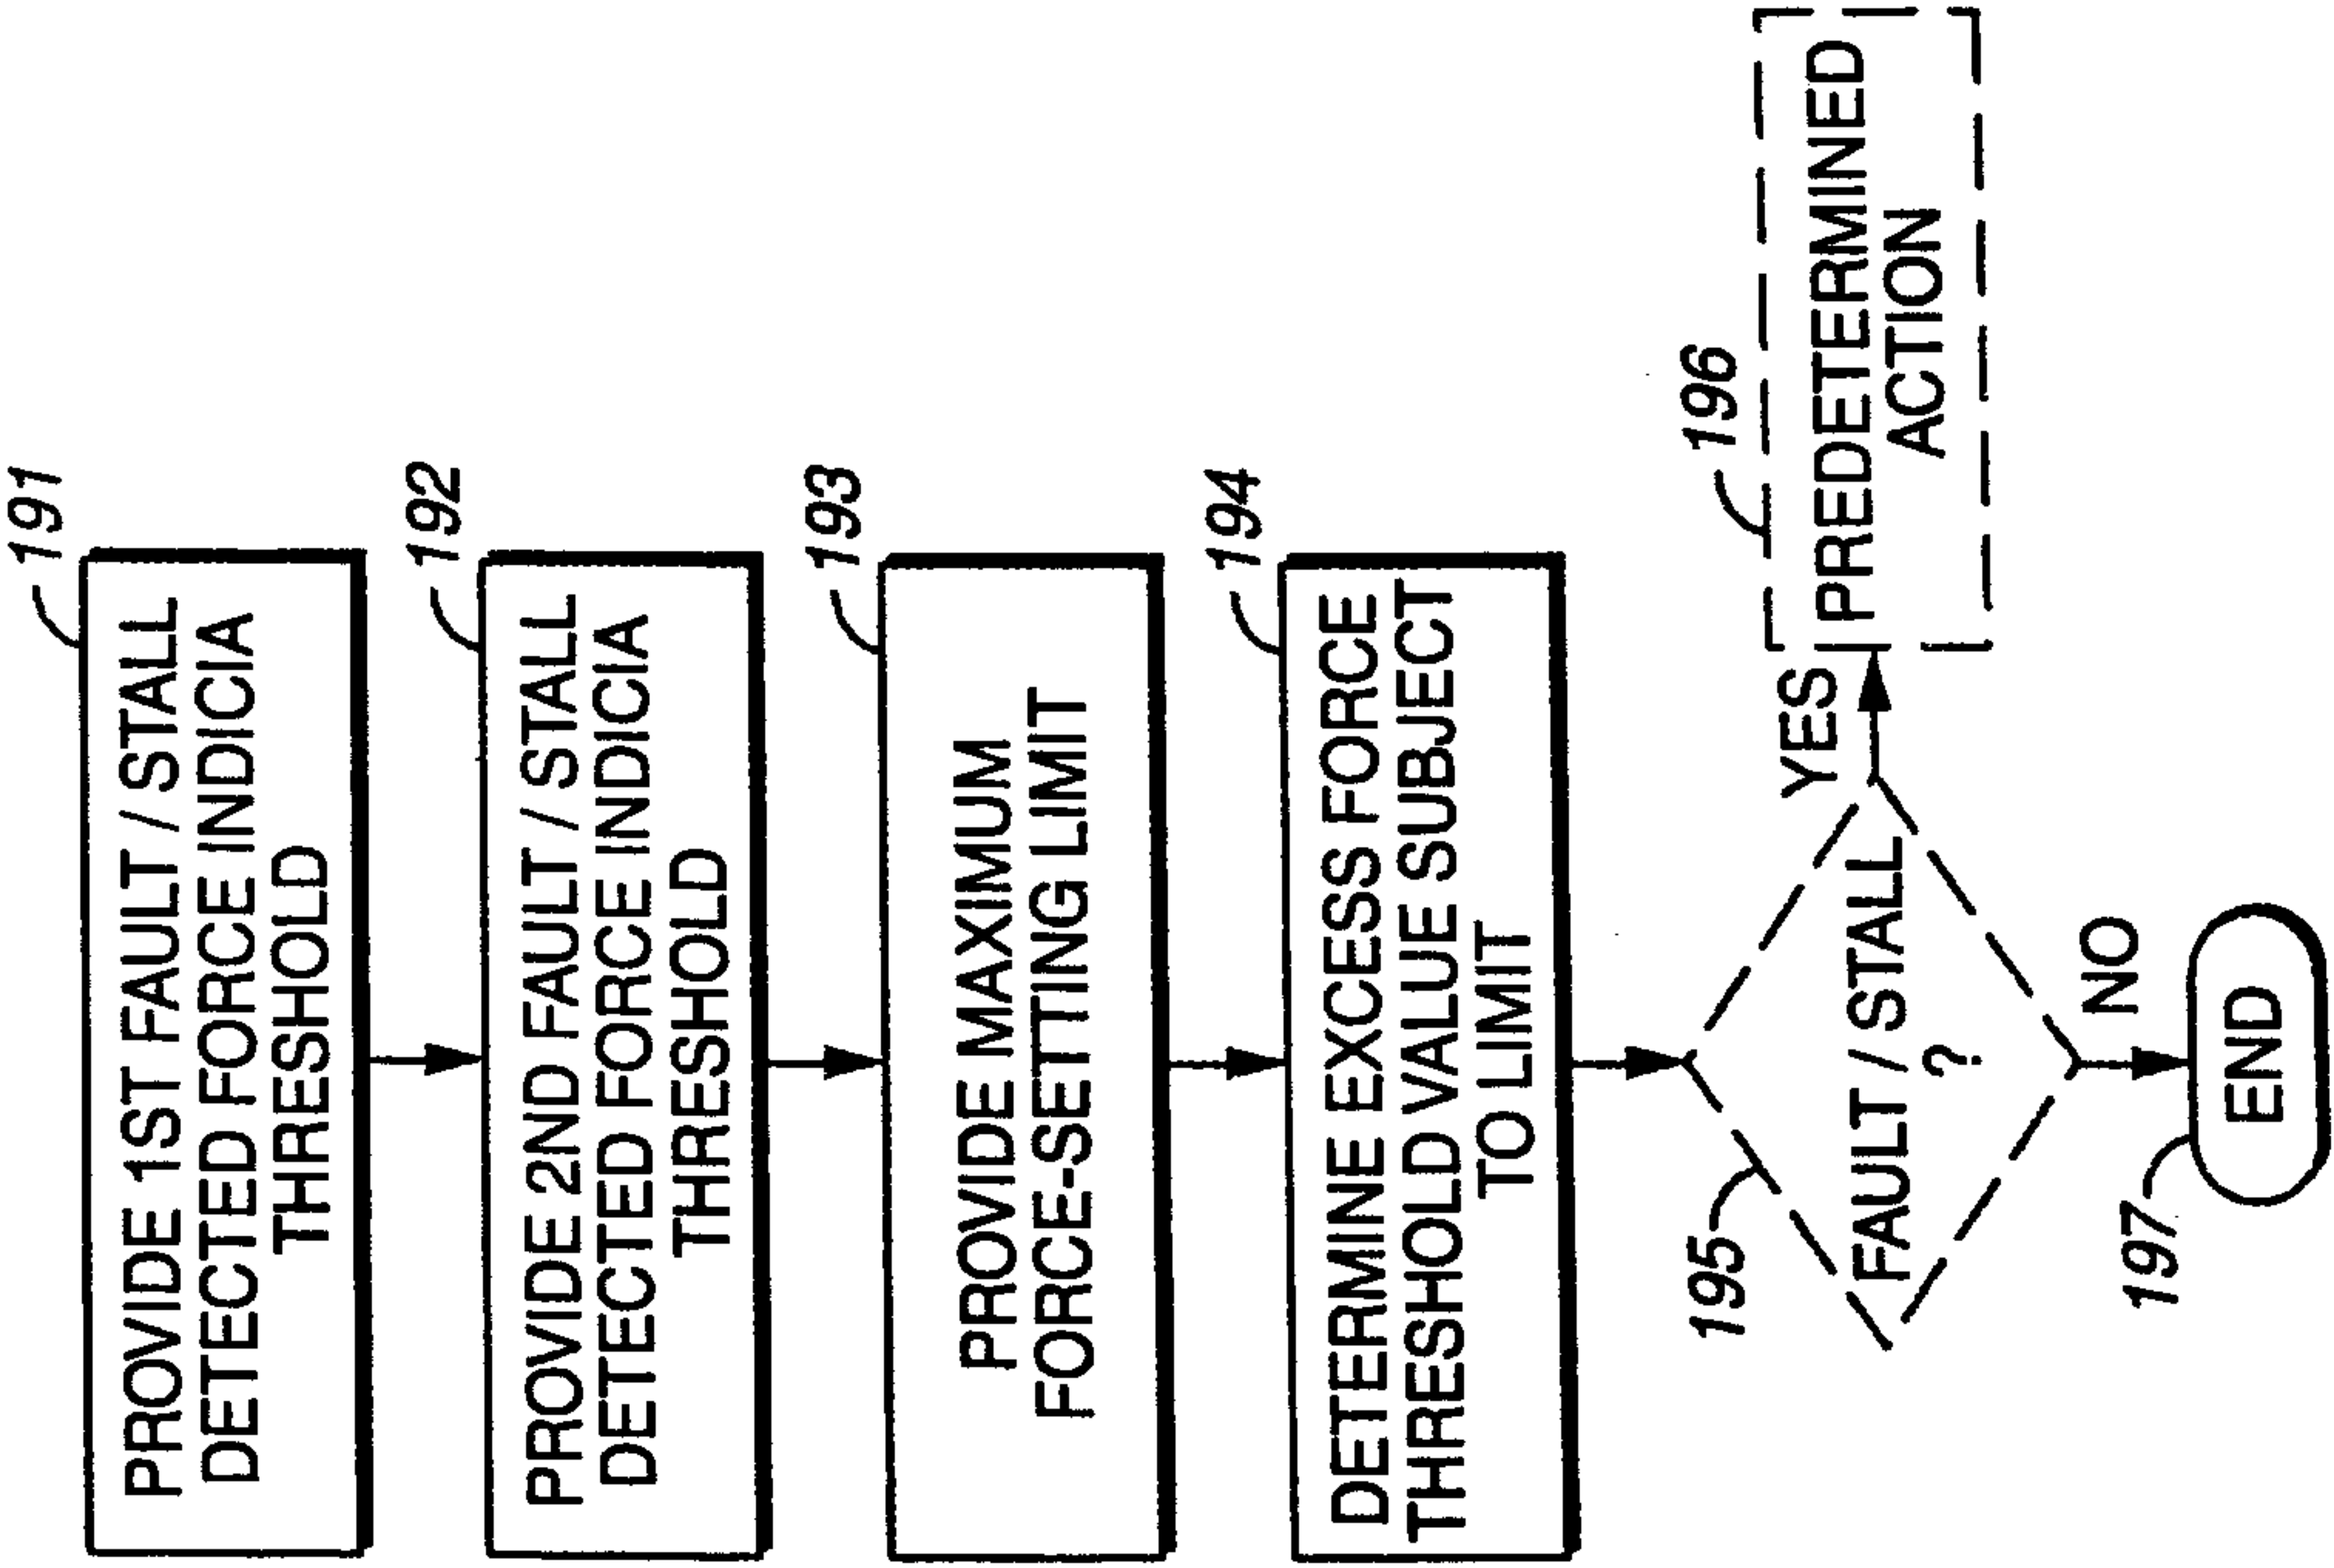


FIG. 19

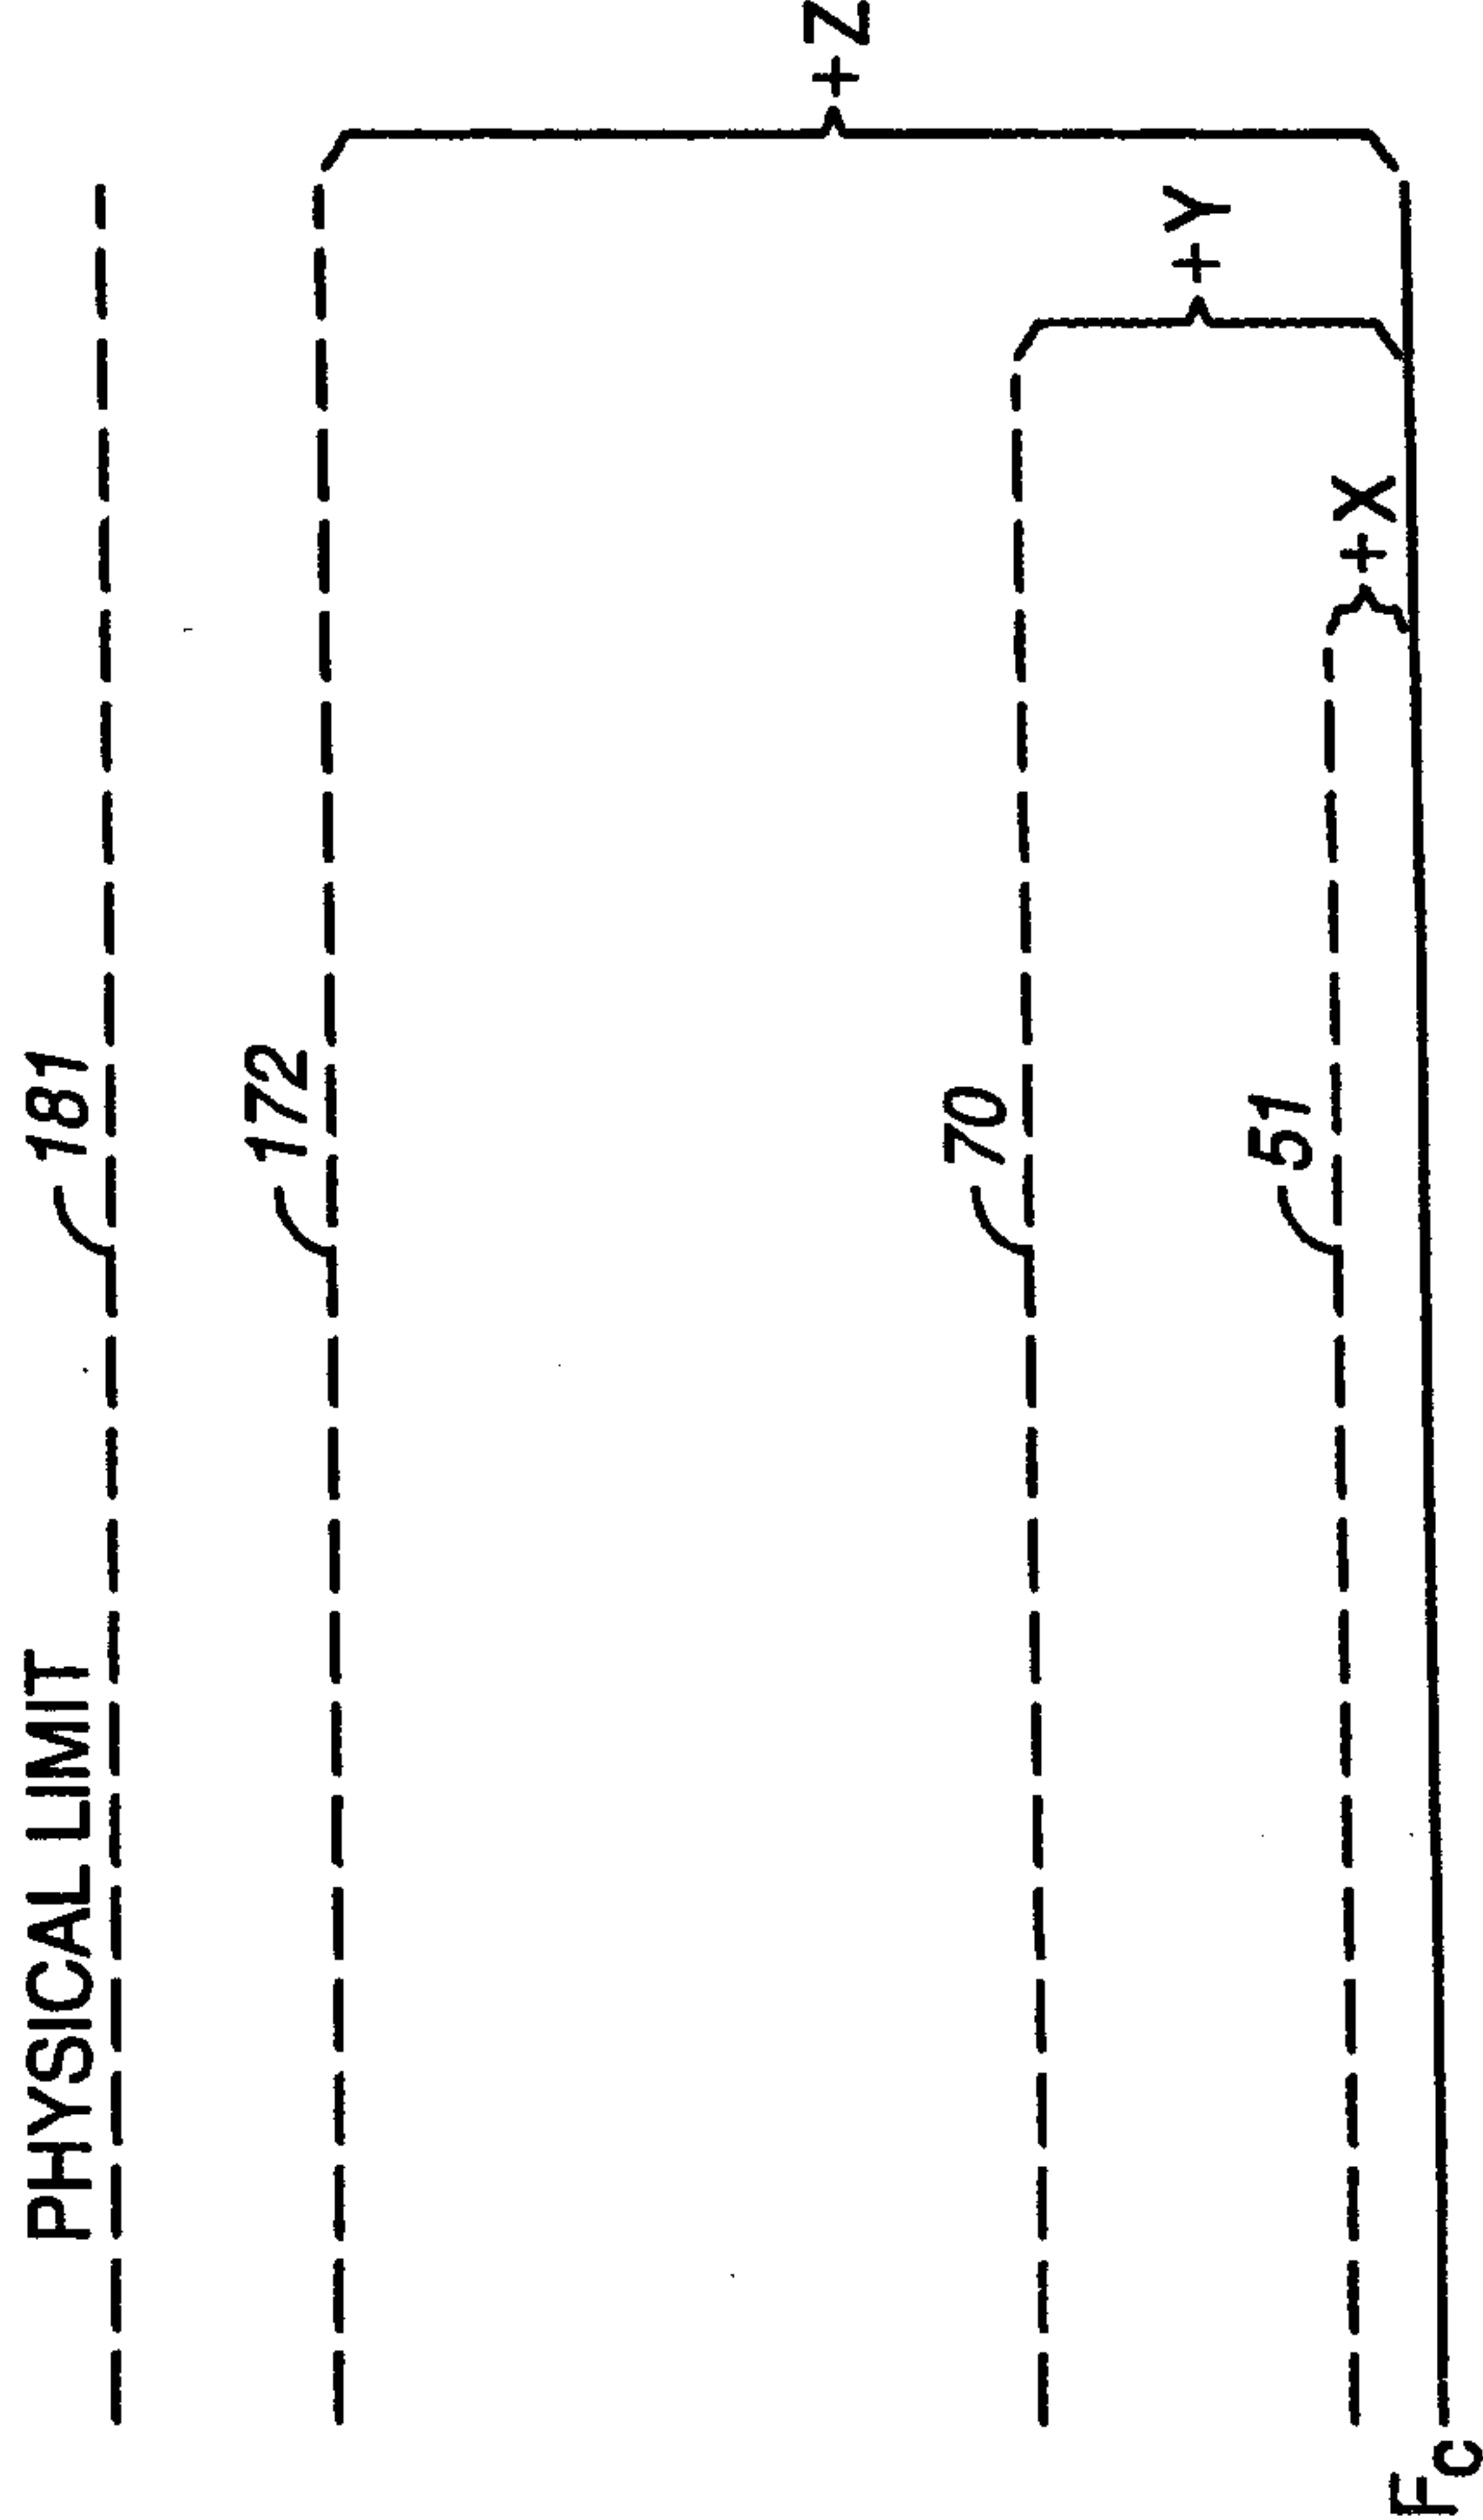


FIG. 18

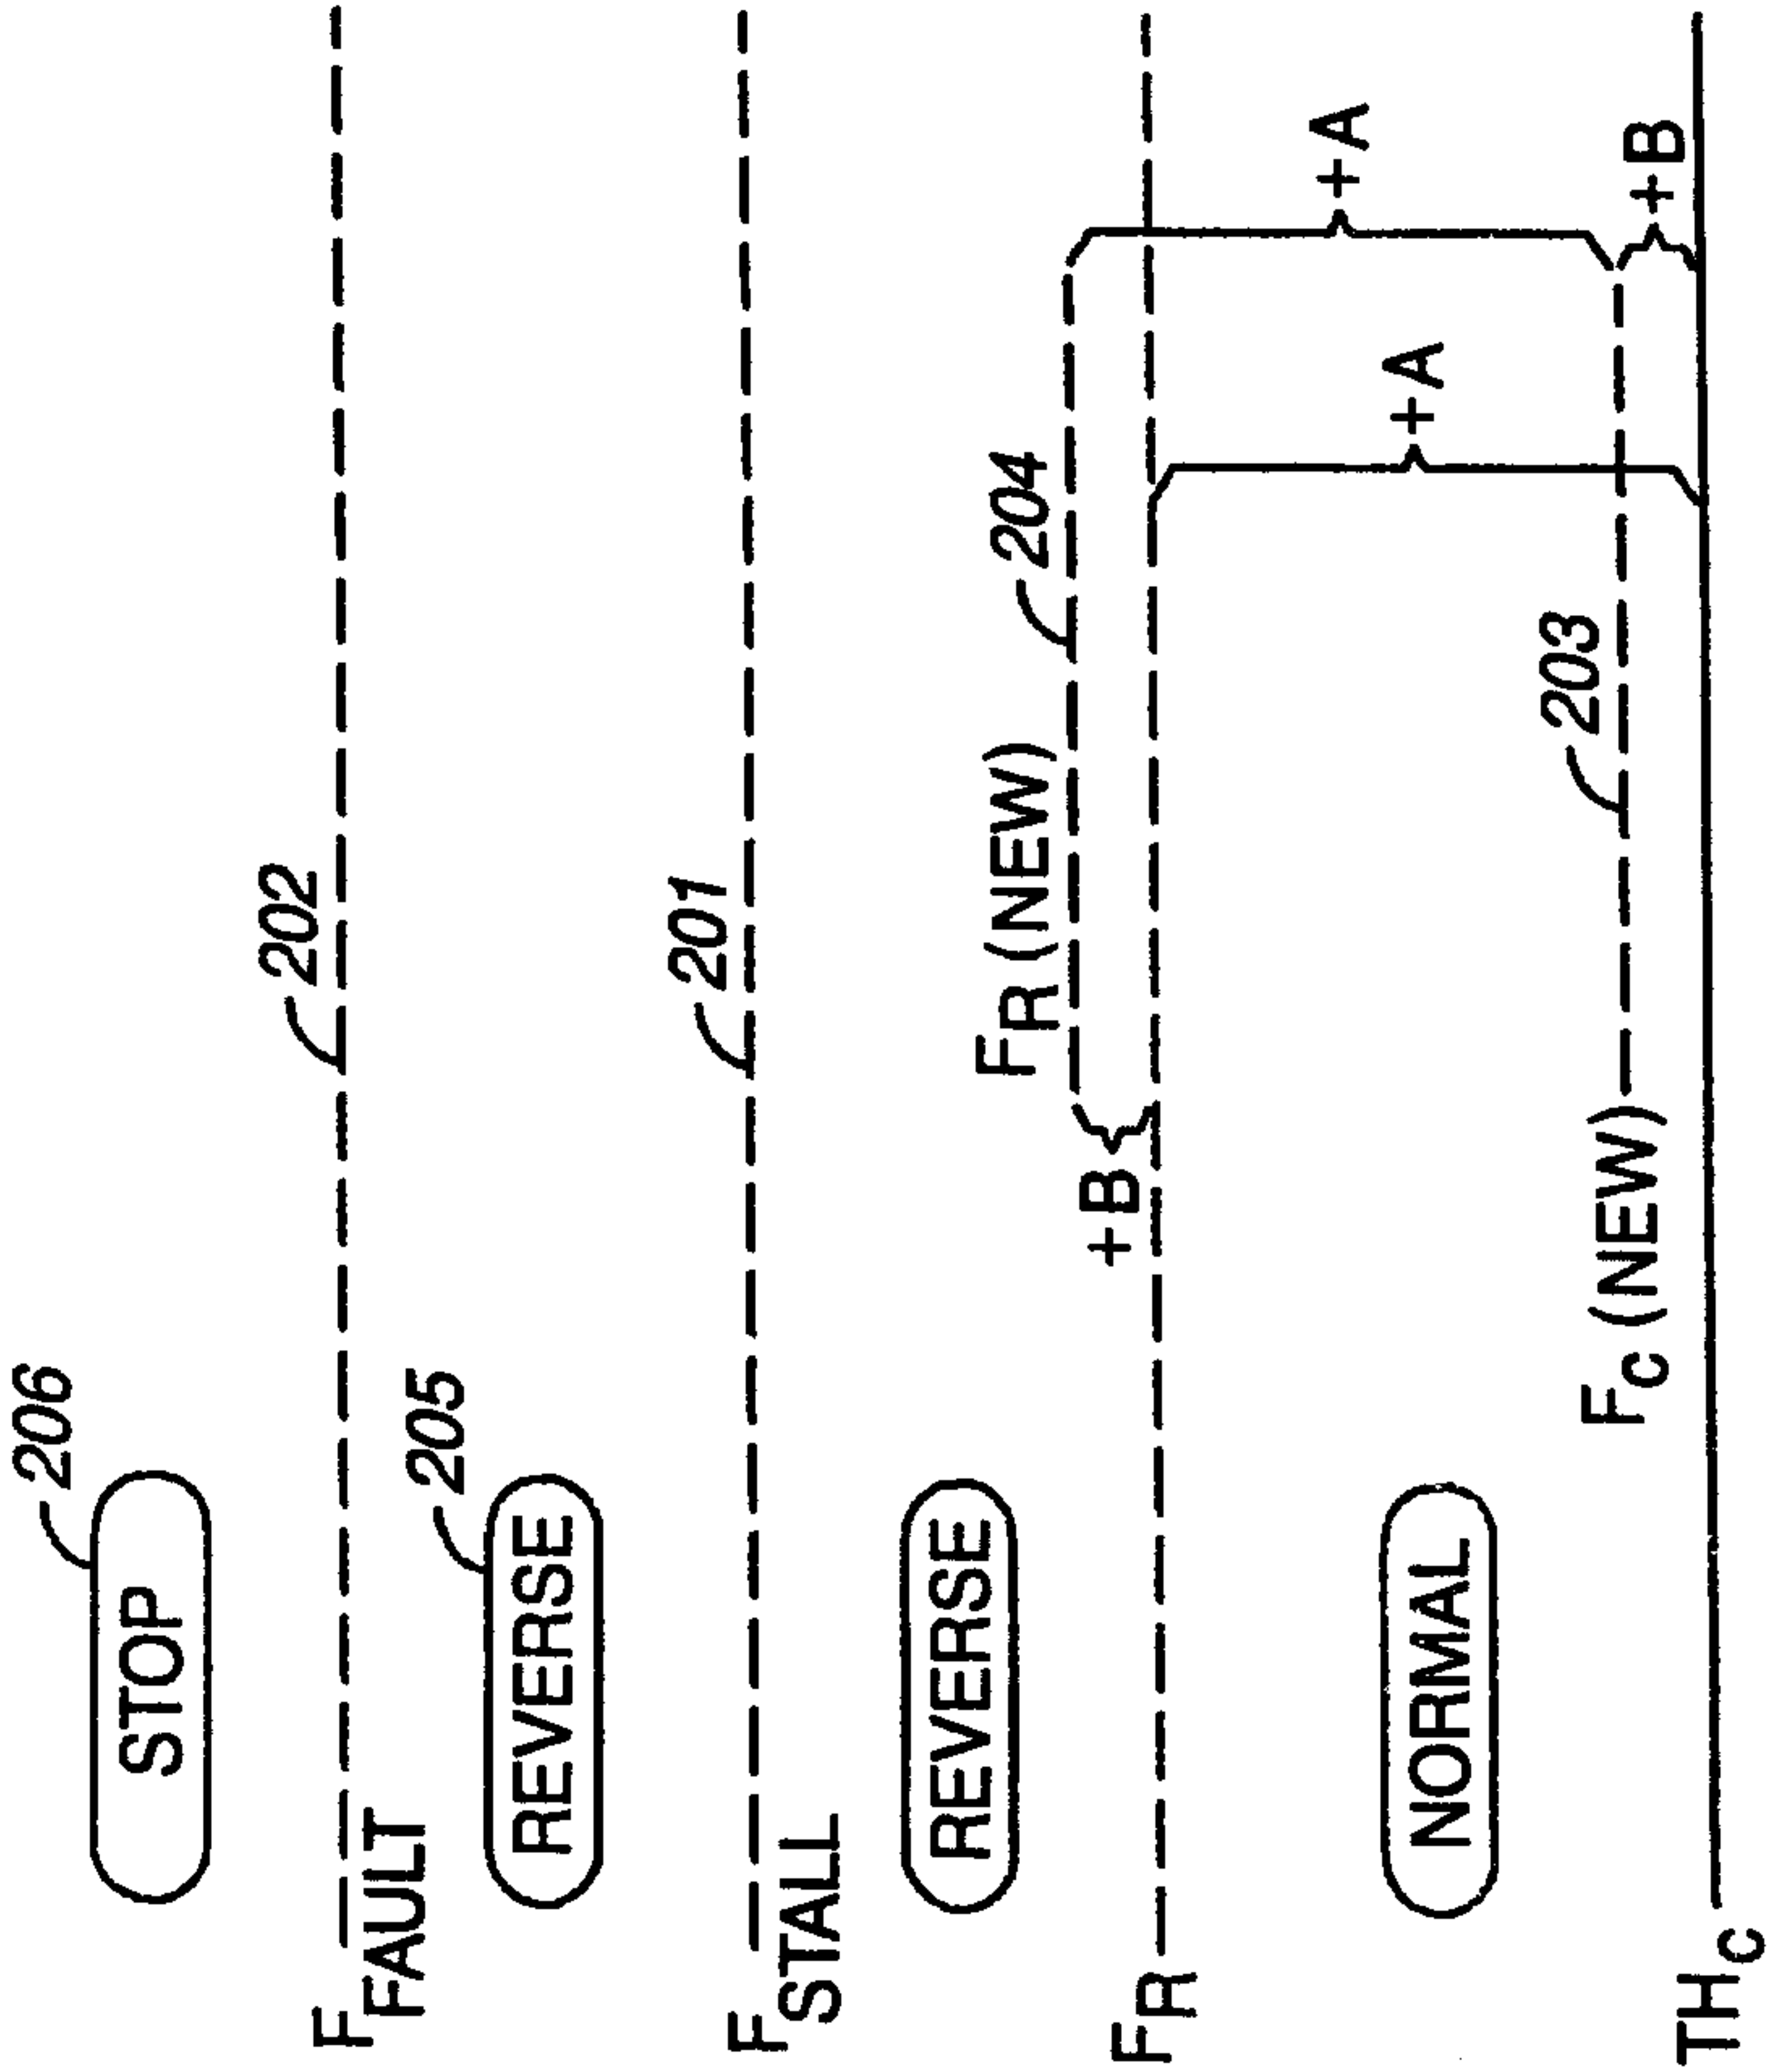


FIG. 20

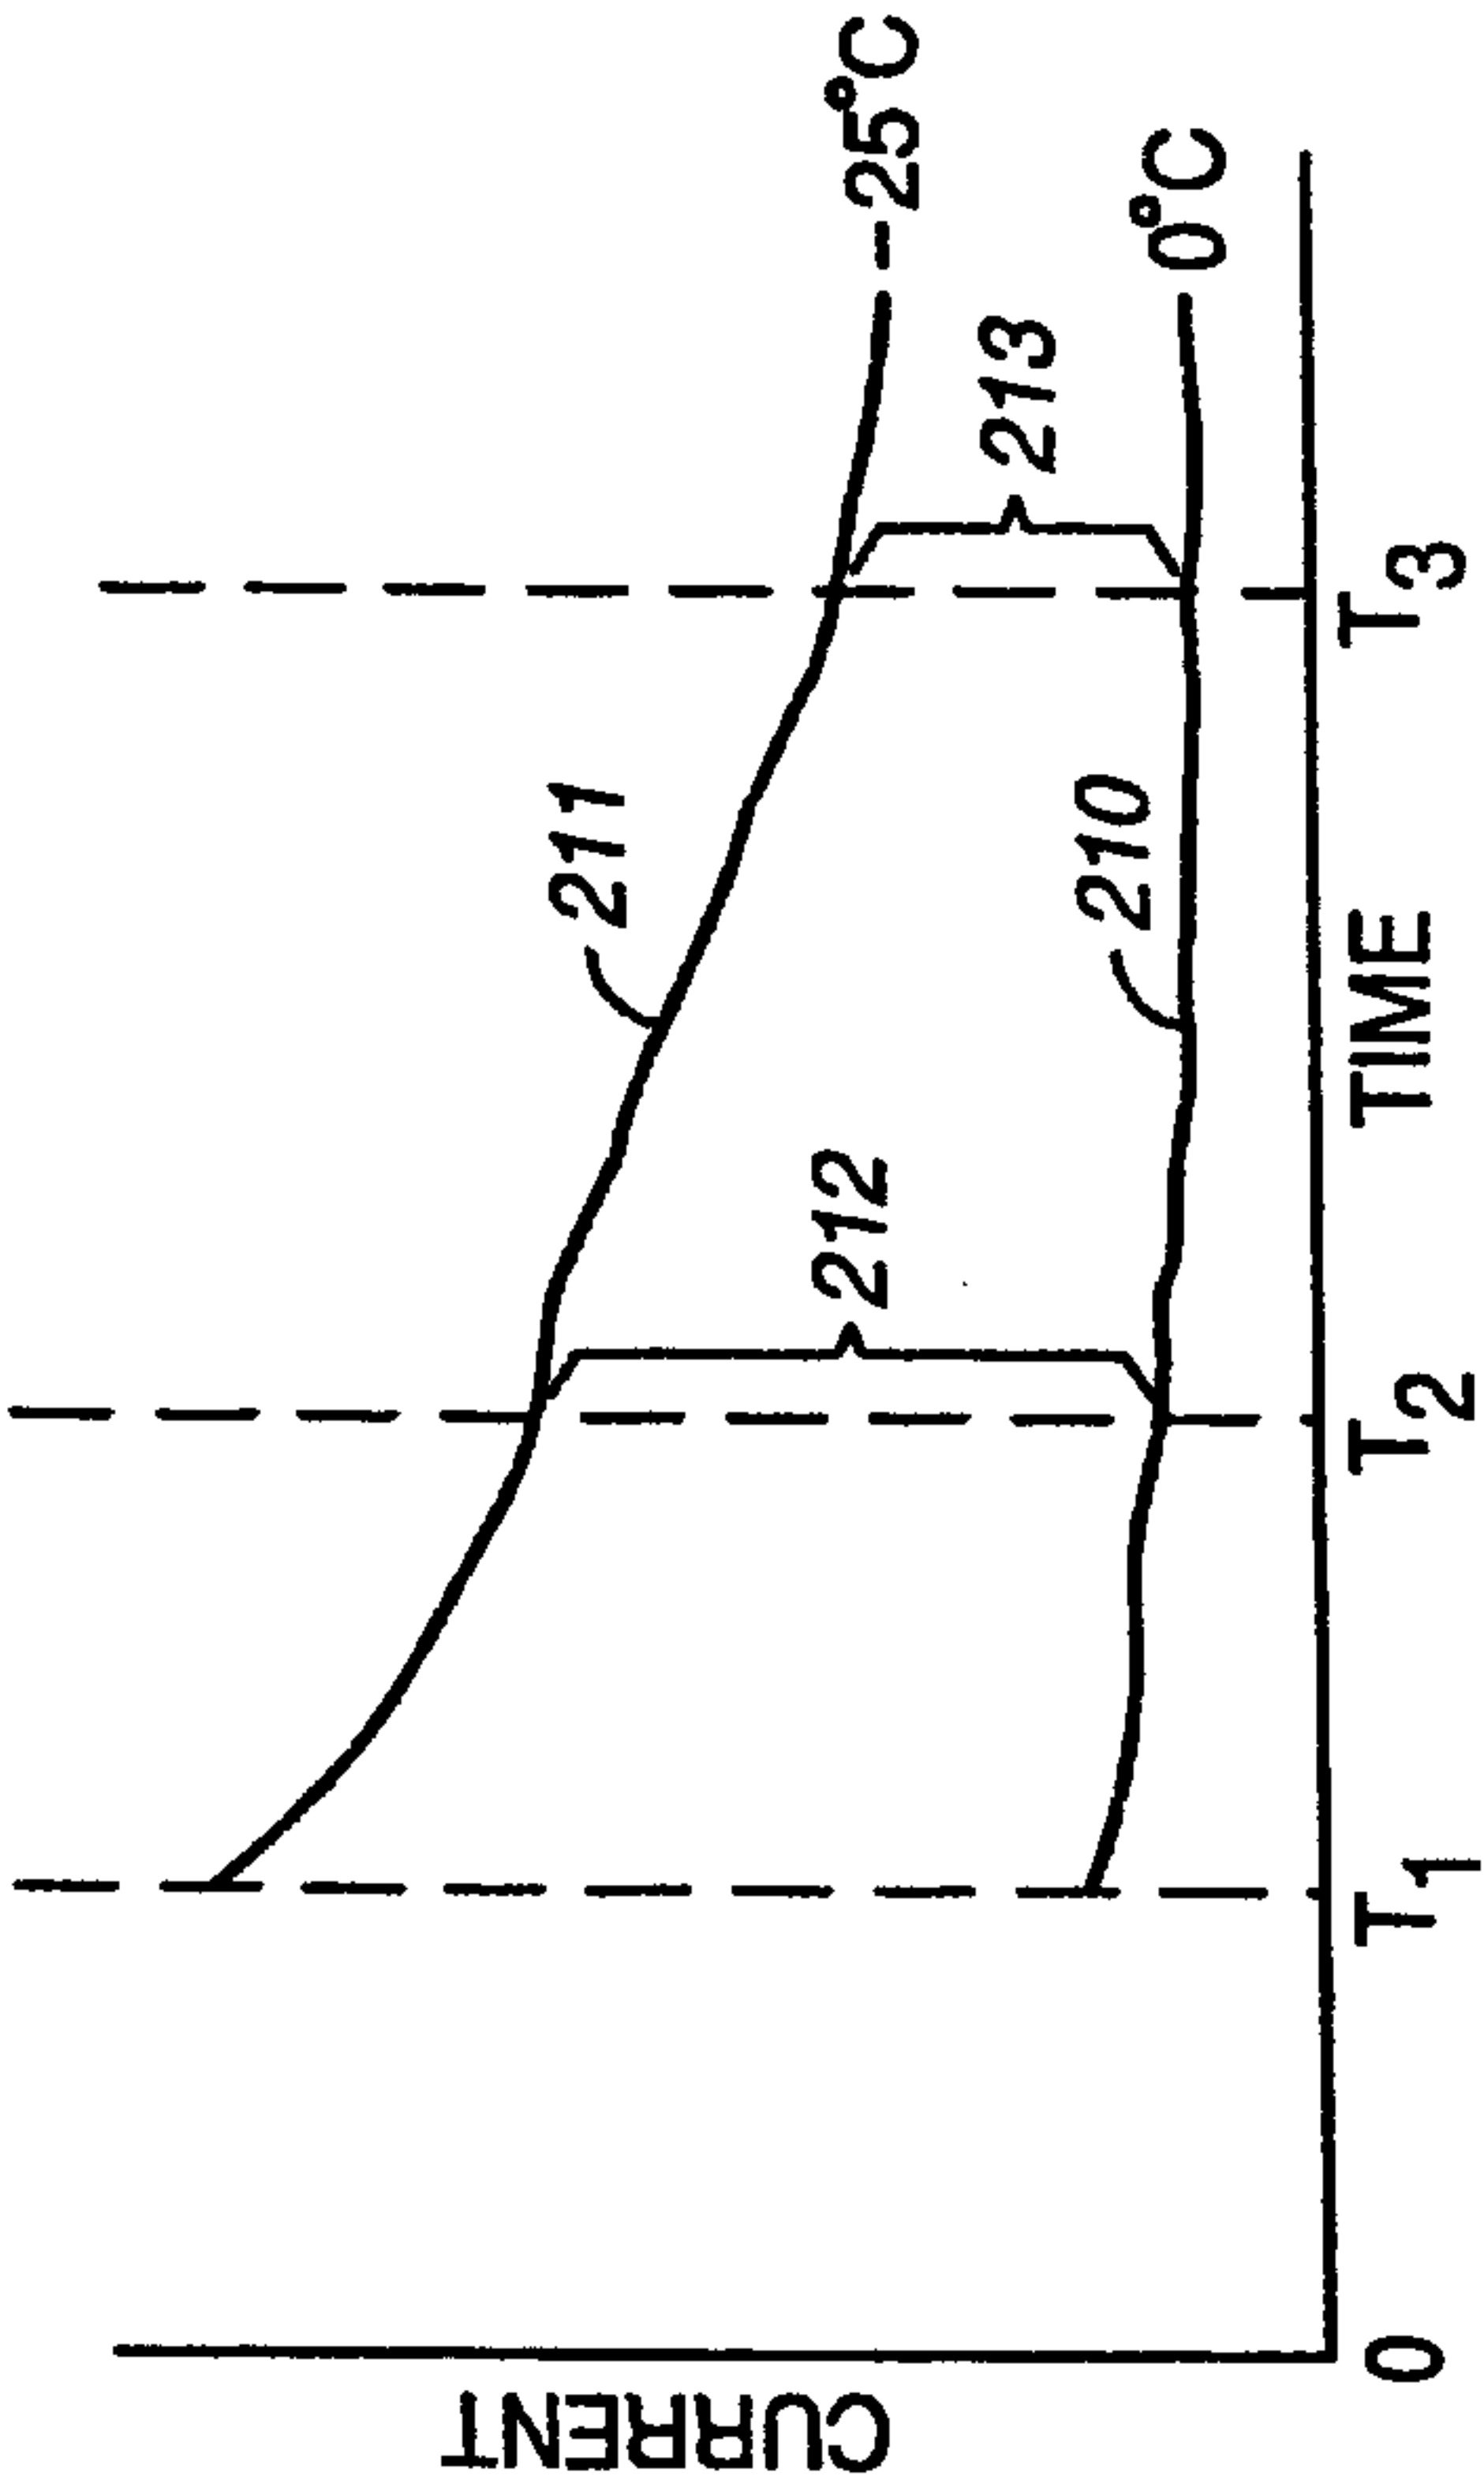


FIG. 21

12/15

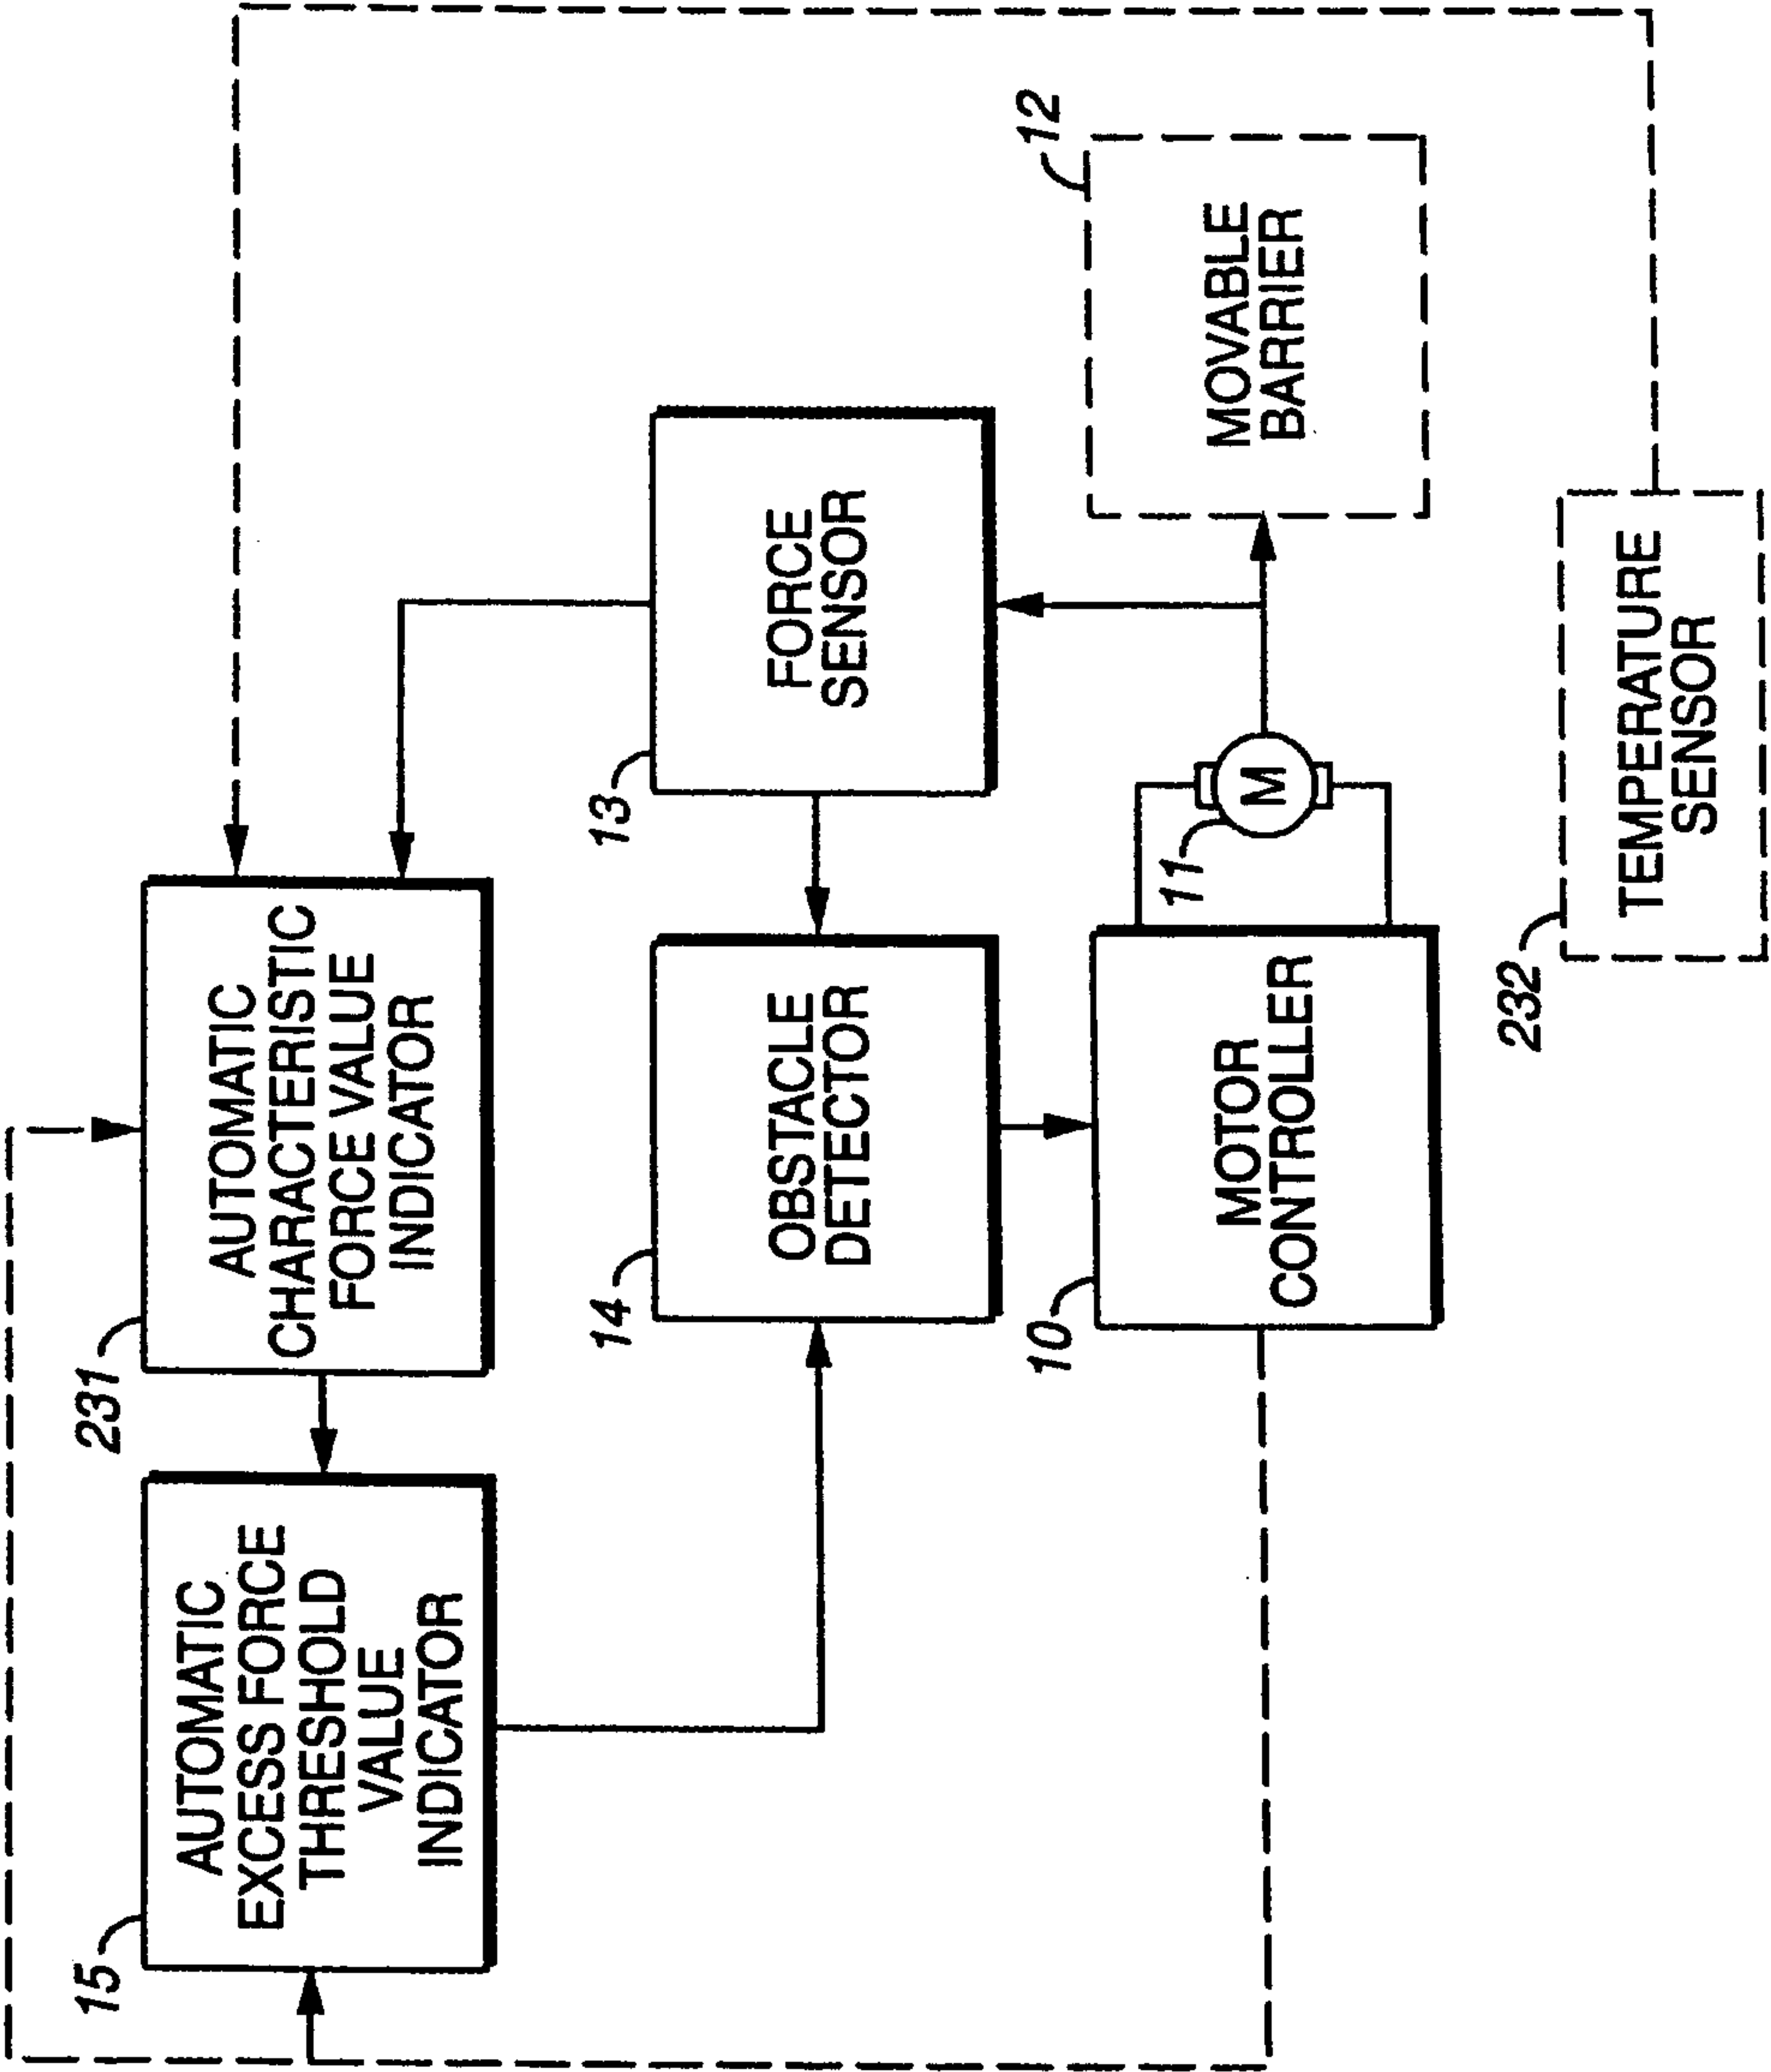


FIG. 23

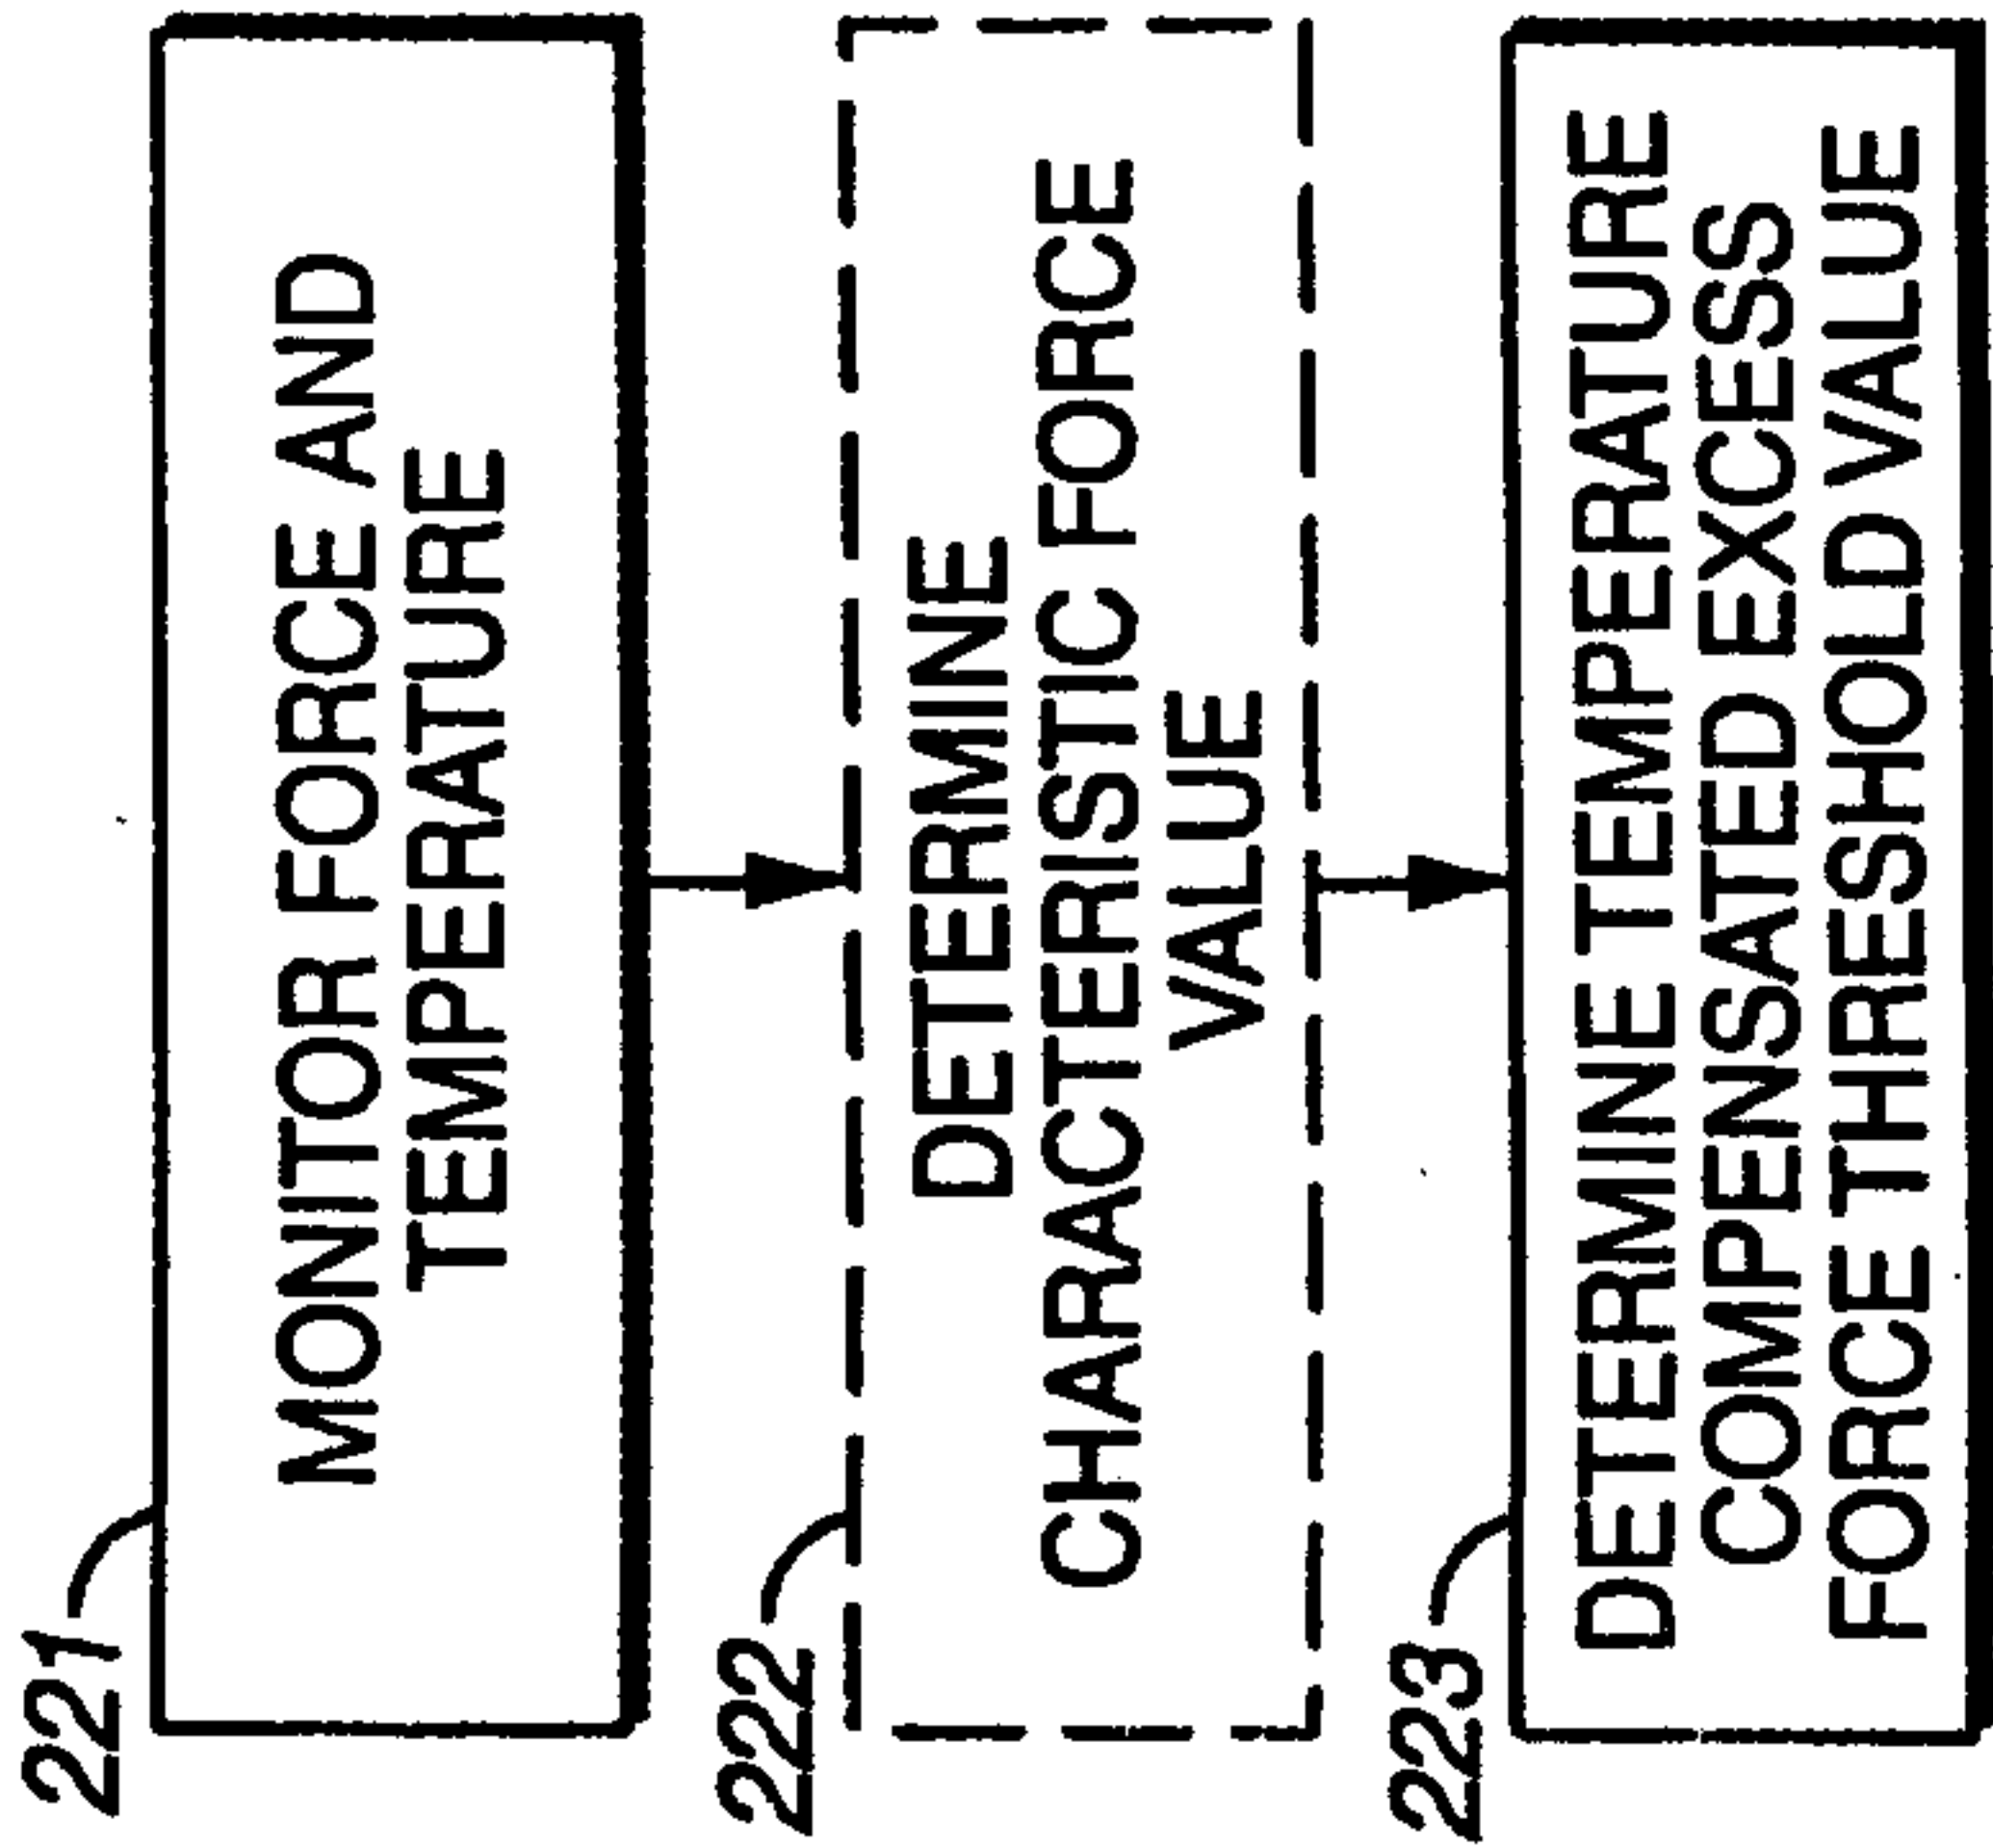


FIG. 22

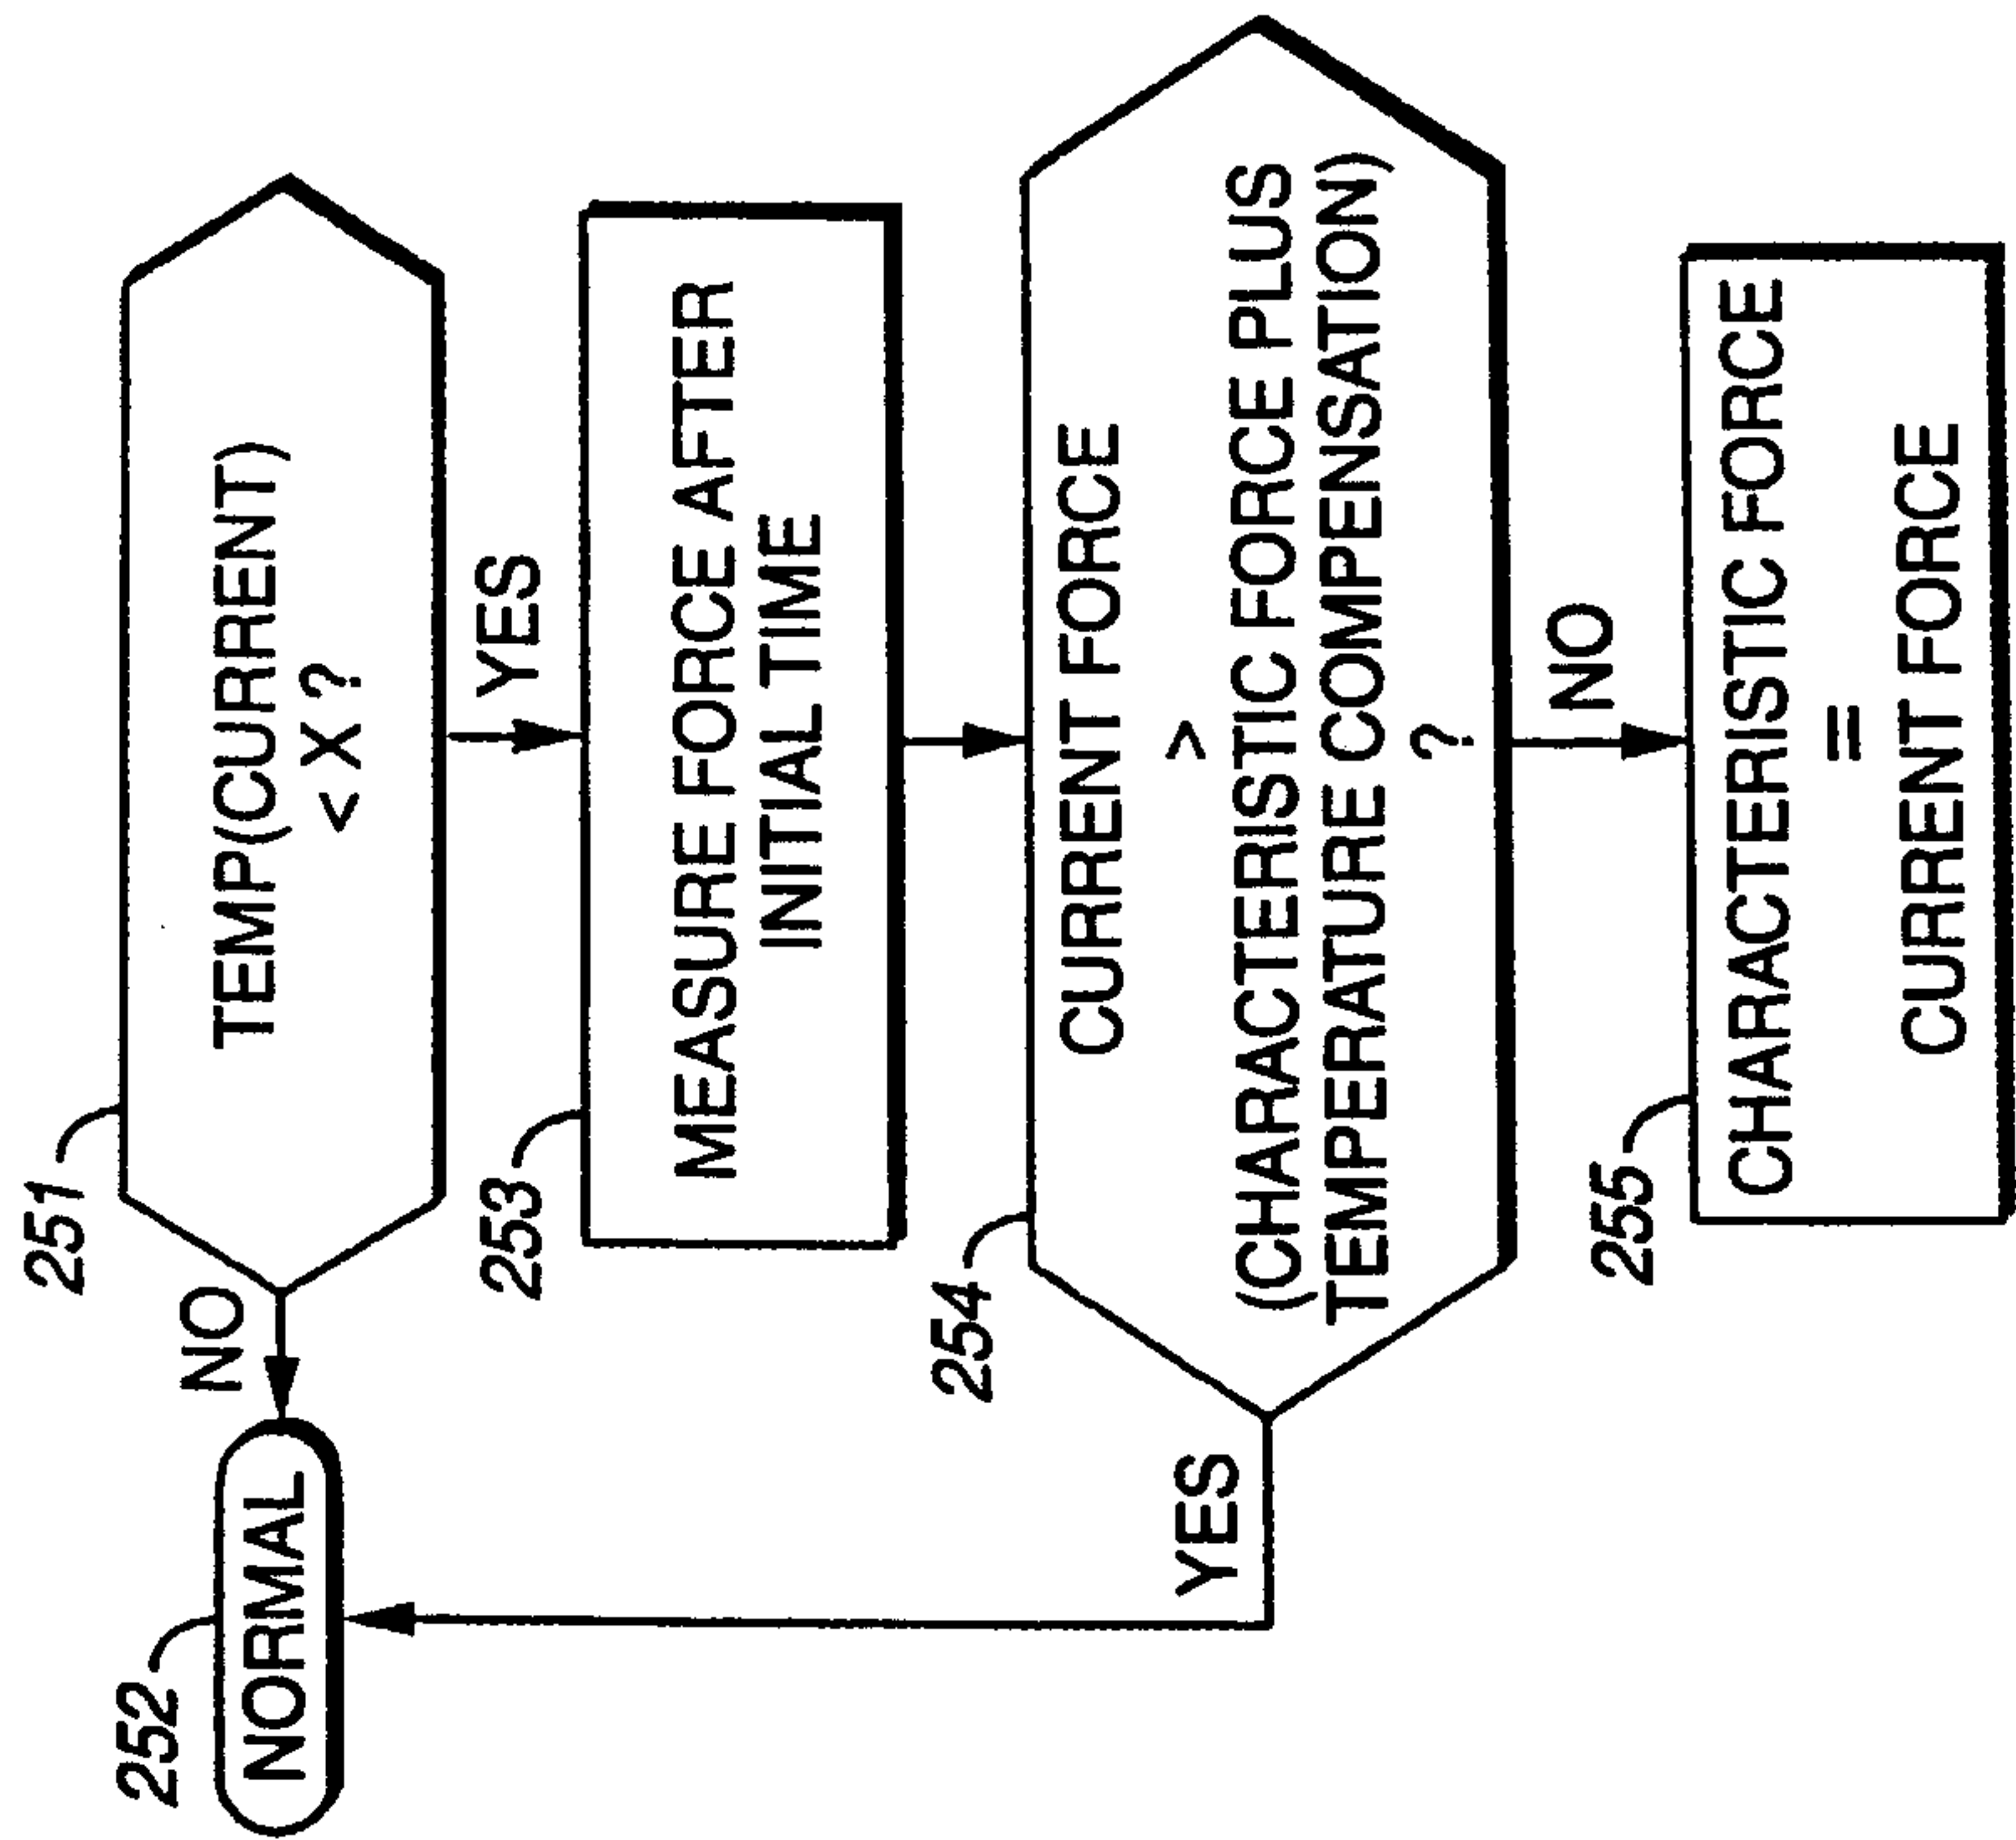


FIG. 25

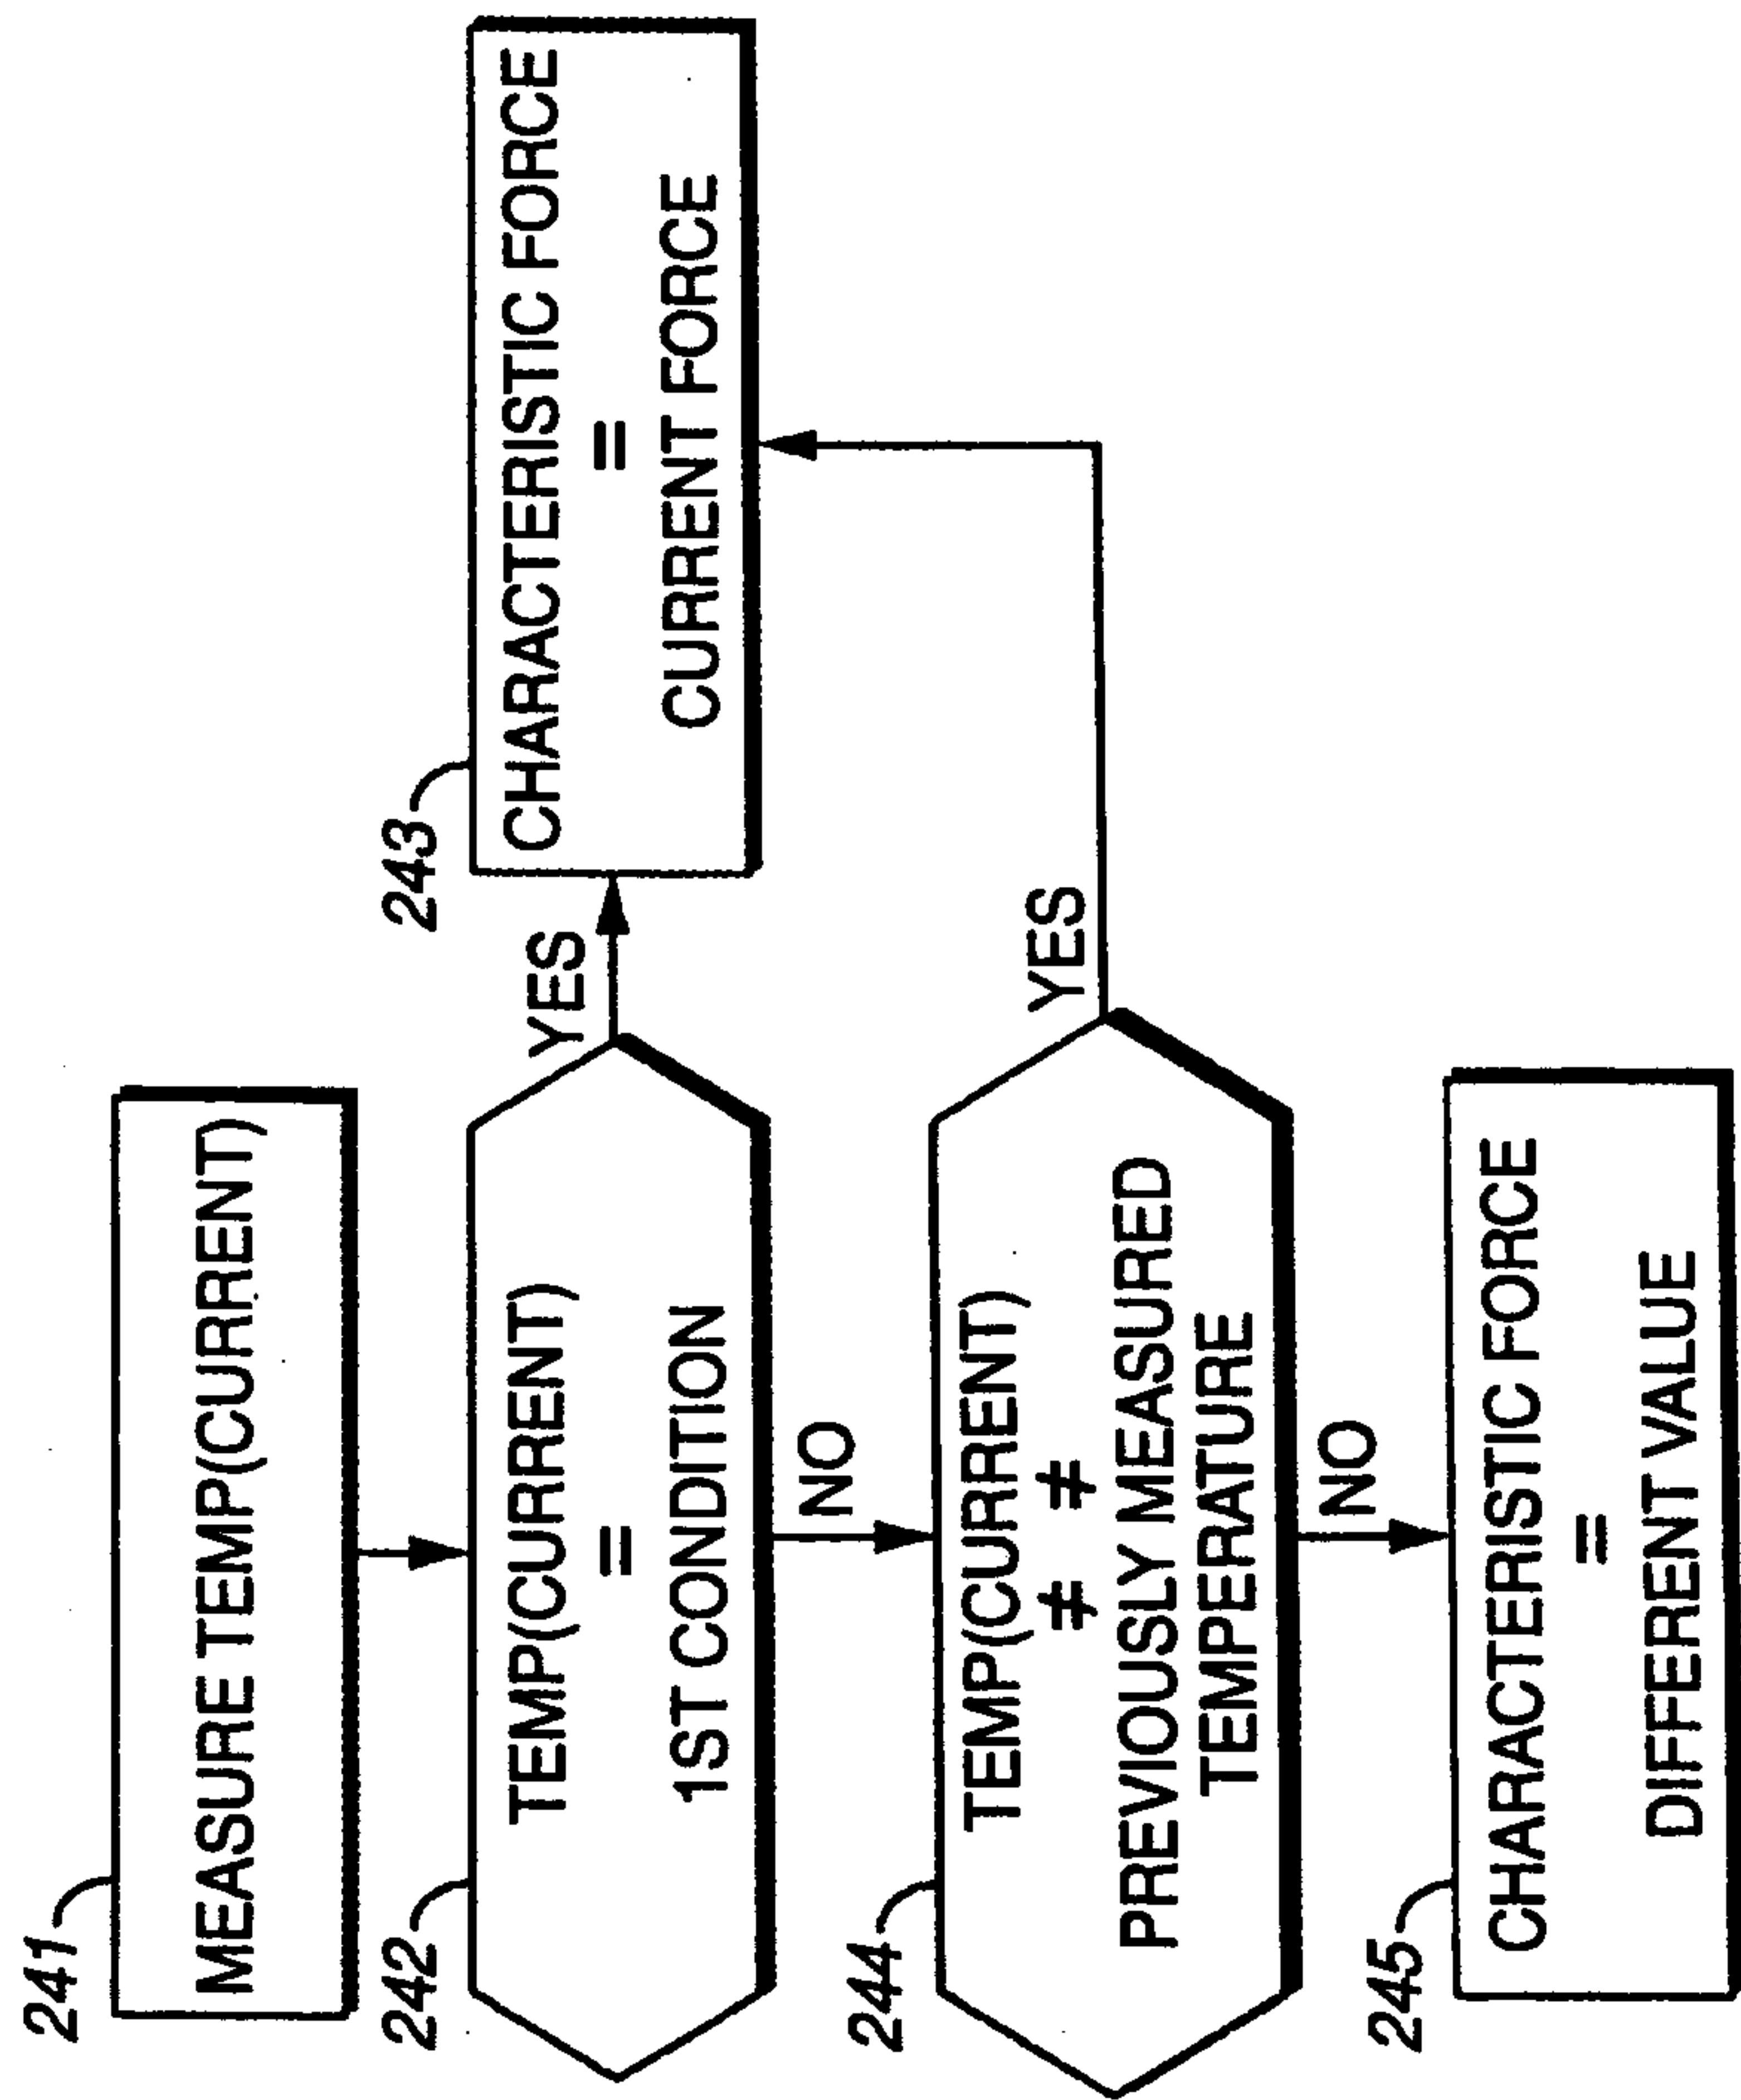


FIG. 24

