

(19)



(11)

EP 2 770 212 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

01.12.2021 Bulletin 2021/48

(51) Int Cl.:

F04C 18/356 ^(2006.01) **F04C 23/00** ^(2006.01)
F04C 27/00 ^(2006.01) **F04C 29/00** ^(2006.01)
F04C 28/02 ^(2006.01)

(21) Application number: **12841299.6**

(86) International application number:

PCT/JP2012/006665

(22) Date of filing: **18.10.2012**

(87) International publication number:

WO 2013/057946 (25.04.2013 Gazette 2013/17)

(54) **ROTARY COMPRESSOR HAVING TWO CYLINDERS**

ROTATIONSKOMPRESSOR MIT ZWEI ZYLINDERN

COMPRESSEUR ROTATIF PRÉSENTANT DEUX CYLINDRES

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **HIWATA, Akira**
OSAKA 541-6207 (JP)
- **OYAGI, Shingo**
OSAKA 541-6207 (JP)
- **FUNAKOSHI, Daisuke**
OSAKA 541-6207 (JP)
- **OHNO, Ryuichi**
OSAKA 541-6207 (JP)

(30) Priority: **18.10.2011 JP 2011228585**

(43) Date of publication of application:

27.08.2014 Bulletin 2014/35

(73) Proprietor: **Panasonic Corporation**

Kadoma-shi, Osaka 571-8501 (JP)

(74) Representative: **Eisenführ Speiser**
Patentanwälte Rechtsanwälte PartGmbB
Postfach 31 02 60
80102 München (DE)

(72) Inventors:

- **NAKAI, Hiroaki**
OSAKA 541-6207 (JP)
- **KARINO, Tsuyoshi**
OSAKA 541-6207 (JP)
- **YOSHIDA, Hirofumi**
OSAKA 541-6207 (JP)

(56) References cited:

CN-A- 101 012 832 CN-A- 101 498 307
JP-A- H 109 169 JP-A- H0 510 279
JP-A- S6 321 383 JP-A- H03 258 990
JP-A- 2004 019 506 JP-A- 2009 180 203
JP-A- 2009 275 645

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 770 212 B1

Description

[TECHNICAL FIELD]

[0001] The present invention relates to a rotary compressor having two cylinders used for an air conditioner, a freezing machine, a blower, a water heater and the like.

[BACKGROUND TECHNIQUE]

[0002] A compressor is used in a freezing machine and an air conditioner. The compressor sucks gas refrigerant which is evaporated by an evaporator, compresses the gas refrigerant up to pressure required for condensation, and sends out the high temperature and high pressure gas refrigerant into a refrigerant circuit. As one of such compressors, a rotary compressor is known. Among the rotary compressors, there is a rotary compressor having two cylinders configuring two compressor chambers in the compressor, and this compressor has been developed as a high-performance compressor having characteristics of low-vibration, low-noise and capable of operating at high speed, and the compressor is required to be small in size and to have high capacity.

[0003] To provide the rotary compressor with high capacity, there is employed a method of increasing a height of a cylinder to increase the capacity, or a method of increasing an eccentric amount of a crankshaft to increase containment capacity of the compression chamber.

[0004] When the height of the cylinder is increased and the capacity is increased, it becomes necessary to increase a diameter of the crankshaft to cope with increase in a bearing load, and efficiency of the compressor is deteriorated.

[0005] A case in which the method of increasing the eccentric amount of the crankshaft is used in a rotary compressor having two cylinders will be described below. In the rotary compressor having the two cylinders, two compression chambers are partitioned by a partition plate, and a through hole into which the crankshaft is inserted must be formed in the partition plate. A diameter of the through hole is limited to such a size that the crankshaft can be inserted into the through hole at the time of assembling operation and generally, the diameter is slightly larger than a diameter of an eccentric portion of the crankshaft.

[0006] Under such a limitation, a problem caused when the eccentric amount of the crankshaft is increased will be described using Figs. 5. Fig. 5(a) is an assembling drawing of a crankshaft, a rolling piston and a partition plate when an eccentric amount is small. Fig. 5(b) is an assembling drawing when the eccentric amount is increased and a through hole of the partition plate is left as it is.

[0007] If eccentric amounts of crankshaft eccentric portions 107a and 107b with respect to a crankshaft 107 are increased, a length of a sealing portion 140 between

end surfaces of rolling pistons 108a and 108b and an end surface of a partition plate 105 in a non-eccentric direction becomes short. A fine gap in which the rolling pistons 108a and 108b eccentrically rotate is provided in the sealing portion 140 in a height direction. To suppress leakage from this gap, it is desired that the length of the sealing portion 140 is formed as long as possible, but if the eccentric amounts of the crankshaft eccentric portions 107a and 107b are increased, the length of the sealing portion 140 becomes short as described above, and a problem that refrigerant leaks through the sealing portion 140 occurs.

[0008] To solve this problem, Figs. 6 and 7 show a rotary compressor described in Patent Document 1. Fig. 6 is a side sectional view of the rotary compressor, and Fig. 7 is an enlarged view of essential portions thereof.

[0009] As shown in Figs. 6 and 7, to design a through hole 105a of the partition plate 105 small, the crankshaft 107 is divided for each of the crankshaft eccentric portions 107a and 107b as units, the units are connected to each other through a connecting portion 141 and they are assembled. According to this, a diameter of the through hole 105a of the partition plate 105 is made smaller than that of the crankshaft eccentric portion 107b. According to this, the length of the sealing portion 140 can be set longer, and airtightness of compression chambers 111a and 111b is enhanced.

Moreover, Patent Document 2 discloses a closed type rotary compressor. The rotary compressor incorporated in a closed vessel, has philanders of which heights and bores are different from each other, and pistons in the compression chambers defined by the cylinders. The pistons are arranged for their eccentric rotation on eccentric portions of a rotary shaft which have different heights and eccentric levels from each other. The eccentric rotation of the pistons effects the compression of refrigerant.

Further, Patent Document 3 discloses a double work cylinder rotary compressor. The double work cylinder rotary compressor is structured that the outer diameter of an eccentric portion of a supplementary bearing is smaller than that of the eccentric portion of a main bearing. The outer diameter of an eccentric portion of a supplementary bearing is smaller than that of the eccentric portion of a main bearing, the inner diameter of the separator is reduced, which adequately ensures the sealing length L determined by the inner diameter of the separator and outer diameters of the supplementary and main bearings to prevent reduction of capacity and efficiency of the compressor due to leakage.

[PRIOR ART DOCUMENTS]

[PATENT DOCUMENTS]

[0010]

[Patent Document 1] Japanese Patent Application Laid-open No.2005-337210

[Patent Document 2] Japanese Patent Application
Laid-open No. 10009169

[Patent Document 3] Chinese Patent Application No.
CN 101 012 832 A

[SUMMARY OF THE INVENTION]

[PROBLEM TO BE SOLVED BY THE INVENTION]

[0011] According to the conventional configuration, however, since the crankshaft 107 is divided into units, it is difficult to secure a coaxial degree after the compressor is assembled. Further, since an intermediate bearing is newly provided in the through hole 105a of the partition plate 105, there is a problem that a bearing loss is increased. Further, since the number of parts is increased, there is also a problem of costs.

[0012] The present invention has been accomplished to solve the conventional problems, and it is an object of the invention to provide an efficient compressor in which the number of parts is not increased, a diameter of a through hole of a partition plate is reduced, a length of a sealing portion is sufficiently secured, and airtightness of a compression chamber is enhanced.

[MEANS FOR SOLVING THE PROBLEM]

[0013] To solve the conventional problems, the present invention provides a rotary compressor as defined in claim 1. The rotary compressor has inter alia two cylinders in which two compression elements having rolling pistons in the cylinders are placed in adjacent to each other while sandwiching a partition plate therebetween, a crankshaft which is rotated by an electrical element is inserted into a through hole of the partition plate, if the crankshaft rotates, the rolling pistons inserted into crankshaft eccentric portions eccentrically rotates, and the two cylinders compress operating fluid in the cylinders by the eccentric rotation of the rolling pistons, wherein an inner diameter ϕD_c of the through hole is greater than an outer diameter ϕD_b of one of the crankshaft eccentric portions and smaller than an outer diameter ϕD_a of the other crankshaft eccentric portion.

[0014] Normally, it is necessary to set an outer diameter of each of the crankshaft eccentric portions to such a value that sufficient bearing proof strength is exerted against a load received from operating fluid which is compressed by the rolling piston in each of the compression elements. Hence, to realize high capacity, it is necessary to increase the diameters of the crankshaft eccentric portions, but when diameters of both the crankshaft eccentric portions are increased, an inner diameter of the through hole of the partition plate is increased with increase of the diameters of the crankshaft eccentric portions under the limitation of size which can be assembled, and a length of the sealing portion which is composed of an end surface of the rolling piston and the partition plate inevitably becomes small.

[0015] In the present invention, the outer diameter ϕD_a of the other crankshaft eccentric portion is set larger than the inner diameter of the through hole of the partition plate. Therefore, in the compression element, it is possible to secure sufficient bearing proof strength against a load received from operating fluid which is compressed, and it is possible to secure the length of the sealing portion as long as possible without increasing the inner diameter of the through hole of the partition plate.

[EFFECT OF THE INVENTION]

[0016] According to the present invention, even if the capacity of the compressor is set large, since the length of the sealing portion between the partition plate and the end surface of the rolling piston long can be made long, it is possible to enhance the airtightness of the compression chamber, and it is possible to realize an efficient rotary compressor having two cylinders.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[0017]

Fig. 1 is a longitudinal sectional view of a rotary compressor having two cylinders in an embodiment of the present invention;

Fig. 2 is a plan view of a compression element in the embodiment of the invention;

Fig. 3 is an explanatory diagram showing a positional relation when a crankshaft, a partition plate and rolling pistons of the embodiment of the invention are assembled in the embodiment of the invention;

Fig. 4 is an explanatory diagram showing a positional relation when a crankshaft, a partition plate and rolling pistons of a conventional technique are assembled in a conventional technique;

Fig. 5(a) is an assembling drawing of essential portions of a compressing mechanism in which an eccentric amount is made small in another conventional technique, and Fig. 5(b) is an assembling drawing of essential portions of a compressing mechanism in which the eccentric amount is made large in the conventional technique;

Fig. 6 is a side view of a rotary compressor having two cylinders in another conventional technique; and Fig. 7 is an enlarged view of essential portion of the conventional technique.

[EXPLANATION OF SYMBOLS]

[0018]

- 1 hermetic container
- 2 electrical element
- 4 compression element
- 5 partition plate

5a	through hole
6	cylinder
7	crankshaft
7a	other crankshaft eccentric portion
7b	one crankshaft eccentric portion
7c	crankshaft main shaft portion
7d	crankshaft auxiliary shaft portion
8	rolling piston
11a, 11b	compression chamber
12	accumulator
20	oil-storing portion
22a, 22b	vane

[MODE FOR CARRYING OUT THE INVENTION]

[0019] A first aspect of the present invention provides a rotary compressor having two cylinders in which two compression elements having rolling pistons in the cylinders are placed in adjacent to each other while sandwiching a partition plate therebetween, a crankshaft which is rotated by an electrical element is inserted into a through hole of the partition plate, if the crankshaft rotates, the rolling pistons inserted into crankshaft eccentric portions eccentrically rotates, and the two cylinders compress operating fluid in the cylinders by the eccentric rotation of the rolling pistons in a hermetic container, wherein an inner diameter ϕD_c of the through hole is greater than an outer diameter ϕD_b of one of the crankshaft eccentric portions and smaller than an outer diameter ϕD_a of the other crankshaft eccentric portion. Lubricating oil in a storing portion of a bottom of the hermetic container is supplied from a lower end of the crankshaft to the through hole through an interior of the crankshaft, and a region surrounded by the partition plate, the rolling pistons and the crankshaft is filled with the lubricating oil. Capacity of a compression chamber of one of the compression elements which compresses by the one crankshaft eccentric portion is set smaller than capacity of a compression chamber of the other compression element. The outer diameter ϕD_a of the other crankshaft eccentric portion is greater than the inner diameter of the through hole of the partition plate. Therefore, in the compression element, it is possible to secure a sufficient shaft diameter with respect to a load received from operating fluid which is compressed. Further, even if the eccentric amount is increased, the inner diameter of the through hole of the partition plate is not increased. Therefore, it is possible to secure a length of the sealing portion as long as possible.

[0020] According to a second aspect of the invention, in the rotary compressor having two cylinders of the first aspect, a height H_b of the one crankshaft eccentric portion in its axial direction is higher than a height H_a of the other crankshaft eccentric portion in its axial direction. Also when necessary bearing proof strength cannot be secured only by the shaft diameter of the eccentric portion, it is possible to enhance the proof strength by the height of the bearing, and it is possible to minimize en-

largement of the inner diameter of the through hole of the partition plate.

[0021] In the compression element, if the shaft diameter of the eccentric portion is increased, the inner diameter of the through hole of the partition plate is increased. According to the compression element, if the compression chamber capacity is made smaller than that of the other compression element and a bearing load itself is reduced, it is possible to secure reliability.

[0022] According to a third aspect of the invention, in the rotary compressor having two cylinders of the first or second aspect, the compression element which compresses by the other crankshaft eccentric portion is placed closer to a main bearing which mainly pivotally supports the crankshaft. Hence, since one of the compression elements having a greater load can be pivotally supported in the vicinity of the bearing, moment applied to the bearing is reduced, and it is possible to secure high reliability for realizing the present invention. Here, the main bearing which mainly pivotally supports is a bearing having the greatest product of a square of the bearing diameter and a bearing length when the crankshaft itself is supported by a plurality of bearings, and in the case of the rotary compressor having two cylinders, the main bearing is provided on the side of an electrical element.

[0023] Pressure in the compression chamber is set substantially equal to discharge pressure. According to this, it becomes easily to supply lubricating oil to a sliding portion, and reliability of the compressor becomes excellent. However, in the rotary compressor having two cylinders, if the through hole is filled with high pressure lubricating oil or operating fluid, there is fear that the lubricating oil or the operating fluid leaks into the compression chamber by a pressure difference. If the through hole of the partition plate is filled with low pressure lubricating oil or operating fluid on the other hand, it is conceived that operating fluid compressed through the sealing portion leaks out from the compression chamber which is compressing and discharging, but there is not pressure difference with respect to the compression chamber which is sucking, and time during which a pressure difference is held through the sealing portion becomes short. That is, if the through hole is filled with high pressure lubricating oil, an effect for securing the length of the sealing portion of the present invention appears more outstandingly.

[0024] An embodiment of the present invention will be described with reference to the drawings. The invention is not limited to the embodiment.

(Embodiment)

[0025] Fig. 1 is a longitudinal sectional view of a rotary compressor having two cylinders in an embodiment of the present invention, and Fig. 2 is a plan view of a compression element.

[0026] In Fig. 1, an electrical element 2 and a compression element 4 are accommodated in a hermetic contain-

er 1. The electrical element 2 rotates a crankshaft 7, and the crankshaft 7 drives the compression element 4.

[0027] The compression element 4 is composed of compression elements 4a and 4b which independently carry out a compressing operation. The compression element 4a includes a cylinder 6a which forms a cylindrical space, and a rolling piston 8a which is placed in the cylinder 6a. The compression element 4b includes a cylinder 6b which forms a cylindrical space, and a rolling piston 8b which is placed in the cylinder 6b.

[0028] The crankshaft 7 includes crankshaft eccentric portions 7a and 7b. The partition plate 5 is placed between the two compression elements 4a and 4b. A main bearing 31 is placed on the compression element 4a on its side close to the electrical element 2. The main bearing 31 forms an upper end plate together with a bearing portion which pivotally supports a crankshaft main shaft portion 7c. The upper end plate closes an electrical element 2 of the compression element 4a. An auxiliary bearing 32 is placed on the compression element 4b on its side close to an oil-storing portion 20. The auxiliary bearing 32 forms a lower end plate together with a bearing portion which pivotally supports a crankshaft auxiliary shaft portion 7d. The lower end plate closes the oil-storing portion 20 of the compression element 4b.

[0029] The cylinder 6a is placed on an upper surface of the partition plate 5, and the cylinder 6b is placed on a lower surface of the partition plate 5. The one crankshaft eccentric portion 7b is accommodated in the cylinder 6b, and the other crankshaft eccentric portion 7a is accommodated in the cylinder 6a.

[0030] The crankshaft eccentric portions 7a and 7b are integrally formed on the crankshaft 7. The rolling piston 8a is rotatably mounted on the other crankshaft eccentric portion 7a, and the rolling piston 8b is rotatably mounted on the one crankshaft eccentric portion 7b.

[0031] As shown in Fig. 2, a vane groove 21a is formed in the cylinder 6a, and a vane groove 21b is formed in the cylinder 6b. A vane 22a is slidably placed in the vane groove 21a, and a vane 22b is slidably placed in the vane groove 21b. Back pressure is applied to the vane 22a, and the vane 22a is always in abutment against the rolling piston 8a. Back pressure is applied to the vane 22b, and the vane 22b is always in abutment against the rolling piston 8b. The cylinder 6a is provided with a suction passage 9a, and the cylinder 6b is provided with a suction passage 9b. A suction pipe 10a is connected to the suction passage 9a, and a suction pipe 10b is connected to the suction passage 9b. The suction passage 9a and the suction passage 9b are independent from each other, and the suction pipe 10a and the suction pipe 10b are independent from each other. The suction pipe 10a is in communication with a compression chamber 11a through the suction passage 9a, and the suction pipe 10b is in communication with a compression chamber 11b through the suction passage 9b.

[0032] The suction pipes 10a and 10b are provided with an accumulator 12 for preventing liquid from being

compressed in the compression chambers 11a and 11b. The accumulator 12 separates refrigerant into gas and liquid, and guides only refrigerant gas into the suction pipes 10a and 10b. The accumulator 12 has a cylindrical case 13, a refrigerant gas introducing pipe 14 is connected to an upper portion of the case 13, and two refrigerant gas lead-out pipes 15a and 15b are connected to a lower portion of the case 13. One ends of the refrigerant gas lead-out pipes 15a and 15b are connected to the suction pipes 10a and 10b, and the other ends of the refrigerant gas lead-out pipes 15a and 15b extend to an upper portion of a space in the case 13.

[0033] If the crankshaft 7 is rotated by the electrical element 2, the crankshaft eccentric portions 7a and 7b eccentrically rotate in the cylinders 6a and 6b, and the rolling pistons 8a and 8b rotate while abutting against the vanes 22a and 22b. The rolling pistons 8a and 8b repeatedly suck and compress refrigerant gas in both the cylinders 6a and 6b with a period deviated from each other by half rotation. Low pressure refrigerant which is sucked from the refrigerant gas introducing pipe 14 is separated into gas and liquid in the case 13, and refrigerant gas from which liquid refrigerant is separated is sucked into the compression chambers 11a and 11b respectively through the refrigerant gas lead-out pipes 15a and 15b, the suction pipes 10a and 10b and the suction passages 9a and 9b.

[0034] Lubricating oil in the oil-storing portion 20 of a bottom of the hermetic container 1 is supplied from a lower end of the crankshaft auxiliary shaft portion 7d to the through hole 5a through an interior of the crankshaft 7, and a region surrounded by the partition plate 5, the rolling pistons 8a and 8b and the crankshaft 7 is filled with the lubricating oil.

[0035] Action and an effect of the rotary compressor having two cylinders having the above-described configuration will be described below.

[0036] Fig. 3 is a side view of essential portions showing a positional relation when the crankshaft, the partition plate and the rolling pistons of the rotary compressor of the embodiment of the invention are assembled in the embodiment of the invention.

[0037] At the time of the assembling operation, the partition plate 5 is inserted from the crankshaft auxiliary shaft portion 7d, and is placed between the one crankshaft eccentric portion 7b and the other crankshaft eccentric portion 7a through the one crankshaft eccentric portion 7b. For this reason, it is necessary that an inner diameter ϕDc of the through hole 5a of the partition plate 5 is set greater than an outer diameter ϕDb of the one crankshaft eccentric portion 7b.

[0038] In the embodiment of the invention, the outer diameter ϕDa of the other crankshaft eccentric portion 7a is set greater than the inner diameter ϕDc of the through hole 5a, and the partition plate 5 can not be inserted from the crankshaft main shaft portion 7c. By setting the outer diameter ϕDa of the crankshaft eccentric portion 7a to the great value in this manner, it is possible

to enhance the proof strength against a load received from the rolling piston 8a at the time of compression, and even if the capacity of the compression element 4a is set to the great value, it is possible to realize high reliability.

[0039] In Fig. 3, the through hole 5a is filled with lubricating oil. Discharge pressure is applied to the lubricating oil existing in the through hole 5a. The through hole 5a is filled with operating fluid in some cases. In this case also, discharge pressure is applied to the operating fluid existing in the through hole 5a. A pressure difference between the compression chamber 11a and the compression chamber 11b is secured by a sealing portion 40 which is composed of an end surface of the partition plate 5 and end surfaces of the rolling pistons 8a and 8b. However, the sealing portion 40 is provided with a fine gap in a height direction so that the rolling piston 8 can eccentrically rotate. To suppress leakage from the gap, it is desired that a length (length in radial direction) of the sealing portion 40 is set as long as possible. In the embodiment of the invention, by setting the outer diameter ϕDb of the one crankshaft eccentric portion 7b to the small value, it is possible to make the inner diameter ϕDc of the through hole 5a small. A length of the rolling piston 8b in the radial direction can be increased by a reduction length of the outer diameter ϕDb of the one crankshaft eccentric portion 7b in the radial direction. Therefore, the sealing portion 40 can be made long in the radial direction, and it is possible to prevent lubricating oil from leaking from the through hole 5a to the compression chambers 11a and 11b.

[0040] As a comparative example, Fig. 4 is an assembling drawing when the outer diameter ϕDb of the one crankshaft eccentric portion 7b is set equal to the outer diameter ϕDa of the other crankshaft eccentric portion 7a.

[0041] If the outer diameter ϕDb of the one crankshaft eccentric portion 7b which is inserted into the through hole 5a is increased, the inner diameter ϕDc of the through hole 5a is increased. Therefore, although the outer diameter of the rolling piston 8b and the eccentric amount of the crankshaft eccentric portion 7b are the same, the length of the sealing portion 40 becomes short, and it can be found that leakage of lubricating oil from the through hole 5a to the compression chambers 11a and 11b is increased.

[0042] The outer diameter ϕDb of the one crankshaft eccentric portion 7b which is inserted into the through hole 5a of the partition plate 5 at the time of the assembling operation is set smaller than the outer diameter ϕDa of the other crankshaft eccentric portion 7a, and the inner diameter ϕDc of the through hole 5a is confined to such a size that the one crankshaft eccentric portion 7b having the small outer diameter can pass through the through hole 5a. According to this, the length of the sealing portion 40 can be increased, and it is possible to prevent high pressure lubricating oil from entering the compression chambers 11.

[0043] Since the outer diameter ϕDb of the one crankshaft eccentric portion 7b is smaller than the outer diam-

eter ϕDa of the other crankshaft eccentric portion 7a, the bearing proof strength is deteriorated. To supplement the deterioration of the bearing proof strength, a shaft height Hb of the one crankshaft eccentric portion 7b may be set higher than a shaft height Ha of the other crankshaft eccentric portion 7a as shown in Fig. 3. According to this, also when necessary bearing proof strength can not be secured only by the shaft diameter of the one crankshaft eccentric portion 7b, it is possible to enhance the proof strength by the shaft height Hb , and it is possible to minimize enlargement of the inner diameter ϕDc of the through hole 5a of the partition plate 5.

[0044] Further, compression chamber capacity of the compression element 4b may be set smaller than compression chamber capacity of the compression element 4a. The compression chamber capacity of the compression element 4b is capacity of the compression chamber 11a which is formed by the cylinder 6a, the rolling piston 8a, the upper end plate of the main bearing 31 and the partition plate 5. The compression chamber capacity of the compression element 4a is capacity of the compression chamber 11b which is formed by the cylinder 6b, the rolling piston 8b, the lower end plate of the auxiliary bearing 32 and the partition plate 5.

[0045] According to this, although enlargement of the shaft diameter of the one crankshaft eccentric portion 7b is a cause of enlargement of the inner diameter ϕDc of the through hole 5a of the partition plate 5, it is possible to secure reliability by making the capacity of the compression chamber 11a of the compression element 4b smaller than the capacity of the compression chamber 11b of the compression element 4a, and by reducing a bearing load of the one crankshaft eccentric portion 7b.

[0046] The compression element 4a which compresses by the other crankshaft eccentric portion 7a may be placed closer to the main bearing 31 which mainly pivotally supports the crankshaft 7. Since the compression element 4a having a greater load can pivotally be supported in the vicinity of the main bearing 31, it is possible to reduce moment which is applied to the main bearing 31, and to secure high reliability for realizing the present invention.

[0047] Although the present invention has been described based on the rotary compressor having two cylinders, the same effect can be realized even if the invention is applied to the rotary compressor having three or more cylinders.

[INDUSTRIAL APPLICABILITY]

[0048] According to the rotary compressor having two cylinders of the present invention, it is possible to enhance the airtightness of the compression chamber and to enhance the efficiency of the compressor by suppressing leakage through a sealing portion between the partition plate and the end surface of the rolling piston. According to this, the invention can also be applied to usage of an air conditioner and a pump type water heater using

CO₂ which is natural refrigerant in addition to a compressor for an air conditioner using HFC-based refrigerant.

Claims

1. A rotary compressor having two cylinders (6a, 6b) in which two compression elements (4a, 4b) having rolling pistons (8a, 8b) in the cylinders (6a, 6b) are placed in adjacent to each other while sandwiching a partition plate (5) therebetween,

a crankshaft (7) which is rotated by an electrical element (2) is inserted into a through hole (5a) of the partition plate (5),
if the crankshaft (7) rotates, the rolling pistons (8a, 8b) inserted into crankshaft eccentric portions (7a, 7b) eccentrically rotates, and the two cylinders (6a, 6b) compress operating fluid in the cylinders (6a, 6b) by the eccentric rotation of the rolling pistons (8a, 8b) in a hermetic container (1),
an inner diameter ϕ_{Dc} of the through hole (5a) is greater than an outer diameter ϕ_{Db} of one of the crankshaft eccentric portions (7a, 7b) and smaller than an outer diameter ϕ_{Da} of the other crankshaft eccentric portion (7a, 7b),

characterized in that

lubricating oil in a storing portion (20) of a bottom of the hermetic container (1) is supplied from a lower end of the crankshaft (7) to the through hole (5a) through an interior of the crankshaft (7), and a region surrounded by the partition plate (5), the rolling pistons (8a, 8b) and the crankshaft (7) is filled with the lubricating oil, and capacity of a compression chamber (11a, 11b) of one of the compression elements (4a, 4b) which compresses by the one crankshaft eccentric portion (7a, 7b) is set smaller than capacity of a compression chamber of the other compression element (4b, 4a).

2. The rotary compressor having two cylinders (6a, 6b) according to claim 1, wherein a height H_b of the one crankshaft eccentric portion (7a, 7b) in its axial direction is higher than a height H_a of the other crankshaft eccentric portion (7a, 7b) in its axial direction.
3. The rotary compressor having two cylinders (6a, 6b) according to claim 1 or 2, wherein the compression element (4a, 4b) which compresses by the other crankshaft eccentric portion (7a, 7b) is placed closer to a main bearing which mainly pivotally supports the crankshaft (7).

Patentansprüche

1. Rotationskompressor mit zwei Zylindern (6a, 6b), in denen zwei Kompressionseinrichtungen (4a, 4b) mit Rollkolben (8a, 8b) in den Zylindern (6a, 6b) benachbart zueinander angeordnet sind, wobei eine Trennplatte (5) dazwischen angeordnet ist,

eine Kurbelwelle (7), die durch eine elektrische Einrichtung (2) gedreht wird, ist in ein Durchgangsloch (5a) der Trennplatte (5) eingesetzt, wobei, wenn sich die Kurbelwelle (7) dreht, sich die Rollkolben (8a, 8b), die in die exzentrischen Kurbelwellenabschnitte (7a, 7b) eingesetzt sind, exzentrisch drehen, und die beiden Zylinder (6a, 6b) durch die exzentrische Drehung der Rollkolben (8a, 8b) in einem hermetischen Behälter (1) Betriebsflüssigkeit in den Zylindern (6a, 6b) komprimieren, wobei ein Innendurchmesser ϕ_{Dc} des Durchgangslochs (5a) größer als ein Außendurchmesser ϕ_{Db} eines der exzentrischen Kurbelwellenabschnitte (7a, 7b) und kleiner als ein Außendurchmesser ϕ_{Da} des anderen exzentrischen Kurbelwellenabschnitts (7a, 7b) ist,
dadurch gekennzeichnet, dass

Schmieröl in einem Speicherabschnitt (20) eines Bodens des hermetischen Behälters (1) von einem unteren Ende der Kurbelwelle (7) zu dem Durchgangsloch (5a) durch ein Inneres der Kurbelwelle (7) zugeführt wird, und ein Bereich, der von der Trennplatte (5), den Rollkolben (8a, 8b) und der Kurbelwelle (7) umgeben ist, mit dem Schmieröl gefüllt ist, und

das Fassungsvermögen einer Kompressionskammer (11a, 11b) einer der Kompressionseinrichtungen (4a, 4b), die durch den einen exzentrischen Kurbelwellenabschnitt (7a, 7b) komprimiert, kleiner als das Fassungsvermögen einer Kompressionskammer der anderen Kompressionseinrichtungen (4b, 4a) eingestellt ist.

2. Rotationskompressor mit zwei Zylindern (6a, 6b) nach Anspruch 1, wobei eine Höhe H_b des einen exzentrischen Kurbelwellenabschnitts (7a, 7b) in seiner axialen Richtung größer ist als eine Höhe H_a des anderen exzentrischen Kurbelwellenabschnitts (7a, 7b) in seiner axialen Richtung.
3. Rotationskompressor mit zwei Zylindern (6a, 6b) nach Anspruch 1 oder 2, wobei die Kompressionseinrichtung (4a, 4b), die durch den anderen exzentrischen Kurbelwellenabschnitt (7a, 7b) komprimiert, näher an einem Haupt-

lager angeordnet ist, das die Kurbelwelle (7) hauptsächlich schwenkbar trägt.

Revendications

1. Compresseur rotatif présentant deux cylindres (6a, 6b), dans lequel deux éléments de compression (4a, 4b) présentant des pistons rotatifs (8a, 8b) dans les cylindres (6a, 6b) sont placés l'un à côté de l'autre tout en prenant en sandwich une plaque de séparation (5) entre eux,

un vilebrequin (7) qui est entraîné en rotation par un élément électrique (2) est inséré dans un trou traversant (5a) de la plaque de séparation (5),

si le vilebrequin (7) tourne, les pistons rotatifs (8a, 8b) insérés dans des parties excentriques (7a, 7b) de vilebrequin tournent de manière excentrique et

les deux cylindres (6a, 6b) compriment le fluide de travail dans les cylindres (6a, 6b) par la rotation excentrique des pistons rotatifs (8a, 8b) dans un récipient hermétique (1),

un diamètre interne ΦD_c du trou traversant (5a) est supérieur à un diamètre externe ΦD_b de l'une des parties excentriques (7a, 7b) de vilebrequin et inférieur à un diamètre externe ΦD_a de l'autre partie excentrique (7a, 7b) de vilebrequin,


caractérisé en ce que

de l'huile de lubrification dans une partie de stockage (20) d'un fond du récipient hermétique (1) est fournie depuis une extrémité inférieure du vilebrequin (7) au trou traversant (5a) à travers un intérieur du vilebrequin (7) et une région entourée par la plaque de séparation (5), les pistons rotatifs (8a, 8b) et le vilebrequin (7) est remplie d'huile de lubrification et


la capacité d'une chambre de compression (11a, 11b) de l'un des éléments de compression (4a, 4b) qui est comprimé par ladite une partie excentrique (7a, 7b) de vilebrequin est réglée de manière à être inférieure à la capacité d'une chambre de compression de l'autre élément de compression (4b, 4a).
2. Compresseur rotatif présentant deux cylindres (6a, 6b) selon la revendication 1, une hauteur H_b de ladite une partie excentrique (7a, 7b) de vilebrequin dans sa direction axiale étant supérieure à une hauteur H_a de l'autre partie excentrique (7a, 7b) de vilebrequin dans sa direction axiale.

3. Compresseur rotatif présentant deux cylindres (6a, 6b) selon la revendication 1 ou 2, l'élément de compression (4a, 4b) qui est comprimé par l'autre partie excentrique (7a, 7b) de vilebrequin étant placé plus près d'un palier principal qui supporte principalement de manière pivotante le vilebrequin (7).


[Fig. 1]

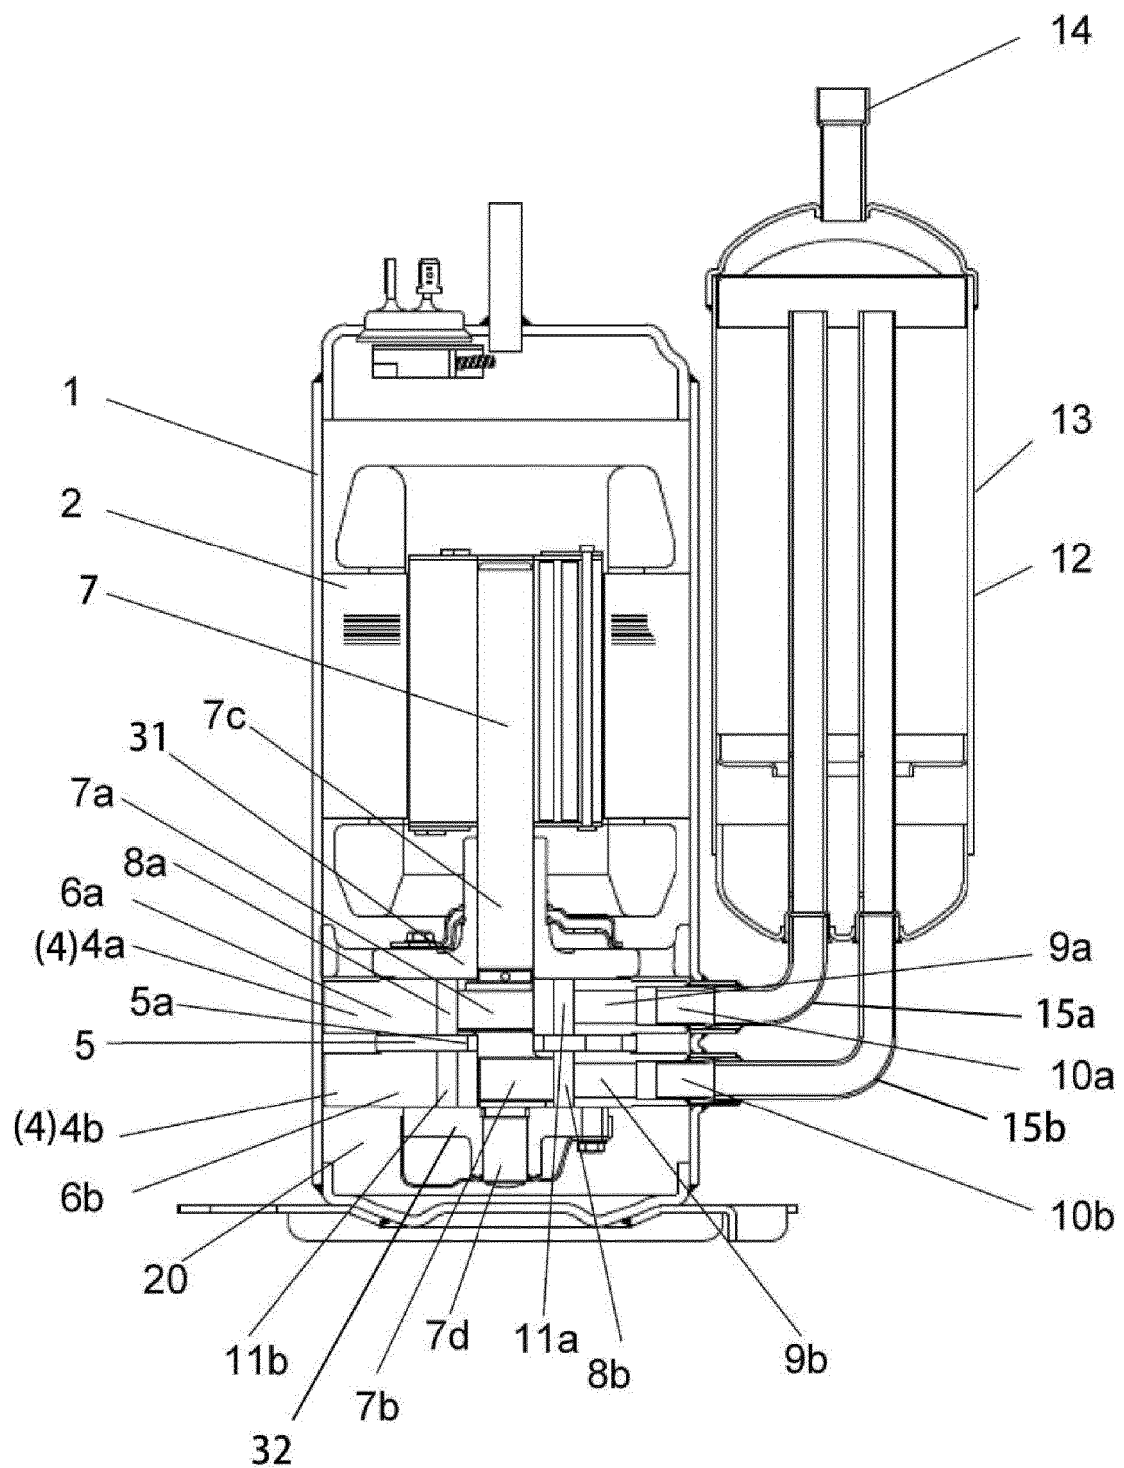


[Fig. 2]

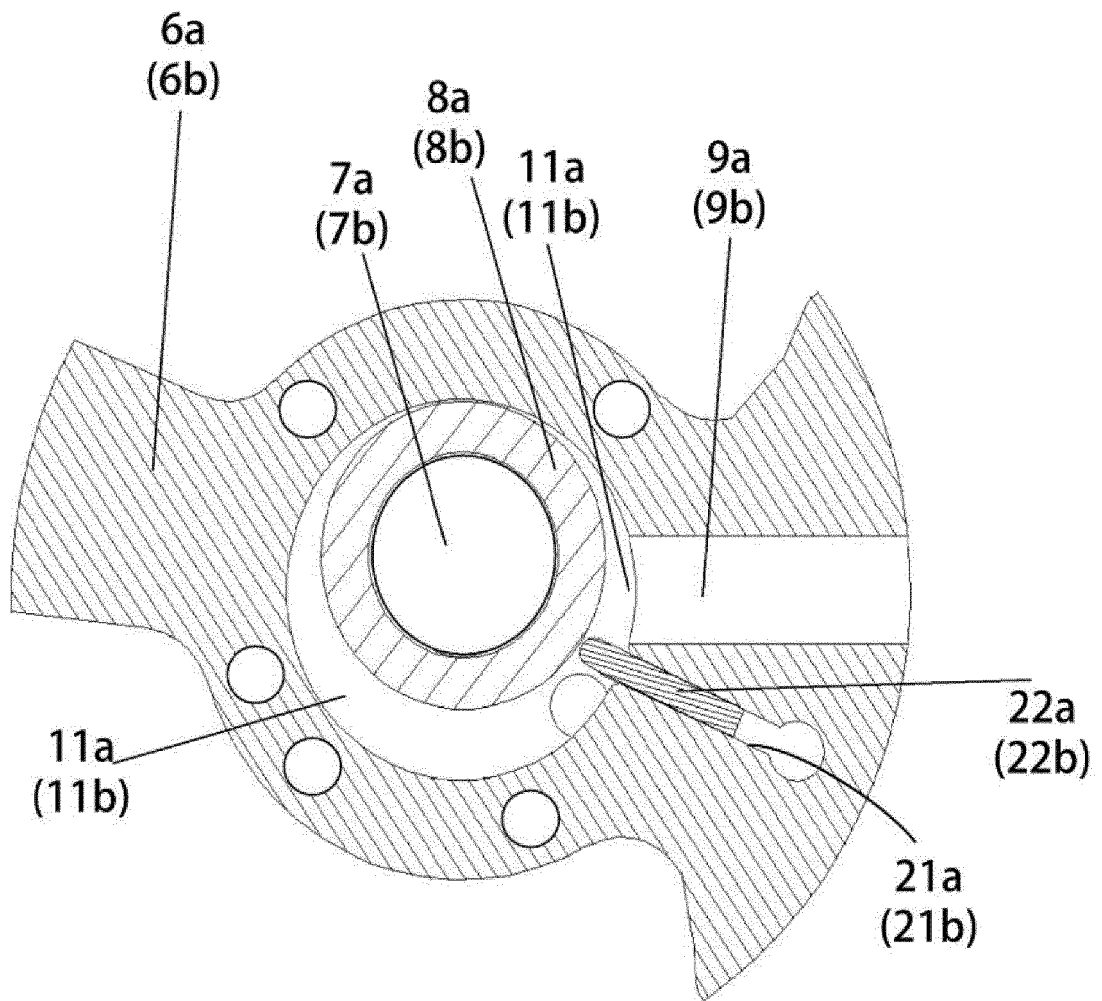



[Fig. 3]

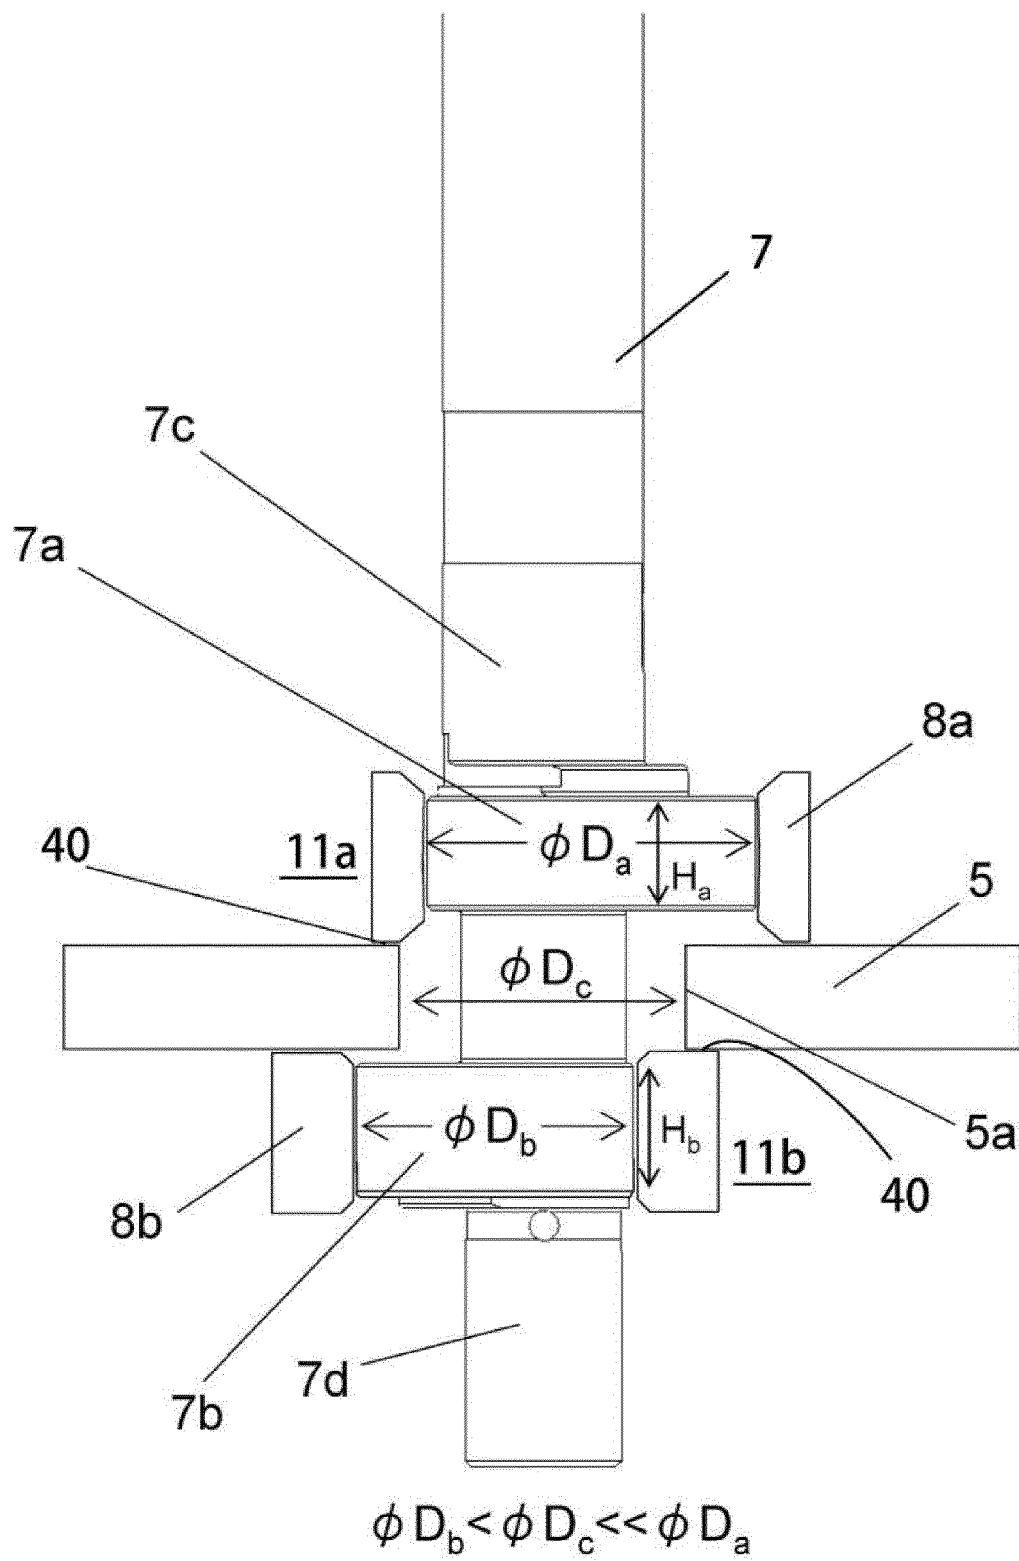


[Fig. 4]

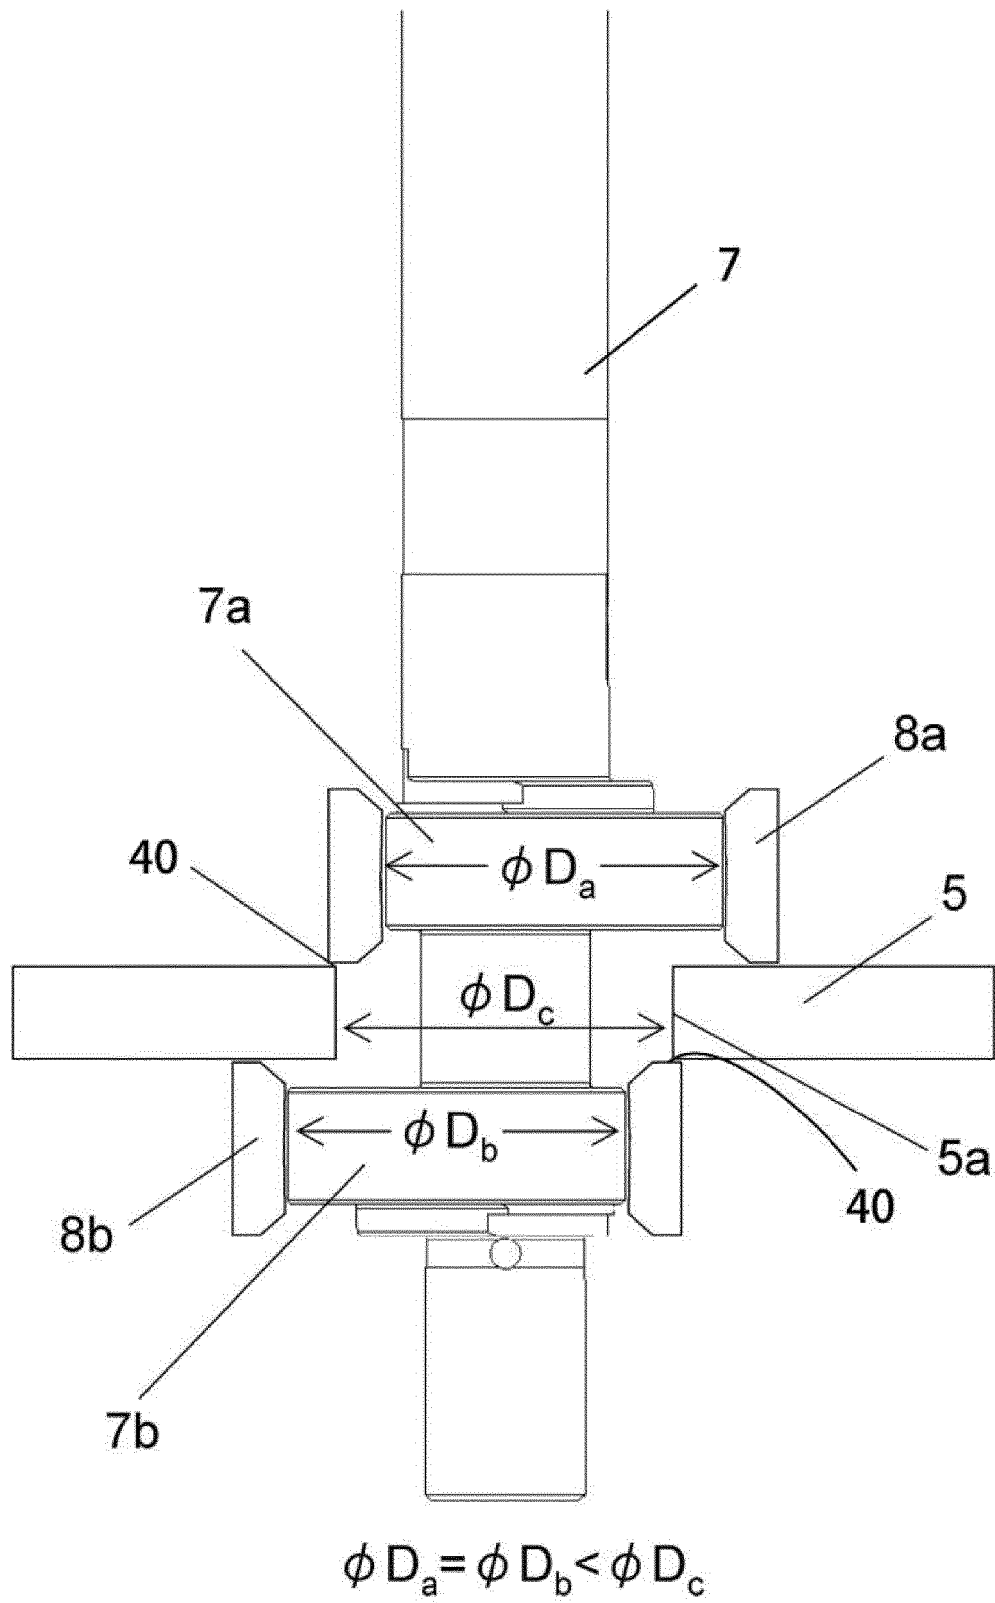


[Fig. 5]

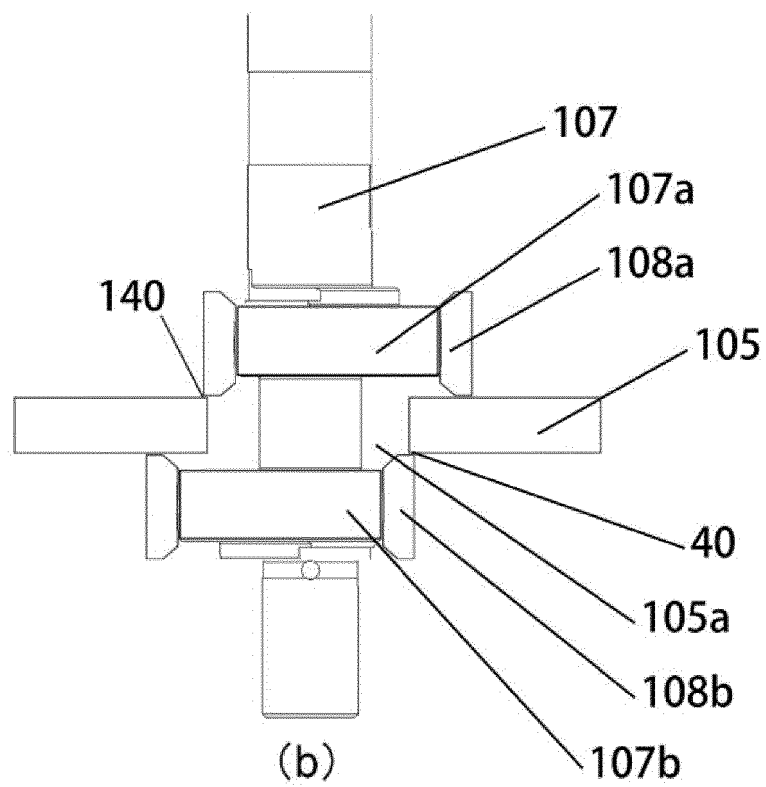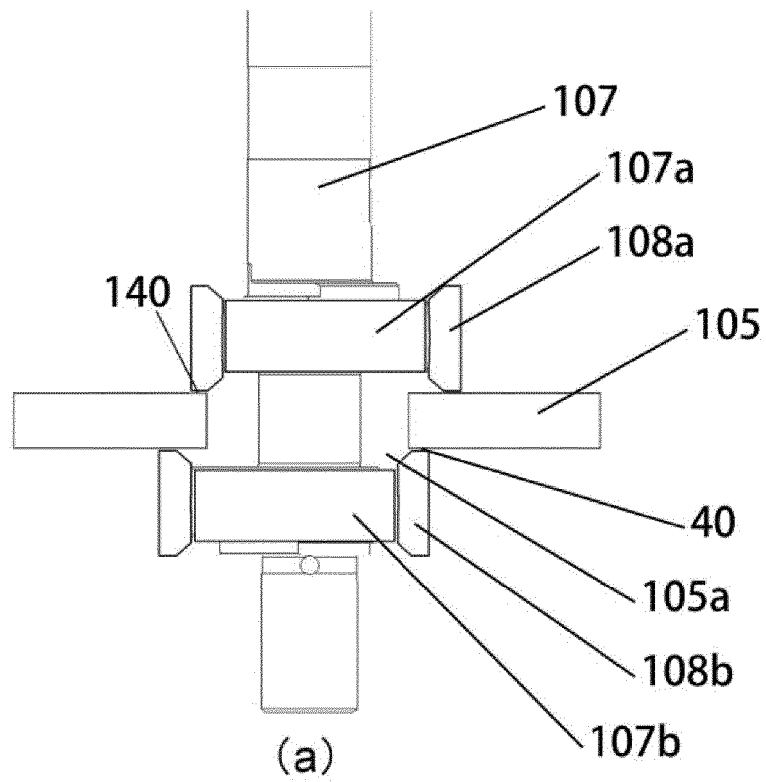

[Fig. 6]

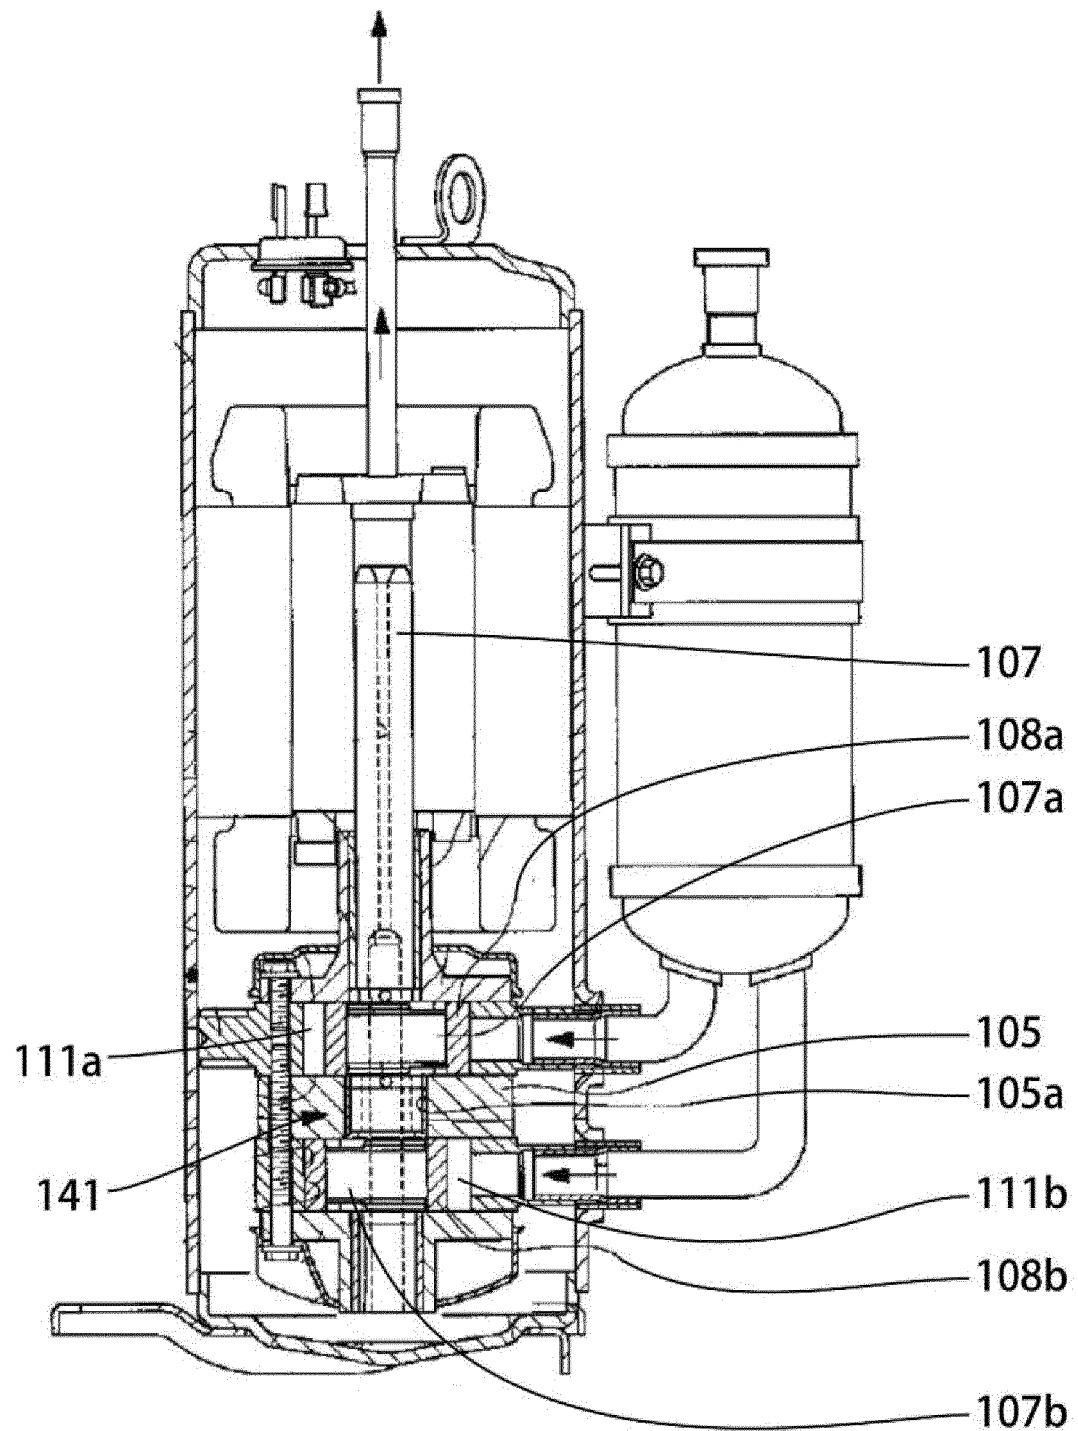

[Fig. 7]

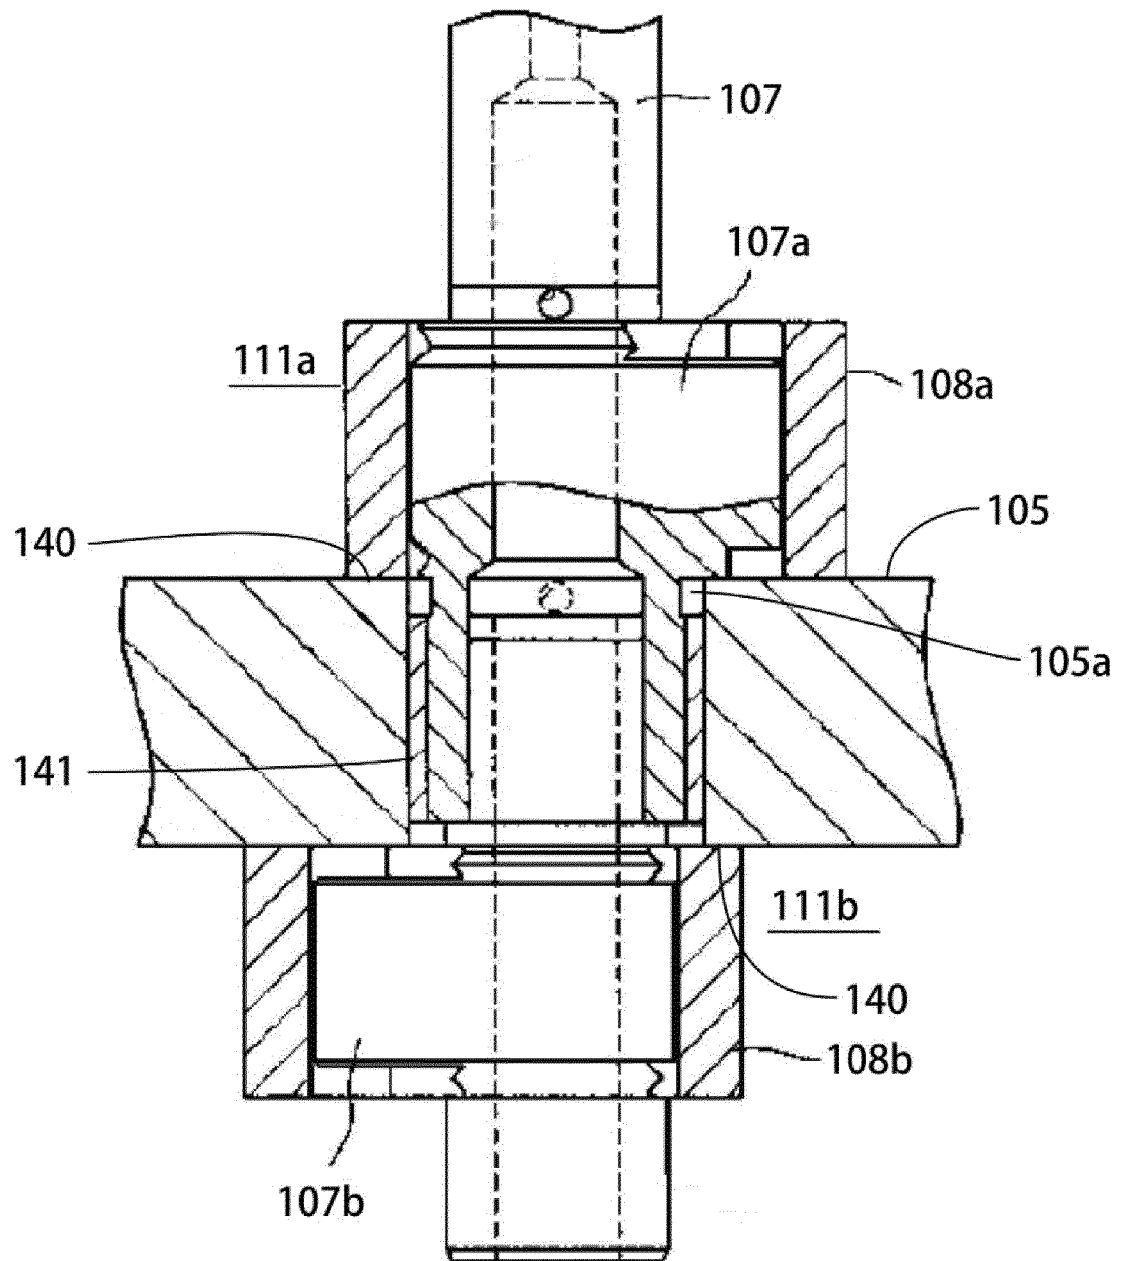

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2005337210 A [0010]
- JP 10009169 A [0010]
- CN 101012832 A [0010]