



(51) International Patent Classification:
G06F 21/51 (2013.01)

(21) International Application Number:
PCT/US2013/046341

(22) International Filing Date:
18 June 2013 (18.06.2013)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **EMPIRE TECHNOLOGY DEVELOPMENT LLC** [US/US]; 2711 Centerville Road, Suite 400, Wilmington, DE 19808 (US).

(72) Inventor: **KHESIN, Oscar**; 4250 Albany Dr., #F303, San Jose, CA 95129 (US).

(74) Agent: **LEE, David, S.**; Brundidge & Stanger, P.C., 2318 Mill Road, Suite 1020, Alexandria, VA 22314 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: REMEDIATING ROGUE APPLICATIONS

100

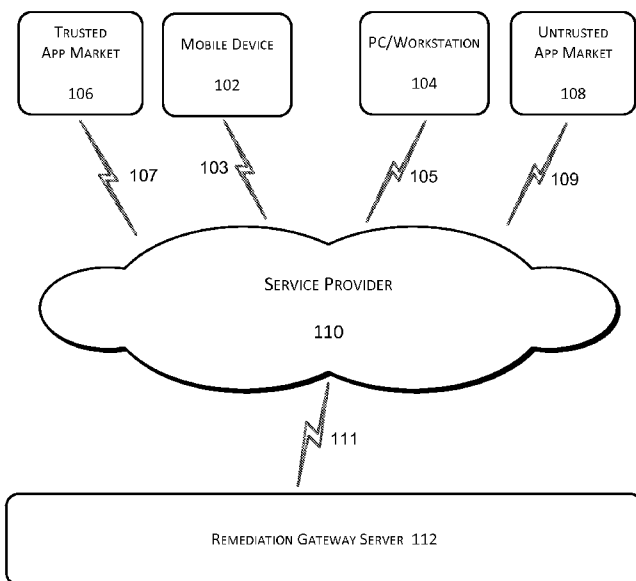


FIG. 1

(57) Abstract: In one example embodiment, a remediating system may include a mobile communication device, to which an application is to be installed, and a remediator that may be configured to remediate the application and transmit the remediated version of the application to the mobile communication device for installation.

REMEDIATING ROGUE APPLICATIONS

TECHNICAL FIELD

[0001] The embodiments described herein pertain generally to remediating malicious applications prior to installation on a client device.

BACKGROUND

[0002] Unless otherwise indicated herein, the approaches described in this section are not prior art to the claims in this application and are not admitted to be prior art by inclusion in this section.

[0003] The ecosystem for client applications, particularly mobile applications, is a robust one that is, as a consequence, targeted by scammers and phishers. Even legitimate applications may be exploited by rogue authors who seek backdoors to gain users' private and/or sensitive data.

SUMMARY

[0004] In one example embodiment, a remediating system may include a mobile communication device, to which an application is to be installed, and a remediator that may be configured to remediate the application and transmit the remediated version of the application to the mobile communication device for installation.

[0005] In another example embodiment, a computer-readable medium may store executable-instructions that, when executed, cause one or more processors to perform operations including receiving an application, identifying potentially malicious code, removing the identified potentially malicious code, inserting replacement code in the place of the removed code, rebuilding the application, testing the rebuilt application in a virtual environment, and transmitting the rebuilt application to an intended client device.

[0006] The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features described above, further aspects, embodiments, and features will become apparent by reference to the drawings and the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] In the detailed description that follows, embodiments are described as illustrations only since various changes and modifications will become apparent to those skilled in the art from the following detailed description. The use of the same reference numbers in different figures indicates similar or identical items.

[0008] **FIG. 1** shows an example market framework in which one or more rogue applications may be remediated, arranged in accordance with at least some embodiments described herein;

[0009] **FIG. 2** shows an example remediation gateway server at which one or more rogue applications may be remediated, arranged in accordance with at least some embodiments described herein;

[0010] **FIG. 3** shows an example processing flow, and sub-flow, of operations for remediating one or more rogue applications, arranged in accordance with at least some embodiments described herein; and

[0011] **FIG. 4** shows a block diagram illustrating an example computing device by which various example solutions described herein may be implemented, arranged in accordance with at least some embodiments described herein.

DETAILED DESCRIPTION

[0012] In the following detailed description, reference is made to the accompanying drawings, which form a part of the description. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. Furthermore, unless otherwise noted, the description of each successive drawing may reference features from one or more of the previous drawings to provide clearer context and a more substantive explanation of the current example embodiment. Still, the example embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented herein. It will be readily understood that the aspects of the present disclosure, as generally described herein and illustrated in the drawings, may be arranged, substituted, combined, separated, and designed in a wide variety of different configurations, all of which are explicitly contemplated herein.

[0013] FIG. 1 shows an example market framework 100 in which one or more rogue applications may be remediated, arranged in accordance with at least some embodiments described herein. As depicted, market framework 100 includes, at least, a mobile device 102, a workstation 104, a trusted application market 106, an untrusted application market 108, a service provider 110, and a remediation gateway server 112. Data connections 103, 105, 107, and 109 may respectively communicatively couple mobile device 102, workstation 104, trusted application market 106, and untrusted application market 108 to service provider 110.

[0014] An unscrupulous mobile device, or even workstation, may download legitimate applications from both trusted and untrusted online markets. However, large proportions of malware may be delivered via repackaging of legitimate, *i.e.*, trusted, applications. Thus, by the various embodiments described herein, trusted applications may be downloaded to remediation gateway server 112 to generate a database of trusted market application signatures, which may

then be compared to stored malicious application signatures to detect re-packaging or other indicators of a rogue or malicious application.

[0015] Market framework 100 may pertain to an ecosystem by which a user or entity that exercises control over a client device may purchase or otherwise acquire confidence in an application purchased for hosting on the client device by not only having the purchased application scanned for malicious processes but also automatically converted and rebuilt into a remediated and safe application.

[0016] Mobile device 102 may refer to a client device that is configured to transmit and receive digital messages over a communication link to a mobile communications network provided by a wireless service provider. Mobile device 102 may be implemented as a portion of a small-form factor portable (or mobile) electronic device such as a mobile phone, cell phone, smartphone, personal data assistant (PDA), a personal media player device, an application specific device, a hybrid device that include any of the above functions, or as a personal computer including tablet, laptop computer and non-laptop computer configurations.

[0017] Workstation 104 may refer to a client device that is configured to transmit and receive digital messages over a communication link, and that may be implemented as a personal computer, also including tablet, laptop computer and non-laptop computer configuration, which may include a statically mounted device that remains stationary to execute the functions for which it is intended. Workstation 104 may be configured to be communicatively coupled to other devices by such non-cellular technologies, as well as any mobile communications technology, *e.g.*, GSM, CDMA, *etc.*, depending upon the wireless service provider.

[0018] Trusted application market 106 may refer to an online store that is designed to provide consumers and enterprise customers the ability to find, purchase, and/or deploy applications, which may be web-based or hosted on client devices. Trusted application market 106 may be deemed a trustworthy source of consumer and enterprise application as a result of receiving

above-threshold scores of reliability by internet or online reputation systems, *e.g.*, McAfee® TrustedSource®, or otherwise be accorded a score or accreditation of reliability by a similar third-party. Non-limiting examples of trusted application market 106 may include Apple® App Store®, Amazon® Appstore, Google® Apps Marketplace®, Windows® Marketplace®, *etc.*

[0019] Untrusted application market 108 may refer to an online source of consumer- and enterprise- applications, which is not currently scored, accredited, or verified as a trusted source by an internet or online reputation system or similar third-party.

[0020] Service provider 110 may refer to a corporate organization or business entity that provides communication and/or content services for mobile communications subscribers. In accordance with the embodiments described herein, service provider 110 may refer to a telecommunications service provider, an Internet service provider (ISP), an application service provider (ASP), or any combination thereof. Service provider 110 may provide mobile device 102 and/or workstation 104 with access to trusted app market 106 and untrusted app market 108.

[0021] As a telecommunications service provider, service provider 110 may provide mobile device 102 with wireless local area network (WLAN or IEEE 802.11), WiMAX™ (Worldwide Interoperability for Microwave Access), Bluetooth™, and other analog and digital wireless voice and data transmission capabilities.

[0022] As an internet service provider (ISP), service provider 110 may provide mobile device 102 and/or workstation 104 with both wireless and wired access to the Internet and any other public computer networking system.

[0023] As an application service provider, service provider 110 may provide mobile device 102 and/or workstation 104 with on-demand software or software as a service, which may be further regarded as providing access to one or more particular application programs using a standard networking protocol, *e.g.*, HTTP. In some examples of market framework 100, trusted app market 106 may be integrated in service provider 110, embodied as application service provider.

[0024] Remediation gateway server 112 may refer to a service provider that is included in any of the aforementioned example embodiments of service provider 110 or is implemented as a stand-alone, third-party service. Regardless of its implementation, remediation gateway server 112 may refer to a service provider that detects malicious applications and rebuilds malicious applications into safe applications, in accordance with the various embodiments described herein. That is, remediation gateway server 112 provides for the detection and remediation of malicious applications into safe applications.

[0025] Data connections 103, 105, 107, and 109 may respectively communicatively couple mobile device 102, workstation 104, trusted application market 106, and untrusted application market 108 to service provider 110, utilizing at least one of multiple available communication protocols. The communication protocols may include any mobile communications technology, *e.g.*, GSM, CDMA, *etc.*, depending upon the technologies supported by service provider 110. The one or more data connections may be further implemented utilizing non-cellular technologies such as Wi-Fi™, wireless local area network (WLAN or IEEE 802.11), WiMAX™ (Worldwide Interoperability for Microwave Access), Bluetooth™, hard-wired connections, *e.g.*, cable, phone lines, and other analog and digital wireless voice and data transmission technologies.

[0026] FIG. 2 shows an example remediation gateway server 112 at which one or more rogue applications may be remediated, arranged in accordance with at least some embodiments described herein. As depicted, remediation gateway server 112 may include a remediation manager 200, a user interface (UI) 202, a remediation gateway server database 204, a malicious application signatures database 206, a detected malicious application signatures service 208, a decompiler/parser 210, a system/method call profiler 212, an application code modifier 214, an application rebuilder 216, an application runtime virtual modeler 218, and a remediated applications database 220. Embodiments of remediation gateway server 112 may include the aforementioned

features and components in varying combinations, all within the scope of the examples described herein.

[0027] Remediation manager 200 may refer to an application or program that is configured, programmed, or otherwise designed to manage, at least, remediation of malicious applications and authentication of applications that are at least suspected of being rogue or malicious, which may be submitted to remediation server 112 regardless of whether a source of a respective one of the applications is trusted application market 106 or untrusted application market 108.

[0028] User interface (UI) 202 may refer to a graphical user interface (GUI), web-based UI, and/or touchscreen by which a user of mobile device 102 and/or workstation 104 provides graphical, textual, or auditory input to remediation gateway server 112 to implement remediating of rogue applications.

[0029] Remediation gateway server database 204 may refer to a storage unit incorporated into, otherwise associated with, remediation gateway server 112. Remediation gateway server database 204 may store therein, as non-limiting examples, security and policy settings of a user or entity that exercises control over mobile device 102 and/or workstation 104; trusted market application signatures; security manager methods and classes; best practices security and policy settings, *etc.*, in accordance with the various embodiments of remediating rogue applications described herein.

[0030] Malicious application signature database 206 may refer to another storage unit incorporated into, or otherwise associated with, remediation gateway server 112 that stores signatures and/or certificates of known malicious applications. Accordingly, various embodiments of remediating rogue applications may contemplate remediation gateway server 112 being connected to a network of other embodiments thereof, thus providing a network by which captured signatures of detected malicious applications may be shared.

[0031] Detected malicious application signature service 208 may refer to a component or module that may be configured, programmed, or otherwise designed to analyze a call profile of potentially malicious method or system calls by comparing them to stored malicious application signatures. Non-limiting examples of known categories of malicious application signatures which may be stored therein may include re-packaging signatures, update signatures, drive-by downloads, over-privileges, adware, spyware, *etc.*

[0032] Decompiler/parser 210 may refer to a component or module that may be configured, programmed, or otherwise designed to convert native or executable code of the application to source code, *e.g.*, Java. Alternatively, decompiler/parser 210 may be configured, programmed, or otherwise designed to merely scan or parse the existing code of the application.

[0033] System/method call profiler 212 may refer to a component or module that may be configured, programmed, or otherwise designed to parse or analyze the source code of the application that has been converted, scanned, or parsed by decompiler/parser 210, to identify some or all system or method calls that may be potentially malicious. The identification of a system or method call as being malicious may be based on, *e.g.*, stored best practices security and policy settings.

[0034] Application code modifier 214 may refer to a component or module that may be configured, programmed, or otherwise designed to remove and/or replace the system or method calls that have been identified as being potentially malicious in the application downloaded to remediation gateway server 112. For example, system or method calls that have been identified as being potentially malicious may be replaced with relevant system or method calls and/or custom code that may be stored in remediation gateway server database 204 that are configured to inspect corresponding behavior of the application or program, as well as arguments thereof, and perform at least one check at runtime. That is, the identification of method or system calls that may be potentially malicious may be based on an analysis of runtime behavior. In some example

embodiments, the custom code may be proactively written and stored, based on a compilation of past rogue system and/or method calls.

[0035] Application rebuilder 216 may refer to a component or module that may be configured, programmed, or otherwise designed to rebuild the application, from which potentially malicious system or method calls have been removed, using the relevant system or method calls and/or custom code that may be stored in remediation gateway server database 204. Thus, application rebuilder may provide the application with required functionality and at least desired measures of privacy and security.

[0036] Application runtime virtual modeler 218 may refer to a component or module that may be configured, programmed, or otherwise designed to execute the application, as part of a dynamic analysis, to observe the impact of the executed application on either of mobile device 102 or workstation 104, as well as any network connected thereto. Such functionality may be implemented as part of a dynamic analysis, which may alternatively be referred to as a sandbox analysis, to identify irregularities, including potential rogue or potentially malicious behavior, *i.e.*, rogue system or method calls.

[0037] Application runtime virtual modeler 218 may be further configured, programmed, or otherwise designed to test a re-built application in a virtual environment.

[0038] Remediated application database 220 may refer to a storage unit incorporated into, or otherwise associated with, remediation gateway server 112 that stores applications that have been re-built, so that trusted system or method calls and trusted signatures may be utilized for comparison against calls and signatures from applications, which are at least suspected of being rogue or malicious applications that are subsequently downloaded to remediation gateway server 112.

[0039] In accordance with at least one alternative embodiment, workstation 104, depicted and described with reference to FIG. 1, may refer to a client device that is further configured to host

and/or deploy remediation manager 200 and all corresponding components including, but not limited to, user interface (UI) 202, remediation gateway server database 204, a malicious application signatures database 206, detected malicious application signatures service 208, decompiler/parser 210, system/method call profiler 212, an application code modifier 214, application rebuilder 216, application runtime virtual modeler 218, and remediated applications database 220.

[0040] Thus, by such alternative embodiments, mobile device 102 may access one or both of trusted app market 106 and untrusted app market 108 directly, *i.e.*, without relying on service provider 110 as an application service provider. The aforementioned remediation gateway server database 204, a malicious application signatures database 206, detected malicious application signatures service 208, decompiler/parser 210, system/method call profiler 212, an application code modifier 214, application rebuilder 216, application runtime virtual modeler 218, and remediated applications database 220 may be initially populated when deployed upon workstation 104; and, if needed, may be further updated by software provider 110.

[0041] FIG. 3 shows an example processing flow, including a sub-flow, of operations for remediating one or more rogue applications, arranged in accordance with at least some embodiments described herein. Processing flow 300 may be implemented by components and modules, including an operating system, which may be configured, programmed, or otherwise designed to be executed on remediation gateway server 112. Processing flow 300 may include one or more operations, actions, or functions depicted by one or more blocks 302, 304, 306, and 308. Further, block 306 may be further described with the sub-flow of operations, actions, or functions depicted by one or more blocks 306A, 306B, 306C, and 306D. Although illustrated as discrete blocks, various blocks may be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation. Processing flow 300 may start at block 302.

[0042] Block 302 (Register User) may refer to remediation manager 200 receiving profile information and/or security and policy settings of a user of mobile device 102 and/or workstation

104, via UI 202, and storing the received profile information and/or security and policy settings in remediation gateway server database 204. Such profile information and/or security and policy settings may be described or categorized as private information that the user is willing to have released, types of application functionality for which such private information may be released, and other context for the release of such private information. Processing flow 300 may proceed from block 302 to block 304.

[0043] Block 304 (Receive Request for Remediation) may refer to remediation manager 200 downloading or otherwise receiving an application, which was transmitted to remediation gateway server 112, via UI 202. The source of the application may be trusted application market 106 or untrusted application market 108, though the latter is likely according to multiple embodiments. That is, in accordance with the embodiments of remediating rogue applications described herein, it is likely, though not exclusively so, that the direct or indirect source of the aforementioned application is untrusted application market 108; therefore, the application may be at least suspected of being rogue or malicious.

[0044] In accordance with at least one example embodiment, the user of mobile device 102 and/or workstation 104 may transmit a request to remediation manager 200 to download, analyze, and, if needed, remediate an application according to the registered privacy and security requirements. In accordance with at least one other example embodiment, the user of mobile device 102 and/or workstation 104 may install the application thereon and then send the request for remediation to remediation gateway server 112 when local anti-malware software determines that the application is rogue or malicious. Processing flow 300 may proceed from block 304 to block 306.

[0045] Block 306 (Remediate Application) may refer to remediation manager managing, at least, remediation of the application that is, at least, suspected of being rogue or malicious. Block 306 may include one or more operations, actions, or functions, depicted by one or more blocks 306A, 306B, 306C, and 306D, performed under the guidance and/or direction of remediation manager 200.

Further, the remediation of an application that is, at least, suspected of being rogue or malicious may be performed based on, *e.g.*, the user's registered security and policy settings, trusted market application signatures, secure manager methods and classes, and best practices security and policy settings, all of which may be stored in remediation gateway server database 204. Although illustrated as discrete blocks, these blocks may also be divided into additional blocks, combined into fewer blocks, or eliminated, depending on the desired implementation. Processing of block 306 may start at sub-block 306A.

[0046] Sub-block 306A (Decompile) may refer to remediation manager 200 invoking decompiler/parser 210 to convert native or executable code of the application to source code, *e.g.*, Java. Alternatively, decompiler/parser 210 may be invoked to scan or parse the existing code of the application. Processing of block 306 may proceed from sub-block 306A to sub-block 306B.

[0047] Sub-block 306B (Identify System/Method Calls to be Replaced) may refer to remediation manager 200 invoking system/method call profiler 212 to analyze the converted source code of the application to identify system or method calls that may be potentially malicious based on, at least, the stored best practices security and policy settings. In accordance with the alternative embodiment by which decompiler/parser 210 may be invoked to scan or parse the existing code of the application, system/method call profiler 212 may be further invoked to identify all system or method calls that may be potentially malicious. Regardless of the implementation embodiment, system/method call profiler 212 may generate a system/method call profile of any identified potentially malicious calls for the application.

[0048] Remediation manager 200 may then invoke detected malicious application signature service 208 to check the system/method call profile of identified potentially malicious calls against the stored contents of malicious application signatures database 206. Non-limiting examples of known categories of malicious application signatures which may be stored therein may include re-packaging signatures, update signatures, drive-by downloads, over-privileges, adware, spyware, *etc.*

In accordance with at least one example embodiment, remediation manager 200 may invoke detected malicious application signature service 208 to hash all file packers of the application and compare the hash result to a list of known malicious files.

[0049] Sub-block 306B may alternatively refer to remediation manager 200 invoking application runtime virtual modeler 218 to execute the application, as part of a dynamic analysis, to observe the impact of the executed application on either of mobile device 102 or workstation 104, as well as any network connected thereto. In accordance with such a dynamic, *i.e.*, sandbox, analysis, strong indicators of the application being a rogue or malicious application include one or more configuration changes, registry tampering, network redirections, installation of extraneous executables, buffer overflows, memory overflow, memory corruption, *etc.* Thus, system or method calls that may be potentially malicious may be further identified. Processing of block 306 may proceed from sub-block 306B to sub-block 306C.

[0050] Sub-block 306C (Remove/Replace Identified System/Method Calls) may refer to remediation manager 200 invoking application code modifier service 214 to remove and/or replace the system or method calls that have been identified as being potentially malicious. In at least one example embodiment, the system or method calls that have been identified as being potentially malicious may be replaced with relevant system or method calls and/or custom code that may be stored in remediation gateway server database 204. Processing of block 306 may proceed from sub-block 306C to sub-block 306D.

[0051] Sub-block 306D (Rebuild/Test Application) may refer to remediation manager invoking application rebuilder service 216 to rebuild the application with the relevant system or method calls and/or custom code that may be stored in remediation gateway server database 204 to provide required functionality for the application and to further provide at least desired measures of privacy and security.

[0052] Remediation manager 200 may then, again, invoke application runtime virtual modeler 218 to test the re-built application in a virtual environment. Upon successful execution of the re-built application, *i.e.*, with no rogue or malicious system or method calls, processing flow may proceed from block 306 to block 308.

[0053] Block 308 (Transmit Application to Client Device) may refer to remediation manager storing the rebuilt application in remediation application database 220, for future reference, and transmitting the rebuilt application back to mobile device 102 or workstation 104 for trusted execution thereon.

[0054] Accordingly, users of a mobile device, or workstation, may receive a remediated application that has been rewritten with optimal security and privacy policy functionality incorporated therein. In accordance with user security and policy settings, a user may be able to change privacy policies for the remediated application at runtime.

[0055] FIG. 4 shows a block diagram illustrating an example computing device by which various example solutions described herein may be implemented, arranged in accordance with at least some embodiments described herein.

[0056] In a very basic configuration 402, computing device 400 typically includes one or more processors 404 and a system memory 406. A memory bus 408 may be used for communicating between processor 404 and system memory 406.

[0057] Depending on the desired configuration, processor 404 may be of any type including but not limited to a microprocessor (μ P), a microcontroller (μ C), a digital signal processor (DSP), or any combination thereof. Processor 404 may include one more levels of caching, such as a level one cache 410 and a level two cache 412, a processor core 414, and registers 416. An example processor core 414 may include an arithmetic logic unit (ALU), a floating point unit (FPU), a digital signal processing core (DSP Core), or any combination thereof. An example memory controller 418 may

also be used with processor **404**, or in some implementations memory controller **418** may be an internal part of processor **404**.

[0058] Depending on the desired configuration, system memory **406** may be of any type including but not limited to volatile memory (such as RAM), non-volatile memory (such as ROM, flash memory, etc.) or any combination thereof. System memory **406** may include an operating system **420**, one or more applications **422**, and program data **424**. Application **422** may include trusted remediation manager **200** that is configured to coordinate the functions as described herein including those described with respect to processing flow 300 of **FIG. 3**. Program data **424** may include data stored in remediation gateway database **204** that may be utilized by the components or modules invoked by remediation manager **200** as described herein. Application **422** may be arranged to operate with program data **424** on operating system **420** such that implementations of remediating of rogue applications may be implemented as described herein. This described basic configuration **402** is illustrated in **FIG. 4** by those components within the inner dashed line.

[0059] Computing device **400** may have additional features or functionality, and additional interfaces to facilitate communications between basic configuration **402** and any required devices and interfaces. For example, a bus/interface controller **430** may be used to facilitate communications between basic configuration **402** and one or more data storage devices **432** via a storage interface bus **434**. Data storage devices **432** may be removable storage devices **436**, non-removable storage devices **438**, or a combination thereof. Examples of removable storage and non-removable storage devices include magnetic disk devices such as flexible disk drives and hard-disk drives (HDD), optical disk drives such as compact disk (CD) drives or digital versatile disk (DVD) drives, solid state drives (SSD), and tape drives to name a few. Example computer storage media may include volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information, such as computer readable instructions, data structures, program modules, or other data.

[0060] System memory **406**, removable storage devices **436** and non-removable storage devices **438** are examples of computer storage media. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which may be used to store the desired information and which may be accessed by computing device **400**. Any such computer storage media may be part of computing device **400**.

[0061] Computing device **400** may also include an interface bus **440** for facilitating communication from various interface devices (e.g., output devices **442**, peripheral interfaces **444**, and communication devices **446**) to basic configuration **402** via bus/interface controller **430**. Example output devices **442** include a graphics processing unit **448** and an audio processing unit **450**, which may be configured to communicate to various external devices such as a display or speakers via one or more A/V ports **452**. Example peripheral interfaces **544** include a serial interface controller **454** or a parallel interface controller **456**, which may be configured to communicate with external devices such as input devices (e.g., keyboard, mouse, pen, voice input device, touch input device, etc.) or other peripheral devices (e.g., printer, scanner, etc.) via one or more I/O ports **458**. An example communication device **446** includes a network controller **460**, which may be arranged to facilitate communications with one or more other computing devices **462** over a network communication link via one or more communication ports **464**.

[0062] The network communication link may be one example of a communication media. Communication media may typically be embodied by computer readable instructions, data structures, program modules, or other data in a modulated data signal, such as a carrier wave or other transport mechanism, and may include any information delivery media. A “modulated data signal” may be a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media

may include wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, radio frequency (RF), microwave, infrared (IR) and other wireless media. The term computer readable media as used herein may include both storage media and communication media.

[0063] Computing device **400** may be implemented as a portion of a small-form factor portable (or mobile) electronic device such as a cell phone, a personal data assistant (PDA), a personal media player device, a wireless web-watch device, a personal headset device, an application specific device, or a hybrid device that include any of the above functions. Computing device **400** may also be implemented as a personal computer including both laptop computer and non-laptop computer configurations.

[0064] There is little distinction left between hardware and software implementations of aspects of systems; the use of hardware or software is generally (but not always, in that in certain contexts the choice between hardware and software can become significant) a design choice representing cost vs. efficiency tradeoffs. There are various vehicles by which processes and/or systems and/or other technologies described herein may be implemented, *e.g.*, hardware, software, and/or firmware, and that the preferred vehicle may vary with the context in which the processes and/or systems and/or other technologies are deployed. For example, if an implementer determines that speed and accuracy are paramount, the implementer may opt for a mainly hardware and/or firmware vehicle; if flexibility is paramount, the implementer may opt for a mainly software implementation; or, yet again alternatively, the implementer may opt for some combination of hardware, software, and/or firmware.

[0065] The foregoing detailed description has set forth various embodiments of the devices and/or processes for system configuration 100 via the use of block diagrams, flowcharts, and/or examples. Insofar as such block diagrams, flowcharts, and/or examples contain one or more functions and/or operations, it will be understood by those within the art that each function and/or

operation within such block diagrams, flowcharts, or examples can be implemented, individually and/or collectively, by a wide range of hardware, software, firmware, or virtually any combination thereof. In one embodiment, several portions of the subject matter described herein may be implemented via Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs), digital signal processors (DSPs), or other integrated formats. However, those skilled in the art will recognize that some aspects of the embodiments disclosed herein, in whole or in part, can be equivalently implemented in integrated circuits, as one or more computer programs running on one or more computers, *e.g.*, as one or more programs running on one or more computer systems, as one or more programs running on one or more processors, *e.g.*, as one or more programs running on one or more microprocessors, as firmware, or as virtually any combination thereof, and that designing the circuitry and/or writing the code for the software and or firmware would be well within the skill of one of skill in the art in light of this disclosure. In addition, those skilled in the art will appreciate that the mechanisms of the subject matter described herein are capable of being distributed as a program product in a variety of forms, and that an illustrative embodiment of the subject matter described herein applies regardless of the particular type of signal bearing medium used to actually carry out the distribution. Examples of a signal bearing medium include, but are not limited to, the following: a recordable type medium such as a floppy disk, a hard disk drive, a CD, a DVD, a digital tape, a computer memory, etc.; and a transmission type medium such as a digital and/or an analog communication medium, *e.g.*, a fiber optic cable, a waveguide, a wired communications link, a wireless communication link, *etc.*.

[0066] Those skilled in the art will recognize that it is common within the art to describe devices and/or processes in the fashion set forth herein, and thereafter use engineering practices to integrate such described devices and/or processes into data processing systems. That is, at least a portion of the devices and/or processes described herein can be integrated into a data processing system via a reasonable amount of experimentation. Those having skill in the art will recognize that

a typical data processing system generally includes one or more of a system unit housing, a video display device, a memory such as volatile and non-volatile memory, processors such as microprocessors and digital signal processors, computational entities such as operating systems, drivers, graphical user interfaces, and applications programs, one or more interaction devices, such as a touch pad or screen, and/or control systems including feedback loops and control motors, *e.g.*, feedback for sensing position and/or velocity; control motors for moving and/or adjusting components and/or quantities. A typical data processing system may be implemented utilizing any suitable commercially available components, such as those typically found in data computing/communication and/or network computing/communication systems.

[0067] The herein described subject matter sometimes illustrates different components contained within, or connected with, different other components. It is to be understood that such depicted architectures are merely examples, and that in fact many other architectures can be implemented which achieve the same functionality. In a conceptual sense, any arrangement of components to achieve the same functionality is effectively "associated" such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular functionality can be seen as "associated with" each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being "operably connected", or "operably coupled", to each other to achieve the desired functionality, and any two components capable of being so associated can also be viewed as being "operably couplable", to each other to achieve the desired functionality. Specific examples of operably couplable include but are not limited to physically mateable and/or physically interacting components and/or wirelessly interactable and/or wirelessly interacting components and/or logically interacting and/or logically interactable components.

[0068] Lastly, with respect to the use of substantially any plural and/or singular terms herein, those having skill in the art can translate from the plural to the singular and/or from the

singular to the plural as is appropriate to the context and/or application. The various singular/plural permutations may be expressly set forth herein for sake of clarity.

[0069] It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims, *e.g.*, bodies of the appended claims, are generally intended as “open” terms, *e.g.*, the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” *etc.* It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to embodiments containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an,” *e.g.*, “a” and/or “an” should be interpreted to mean “at least one” or “one or more;” the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should be interpreted to mean at least the recited number, *e.g.*, the bare recitation of “two recitations,” without other modifiers, means at least two recitations, or two or more recitations. Furthermore, in those instances where a convention analogous to “at least one of A, B, and C, *etc.*” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention, *e.g.*, “a system having at least one of A, B, and C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, *etc.* In those instances where a convention analogous

to “at least one of A, B, or C, *etc.*” is used, in general such a construction is intended in the sense one having skill in the art would understand the convention, *e.g.*, “a system having at least one of A, B, or C” would include but not be limited to systems that have A alone, B alone, C alone, A and B together, A and C together, B and C together, and/or A, B, and C together, *etc.* It will be further understood by those within the art that virtually any disjunctive word and/or phrase presenting two or more alternative terms, whether in the description, claims, or drawings, should be understood to contemplate the possibilities of including one of the terms, either of the terms, or both terms. For example, the phrase “A or B” will be understood to include the possibilities of “A” or “B” or “A and B.”

[0070] From the foregoing, it will be appreciated that various embodiments of the present disclosure have been described herein for purposes of illustration, and that various modifications may be made without departing from the scope and spirit of the present disclosure. Accordingly, the various embodiments disclosed herein are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

WE CLAIM:

1. A remediating system, comprising:

a mobile communication device to which an application is to be installed; and

a remediator configured to:

remediate the application, and

transmit the remediated version of the application to the mobile communication device for installation.

2. The remediating system of Claim 1, wherein the remediator is configured to remediate the application by:

eliminating malicious code from the application, and

incorporating, into the application, code that complies with accepted security and policy settings.

3. The remediating system of Claim 1, wherein the remediator is configured to remediate the application by:

identifying, based on a statistical analysis, potential malicious method or system calls; and

replacing the identified potential malicious method or system calls with one or more custom method or system calls that are configured to inspect corresponding program behavior and arguments and perform at least one check at runtime.

4. The remediating system of Claim 1, wherein the remediator is implemented as a service by a service provider.

5. The remediating system of Claim 1, wherein the remediator is implemented as a tool on a workstation to which the mobile communication device is registered.

6. A computer-readable medium that stores instructions thereon that, when executed, cause one or more processors to execute operations directed towards remediating rogue applications, the operations comprising:

receiving an application;

identifying potentially malicious code;

removing the identified potentially malicious code;

inserting replacement code in the place of the removed code to remediate the application;

rebuilding application;

testing the rebuilt application in a virtual environment; and

transmitting the rebuilt application to an intended client device.

7. The computer-readable medium of Claim 6, wherein the computer-readable medium is included in a software framework of a remediating service.

8. The computer-readable medium of Claim 6, wherein the computer-readable medium is configured to be executed on a workstation to which the intended client device is communicatively coupled.

9. The computer-readable medium of Claim 6, wherein the receiving includes receiving the application after purchase prior to installation thereof.

10. The computer-readable medium of Claim 6, wherein the identifying includes:

converting executable code to source code;
parsing source code or executable code; and
identifying method or system calls that may be potentially malicious.

11. The computer-readable medium of Claim 10, wherein the identifying methods or system calls that may be potentially malicious includes:

executing the application for dynamic analysis, and
identifying one or more irregularities or potentially malicious behavior .

12. The computer-readable medium of Claim 11, wherein the one or more irregularities or potentially malicious behavior include one or more of configuration changes, registry tampering, network redirections, installation of rogue executables, buffer overflows, or memory corruption.

13. The computer-readable medium of Claim 10, wherein the identifying method or system calls that may be potentially malicious is executed based on a statistical analysis.

14. The computer-readable medium of Claim 13, wherein the identifying method or system calls that may be potentially malicious includes comparing the source code or executable code against a database of malicious application signatures

15. The computer-readable medium of Claim 10, wherein the identifying method or system calls that may be potentially malicious is executed based on pre-registered settings.

16. The computer-readable medium of Claim 10, wherein the identifying method or system calls that may be potentially malicious is executed based on analyzing runtime behavior.

17. The computer-readable medium of Claim 6, wherein the replacement code includes custom code.

18. The computer-readable medium of Claim 6, wherein the testing includes executing the rebuilt application in the virtual environment which is an application runtime virtual modeling service.

19. The computer-readable medium of Claim 6, wherein the operations are automated to be executed upon purchase of an application attributed to a registered user's account.

20. A method of remediating applications, comprising:
receiving, from a client device, an application that is suspected of having malicious code;remediating the application; and
transmitting the remediated application to the client device.

21. The method of Claim 20, wherein the remediating includes:
replacing at least some of the malicious code with stored custom code,
wherein the stored custom code complies with accepted security and policy settings.

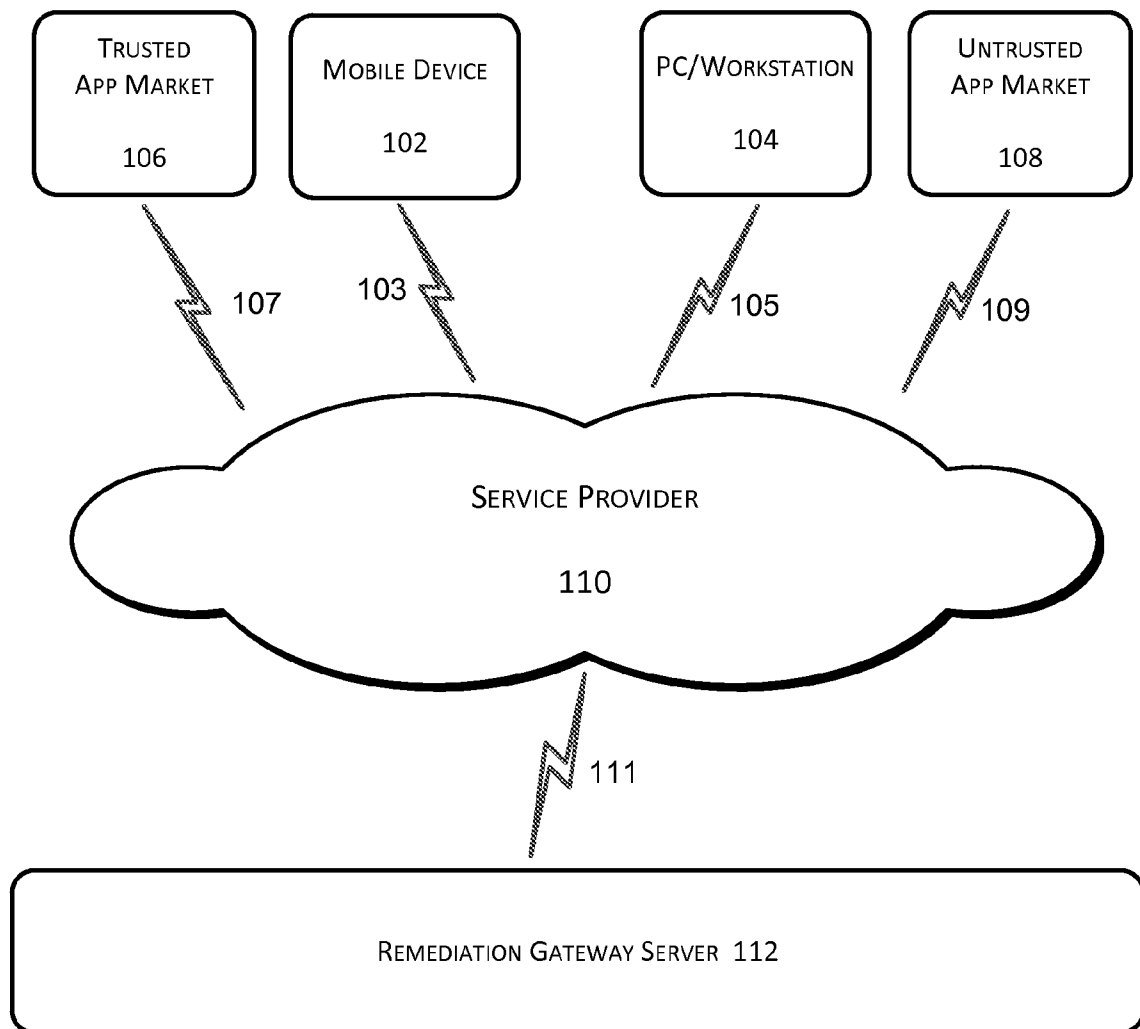
100

FIG. 1

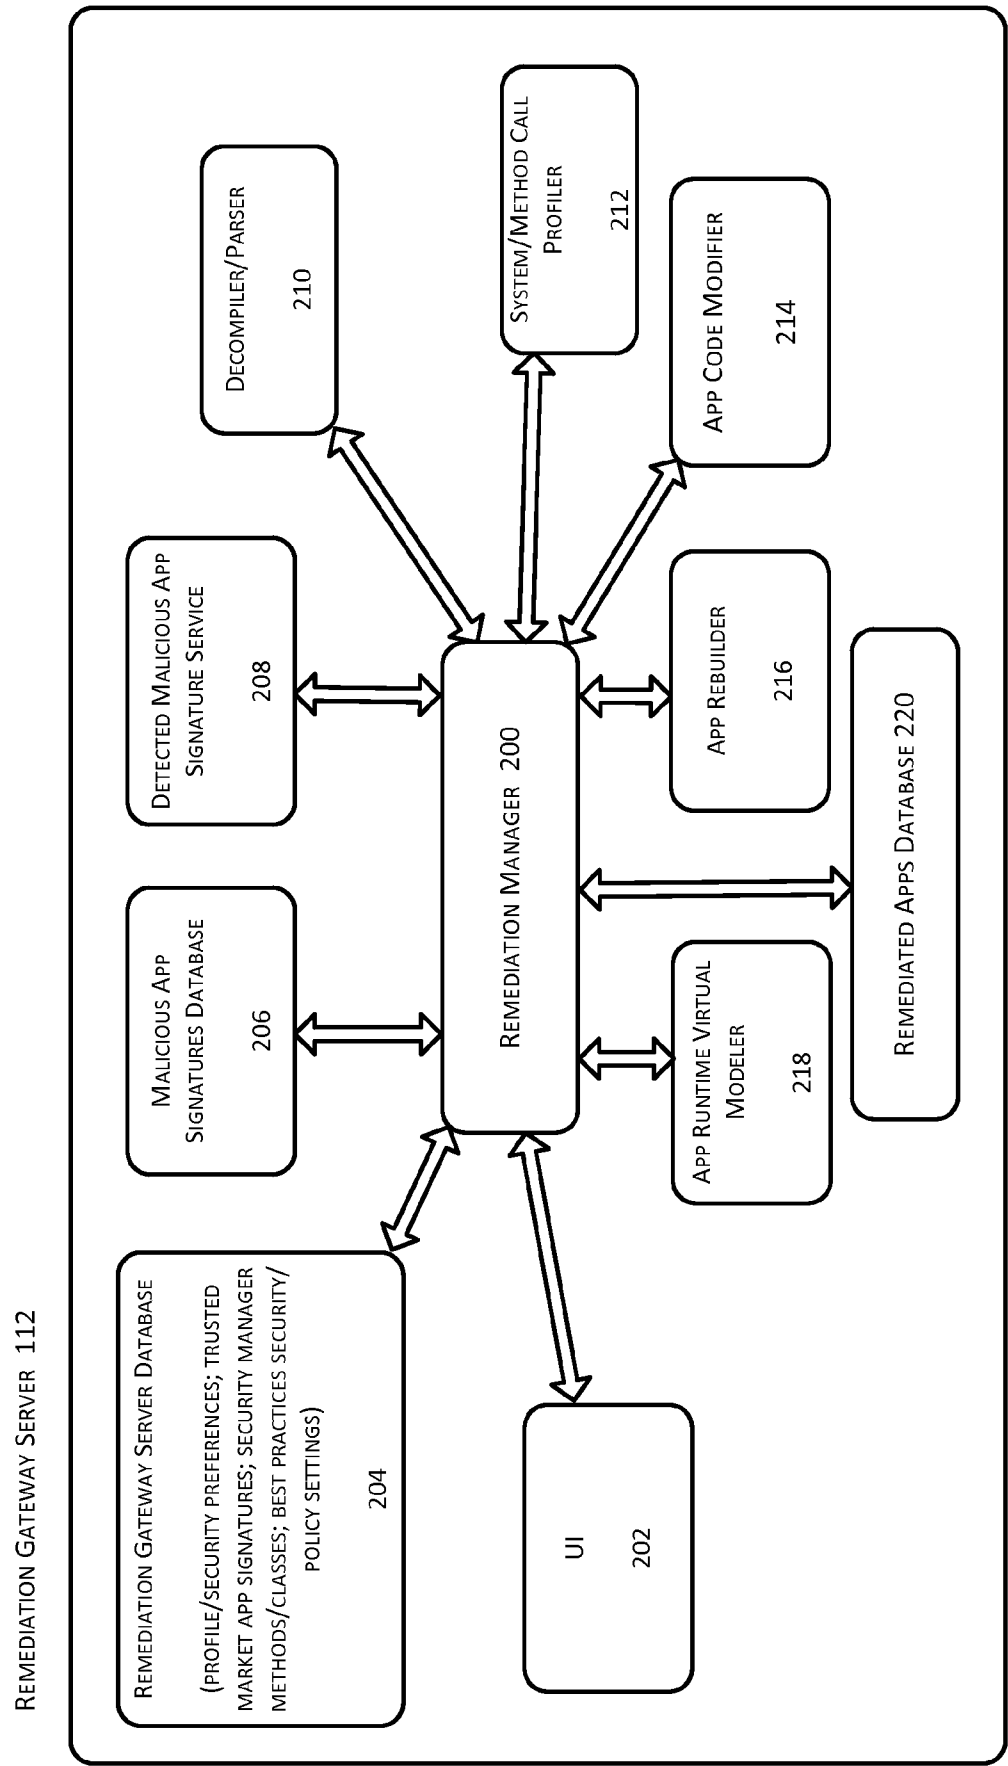


FIG. 2

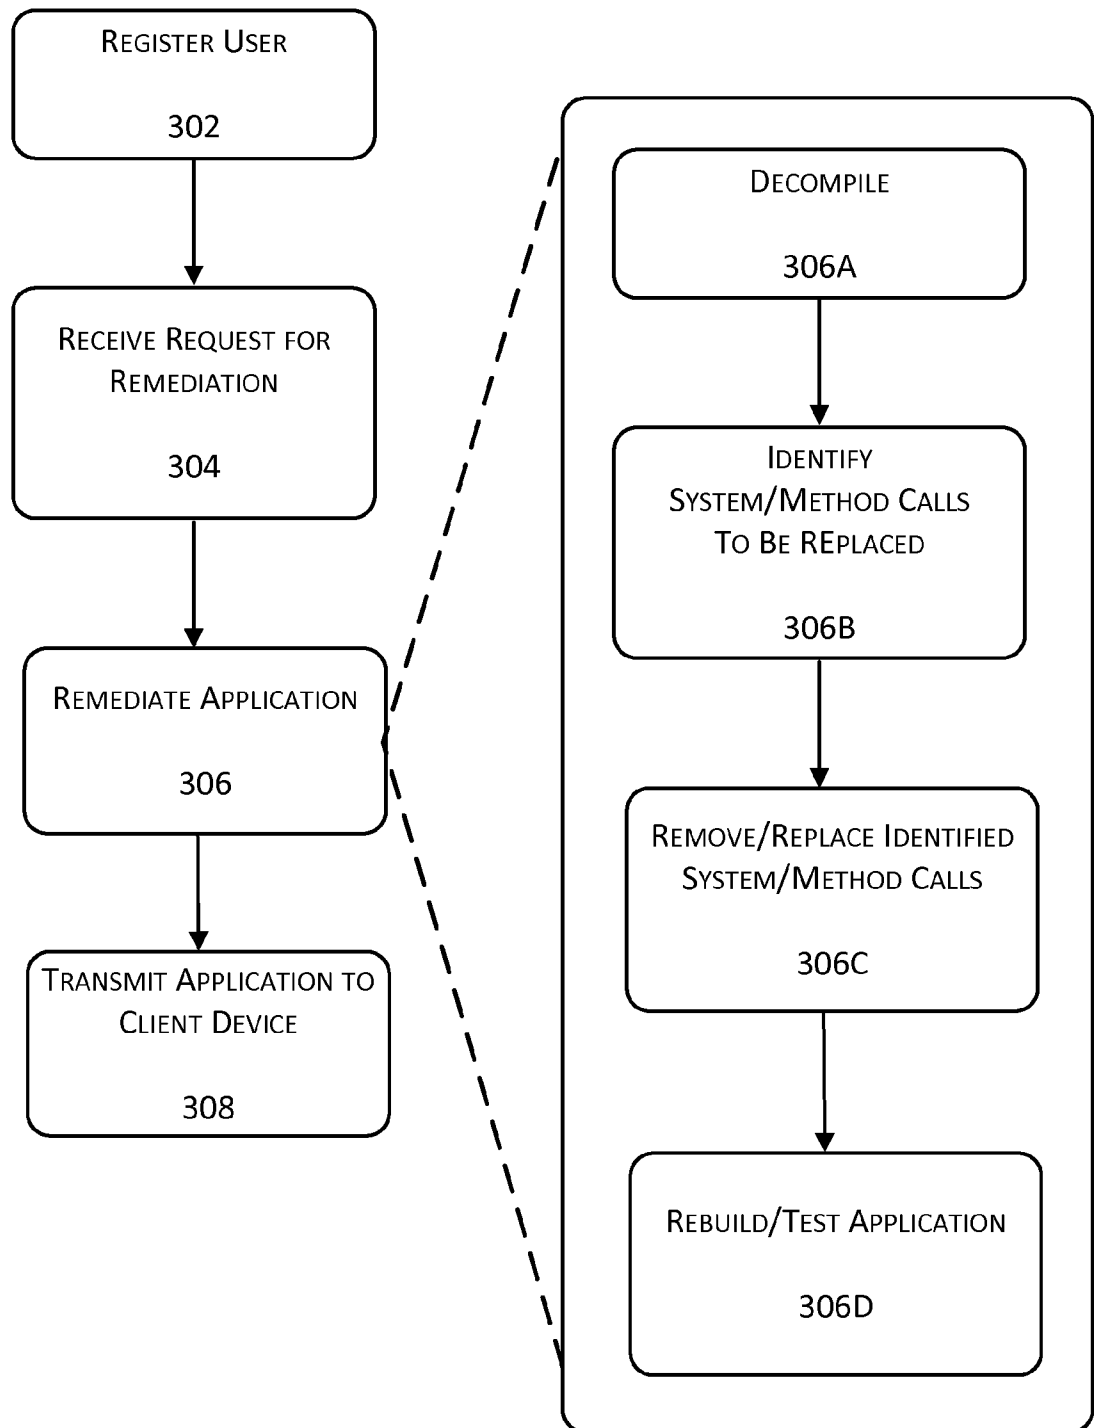
300

FIG. 3

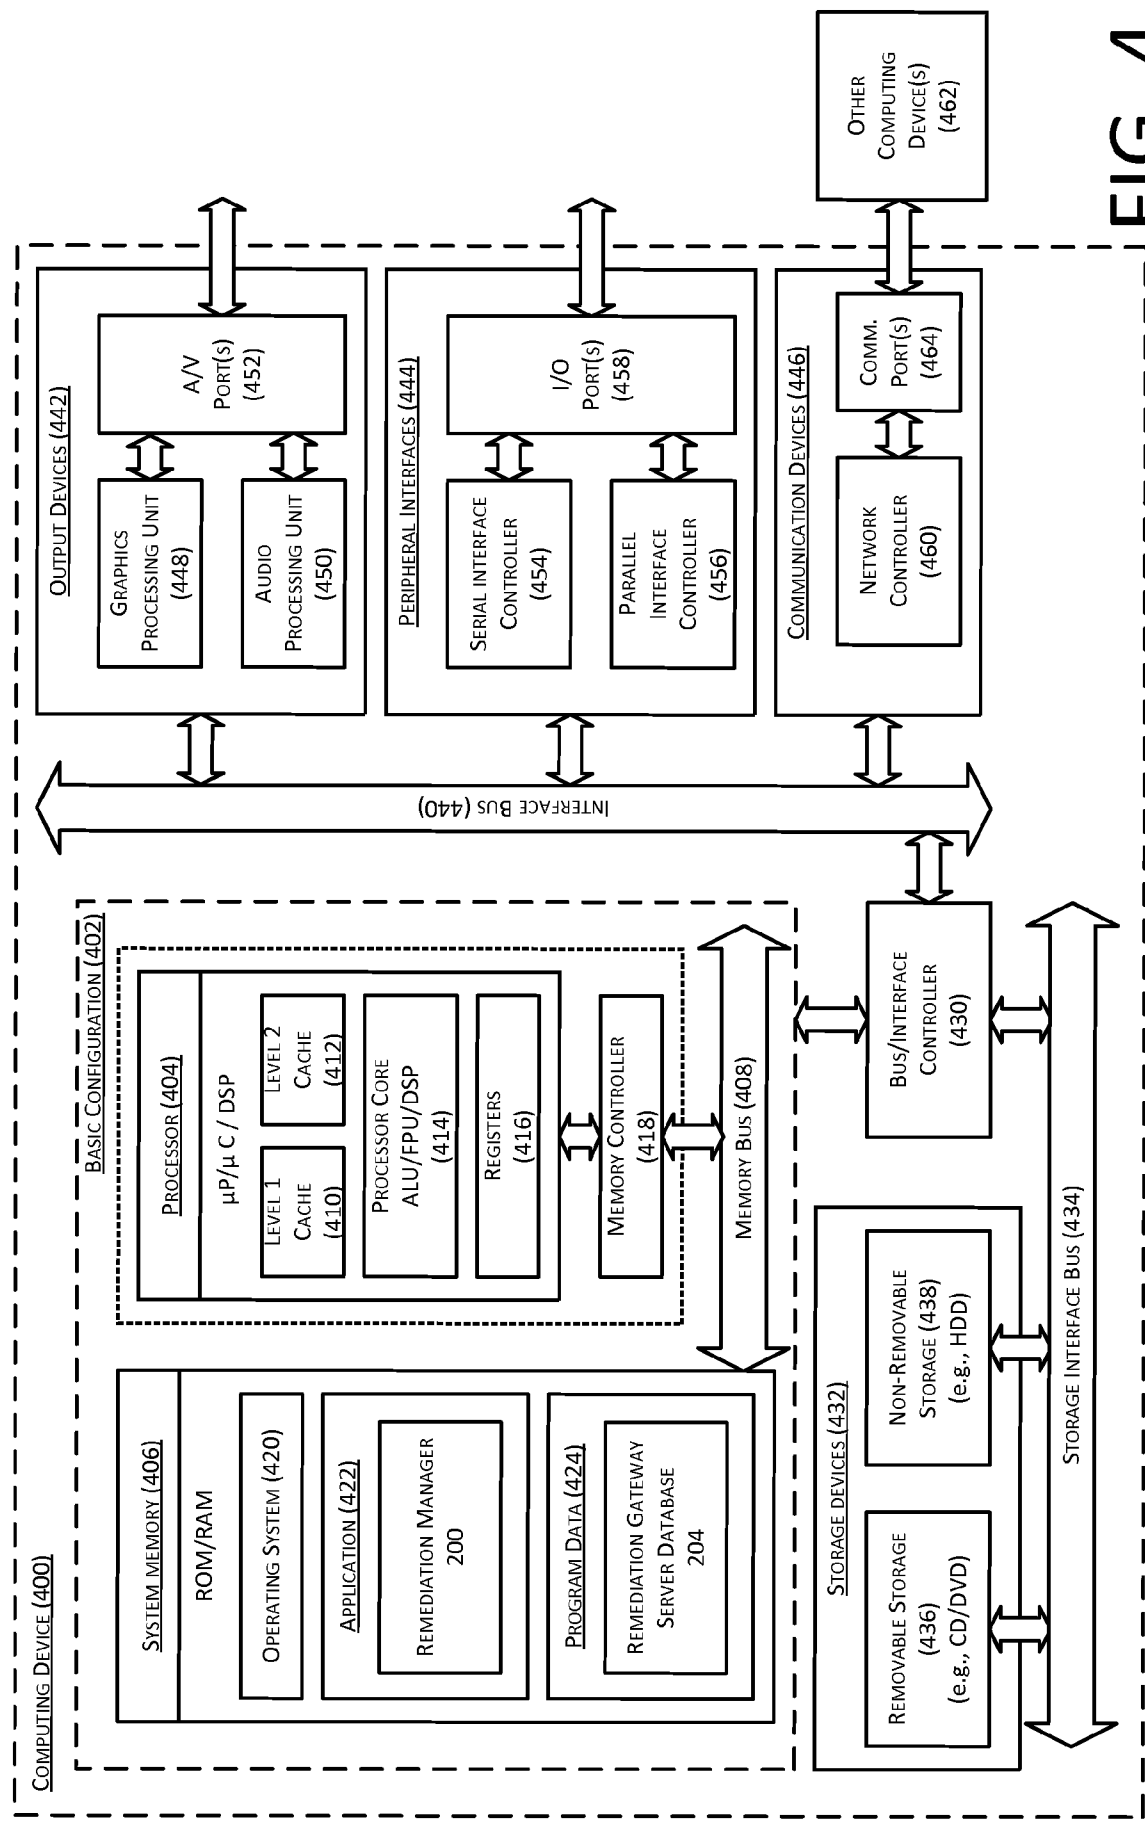


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 13/46341

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G06F 21/51 (2013.01)

USPC - 726/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
USPC - 726/22Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC - 726/24; 726/25 (Keyword delimited)Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PatBase, Google Patents/Scholar -- key words: remediate system server workstation transmit relay broadcast custom executable source code identify replace correct rebuild fix harmful malicious rouge malware application program mobile cellular test run pre-registered pre-configured dynamic analysis security policy service provider user customer acco

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2012/027588 A1 (MAHAFFEY et al.) 01 March 2012 (01.03.2012), para [0015], [0020], [0022], [0023], [0029], [0030], [0035], [0046], [0047], [0058], [0064], [0123], [0145], [0147], [0184], [0187], [0192], [0193], [0200]; abstract; and claim 1	1-21
Y	US 2013/0007701 A1 (SUNDARARAM et al.) 03 January 2013 (03.01.2013), para [0055], [0068], [0072], [0073], [0094], [0100], [0102], [0103], [0112], [0131], [0200], [0225], [0246]; and abstract	1-21
Y	WO 2007/075850 A2 (NICODEMUS et al.) 05 July 2007 (05.07.2007), para [0112] and [0186]	3, 13, 14
A	US 2010/0251000 A1 (LYNE et al.) 30 September 2010 (30.09.2010), entire document	1-21

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 October 2013 (11.10.2013)

Date of mailing of the international search report

01 NOV 2013

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774