




(86) Date de dépôt PCT/PCT Filing Date: 2009/08/27
(87) Date publication PCT/PCT Publication Date: 2010/03/04
(45) Date de délivrance/Issue Date: 2014/06/03
(85) Entrée phase nationale/National Entry: 2011/02/23
(86) N° demande PCT/PCT Application No.: US 2009/055101
(87) N° publication PCT/PCT Publication No.: 2010/025204
(30) Priorités/Priorities: 2008/08/29 (US61/092,933);
2008/10/01 (US61/101,749)

(51) Cl.Int./Int.Cl. *B27F 7/00* (2006.01),
B25J 15/00 (2006.01)
(72) Inventeurs/Inventors:
WILLIAMS, JEFFREY P., US;
SCERBO, SIROBERTO, US
(73) Propriétaire/Owner:
WILLIAMS ROBOTICS LLC, US
(74) Agent: SMART & BIGGAR

(54) Titre : APPAREIL AUTOMATIQUE POUR CONSTRUIRE DES ENSEMBLES DE COMPOSANTS DE BATIMENT
(54) Title: AUTOMATED APPARATUS FOR CONSTRUCTING ASSEMBLIES OF BUILDING COMPONENTS

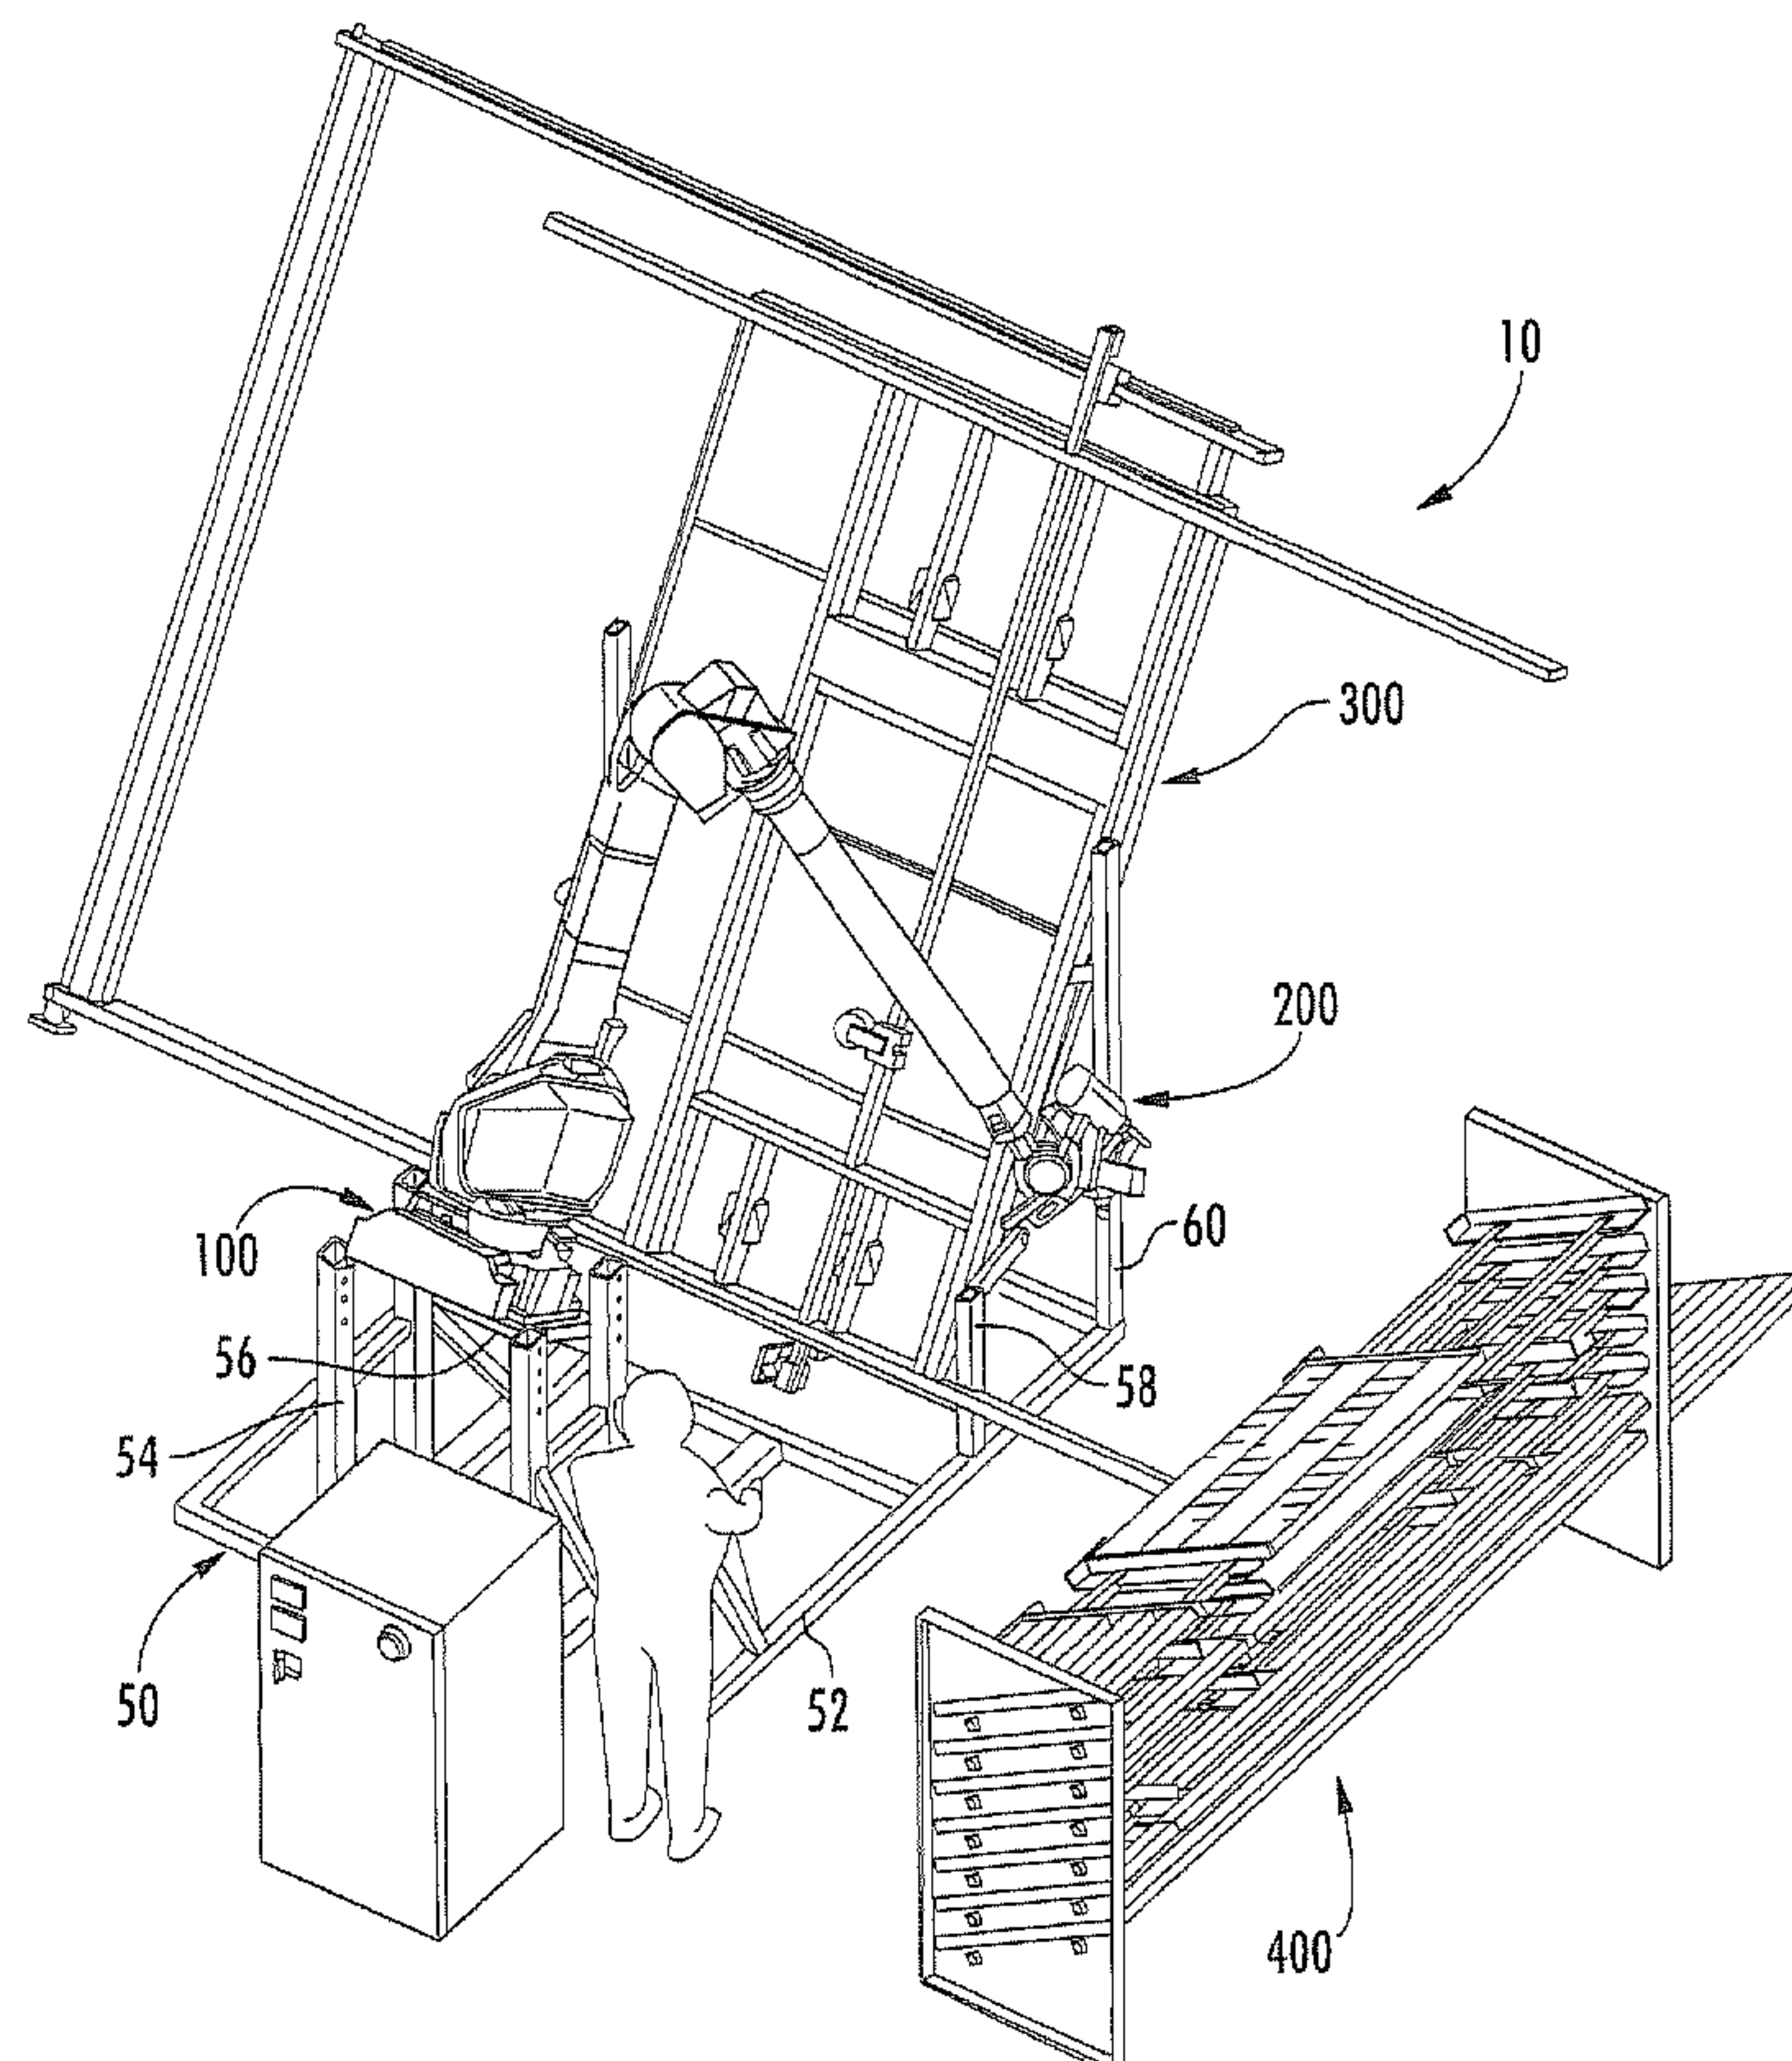

(57) Abrégé/Abstract:

A device for constructing an assembly of building components includes an articulating arm unit (100) and a gripper/nailer mounted on an end of the articulating arm unit. The gripper/nailer (200) includes a gripping unit for grasping building components and positioning them in a predetermined arrangement and a nailing unit for inserting a fastener to secure the building components together.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
4 March 2010 (04.03.2010)(10) International Publication Number
WO 2010/025204 A1

(51) International Patent Classification:

B27F 7/00 (2006.01) **B25J 15/00** (2006.01)

(21) International Application Number:

PCT/US2009/055101

(22) International Filing Date:

27 August 2009 (27.08.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/092,933	29 August 2008 (29.08.2008)	US
61/101,749	1 October 2008 (01.10.2008)	US

(71) Applicant (for all designated States except US):
WILLIAMS ROBOTICS LLC [US/US]; 1622 Maple Avenue, Burlington, North Carolina 27215 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WILLIAMS, Jeffrey** [US/US]; Hillsborough, North Carolina (US).
SCERBO, Siroberto [US/US]; Durham, North Carolina (US).(74) Agent: **MYERS BIGEL SIBLEY & SAJOVEC, P.A.**;
P.O. Box 37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: AUTOMATED APPARATUS FOR CONSTRUCTING ASSEMBLIES OF BUILDING COMPONENTS

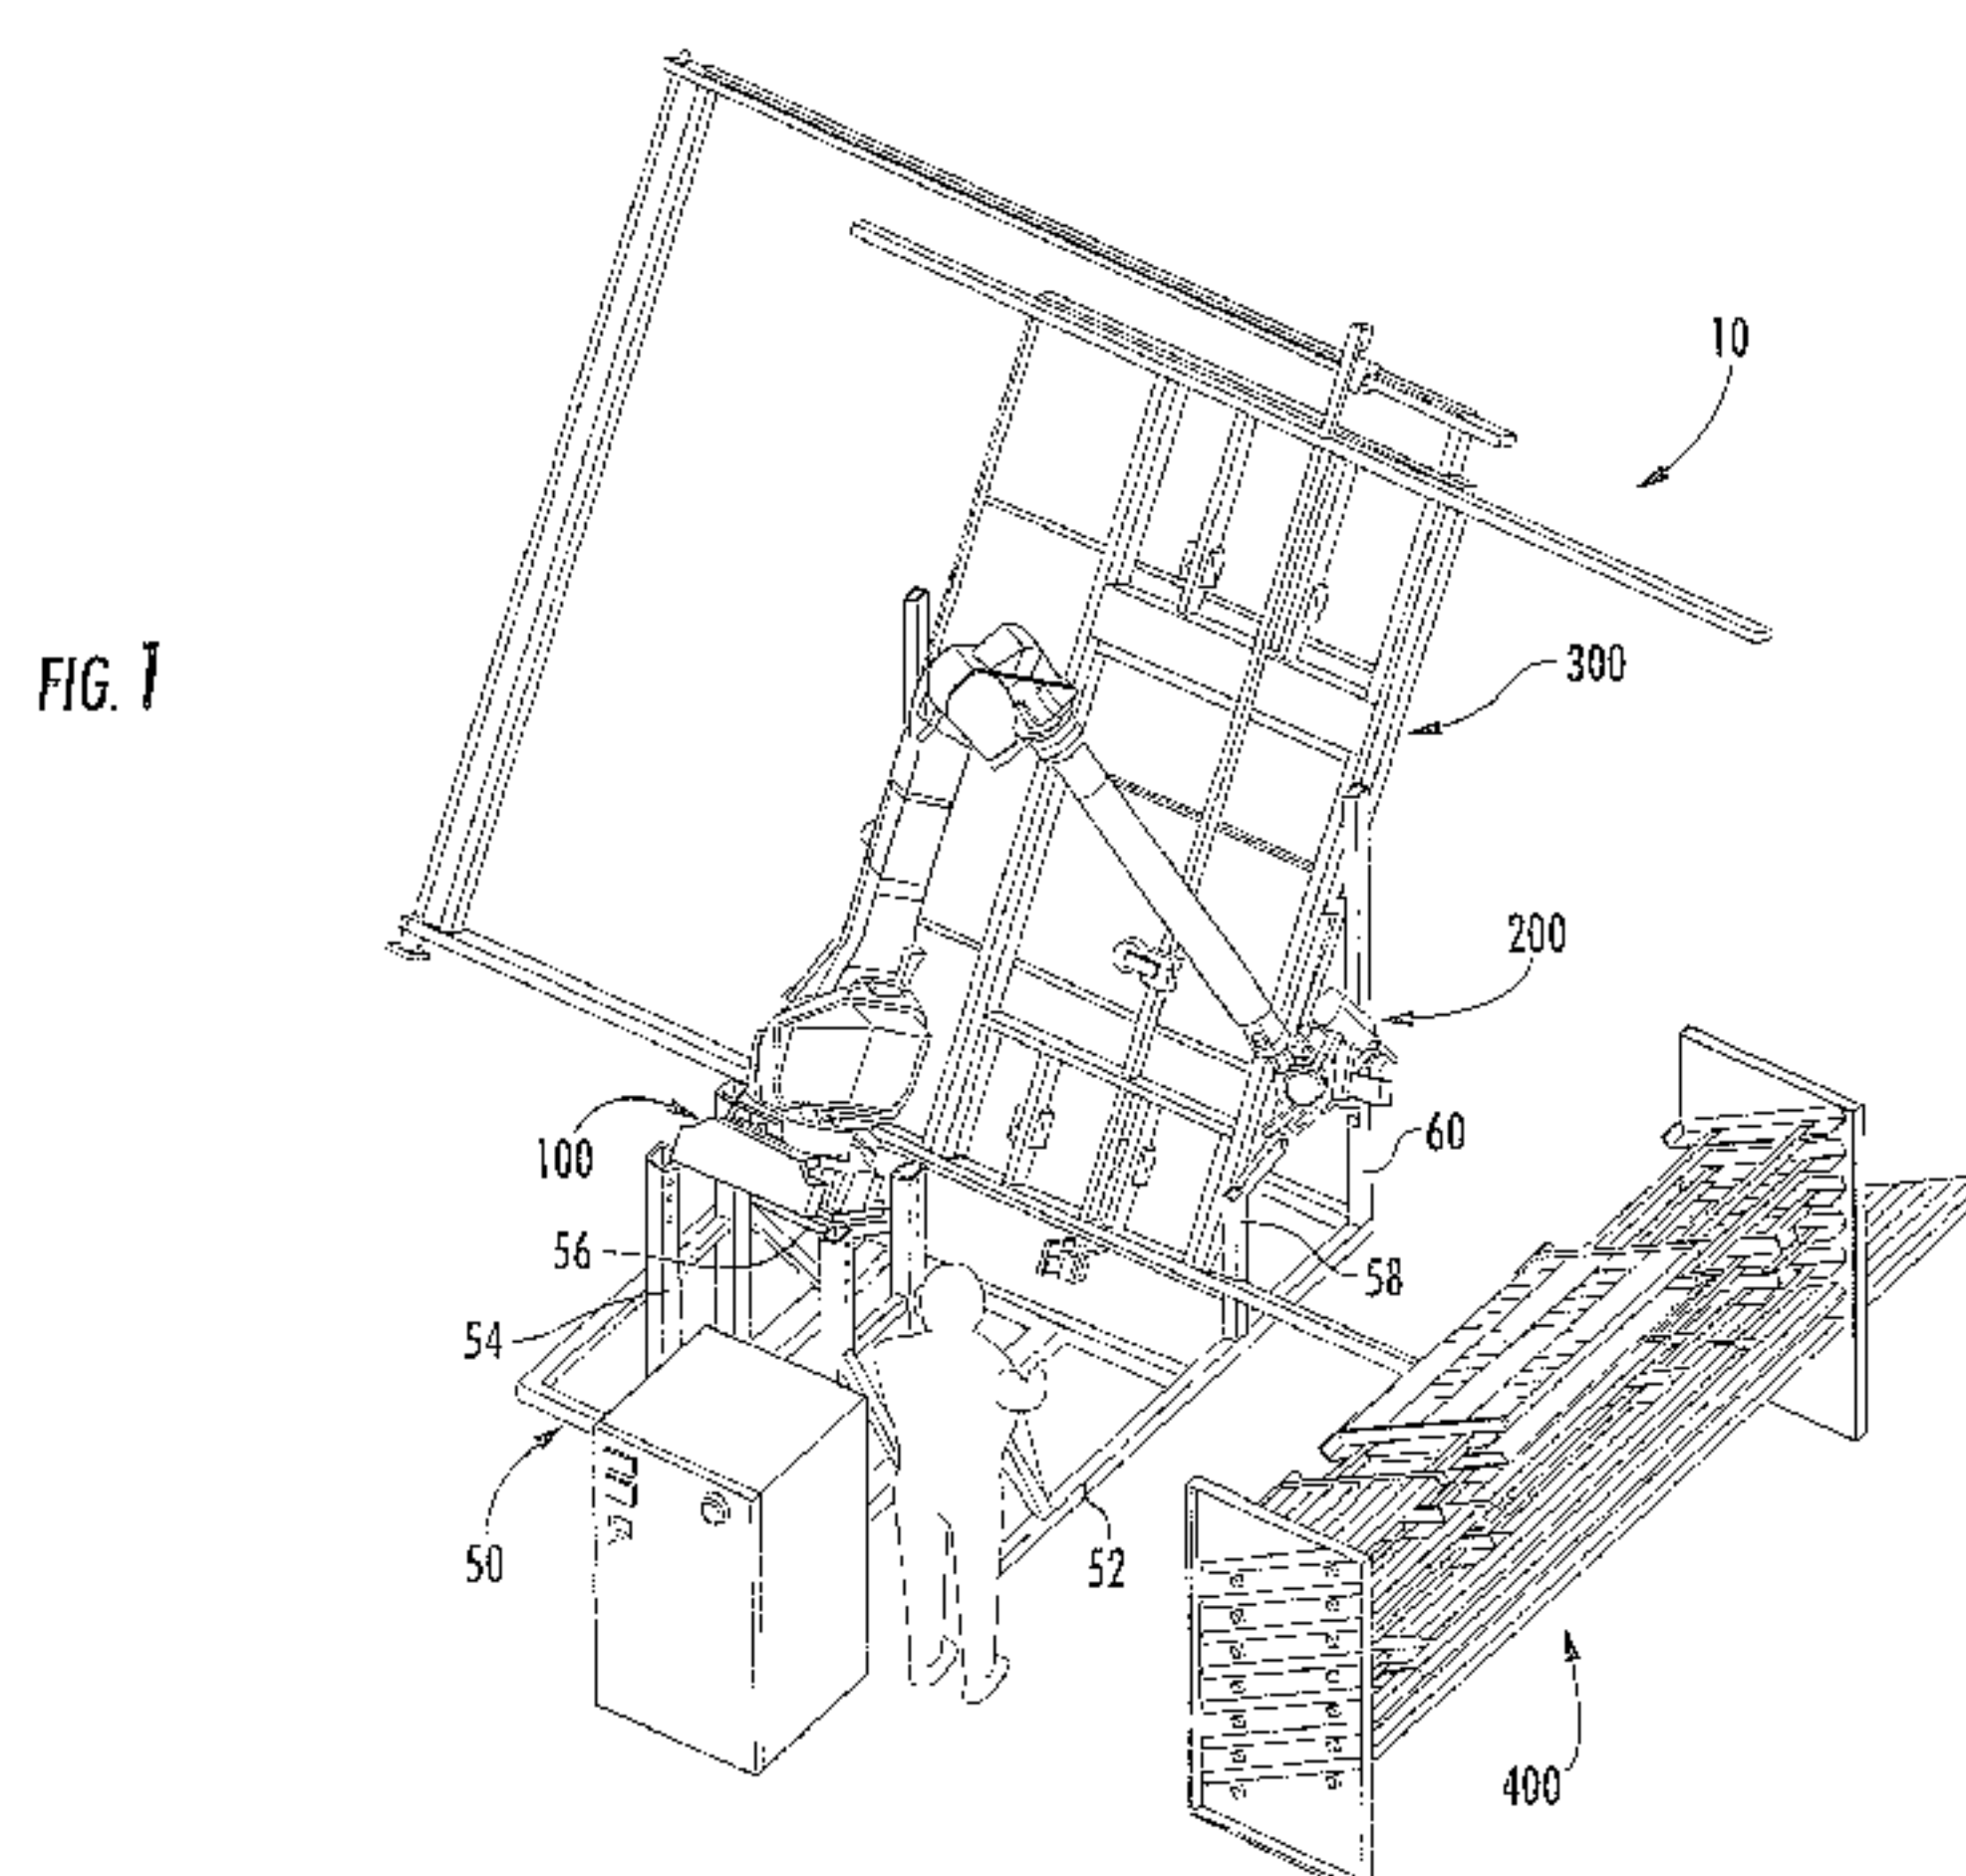

(57) Abstract: A device for constructing an assembly of building components includes an articulating arm unit (100) and a gripper/nailer mounted on an end of the articulating arm unit. The gripper/nailer (200) includes a gripping unit for grasping building components and positioning them in a predetermined arrangement and a nailing unit for inserting a fastener to secure the building components together.

WO 2010/025204 A1

77203-176

AUTOMATED APPARATUS FOR CONSTRUCTING ASSEMBLIES OF BUILDING COMPONENTS

RELATED APPLICATIONS

[0001] This application claims priority from U.S. Provisional Patent Application No. 61/092,933, filed August 29, 2008, and from U.S. Provisional Patent Application No. 61/101,749, filed October 1, 2008.

FIELD OF THE INVENTION

[0002] This invention relates generally to construction of buildings, and more particularly relates to devices for the construction of wall panels.

BACKGROUND OF THE INVENTION

[0003] Wall panels for the wall of a dwelling typically comprise a series of lumber boards arranged in a predetermined pattern and nailed together. Wall panel design varies from house to house because of consumer demand for individualized home design, although in some instances multiple wall panels for the same house will have the same arrangement. Most wall panels will include top and bottom horizontal boards and a number (often determined by a building code) of vertical boards to provide support. Often two or more vertical boards will be arranged in abutted fashion with the long axis of at least one rotated 90° to form strengthened posts for corners and wall intersections. The horizontal and vertical boards are nailed together to form a panel. The panel is then installed in the dwelling at a

77203-176

desired time. Depending on the nature of the project, the panels may be fabricated on-site or remotely for subsequent transport and use.

[0004] Some wall panels include so-called "rough openings", which are openings within the frame of the panel for windows, doors and the like (*see, e.g., Figures 2 and 3*, which show a wall panel 15 that includes an opening 16 for a door, and a wall panel 20 that includes a rough opening 21 for a window). The numbers and sizes of boards around rough openings are often regulated by building codes. Also, the locations and sizes of rough openings can vary significantly based on the personal preferences of the homeowner or builder. As a result, automation of the wall panel fabrication process has been limited.

[0005] It may be desirable to provide an automated process by which wall panels, and in particular wall panels with rough openings, can be constructed in a more extemporaneous fashion with reduced setup and change-over time from panel-to-panel.

SUMMARY OF THE INVENTION

[0006] As a first aspect, embodiments of the invention are directed to a device for constructing an assembly of building components. The device comprises an articulating arm unit; and a gripper/nailer mounted on an end of the articulating arm unit. The gripper/nailer includes a gripping unit for grasping building components and positioning them in a predetermined arrangement, and a nailing unit for inserting a fastener to secure the building components together. The device has a controller that is operably associated with the articulating arm and the gripper/nailer, the controller being configured to determine nailing locations based on the arrangement of building components and to provide instructions on component placement and nailing location to the articulating arm unit and the gripper/nailer. With a device of this configuration, the construction of assemblies, such as wall and door panels, may be significantly facilitated.

[0007] As a second aspect, embodiments of the invention are directed to a system for constructing an assembly of building components, comprising: a frame; an articulating arm unit mounted on the frame; a gripper/nailer mounted on an end of the articulating arm unit, wherein the gripper/nailer includes a gripping unit for grasping building components and positioning them in a predetermined arrangement, and a nailing unit for inserting a fastener to secure the building components together; and a support surface mounted on the frame, the support surface positioned and configured to receive building components from the gripping unit and maintain the building components in position for securing by the nailing unit. This combination of components can provide a system that automatically assembles and secures building components, such as boards for a wall panel with or without window or door

77203-176

openings. The articulating arm has a stationary base mounted to the frame and a rotating member rotatably attached to the stationary base for rotation about a first axis, the first axis being oriented at an oblique angle to a horizontal surface underlying the frame.

77203-176

[0008] As a third aspect, embodiments of the invention are directed to a device for constructing an assembly of building components, comprising: an articulating arm unit; a gripper mounted on an end of the articulating arm unit that includes a gripping unit for grasping building components and positioning them in a predetermined arrangement; and a controller that is operably associated with the articulating arm and the gripper. The controller is configured to receive data from a computer-aided drafting (CAD) file, convert that data into component positions, and provide instructions to the gripper on component placement.

[0009] As a fourth aspect, embodiments of the invention are directed to a computer program product for controlling operation of a system for constructing assemblies of building components, comprising a computer readable storage medium having computer readable program code embodied therein. The computer readable program code comprises: computer readable program code configured to receive data regarding an assembly of building components; computer readable program code configured to direct a gripper on an articulating arm unit to retrieve individual building components from a supply of building components; computer readable program code configured to direct the gripper on the articulating arm unit to position the building components in predetermined positions to form a predetermined arrangement of building components; and computer readable program code configured to direct a nailing unit mounted on the articulating arm unit to secure the building components together to form an assembly of building components the computer readable program code is further configured to determine nailing locations for directing the nailing unit responsive to the locations of the arranged building components.

[0010] As a fifth aspect, embodiments of the invention are directed to a device for constructing an assembly of building components, comprising: an articulating arm unit; and a mounting location on the articulating arm unit for either of (a) a gripping unit for grasping building components and positioning them in a predetermined arrangement, and (b) a nailing unit for inserting a fastener to secure the building components together.

[0011] As a sixth aspect, embodiments of the invention are directed to a device for constructing an assembly of building components, comprising: an articulating arm unit; a gripping unit mounted on an end of the articulating arm unit for grasping building components and positioning them in a predetermined arrangement; and an automated nailing unit for inserting a fastener to secure the building components together.

[0012] As a seventh aspect, embodiments of the invention are directed to a device for constructing an assembly of building components, comprising a Cartesian robotic unit; and a gripper/nailer mounted on an end of the articulating arm unit. The gripper/nailer

includes a gripping unit for grasping building components and positioning them in a predetermined arrangement and a nailing unit for inserting a fastener to secure the building components together.

[0013] As an eighth aspect, embodiments of the invention are directed to a device for constructing an assembly of building components, comprising an articulating arm unit and a gripper/nailer mounted on an end of the articulating arm unit. The gripper/nailer includes a gripping unit for grasping building components and positioning them in a predetermined arrangement, and a nailing unit for inserting a fastener to secure the building components together. The gripper/nailer further includes a drill or router for forming holes in the building components.

BRIEF DESCRIPTION OF THE FIGURES

[0014] **Figure 1** is a perspective view of a system for constructing an assembly of building components according to embodiments of the present invention.

[0015] **Figure 2** is a perspective view of a wall panel with a rough opening for a door.

[0016] **Figure 3** is a perspective view of a wall panel with a rough opening for a window.

[0017] **Figure 4** is a right perspective view of the articulating arm unit with a gripper/nailer of **Figure 1**.

[0018] **Figure 5** is a left perspective view of the articulating arm unit and gripper/nailer of the system of **Figure 1**.

[0019] **Figure 6** is a right perspective view of the articulating arm unit and the work table of the system of **Figure 1**.

[0020] **Figure 7** is an enlarged perspective view of the gripper/nailer of the system of **Figure 1** with the stabilizing foot removed.

[0021] **Figure 8** is a side view of the gripper/nailer of **Figure 7** with the nailing unit components removed.

[0022] **Figure 9** is an enlarged reverse perspective view of the gripper/nailer of the system of **Figure 1**.

[0023] **Figure 10** is a perspective view of the rack of the system of **Figure 1**.

[0024] **Figures 11-13** are sequential views demonstrating the operation of the system of **Figure 1**.

[0025] **Figure 11A** is a perspective view of guides that can be used in connection with the work table of the system of **Figure 1**.

[0026] **Figure 14** is a perspective view of a cut-to-length saw that can be used in conjunction with a system of the present invention.

[0027] **Figure 15** is a flow chart illustrating operations according to embodiments of the present invention.

[0028] **Figure 16** is a perspective view of a truck on which is mounted a system according to embodiments of the present invention.

[0029] **Figure 17** is an enlarged perspective view of two pivoting clamps mounted to the lower edge of a table of the system of **Figure 1**, with one of the clamps shown in a withdrawn position and the other shown in a clamping position.

[0030] **Figure 18** is an enlarged perspective view of the guide of **Figure 11A** oriented to support a board from underneath.

[0031] **Figure 19** is a perspective view of a table of the system of **Figure 1** with retractable stops according to embodiments of the present invention.

[0032] **Figure 19A** is an enlarged perspective view of the retractable stops of **Figure 19**, with one stop shown in a retracted position.

[0033] **Figure 19B** is an enlarged perspective view of the retractable stops of **Figure 19** with one stop shown in an extended position.

[0034] **Figure 19C** is an enlarged perspective view of two retractable stops of **Figure 19**, with one stop shown in a retracted position and the other shown in an extended position.

[0035] **Figure 20** is a perspective view of a gripper/nailer with an attached drill according to embodiments of the present invention.

[0036] **Figure 21** is a perspective view of a gripper/nailer with an attached router according to embodiments of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0037] The present invention will be described more particularly hereinafter with reference to the accompanying drawings. The invention is not intended to be limited to the

illustrated embodiments; rather, these embodiments are intended to fully and completely disclose the invention to those skilled in this art. In the drawings, like numbers refer to like elements throughout. Thicknesses and dimensions of some components may be exaggerated for clarity.

[0038] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

[0039] In addition, spatially relative terms, such as "under", "below", "lower", "over", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "under" or "beneath" other elements or features would then be oriented "over" or "above" the other elements or features. Thus, the exemplary term "under" can encompass both an orientation of over and under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0040] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. As used herein the expression "and/or" includes any and all combinations of one or more of the associated listed items.

[0041] Where used, the terms “attached”, “connected”, “interconnected”, “contacting”, “mounted” and the like can mean either direct or indirect attachment or contact between elements, unless stated otherwise.

[0042] Turning now to the drawings, an automated wall panel fabrication system, designated broadly at **10**, is shown in **Figure 1**. Generally, the system **10** includes an articulating arm unit **100** having a gripper/nailer **200** at one end thereof and a work table **300**, each of which is mounted on a frame **50**. A rack **400** that supplies boards to the system **10** is located adjacent the frame **50**. These components are described separately below.

[0043] In describing the components, the “forward” direction will be the direction extending from the articulating arm unit **100** toward the work table **300**, and the “rearward” direction will be the direction opposite the forward direction.

Frame

[0044] Referring again to **Figure 1**, the frame **50** includes a base **52** having a skeletal structure that is configured to rest on an underlying surface. A skeletal pedestal **54** rises from the forward central portion of the base **52**. A mounting surface **56** is mounted to the upper end portions of the members that form the pedestal **54**. In some embodiments, the mounting surface **56** is tilted so that it faces the rear of the frame; the tilt angle is typically between about 10 and 30 degrees relative to vertical, but in some embodiments may be up to 90 degrees (and in other embodiments the mounting surface may be above the work table **300** and face downwardly). The mounting surface **56** provides a mounting location for the articulating arm unit **100**.

[0045] A pair of forward uprights **58** are mounted to and extend upwardly from the base **52** rearwardly of the pedestal **56**. A pair of rear uprights **60** are mounted to the rear end of the base **52** and extend upwardly therefrom to an elevation higher than that of the forward uprights **58**. The front and rear uprights **58**, **60** provide mounting locations for the work table **300**.

[0046] Those skilled in this art will appreciate that the frame **50** may take many other configurations and be suitable for use with the present invention. As one example, the frame may be mounted on a vehicle, such as a truck (see details in **Figure 16** and the accompanying discussion), that can transport the system to a construction site so that fabrication of wall panels can be carried out on-site.

Articulating Arm Unit

[0047] Turning now to **Figures 4-6**, the articulating arm unit **100** is a largely conventional 6-axis robotic arm. The arm unit **100** includes a stationary base **102** that is mounted to the mounting surface **56** of the frame **50**. A rotating base **104** is rotatably mounted onto the stationary base **102** for rotation about an axis **A1** that is generally normal to the mounting surface **56**. A proximal arm member **106** is pivotally attached to the rotating base **104** at a pivot **108** that defines an axis **A2** that is generally parallel to the mounting surface **56** and normal to the axis **A1**. The proximal arm member **106** extends away from the rotating base **104**. An elbow member **110** is pivotally attached to the extended end of the proximal arm member at a pivot **112**, which defines an axis **A3** that is generally normal to the axis **A1** and to the proximal arm member **106**. A distal arm member **114** is rotatably attached to the elbow member **110** for rotation about an axis **A4** that is substantially parallel to the distal arm member **114** and normal to the axis **A3**. At its far end, the distal arm member **114** is attached to a wrist member **118** at a pivot **120** that defines an axis **A5** that is normal to the distal arm member **114** and to the axis **A4**. The wrist member **118** serves as the mounting member for the gripper/nailer **200**, which is rotatably mounted thereto for rotation about an axis **A6** that is normal to the axis **A5**.

[0048] The movement of the different members of the articulating arm unit **100** are controlled by a controller **500** (described in detail below). In some embodiments, the controller **500** is part of an internal system that is supplied with the arm unit **100** itself; in other embodiments, the controller **500** is a personal computer or other external processing device that is connected to the articulating arm unit **100**.

[0049] In some embodiments, the range of pivoting/rotation about the various axes of the device can vary. In one embodiment, the axes as identified above have the angular ranges set forth in **Table 1** below.

Table 1	
Axis	Angular Range (Degrees)
A1	360
A2	225
A3	432

A4	400
A5	280
A6	900

[0050] An exemplary articulating arm unit is Model No. M-710iC/20L, available from Fanuc Robotics America, Inc., Rochester Hills, Michigan. Such a unit may be modified, particularly at the wrist member, to accommodate the gripper/nailer **200**. Other 6-axis articulating arm units may also be employed. Furthermore, the present invention is not limited to robots with fewer or more axes of motion, or to a single robot; multiple robotic arms for the movement of different tools may be employed.

Gripper/Nailer

[0051] Turning now to **Figures 7-9**, the gripper/nailer **200** is mounted onto the wrist member **118**. The gripper/nailer **200** has a gripper unit **201** that includes a frame **202** that includes two supports **204, 205** that are generally parallel to each other. A support member **208** spans and is fixed to upper ends of the supports **204, 205**. A stationary grip finger panel **210** is fixed to the ends of the supports **204, 205** opposite the support member **208**. A finger **211** extends from one end of the panel **210**.

[0052] A movable grip finger unit **212** is mounted to the support member **208**. The movable grip finger unit **212** includes a finger **214** that is mounted on one end to a pivot arm **216**. The pivot arm **216** is generally J-shaped and is attached at one end to the support **204** at a pivot **222**. A pneumatic cylinder unit **218** is pivotally attached to the support member **208** at a pivot **219** with its retractable rod **218a** extending downwardly to a pivot **220** with the pivot arm **216**.

[0053] Those skilled in this art will appreciate that the gripper unit may take other configurations. For example, rather than pneumatic actuation, the gripping movement may be controlled mechanically, hydraulically, or electromagnetically. The shapes of the gripping fingers may vary, as may the shapes of the links causing the fingers to grip. In some embodiments, both gripper fingers may move in the grasping motion. Other configurations will be apparent to those of skill in the art and need not be detailed herein.

[0054] Referring now to **Figures 7 and 9**, a nailer mounting panel **230** is fixed to the cross-member **208** and extends upwardly and downwardly therefrom. A nailing unit **242**

is mounted to the panel **230**. The nailing unit **242** includes a plenum **244** that has a handle **245** which is mounted to the panel **230** under the cross-member **208**. A trigger **248** is incorporated into the handle **245**. The trigger **248** can be actuated by an electric solenoid, a pneumatic cylinder, or the like that engages the trigger **248**.

[0055] A barrel **246** extends from one end of the plenum **244** above the cross-member **208**. A magazine **232** is attached to the barrel **246** and is configured to supply nails sequentially to the barrel **246**. The magazine **232** is also mounted to the nailer mounting panel **230**. Thus, the nailing unit **242** is mounted such that the barrel **246** extends in a direction that is generally away from the stationary grip finger **211**. This orientation can provide both the gripping unit **201** and the nailing unit **242** with sufficient space to operate without interference from the other unit.

[0056] A board-aligning stabilizing foot **238** is mounted to the magazine **232** via a pair of brackets **236** (**Figure 9**). A spring **240** is attached to the foot **238** and positioned between the brackets **236** to bias the foot **238** toward the barrel **246**. Other stabilizing features, such as gripping and positioning features, may also be employed, or stabilizing features may be omitted entirely.

[0057] An exemplary nailing unit is the DEWALT D51844 nailing gun, available from Black & Decker Corporation, Towson, Maryland. Other nailing units may also be employed. For example, the trigger may be actuated by other mechanisms, such as a mechanical piston or the like. Alternatively, the nailing unit may lack an external trigger, which can be replaced by a directing acting valve signaled by the controller **500**. The nailing unit **242** may also be oriented differently relative to the gripper unit **201**. The nailing unit **242** may even insert a different fastener, such as a staple; it is intended that the terms "nailing unit" and "nailer" encompass devices that insert other fasteners that penetrate boards in addition to nails.

[0058] In addition, those skilled in this art will recognize that other tools with additional functions may be included in the gripper/nailer **200**. For example, many wall panels include holes for the passage of electrical, telephone, television, or computer wires or cables, or for water pipes, or HVAC conduits. Referring to **Figures 20** and **21**, the inclusion of a drill **260** on the gripper/nailer **200'** or a router **270** on a gripper/nailer **200''** would enable such holes to be formed automatically by the gripper/nailer **200** during the fabrication of the

wall panel. Other tools (*e.g.*, a sander, a staple gun, etc.) may also be attached to the gripper/nailer in some embodiments for the performance of other functions/tasks.

[0059] In addition, the mounting configuration may be modified to allow limited relative motion between the nailer and the gripper and/or the wrist. This motion may be supplemented with dampers and springs to absorb shock forces of the nailing action and thus improve the nailing function.

Work Table

[0060] Referring now to **Figure 6**, the work table **300** includes a generally rectangular and skeletal frame **302**. The frame **302** is mounted directly on the rear uprights **60** of the frame **50** at a pivot **321**. A pivot link **318** is attached at a pivot **320** to the frame **302** and extends therefrom to a pivot **322** with the forward uprights **58** of the frame **50**. The pivots **320**, **321**, **322** and link **318** can enable the table **300** to rotate to a generally horizontal disposition for offloading. In some embodiments, features such as retractable wheels or rollers may be included to facilitate offloading. However, in some embodiments the frame **302** may be fixed to the frame **50**.

[0061] The frame **302** supports a solid support surface **312** from underneath. The support surface **312** is typically formed of steel or another rigid material and is typically oriented as an angle of between about 0 and 80 degrees to the underlying surface. Such an angle can enable boards positioned on the support surface **312** to remain in position without shifting.

[0062] The support surface **312** may be of any size; in some embodiments, the support surface **312** is between about 9.5 feet in height and 6 and 13 feet in width in order to enable the production of a 9 ft. x 12 ft. wall panel. One skilled in the art will recognize that larger wall panels may be made with the present invention by increasing the width and height of the work table (or by including mechanisms that allow the support surface **312** to move laterally and/or vertically) and including a translating base axis with the articulating arm unit **100**. A plurality of vertical stops **314** is fixed to the frame **302** along one side thereof to define a vertical registration axis **A7**. Also, a plurality of horizontal stops **316** is fixed to the lower edge of the frame **302** to define a horizontal registration axis **A8**. The stops **314**, **316** are typically used to define lower and right edges of a wall panel during fabrication.

[0063] In some embodiments, some additional components may be included. Referring now to **Figure 17**, the table **300** may include one or more pneumatic pivoting clamps **340**, each of which has a body **341**, a sleeve **342**, and a clamping arm **343**. The clamp **340** can be used to secure a horizontal or vertical board to the table **300**, but can also be pivoted out of the way about the axis formed by the sleeve **342** to avoid interference with the gripper/nailer **200** and to facilitate placement of the board. An exemplary pivoting clamp is Model No. SC25x20R, available from Fabco-Air, Inc. (Gainesville, Florida)

[0064] In other embodiments, the table **300** may include adjustable lateral stops **902, 903** (see **Figures 19-19C**). Each of the stops **902, 903** includes a pneumatic cylinder **905**, a rod **906** with a linkage **908** attached thereto, a stop finger **910** that is pivotally attached to the linkage **908**. The stop **902** is positioned laterally of the stop **903**, and, in the illustrated embodiment, each is positioned laterally of an immovable stop **314**. An exemplary stop finger is Model 807-U, available from De-Sta-Co, Inc. (Auburn Hills, Michigan).

[0065] As can be seen in **Figure 19B**, the stop fingers **910** of either of the lateral stops **902, 903** can be extended by extending the rod **906** from the cylinder **905**, which action pivots the stop fingers **910** into a position adjacent the edge of the table **300**. When extended, the stop fingers **910** can define a slightly different lateral edge for a lateral plank. Redefining the edge of a wall may be desirable depending on how the studs of a wall are measured from the outermost stud. For example, if a wall's studs are arranged on 16 inch centers, in some instances the second stud from the edge is a full 16 inches from the outermost stud, whereas in other instances the second stud is 15¼ inches from the outermost stud. The presence of the lateral stops **902, 903** can assist in easily adjusting the table **300** to handle either of these conditions. The lateral stops **902, 903** may be used in the absence of a lateral stop **314** in some embodiments. Also, the lateral stops **902, 903** may be configured so that only one of the stops **902, 903** can be extended at any one time (see **Figure 19C**).

Rack

[0066] Referring now to **Figure 10**, the rack **400** is positioned adjacent the articulating arm unit **100** and the support table **300**. The rack **400** includes multiple shelves, trays, compartments or the like in which wooden boards of like size can be stored. The rack **400** is configured so that the gripper/nailer **200** can access any of the compartments in order to grasp boards contained therein. The rack **400** may take any number of configurations that

enable the presentation of boards of a known size and in a known location to the gripper for placement on the support table **300**; in the illustrated embodiment, the boards are oriented generally horizontally, but in other embodiments vertical or other orientations may also be used. In some embodiments, the compartments may be adjustable in size to accommodate boards of different sizes/lengths. Also, in some embodiments, the rack **400** may be mounted to the frame **50** in order to maintain a predictable position relative to the articulating arm unit **100** and the work table **300**.

[0067] In some embodiments, the rack **400** may be associated with, or even replaced by, an automated "cut-to-length" saw that prepares boards or boards on demand (*see* **Figure 14**, which illustrates saw **700**). Such a saw may be connected to the controller **500**, which directs the saw to cut a board to a specific length and present the freshly-cut board to the articulating arm unit **100** for retrieval and positioning on the work table **300**. The use of a cut-to-length saw may reduce manpower requirements and eliminate the need for the rack **400**.

[0068] In further embodiments, the rack and the table may be mounted on a mobile vehicle, such as a truck, that can travel to a work site and construct walls on-site. As seen in **Figure 16**, a truck **800** may have a bed **802** on which resides a rack **400'** for boards. An arm **200'** is also mounted on the bed **802**. A table **300'** is pivotally attached to the edge of the bed **802** at a pivot **806**; the table **300'** can pivot away from the bed **802** in operation and can pivot toward the bed **802** while in transit or storage. The table **802** can be moved via a crane **804** that is also mounted to the bed **802**.

Basic Operation of the Articulating Arm Unit, Support Table and Rack

[0069] Referring now to **Figures 11-13**, to fabricate a specific wall panel, the rack **400** is loaded with wooden boards or boards of the appropriate size; boards of similar size are stored on the same shelf within the rack **400**. Based on directions from the controller **500** (described in greater detail below), the articulating arm unit **100** moves the gripper/nailer **200** to the rack **400** and grasps a board of the correct size. The grasping motion of the gripper/nailer **200** is initiated via actuation of the pneumatic cylinder **218**, which extends its retractable rod **218**; such extension causes the pivot arm **216** to pivot about the pivot **222** and move the finger **214** toward the stationary grip finger **210** (*see* **Figures 7-9** for details of the gripping unit **201**). Once the gripper/nailer **200** has grasped the board (**Figure 11**), the

articulating arm unit **100** moves the board to the support surface **312** of the table **300**, orients the board in its correct orientation, places the board on the support surface **312**, and releases the board by retracting the rod **218a** of the pneumatic cylinder **218** (**Figure 12**). Notably, boards that define the lower surface of the wall panel to be fabricated are positioned to rest on the horizontal stops **316**, and boards that define the rightmost edge of the wall panel are positioned against the vertical stops **214**. The controller **500** continues to direct the articulating arm unit **100** to retrieve boards from the rack **400** and position them on the support surface.

[0070] In some embodiments, it may facilitate placement of the boards, and in particular vertically-oriented boards, to employ removable and replaceable guides on the support surface **312**. Such guides, shown at **600** in **Figure 11A**, may have sloped receiving edges to urge a board into position and retain the board in that position during fabrication. The guides **600** may be magnetic to attach to the support surface **312** or may be attached in another fashion. The guides may also be permanently mounted to the support table at strategic locations and adjustable (under computer control) to engage and hold a board in place. It can also be seen in **Figure 18** that a guide **600'** may be oriented with its longer surfaces parallel to the support surface **312** and provide support from underneath for boards **610** that are oriented with their longer cross-sectional dimension parallel with the support surface **312**.

[0071] After a predetermined number of boards have been arranged on the support surface **312** (typically less than the entire wall panel), the controller **500** signals the gripper/nailer to conduct a nailing pass. The articulating arm unit **100** moves the gripper/nailer **200** to the correct position and orients the gripper/nailer **200** so that the barrel **246** of the nailing unit **242** contacts a predetermined joint location on a board (*see Figure 9* for details of the nailing unit **242**). When in position, the stabilizing foot **238** presses against the board to secure it in place during the nailing operation. The controller **500** signals a pneumatic cylinder to actuate the trigger **248** of the nailing unit **242**, which causes a nail, fed by the magazine **232** to the barrel **246**, to be inserted into the boards at the joint location (*see Figure 13*). The controller **500** then repeats this process for the remaining joint locations in that nailing pass.

[0072] The controller **500** continues to direct the articulating arm unit **100** to alternately position groups of boards, then perform nailing passes, until the wall panel is

complete. In some embodiments, the support surface **312** of the table **300** can then be rotated to a horizontal position to facilitate offloading of the finished wall panel.

Controller and Software

[0073] As noted above, the controller **500** is connected with and controls the articulating arm unit **100**, and includes information about the locations of the support table **300** and the rack **400**. In order to control the fabrication of a wall panel, first the controller **500** interprets a user-supplied data file describing the spatial location of each board in the wall panel (**box 502** in **Figure 15**). The location maybe expressed as bottom right and top left coordinates of the board in the wall panel, or other specifications such as board dimensions and center location may be used. In some embodiments, the controller relies on software writtein in the KAREL language (available, for example, in the Fanuc M710iC/20L device discussed above) to receive and interpret a computer-aided drafting (CAD) file. Exemplary CAD files that are suitable for receipt and interpretation include files in AUTOCad, SolidBuilder (by Digital Canal of Dubuque, Iowa, and Panelview (by ITW Building Components Group, Pompano Beach, Florida). The CAD information can be used to determine the size and the locations of the various boards. Board size, orientation, use, length, front right xyz position and center xyz position can calculated for each board and compiled into an array of data structures (**boxes 504** and **506**).

[0074] Once the data for all of the boards are loaded into the array, the board data are sorted spatially from (a) front to back (z-direction), right to left (y-direction) and bottom to top (x-direction) using a bubble sort or other sorting algorithm (**box 508**). This information is used to determine the sequence to be followed in retrieving and placing boards on the support surface **312**. Other sorting sequences may also be employed.

[0075] After the board placement sequence is created, the main program determines which motion control sub-program to call in order to instruct the gripper/nailer **200** to physically pick and place the proper board (**box 510**). These motion control programs may be structured to have a common pick-up and drop-off routine that is controlled by dimensional offsets; therefore, depending on what offset is used, a particular board will be picked and placed in the correct location. The motions surrounding the pick and drop, however, are tailored to each class of board (header, trimmer, cripple, stud, etc.) to ensure proper manipulation. A subset of boards is then picked and placed on the support surface **312**

with the gripper/nailer **200** (**box 512**). Alternatively, a rules-based sequencing and motion planning algorithm may be used to command motions which pick and place boards without colliding or interfering with previously placed boards and other obstacles within the work area.

[0076] When a board is placed on the table a nail pattern determined by board orientation, use and building code is created. This pattern includes the spatial location and orientation of the nails (*i.e.*, left, right, front, top, bottom, toe, etc.) (**box 514**). Each nail data structure is loaded into an array to be used by the main program when necessary.

[0077] After placement of key boards (for example, after a header or trimmer), the controller **500** instructs the gripper/nailer **200** to perform a nailing pass. The first action is to group the array of nail data structures by direction and then sort by spatial location, front to back (z), right to left (y) and bottom to top (x) (**box 516**); this can be done by using a bubble sort or another sorting algorithm. After sequencing, another set of teach pendant motion programs are called to instruct the gripper/nailer **200** to physically nail the boards (**box 518**). In some embodiments, each instruction has an associated motion program. Also, in some embodiments the controller **500** utilizes safety point motion programs that are summoned between direction changes to ensure there are no collisions between the end of arm tooling and the work area. As with the board placement programs, a rules-based sequencing and motion planning algorithm may be used to command motions for nailing the boards without colliding or interfering with previously placed boards and other obstacles within the work area.

[0078] The process of placing boards and performing nailing passes is repeated until all boards in the wall panel are placed and nailed (**box 520**). At this point the controller **500** may instruct the articulating arm unit **100** to retract, and in some embodiments may instruct the table **300** to pivot to a horizontal position to facilitate offloading of the completed wall panel (**box 522**).

[0079] Those skilled in this art will appreciate that the structure of the software may vary, such that the number or sequence of steps may vary. For example, in some embodiments all of the boards may be positioned prior to any nailing passes. In other embodiments, the timing and planning sequence of nailing operations may be calculated prior to the positioning of boards, rather than being done "on the fly." Different subroutines may be called to avoid interference with the boards already positioned on the support surface. The

controller **500** may also keep track of nail and board inventory/availability and provide a notice for replenishment, and may also note the numbers of boards and nails used for accounting purposes.

[0080] In addition, one potential enhancement is the ability of the software and/or the gripper/nailer would be a sensor that can detect a knot, a hole, a deformation, or other non-uniformity in a board. With such a non-uniformity identified, the software could redirect the gripper/nailer to another location on the board for nailing, or could reorient and reposition the board on the support surface **312**, or could retrieve a replacement board for nailing in the same location.

[0081] Those skilled in this art will also appreciate that the present invention may be employed for the construction of building component assemblies other than wall panels. Exemplary alternative components include roof and floor trusses, archways, rake-walls, and foundation walls. Application of sheathing may also be accomplished with appropriate modification of end-of-arm tooling.

[0082] It will also be recognized by those skilled in this art that in some embodiments, either the nailer or the gripper may be omitted, and in other embodiments both may be present but attached to separate and distinct robotic arms.

[0080] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

77203-176

CLAIMS:

1. A device for constructing an assembly of building components, comprising:

an articulating arm unit;

a gripper/nailer mounted on an end of the articulating arm unit, wherein the
5 gripper/nailer includes a gripping unit for grasping building components and positioning them
in a predetermined arrangement, and a nailing unit for inserting a fastener to secure the
building components together; and

a controller that is operably associated with the articulating arm and the
gripper/nailer, the controller being configured to determine nailing locations based on the
10 arrangement of building components and to provide instructions on component placement and
nailing location to the articulating arm unit and the gripper/nailer.
2. The device defined in Claim 1, wherein the nailing unit is configured to insert
nails into the building components.
3. The device defined in Claim 1, wherein the articulating arm unit is a 6-axis
15 articulating arm unit having a wrist member, and wherein the gripper/nailer is mounted on the
wrist member.
4. The device defined in Claim 1, wherein the nailer operates on a first axis, and
the gripper operates on a second axis that is different from the first axis.
5. A system for constructing an assembly of building components, comprising:
20 a frame;

an articulating arm unit mounted on the frame;

a gripper/nailer mounted on an end of the articulating arm unit, wherein the
gripper/nailer includes a gripping unit for grasping building components and positioning them
in a predetermined arrangement, and a nailing unit for inserting a fastener to secure the

77203-176

building components together: and a support surface mounted on the frame, the support surface positioned and configured to receive building components from the gripping unit and maintain the building components in position for securing by the nailing unit.

6. The system defined in Claim 5, wherein the support surface defines a support
5 plane, and wherein a second axis normal to the support plane is oriented at an oblique angle to the horizontal surface underlying the frame.
7. The system defined in Claim 6, wherein the second axis forms an angle of between about 10 and 90 degrees with the first axis.
8. The system defined in Claim 6, wherein the first axis is oriented at an angle of
10 between about 10 and 45 degrees to the horizontal surface, and wherein the second axis is oriented at an angle of between about 10 and 90 degrees to the horizontal surface.
9. The system defined in Claim 5, wherein the support surface is pivotally mounted to the frame and movable between an upright position, in which the support surface is angled relative to a horizontal surface underlying the frame and faces generally the
15 articulating arm, and an offloading position, in which the support surface is generally horizontally disposed.
10. The system defined in Claim 5, further comprising horizontal stops that are fixed adjacent lower edge of the support surface, and vertical stops that are fixed adjacent a side edge of the support surface.
- 20 11. The system defined in Claim 10, wherein one of the horizontal stops and the vertical stops are configured to be retractable from the support surface.
12. The system defined in Claim 5, further comprising a controller that is operably associated with the articulating arm and the gripper/nailer, the controller being configured to provide instructions on component placement and nailing location to the articulating arm unit
25 and the gripper/nailer.

77203-176

13. The system defined in Claim 5, further comprising a rack that supplies building components to the gripper.

14. The system defined in Claim 5, further comprising a cut-to-length saw that forms building components to a desired length and provides them to the gripper.

5 15. The system defined in Claim 5, further comprising guides mounted to the support surface.

16. The system defined in Claim 15, wherein the guides include magnets for attached to the support surface.

10 17. A computer program product for controlling operation of a system for constructing assemblies of building components, comprising:

a computer readable storage medium having computer readable program code embodied therein, the computer readable program code comprising:

computer readable program code configured to receive data regarding an assembly of building components;

15 computer readable program code configured to direct a gripper on an articulating arm unit to retrieve individual building components from a supply of building components;

20 computer readable program code configured to direct the gripper on the articulating arm unit to position the building components in predetermined positions to form a predetermined arrangement of building components; and computer readable program code configured to direct a nailing unit mounted on the articulating arm unit to secure the building components together to form an assembly of building components;

25 wherein the computer readable program code is further configured to determine nailing locations for directing the nailing unit responsive to the locations of the arranged building components.

77203-176

18. The computer program product defined in Claim 17, wherein the data received is data generated by a computer-aided drafting (CAD) program.

19. The computer program product defined in Claim 17, further comprising computer readable code configured to convert the CAD data into building component data by
5 identifying a lower right position and a center position of each building component.

20. The computer program product defined in Claim 17, further comprising computer readable code configured to control the cutting of lengths of building components with a cut-to-length saw.

1/23

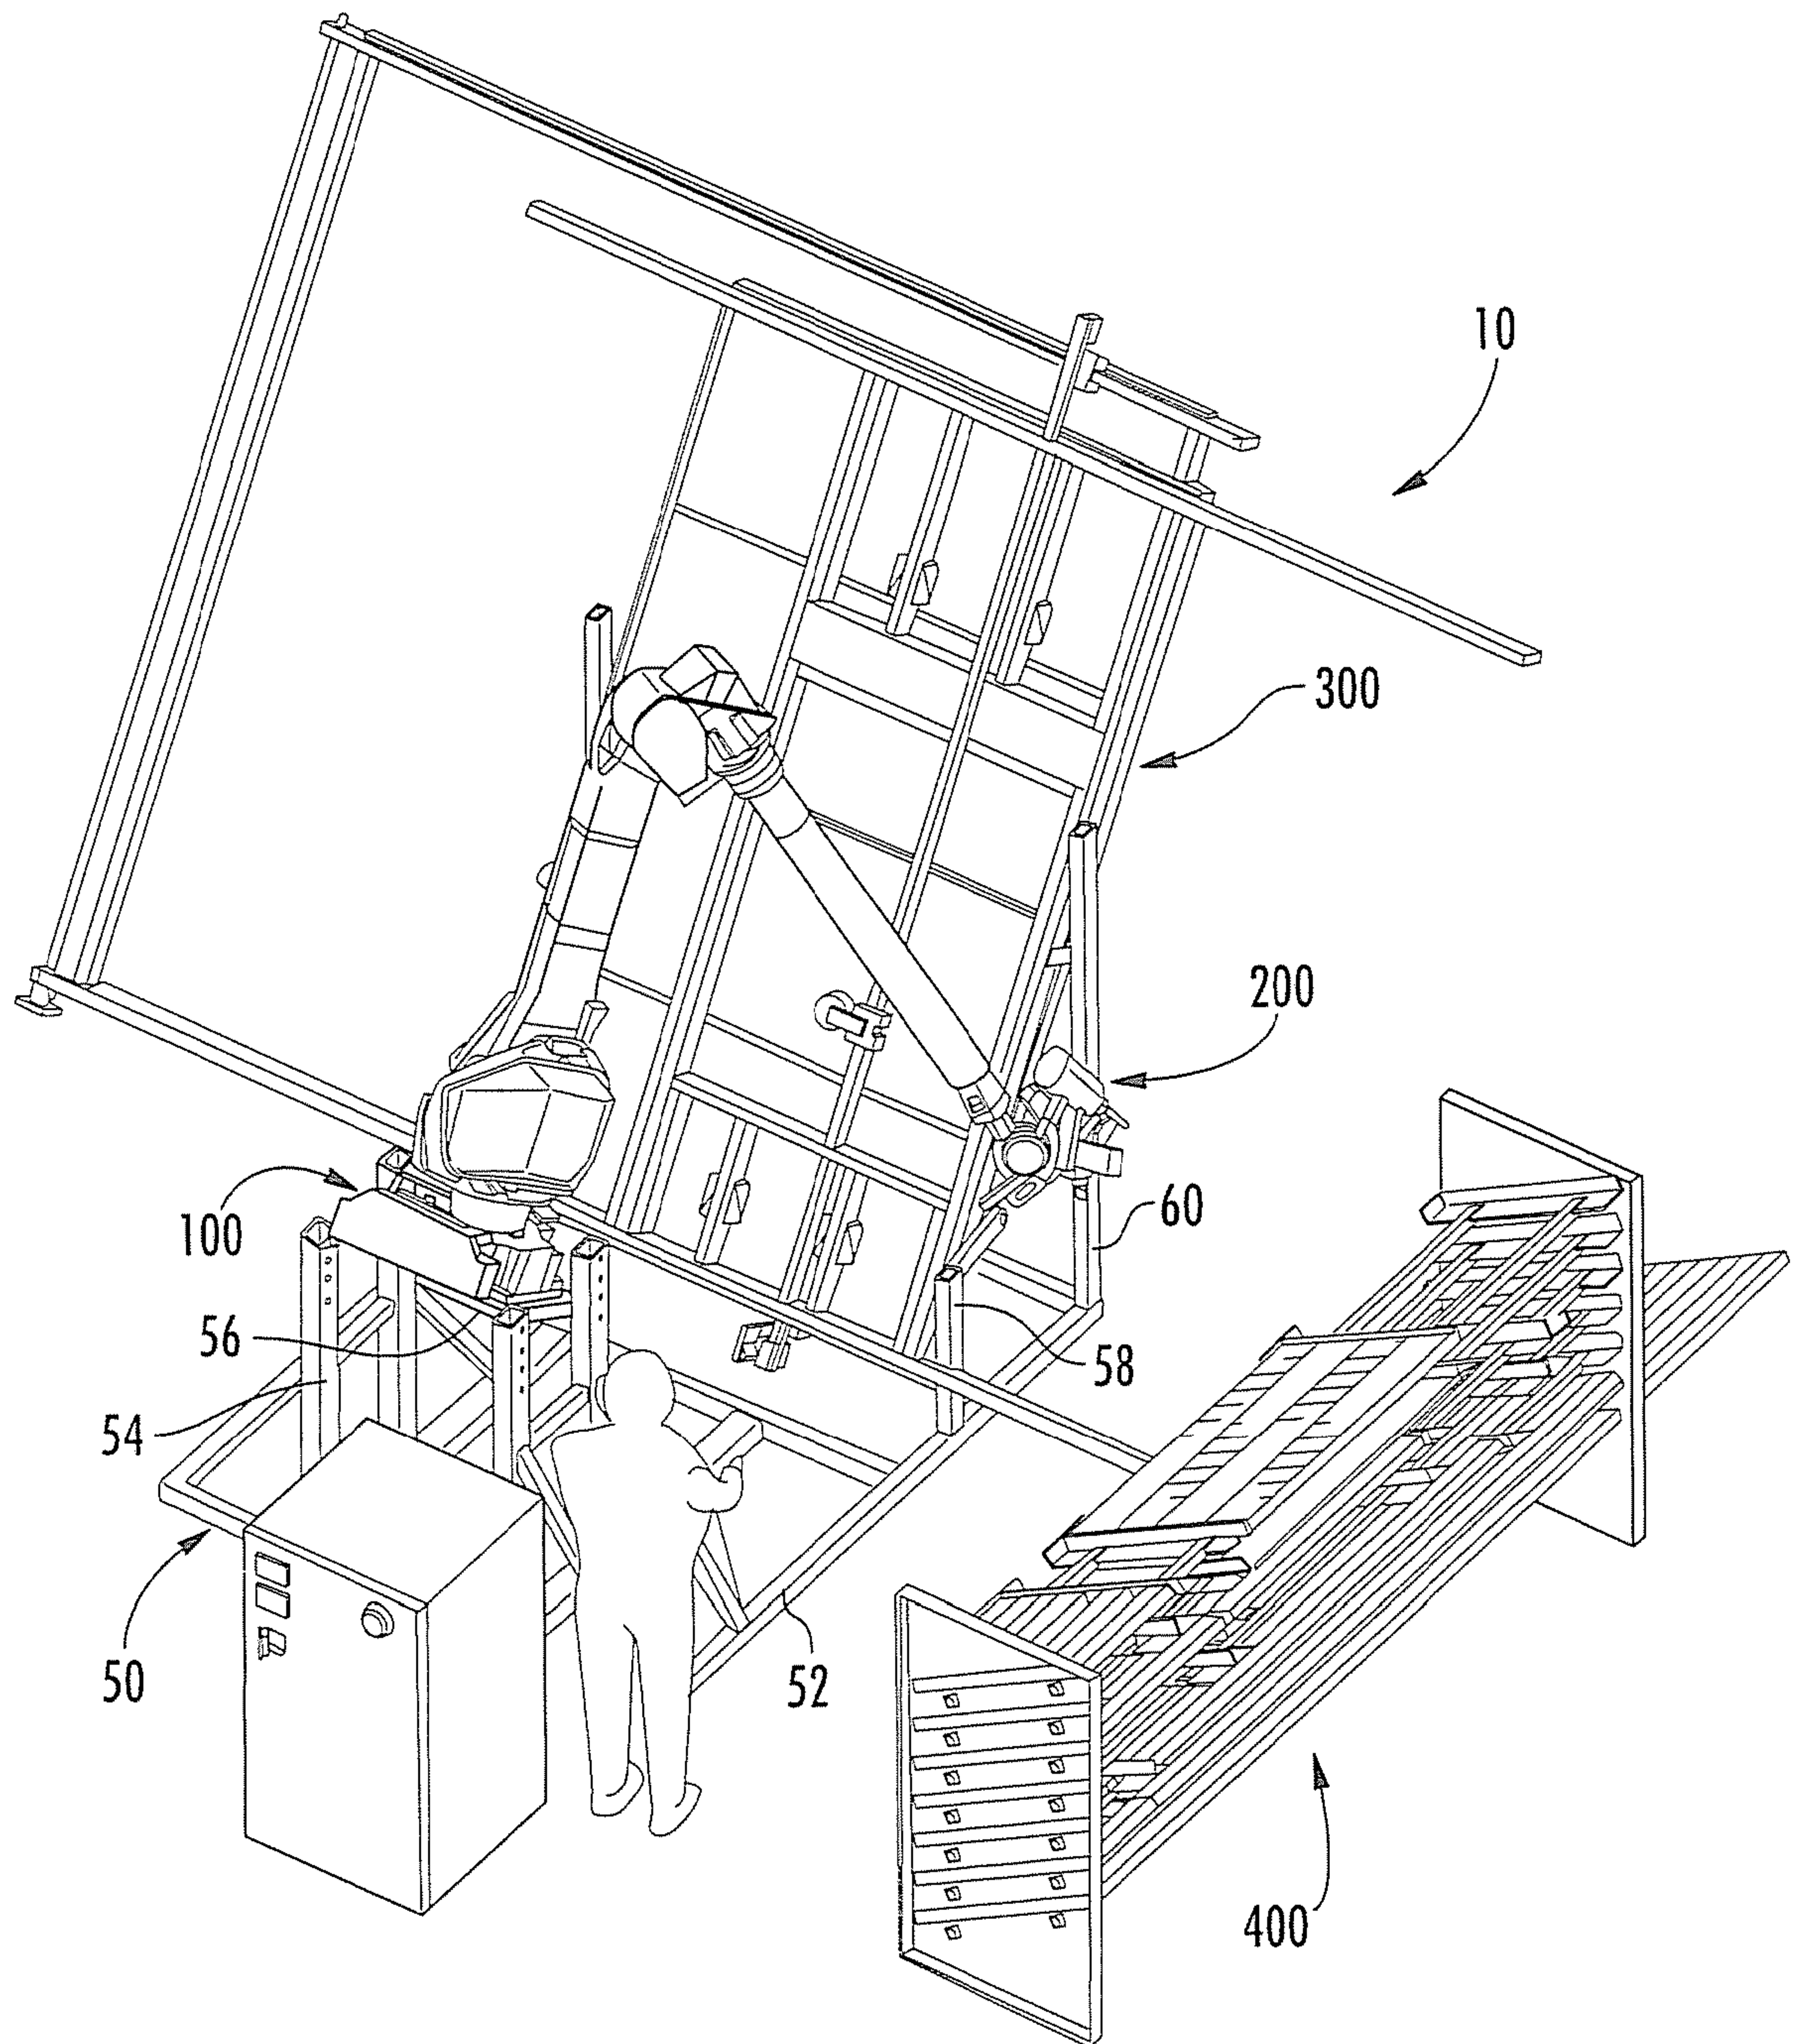


FIG. 1

2/23

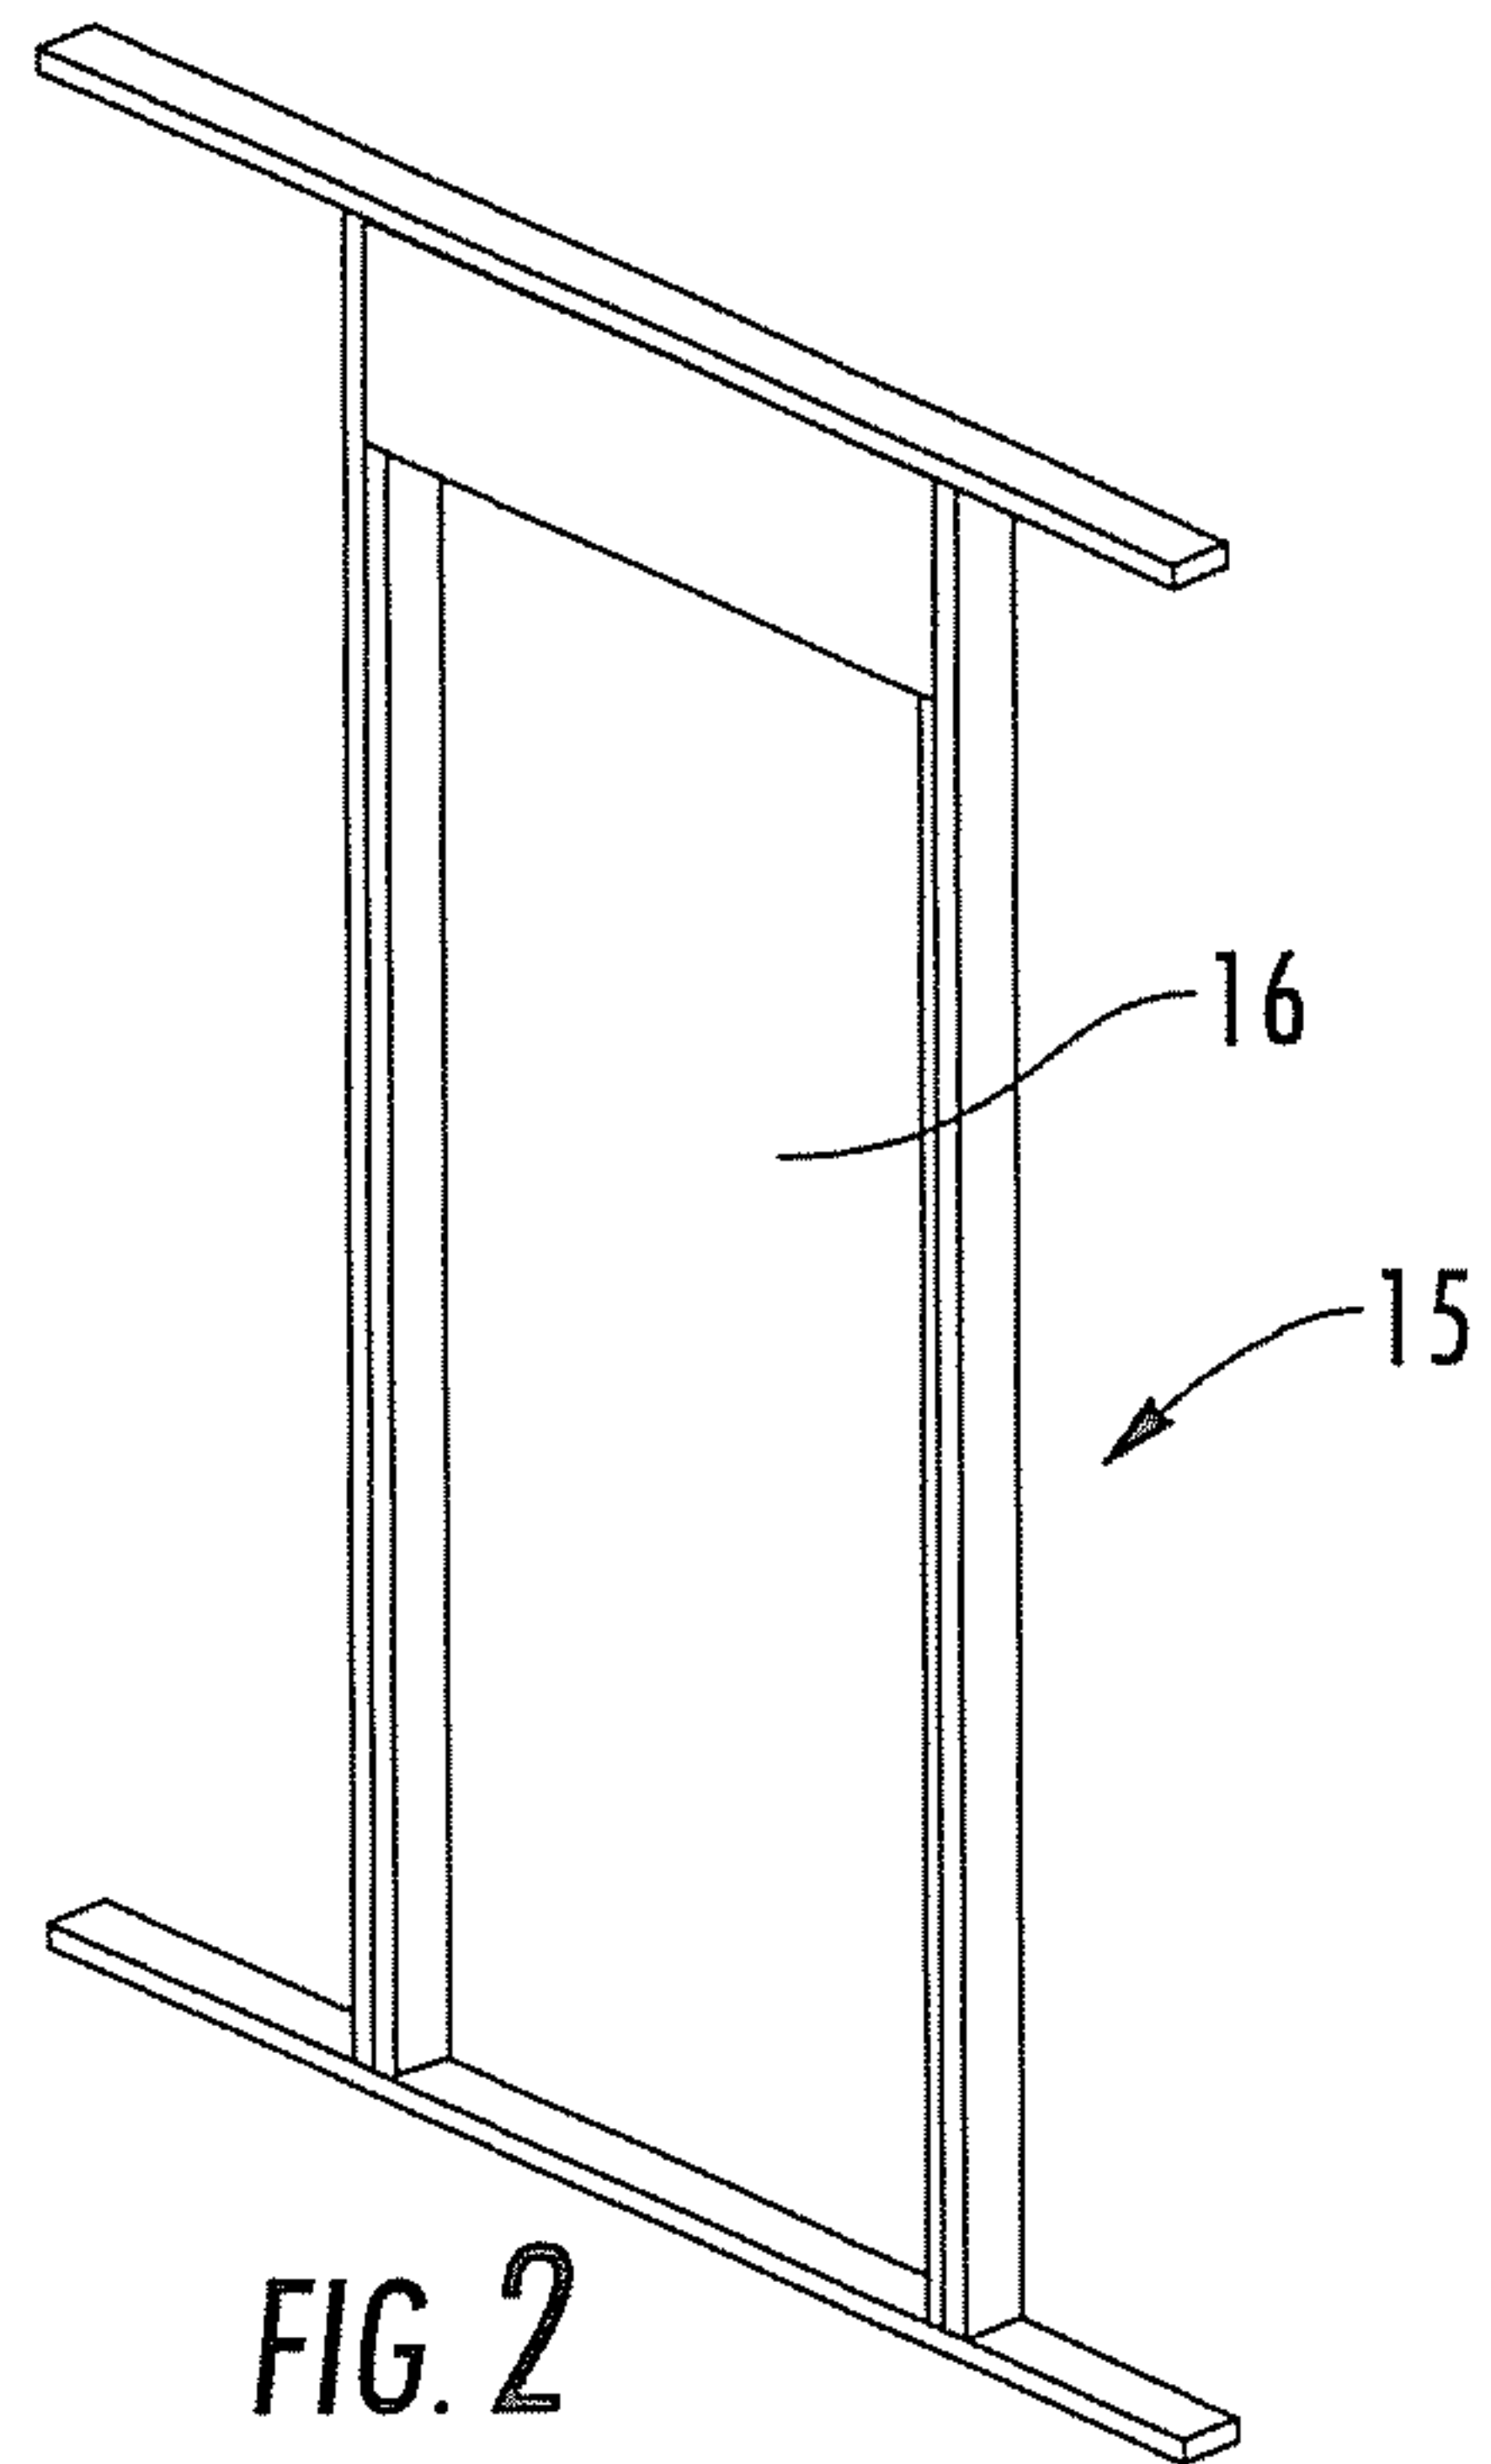


FIG. 2



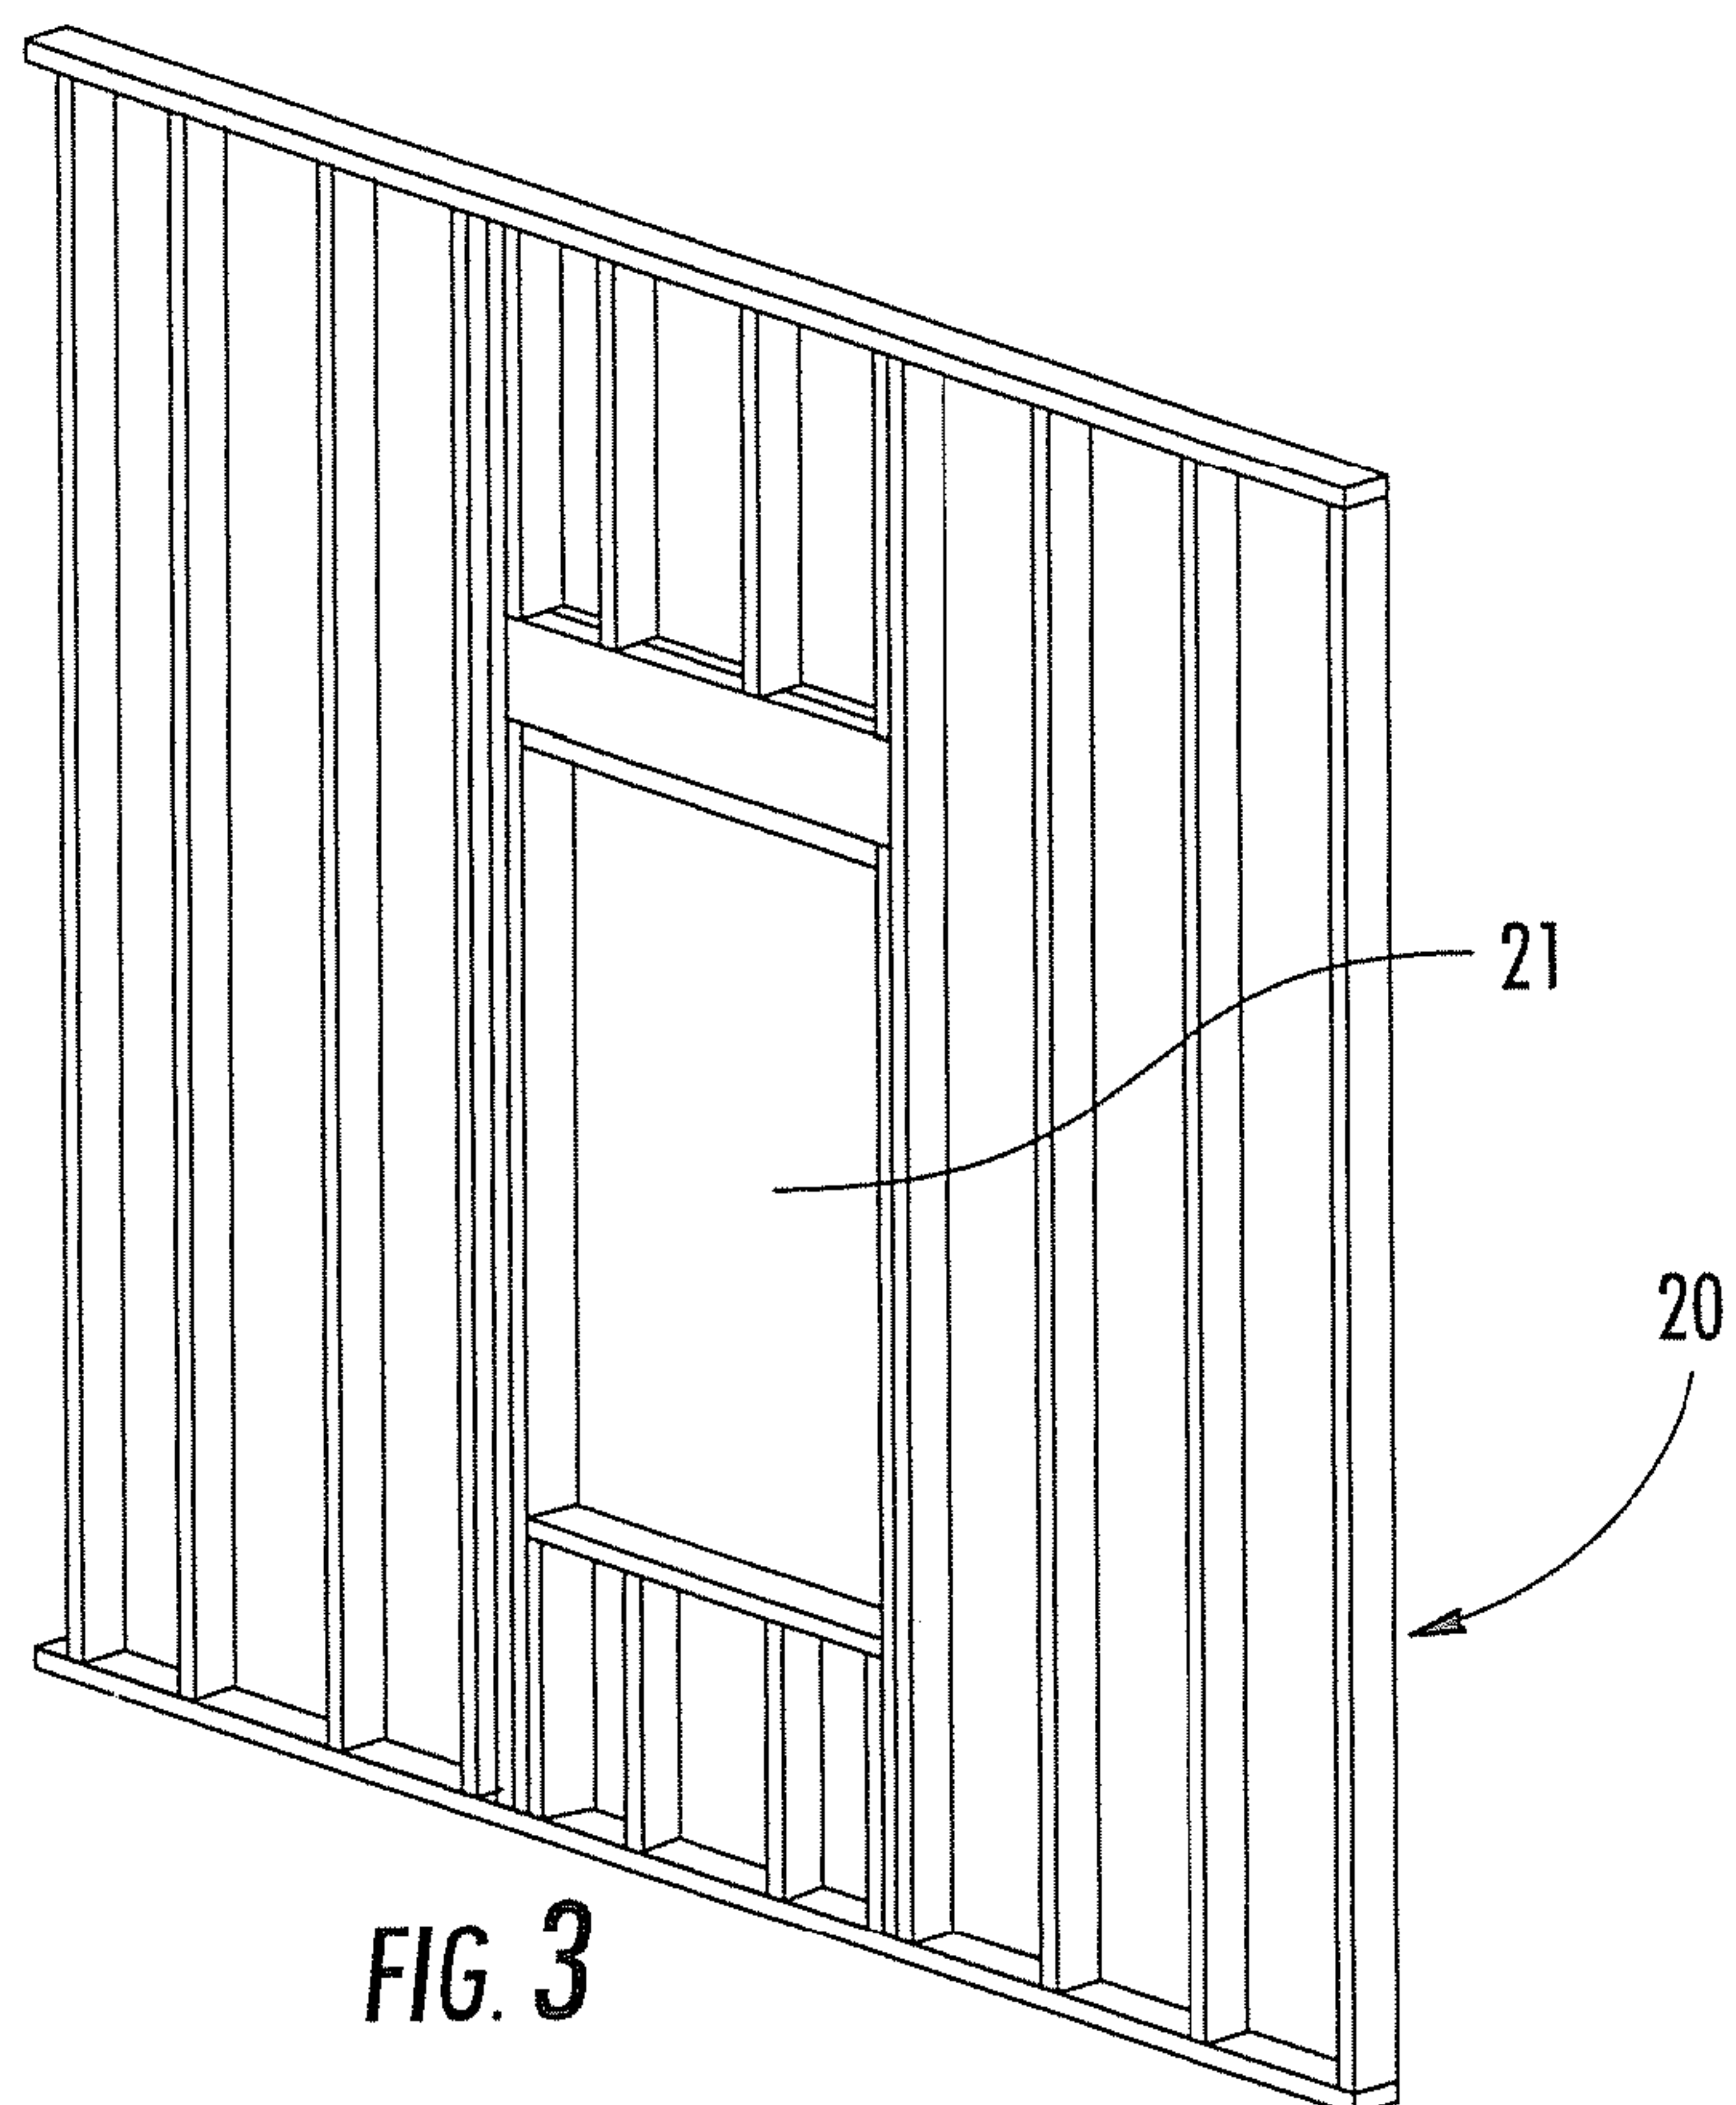



FIG. 3

3/23

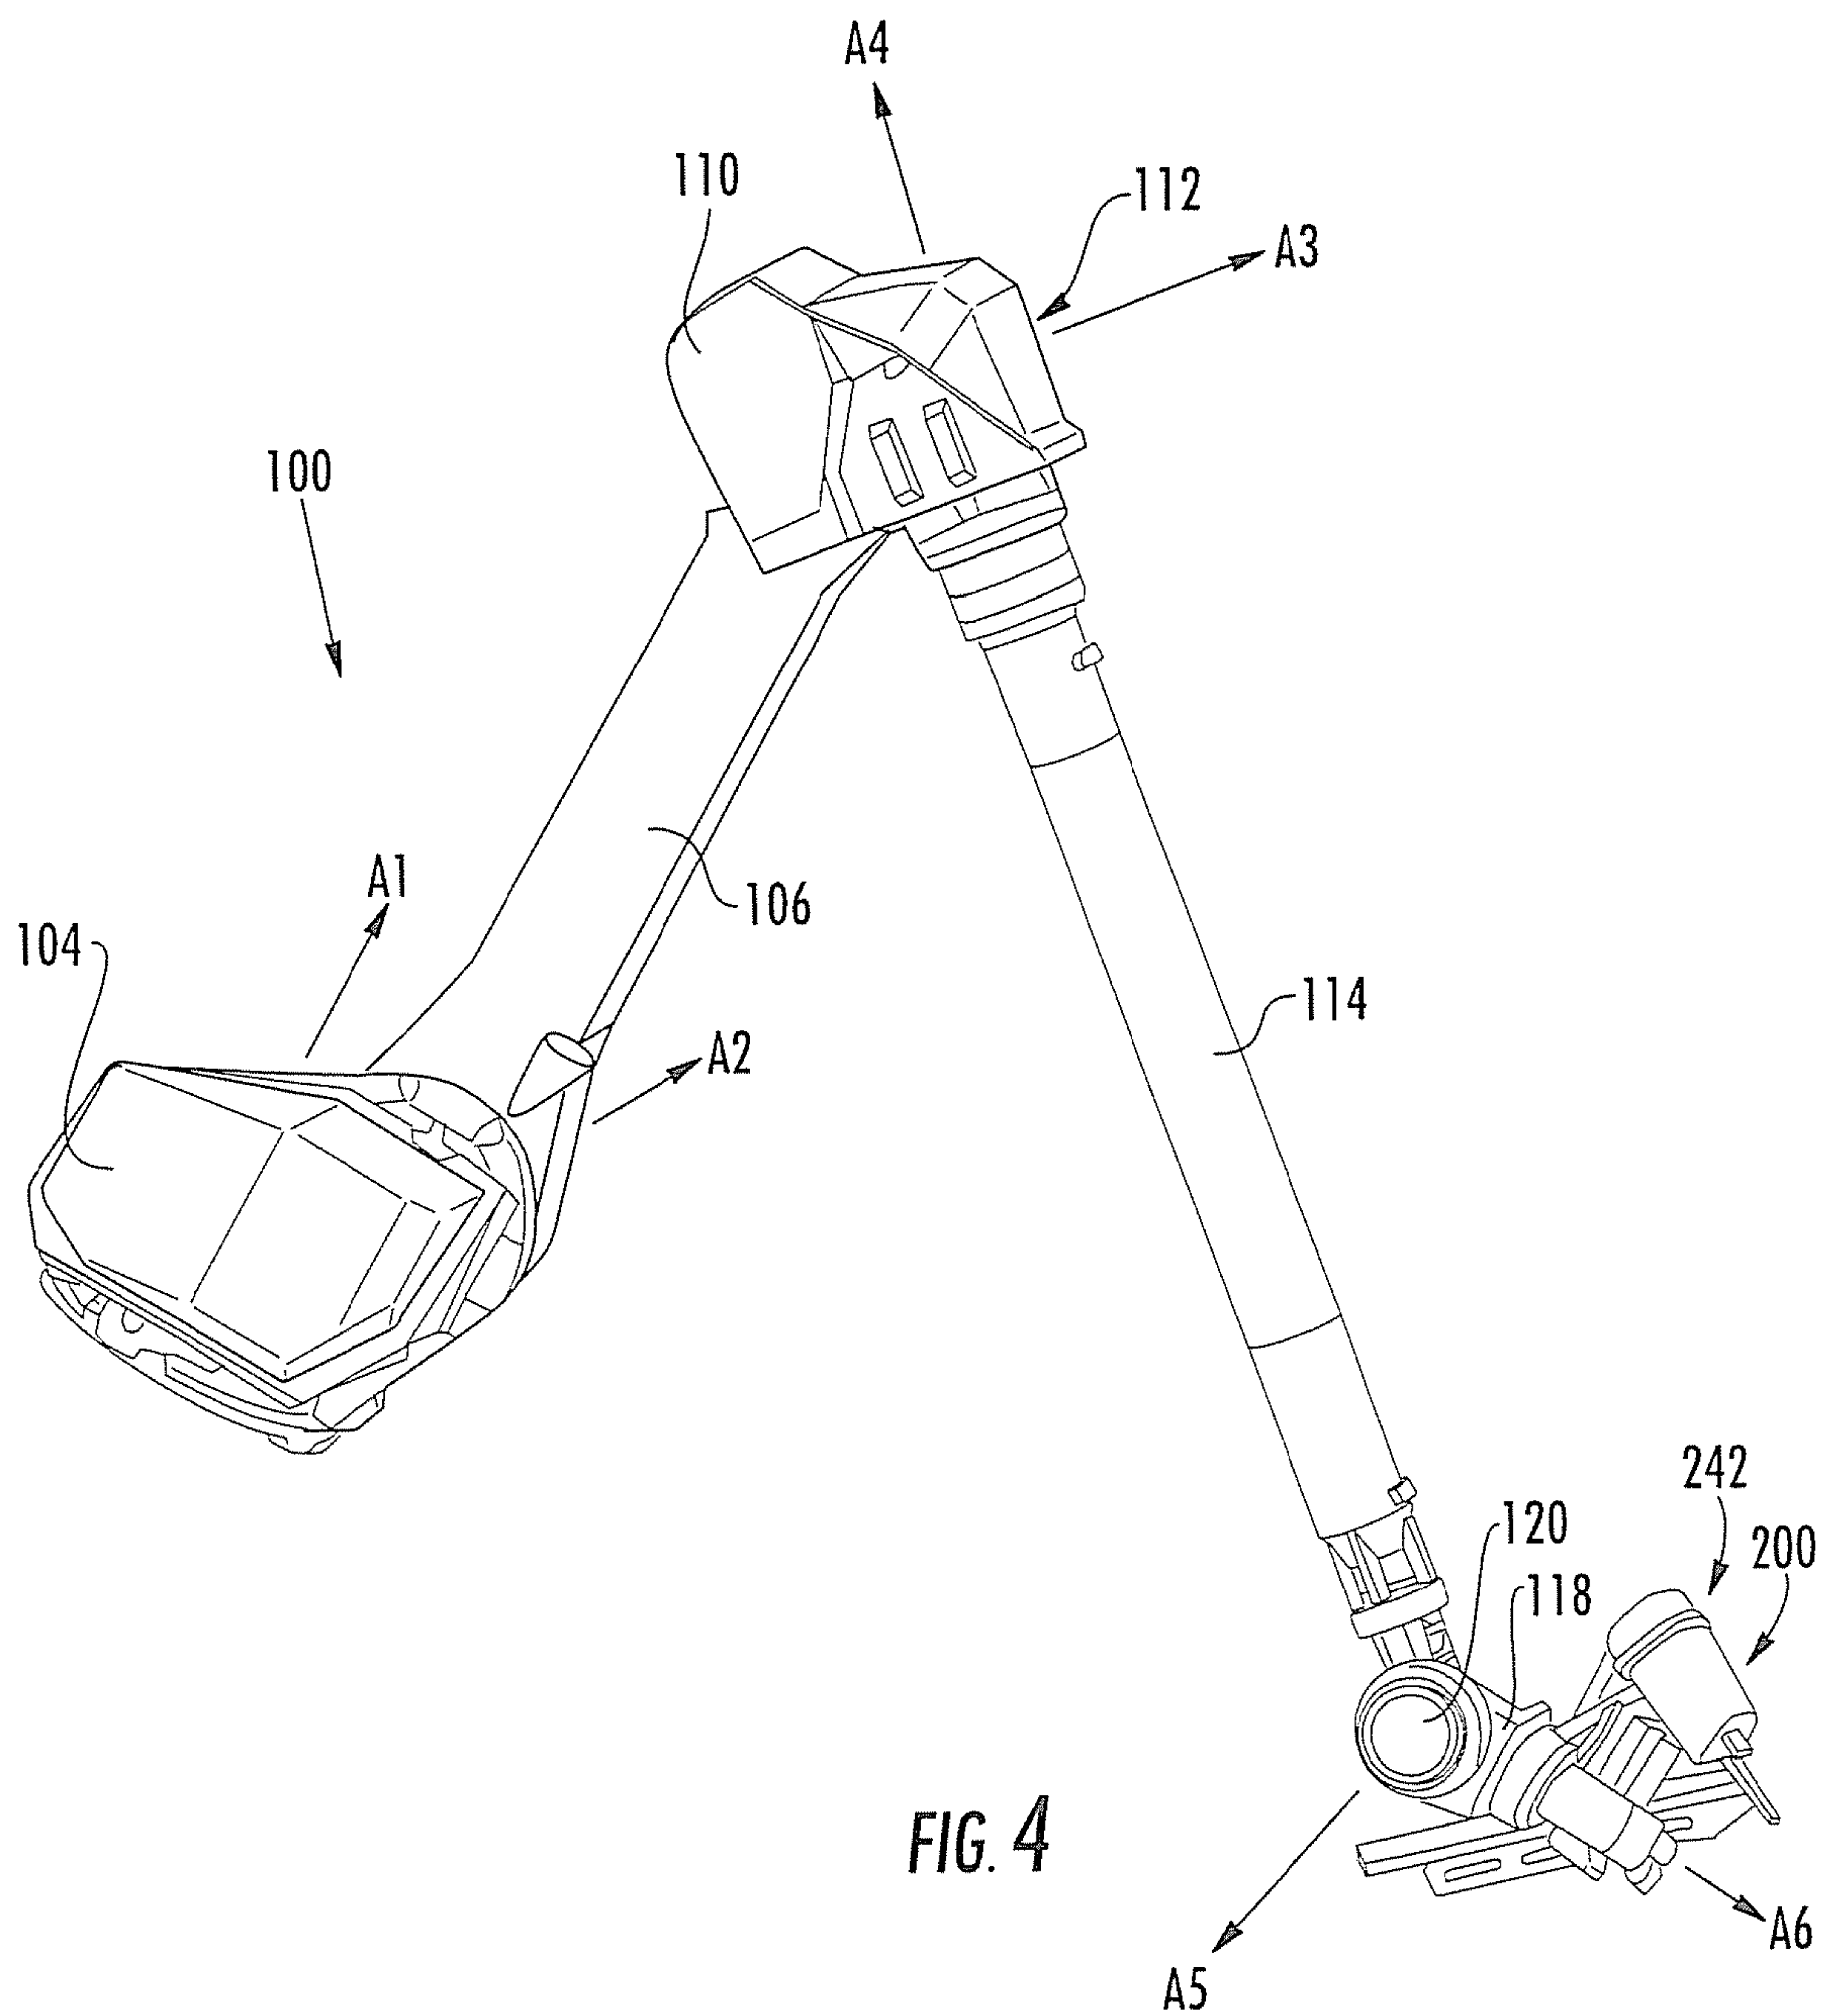

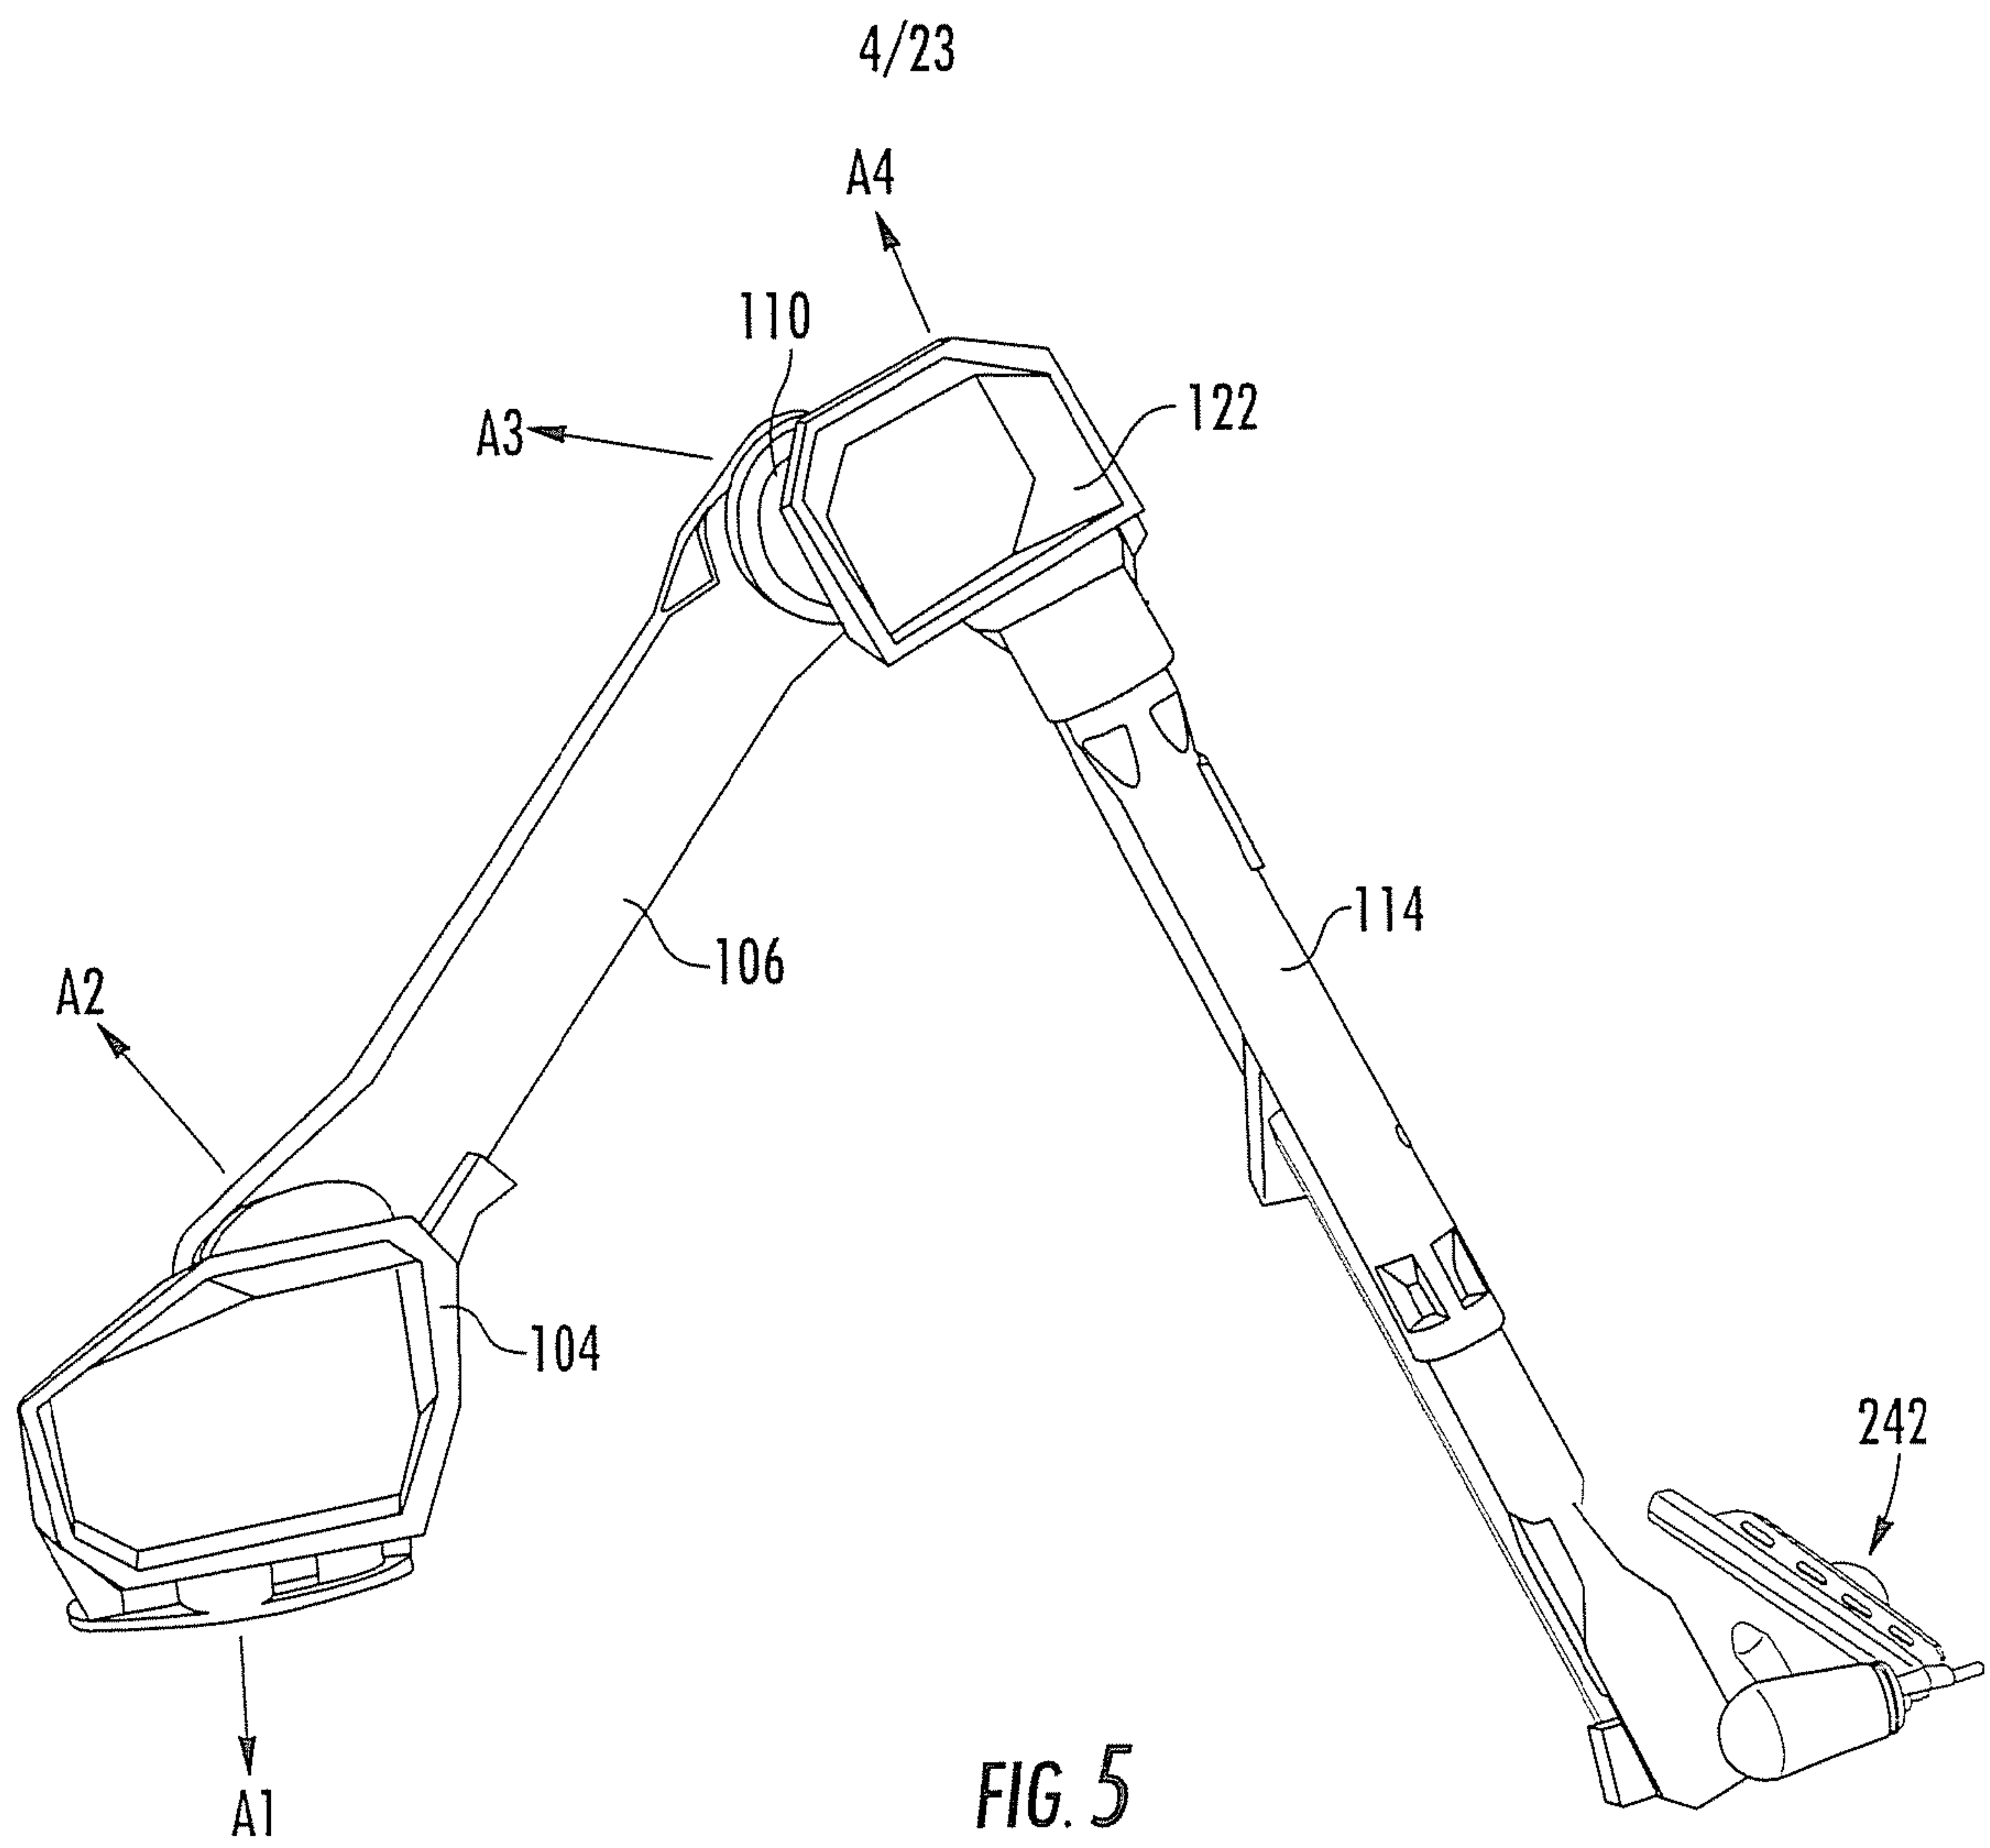

5/23

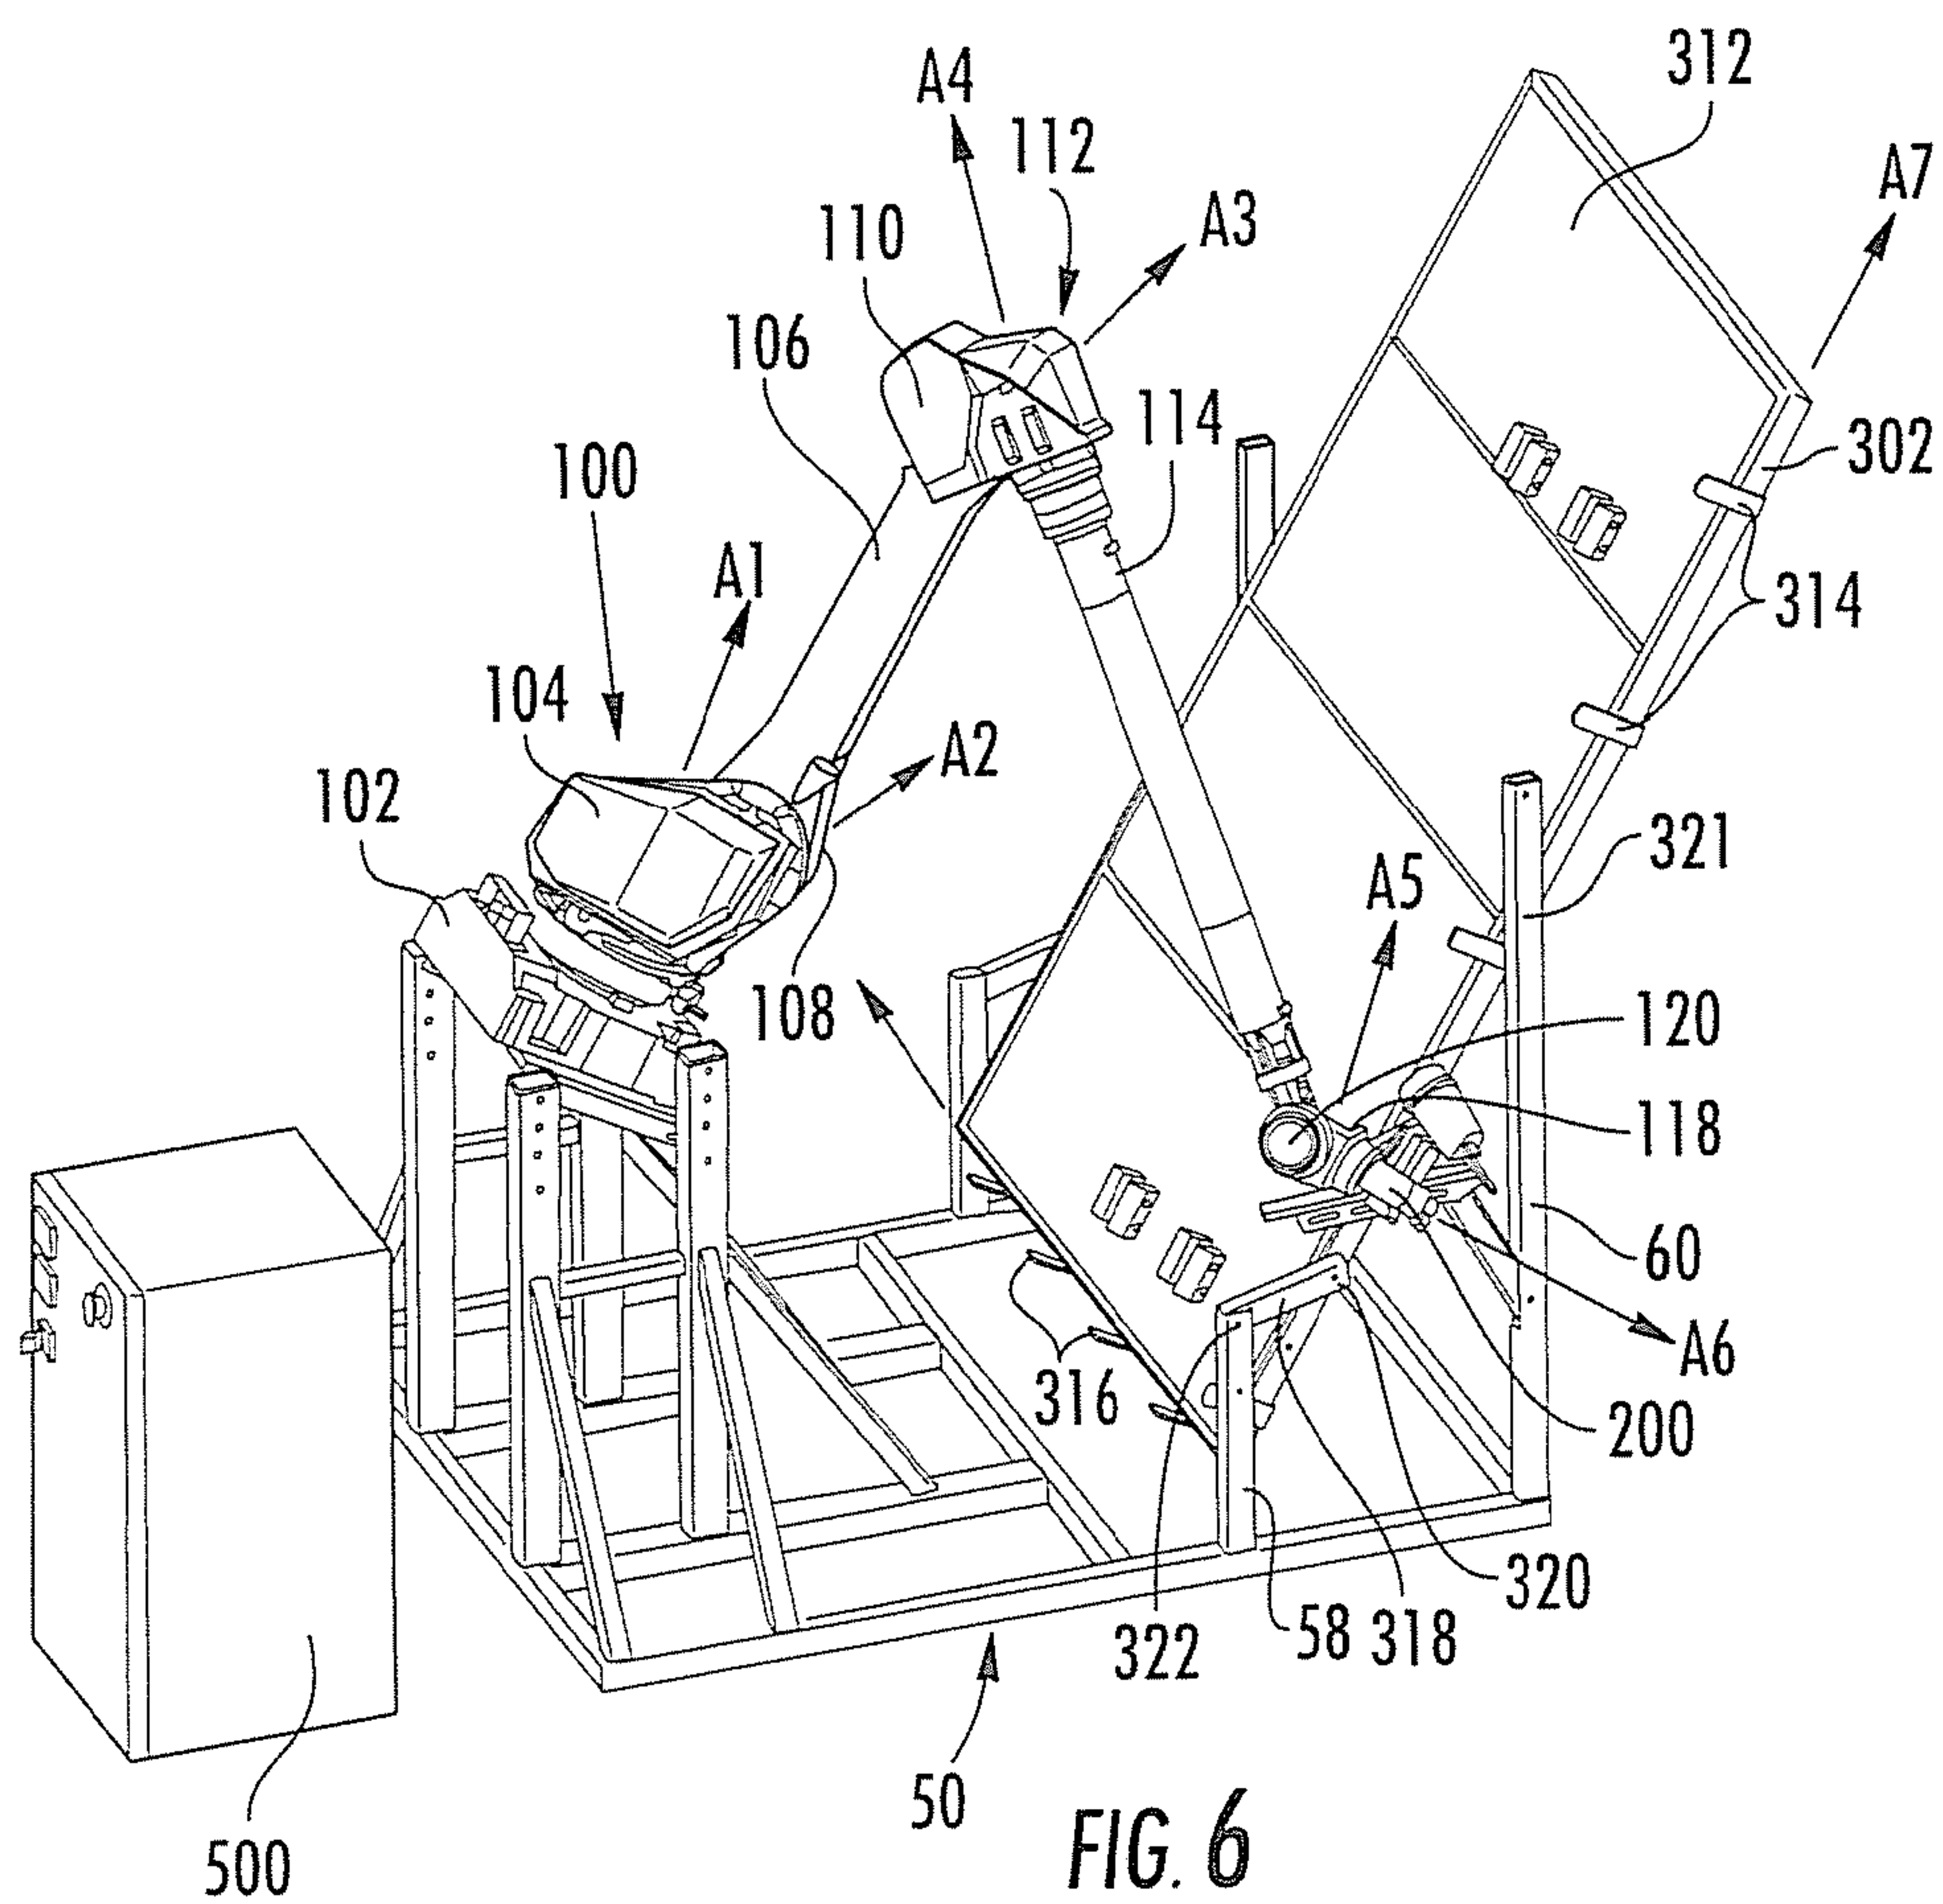

6/23

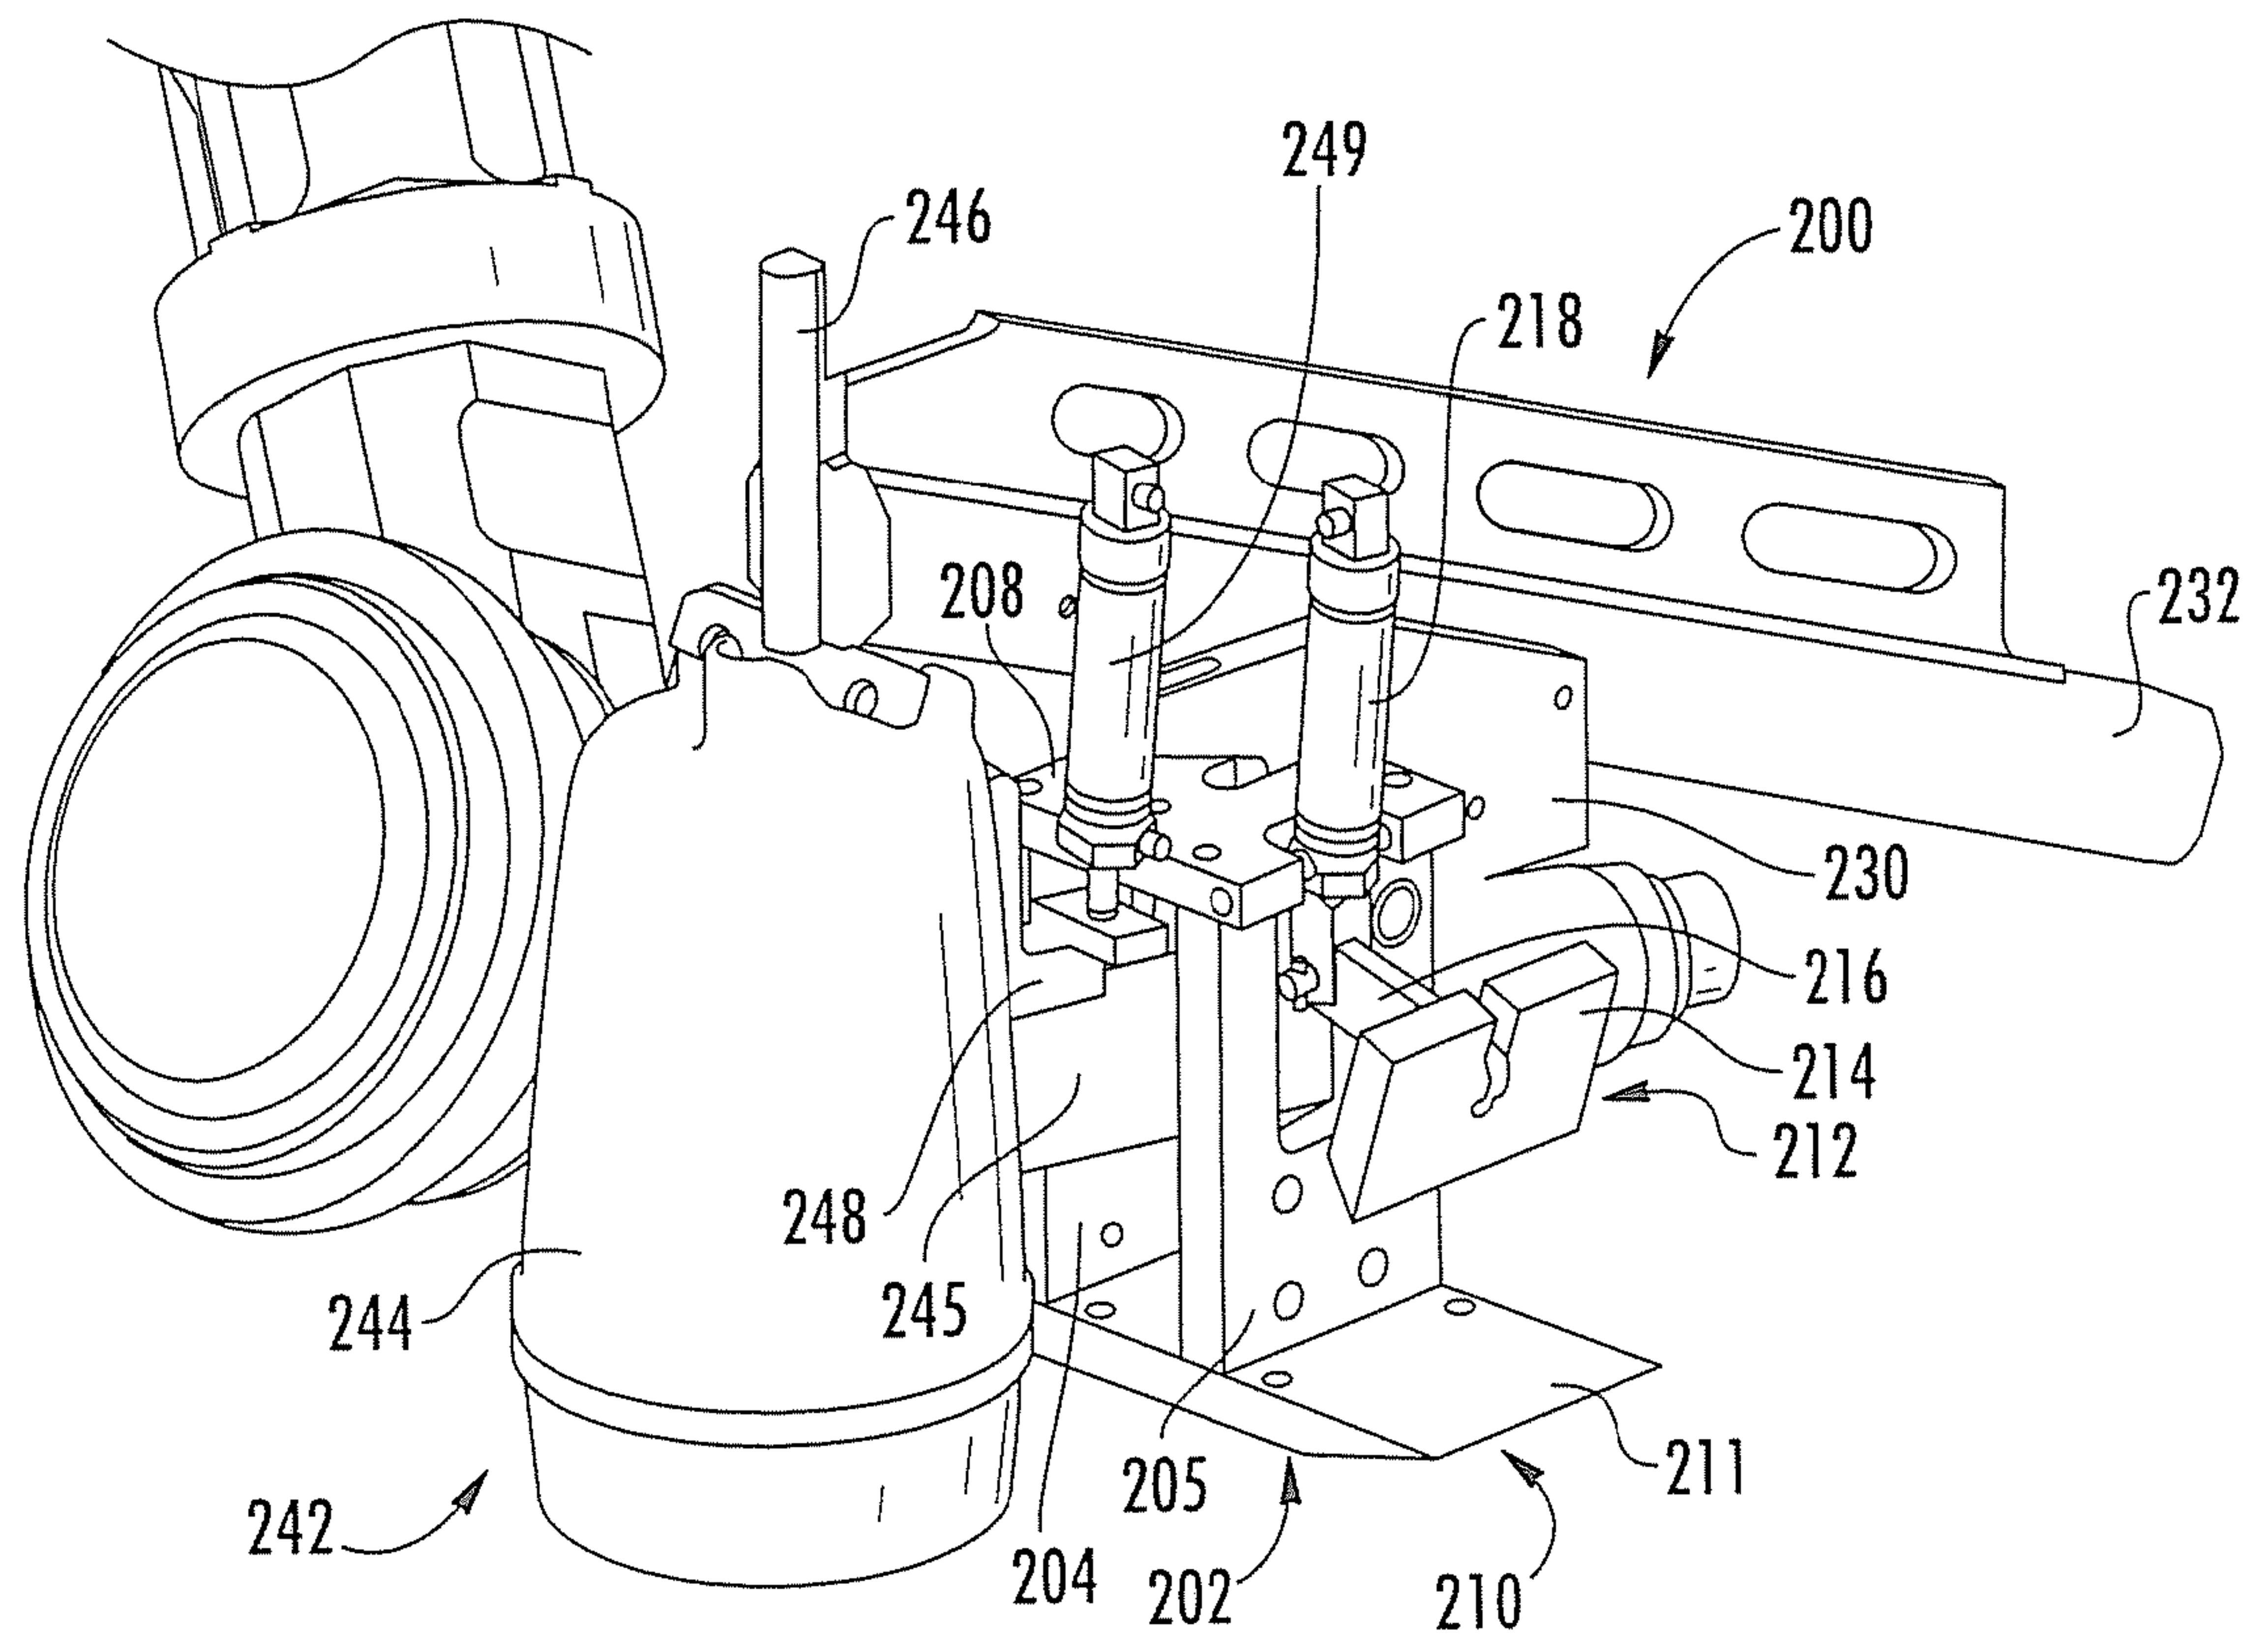


FIG. 7

7/23

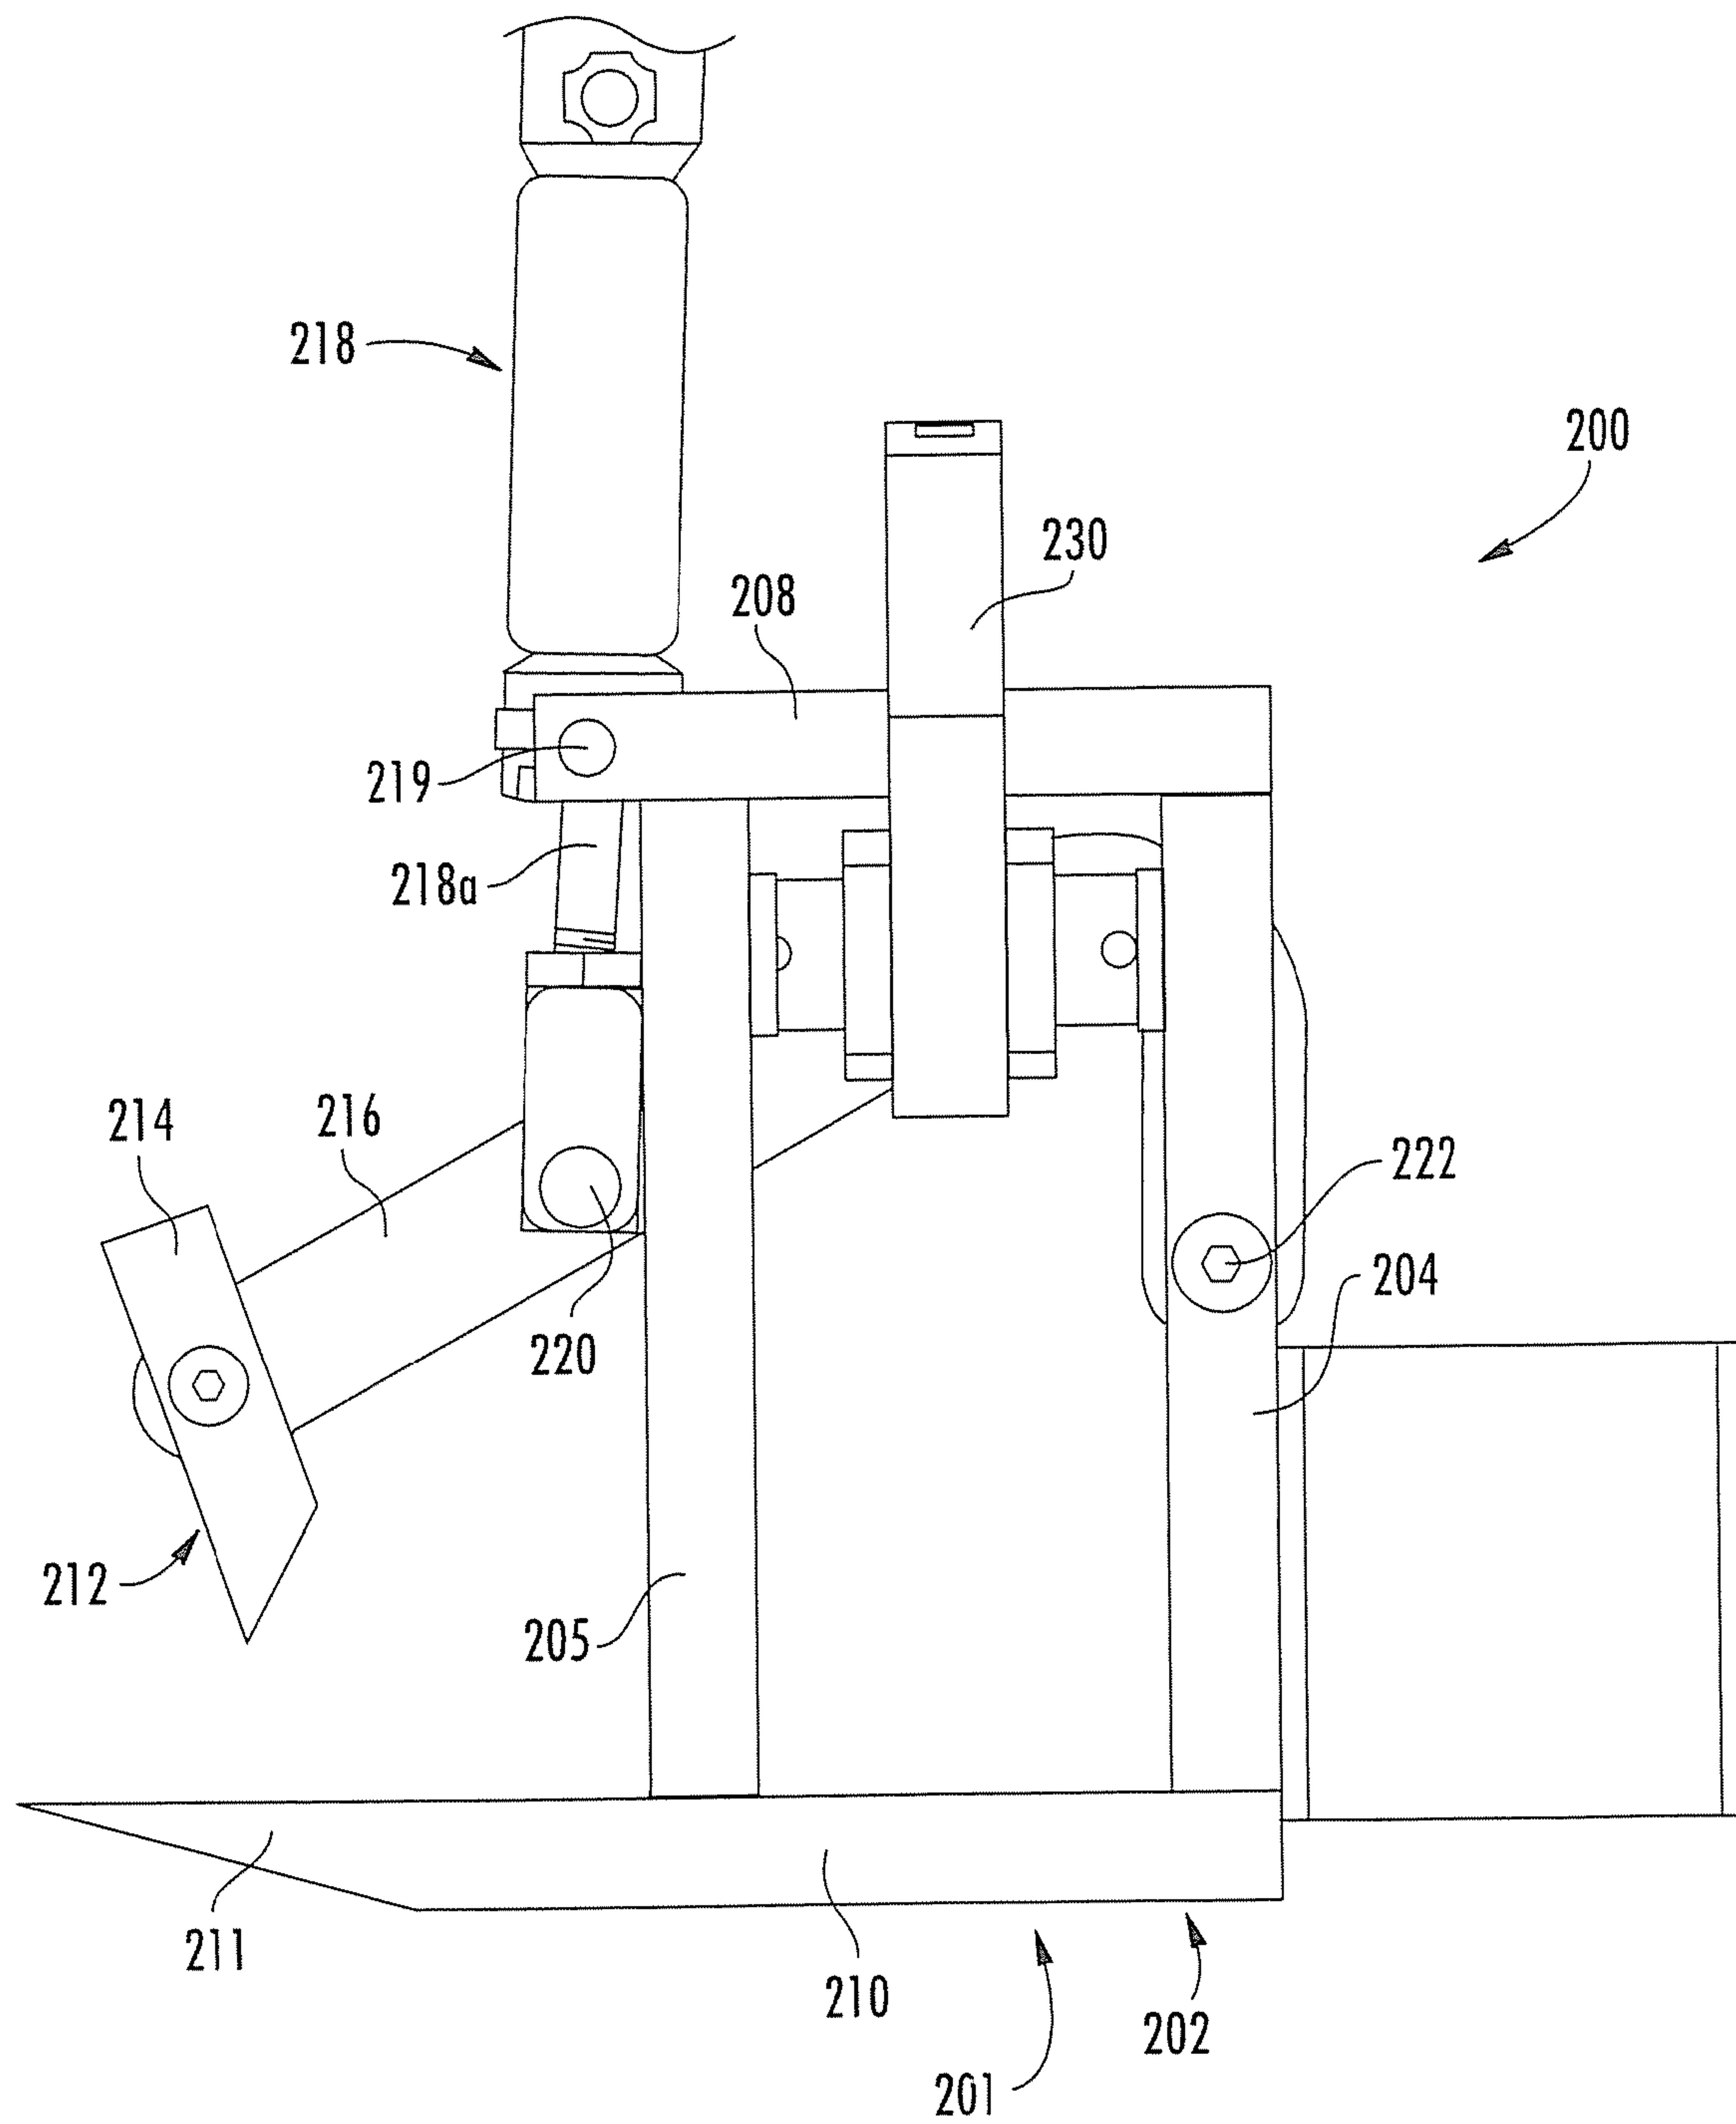


FIG. 8

8/23

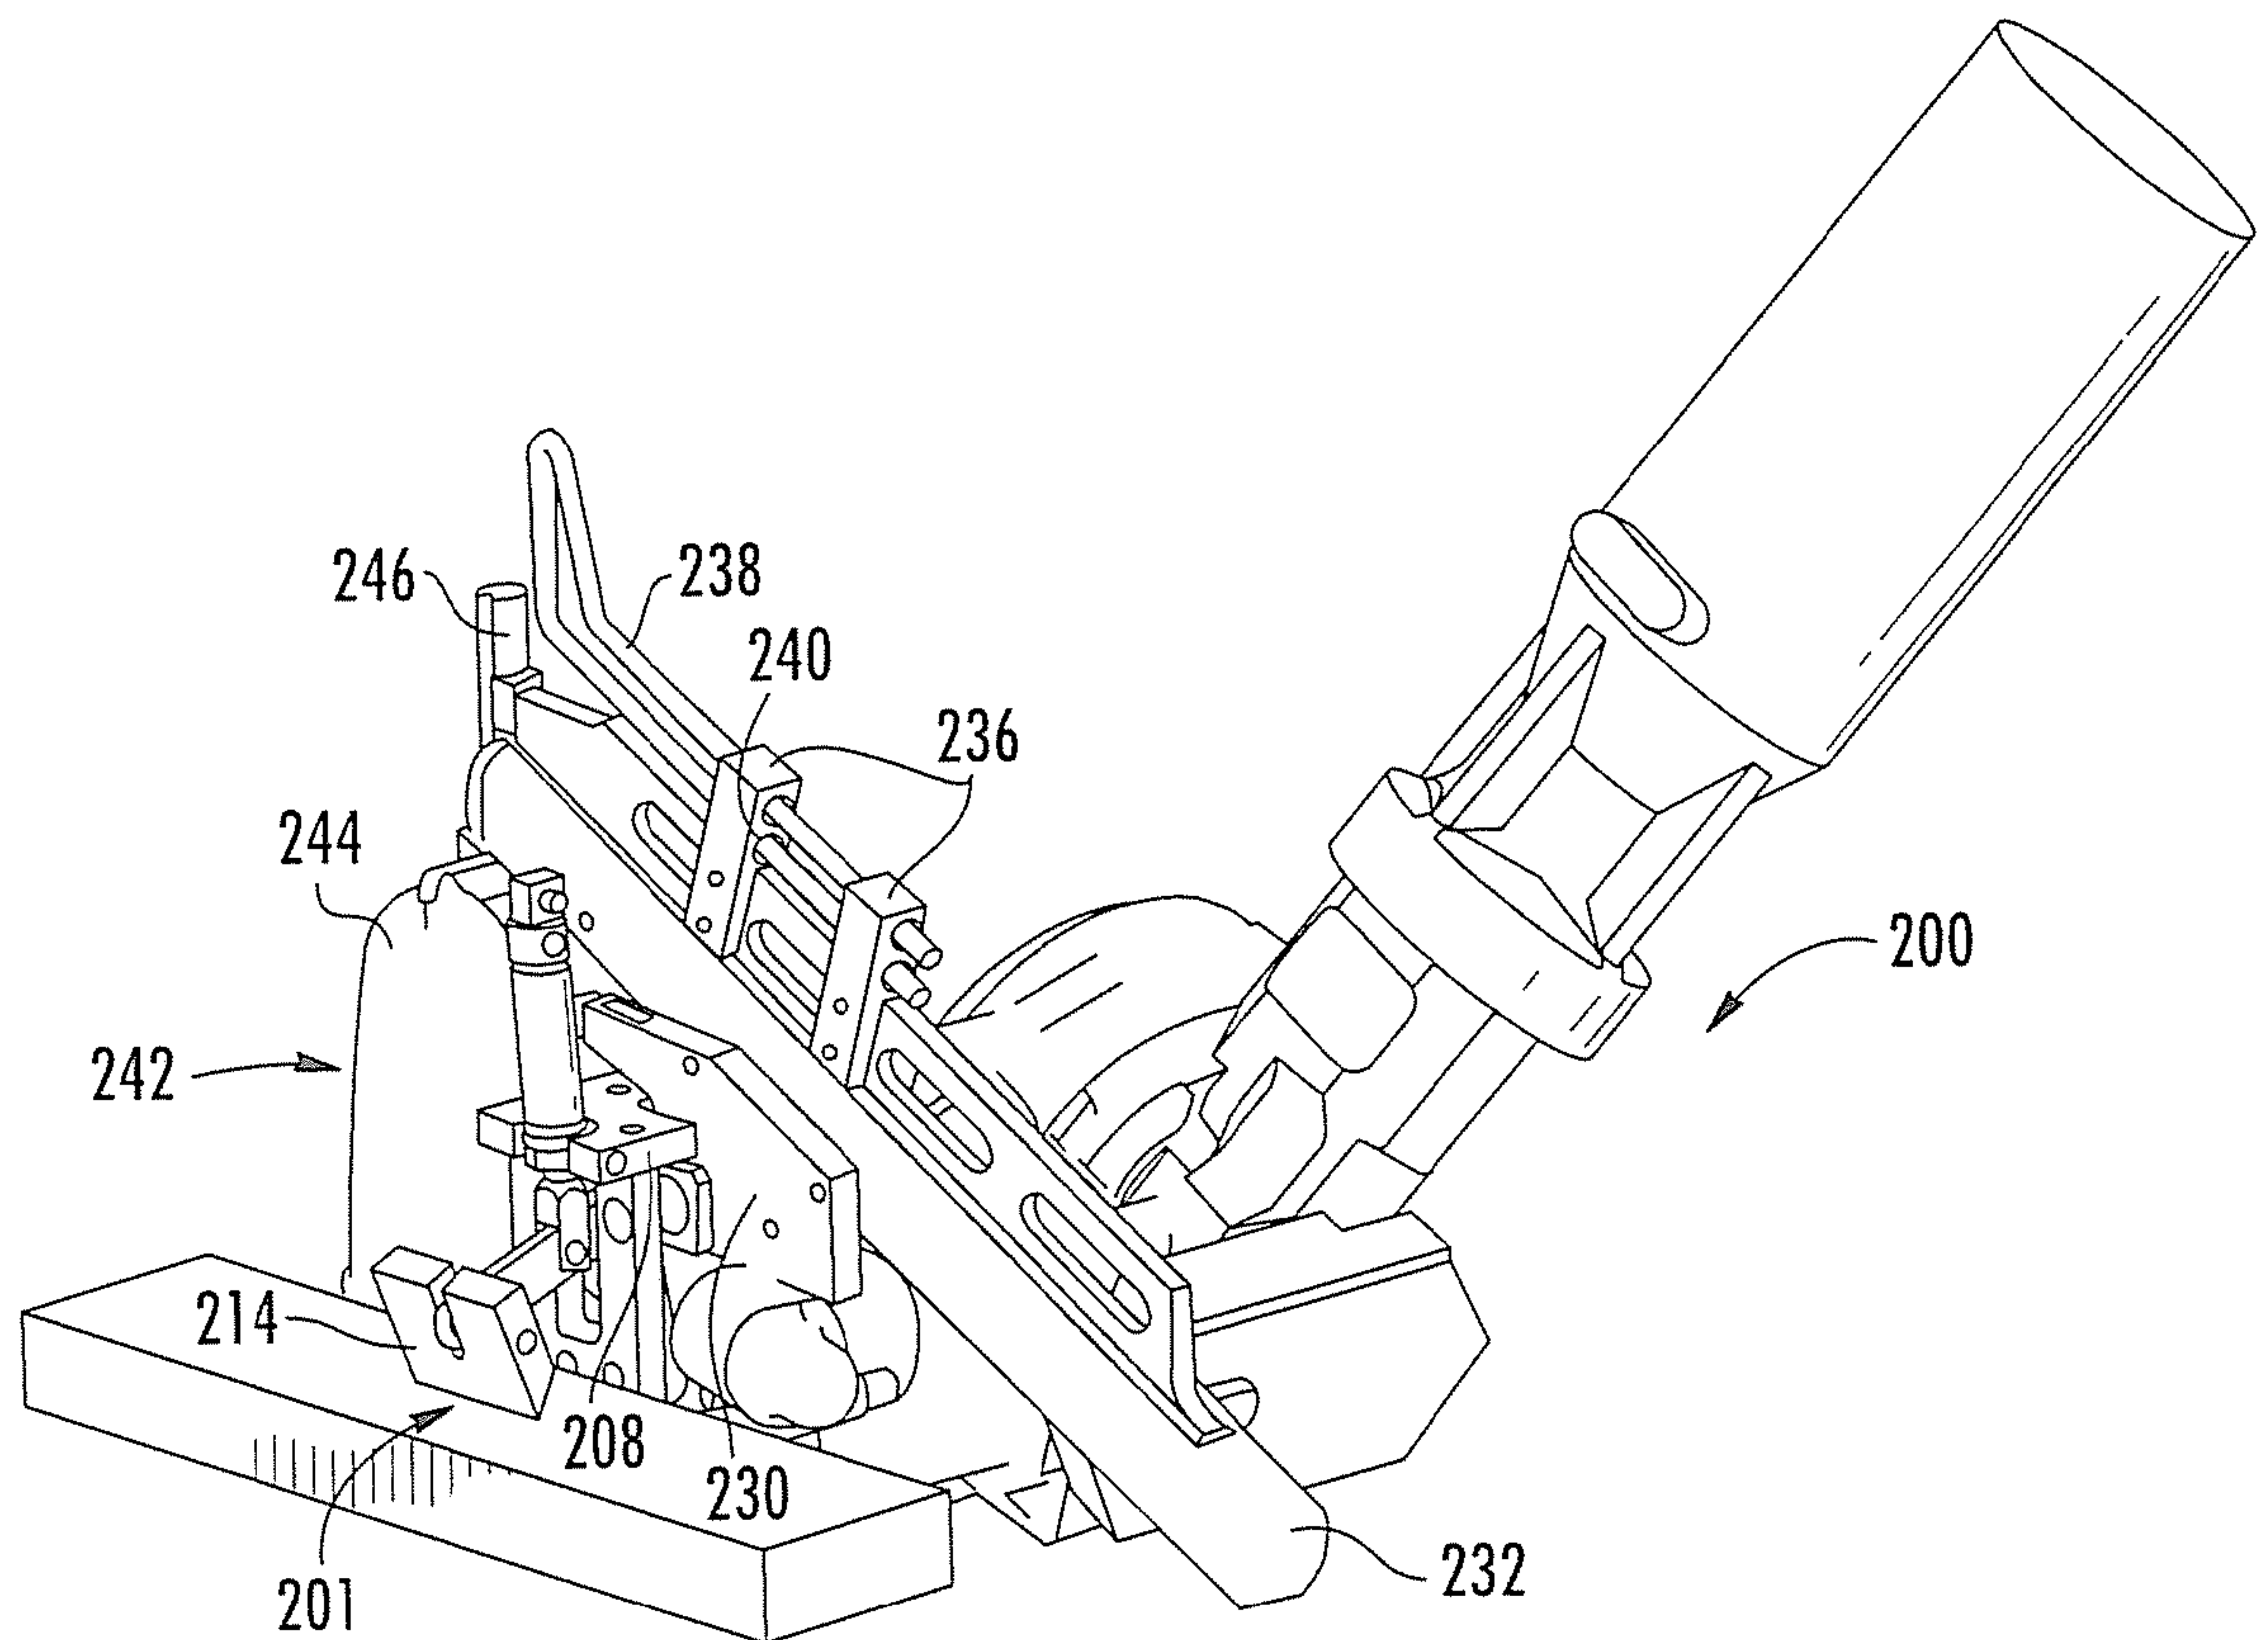


FIG. 9

9/23

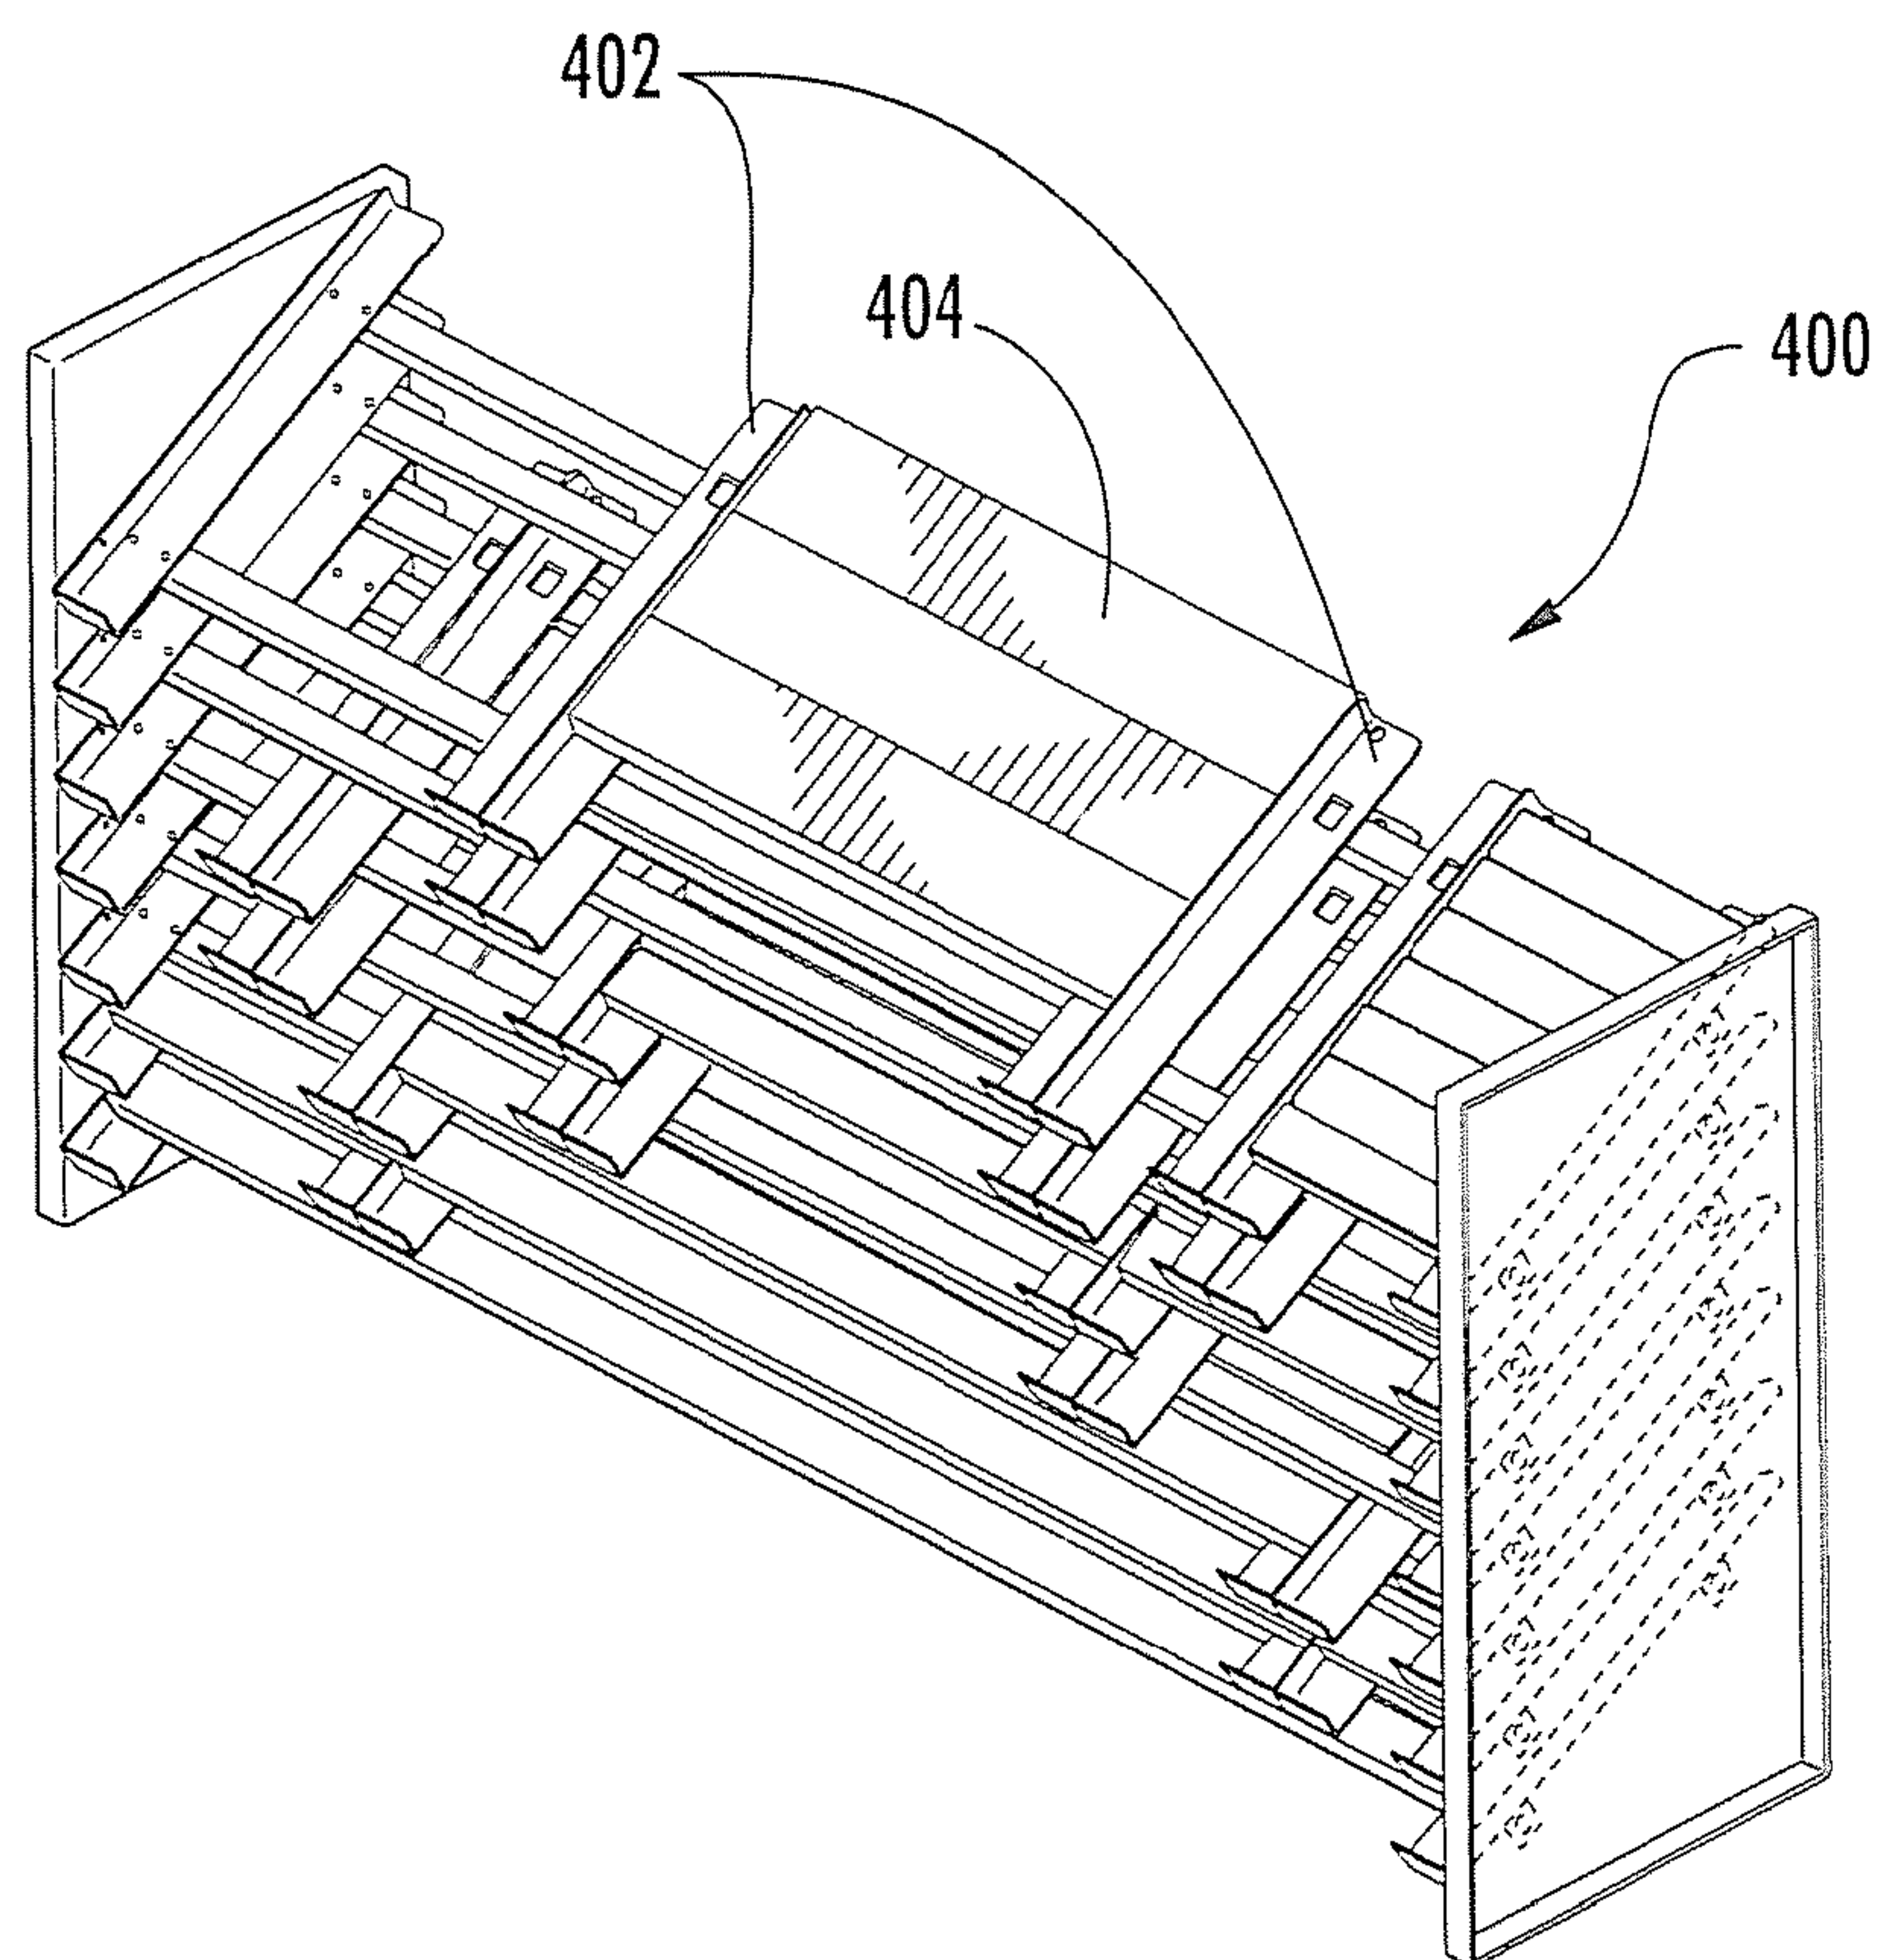


FIG. 10

10/23


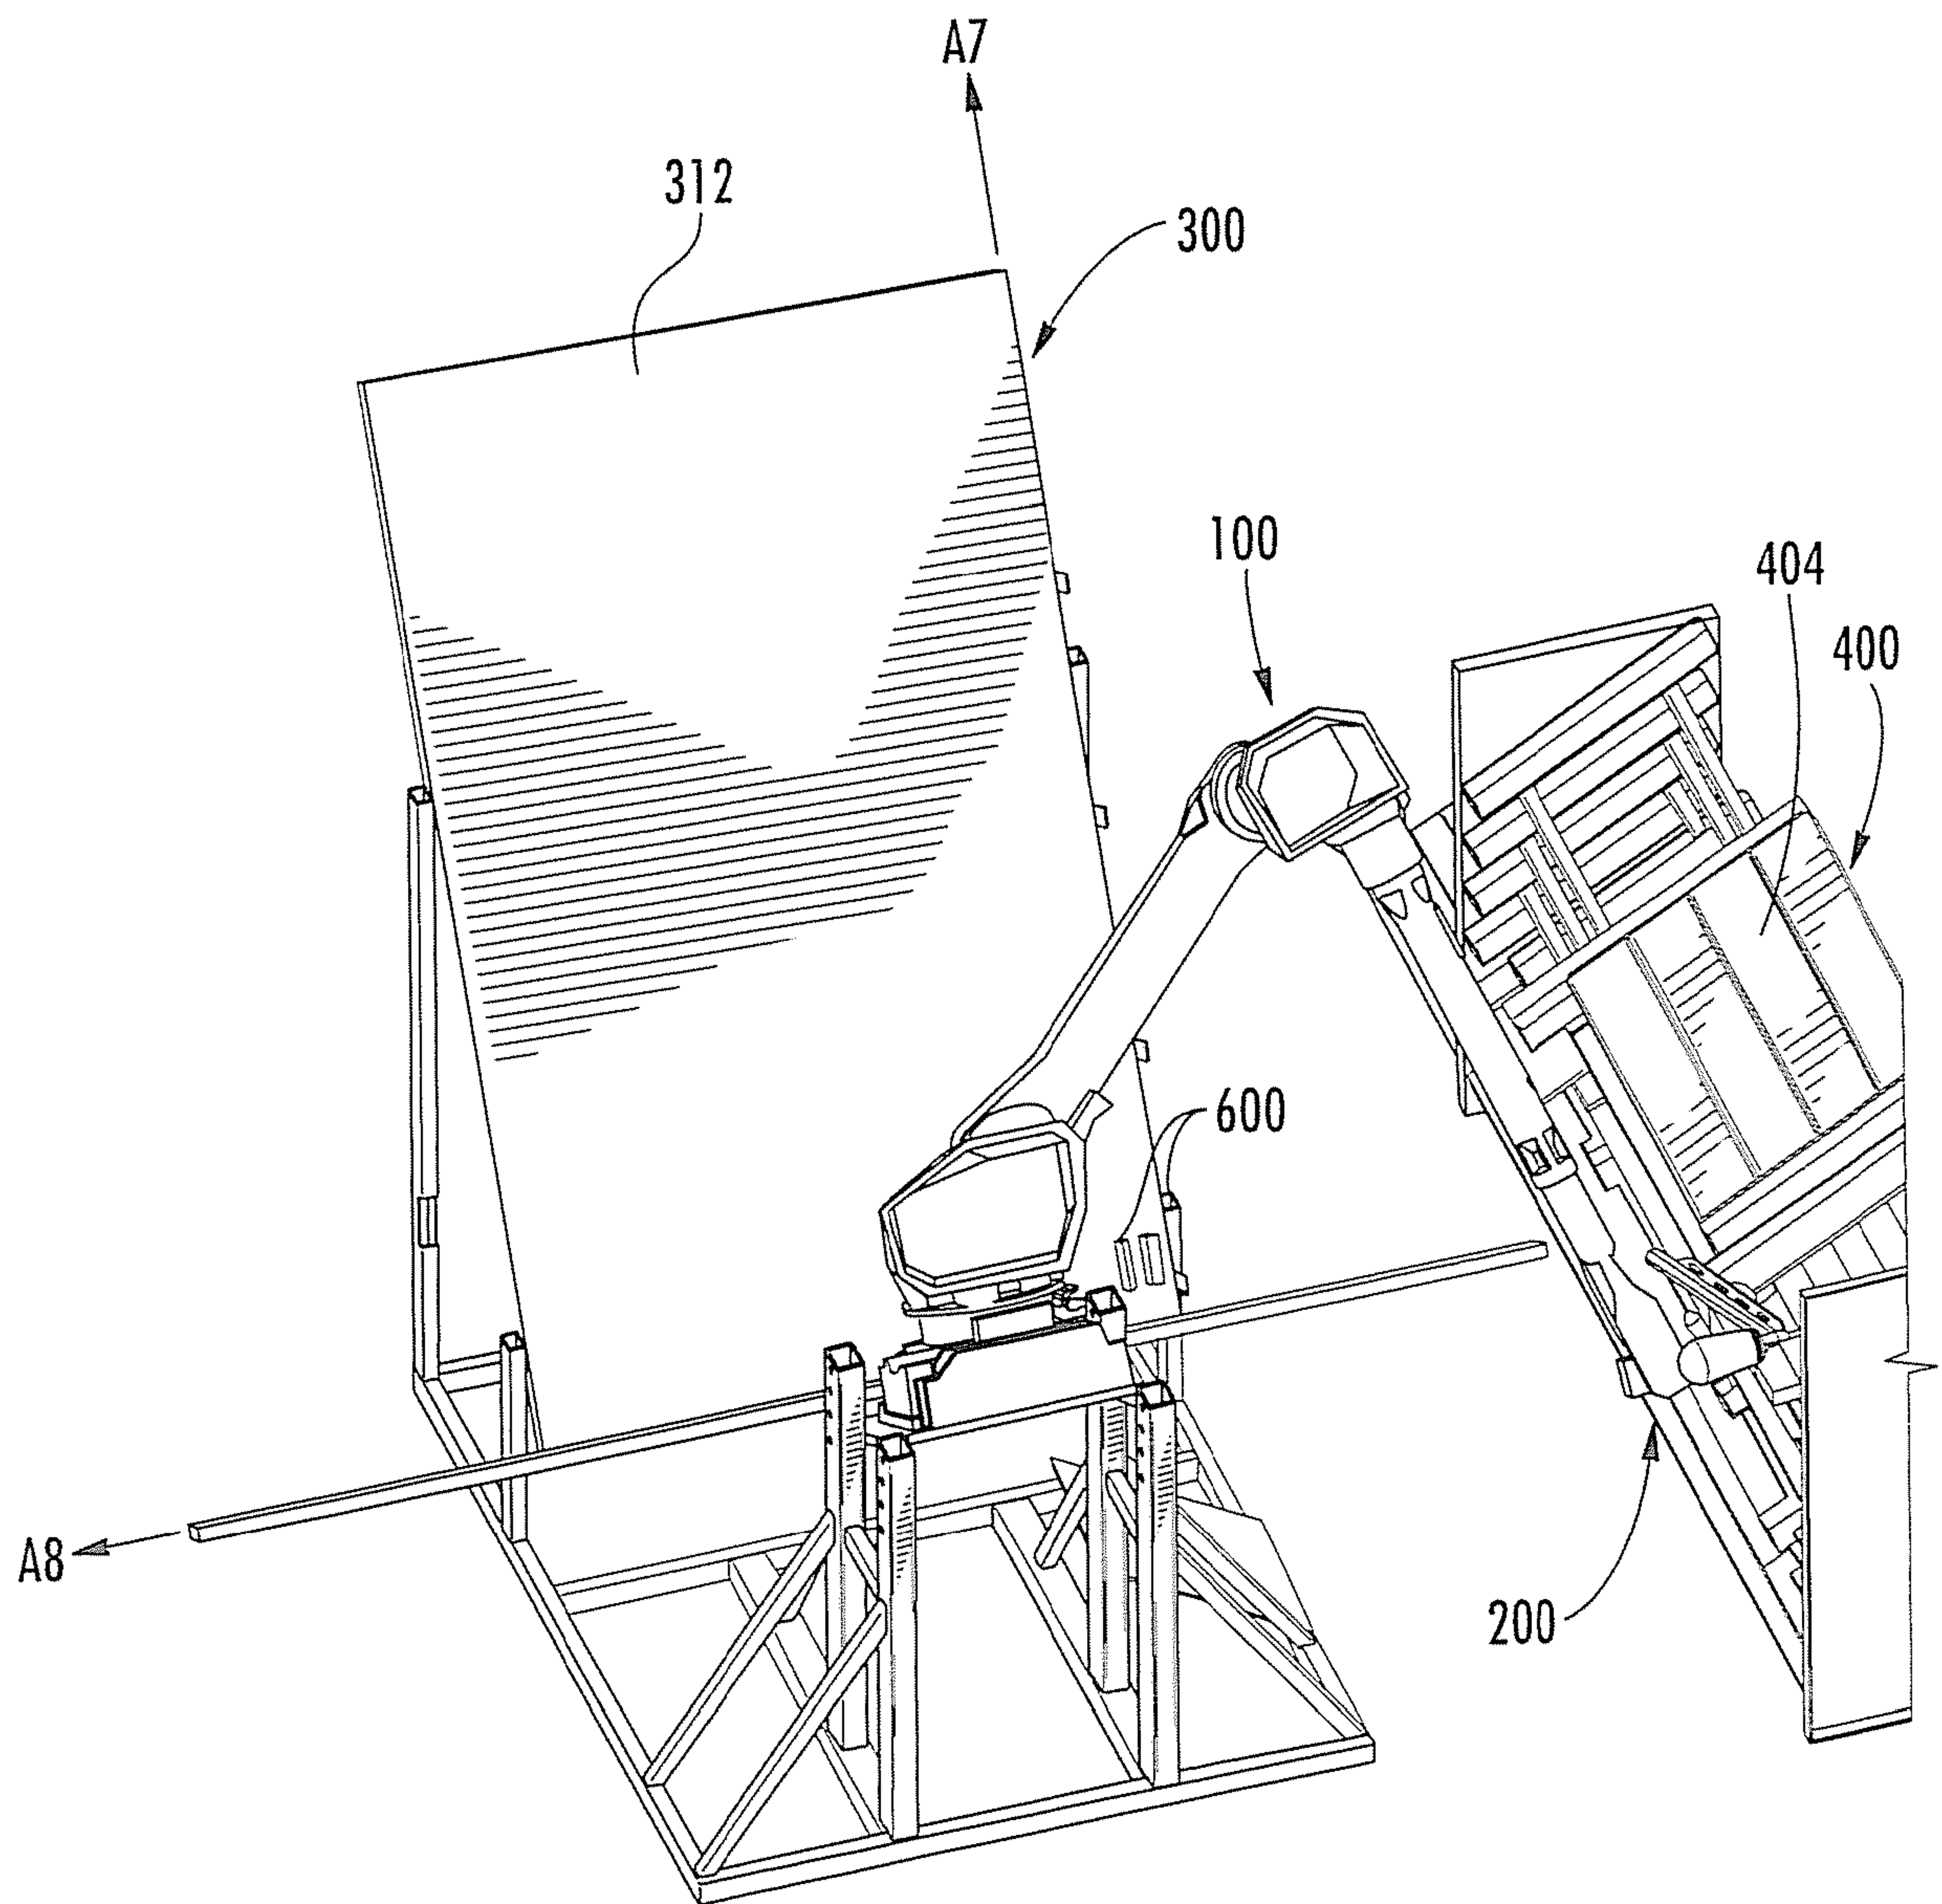


FIG. 11

11/23

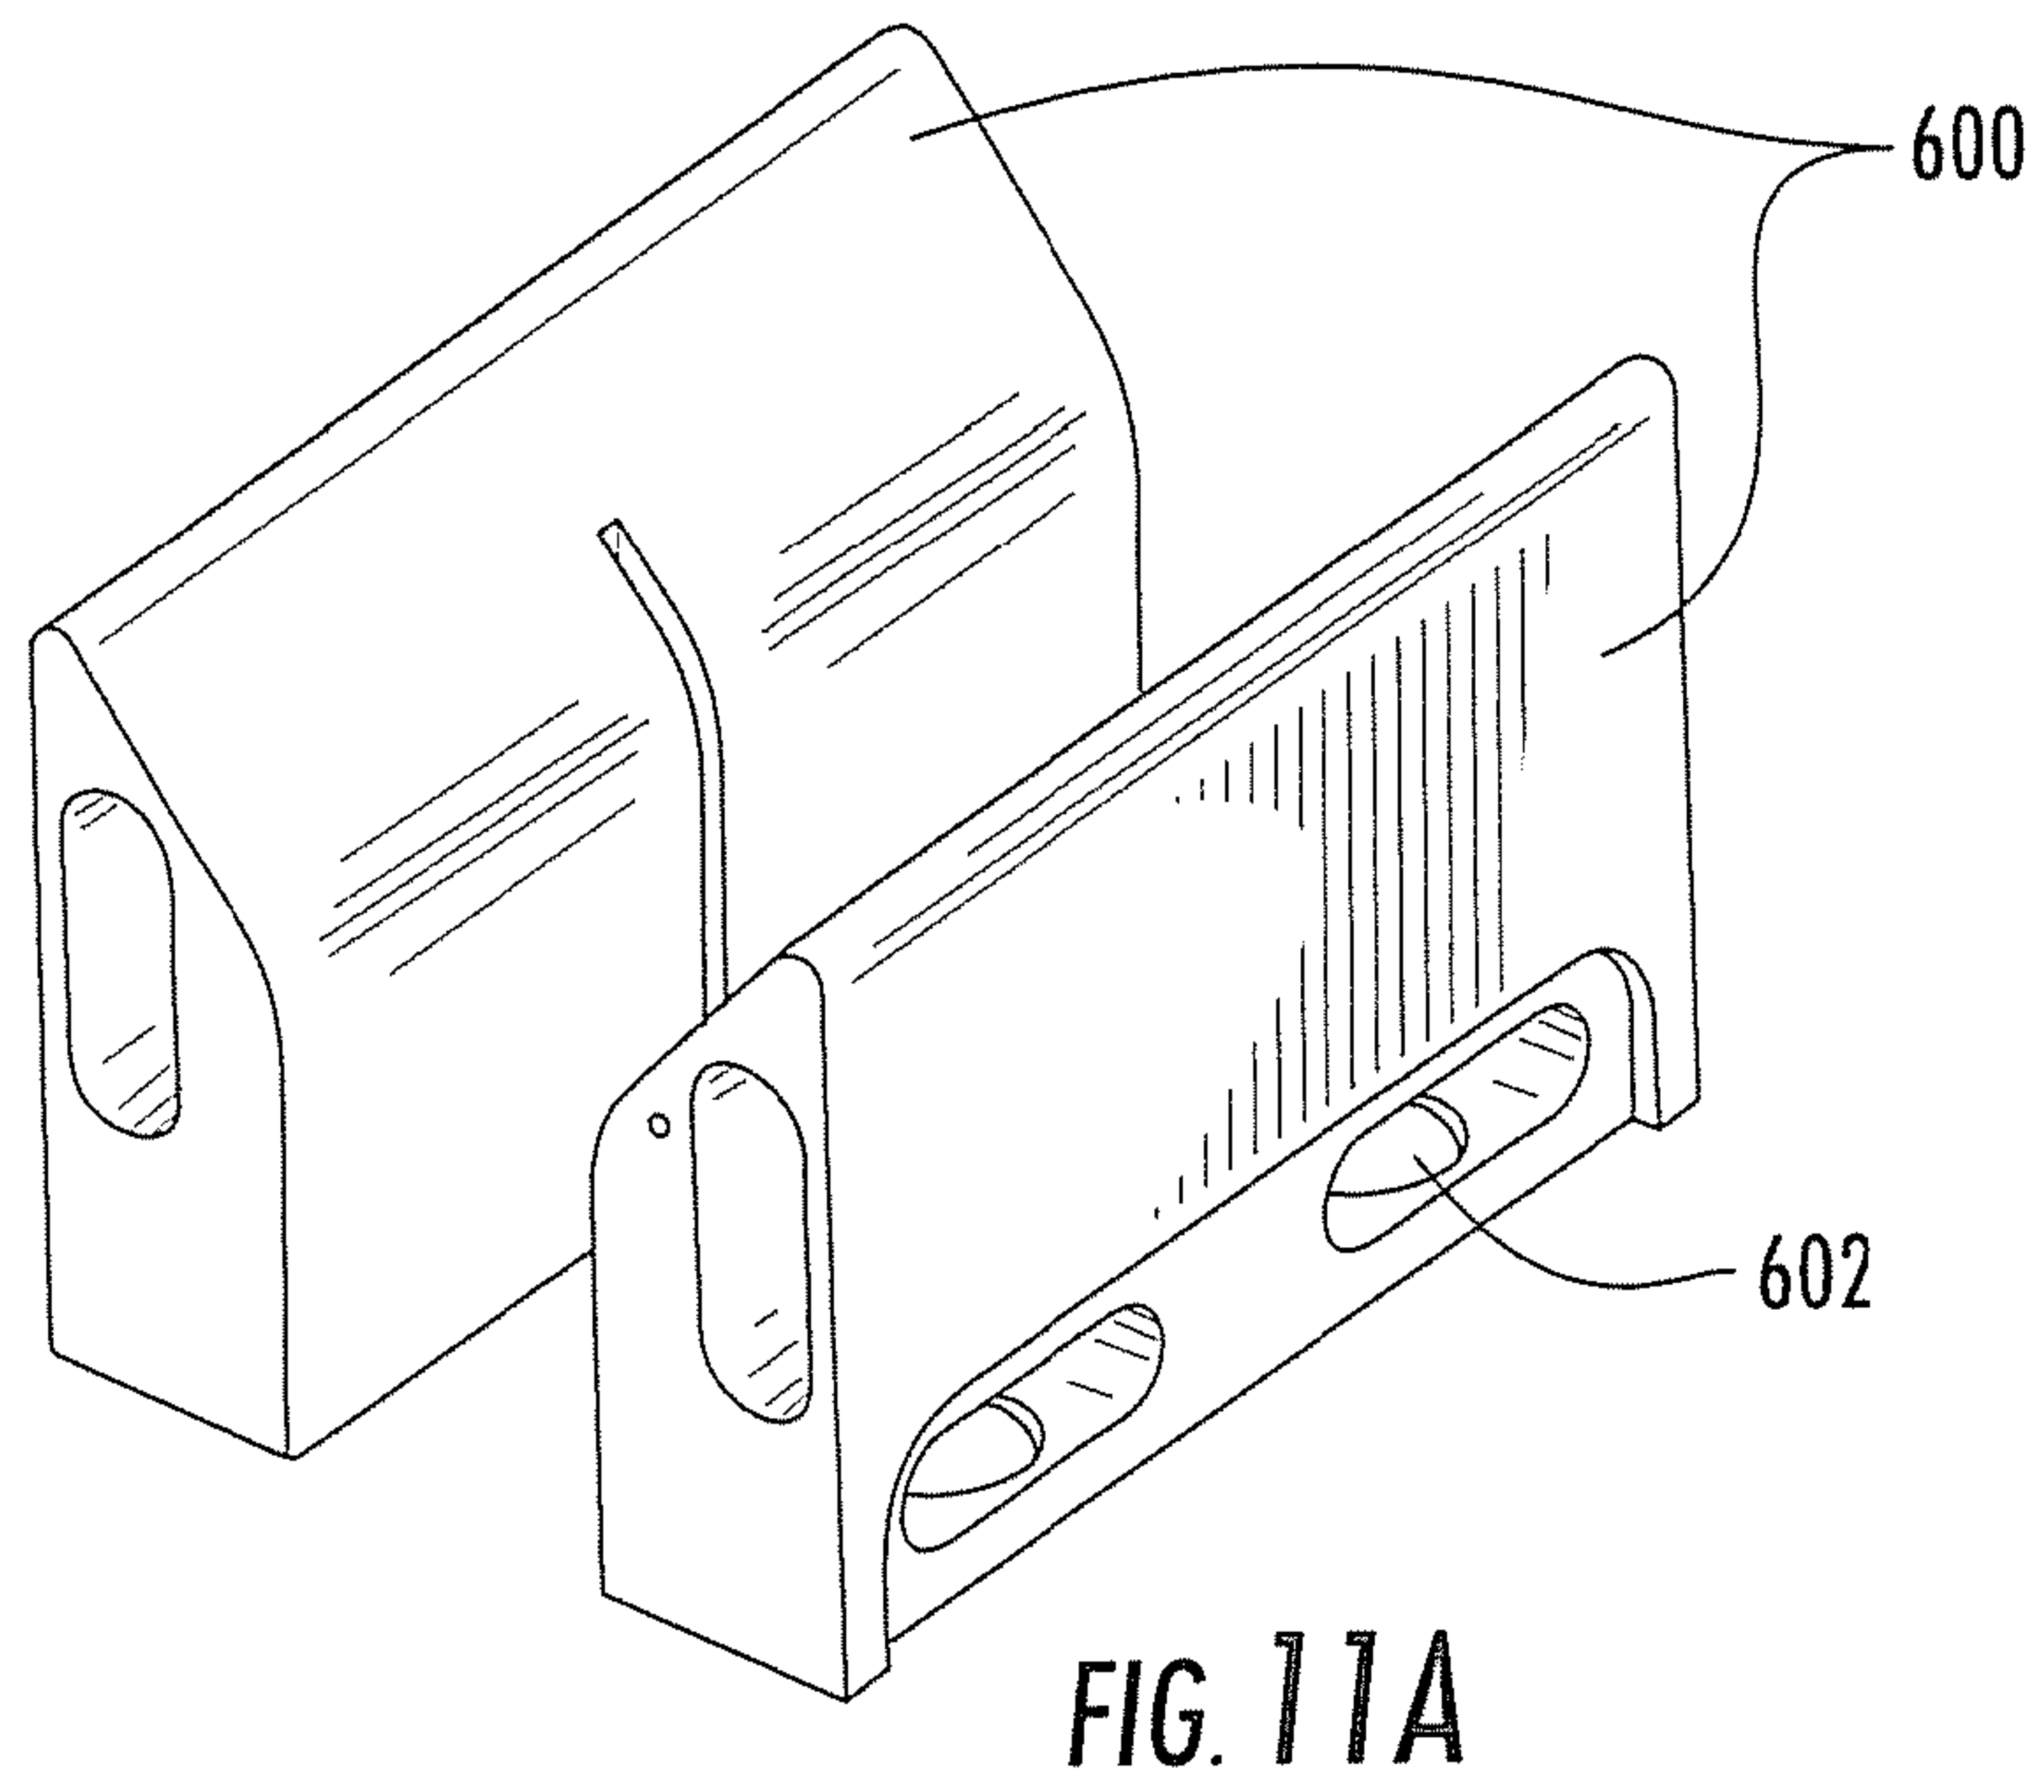

12/23

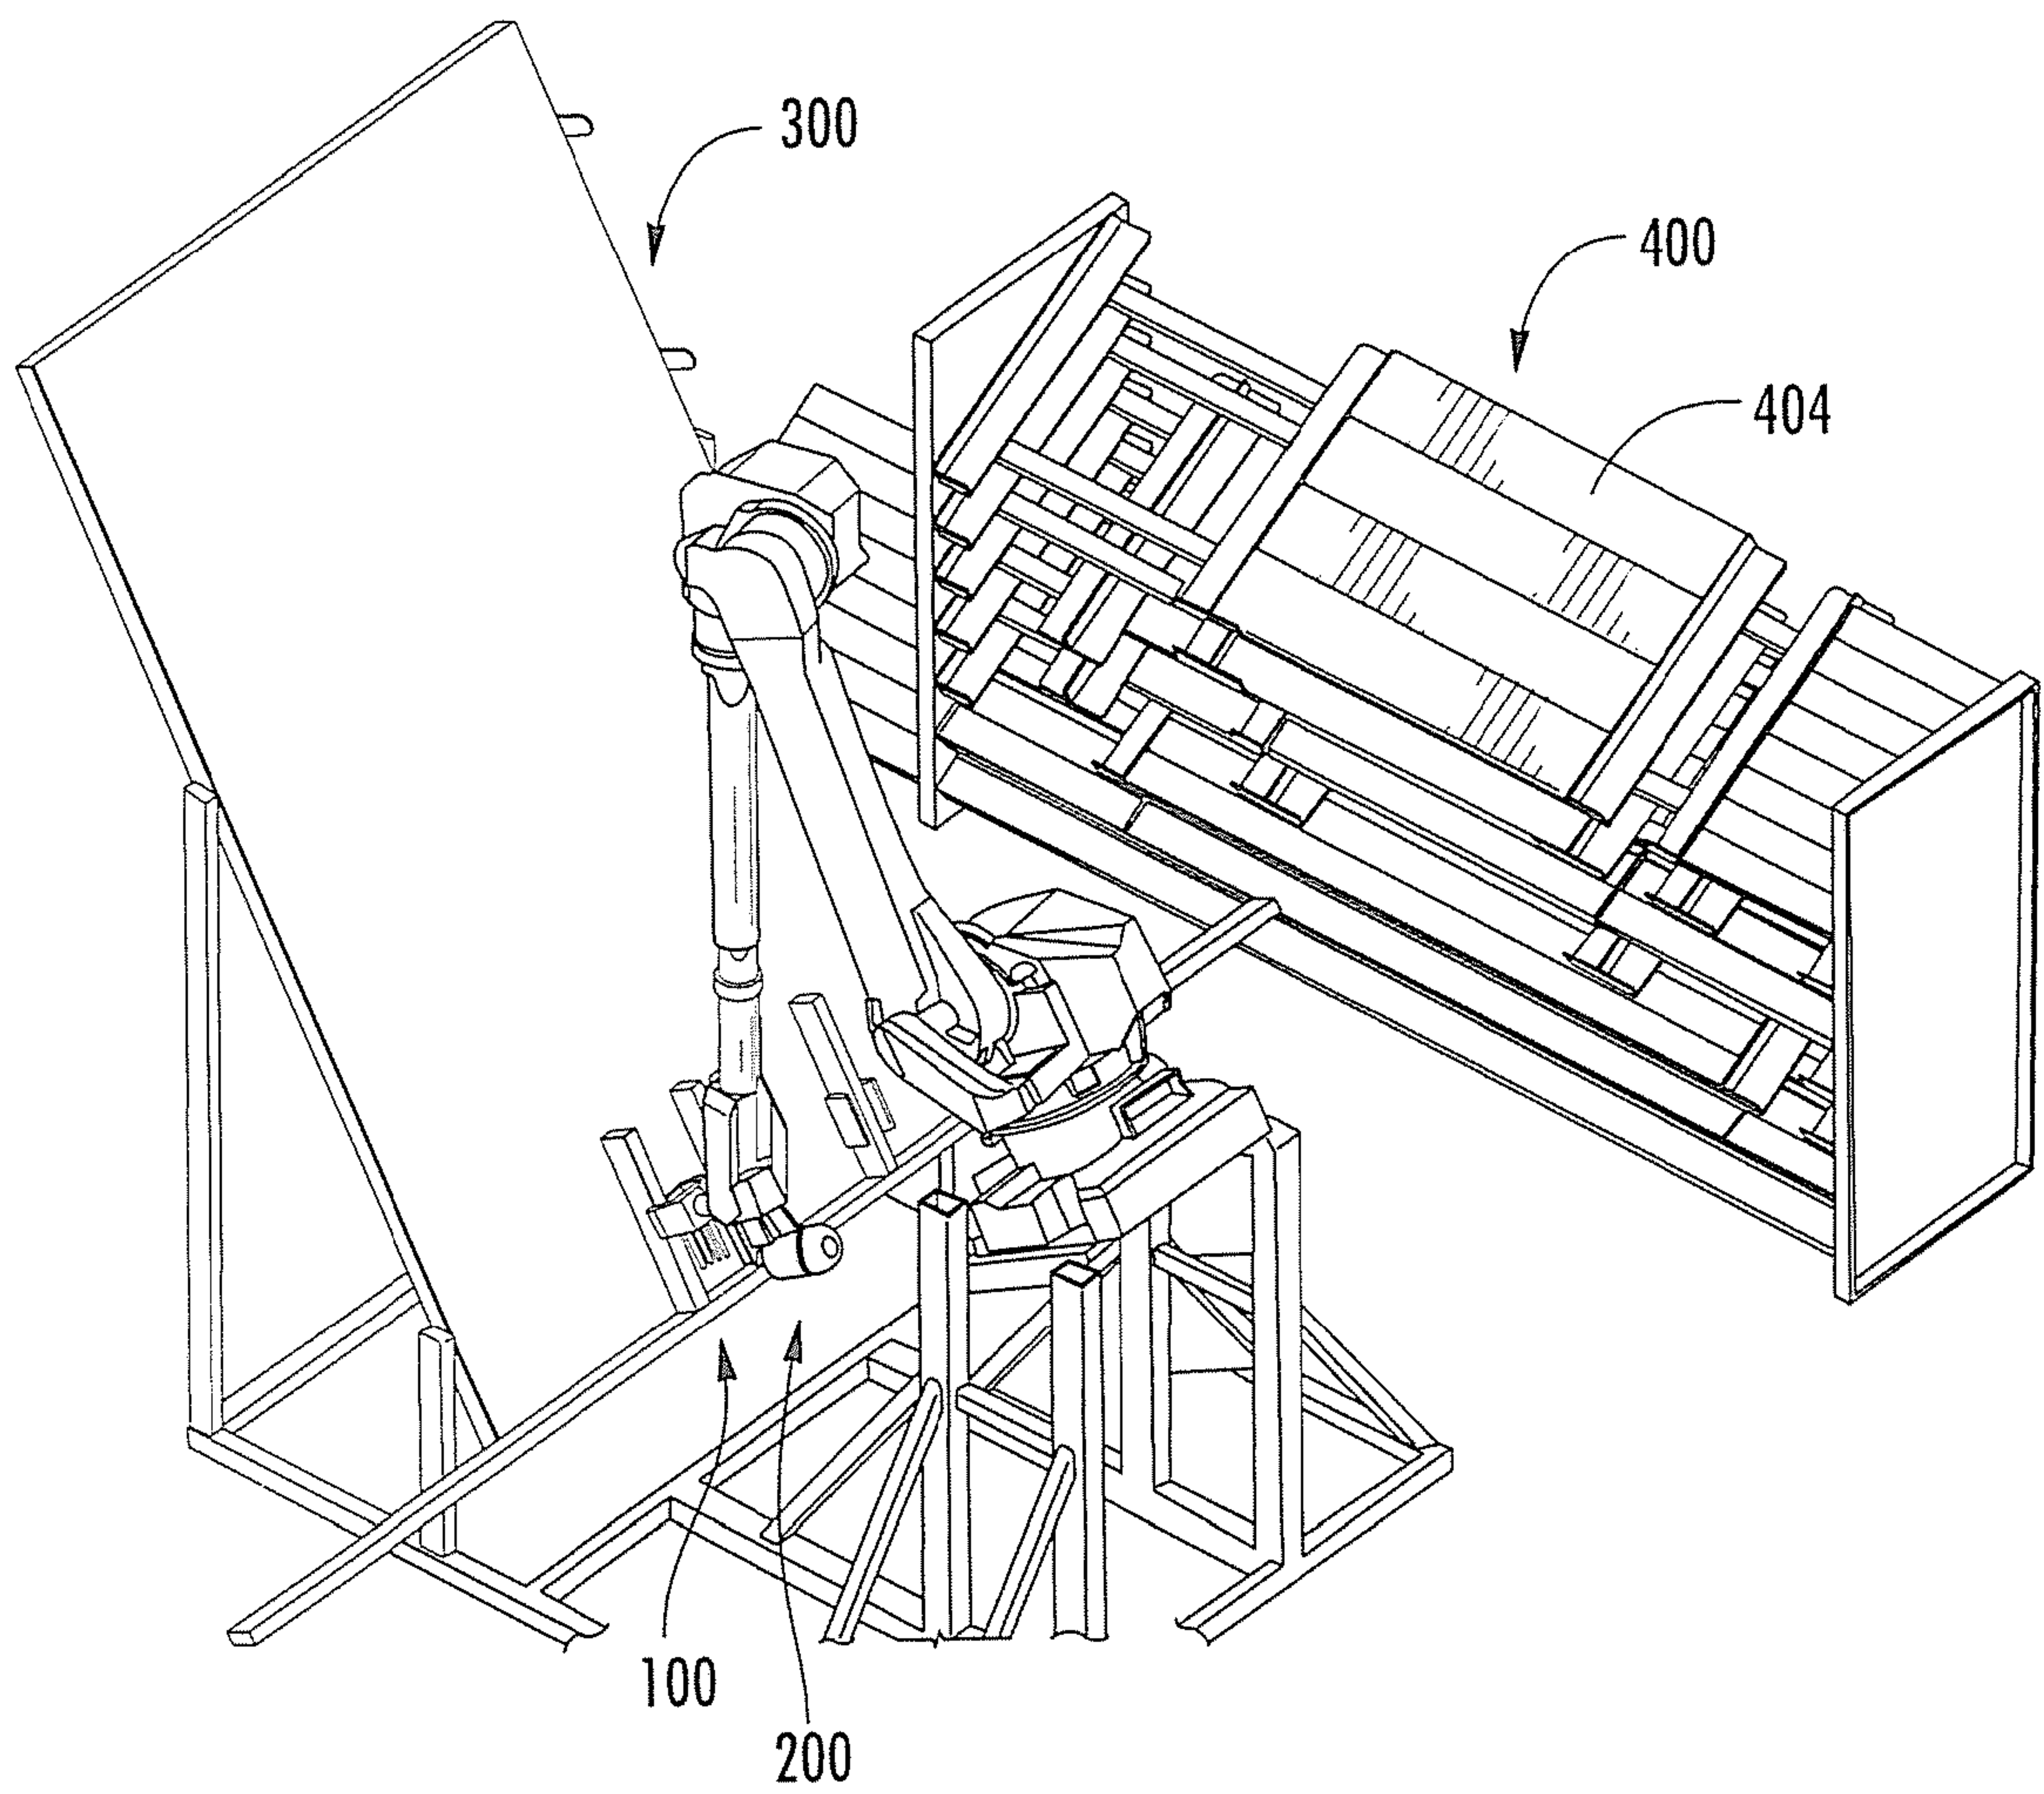


FIG. 12

13/23


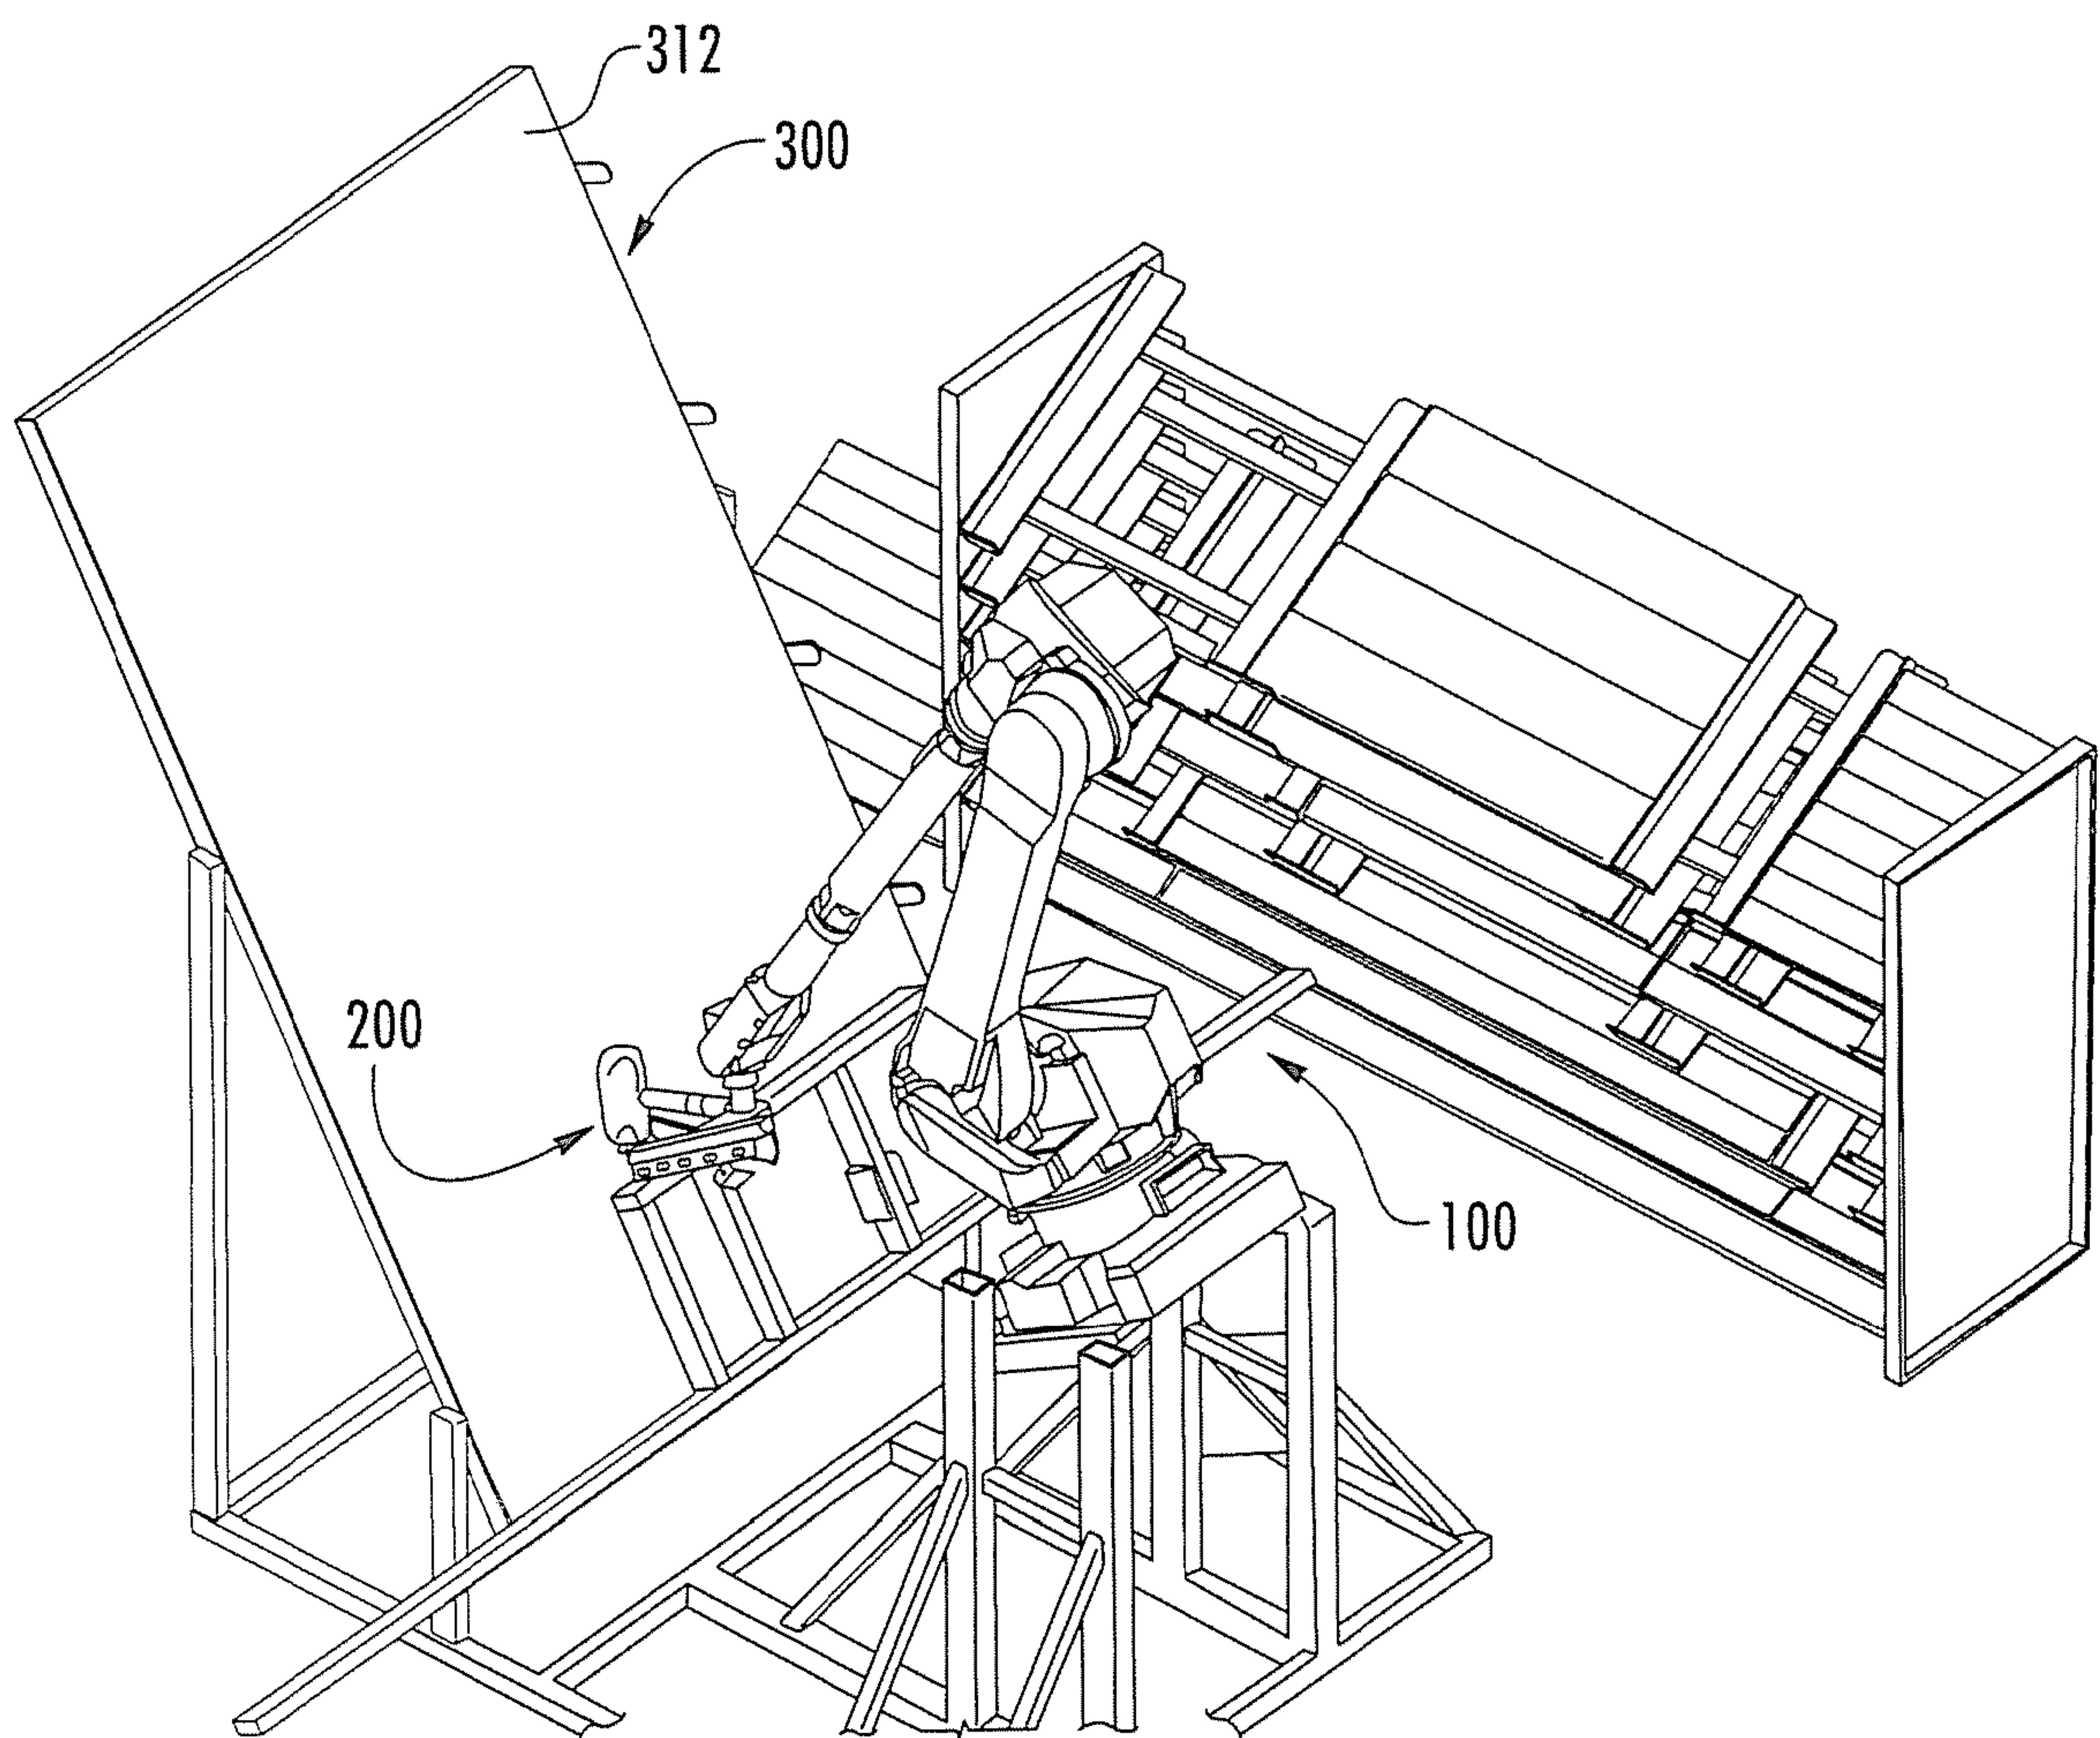


FIG. 13

14/23

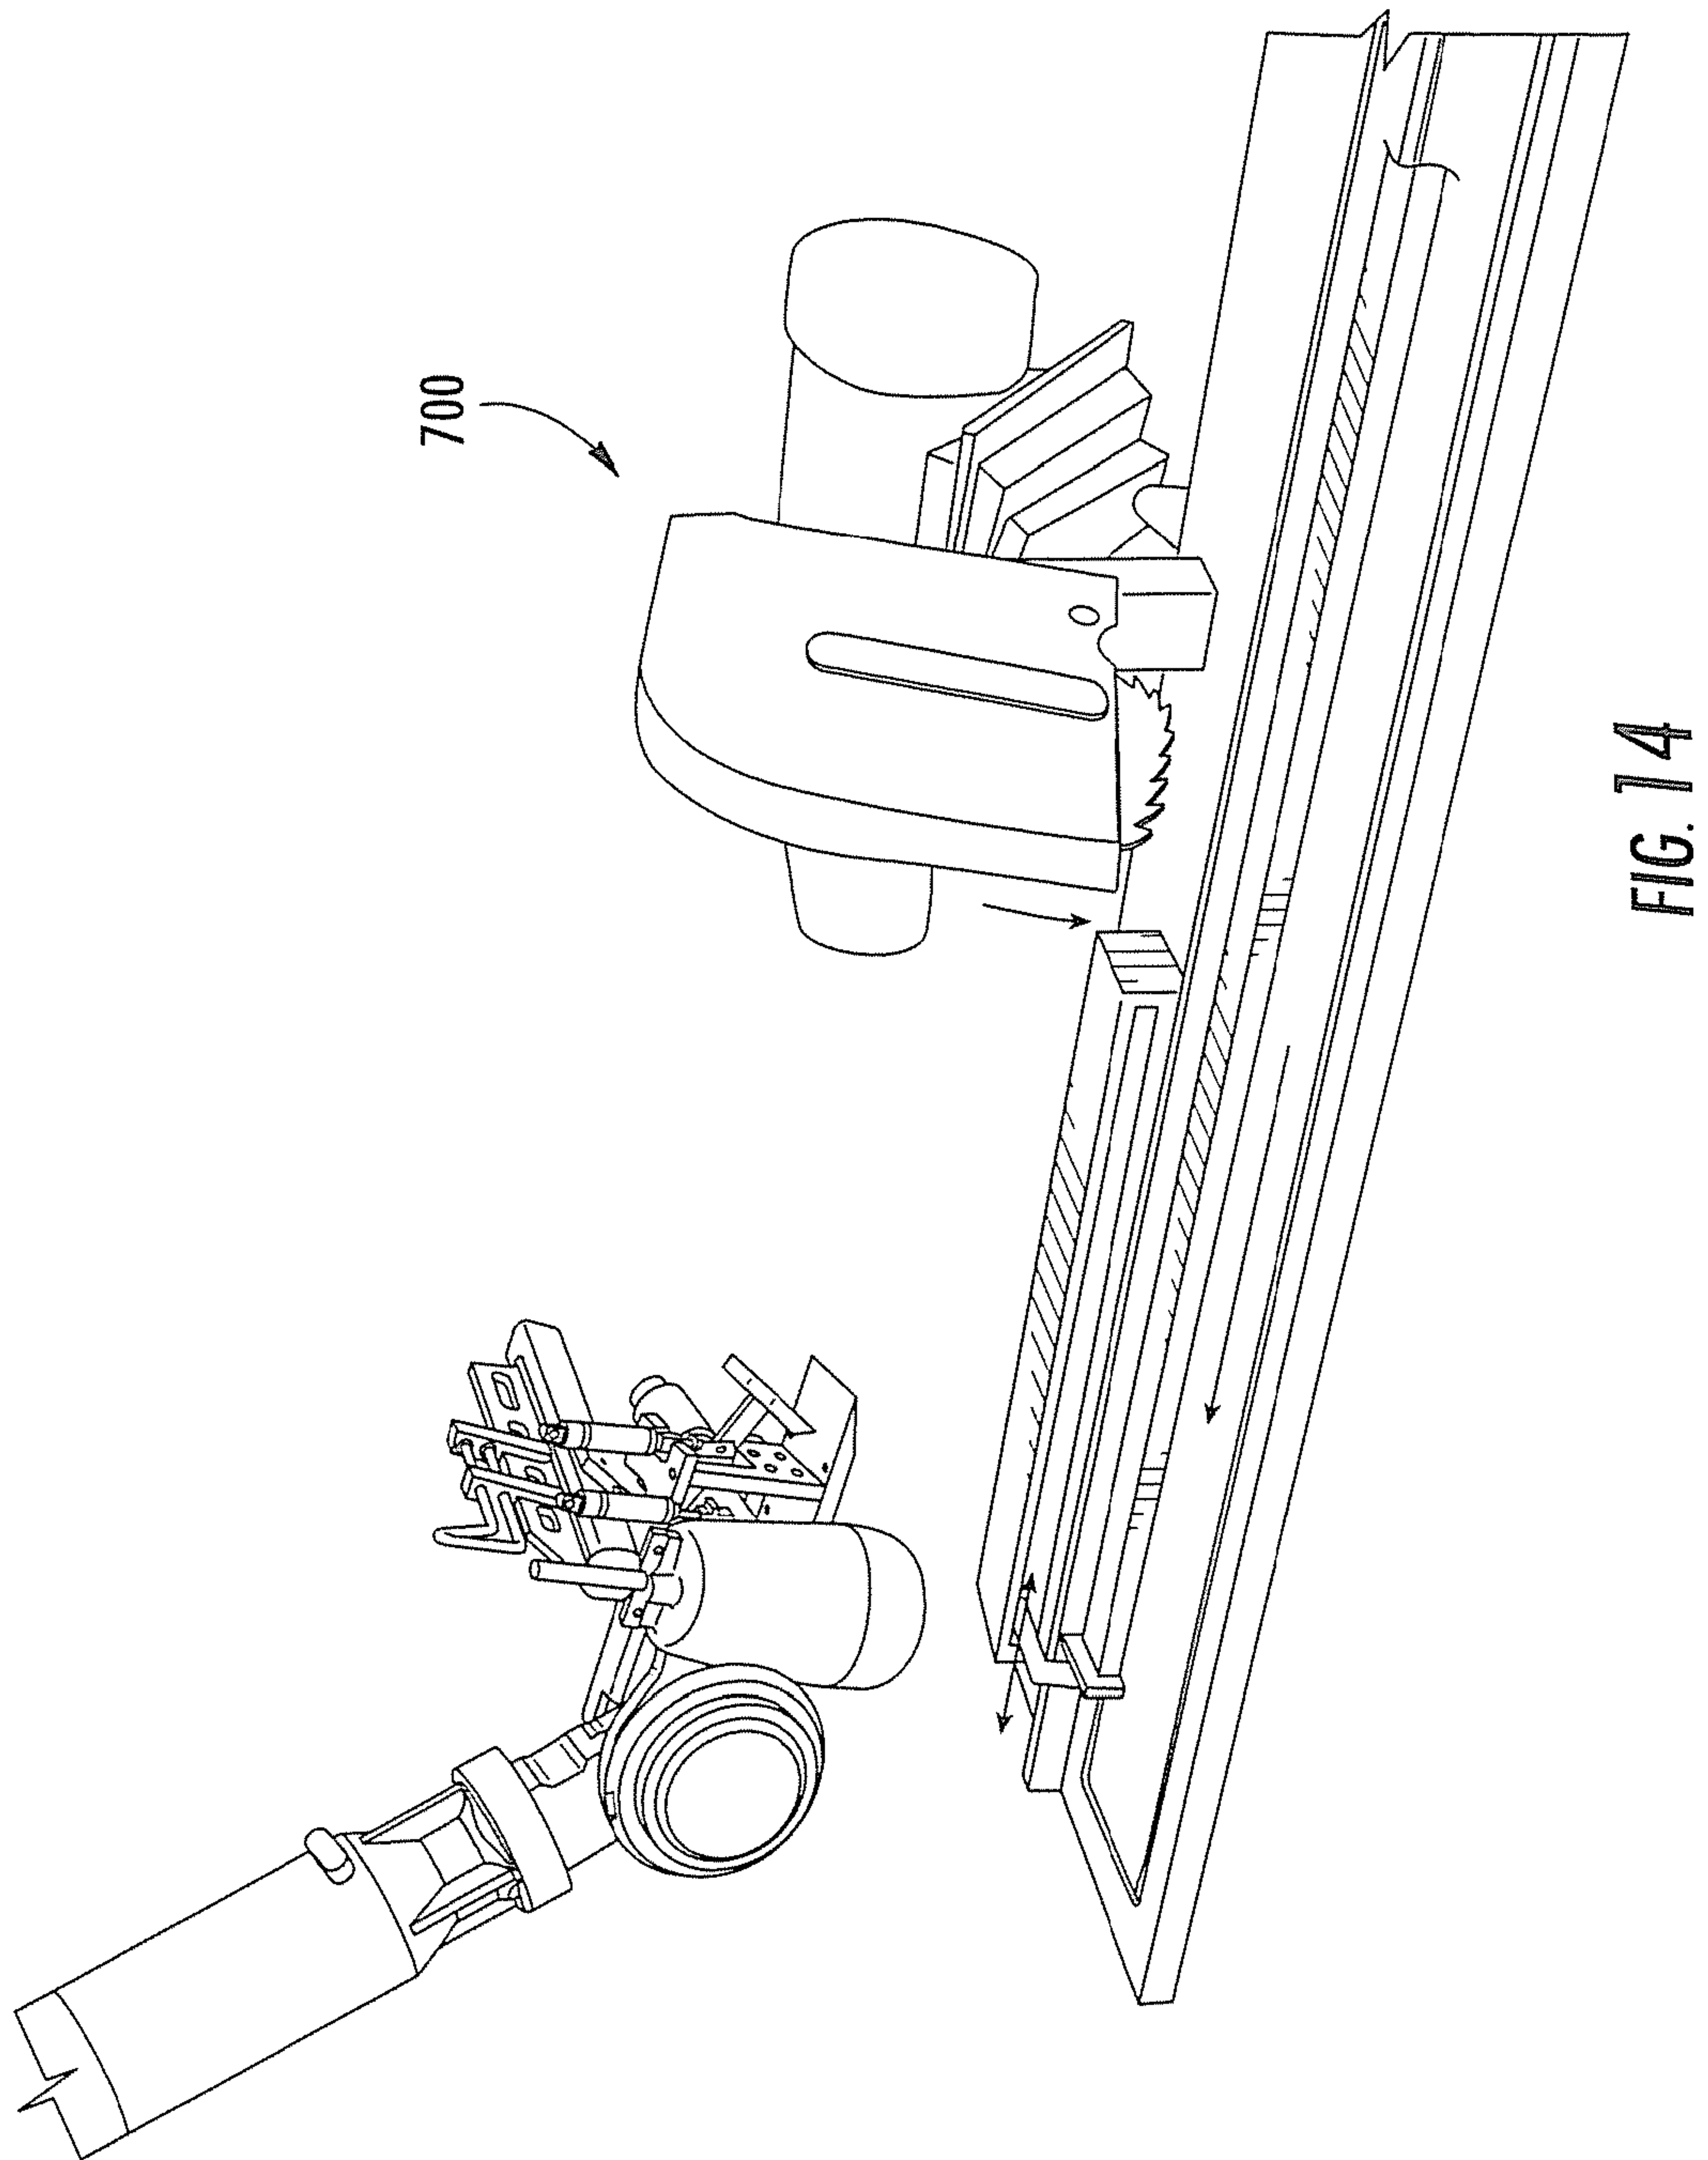

15/23

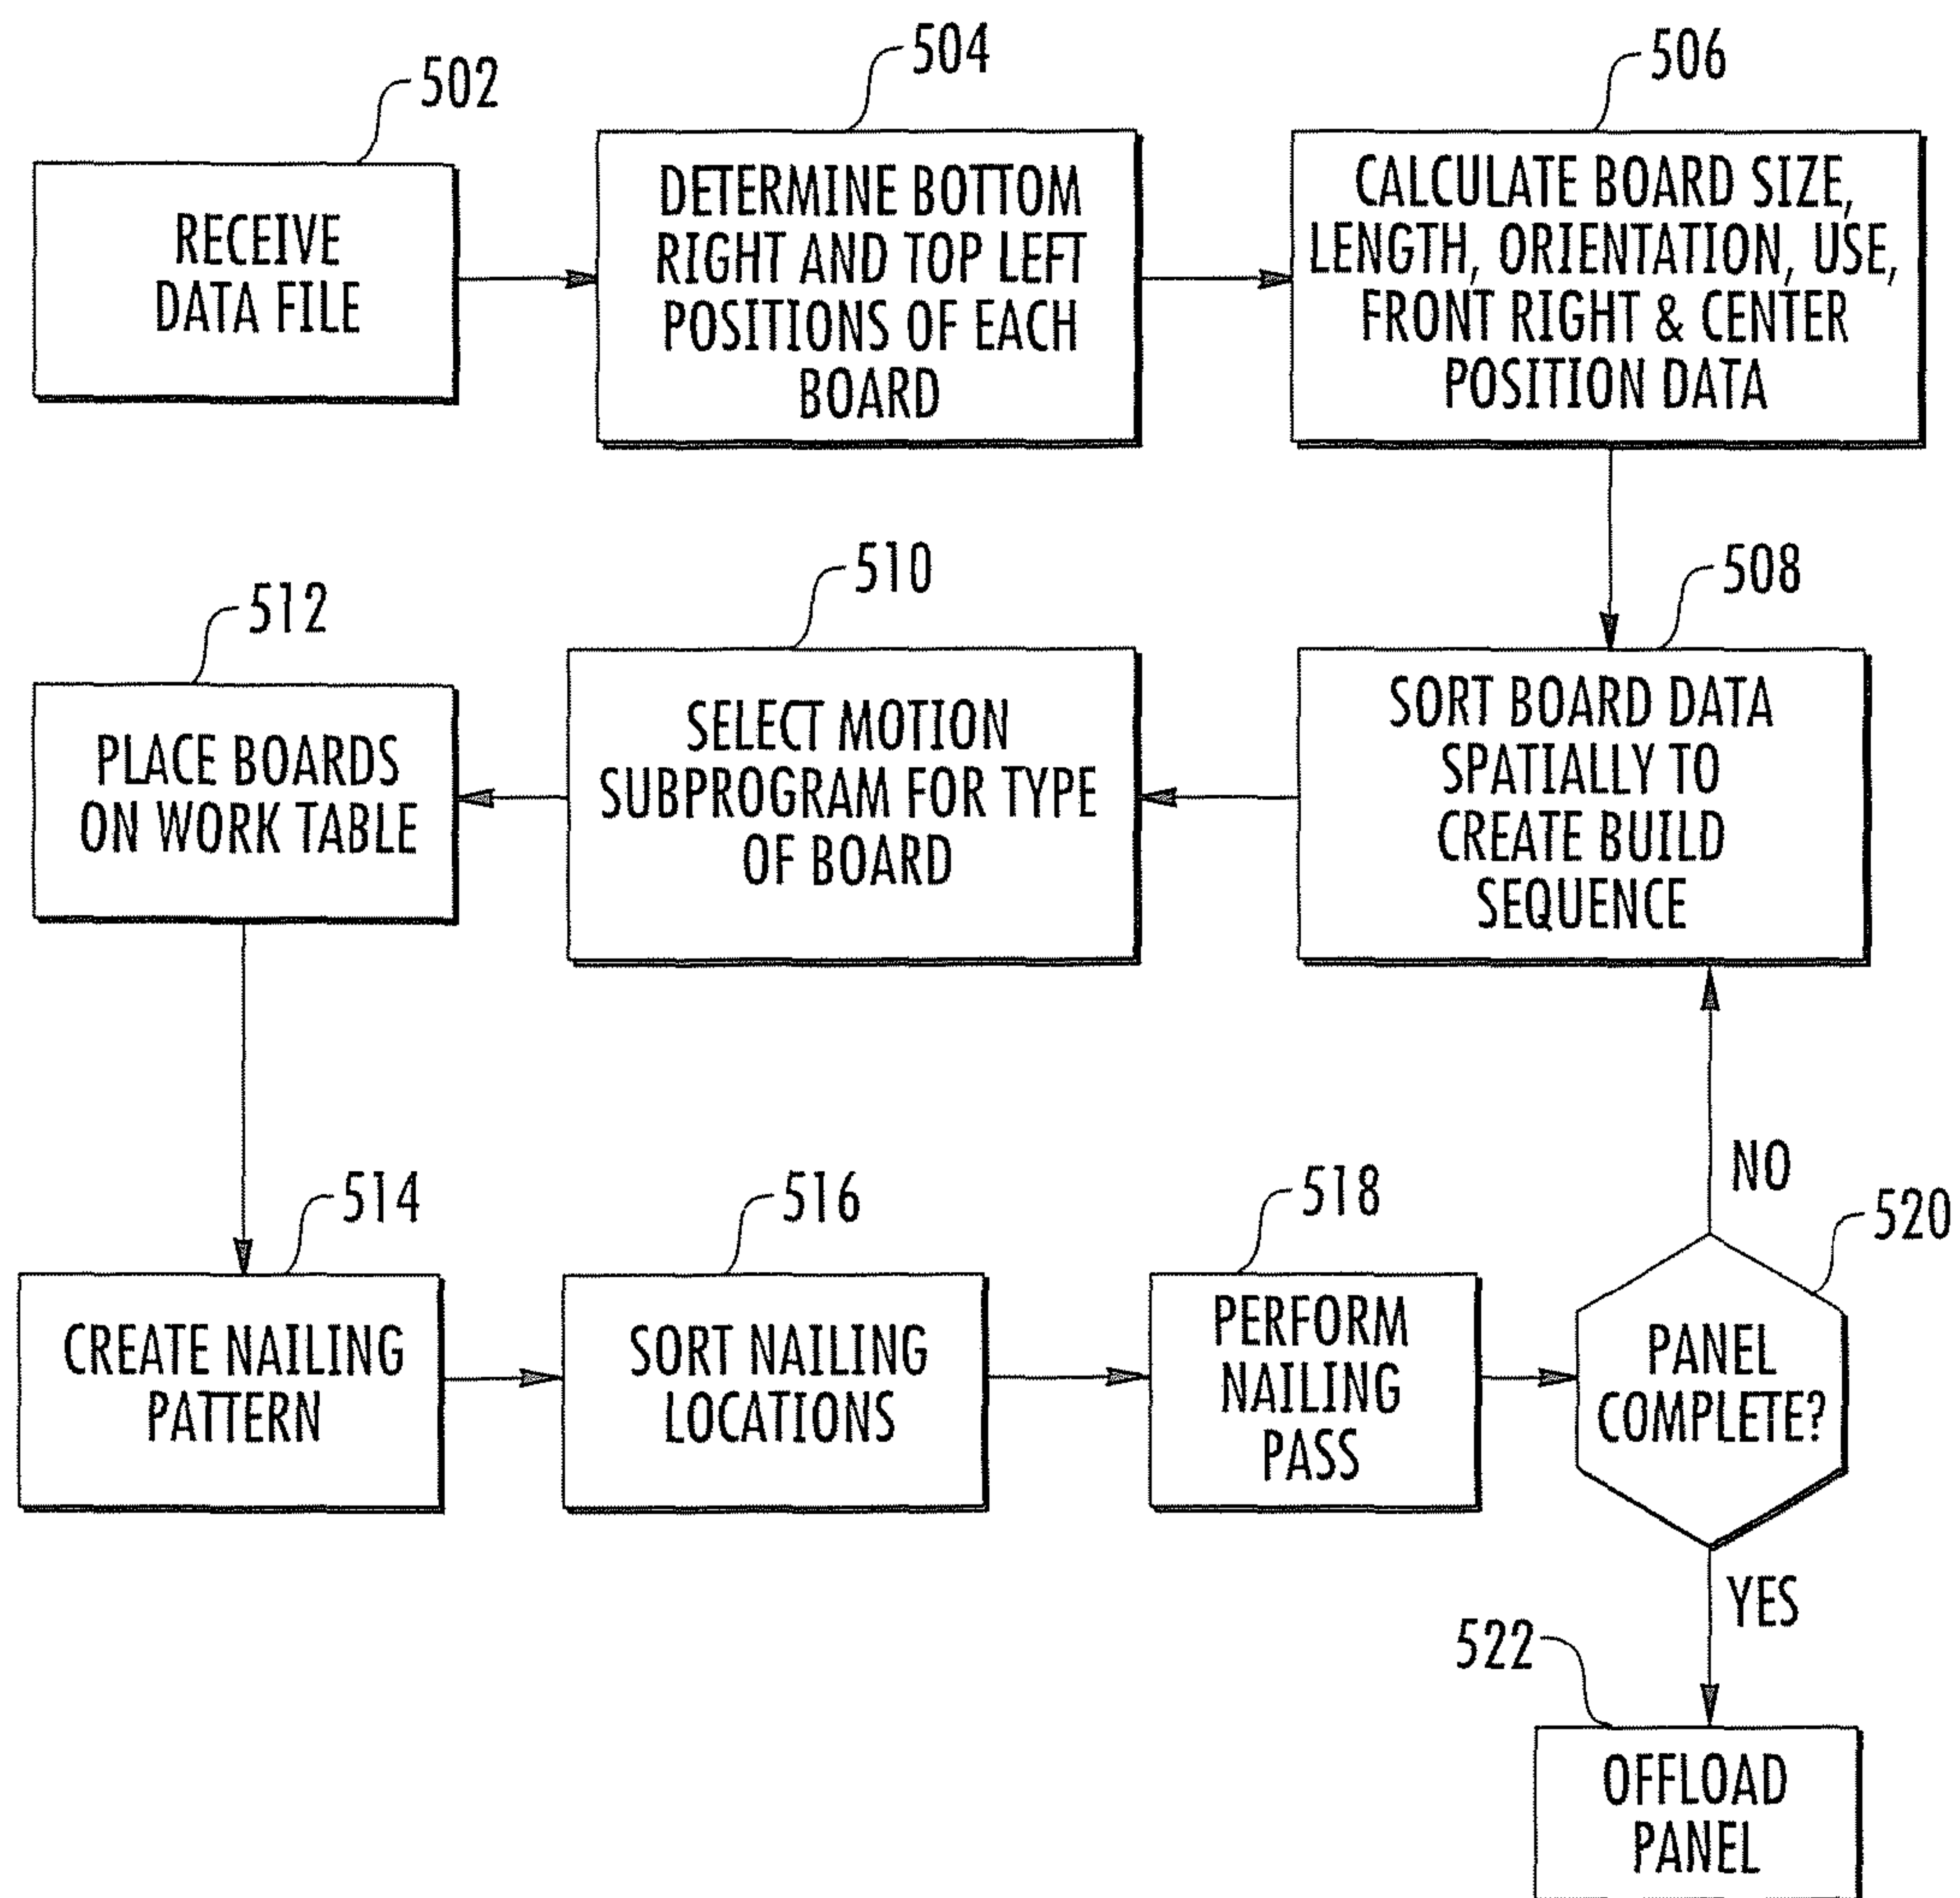


FIG. 15

16/23

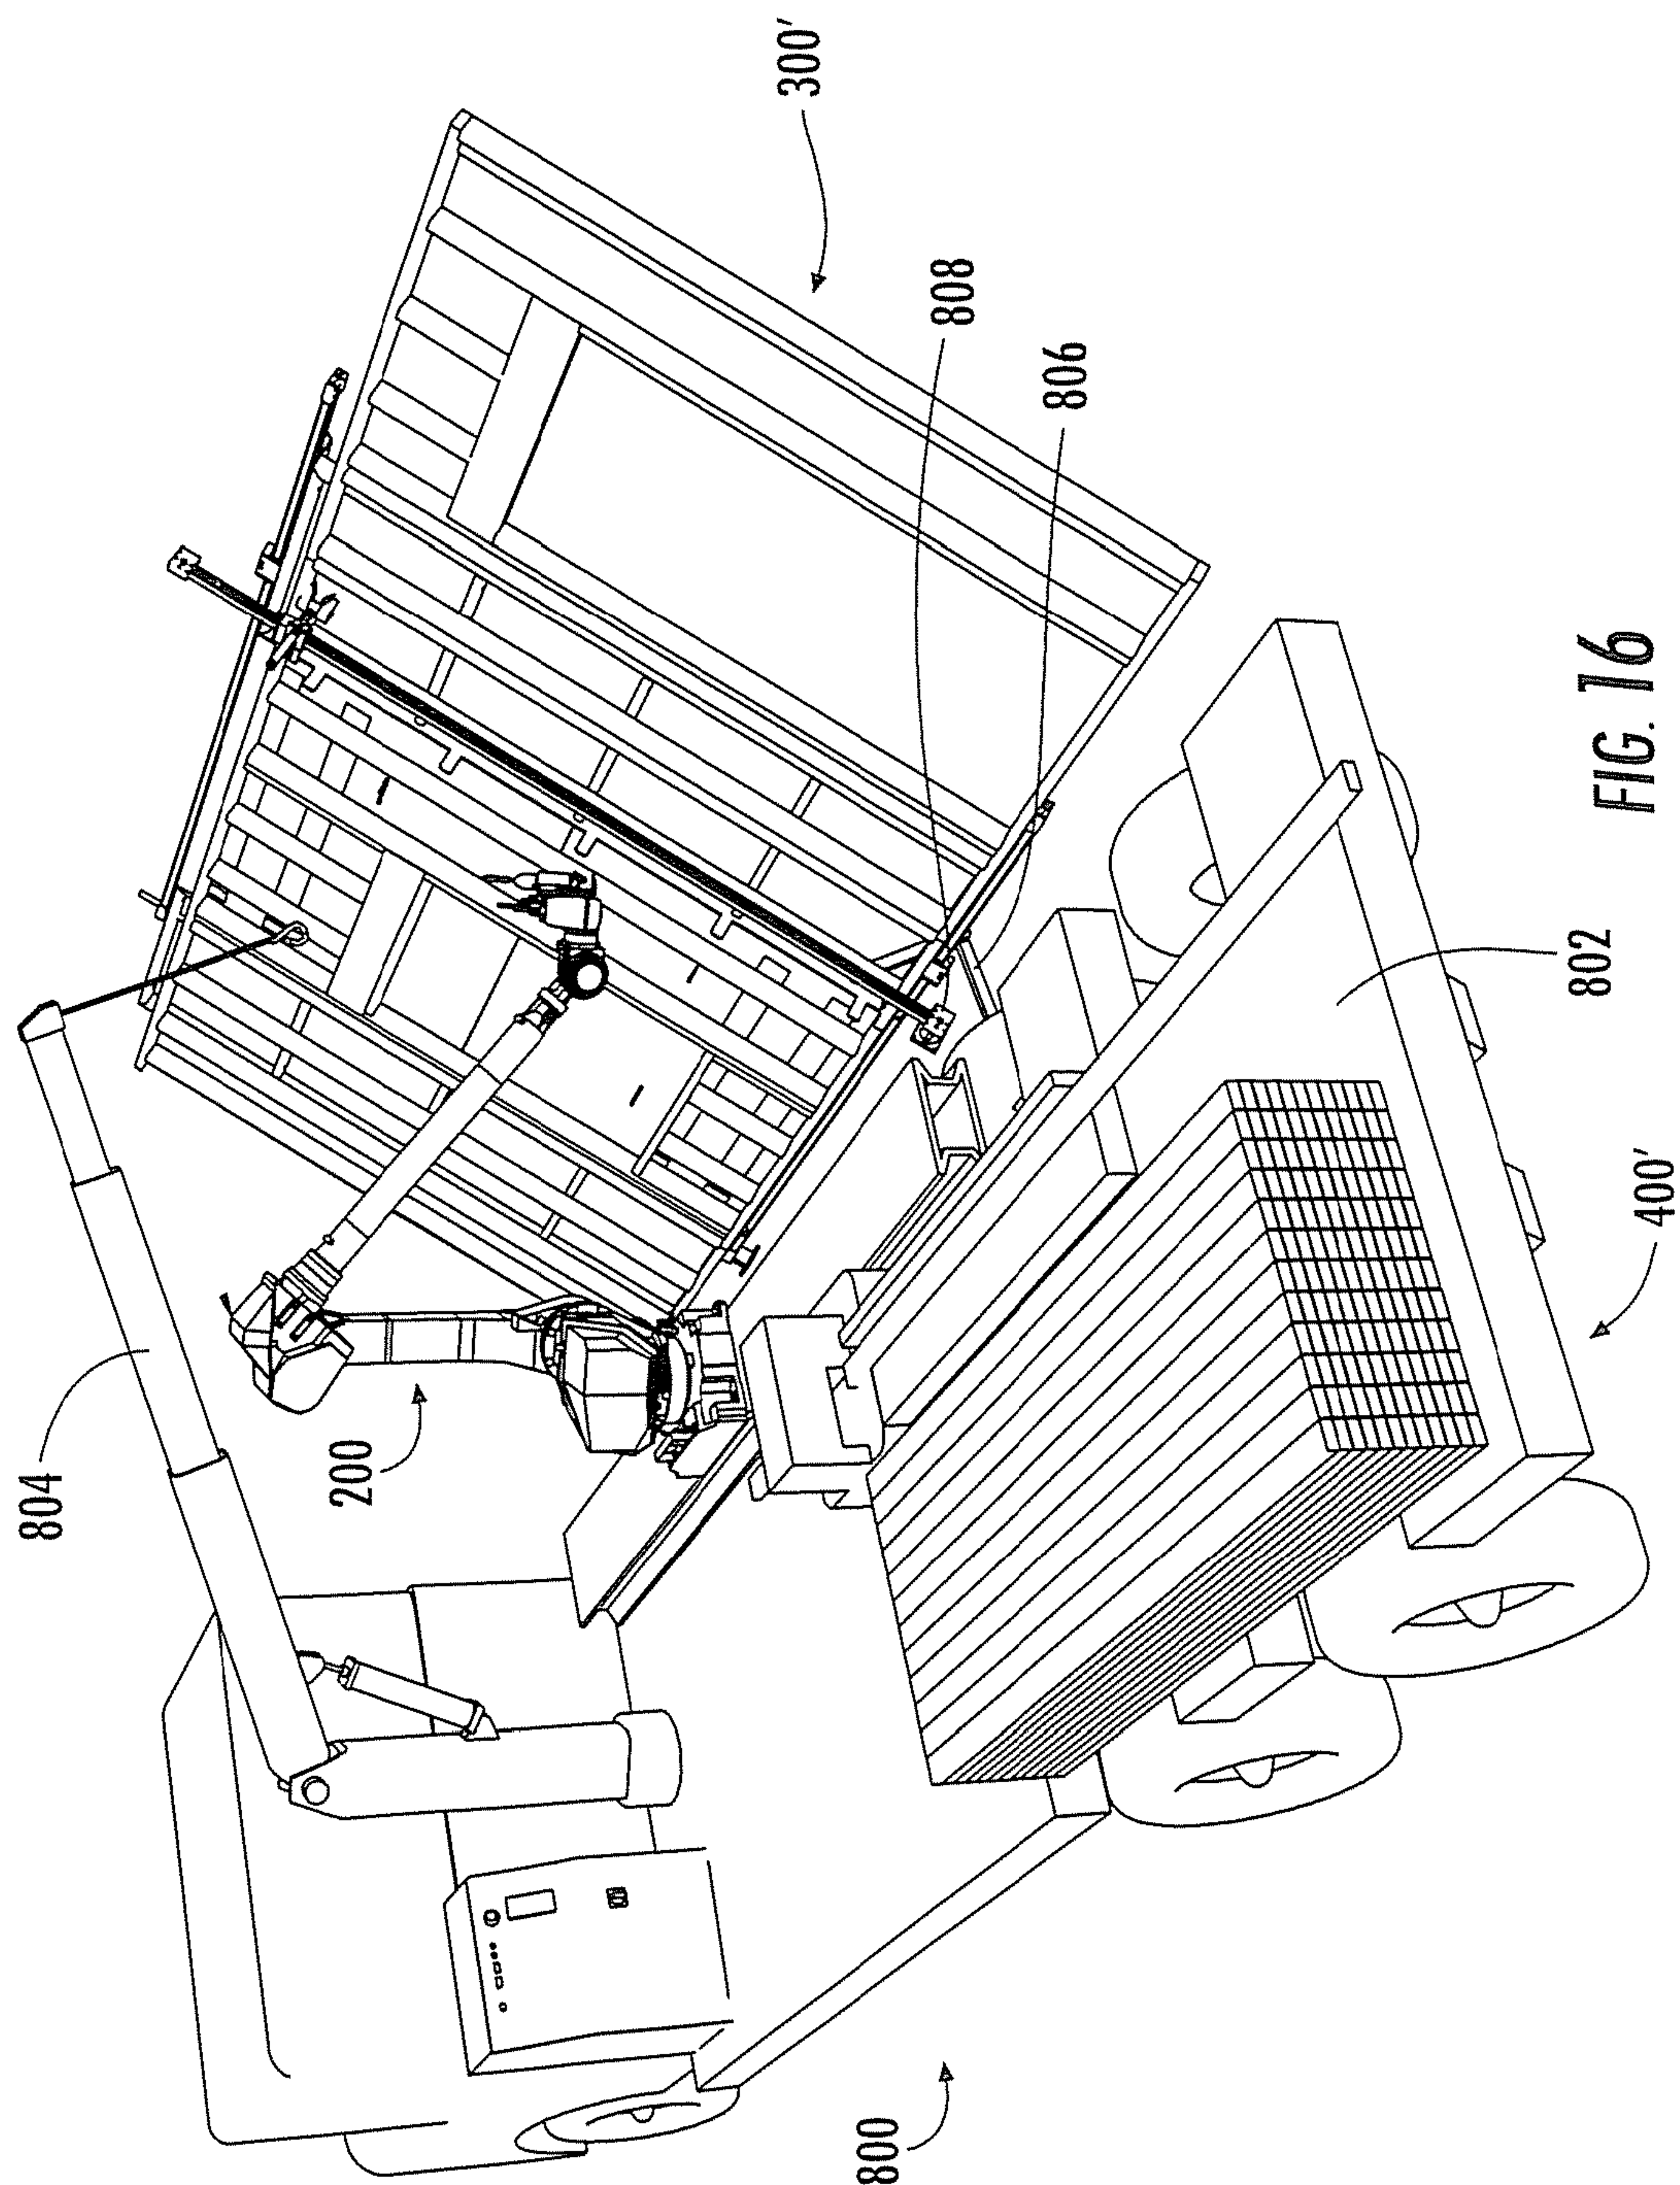


FIG. 16

17/23



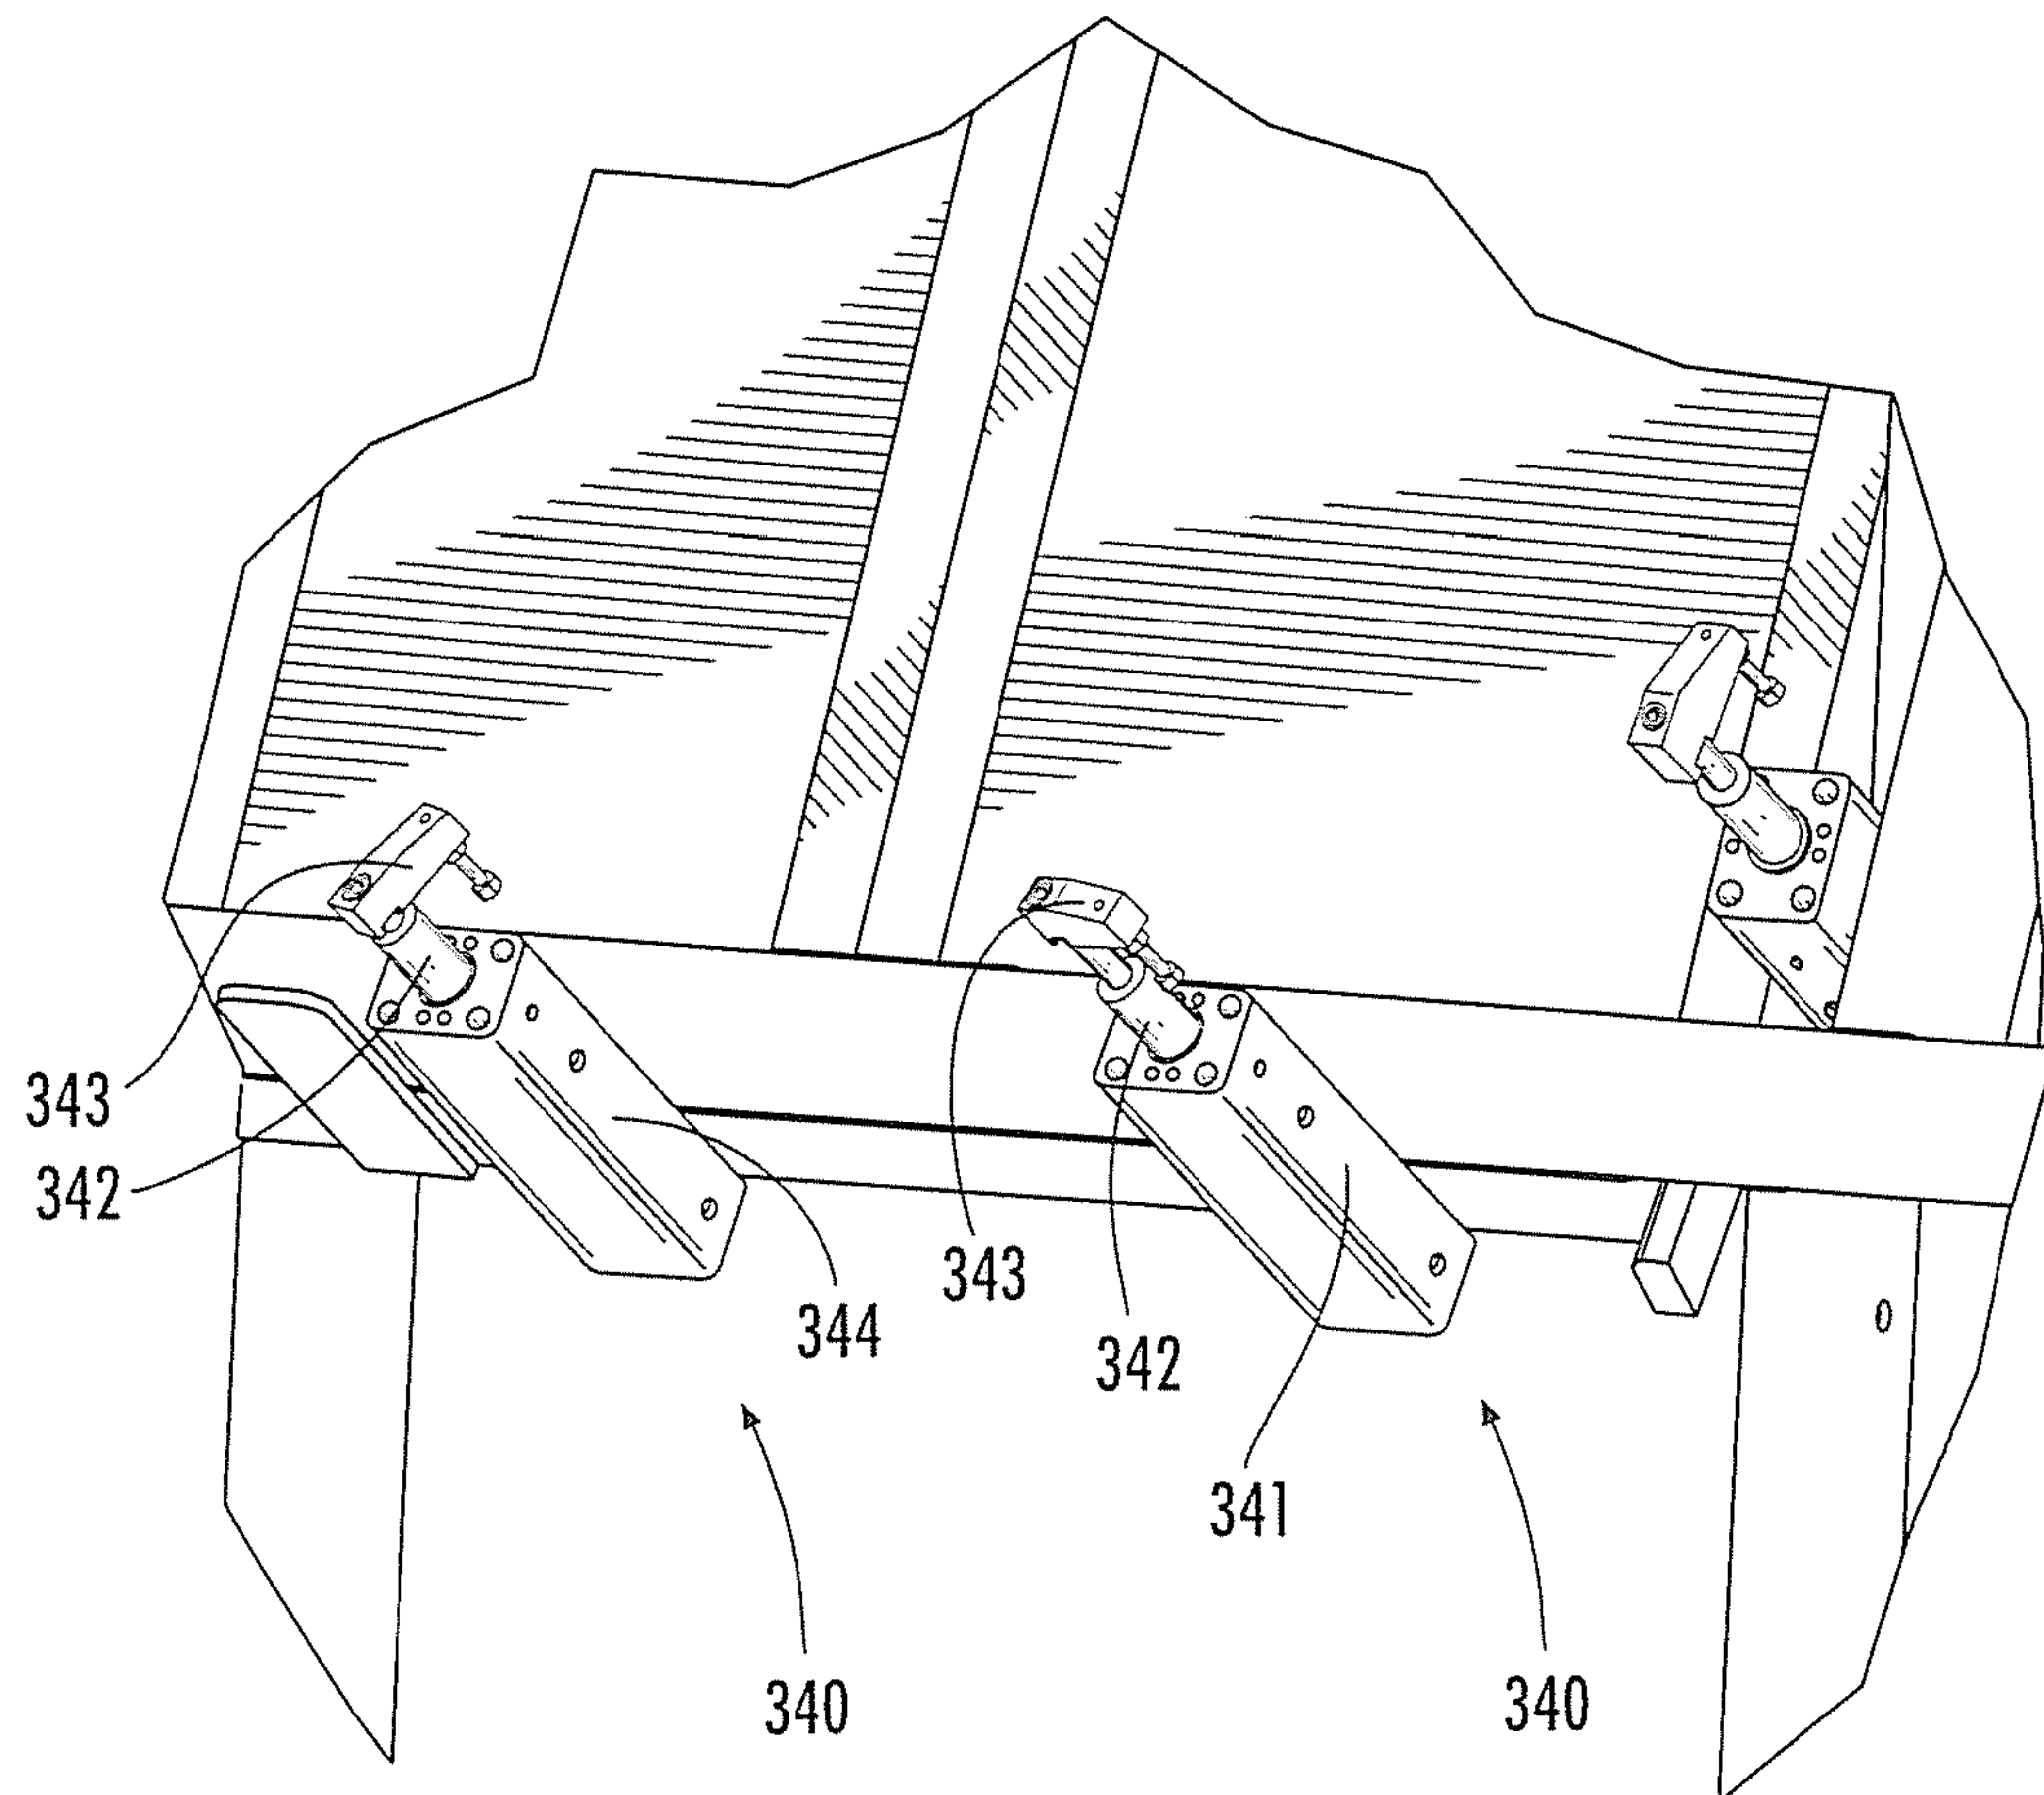


FIG. 17

18/23

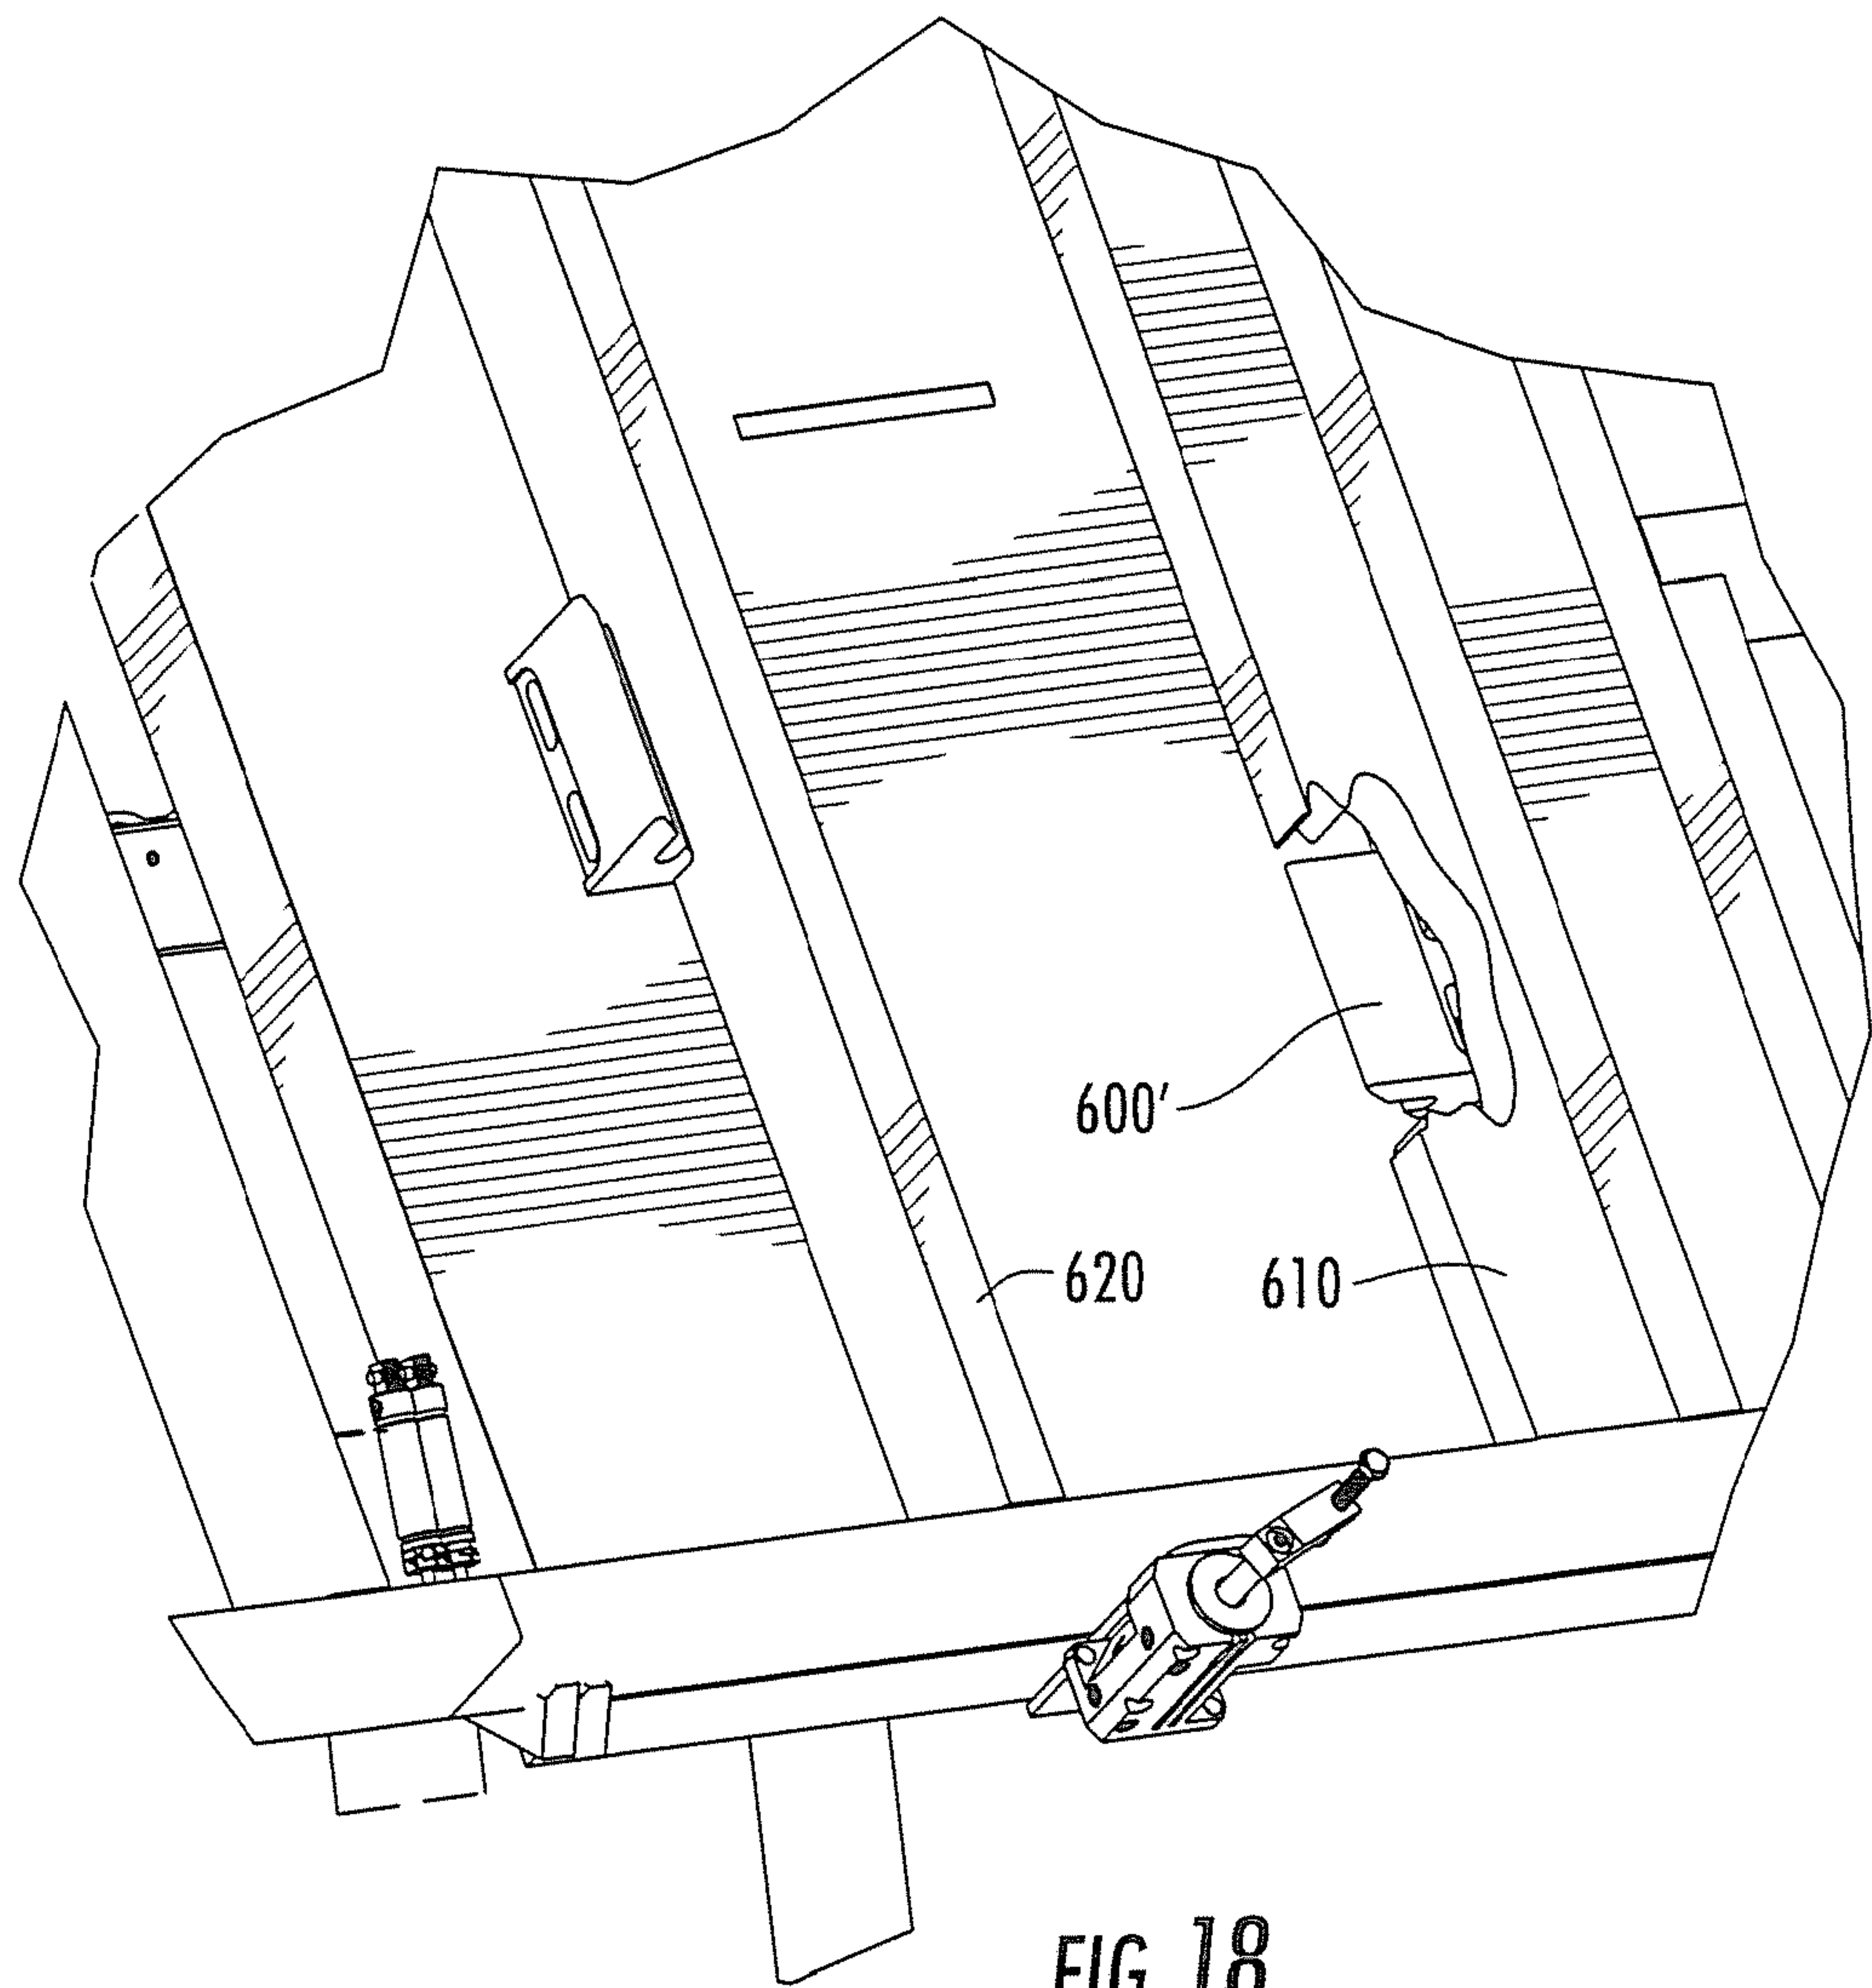

19/23

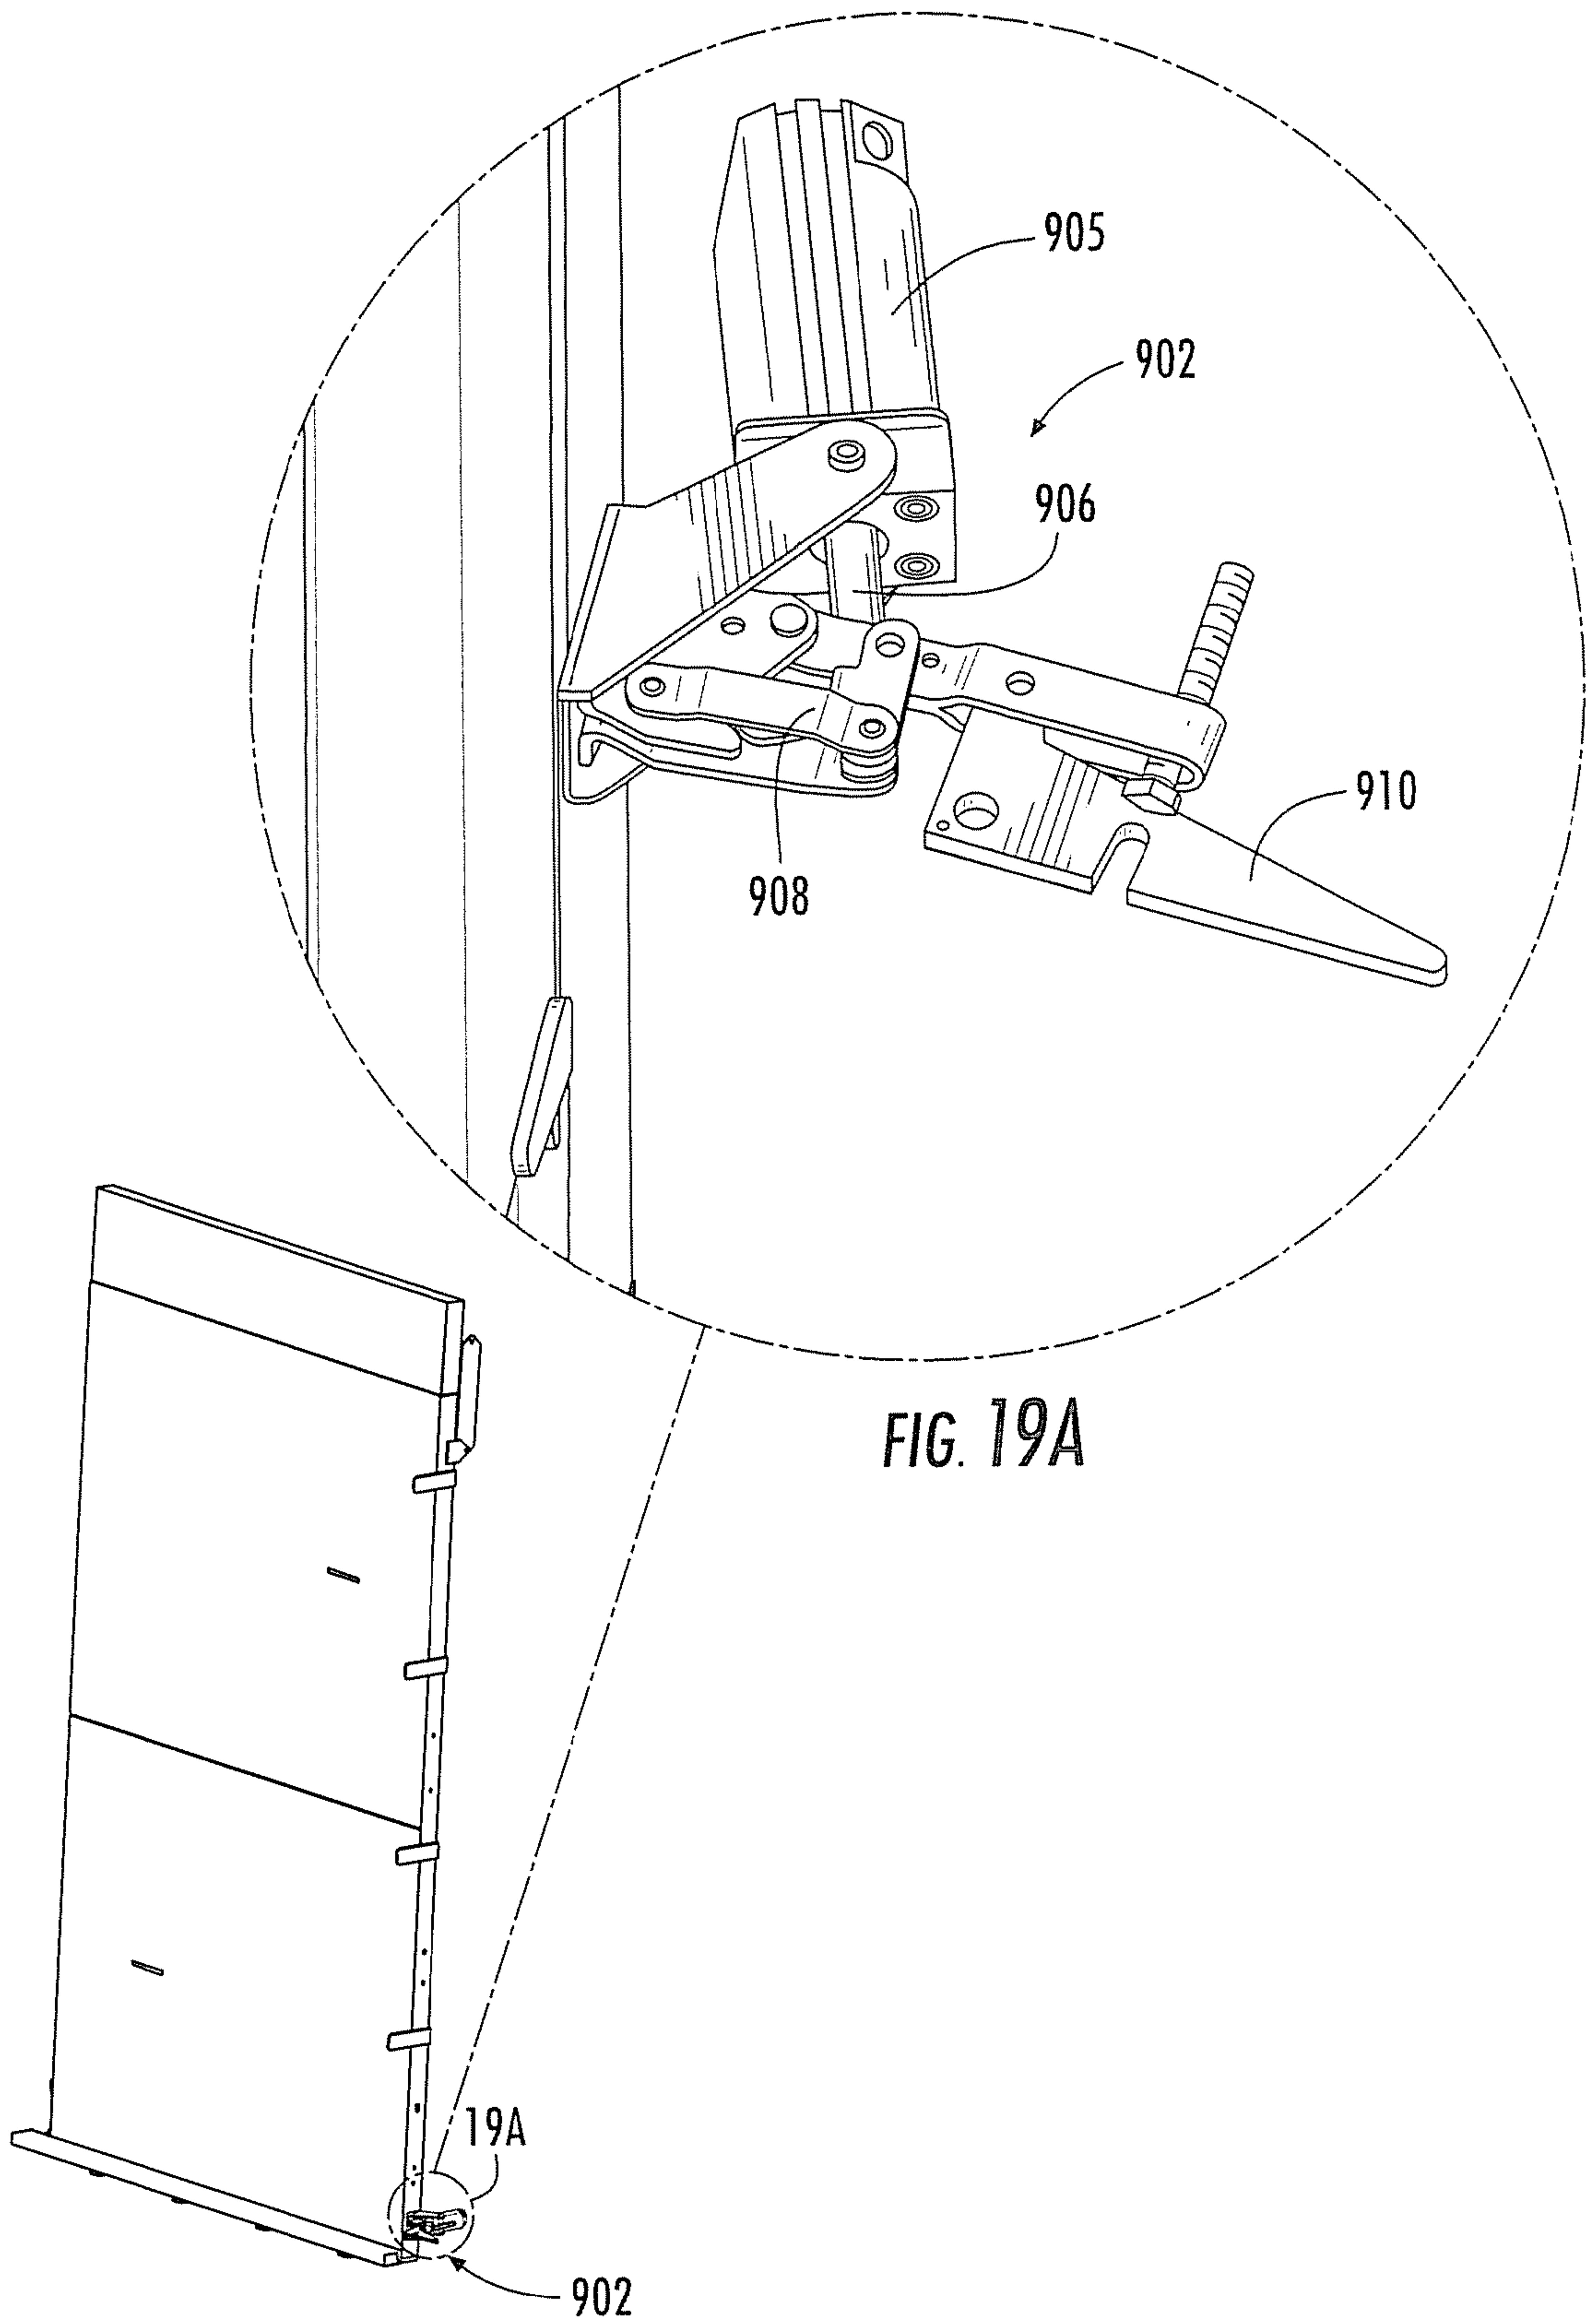

20/23

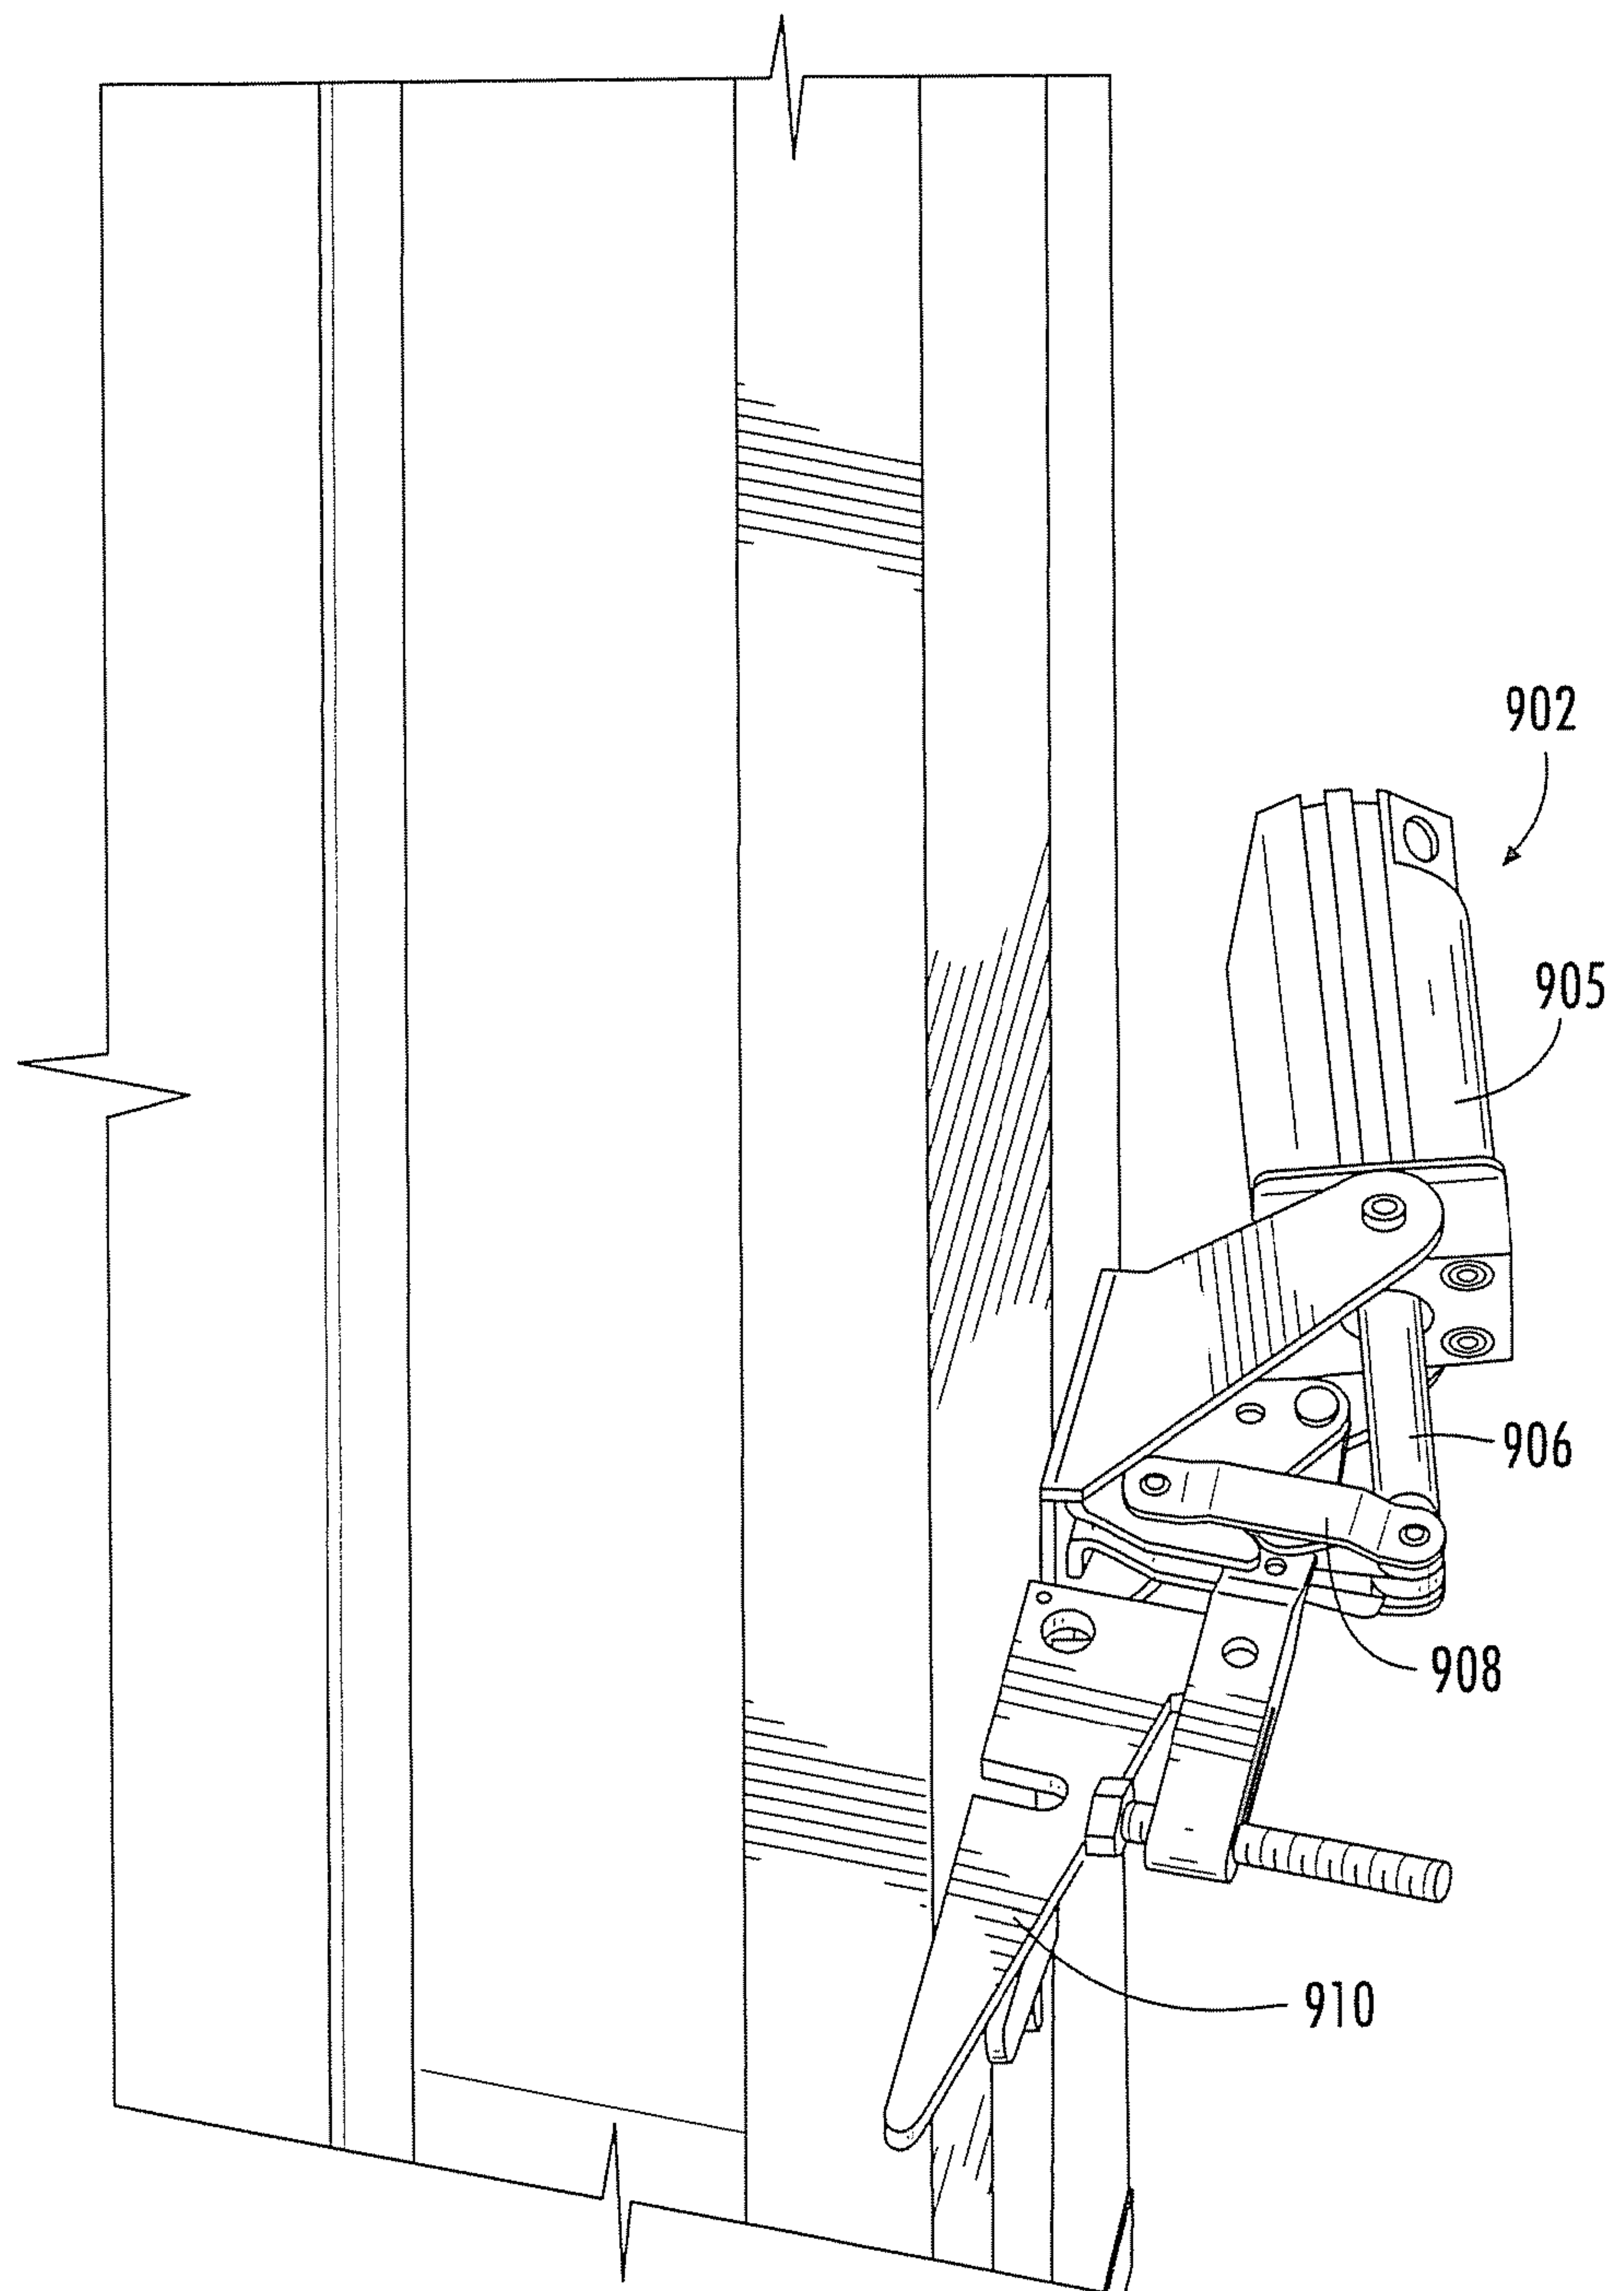


FIG. 19B

21/23

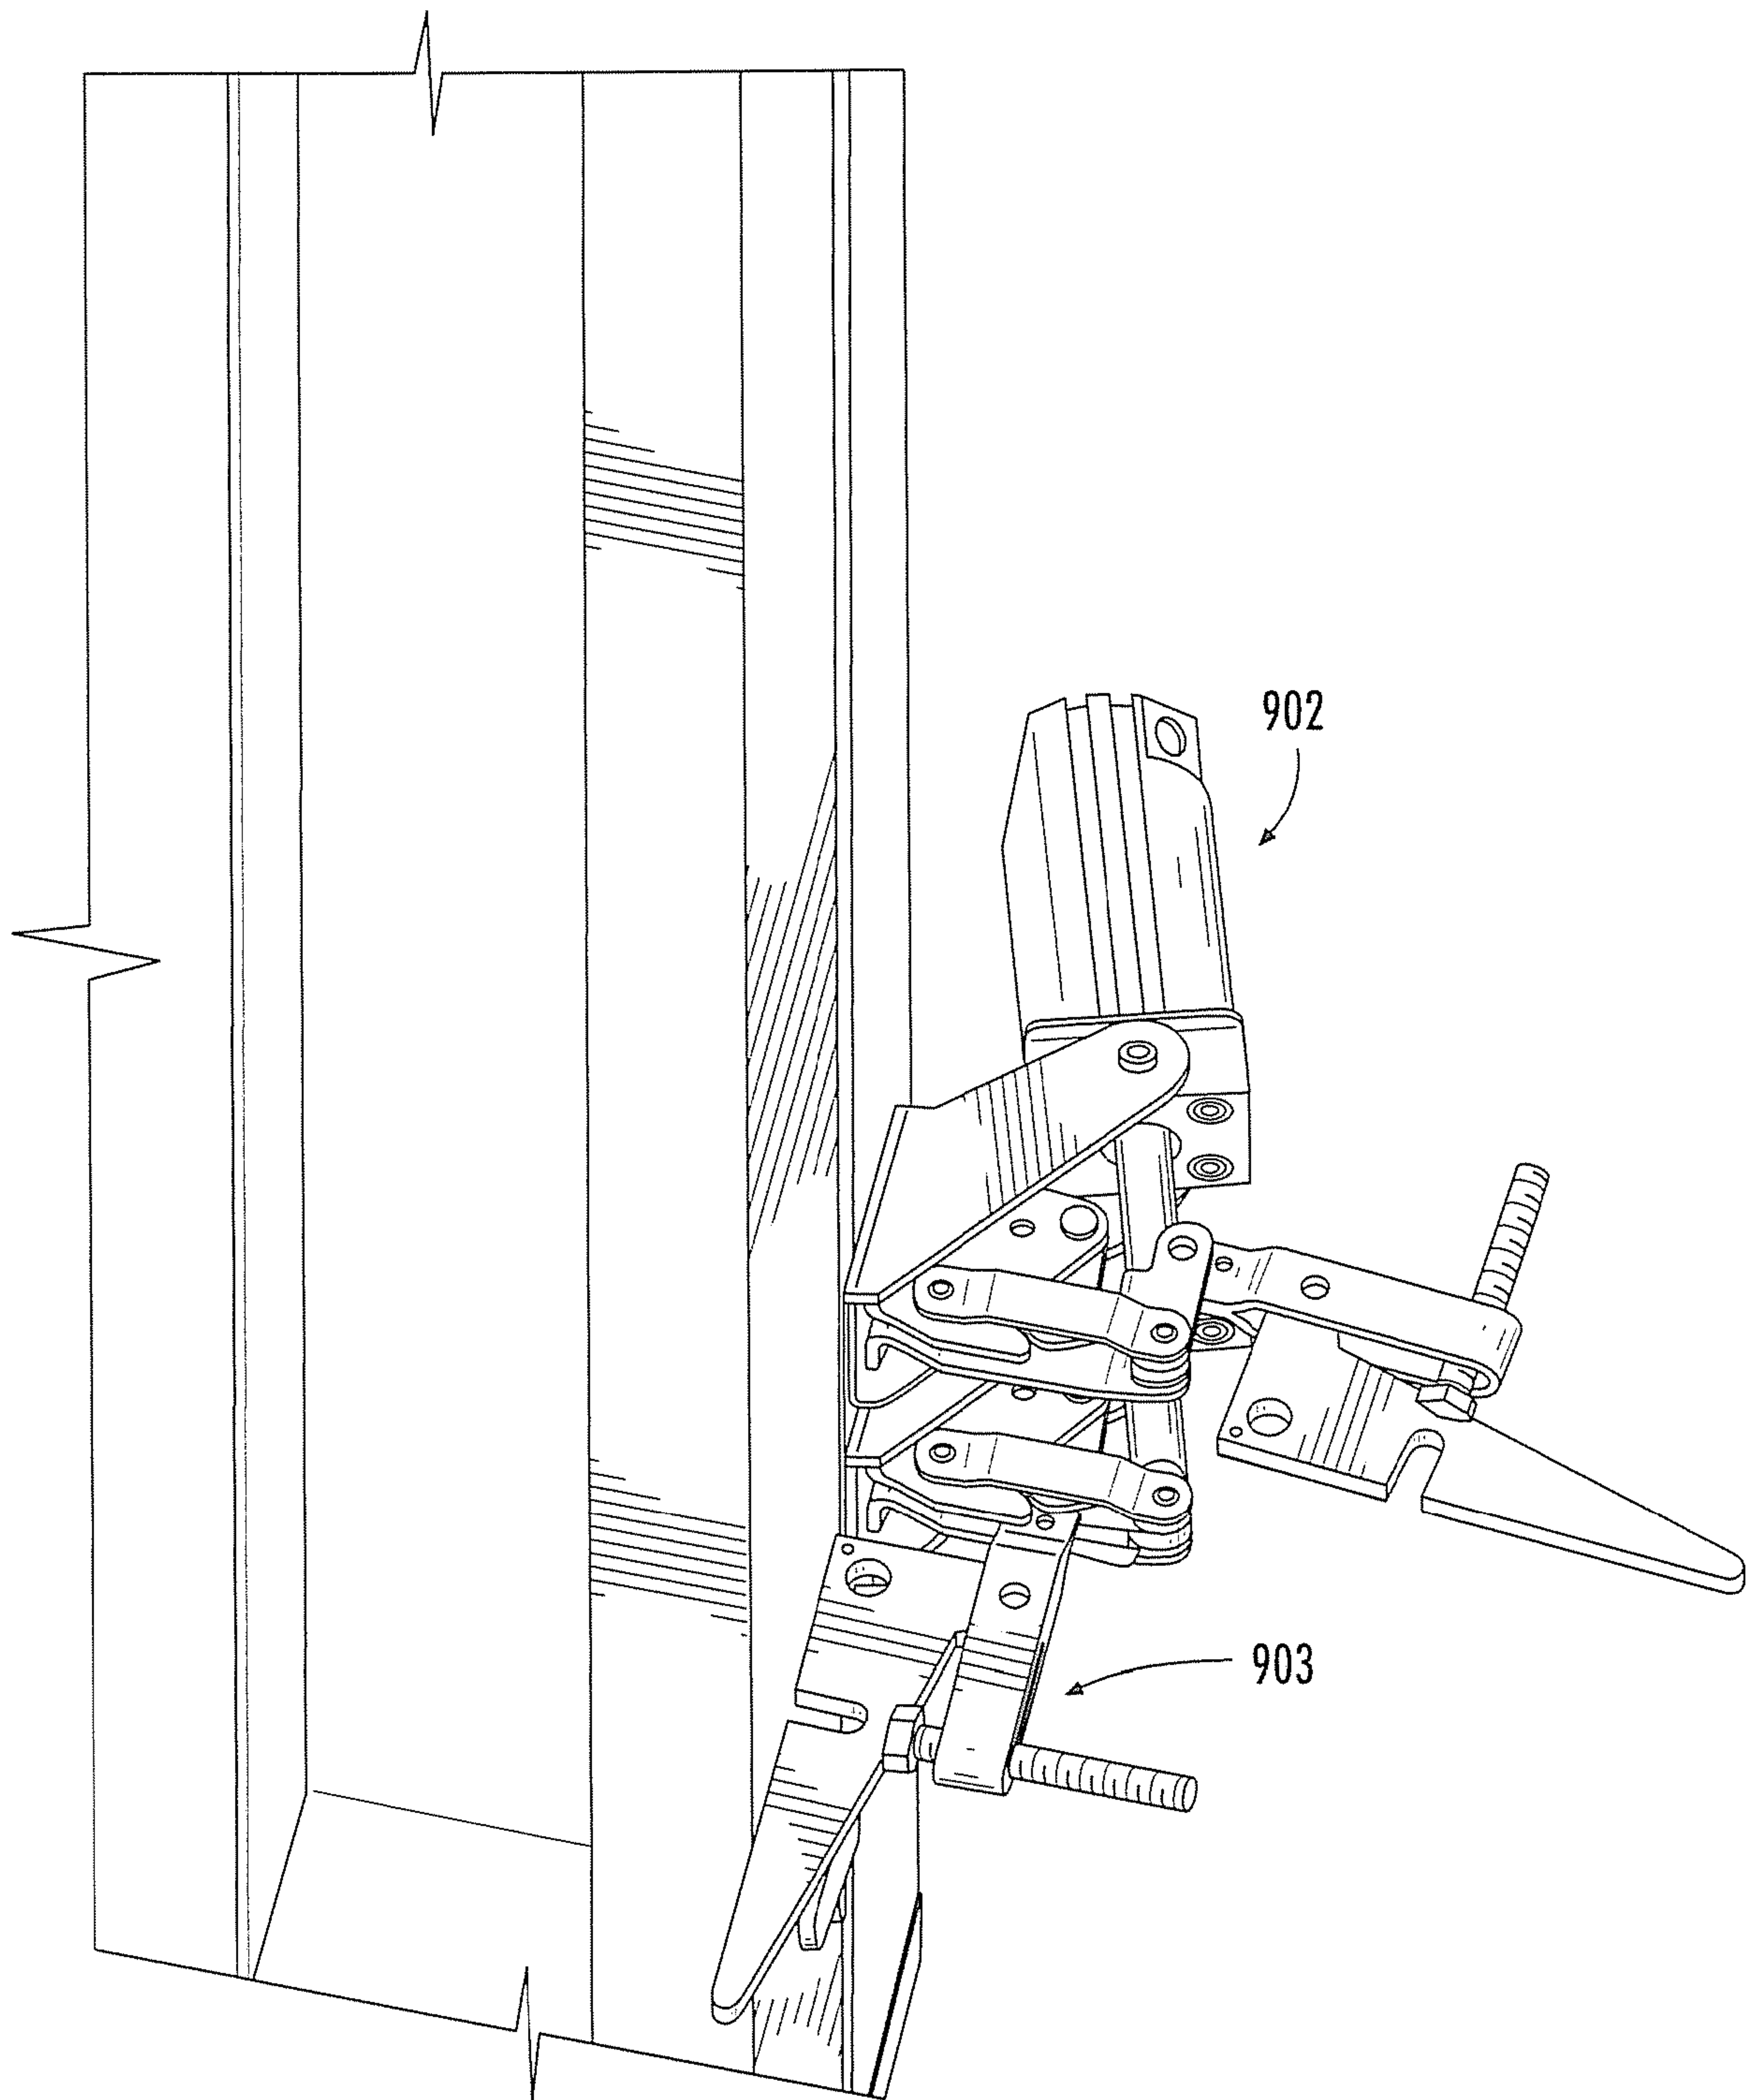


FIG. 19C

22/23

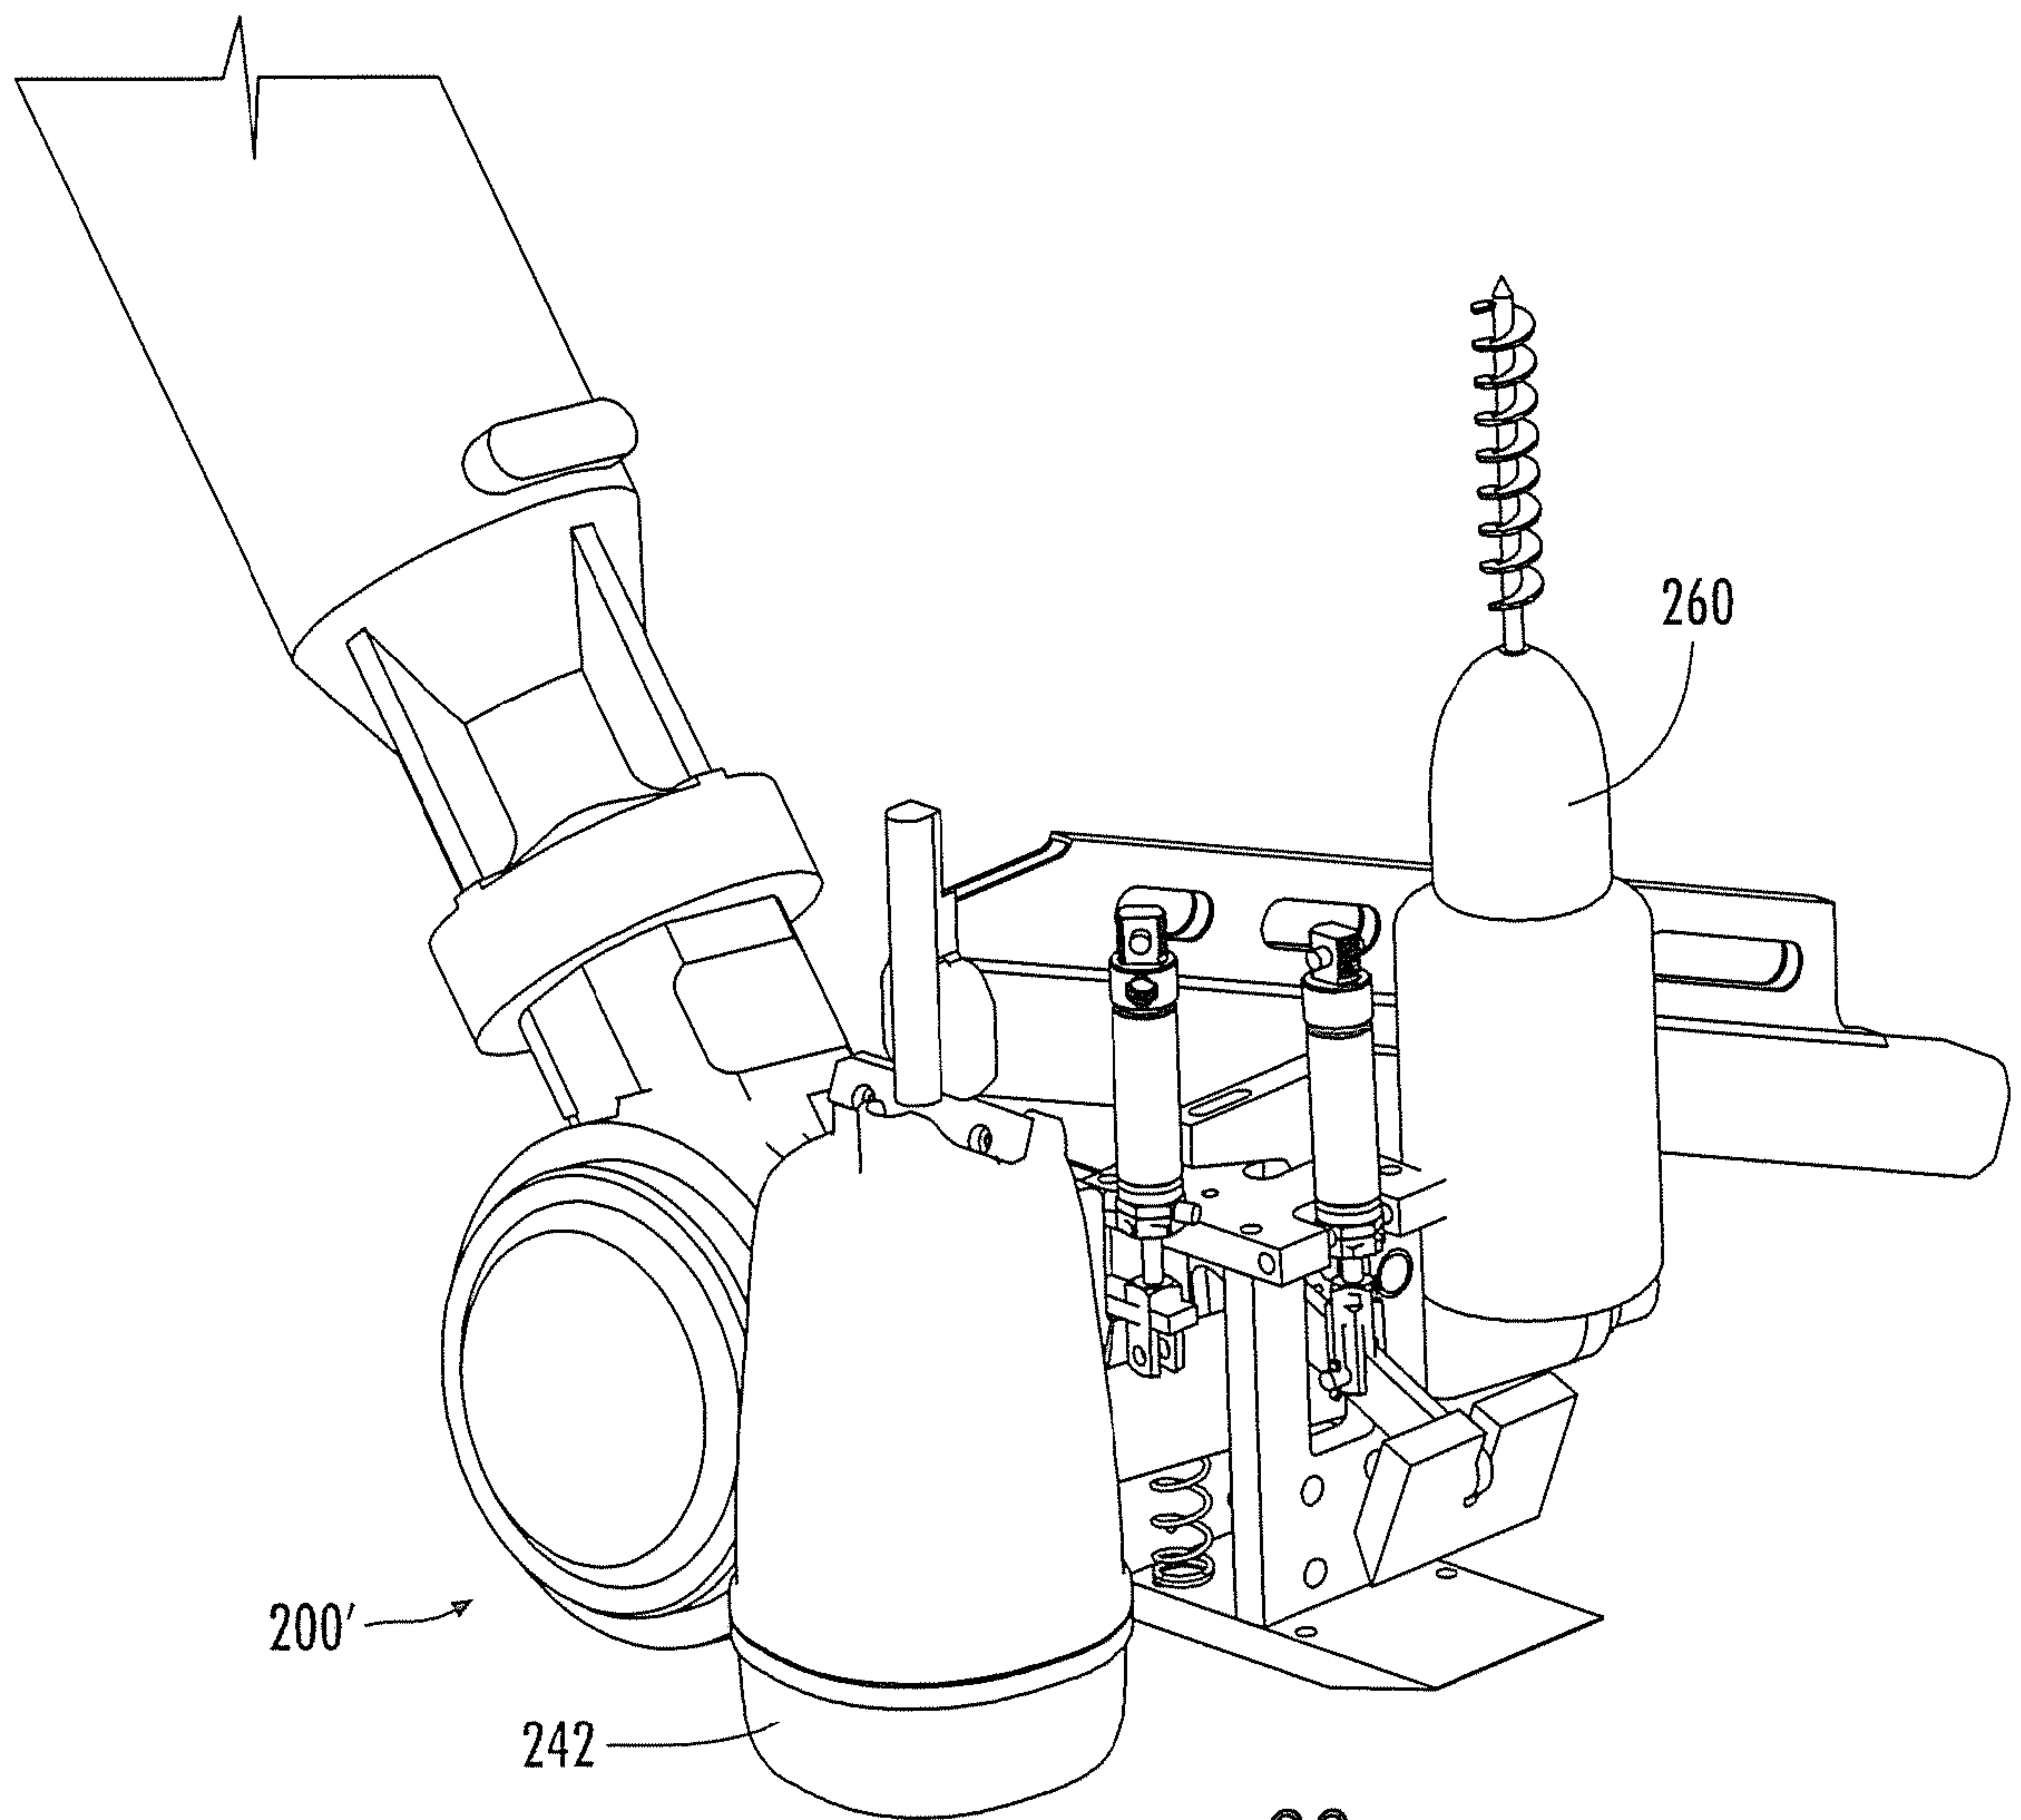


FIG. 20

23/23

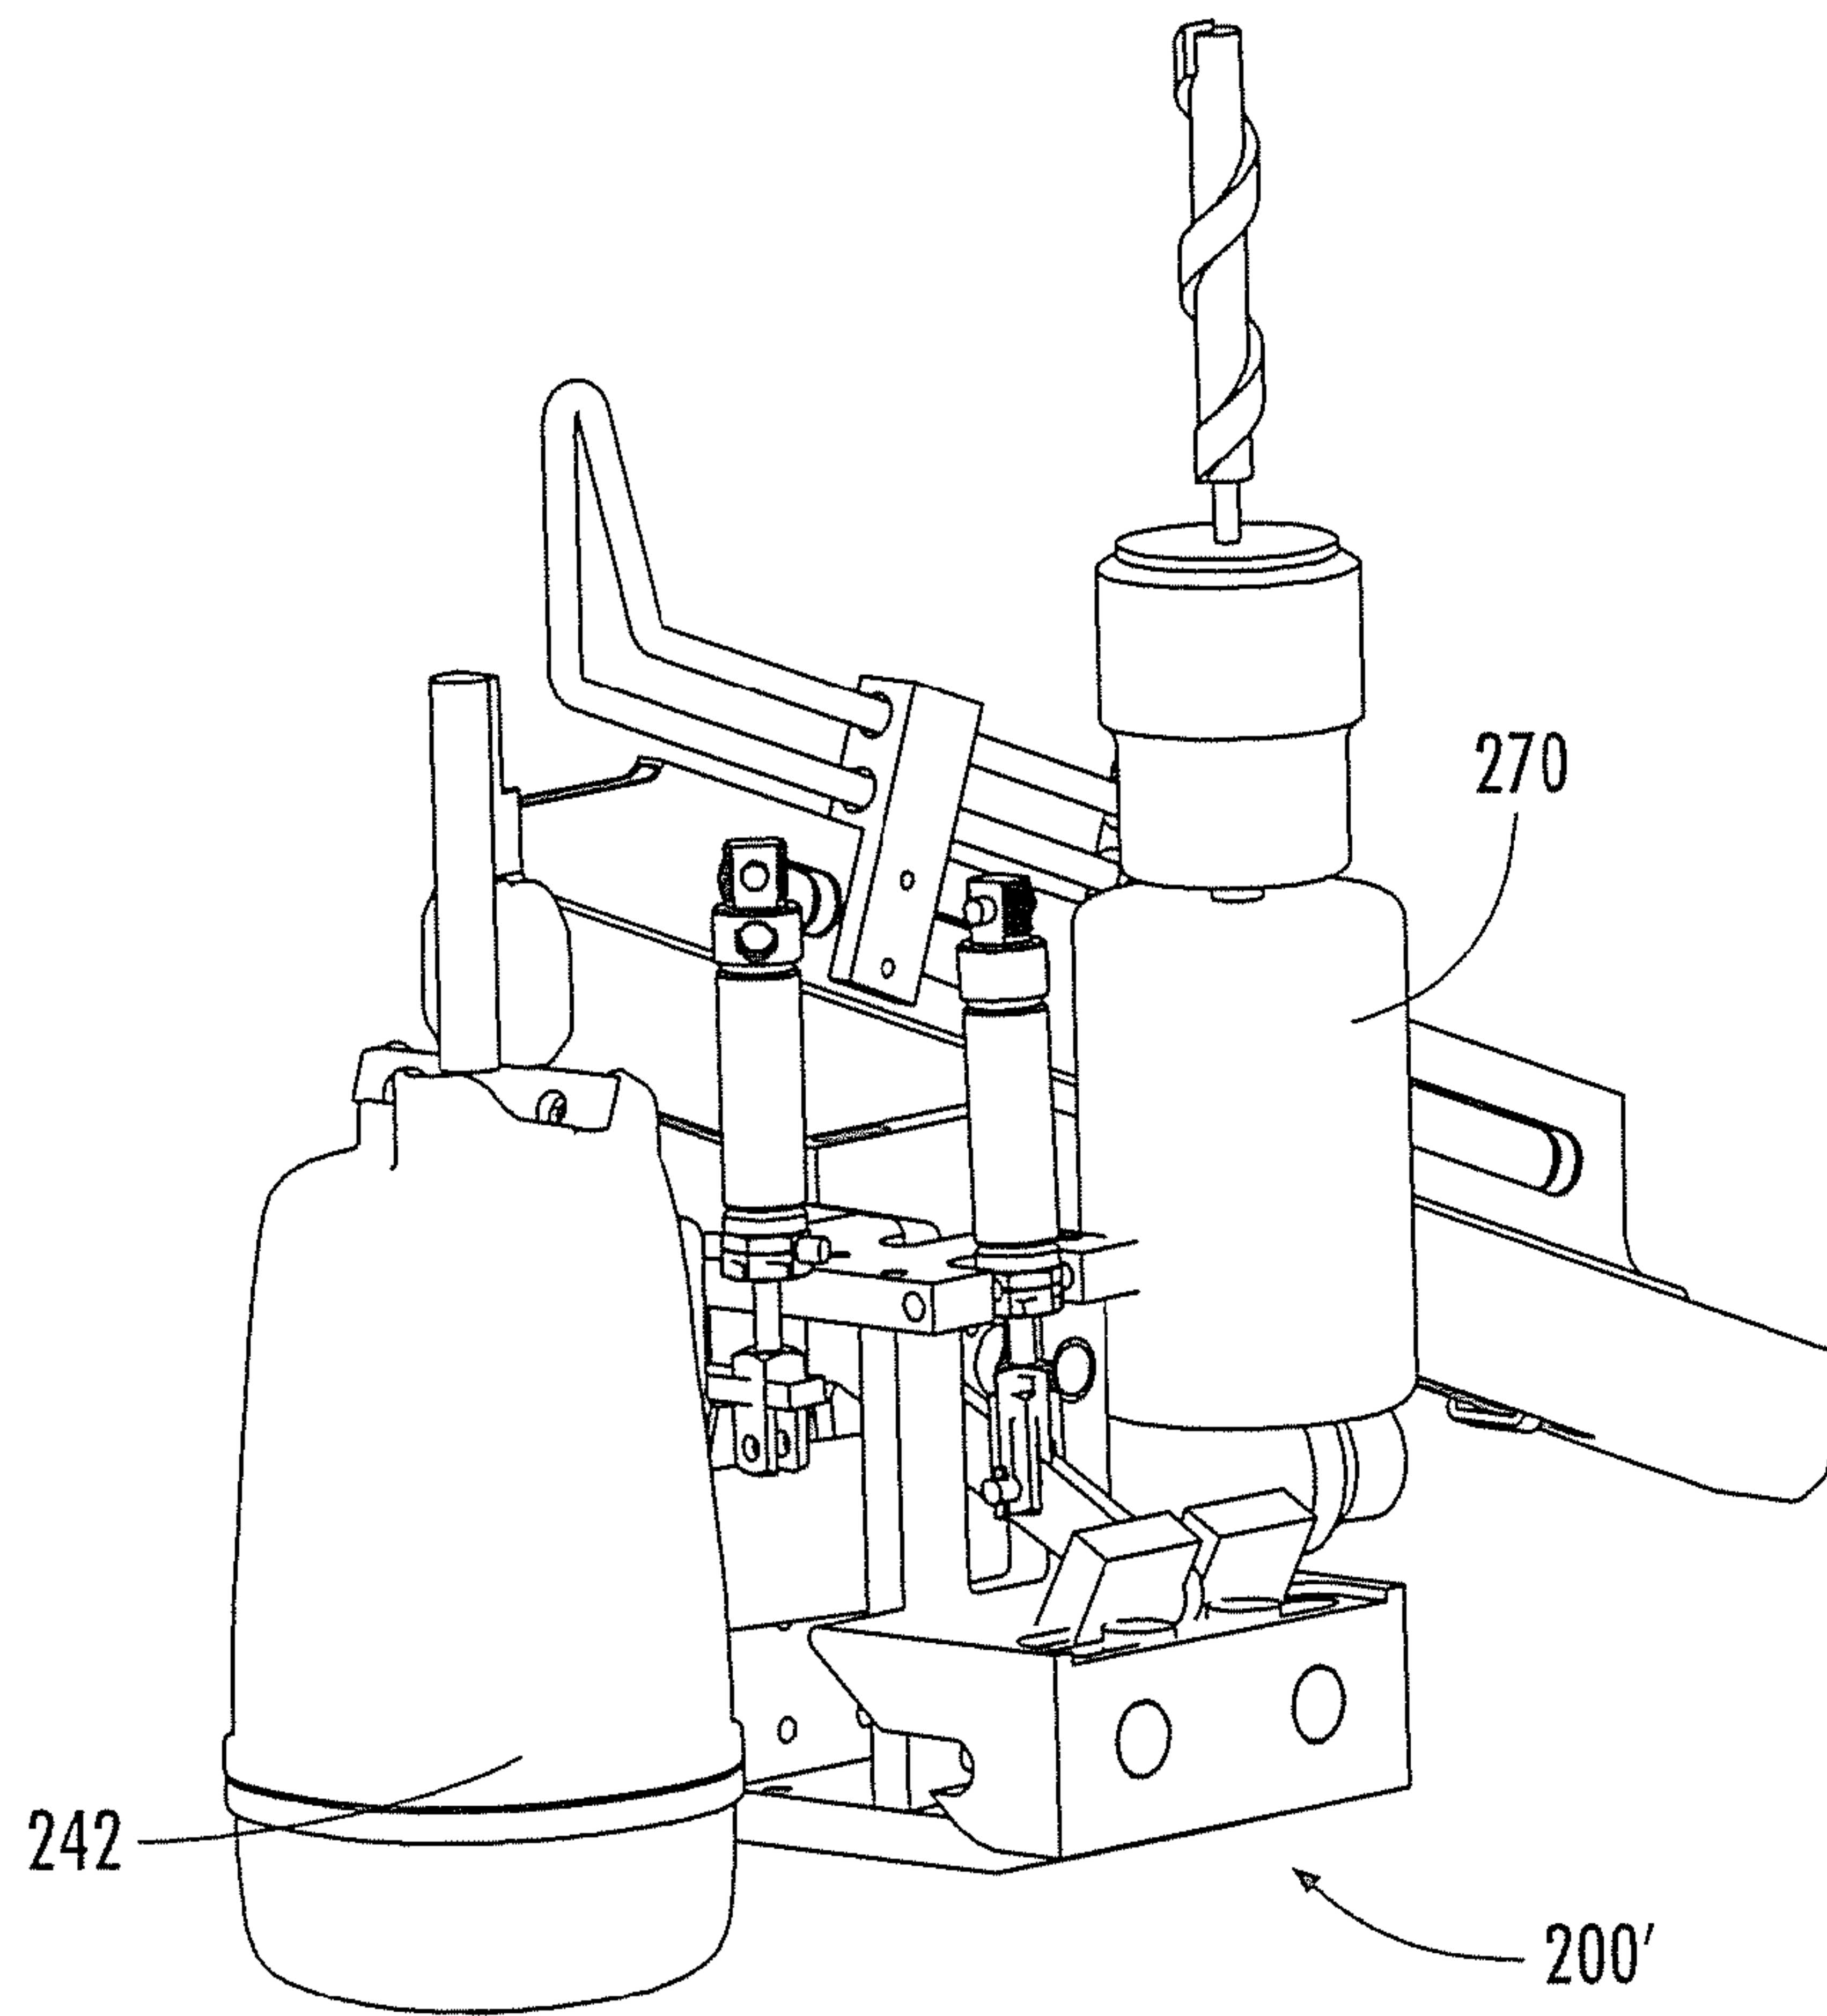


FIG. 21

