

(86) Date de dépôt PCT/PCT Filing Date: 2010/04/05
(87) Date publication PCT/PCT Publication Date: 2010/10/14
(45) Date de délivrance/Issue Date: 2016/02/02
(85) Entrée phase nationale/National Entry: 2011/10/04
(86) N° demande PCT/PCT Application No.: US 2010/001020
(87) N° publication PCT/PCT Publication No.: 2010/117437
(30) Priorités/Priorities: 2009/04/07 (US12/419,535);
2010/01/11 (US12/685,352)


(51) Cl.Int./Int.Cl. *C10B 57/00* (2006.01),
C01B 3/34 (2006.01), *C10G 1/06* (2006.01)

(72) Inventeurs/Inventors:
MARKER, TERRY L., US;
FELIX, LARRY G., US;
LINCK, MARTIN B., US

(73) Propriétaire/Owner:
GAS TECHNOLOGY INSTITUTE, US

(74) Agent: MACRAE & CO.

(54) Titre : HYDROPYROLYSE DE BIOMASSE POUR LA PRODUCTION DE COMBUSTIBLES LIQUIDES DE GRANDE QUALITE
(54) Title: HYDROPYROLYSIS OF BIOMASS FOR PRODUCING HIGH QUALITY LIQUID FUELS

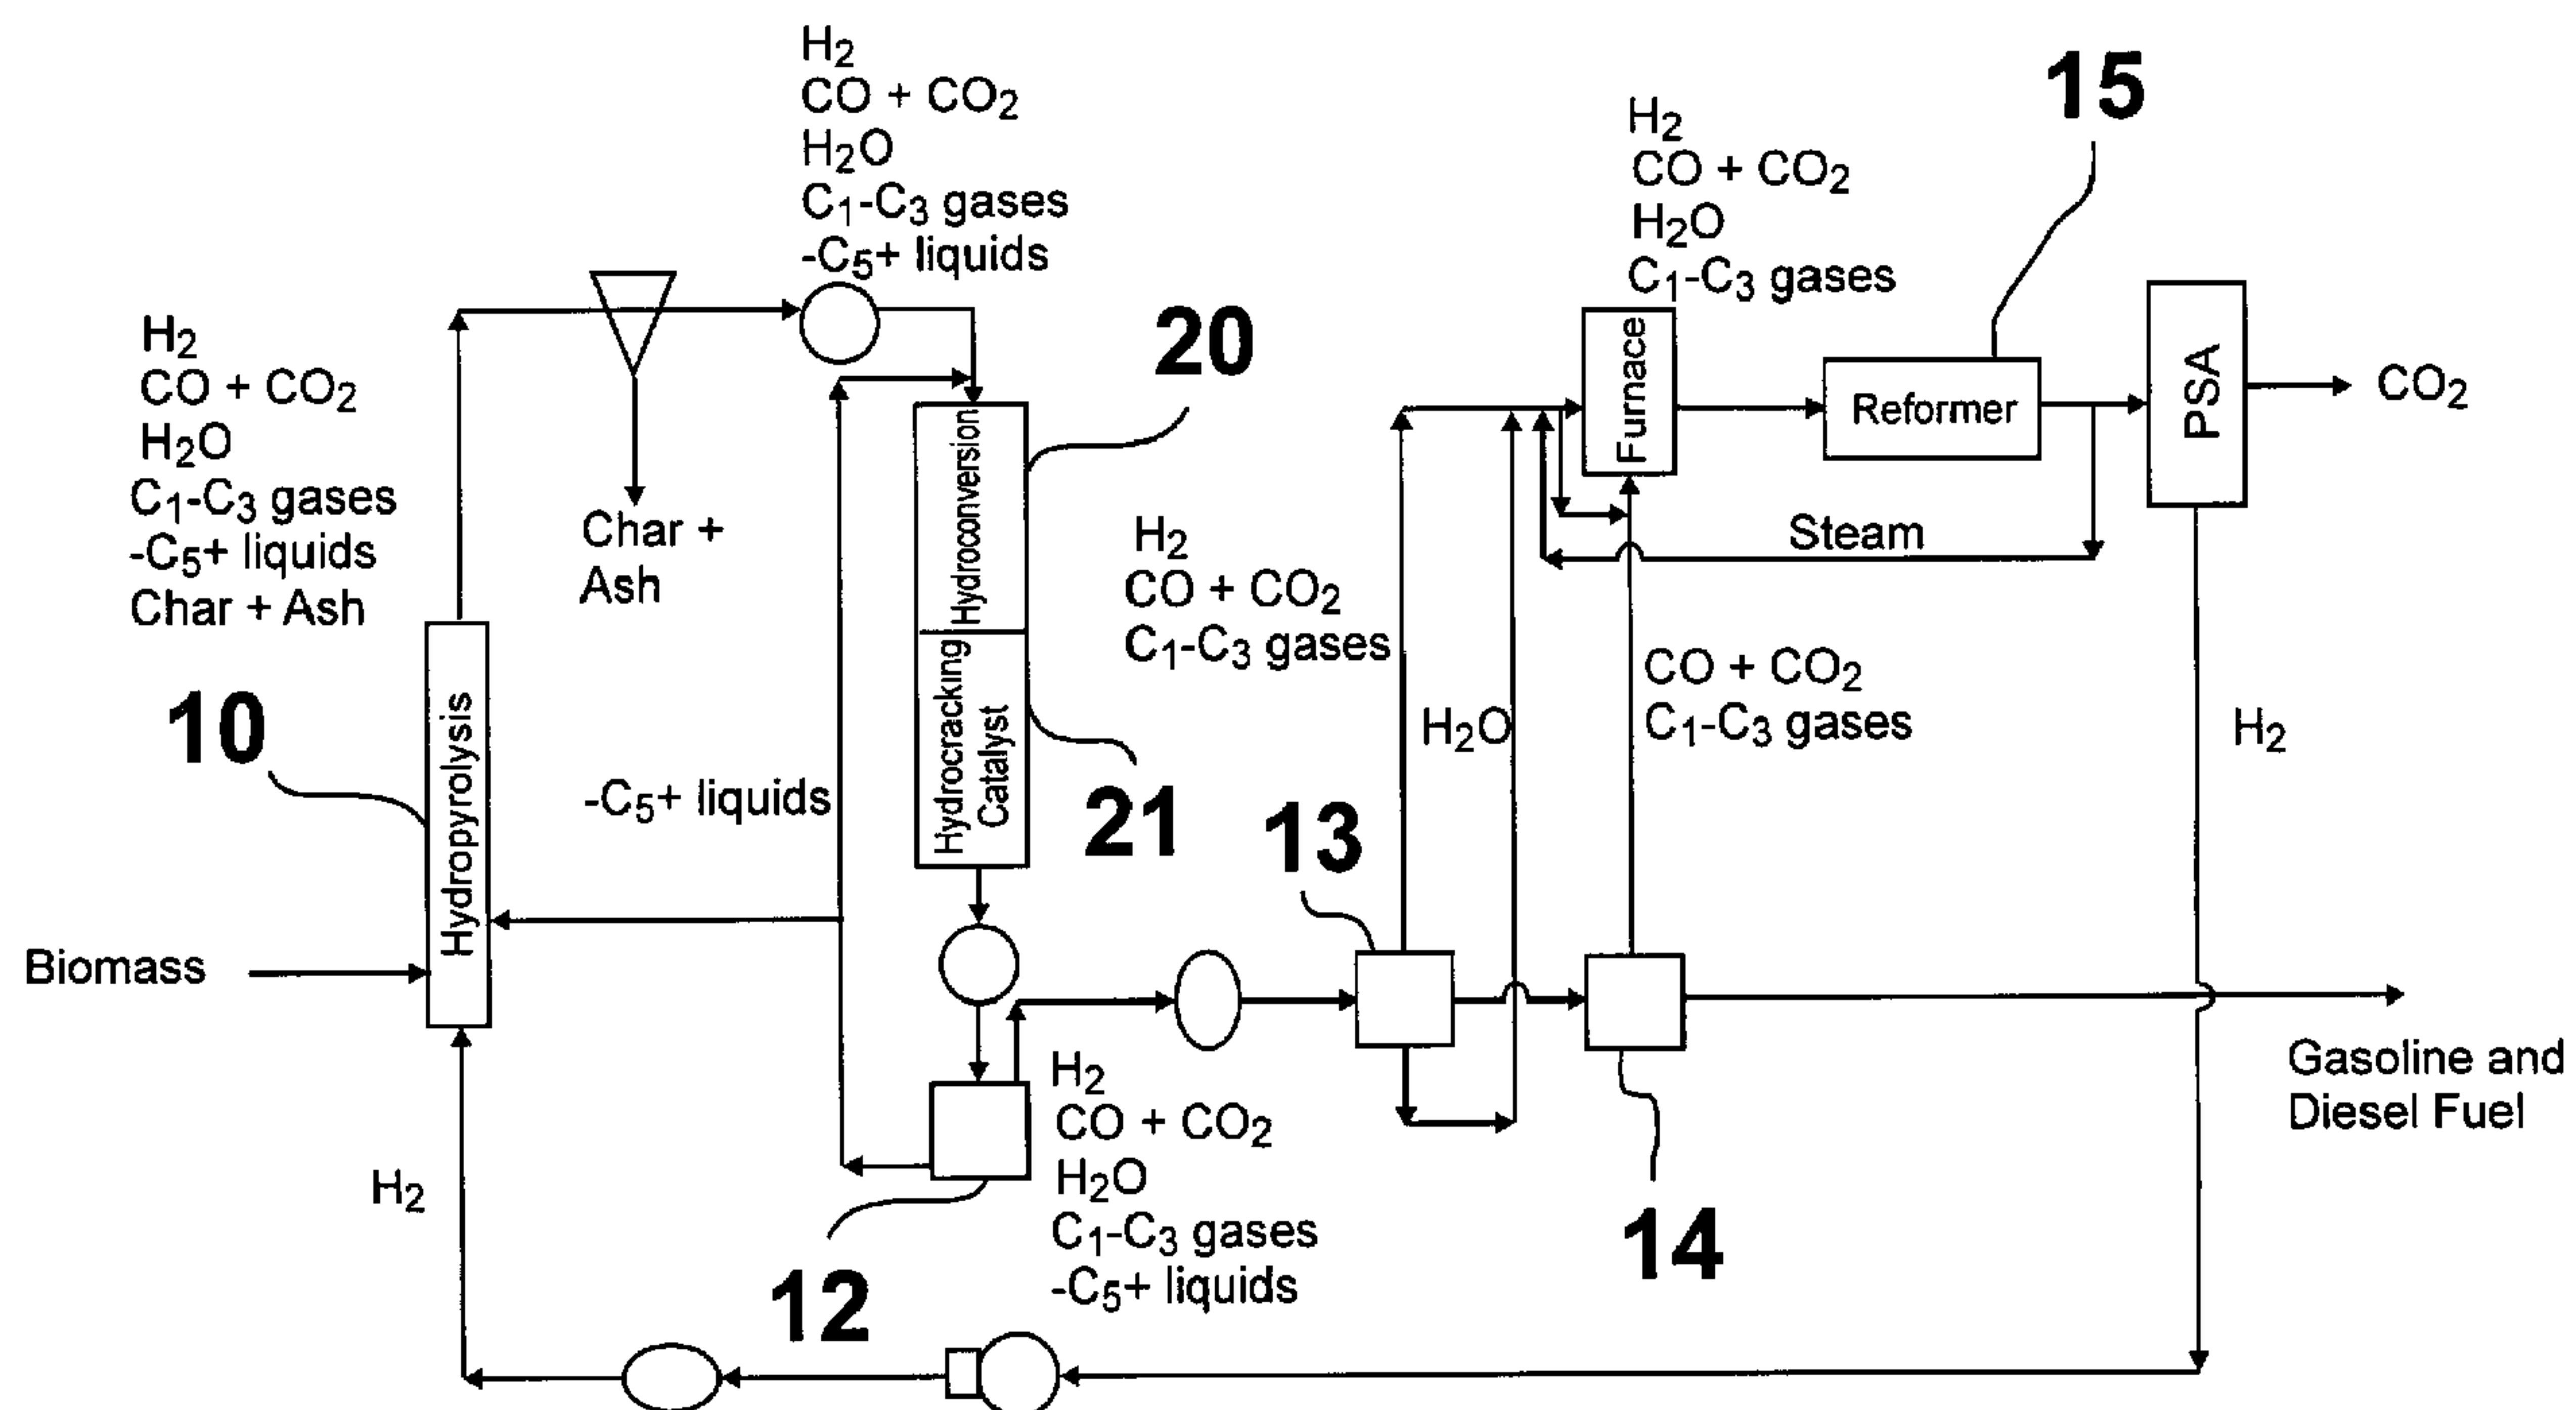

(57) Abrégé/Abstract:

A self-sustaining process for producing high quality liquid fuels from biomass in which the biomass is hydrolyzed in a reactor vessel containing molecular hydrogen and a deoxygenating catalyst, producing a partially deoxygenated hydrolysis liquid, which is hydrogenated using a hydroconversion catalyst, producing a substantially fully deoxygenated hydrocarbon liquid and a gaseous mixture comprising CO and light hydrocarbon gases (C₁- C₃). The gaseous mixture is reformed in a steam reformer, producing reformed molecular hydrogen, which is then introduced into the reactor vessel for hydrolyzing the biomass. The deoxygenated hydrocarbon liquid product is further separated to produce diesel fuel, gasoline, or blending components for gasoline and diesel fuel.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



A standard linear barcode is positioned horizontally across the bottom of the page. It consists of vertical black bars of varying widths on a white background.

**(43) International Publication Date
14 October 2010 (14.10.2010)**

(10) International Publication Number
WO 2010/117437 A1

(51) **International Patent Classification:** *C10B 51/00 (2006.01)*

(21) **International Application Number:** *PCT/US2010/001020*

(22) **International Filing Date:** *5 April 2010 (05.04.2010)*

(25) **Filing Language:** *English*

(26) **Publication Language:** *English*

(30) **Priority Data:**

12/419,535	7 April 2009 (07.04.2009)	US
12/685,352	11 January 2010 (11.01.2010)	US

(71) **Applicant (for all designated States except US):** **GAS TECHNOLOGY INSTITUTE [US/US]**; 1700 South Mount Prospect Road, Des Plaines, IL 60018 (US).

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only):** **MARKER, Terry, L. [US/US]**; 39 Country Squire Rd, Palos Heights, IL 60463-1251 (US). **FELIX, Larry, G. [US/US]**; 545 McGuire Rd, Pelham, AL 35124-3628 (US). **LINCK, Martin, B. [US/US]**; 2313 S Lexington Drive, #303, Mount Prospect, IL 60056-5972 (US).

(74) **Agent:** **FEJER, Mark, E.**; Gas Technology Institute, 1700 South Mount Prospect Road, Des Plaines, IL 60018 (US).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *with amended claims and statement (Art. 19(1))*

(54) Title: HYDROPYROLYSIS OF BIOMASS FOR PRODUCING HIGH QUALITY LIQUID FUELS

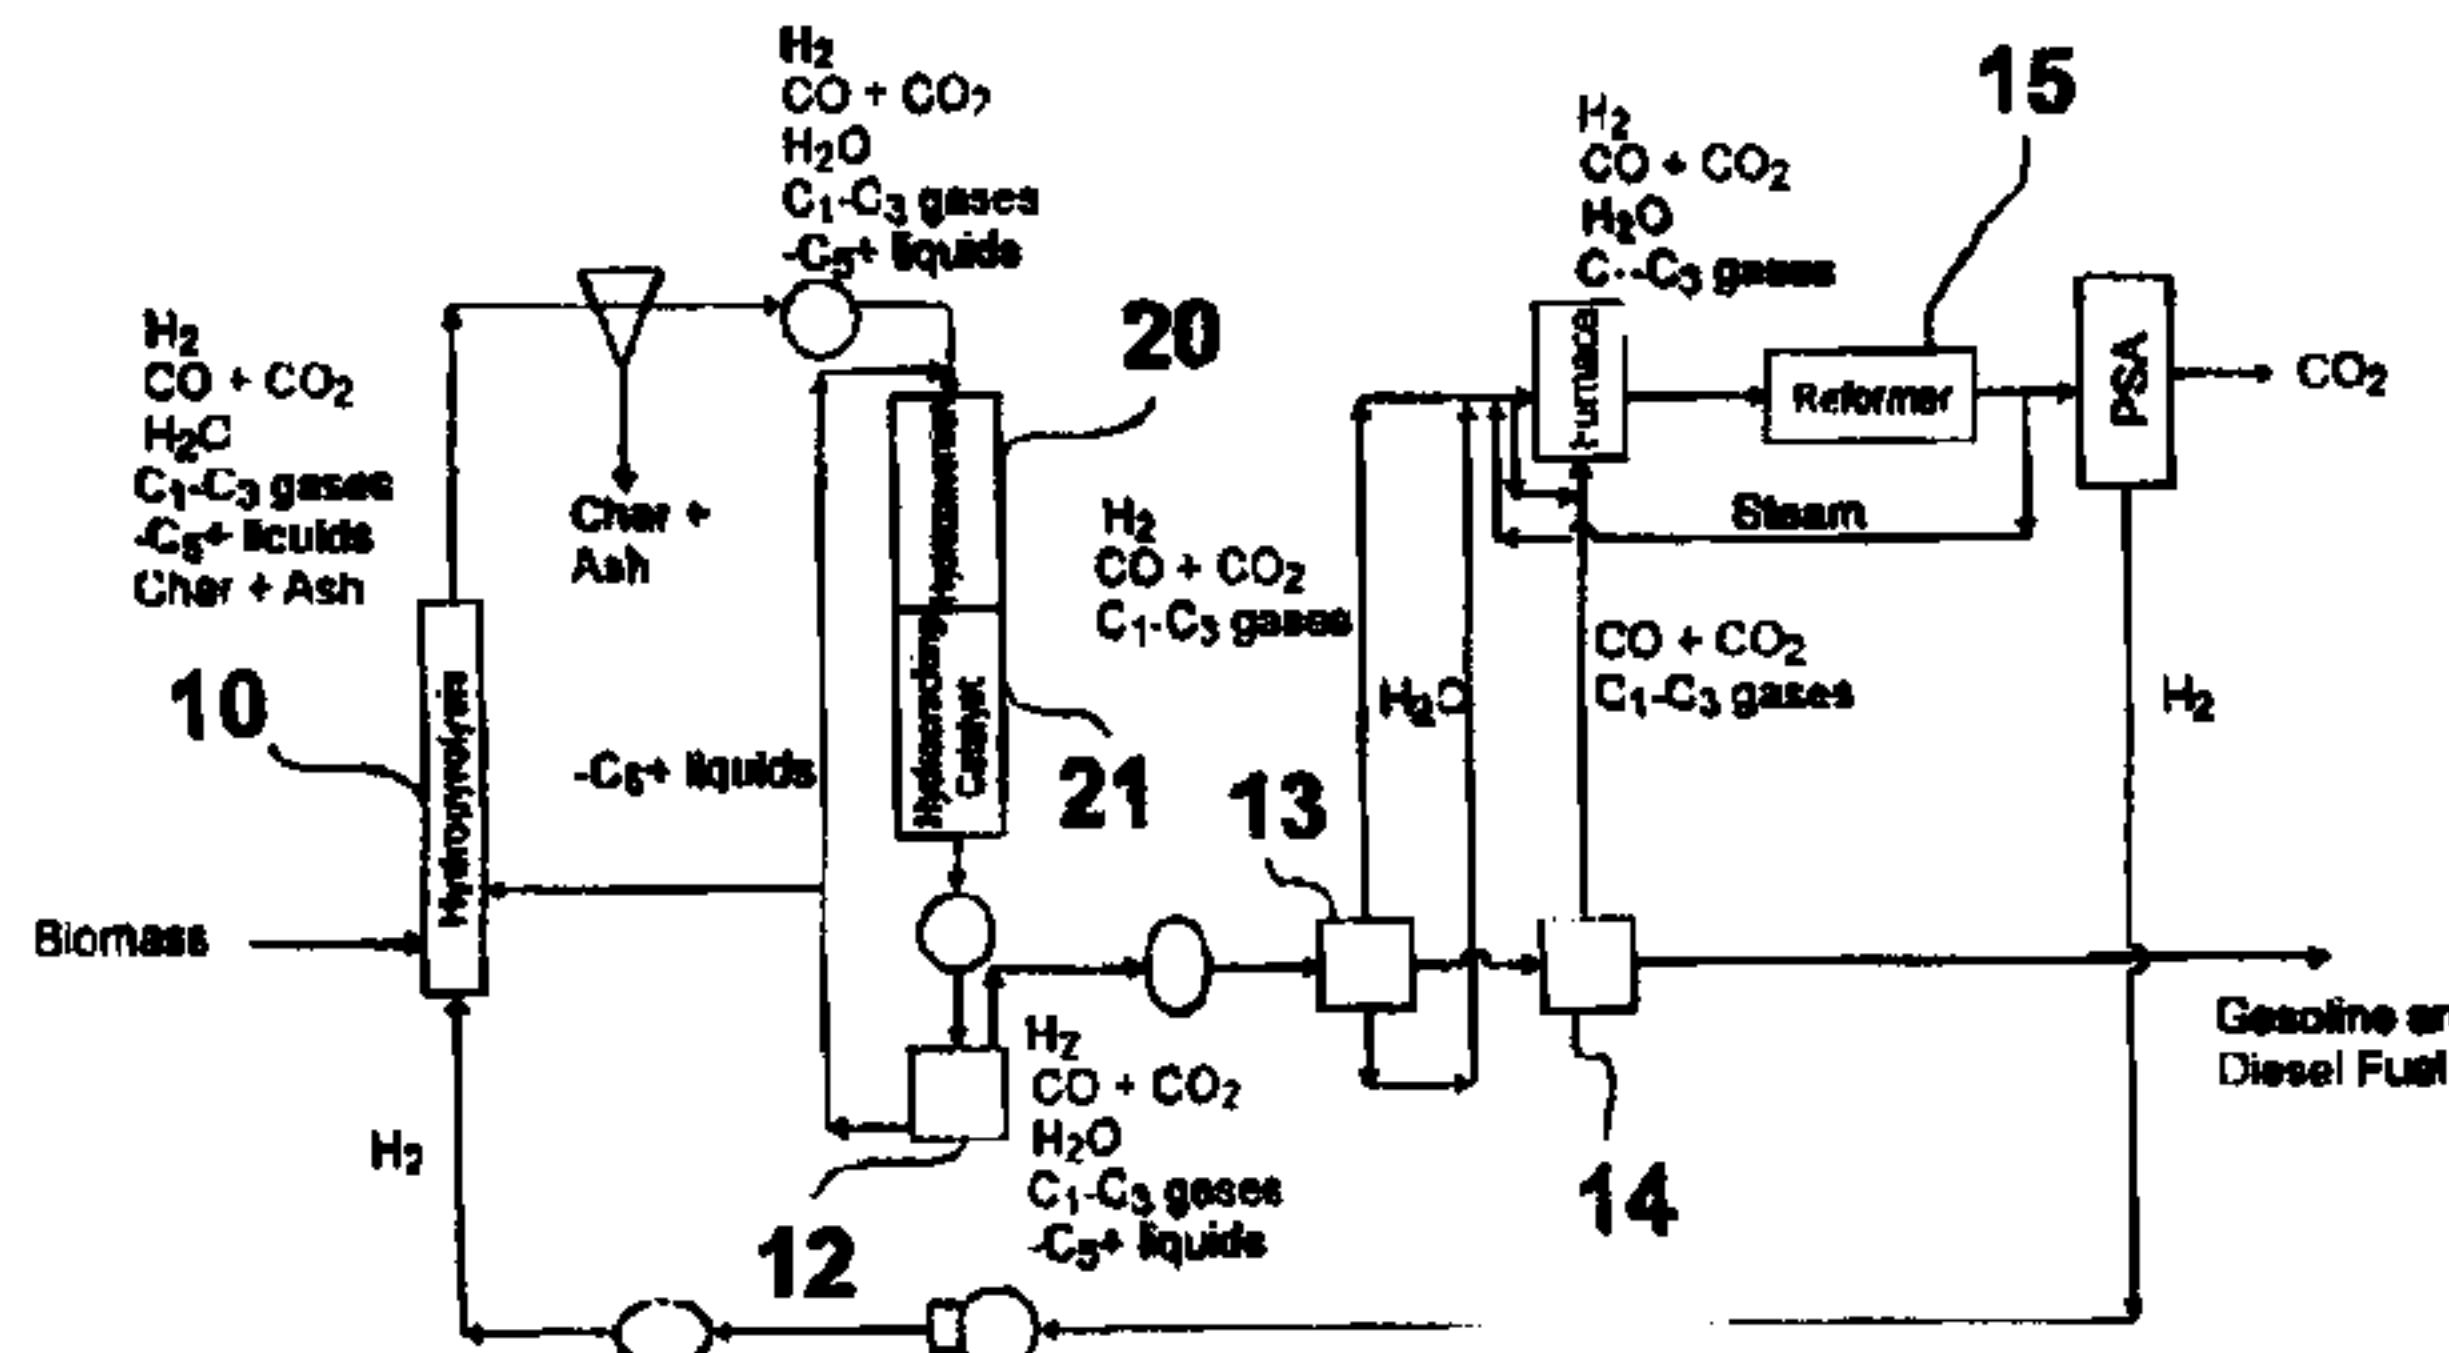


Fig. 2

(57) Abstract: A self-sustaining process for producing high quality liquid fuels from biomass in which the biomass is hydrolyzed in a reactor vessel containing molecular hydrogen and a deoxygenating catalyst, producing a partially deoxygenated hydrolysis liquid, which is hydrogenated using a hydroconversion catalyst, producing a substantially fully deoxygenated hydrocarbon liquid and a gaseous mixture comprising CO and light hydrocarbon gases (C₁ - C₃). The gaseous mixture is reformed in a steam reformer, producing reformed molecular hydrogen, which is then introduced into the reactor vessel for hydrolyzing the biomass. The deoxygenated hydrocarbon liquid product is further separated to produce diesel fuel, gasoline, or blending components for gasoline and diesel fuel.

HYDROPYROLYSIS OF BIOMASS FOR PRODUCING HIGH QUALITY LIQUID FUELS

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates to an integrated process for thermochemically transforming biomass into high quality liquid fuels. As used herein, the term “biomass” refers to biological material derived from living or deceased organisms and includes lignocellulosic materials, such as wood, aquatic materials, such as algae, aquatic plants, seaweed, and animal by-products and wastes, such as offal, fats, and sewage sludge. In one aspect, this invention relates to a substantially self-sustaining process for creating high quality liquid fuels from biomass. In another aspect, this invention relates to a multi-stage hydropyrolysis process for creating high quality liquid fuels from biomass. In another aspect, this invention relates to a hydropyrolysis process for transforming biomass into high quality liquid fuels in which all of the process fluids are provided by the biomass. In another aspect, this invention relates to a hydropyrolysis process for transforming biomass into high quality liquid fuels in which the process outputs are substantially only liquid product and CO₂. In another aspect, this invention relates to an integrated process for producing gasoline and diesel fuels from biomass using a hydrocracking catalyst.

Description of Related Art

[0002] Conventional pyrolysis of biomass, typically fast pyrolysis, does not utilize or require H₂ or catalysts and produces a dense, acidic, reactive liquid product that contains water, oils, and char formed during the process. Because fast pyrolysis is most typically carried out in an inert atmosphere, much of the oxygen present in biomass is carried over into the oils produced in pyrolysis, which increases their chemical reactivity. The unstable liquids produced by conventional pyrolysis tend to thicken over time and can also react to a point where hydrophilic and hydrophobic phases form. Dilution of pyrolysis liquids with methanol or other alcohols has been shown to reduce the activity and viscosity of the oils, but this approach is not considered to be practical or economically viable, because large amounts of

WO 2010/117437

PCT/US2010/001020

unrecoverable alcohol would be required to produce and transport large amounts of pyrolysis liquids.

[0003] In conventional pyrolysis carried out in an inert environment, the water miscible liquid product is highly oxygenated and reactive, with total acid numbers (TAN) in the range of 100-200, has low chemical stability for polymerization, is incompatible with petroleum hydrocarbons due to water miscibility and very high oxygen content, on the order of about 40% by weight, and has a low heating value. As a result, transport and utilization of this product are problematic and it is difficult to upgrade this product to a liquid fuel due to the retrograde reactions that typically occur in conventional pyrolysis and in conventional fast pyrolysis. In addition, the removal of char generated by conventional pyrolysis from the liquid pyrolysis product presents a technical challenge due to the large amounts of oxygen and free radicals in the pyrolysis vapors which remain highly reactive and form a pitch-like material when they come in intimate contact with char particles on the surface of a filter. Consequently, filters used to separate the char from the hot pyrolysis vapors blind quickly due to the reactions of char and oil that occur on and within the layer of char on the surface of the filter.

[0004] The upgrading of pyrolysis oils produced by conventional fast pyrolysis through hydroconversion consumes large quantities of H₂, and extreme process conditions make it uneconomical. The reactions are inherently out of balance in that, due to the high pressures required, too much water is created while too much H₂ is consumed. In addition, hydroconversion reactors often plug due to coke precursors present in the pyrolysis oils or from coke produced as a result of catalysis.

[0005] In general, hydropyrolysis is a catalytic pyrolysis process carried out in the presence of molecular hydrogen. Typically, the objective of conventional hydropyrolysis processes has been to maximize liquid yield in a single step. However, in one known case, a second stage reaction was added, the objective of which was to maximize yield while maintaining high oxygen removal. However, even this approach compromises economy, creates a system which requires an external source of H₂, and must be carried out at excessive internal pressures. In addition to requiring a continuous input of hydrogen, such conventional hydropyrolysis processes produce excessive H₂O which must then be disposed of.

SUMMARY OF THE INVENTION

[0006] Accordingly, it is one object of this invention to provide a self-sustaining, balanced process for conversion of biomass to a liquid product via hydropyrolysis. By self-sustaining, we mean that, once initiated, the process requires no input of additional reactants, heat, or energy from external sources.

[0007] It is another object of this invention to provide a process for conversion of biomass to a liquid product using hydropyrolysis wherein the total output of the overall process is substantially only liquid product and CO₂. As used herein, the term "liquid product" refers to hydrocarbon products, typically -C₄ + liquids, produced by the process of this invention.

[0008] These and other objects of this invention are addressed by a multi-stage, self-sustaining process for producing liquid products from biomass in which the biomass is hydropyrolyzed in a reactor vessel containing molecular hydrogen and a deoxygenating catalyst, producing a partially deoxygenated hydropyrolysis liquid, char, and first-stage process heat. The partially deoxygenated hydropyrolysis liquid is hydrogenated using a hydroconversion catalyst, producing a substantially fully deoxygenated hydrocarbon liquid, a gaseous mixture comprising CO and light hydrocarbon gases (C₁ - C₃), and second-stage process heat. The gaseous mixture is then reformed in a steam reformer, producing reformed molecular hydrogen. The reformed molecular hydrogen is then introduced into the reactor vessel for the hydropyrolysis of additional biomass.

[0009] To provide a self-sustaining process, the hydropyrolysis and hydroconversion steps are operated at conditions under which about 30-70% of oxygen in the biomass is converted to H₂O and about 30-70% of the oxygen is converted to CO and CO₂. That is, the ratio of oxygen in H₂O produced therein to the oxygen in the CO and CO₂ produced therein equals in the range of about .43 to about 2.2. Preferably, process pressures for the hydropyrolysis and hydroconversion steps are in the range of about 100 psig to about 800 psig and are about the same for both steps. Pressures greater than about 800 psig result in a higher liquid product yield, which is the driving force behind the operating parameters employed by conventional processes for maximizing liquid product yield; however, such higher pressures also produce higher amounts of water, as a result of which the overall process is driven out of balance, requiring, for example, the introduction of additional

hydrogen into the hydropyrolysis reactor vessel from an external source to complete the process. In addition, the excess water produced at the higher pressures must then be purified and disposed of. Preferably, temperatures for the hydropyrolysis and hydroconversion steps are in the range of about 650°F to about 1000°F.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] These and other objects and features of this invention will be better understood from the following detailed description taken in conjunction with the drawings wherein:

[0011] Fig. 1 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass in accordance with one embodiment of this invention;

[0012] Fig. 2 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass utilizing a hydrocracking catalyst in which hydrocracking takes place downstream of the hydroconversion step in accordance with one embodiment of this invention;

[0013] Fig. 3 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass utilizing a hydrocracking catalyst in which hydrocracking takes place upstream of the hydroconversion step in accordance with one embodiment of this invention;

[0014] Fig. 4 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass utilizing a hydrocracking catalyst in which hydrocracking takes place upstream of the hydroconversion step in accordance with another embodiment of this invention;

[0015] Fig. 5 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass utilizing a hydrocracking catalyst in which hydrocracking takes place downstream of the hydroconversion step in accordance with one embodiment of this invention;

[0016] Fig. 6 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass utilizing a hydrocracking catalyst in which hydrocracking takes place in parallel with the hydroconversion step in accordance with one embodiment of this invention;

[0017] Fig. 7 is a schematic flow diagram of the self-sustaining process for producing

liquid fuels from biomass utilizing a hydrocracking catalyst in place of the hydropyrolysis catalyst in accordance with one embodiment of this invention; and

[0018] Fig. 8 is a schematic flow diagram of the self-sustaining process for producing liquid fuels from biomass utilizing a hydrocracking catalyst in place of the hydroconversion catalyst in accordance with one embodiment of this invention.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

[0019] The process of this invention, shown in Fig. 1, is a compact, balanced, integrated, multi-stage process for thermochemically transforming biomass into gasoline plus diesel liquid product suitable for use as a transportation fuel without the need for externally provided H₂, CH₄, or water. The first reaction stage or step of this process employs a pressurized, catalytically-enhanced, hydropyrolysis reactor vessel 10 to create a low-char, partially deoxygenated, hydropyrolysis liquid product from which the char is removed. The second reaction stage (subsequent to char removal) employs a hydroconversion reactor vessel 11 in which a hydroconversion step is carried out at substantially the same pressure as the first reaction stage. The product from the second reaction stage is then cooled and separated into liquid and gaseous fractions using high pressure separators 12, 13 and low pressure separator 14. CO plus C₁ - C₃ light gases produced in the two stages are then steam reformed in a steam reformer 15 to produce H₂ using water which is also produced in the process. A key aspect of this invention is that the heat energy required in the process is supplied by the heat of reaction of the deoxygenation reaction, which is exothermic, occurring in both the first and second stages. Another key aspect of this invention is that the biomass feed need not be severely dried and, in fact, the addition of water either in the feed or as a separate feed is advantageous to the process because it enhances *in-situ* H₂ formation through a water-gas-shift reaction.

[0020] The integrated, balanced process of this invention is carried out under conditions which balance the levels of decarboxylation, decarbonylation, and hydrodeoxygenation so that 30-70% of the oxygen present in the biomass is rejected as CO and CO₂ and the remaining 30-70% of the oxygen in the biomass is rejected as H₂O at the end of the process where it is easily separated from the hydrophilic liquid products produced by the process for use in the reforming process. Overall, after reforming of the light gases

produced by the first two stages of the process with water produced by the process, over 95% of the oxygen in the process is rejected as CO₂.

[0021] The unique balancing of reactions is critical to the process of this invention and is achieved through the selection of appropriate catalysts and process conditions in each step. Although each step of the process of this invention can yield a variety of products depending on the catalyst, pressure, temperature, and time on stream employed, only when these processes are integrated in the specific series of steps and process conditions of this invention is it possible to provide a balanced process wherein all of the H₂, CH₄, and water demands of the overall process may be supplied by the biomass, which is critical for creating a fungible fuel that can be sold at a reasonable cost.

[0022] In the first step of the process of this invention shown in Fig. 1, biomass and molecular hydrogen are introduced into a reactor vessel 10 containing a deoxygenation catalyst in which vessel the biomass undergoes hydropyrolysis, producing an output comprising a low-char, partially deoxygenated, hydropyrolysis liquid product, pyrolysis vapors (C₁ - C₃ gases), H₂O, CO, CO₂, and H₂. Although any reactor vessel suitable for hydropyrolysis may be employed, the preferred reactor vessel employs a fluidized bed reactor. The hydropyrolysis step employs a rapid heat up (greater than about 100 W/m²) of the biomass feed such that the residence time of the pyrolysis vapors in the reactor vessel is less than about 5 minutes. In contrast thereto, the residence time of the char is relatively long because it is not removed through the bottom of the reactor vessel and, thus, must be reduced in particle size until the particles are sufficiently small to enable them to be carried out with the vapors exiting proximate the top of the reactor vessel.

[0023] The biomass feed utilized in the process of this invention may be in the form of loose biomass particles having a majority of particles preferably less than about 3mm in size or in the form of a biomass/liquid slurry. However, it will be appreciated by those skilled in the art that the biomass feed may be pretreated or otherwise processed in a manner such that larger particle sizes may be accommodated. Suitable means for introducing the biomass feed into the hydropyrolysis reactor vessel include, but are not limited to, an auger, fast-moving (greater than about 5m/sec) stream of carrier gas, such as inert gases and H₂, and constant-displacement pumps, impellers, or turbine pumps.

[0024] Hydropyrolysis is carried out in the reactor vessel at a temperature in the range

of about 800°F to about 1000°F and a pressure in the range of about 100 psig to about 800 psig. Heating rate of the biomass is preferably greater than about 100W/m². The weight hourly space velocity (WHSV) in gm biomass/gm catalyst/hr for this step is in the range of about .2 to about 10. In conventional hydropyrolysis processes, as previously noted, the objective is to maximize liquid product yield, which requires operation at substantially higher pressures, e.g. 2000 psig. This is because decarboxylation is favored at lower pressures whereas hydrodeoxygenation is favored at higher operating pressures. By maintaining pressures in the process of this invention in the range of 100 to 800 psig, most preferably at about 500 psig, decarboxylation and dehydrodeoxygenation are balanced, but liquid product yield is reduced. At higher pressures, hydrodeoxygenation is favored and the reactions become unbalanced.

[0025] As previously indicated, in the hydropyrolysis step of this invention, the solid biomass feed is rapidly heated, preferably in a hot fluidized bed, resulting in liquid product yields comparable to and possibly better than yields obtained with conventional fast pyrolysis. However, the hydropyrolysis vapors now are in the presence of a catalyst and a high partial pressure of H₂ within the fluidized bed, which provides hydrogenation activity and also some deoxygenation activity. Hydrogenation activity is very desirable for preventing reactive olefins from polymerizing, thereby reducing the formation of unstable free radicals. Similarly, deoxygenation activity is important so that the heat of reaction from hydropyrolysis is supplied by the exothermic deoxygenation reaction, thereby obviating the need for external heating. The advantage of hydropyrolysis over existing pyrolytic processes is that hydropyrolysis avoids the retrograde reactions of pyrolysis, which is usually carried out in an inert atmosphere, most certainly in the absence of H₂, and usually in the absence of a catalyst, thereby promoting the undesirable formation of polynuclear aromatics, free radicals and olefinic compounds that are not present in the original biomass.

[0026] The first stage hydropyrolysis step of this invention operates at a temperature hotter than is typical of a conventional hydroconversion process, as a result of which the biomass is rapidly devolatilized. Thus, the step requires an active catalyst to stabilize the hydropyrolysis vapors, but not so active that it rapidly cokes. Catalyst particles sizes are preferably greater than about 100μm. Although any deoxygenation catalyst suitable for use in the temperature range of this process may be employed in the hydropyrolysis step,

catalysts in accordance with preferred embodiments of this invention are as follows:

[0027] Glass-ceramics catalysts - Glass-ceramics catalysts are extremely strong and attrition resistant and can be prepared as thermally impregnated (i.e. supported) or as bulk catalysts. When employed as a sulfided NiMo, Ni/NiO, or Co-based glass-ceramic catalyst, the resulting catalyst is an attrition resistant version of a readily available, but soft, conventional NiMo, Ni/NiO, or Co-based catalyst. Glass-ceramic sulfided NiMo, Ni/NiO, or Co-based catalysts are particularly suitable for use in a hot fluidized bed because these materials can provide the catalytic effect of a conventional supported catalyst, but in a much more robust, attrition resistant form. In addition, due to the attrition resistance of the catalyst, the biomass and char are simultaneously ground into smaller particles as hydropyrolysis reactions proceed within the reaction vessel. Thus, the char that is ultimately recovered is substantially free of catalyst contaminants from the catalyst due to the extremely high strength and attrition resistance of the catalyst. The attrition rate of the catalyst will typically be less than about 2 weight % per hour, preferably less than 1 weight % per hour as determined in a standard, high velocity jet cup attrition test index test.

[0028] Nickel phosphide catalyst - Ni Phosphide catalysts do not require sulfur to work and therefore will be just as active in a sulfur-free environment as in an environment containing H₂S, COS and other sulfur-containing compounds. Therefore, this catalyst will be just as active for biomass which has little or no sulfur present as with biomass which does contain sulfur (e.g. corn stover). This catalyst may be impregnated on carbon as a separate catalyst or impregnated directly into the biomass feedstock itself.

[0029] Bauxite - Bauxite is an extremely cheap material and, thus, may be used as a disposable catalyst. Bauxite may also be impregnated with other materials such as Ni, Mo, or be sulfided as well.

[0030] Small size spray-dried silica-alumina catalyst impregnated with NiMo or CoMo and sulfided to form a hydroconversion catalyst - Commercially available NiMo or CoMo catalysts are normally provided as large size 1/8-1/16-inch tablets for use in fixed or ebullated beds. In the instant case, NiMo is impregnated on spray dried silica alumina catalyst and used in a fluidized bed. This catalyst exhibits higher strength than a conventional NiMo or CoMo catalyst and would be of the right size for use in a fluidized bed.

[0031] In between the hydropyrolysis and hydroconversion steps, char is removed

from the hydrocarbon liquid product. Char removal has been a major barrier in conventional fast pyrolysis because the char tends to coat filters and react with oxygenated pyrolysis vapors to form viscous coatings which can blind hot process filters. Char may be removed in accordance with the process of this invention by filtration from the vapor stream, or by way of filtering from a wash step - ebullated bed. Backpulsing may be employed in removing char from filters, as long as the hydrogen used in the process of this invention sufficiently reduces the reactivity of the pyrolysis vapors. Electrostatic precipitation, inertial separation, magnetic separation, or a combination of these technologies may also be used to remove char and ash particles from the hot vapor stream before cooling and condensation of the liquid product.

[0032] By virtue of their resistance to attrition, glass-ceramics catalysts are more easily separated from char by energetic inertial separation technologies that typically employ energetic impaction, interception, and/or diffusion processes sometimes combined with electrostatic precipitation to separate, concentrate, and collect char into a secondary stream for recovery. An additional virtue of these materials is that, because they are amenable to magnetic separation (in a reduced state, being attracted to a permanent or electrically-induced magnetic field), magnetic techniques as well as combinations of magnetic, inertial, and electrostatic means may be employed for separating char from these catalysts that are not possible with softer materials.

[0033] In accordance with one embodiment of this invention, hot gas filtration may be used to remove the char. In this case, because the hydrogen has stabilized the free radicals and saturated the olefins, the dust cake caught on the filters should be more easily cleaned than char removed in the hot filtration of the aerosols produced in conventional fast pyrolysis. In accordance with another embodiment of this invention, the char is removed by bubbling first stage product gas through a recirculating liquid. The recirculated liquid used is the high boiling point portion of the finished oil from this process and is thus a fully saturated (hydrogenated), stabilized oil having a boiling point typically above 650°F. Char or catalyst fines from the first reaction stage are captured in this liquid. A portion of the liquid may be filtered to remove the fines and a portion may be recirculated back to the first stage hydropyrolysis reactor. One advantage of using a recirculating liquid is that it provides a way to lower the temperature of the char-laden process vapors from the first reaction stage

to the temperature desired for the second reaction stage hydroconversion step while removing fine particulates of char and catalyst. Another advantage of employing liquid filtration is that the use of hot gas filtration with its attendant, well-documented problems of filter cleaning is completely avoided.

[0034] In accordance with one embodiment of this invention, large-size NiMo or CoMo catalysts, deployed in an ebullated bed, are used for char removal to provide further deoxygenation simultaneous with the removal of fine particulates. Particles of this catalyst should be large, preferably about 1/8-1/16 inch in size, thereby rendering them easily separable from the fine char carried over from the first reaction stage, which is typically less than 200 mesh (~70 micrometers).

[0035] After removal of the char, the C₄+ liquid vapors, together with H₂, CO, CO₂, H₂O, and C₁ - C₃ gases from the first reaction stage hydropyrolysis step is introduced into a second stage reactor vessel 11 in which it is subjected to a second reaction stage hydroconversion step, which preferably is carried out at a lower temperature (500-850°F) than the first reaction stage hydropyrolysis step to increase catalyst life and at substantially the same pressure (100 - 800 psig) as the first reaction stage hydropyrolysis step. The weight hourly space velocity (WHSV) for this step is in the range of about .2 to about 3. The catalyst used in this step should be protected from Na, K, Ca, P, and other metals present in the biomass which can poison the catalyst, which will tend to increase catalyst life. This catalyst also should be protected from olefins and free radicals by the catalytic upgrading carried out in the first reaction stage step. Catalysts typically selected for this step are high activity hydroconversion catalysts, e.g. sulfided NiMo and sulfided CoMo catalysts. In this reaction stage, the catalyst is used to catalyze a water-gas-shift reaction of CO+H₂O to make CO₂ + H₂, thereby enabling *in-situ* production of hydrogen in the second stage reactor vessel 11, which, in turn, reduces the hydrogen required for hydroconversion. NiMo and CoMo catalysts both catalyze the water-gas-shift reaction. The objective in this second reaction stage is once again to balance the deoxygenation reactions. This balancing is done by using relatively low pressures (100-800 psig) along with the right choice of catalyst. In conventional hydrodeoxygenation processes, pressures in the range of about 2000 psig to about 3000 psig are typically employed. This is because the processes are intended to convert pyrolysis oils, which are extremely unstable and difficult to process at lower pressures of H₂.

[0036] Following the hydroconversion step, the oil product will be substantially totally deoxygenated so that it can be directly utilized as a transportation fuel, after it is separated by means of high pressure separators 12, 13 and low pressure separator 14, by distillation into gasoline and diesel portions. In cases where large amounts of C₄, C₅, and C₆ hydrocarbons are produced, a chilled adsorber can be placed after the separator to recover the C₄ and C₅ hydrocarbons from the gas stream. A heavy portion of the liquid such as that condensed in separator 12 is chilled and used to adsorb C₄ and C₅ hydrocarbons from the gas stream. A key aspect of this process is to adjust temperature and pressure and space velocity to balance the level of decarbonylation, decarboxylation and hydrodeoxygenation so that all the H₂ required for the process can be made by reforming the light gases that are produced within the process. If excessive hydrodeoxygenation occurs, then too much H₂ will be required for the process and the system will be driven out of balance. Likewise, if excessive decarboxylation or decarbonylation occurs, too much carbon will be lost to CO₂ and CO instead of being converted into liquid product, as a result of which liquid yields will be reduced.

[0037] After the hydroconversion step, the effluent therefrom is cooled substantially so that gasoline and diesel boiling materials condense and only the light gases remain in the vapor phase. These gases (containing CO, CO₂, CH₄, ethane, and propane) are sent to the steam reformer 15 together with water from the process for conversion into H₂ and CO₂. A portion of these gases are burned in a furnace or other combustor to heat up the remaining portion of gases to the operating temperature of the steam reformer, about 1700°F. Steam reformers require a 3/1 steam-to-hydrocarbon ratio in their feed to push the reaction equilibrium, but this is far more than the amount required for reaction. The steam is recovered and recycled around inside the steam reformer. The CO₂ is removed from the process by pressure swing absorption (PSA) and the H₂ is recirculated back to the first reaction stage (hydropyrolysis) of the process. The product liquid may be separated into diesel and gasoline fractions which are suitable for use as transportation fuels.

[0038] In addition, this process is also balanced with respect to water so that enough water is made in the process to provide all the water needed in the steam reforming step. In accordance with one embodiment of this invention, the amount of water employed is such that the overall process output contains substantially only CO₂ and liquid products, thereby

avoiding an additional process step for excess water disposal. It will be appreciated by those skilled in the art that the use of steam reforming in combination with hydropyrolysis and hydroconversion steps as set forth herein only makes sense where the objective is to provide a self-sustaining process in which the ratio of O₂ in H₂O to O₂ in CO and CO₂ produced by the process is about 1.0. In the absence of such an objective, steam reforming is not necessary because H₂ required for the hydropyrolysis step could still be provided by external sources. If one were to employ steam reforming in the absence of the objectives stated herein, one would not end up with the self-sustaining process of this invention in which the process output consists essentially of liquid product and CO₂.

[0039] In accordance with one embodiment of this invention, the heat generated in the second reaction stage may be used to supply all or part of the heat needed to drive the hydropyrolysis step in the first reaction stage. In accordance with one embodiment of this invention, the process also employs recirculation of the heavy finished products as a wash liquid in the second step as stated herein above to capture process fines exiting the first stage pyrolysis reactor and control the heat of reaction. In accordance with one embodiment of this invention, this liquid is also recirculated to the hydroconversion and possibly to the first stage hydropyrolysis step to regulate the generation of heat in each step. The rate of recirculation is preferably in the range of about 3-5 times the biomass feed rate. This is necessary because hydrodeoxygenation is a strongly exothermic reaction.

[0040] In accordance with one embodiment of this invention, the biomass feed is a high lipid containing aquatic biomass such as algae or an aquatic plant such as lemna, enabling production of the same deoxygenated diesel oil which may be made from lipids extracted from the algae or lemna plus additional gasoline and diesel which may be made from the remainder of the aquatic biomass. This is particularly attractive because lipid extraction is expensive. By contrast, conventional fast pyrolysis of algae and other aquatic biomass would be very unattractive because the uncontrolled thermal reactions characteristic of fast pyrolysis would degrade these lipids. Thus, the integrated process of this invention is ideal for aquatic biomass conversion because it may be carried out on aquatic biomass which is usually only partially dewatered and still produce high quality diesel and gasoline product.

[0041] The process of this invention provides several distinct advantages over

conventional fast pyrolysis-based processes in that it produces a negligible to low-char, partially deoxygenated, stabilized product from which residual char can be easily separated by hot gas filtration or contacting with a recirculated liquid; clean, hot hydropyrolysis oil vapors can be directly upgraded to a final product in a close-coupled second catalytically-enhanced process unit operated at almost the same pressure as was employed upstream; and upgrading is carried out quickly before degradation can occur in the vapor produced from the hydropyrolysis step.

[0042] The liquid product produced by this process should contain less than 5% oxygen and preferably less than 2% oxygen with a low total acid number (TAN) and should exhibit good chemical stability to polymerization or a reduced tendency to reactivity. In the preferred embodiment of this invention wherein the total oxygen content of the product is reduced below 2%, the water and hydrocarbon phases will easily separate out in any normal separation vessel because the hydrocarbon phase has become hydrophobic. This is a significant advantage when compared to conventional pyrolysis in which the water is miscible with and mixed in with the highly oxygenated pyrolysis oil. Table 1 presents an estimated material balance for a balanced hydropyrolysis + hydroconversion process in accordance with this invention utilizing a mixed hardwood feed. Because the fungible fuels produced in the disclosed process have low oxygen content, any excess water produced from this process is relatively free of dissolved hydrocarbons and will likely contain less than 2000ppm dissolved total organic carbon (TOC), rendering it suitable for irrigation in arid areas. Additionally, the finished hydrocarbon product now may be easily transportable, has a low total acid number (TAN), and excellent chemical stability. In conventional fast pyrolysis, the pyrolysis oils typically contain 50-60% oxygen in the form of oxygenated hydrocarbons and 25% dissolved water. Therefore, final products transportation costs for the integrated hydropyrolysis + hydroconversion process of this invention are less than half of the costs for conventional fast pyrolysis. Furthermore, water produced in the proposed process becomes a valuable byproduct especially for arid regions.

Table 1. Estimated Material Balance for a Balanced Hydropyrolysis + Hydroconversion Process Utilizing a Mixed Hardwood Feed*

	Hydropyrolysis + hydroconversion balance, Wt%	Overall system process balance, Wt%
Biomass feed	100	100
H ₂ feed	3.7	-
Gasoline + diesel product	29	29
Char product	8	8
Water	22.5	.7
CO ₂	27.5	59.4
Hydrocarbon gas	16.7	2.9

* All H₂ is made by reforming light gases and no external natural gas is required

[0043] One of the disadvantages of the process of this invention as described herein above is that it produces n-hexane (NC₆) and n-pentane (NC₅) in quantity, which is gasoline boiling range material, but which is low in octane. In addition, with a cellulosic feedstock, the process produces a mostly very light gasoline boiling range material and not very much diesel fuel. One approach to processing the suite of fuels produced by this process would be to isomerize the NC₅ and NC₆ product in a petroleum refinery isomerization unit. However, NC₅ and NC₆ are very stable molecules, which conventionally require a very difficult multi-step process to turn them into higher boiling point components. The steps required would involve dehydrogenation to make olefins and then polymerization.

[0044] In accordance with one embodiment of this invention, a hydrocracking catalyst is provided upstream or downstream of the hydroconversion step, thereby isomerizing the normal pentane and normal hexane in the liquid products from the hydropyrolysis step into isopentane and isohexane, respectively, to increase the octane of the liquid products of the process. In accordance with one particularly preferred embodiment as shown in Figs. 3 and 4, the hydrocracking catalyst is provided between the hydropyrolysis step and the hydroconversion step of the process and receives the products output by the hydropyrolysis step. In accordance with one embodiment as shown in Fig. 4, the hydrocracking catalyst is disposed within a separate reactor vessel 24 upstream of the hydroconversion step reactor vessel 11. In accordance with another embodiment as shown in Fig. 3, the hydroconversion reactor vessel comprises two compartments, an upstream

compartment 22 and a downstream compartment 23, in fluid communication with each other, and the hydrocracking catalyst is disposed in the upstream compartment in which the n-pentane and n-hexane from the hydropyrolysis step are converted to isopentane and isohexane, respectively, and the hydroconversion catalyst is disposed in the downstream compartment. In accordance with another embodiment of this invention as shown in Figs. 2 and 5, the hydrocracking catalyst is provided downstream of the hydroconversion step. In accordance with one embodiment as shown in Fig. 2, the hydroconversion catalyst is provided in the upstream compartment 20 of the two compartment hydroconversion reactor vessel in which the partially deoxygenated hydropyrolysis liquid from the hydropyrolysis step of the integrated process is converted to a substantially fully deoxygenated hydrocarbon liquid, a gaseous mixture comprising CO, CO₂, and light hydrocarbon gases (C₁ - C₃), and the hydrocracking catalyst is provided in the downstream compartment 21. In accordance with one embodiment, the hydrocracking catalyst is disposed in a separate hydrocracking reactor vessel 24 as shown in Fig. 5.

[0045] In accordance with one embodiment as shown in Fig. 8, the hydrocracking catalyst is disposed within a hydrocracking reactor vessel 27, replacing the hydroconversion reactor vessel and eliminating entirely the hydroconversion catalyst, in order to polymerize the oxygen containing molecules of the liquid product from the hydropyrolysis step while simultaneously removing the oxygen from the structure. As a result, the product may be shifted toward C₁₂ and C₁₈ products and away from the light gasoline boiling range molecules, thereby producing diesel boiling range materials which are particularly suitable for use in trucks and jet engines.

[0046] In accordance with another embodiment of this invention as shown in Fig. 6, the hydrocracking catalyst may be disposed in a separate hydrocracking reactor vessel 24 operating in parallel with the hydroconversion reactor vessel 11, thereby permitting controlled, simultaneous polymerization and isomerization, which would allow one process configuration for the production of either gasoline or diesel fuel as desired.

[0047] In accordance with yet a further embodiment of this invention as shown in Fig. 7, the hydrocracking catalyst is provided in a hydrocracking reactor vessel 26, replacing the hydropyrolysis reactor vessel.

[0048] Suitable hydrocracking catalysts for use in the process of this invention are

acidic, metal-containing catalysts which provide both a hydrogenation function (from the metal) and an acidic function. Exemplary of such catalysts are CoMo, NiMo or NiW catalyst disposed on amorphous silica alumina, e.g. 75% SiO_2 and 25% Al_2O_3 . Any bi-functional acidic, metal-containing catalysts which are capable of withstanding the operating conditions of the process of this invention may be employed.

[0049] While in the foregoing specification this invention has been described in relation to certain preferred embodiments thereof, and many details have been set forth for purpose of illustration, it will be apparent to those skilled in the art that the invention is susceptible to additional embodiments and that certain of the details described herein can be varied considerably without departing from the basic principles of the invention. The scope of the claims should not be limited by the preferred embodiments set forth in the examples, but should be given the broadest interpretation consistent with the description as a whole.

WHAT IS CLAIMED IS:

1. A process for producing liquid products from biomass comprising the steps of:
 - a) hydropyrolyzing biomass in a hydropyrolysis reactor vessel containing molecular hydrogen and a deoxygenating catalyst, producing a hydropyrolysis reactor output comprising CO₂, CO and C₁-C₃ gas, a partially deoxygenated hydropyrolysis product and char;
 - b) removing said char from said partially deoxygenated hydropyrolysis product;
 - c) hydroconverting said partially deoxygenated hydropyrolysis product in a hydroconversion reactor vessel using a hydroconversion catalyst in the presence of the CO₂, CO and C₁-C₃ gas generated in step a), producing a substantially fully deoxygenated hydrocarbon liquid and a gaseous mixture comprising CO, CO₂, and C₁-C₃ light hydrocarbon gases;
 - d) steam reforming at least a portion of said gaseous mixture, producing reformed molecular hydrogen; and
 - e) introducing said reformed molecular hydrogen into said reactor vessel for hydropyrolyzing said biomass, wherein steps a) and c) are operated at conditions under which about 30% to about 70% of oxygen in said biomass is converted to H₂O and about 30% to about 70% of said oxygen is converted to CO and CO₂.
2. The process of claim 1, wherein a portion of said substantially fully deoxygenated hydrocarbon liquid created in step c) is recycled to said hydropyrolysis reactor vessel or said hydroconversion reactor vessel to control temperature therein.
3. The process of claim 2, wherein said substantially fully deoxygenated hydrocarbon liquid is separated into diesel and gasoline fractions for use as transportation fuel.
4. The process of claim 1, wherein at least one of said deoxygenating catalyst and said hydroconversion catalyst is a glass-ceramic material.
5. The process of claim 1, wherein a hydrocracking catalyst is disposed upstream of or downstream of said hydroconversion reactor vessel, either within said hydroconversion reactor vessel or in a separate upstream or downstream hydrocracking vessel, or wherein said

hydrocracking catalyst is disposed in a separate hydrocracking vessel operating in parallel with said hydroconversion reactor vessel.

6. The process of claim 5, wherein said hydrocracking catalyst is an acidic, metal-containing catalyst which provides both a hydrogenation function and an acidic function.
7. The process of claim 5, wherein all of said steps a), c), and d) are carried out at a substantially same pressure.
8. The process of claim 7, wherein said pressure is in a range of about 100 to about 800 psig.
9. The process of claim 1, wherein a hydrocracking catalyst is provided downstream of said hydroconversion catalyst.
10. The process of claim 1, wherein said hydroconversion catalyst catalyzes both a water-gas-shift reaction and hydroconversion.
11. The process of claim 1, wherein all of said steps a), c), and d) are carried out at a substantially same pressure.
12. The process of claim 11, wherein said pressure is in a range of about 100 to about 800 psig.
13. The process of claim 1, wherein said hydroconversion is carried out at a temperature in a range of about 500° F to about 1000° F and said hydroconversion is carried out at a temperature in a range of about 500° F to about 850° F.
14. The process of claim 1, wherein said hydroconversion is carried out at a weight hourly space velocity of about 0.2 to about 10 gm biomass/gm catalyst/hr.
15. The process of claim 1, wherein said hydroconversion is carried out with a weight hourly space velocity of about 0.2 to about 3 gm biomass/gm catalyst/hr.

16. The process of claim 1, wherein said hydropyrolysis reactor vessel is a fluidized bed reactor containing a fluidized bed, and a gas residence time in said hydropyrolysis reactor vessel is less than about one minute.
17. The process of claim 16, wherein said char is removed from said fluidized bed reactor substantially only from above said fluidized bed.
18. The process of claim 17, wherein said deoxygenation catalyst is granulated and sufficiently resistant to attrition such that it attrits said char, thereby enabling removal of said char from said fluidized bed reactor substantially only from above said fluidized bed.
19. The process of claim 1, wherein step b) comprises bubbling gases output by said hydropyrolysis reactor vessel through a recirculating liquid comprising a high boiling point portion of said substantially fully deoxygenated hydrocarbon liquid.
20. The process of claim 1, wherein output from said process consists essentially of liquid product and CO₂.
21. The process of claim 1, wherein said hydropyrolysis reactor vessel is a fluidized bed reactor containing a fluidized bed and said char is removed from said fluidized bed reactor by energetic char separation employing at least one of an inertial, electrostatic, and magnetic process.
22. The process of claim 21, wherein said deoxygenating catalyst is a glass-ceramic material.
23. The process of claim 1, wherein, in step d), reformed molecular hydrogen is produced in an amount sufficient for hydropyrolyzing said biomass.
24. The process of claim 1, wherein steam reforming step d) is performed using water produced in step a) and step c) to produce reformed molecular hydrogen.

25. A process for producing liquid products from biomass comprising the steps of:

pyrolyzing said biomass in a hydropyrolysis reactor vessel in the presence of H₂ and a deoxygenating catalyst, producing a hydropyrolysis process output comprising partially deoxygenated hydropyrolysis product and char;

hydroconverting said partially deoxygenated hydropyrolysis product in a hydroconversion reactor vessel in the presence of a hydroconversion catalyst at a hydroconversion pressure in a range of about 100 psig to about 800 psig, producing substantially fully deoxygenated hydrocarbon liquid and a gaseous mixture comprising CO and C₁-C₃ light hydrocarbon gases; and

steam reforming at least a portion of said gaseous mixture, producing reformed H₂ in an amount sufficient for hydropyrolyzing said biomass.

26. The process of claim 25, wherein in a range of about 30% to about 70% of oxygen in said biomass is converted to H₂O and about 30% to about 70% of said oxygen is converted to CO and CO₂.


27. The process of claim 25, wherein a hydrocracking catalyst is disposed upstream of or downstream of said hydroconversion reactor vessel, either within said hydroconversion reactor vessel or in a separate upstream or downstream hydrocracking vessel, or wherein said hydrocracking catalyst is disposed in a separate hydrocracking vessel operating in parallel with said hydroconversion reactor vessel.

28. The process of claim 27, wherein said hydrocracking catalyst is an acidic, metal-containing catalyst which provides both a hydrogenation function and an acidic function.


29. The process of claim 25, wherein said hydroconversion catalyst catalyzes both a water-gas-shift reaction and hydroconversion.

30. The process of claim 25, wherein said hydropyrolyzing is carried out at a hydropyrolysis temperature in a range of about 500° F to about 1000° F and said hydroconverting is carried out at a hydroconversion temperature in a range of about 500° F to about 850° F.
31. The process of claim 25, wherein said substantially fully deoxygenated hydrocarbon liquid is separated into diesel and gasoline fractions for use as transportation fuel.
32. The process of claim 25, wherein said hydropyrolysis reactor vessel is a fluidized bed reactor vessel containing a fluidized bed.
33. The process of claim 25, wherein output from said process consists essentially of liquid product and CO₂.
34. The process of claim 25, wherein a hydrocracking catalyst is provided downstream of said hydroconversion catalyst.
35. The process of claim 25, wherein a hydrocracking catalyst is provided upstream of said hydroconversion catalyst.
36. The process of claim 25, wherein the hydroconversion pressure is in a range of about 100 psig to about 500 psig.
37. The process of claim 25, further comprising separating said char from said hydropyrolysis process output.

1/8

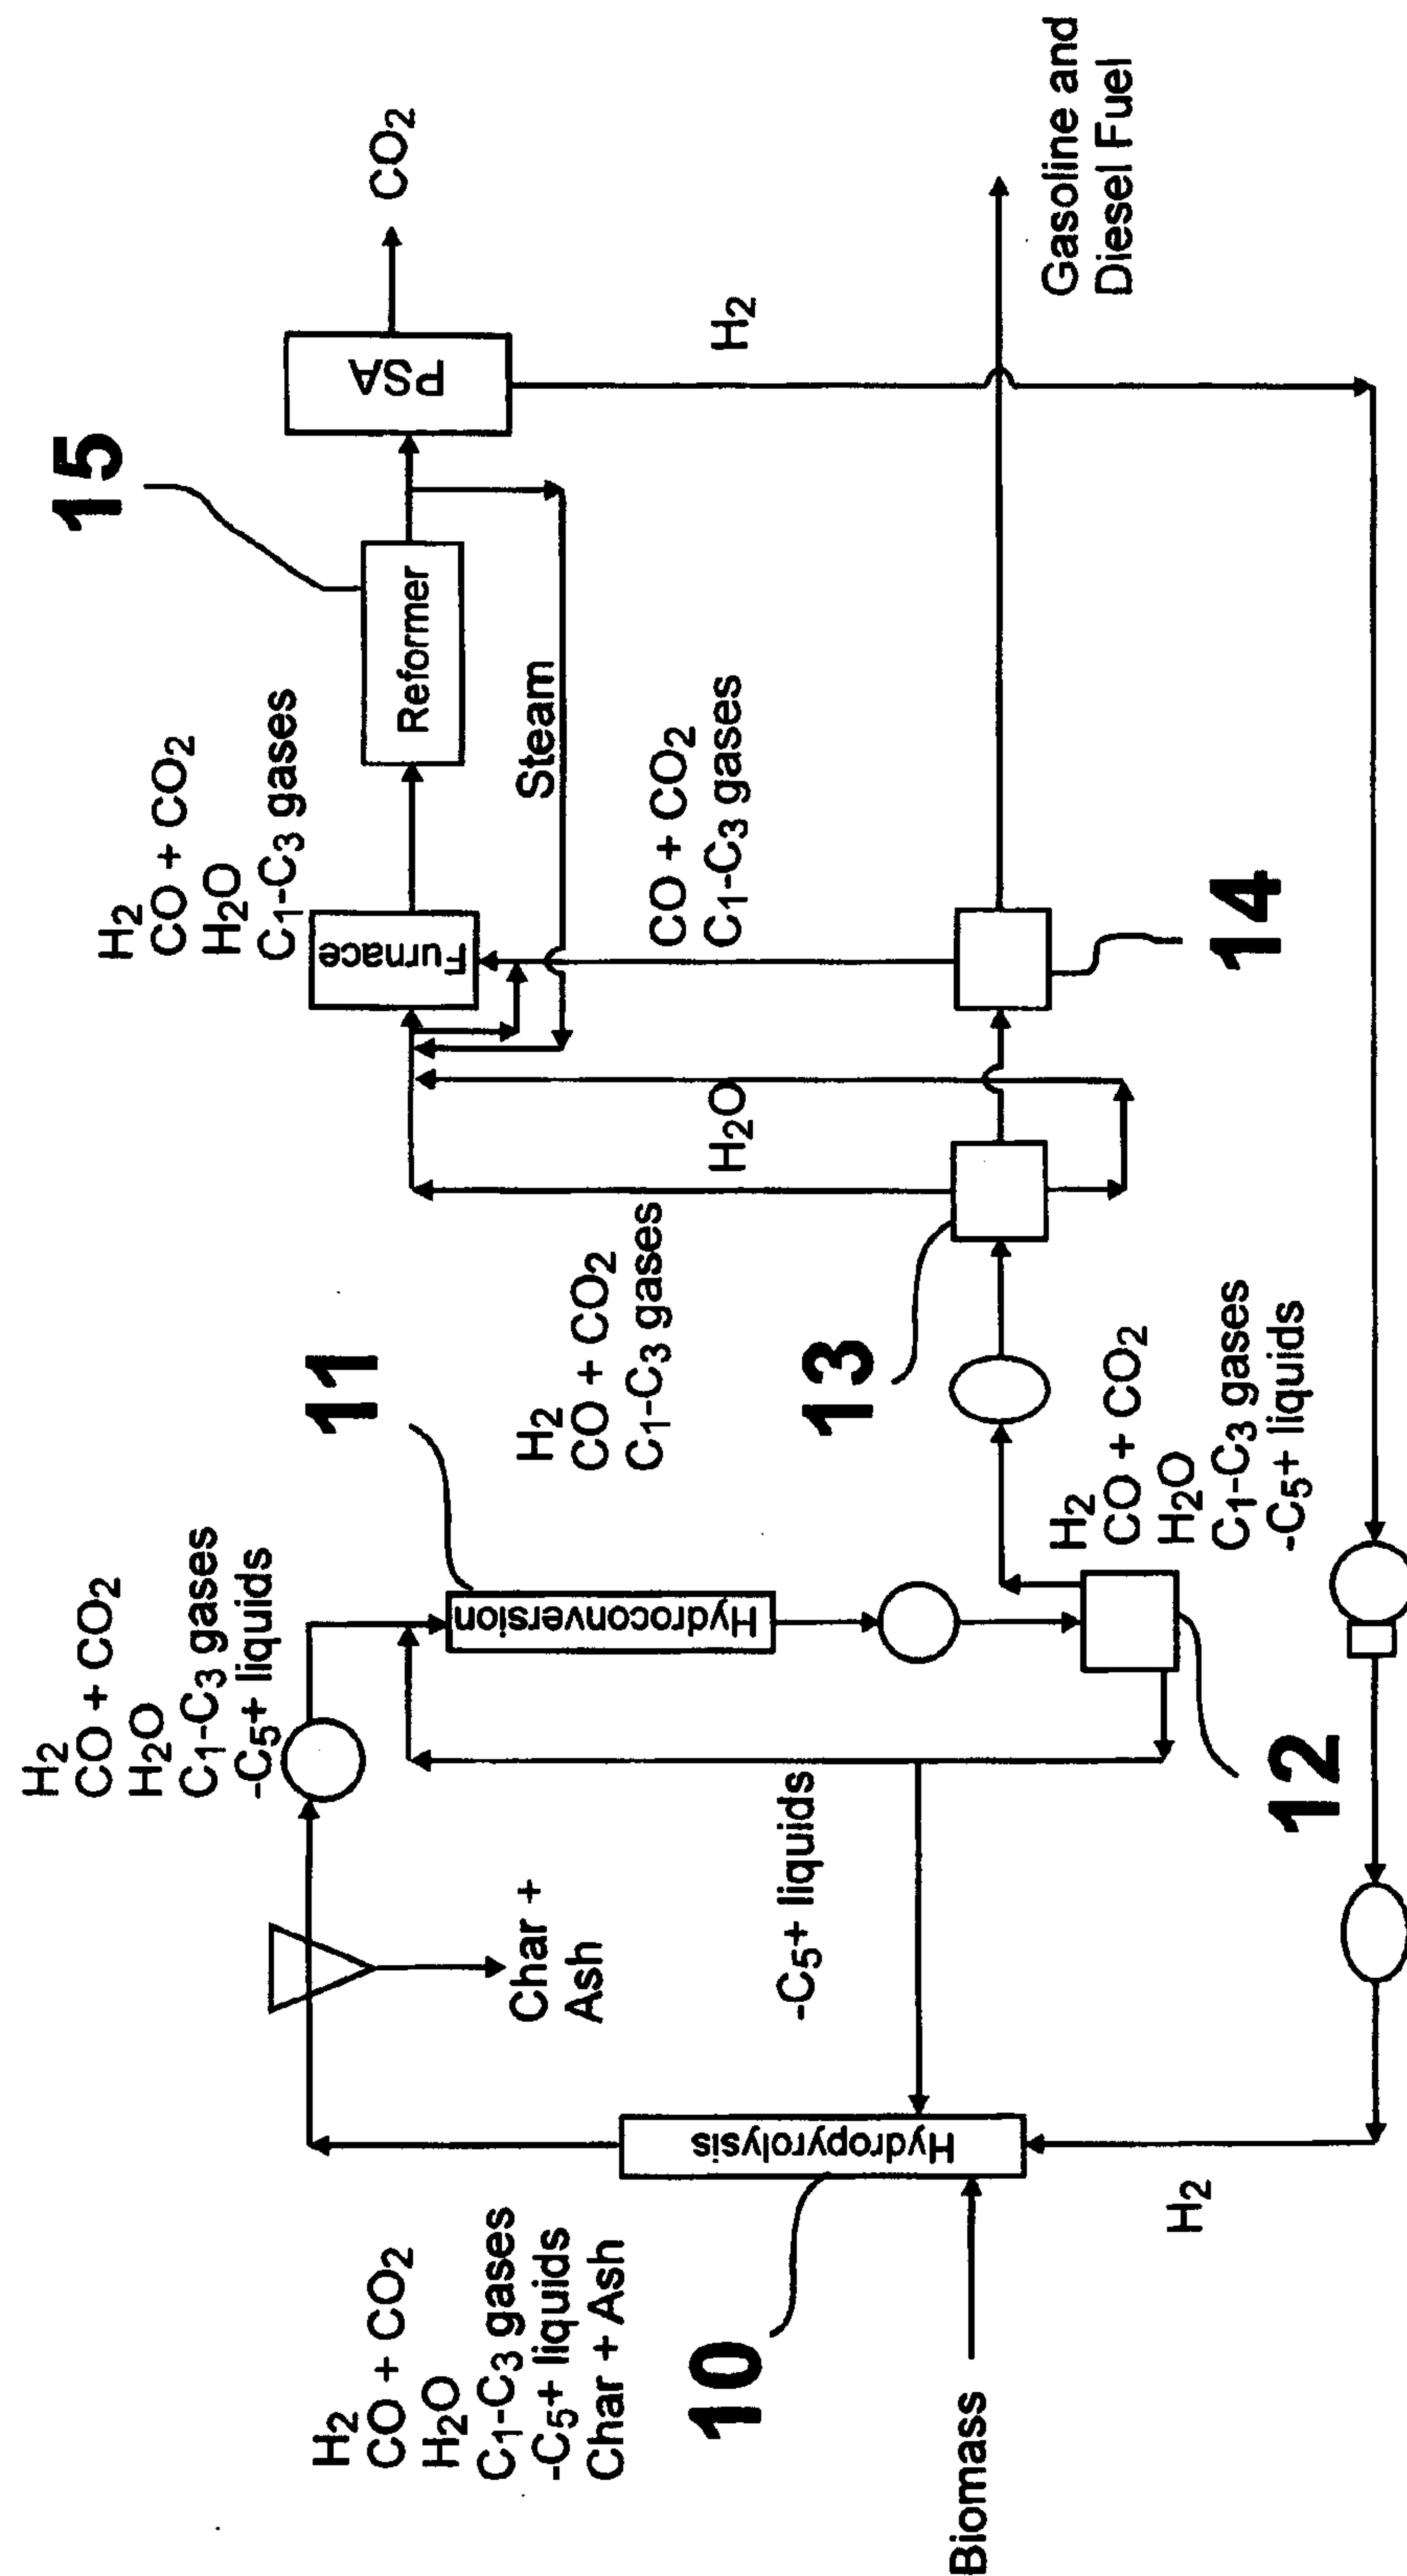


2/8

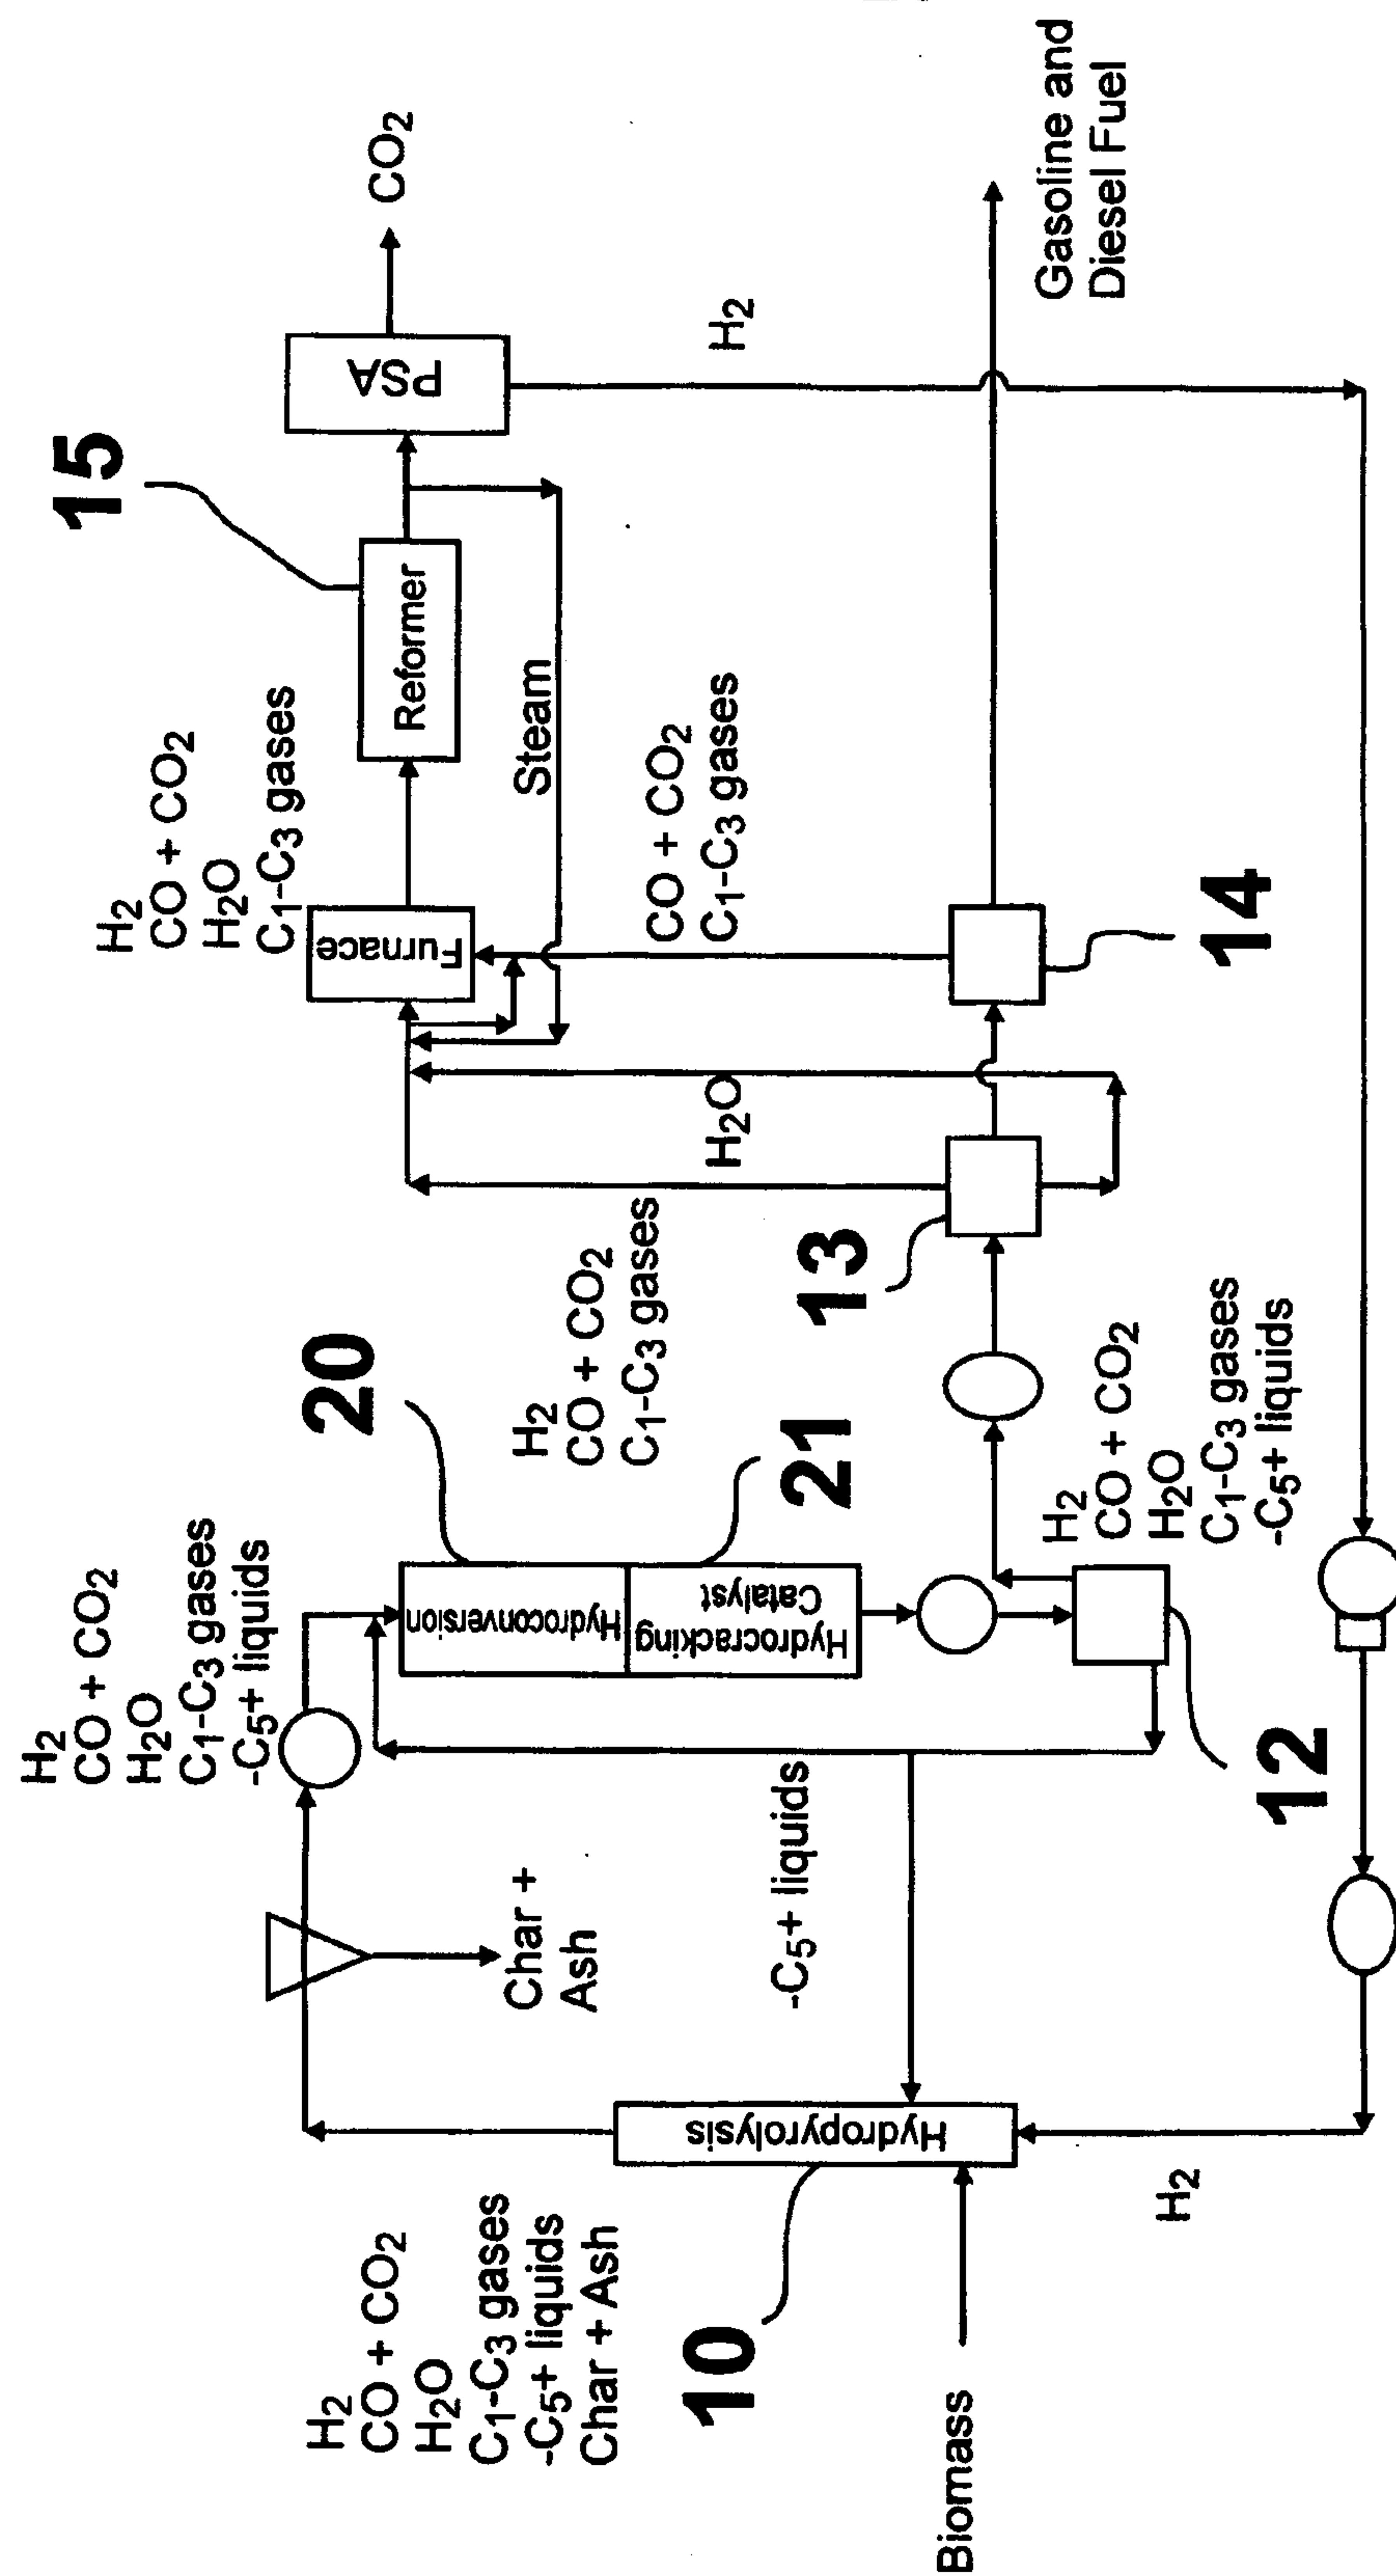


ନାନାମନ୍ଦିର

3/8

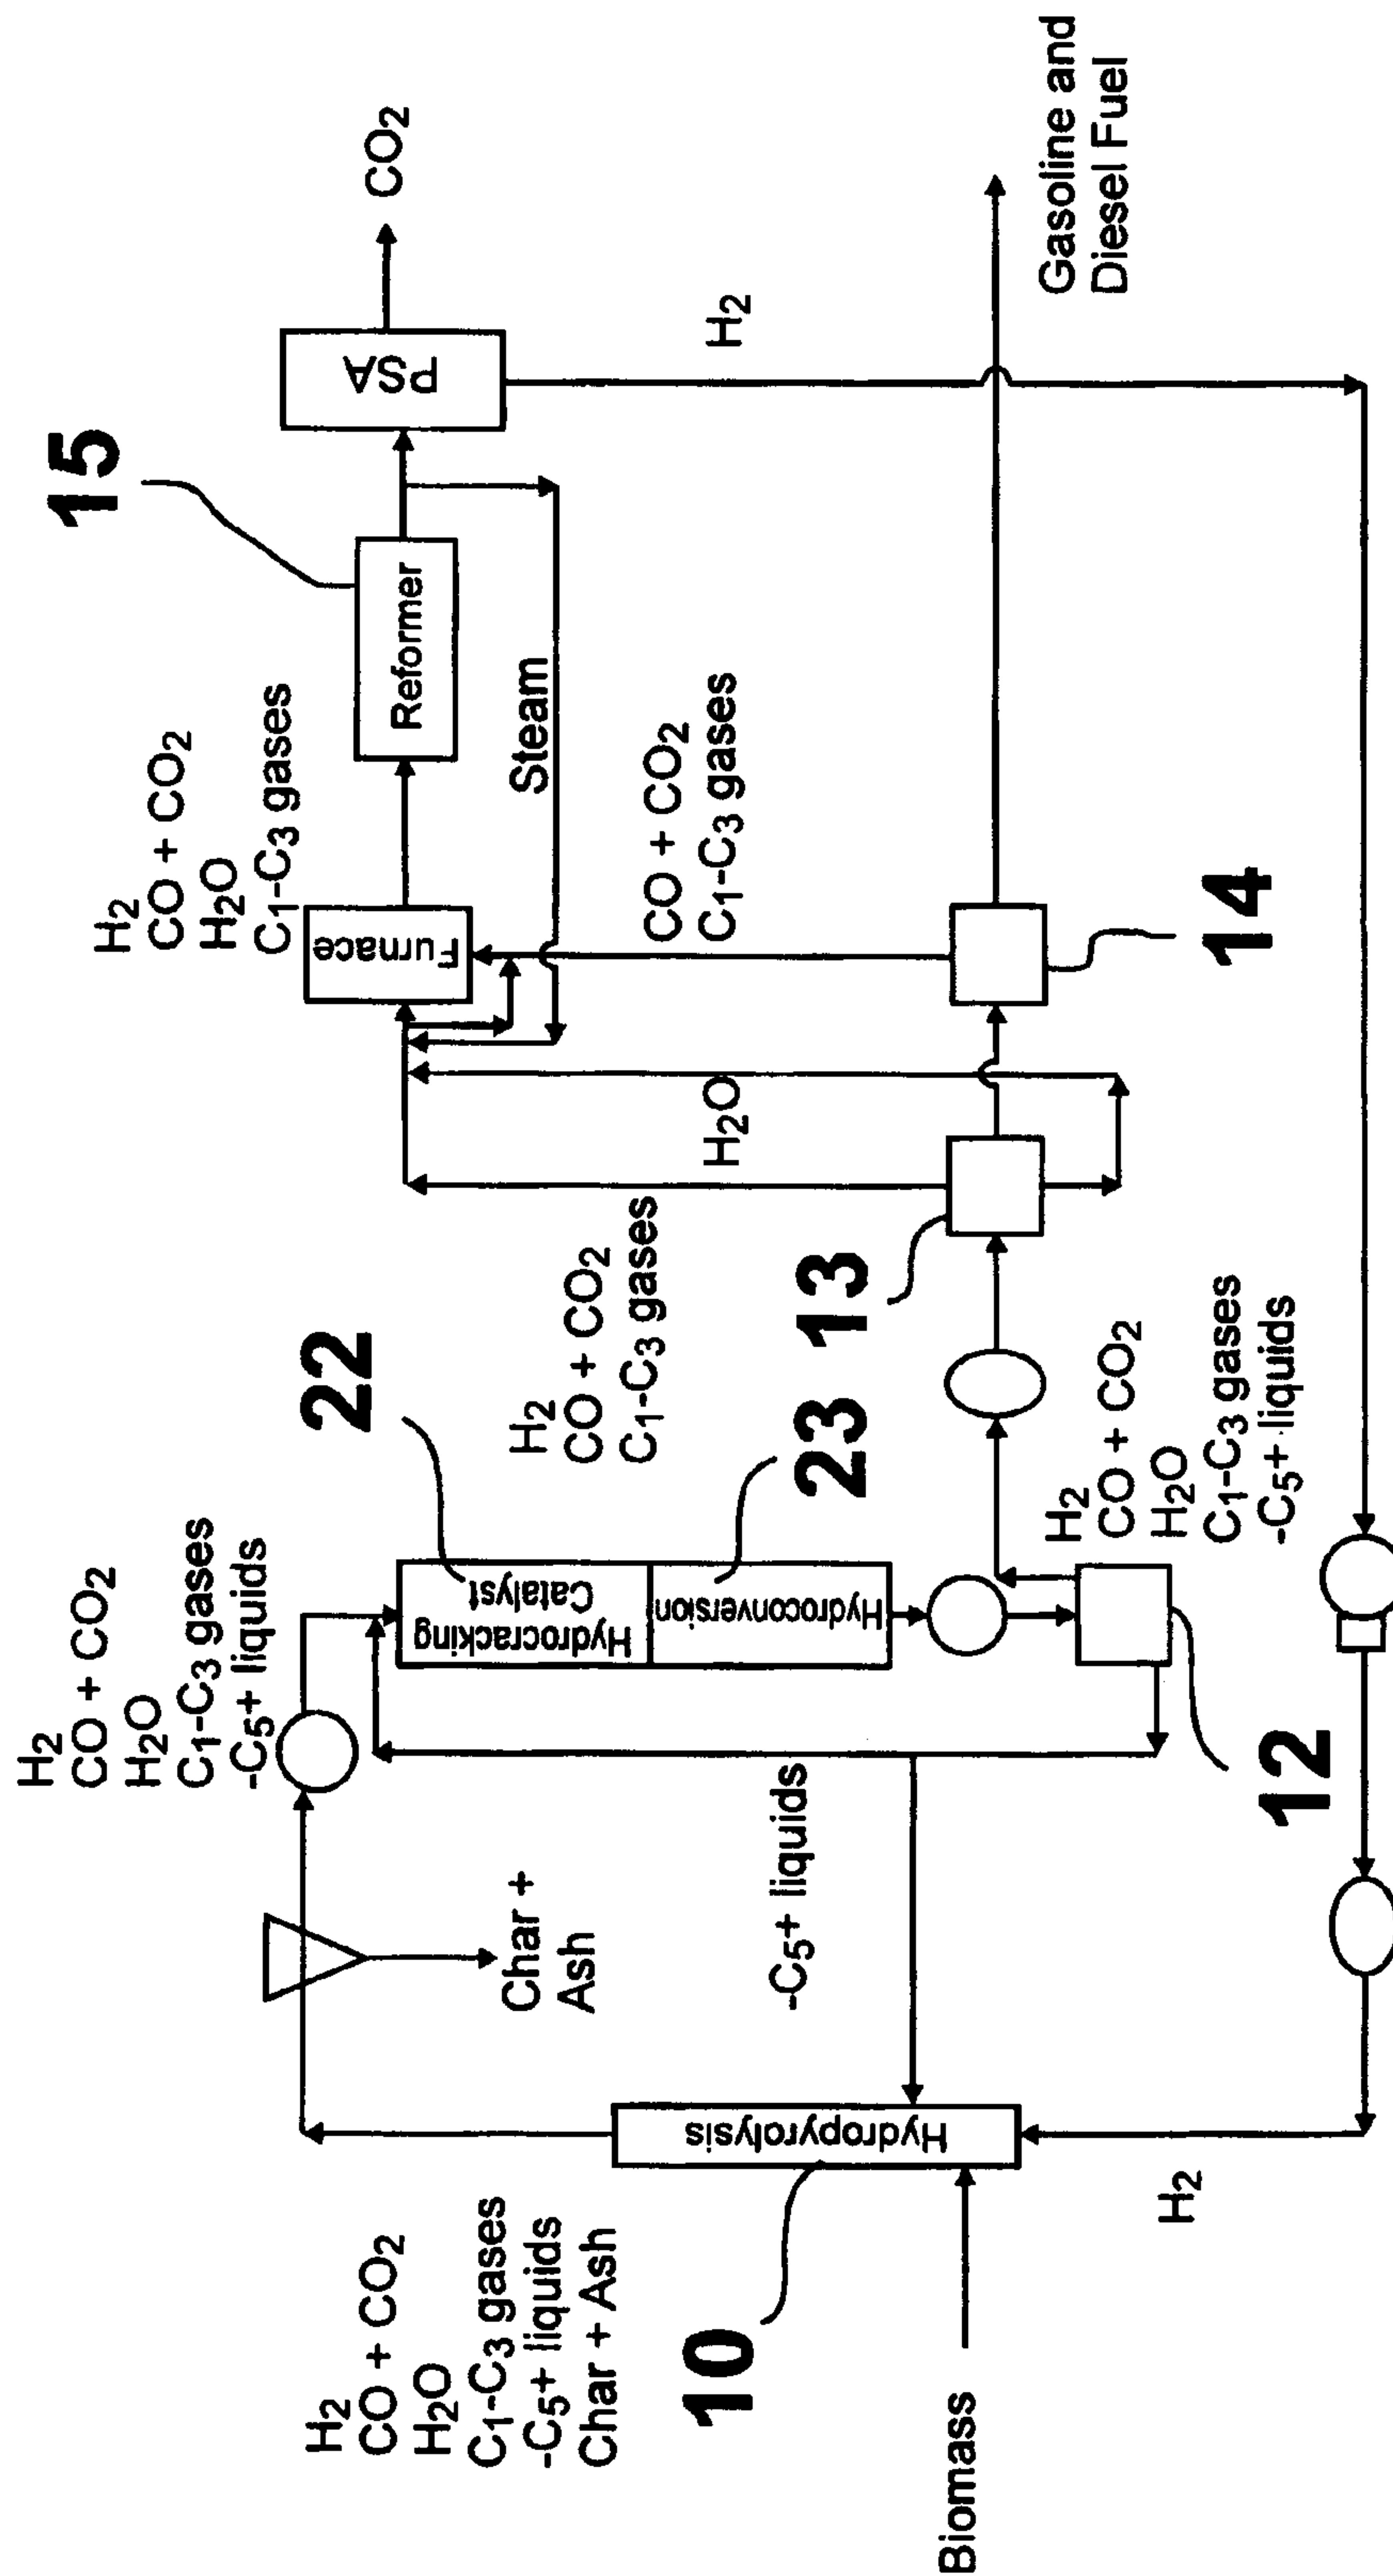


A vertical stack of five black and white icons. From top to bottom: 1. A double heart shape, consisting of two heart outlines joined at their bases. 2. A single square. 3. A double circle shape, consisting of two circles joined at their centers. 4. A horizontal bar with a square on its left side. 5. A double L shape, consisting of two L-shaped blocks joined at their vertical stems.


4/8

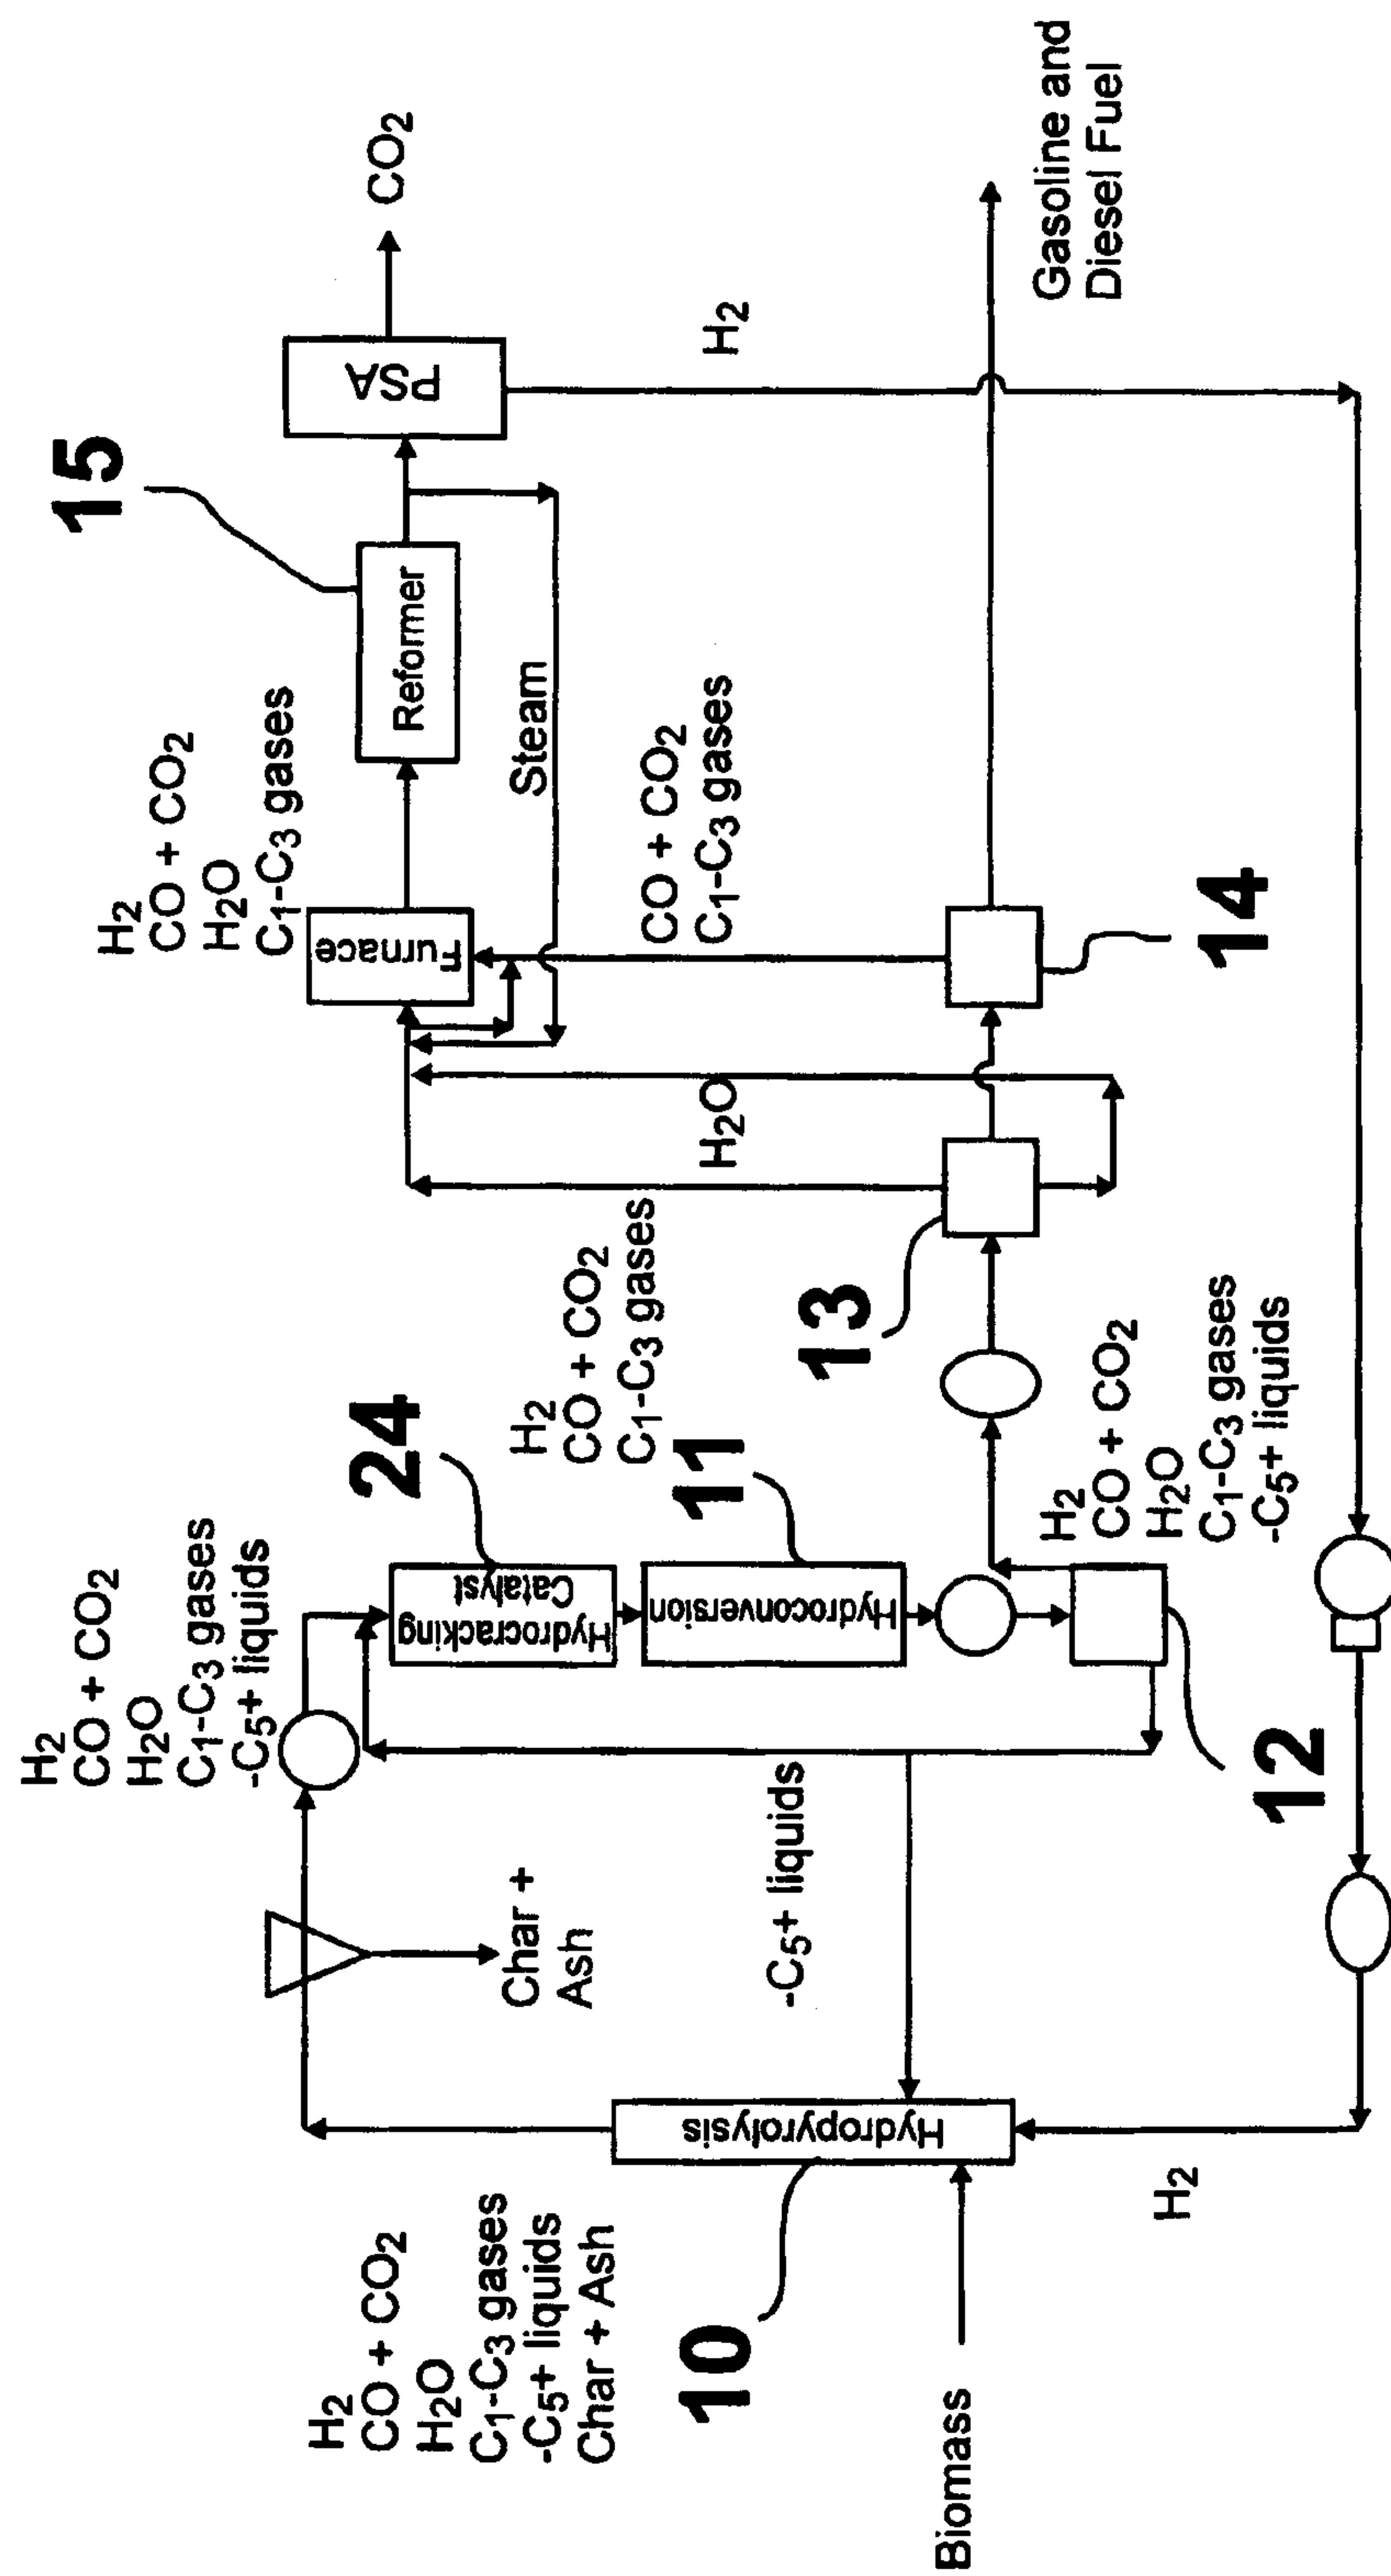


5/8

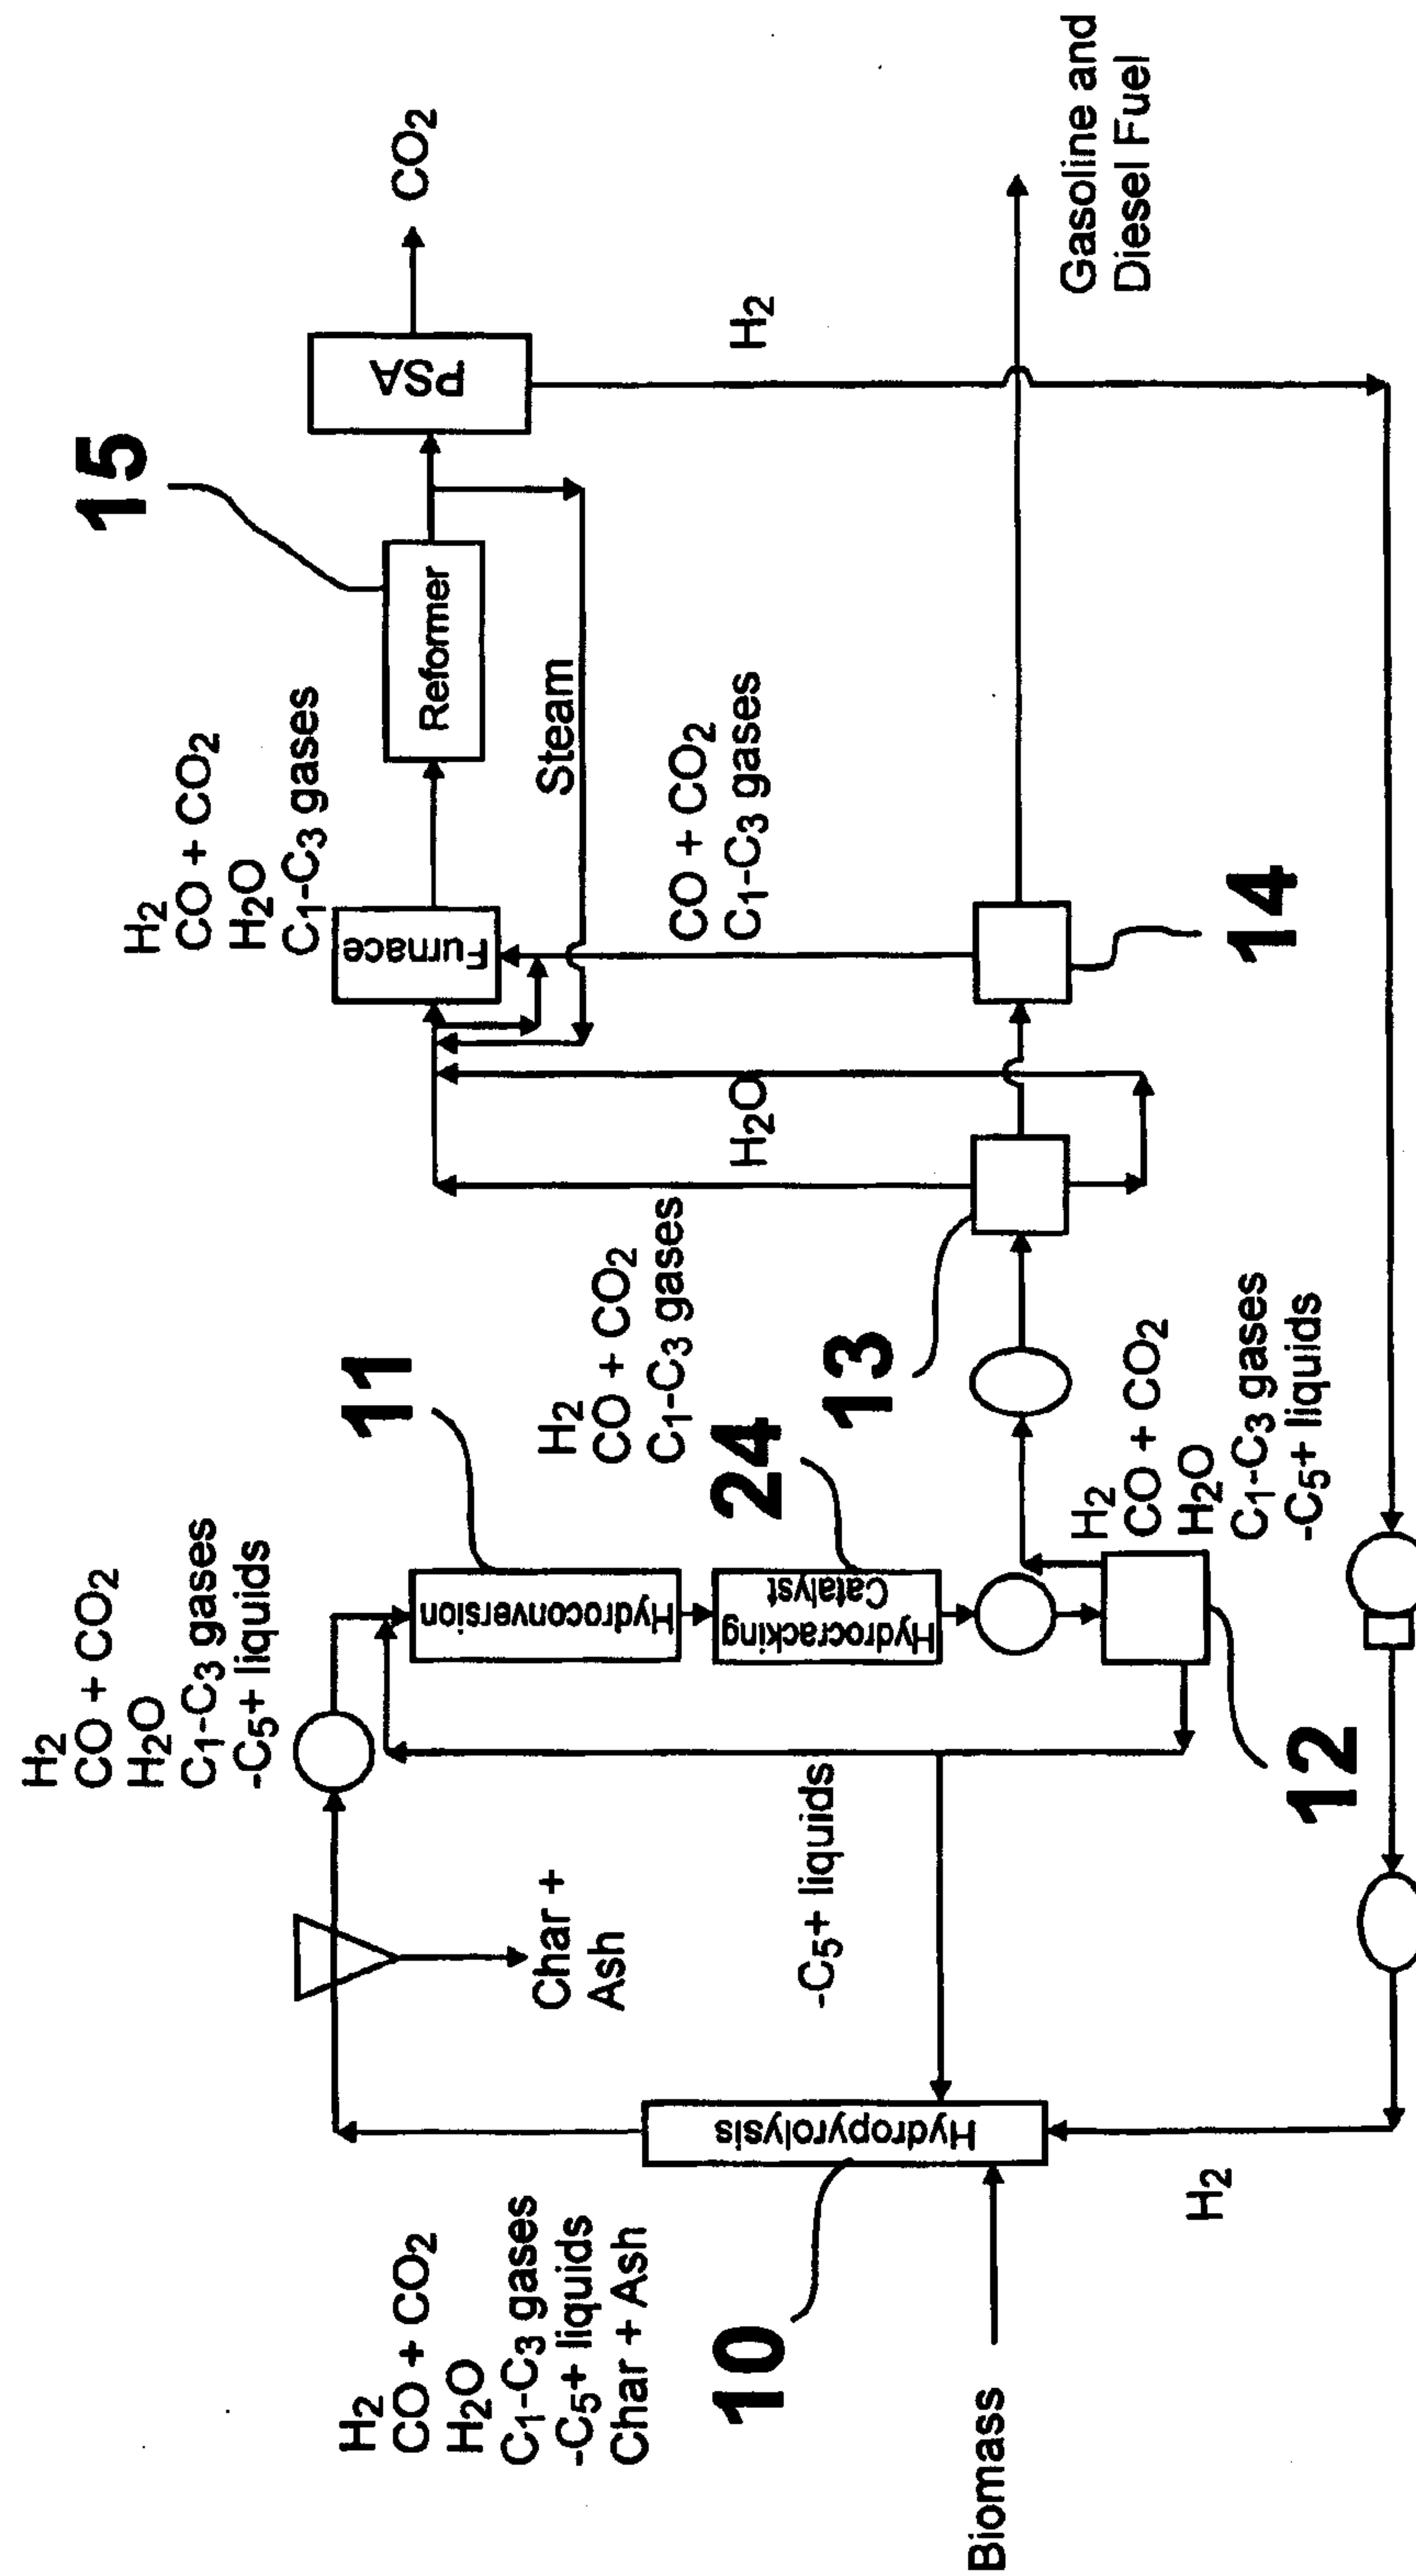


6/8

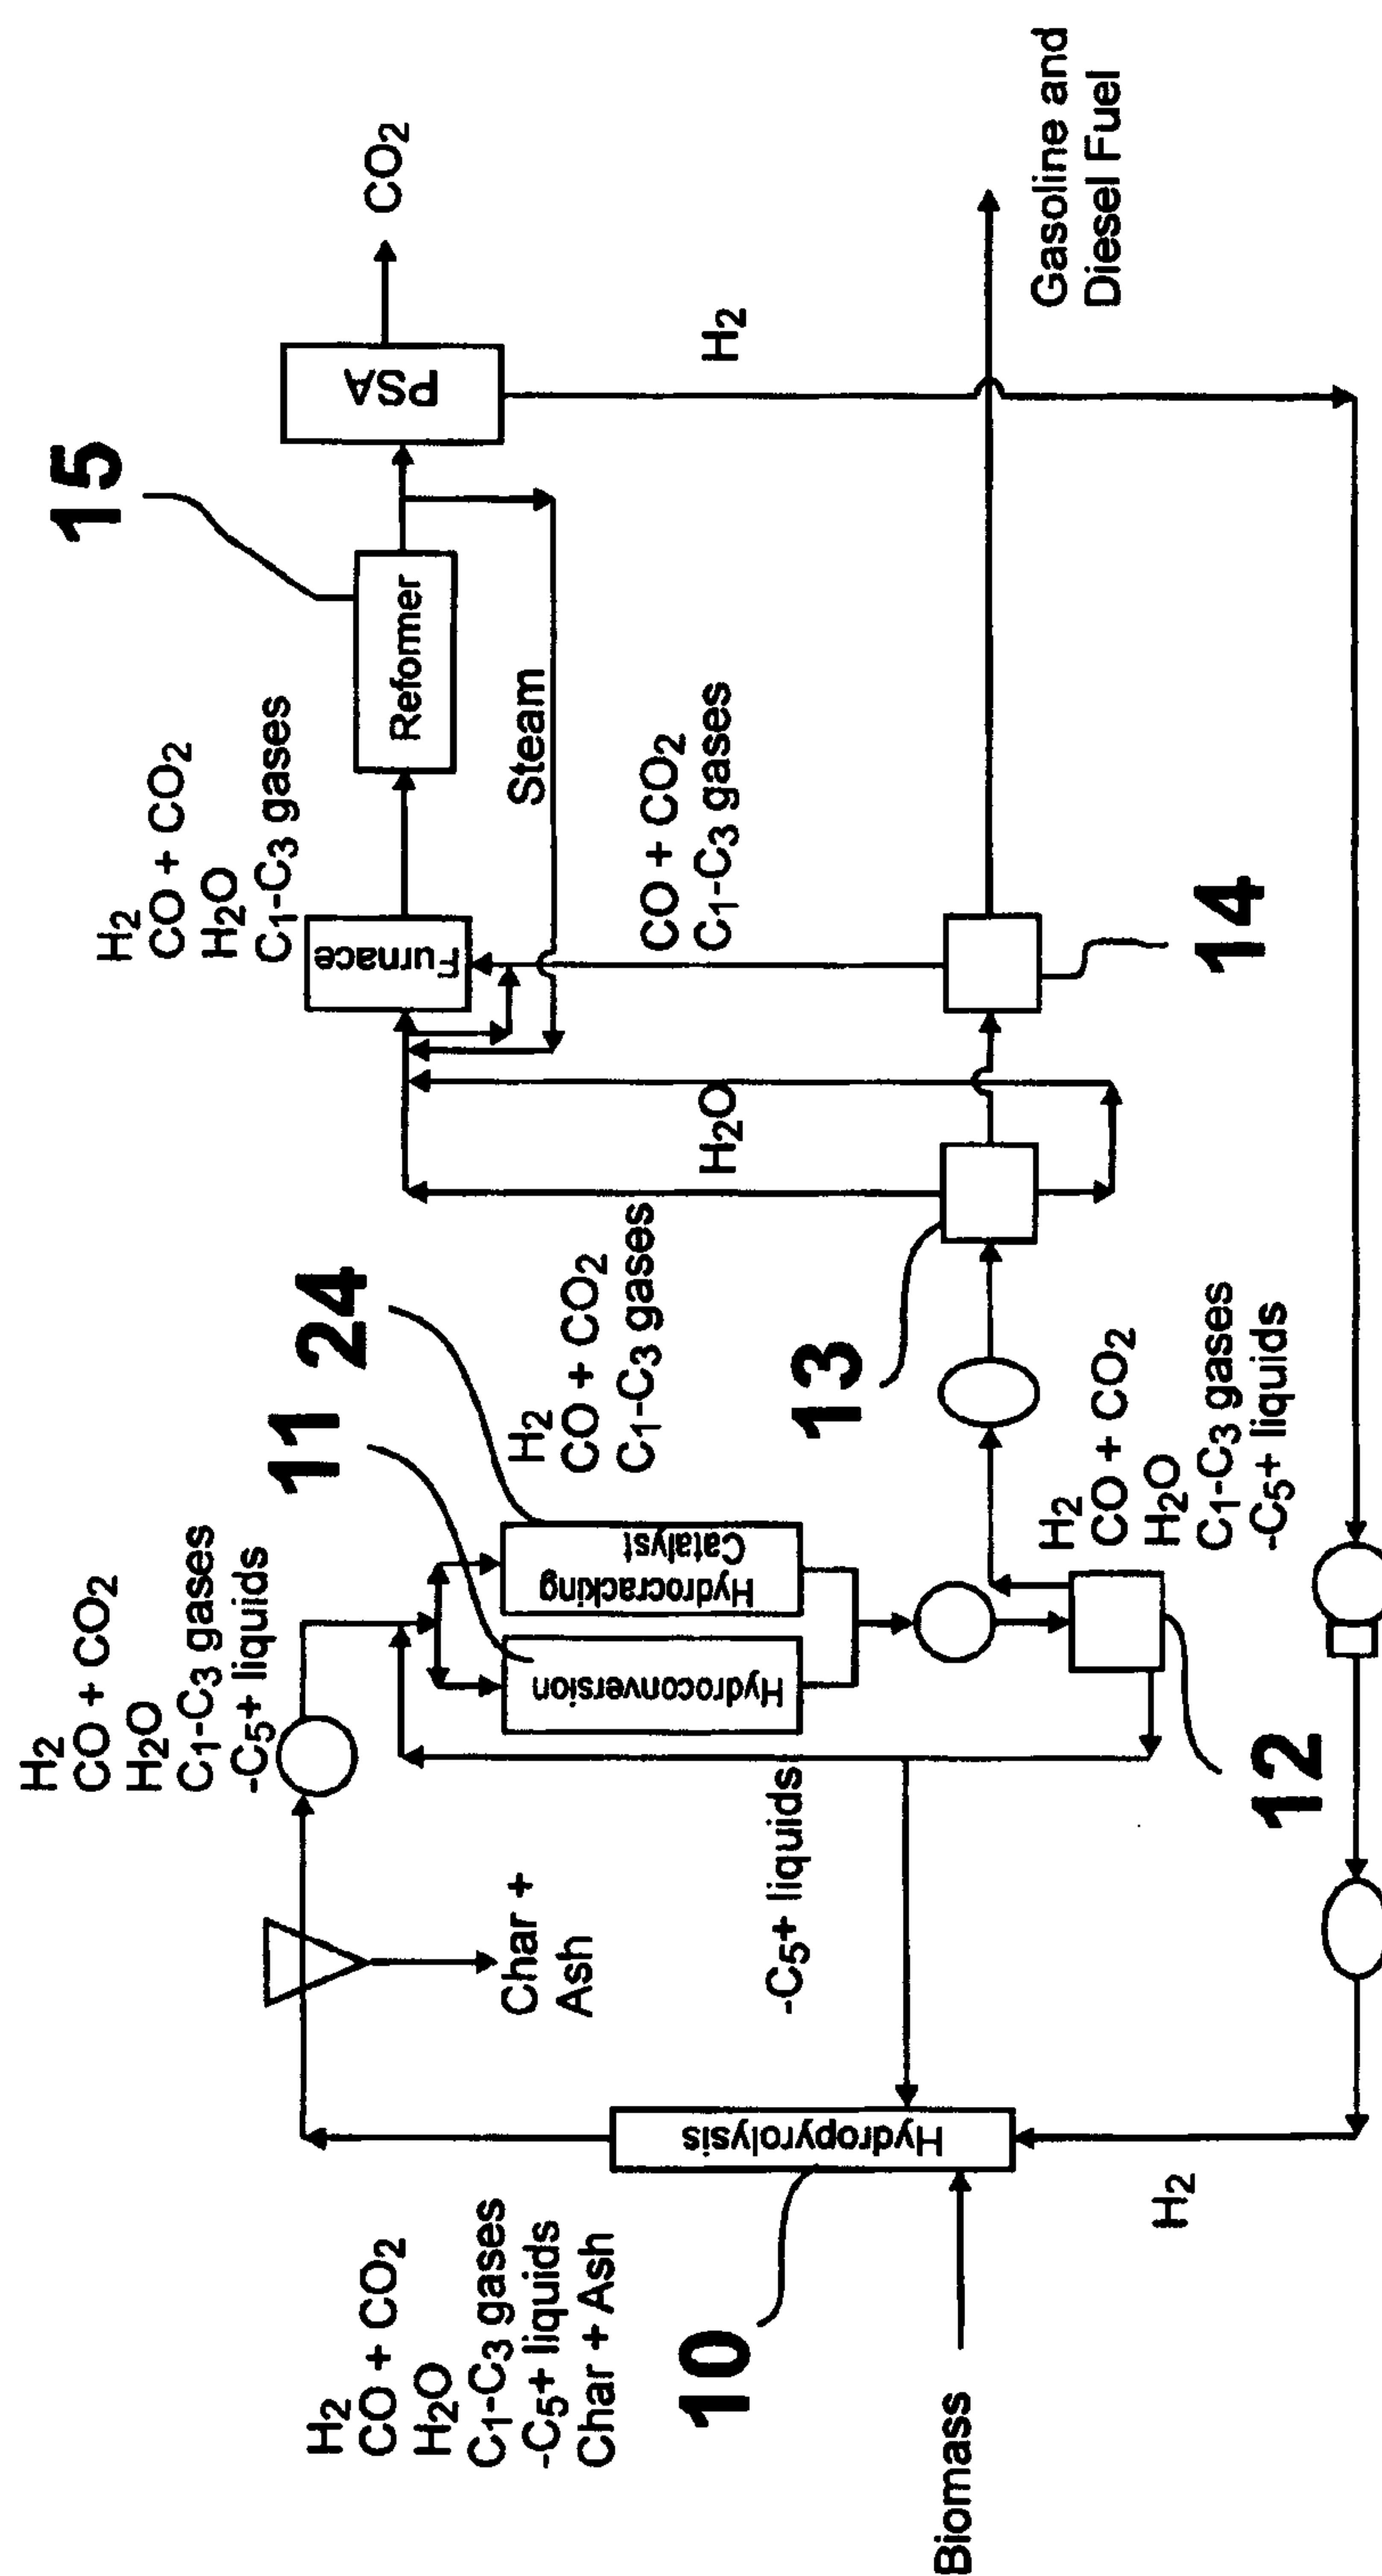

7/8

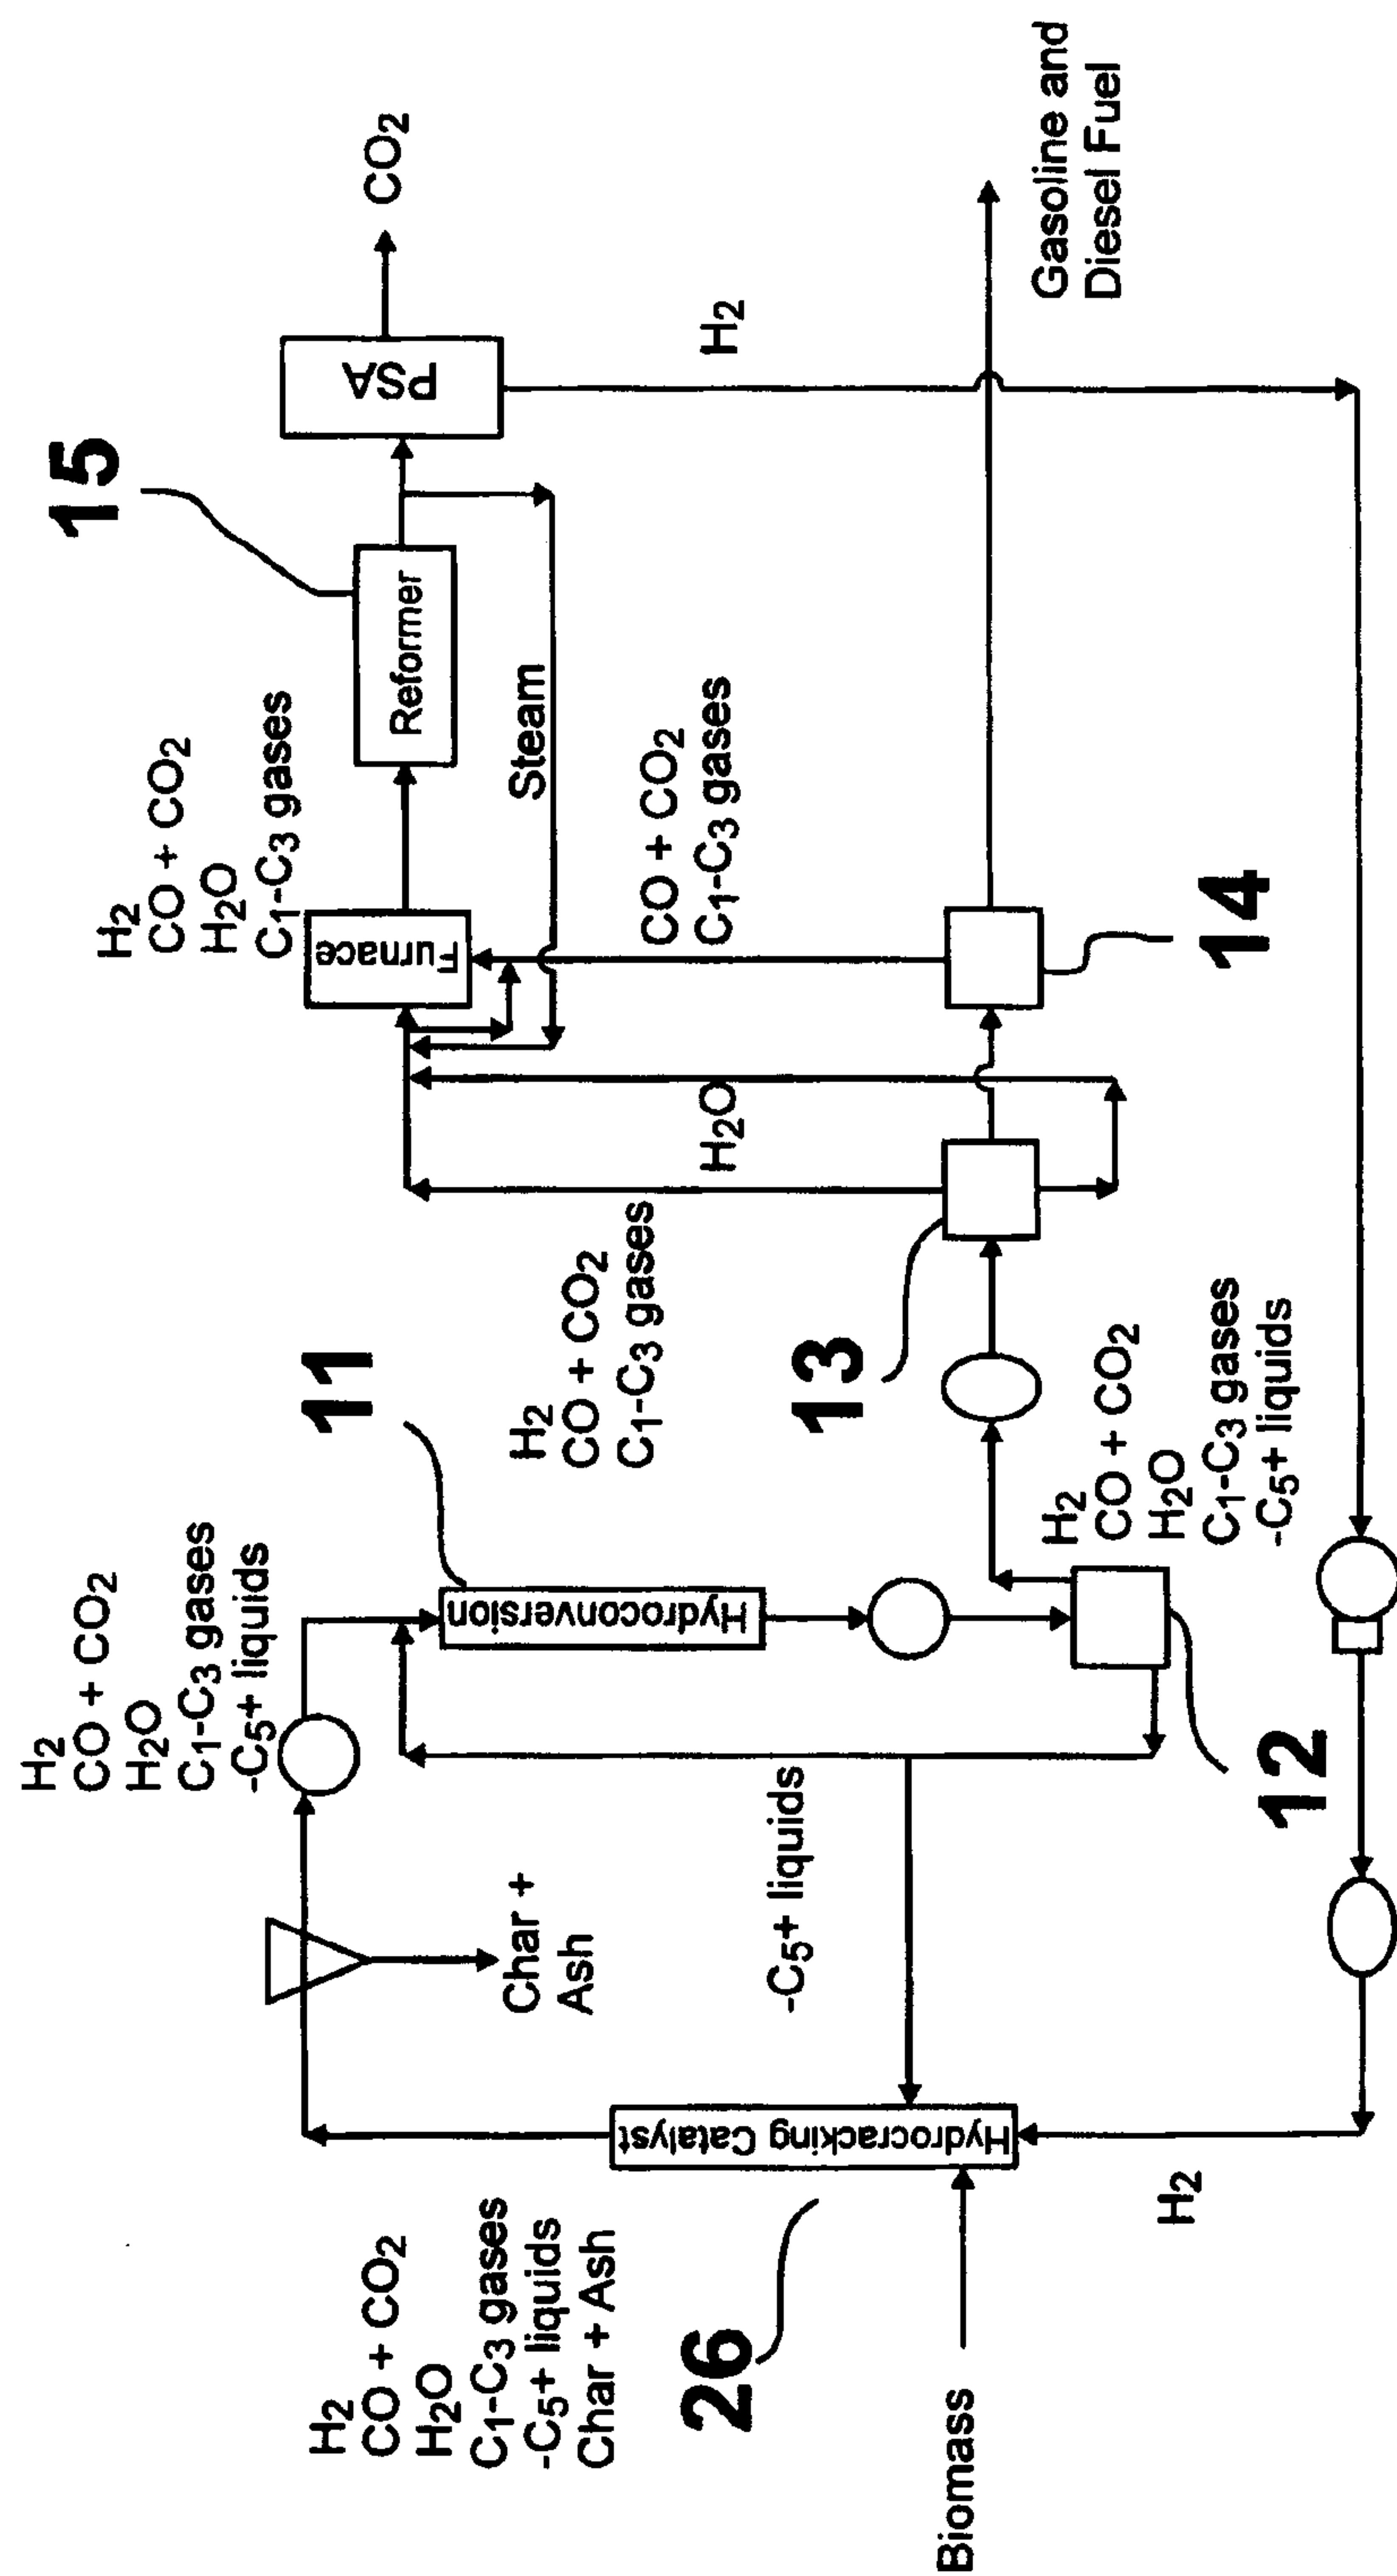

8/8

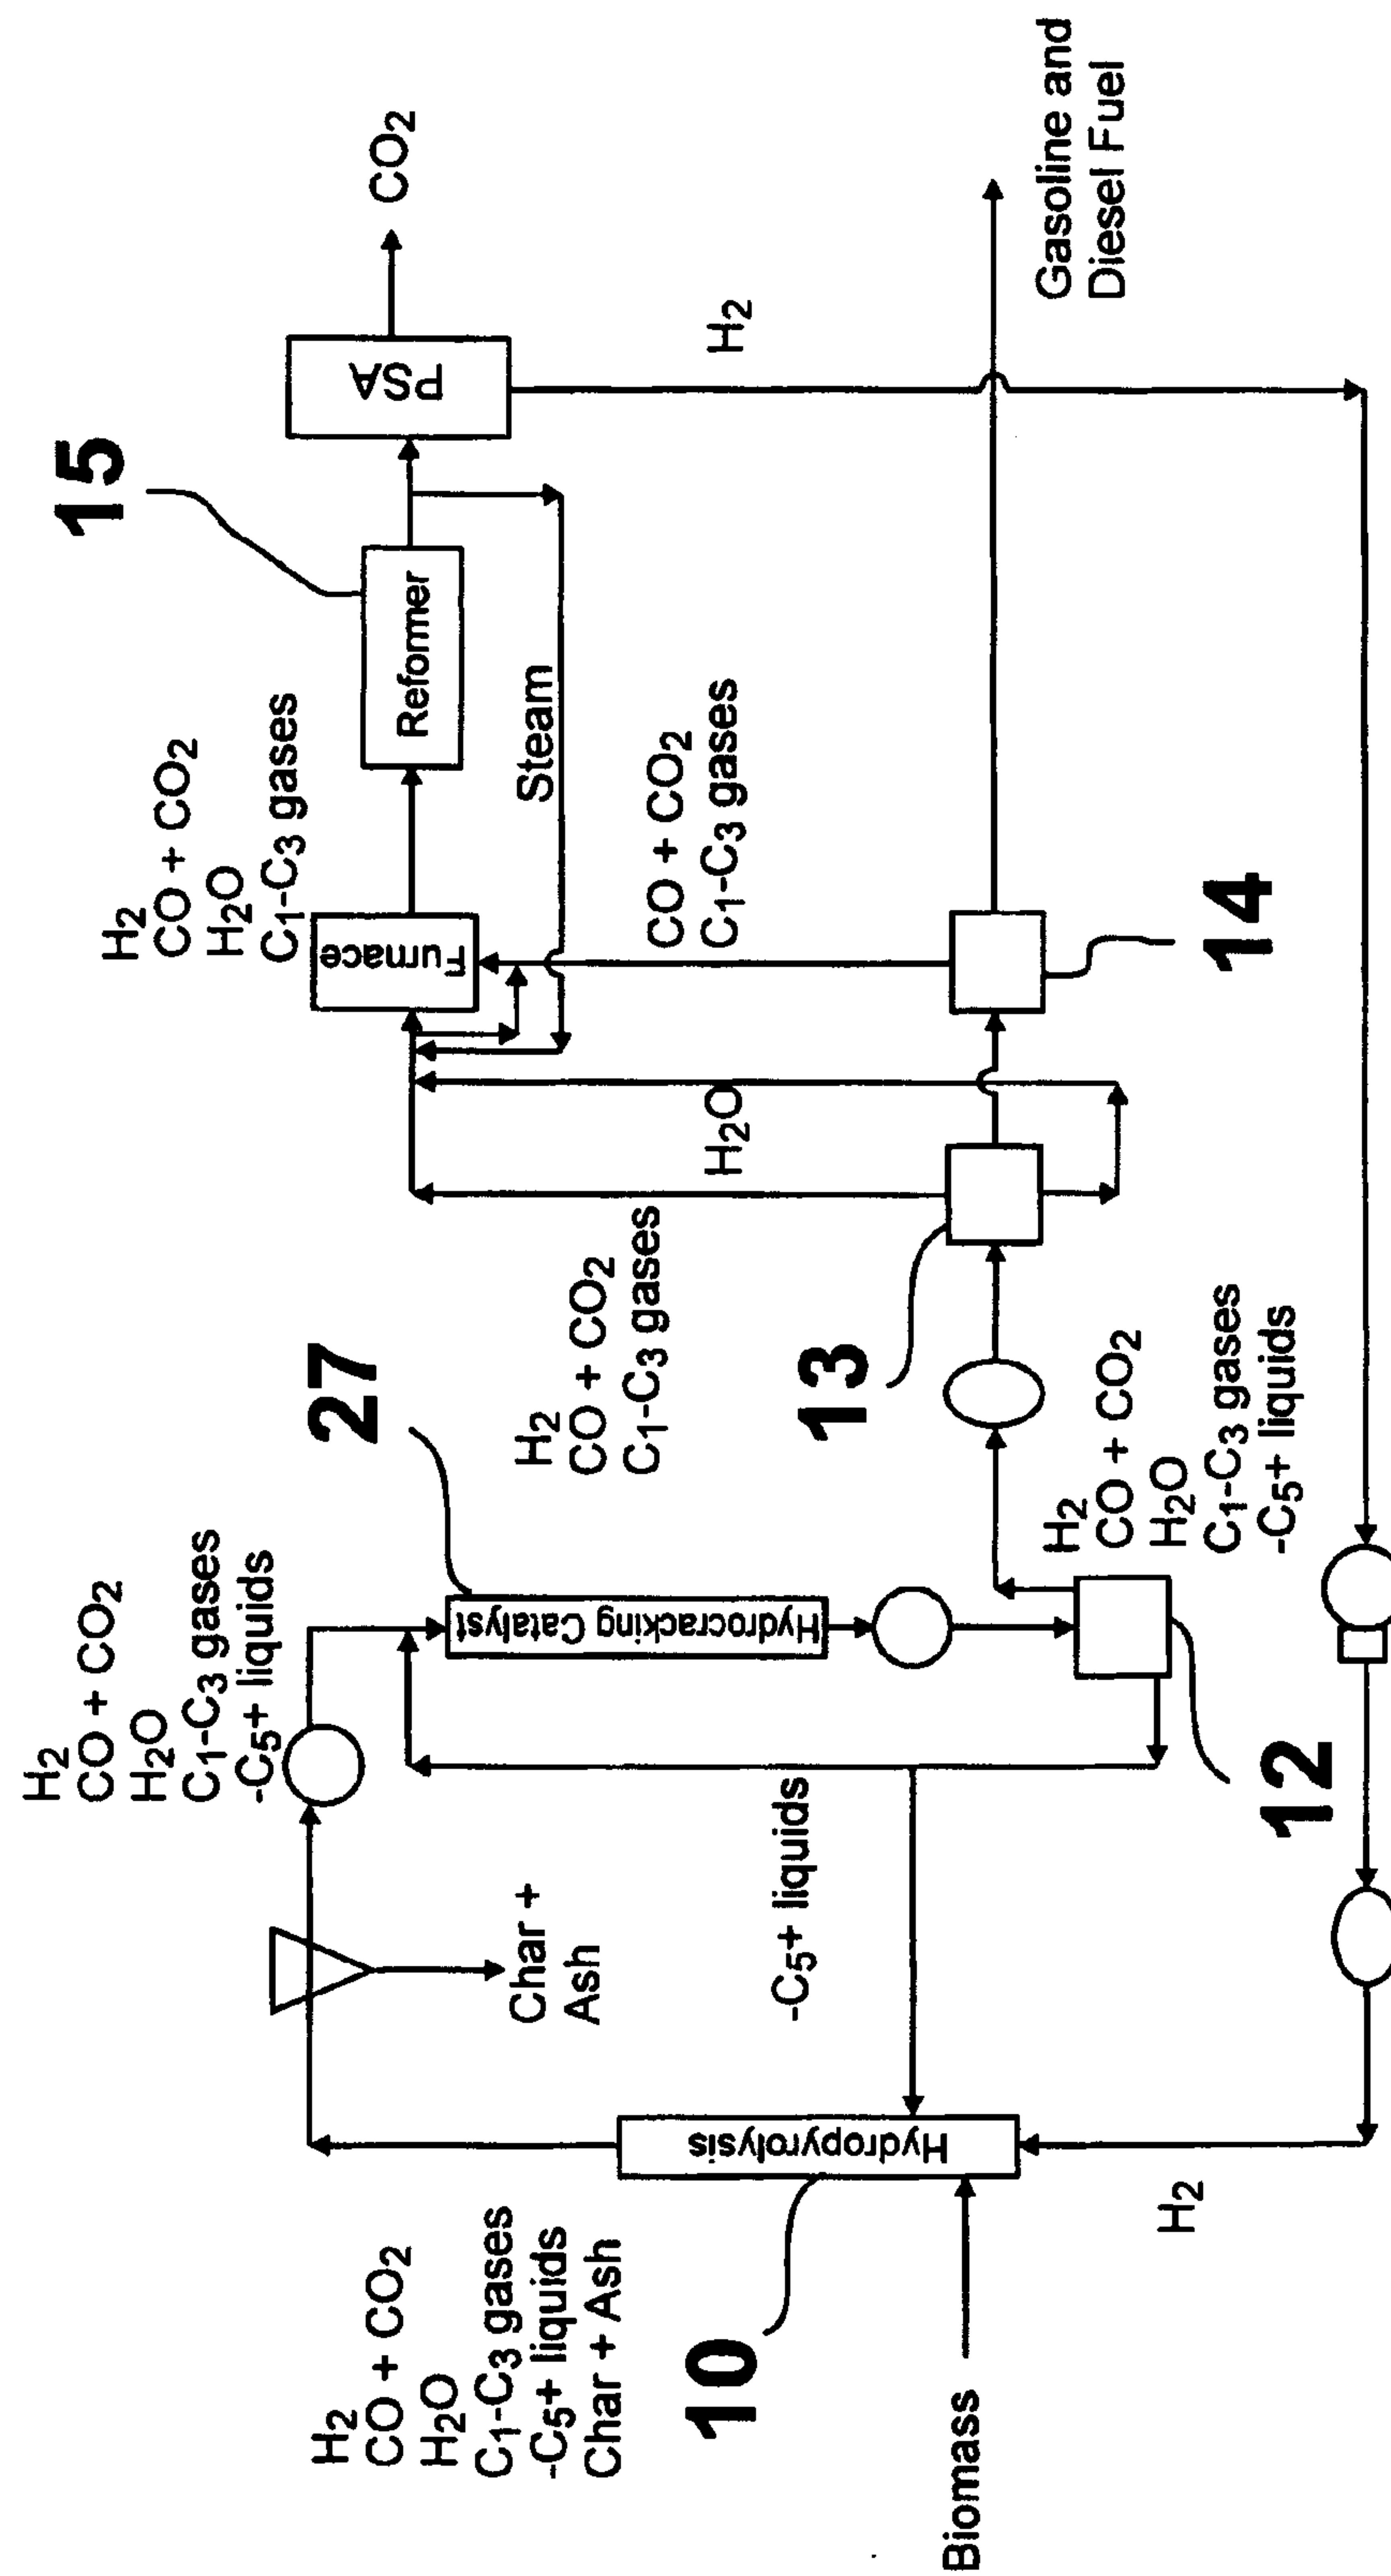

A vertical stack of five black and white geometric shapes. From top to bottom: two overlapping circles, a small square, a large circle with a horizontal bar through its center, a horizontal bar with a small square on the left end, and a large L-shaped block.

