



(22) Date de dépôt/Filing Date: 2003/07/21

(41) Mise à la disp. pub./Open to Public Insp.: 2004/01/19

(45) Date de délivrance/Issue Date: 2008/02/19

(30) Priorité/Priority: 2002/07/19 (US60/396,711)

(51) Cl.Int./Int.Cl. *A01G 23/04* (2006.01)


(72) Inventeur/Inventor:
TILLAART, MARLIN, CA

(73) Propriétaire/Owner:
DUTCHMASTER NURSERIES LIMITED, CA

(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : LIEUR D'ARBRES

(54) Title: TREE TYER

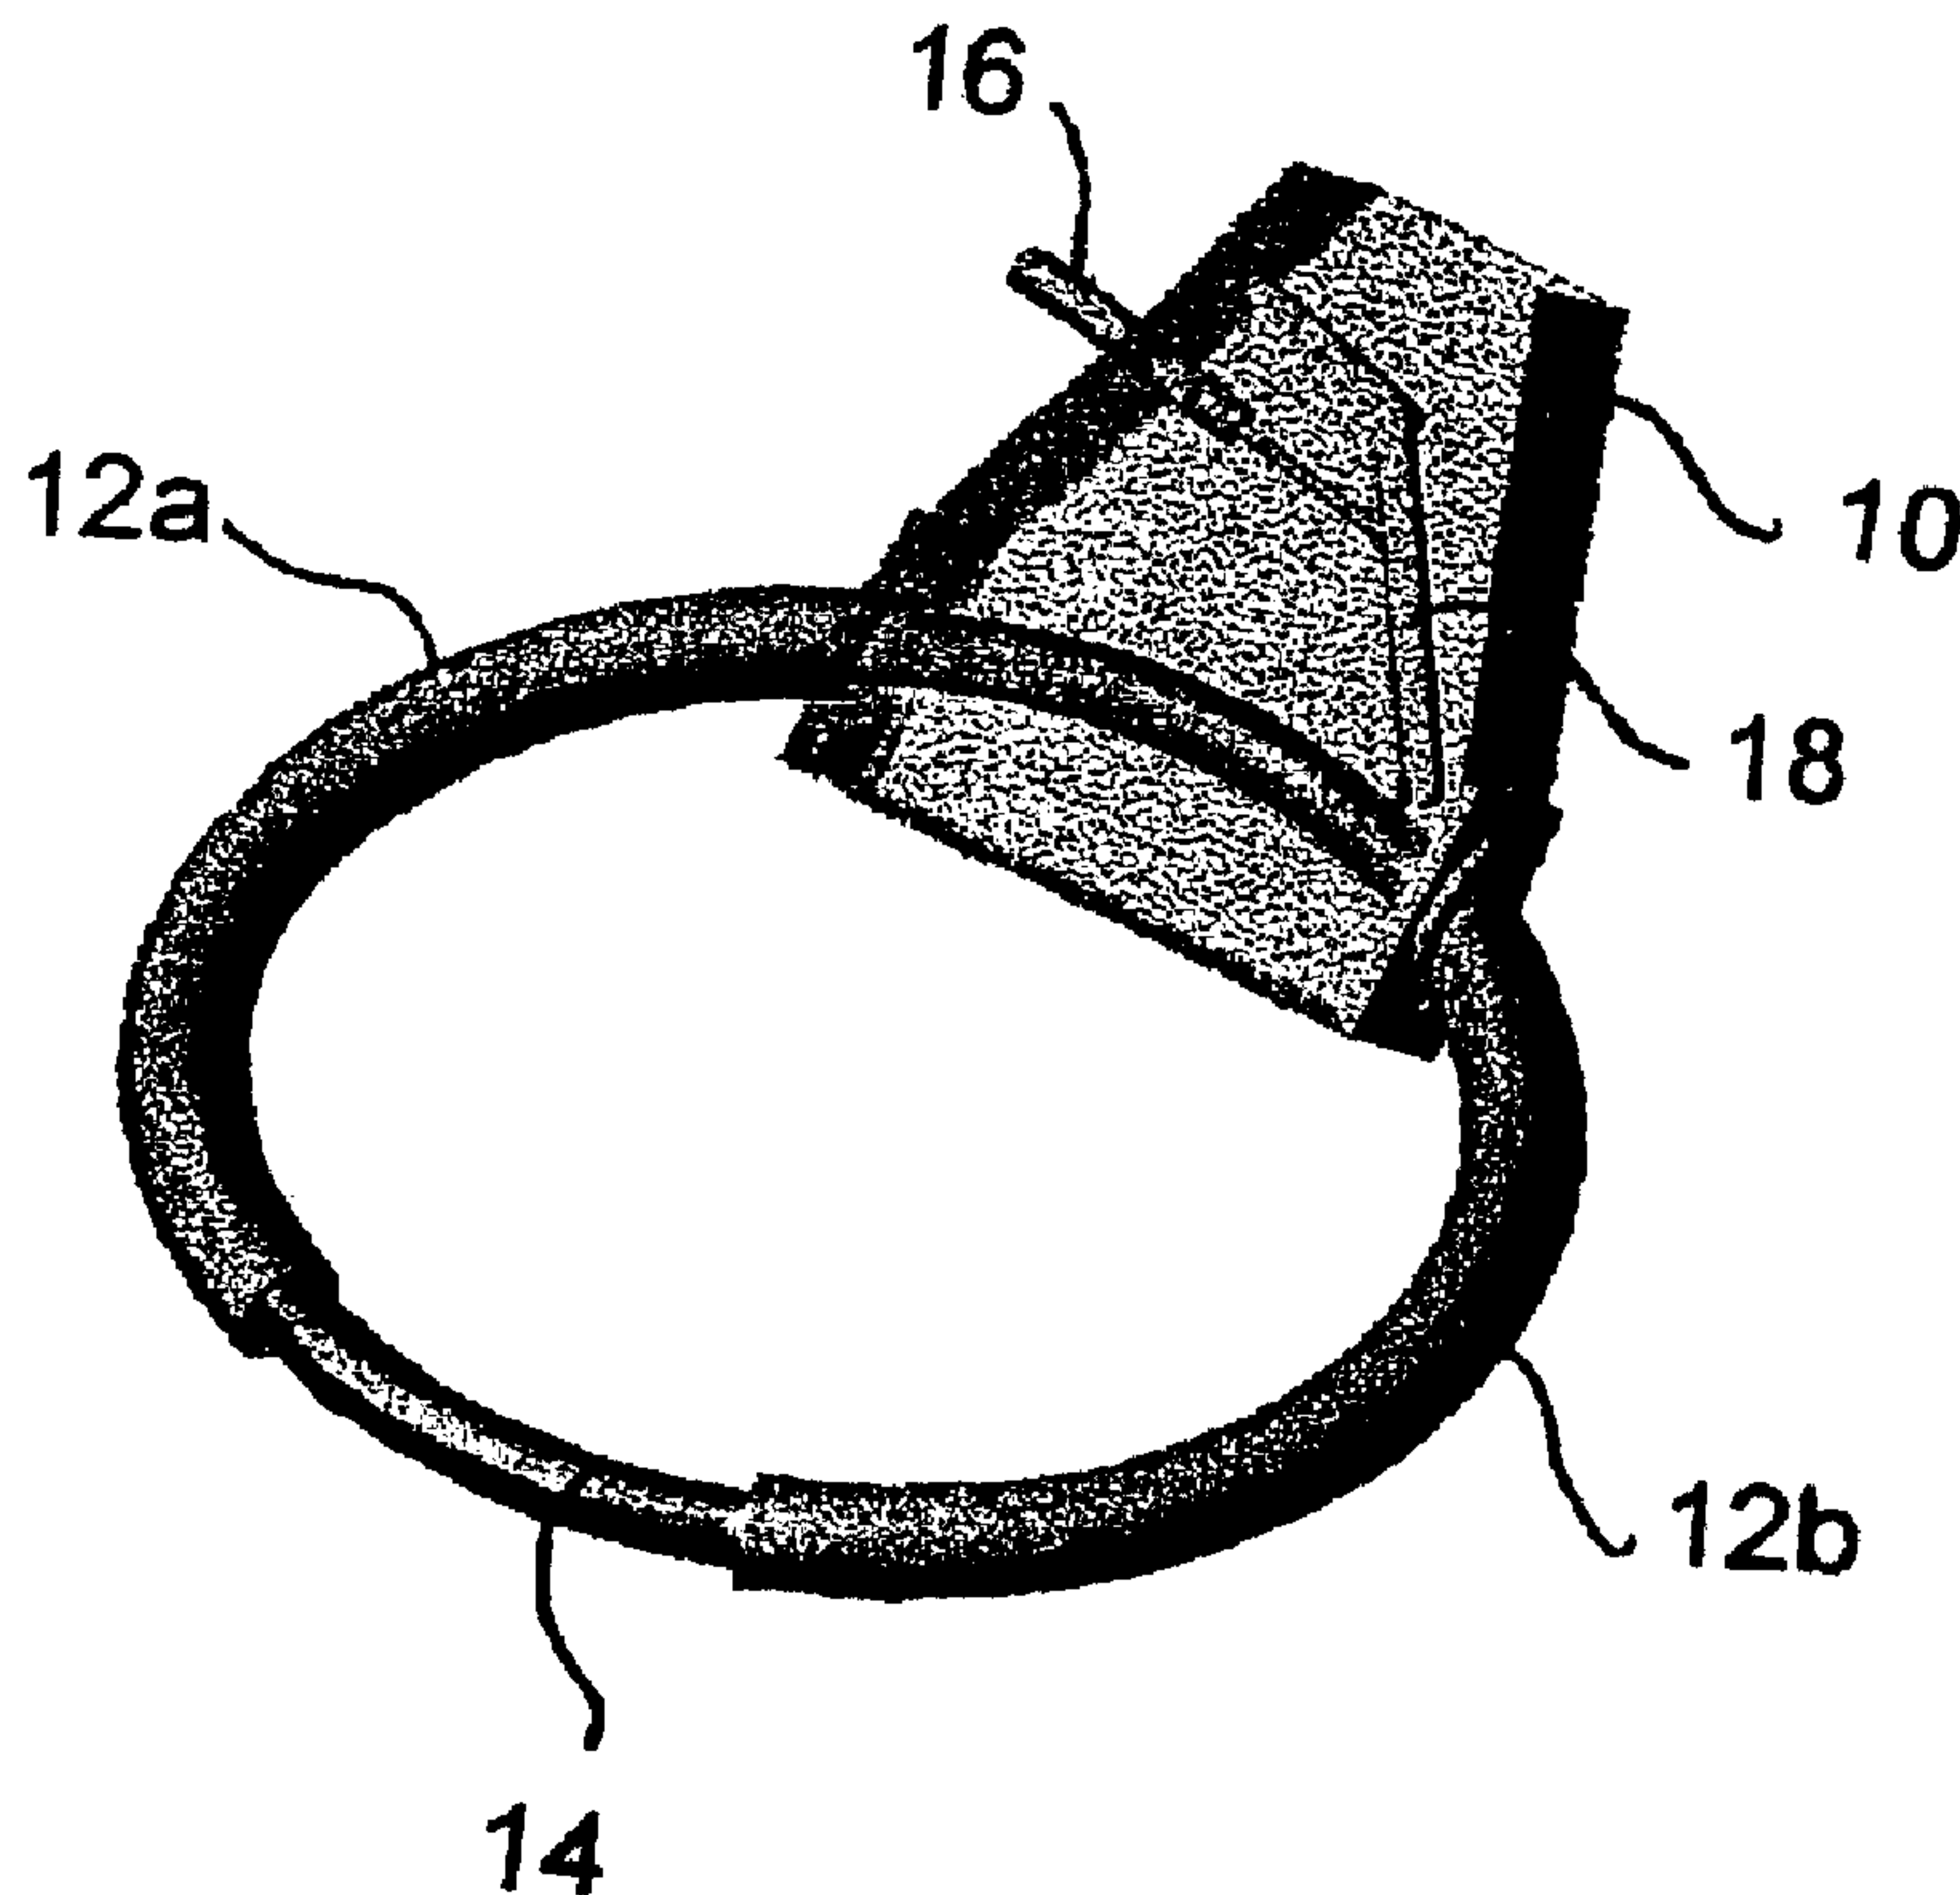

(57) Abrégé/Abstract:

Apparatus for engaging and folding the limbs of a tree in a tree baling apparatus features opening and closing by means of concentric part circular tubes of a frame. When gaps of the nested tubes are in alignment, a tree trunk can be received within the frame then closed in by rotating the gaps out of alignment. The closed ring, horizontally engaged about a tree, is then drawn upwardly deflecting the limbs of the tree into a folded configuration for tying. No pivot arms are used as in conventional equipment, avoiding the problems of wear and distortion at pivot linkages.



TREE TYER**ABSTRACT**

Apparatus for engaging and folding the limbs of a tree in a tree baling
5 apparatus features opening and closing by means of concentric part circular
tubes of a frame. When gaps of the nested tubes are in alignment, a tree
trunk can be received within the frame then closed in by rotating the gaps out
of alignment. The closed ring, horizontally engaged about a tree, is then
drawn upwardly deflecting the limbs of the tree into a folded configuration for
10 tying. No pivot arms are used as in conventional equipment, avoiding the
problems of wear and distortion at pivot linkages.

PATENT APPLICATION

TREE TYER

5 BACKGROUND OF THE INVENTION

Commercial tree nurseries regularly employ one or other version of "standing baler" apparatus for folding and tying tree limbs for shipping and handling nursery stock. Such apparatus includes means for upwardly deflecting the limbs of a tree while
10 simultaneously spirally tying the tree limbs in a compact bale.

One example is given in U.S. Patent No. 4,939,989 (Zacharias), which discloses a tree limb folding apparatus which has a base adapted for mounting from an elevatable support (e.g. forklift). That tree limb folding and tying apparatus includes a generally annular horizontal frame operable to receive a lower trunk portion of the tree.
15 The frame includes at least two peripherally adjacent arcuate frame sections which can be pivotally shifted relative to each other between closed and open positions. When open, there is defined a passageway between adjacent ends of the frame sections through which to receive the bole of a tree upon advancing the open frame toward the tree. Once the apparatus is horizontally engaged about a tree, it can be drawn
20 upwardly, deflecting the limbs of the tree into a folded configuration, ready for tying.

A significant problem arises with standing tree balers that employ pivoting gates or arms to embrace the lower trunk of the tree and then to be drawn upward along the branches, as these mechanisms are vulnerable to distortion at and around the pivot.

SUMMARY OF THE INVENTION

25 It is an object of my invention to provide a limb engaging and folding apparatus for a tree tyer (baling apparatus) which is simpler in construction and sturdier in operation than existing such devices.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A is a perspective view of a tree limb folding apparatus according to the present invention shown in its closed configuration; and

Figure 1B is the apparatus of Figure 1A in a configuration which is nearly
5 completely open.

DESCRIPTION OF PREFERRED EMBODIMENT

The apparatus comprises a base structure 10 which is adapted to be mounted to the elevatable portion of a lift truck or loader. Two hollow, arcuate tube sections 12a
10 and 12b are fixedly mounted in circular orientation to opposite sides of the base structure 10. Passing through tube sections 12a and 12b is a part-circular slider tube 14 of smaller outer diameter than the internal diameter tube sections of 12a and 12b. An arc section of tube 14 has been removed to form a space between ends 14a and 14b which conforms to the fixed spacing between the front ends of arms 12a and 12b.
15 Inner tube 14 can be rotated within the internal channel of 12a and 12b by a hydraulic piston 16 operatively connected to a lever arm 18 which is linked to the rear portion of inner tube 14. Figures 1A and 1B respectively show the device in its closed configuration and a configuration in which it is almost entirely open with end 14b of the inner about to be drawn fully into the interior of tube section 12b.

20 Between the inner surface of arms 12a and the outer surface of tube 14 are provided teflon or other bearings for smooth selective rotational motion under hydraulic control.

The fully opened space at the front of the tubes is typically contrived to be around 14 - 16 inches and the inner diameter between diametrically opposed points on
25 the surface of the outer ring sections 12a and 12b is about 40 - 60 inches.

When the gap is opened, the apparatus can be horizontally advanced into position about a tree trunk below the branches, then the frame can be closed by actuation of the hydraulic control 16. With the gap closed, a durable circular frame is formed for engaging and upwardly deflecting the limbs of a tree as a apparatus is
5 elevated and allowing the folded branches to be baled.

CLAIMS

1. A tree limb apparatus, comprising:

a base structure for mounting to an elevatable support;

a generally annular tubular frame mounted rearwardly from said support and bounding a central area for accommodating the lower portion of a tree trunk, said frame having a forward gap for receiving said tree trunk when the apparatus is advanced towards a tree;

means for selectively opening and closing said forward gap, including

- (i) an internal channel through said tubular frame;
- (ii) a part-circular slider tube seated within said channel for rotational movement therethrough, said slider tube having a space between remote ends thereof congruent with said forward gap of the frame; and
- (iii) hydraulic means for rotating the slider tube within the internal channel of the frame between a position in which said forward gap is open to receive said tree trunk into the central area of the frame and a position in which it is closed around said tree trunk received within the central area of the frame;

said generally annular tubular frame comprising two hollow arcuate tube sections fixedly mounted in circular orientation at opposite sides of said base structure; and

said hydraulic means for rotating the slider tube comprising a hydraulic piston engaging said slider tube and operatively mounted to said base structure.

2. A tree limb apparatus, comprising:

a base structure for mounting to an elevatable support;

a generally annular tubular frame mounted rearwardly from said support and bounding a central area for accommodating the lower portion of a tree trunk, said frame having a forward gap for receiving said tree trunk when the apparatus is advanced towards a tree;

means for selectively opening and closing said forward gap, including

- (i) an internal channel through said tubular frame;
- (ii) a part-circular slider tube seated within said channel for rotational movement therethrough, said slider tube having a space between remote ends thereof congruent with said forward gap of the frame; and
- (iii) means for rotating the slider tube within the internal channel of the frame between a position in which said forward gap is open to receive said tree trunk into the central area of the frame and a position in which it is closed around said tree trunk received within the central area of the frame;

said generally annular tubular frame comprising two hollow arcuate tube sections fixedly mounted in circular orientation at opposite sides of said base structure; and

said means for rotating the slider tube comprising a hydraulic piston engaging said slider tube and operatively mounted to said base structure.

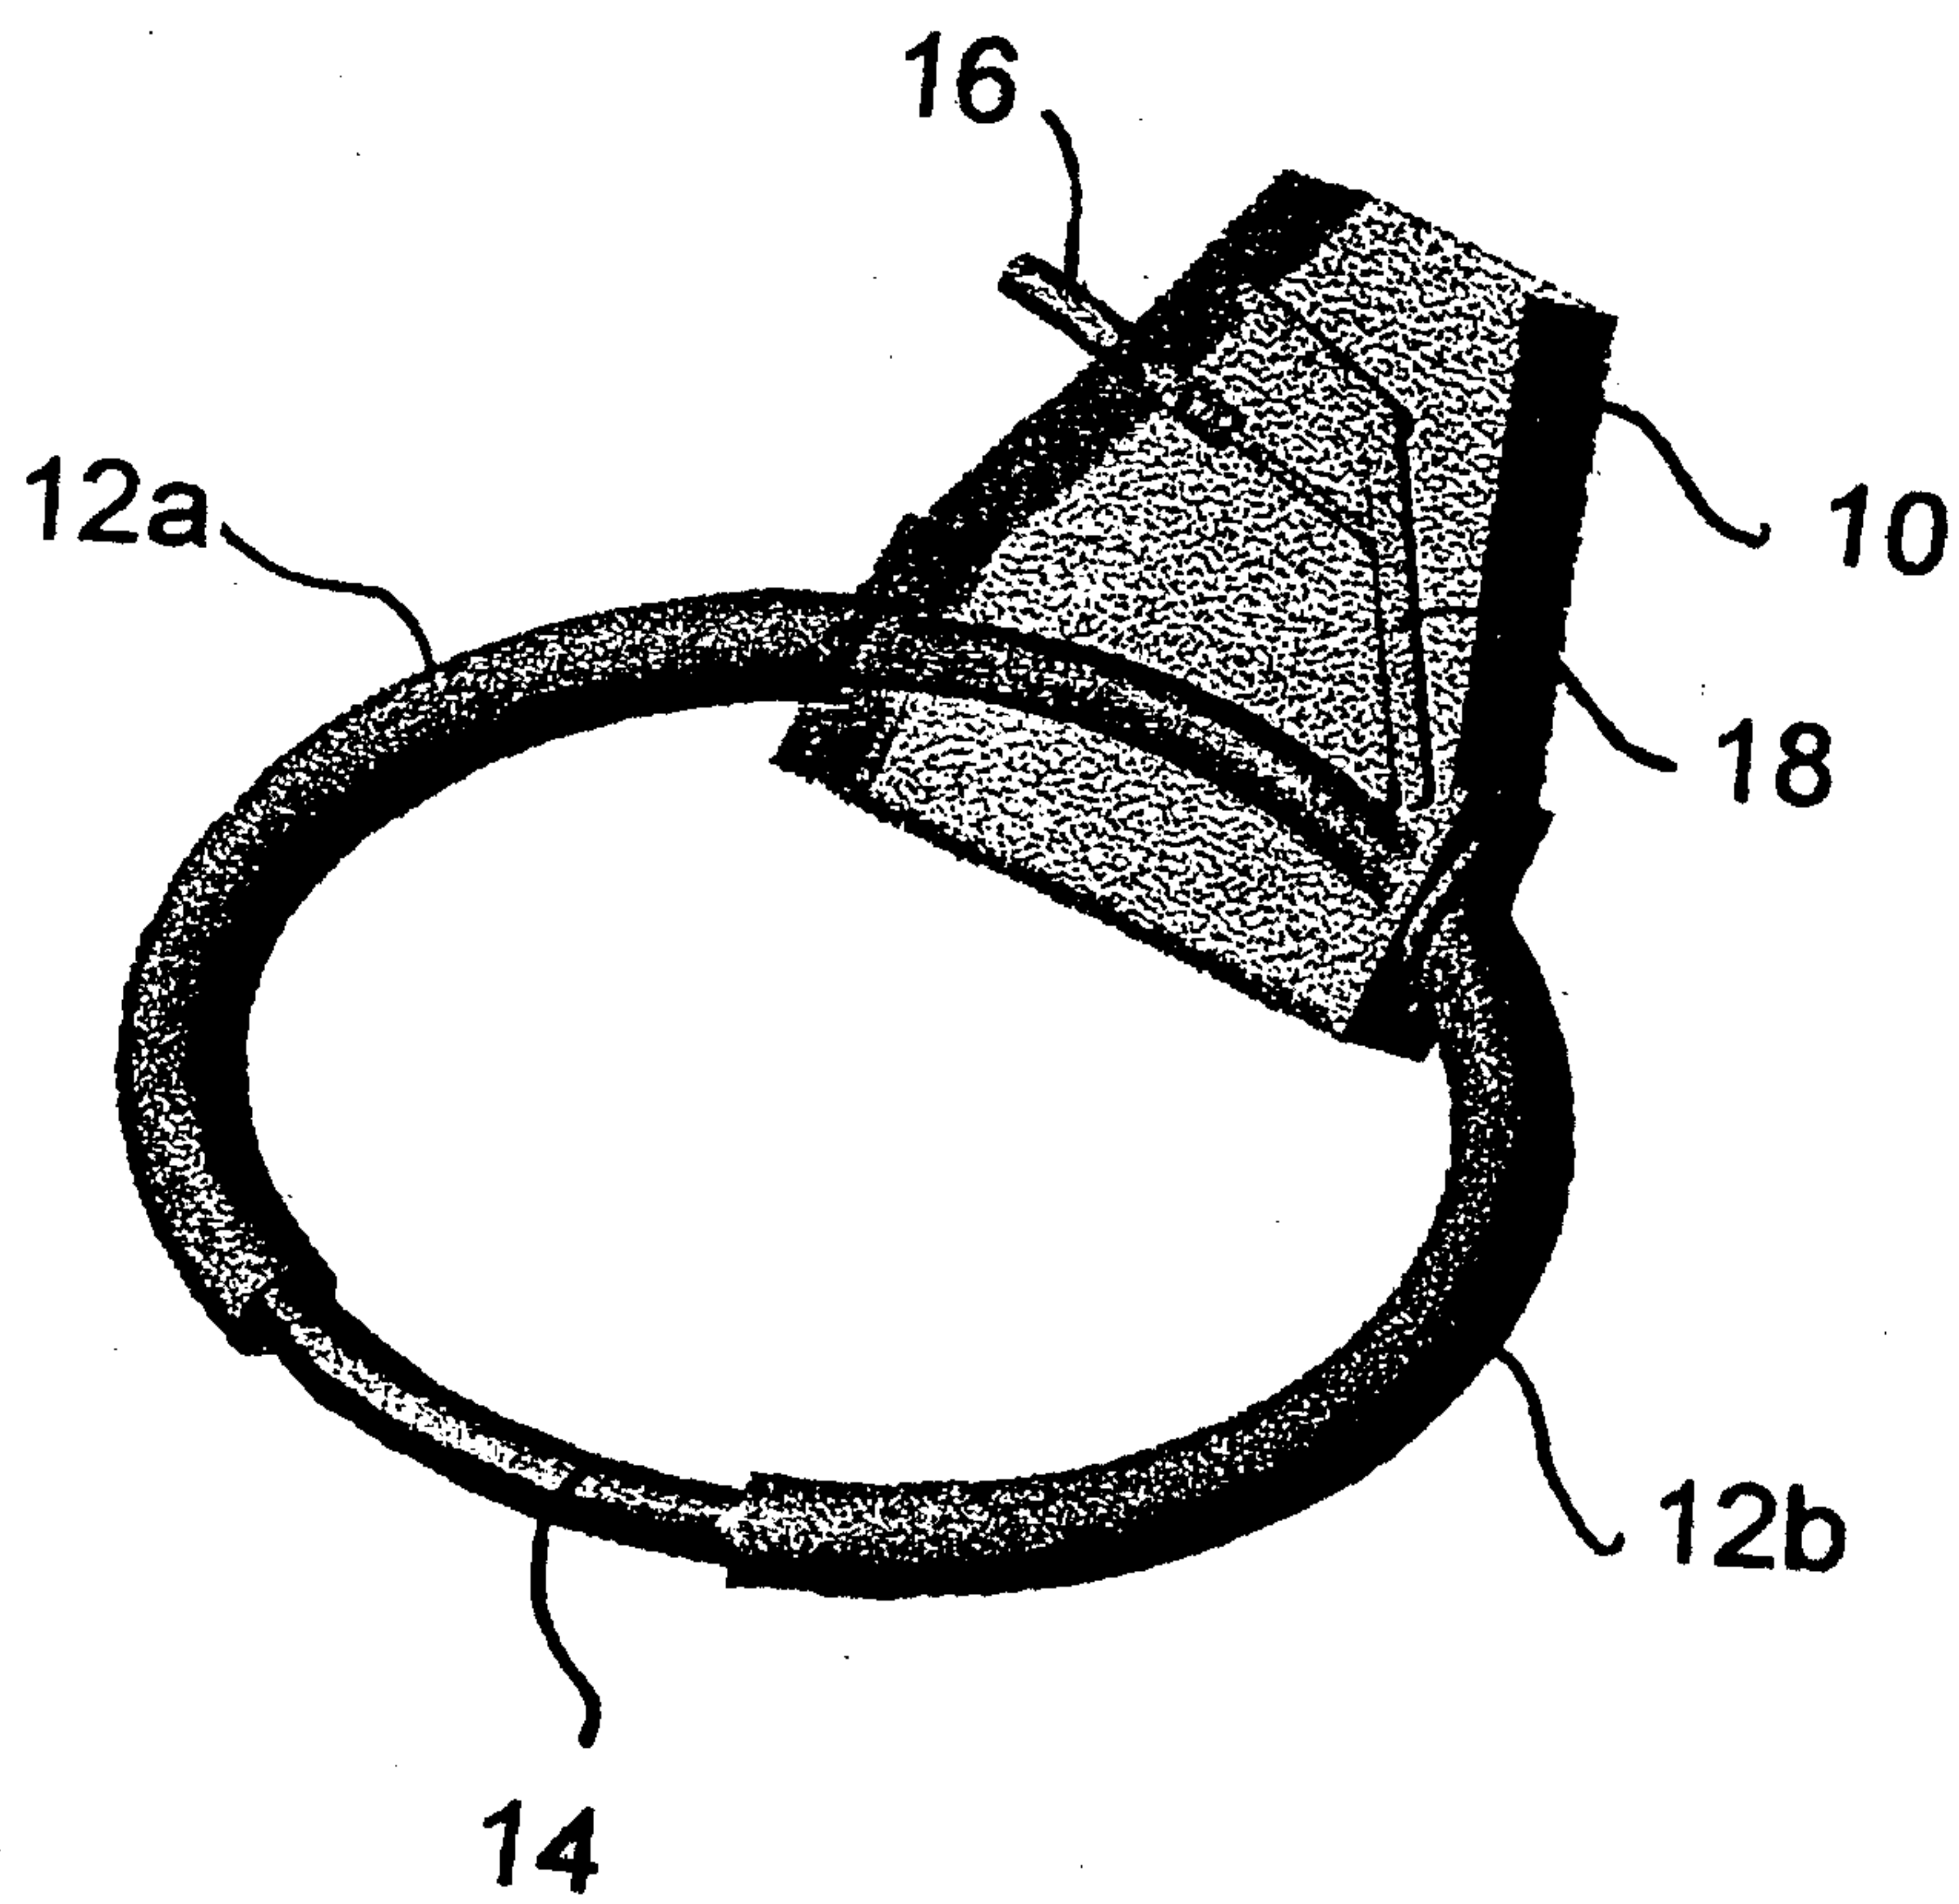


FIGURE 1A

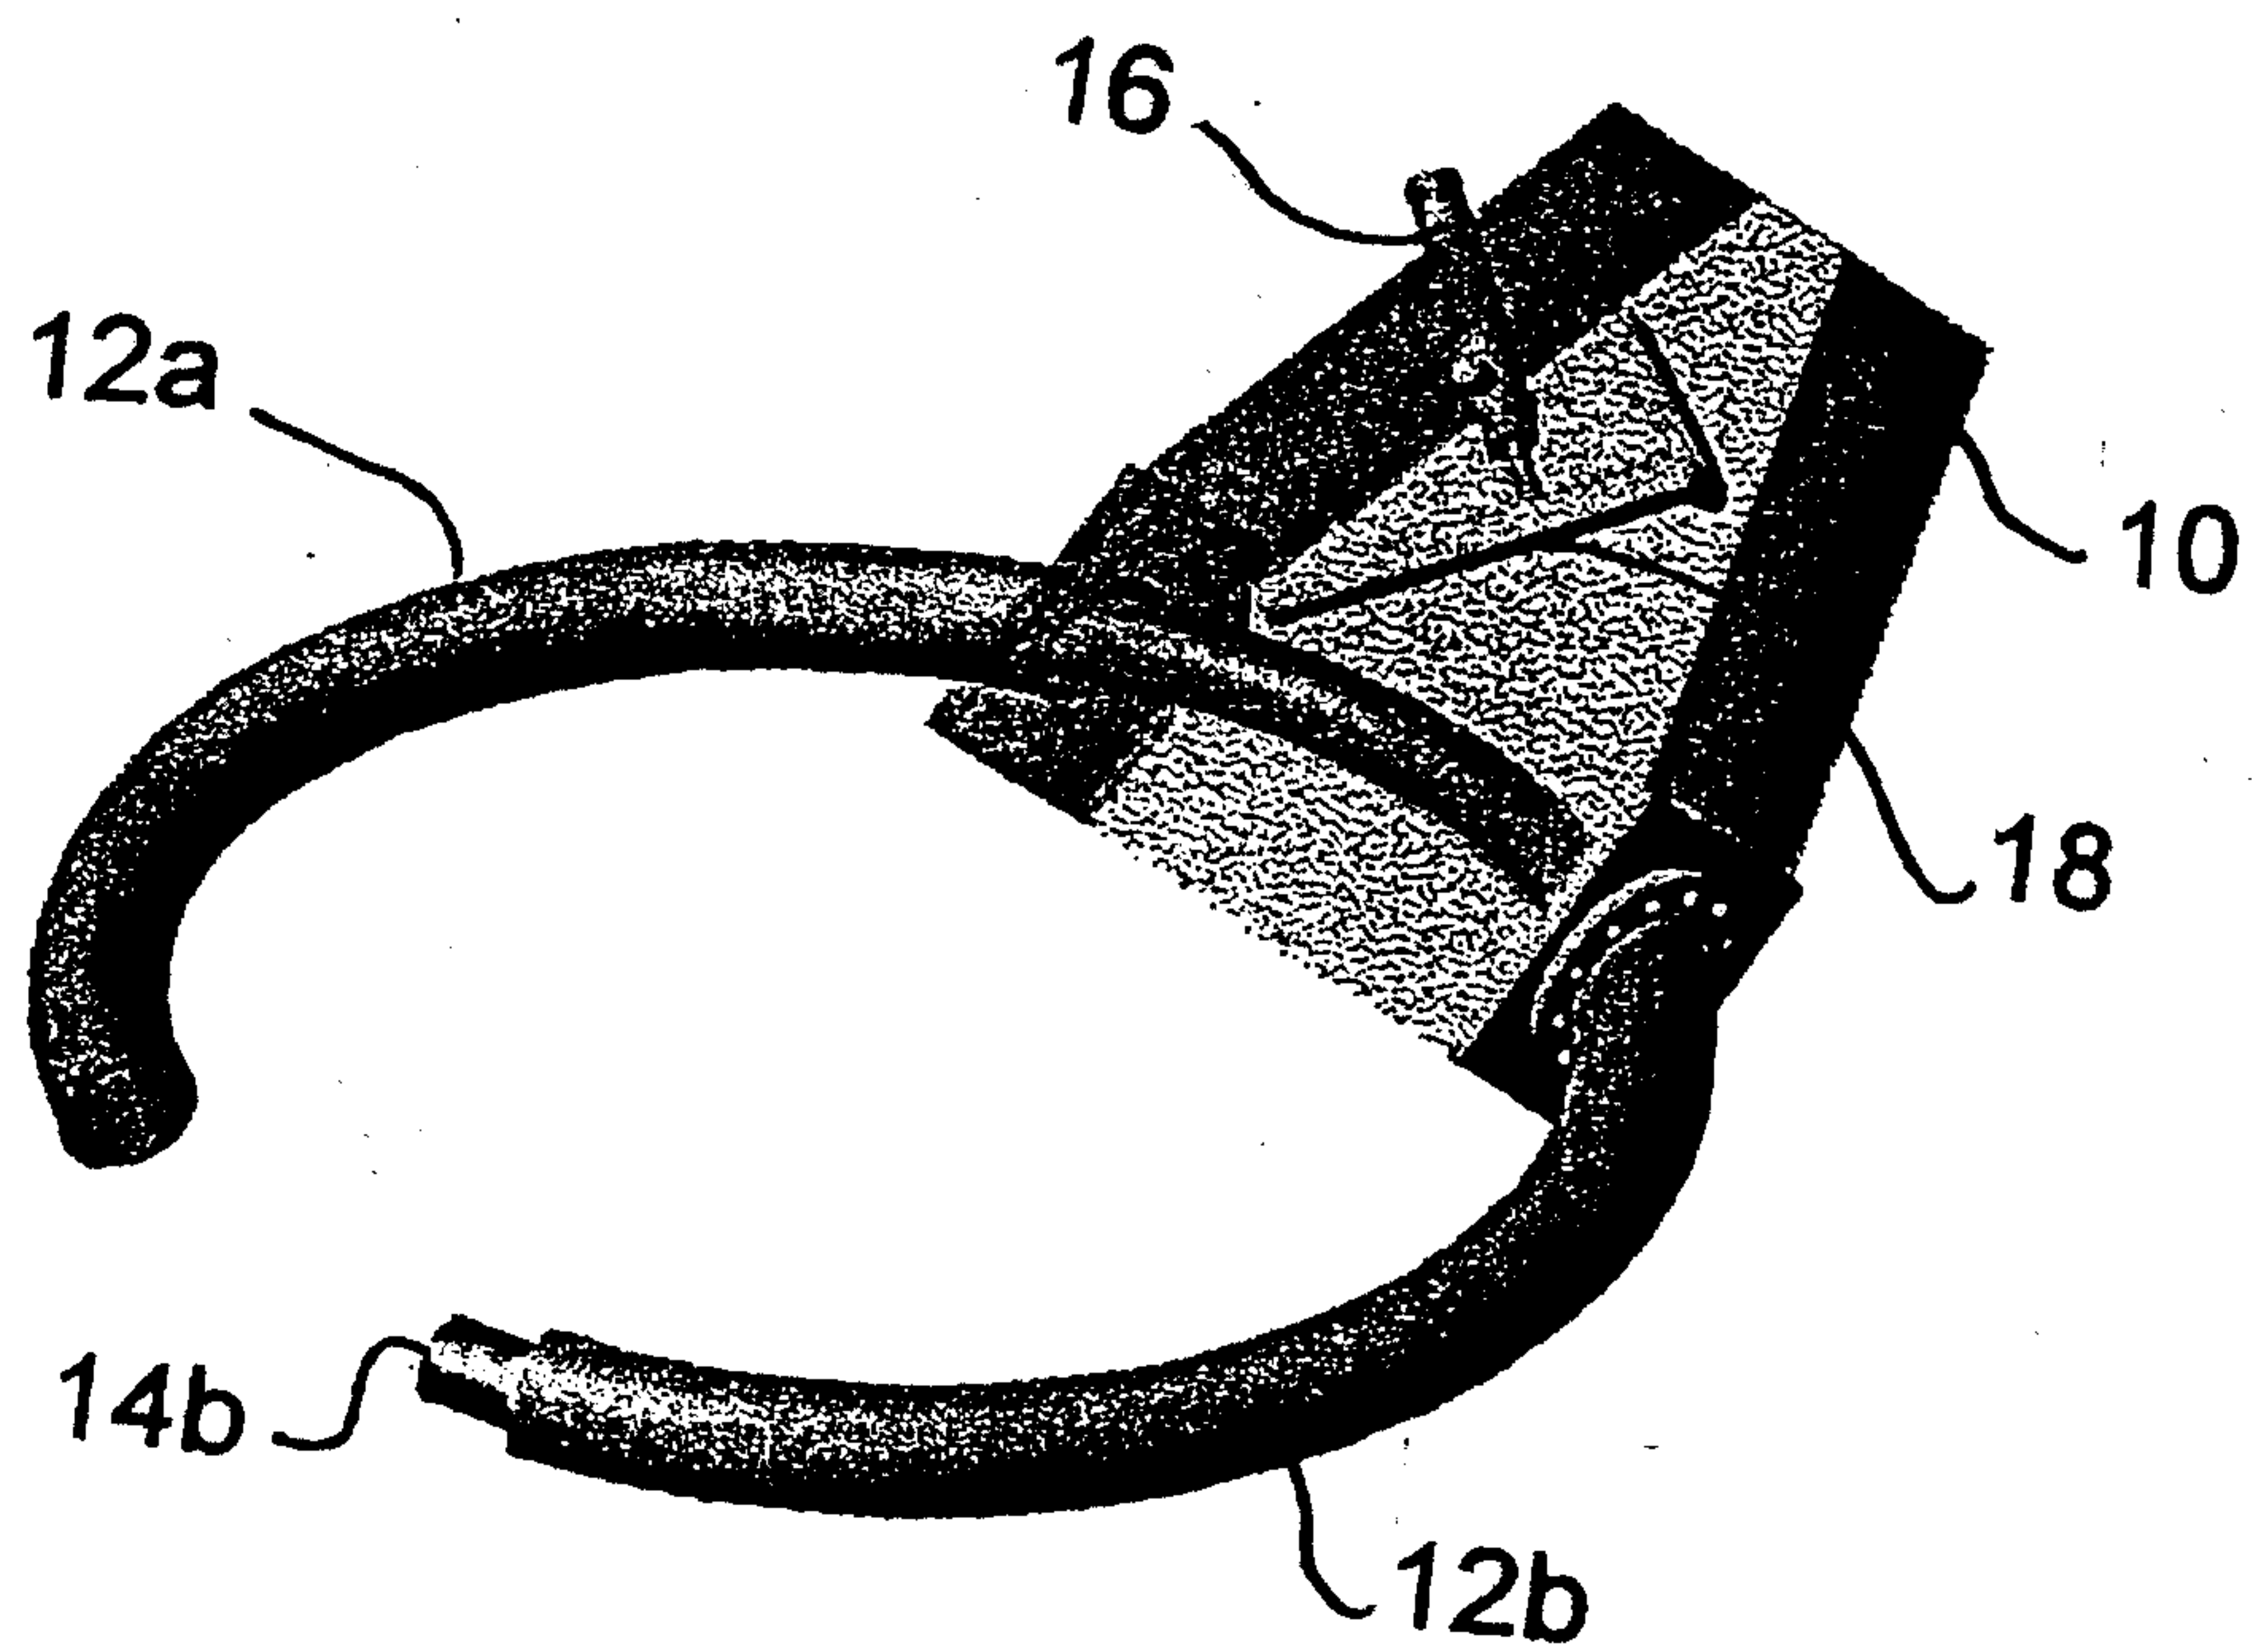


FIGURE 1B

