

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 May 2007 (31.05.2007)

PCT

(10) International Publication Number
WO 2007/061188 A1

- (51) International Patent Classification:
G11B 20/18 (2006.01) G11B 7/007 (2006.01)
- (21) International Application Number:
PCT/KR2006/004484
- (22) International Filing Date: 31 October 2006 (31.10.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10-2005-0113592
25 November 2005 (25.11.2005) KR
- (71) Applicant (for all designated States except US): LG ELECTRONICS INC. [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul, 150-721 (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KWON, Hyug Jin [KR/KR]; 106-802, e-Pyeonhansesang APT., Hoge 3(sam)-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-754 (KR). KIM, Jung Sup [KR/KR]; 1023-1101, Sin-sigaji APT., 10-danji, Sinjeong 1(il)-dong, Yangcheon-gu, Seoul, 158-770 (KR).

- (74) Agents: BAHNG, Hae Cheol et al.; 15th Floor Yo Sam Building, 648-23, Yeoksam-dong, Kangnam-gu, Seoul, 135-080 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report
For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECORDING MEDIUM, AND METHOD AND APPARATUS FOR RECORDING DEFECT MANAGEMENT INFORMATION ON THE RECORDING MEDIUM

DFL (with sorting)

	status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
RAD	0000b	first PSN in 'A' Cluster	0000b	first PSN in 'a' Cluster
	1000b	first PSN in 'B' Cluster	0000b	first PSN in 'e' Cluster
	0000b	first PSN in 'C' Cluster	0000b	first PSN in 'c' Cluster
	1000b	first PSN in 'D' Cluster	0000b	first PSN in 'f' Cluster
NRD	0001b	first PSN in 'E' Cluster	0000b	0 00 00 00h
SPR	0010b	0 00 00 00h	0000b	first PSN in 'h' spare Cluster
	0010b	0 00 00 00h	0000b	first PSN in 'i' spare Cluster
	0010b	0 00 00 00h	0000b	first PSN in 'j' spare Cluster
unusable	0111b	0 00 00 00h	0000b	first PSN in 'b' Unusable Cluster
	0111b	0 00 00 00h	0000b	first PSN in 'd' Unusable Cluster
	0111b	0 00 00 00h	0000b	first PSN in 'g' Unusable Cluster

(57) Abstract: A recording medium, and a method and apparatus for recording defect management information on the recording medium are disclosed. The method for recording defect management information of a recording medium includes recording a defect entry on the recording medium, wherein the defect entry includes a first field that can identify a defect entry type, a second field recording position information of a defect area within a user data area, and a third field recording position information of a replacement area within a spare area, and recording position information corresponding to the second field and/or the third field in accordance with the defect entry type decided by the first field, wherein, in case of a defect entry type having no corresponding position information, the corresponding field is set to zero (0).

WO 2007/061188 A1

[DESCRIPTION]**RECORDING MEDIUM, AND METHOD AND APPARATUS FOR RECORDING****DEFECT MANAGEMENT INFORMATION ON THE RECORDING MEDIUM**5 **Technical Field**

The present invention relates to a recording medium, and more particularly, to a recording medium, and a method and apparatus for recording defect management information on the recording medium. Although the present invention is suitable for a wide scope of applications, it is particularly suitable for efficiently managing defect management information and for facilitating a sorting process of defect entries configuring the defect management information.

15 **Background Art**

The optical disc is widely used as a recording medium capable of recording (and/or storing) a large amount of data. Particularly, a high-density optical recording medium capable of recording/storing high-quality video data and high-quality audio data, for example, a Blu-ray Disc (BD), has been being developed for a long period of time. The BD acting as the next-generation recording medium has been considered to be the next-generation optical recording solution capable of recording/storing much more data than a conventional DVD. In recent times, the international

standard technical specification associated with the BD has been established along with those of other digital devices. Many developers have conducted intensive research into the introduction of a preferable recording method, and more particularly, an optimum method of recording and managing defect management information using a next-generation recording medium, such as the BD. However, the technical standard for the BD has not yet been established, and, therefore, the developers have difficulty in developing the completed BD-based optical recording/reproducing apparatus.

Disclosure of Invention

Accordingly, the present invention is directed to a recording medium, and a method and apparatus for recording defect management information on the recording medium that substantially obviate one or more problems due to limitations and disadvantages of the related art.

An object of the present invention is to provide a method of formatting the recording medium and a method of sorting defect management information.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and

other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

5 To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, a method for recording defect management information of a recording medium includes recording a defect entry on the recording medium, wherein the
10 defect entry includes a first field that can identify a defect entry type, a second field recording position information of a defect area within a user data area, and a third field recording position information of a replacement area within a spare area, and recording position information
15 corresponding to the second field and/or the third field in accordance with the defect entry type decided by the first field, wherein, in case of a defect entry type having no corresponding position information, the corresponding field is set to zero (0).

20 In another aspect of the present invention, in recording a defective cluster as a defect entry within a spare area, a method for recording defect management information of a recording medium, includes recording status information for identifying a type of the defect entry (*i.e.*, defect entry
25 type) in a first field of the defect entry, setting to zero

(0) a second field of the defect entry recording position information of a defect area within a user data area, and recording an address of the defective cluster within the corresponding spare area in a third field of the defect entry, 5 wherein position information of a replacement area within the spare area is recorded.

In another aspect of the present invention, a method for updating defect management information includes, when updating an already existing defect list by using a new 10 defect entry as the defect management information, sorting the defect entries registered in the already existing defect list and the defect entries that are to be updated, thereby updating the defect list, wherein the sorting of the defect entries is performed by sorting the defect entries by each 15 type, and by sorting the defect entries by order of physical sector address (PSN) within the same defect entry type.

In another aspect of the present invention, in a method for sorting a plurality of defect entries, the method for sorting defect entries includes primarily sorting the defect entries 20 by identifying the defect entries by each type, and based upon the primary sorting, and within the same defect entry type, secondarily sorting the defect entries sequentially starting from the lowest physical sector number (PSN) among defective clusters and/or replacement clusters recording in 25 the corresponding entry type.

In another aspect of the present invention, a method for formatting a recording medium includes selecting a certification method, and, when using a quick certification method, certifying only defect entries included in a sorted
5 defect list, so as to recheck whether any defect exists, wherein the defect entries on the sorted defect list are sorted by defect entry type, and wherein, within the same defect entry type, sorting is performed sequentially starting from a cluster having the lowest physical sector number (PSN),
10 among defective clusters and/or replacement clusters recorded in the corresponding defect entry type.

In another aspect of the present invention, a recording medium includes a data area and a lead-in area adjacent to the data area, and a defect management area recording in the
15 lead-in area defect entries for managing defects within the data area, wherein the defect entry being recorded in the defect management area comprises a first field that can identify a defect entry type, a second field recording position information of a defect area within a user data area,
20 and a third field recording position information of a replacement area within a spare area, and wherein position information corresponding to the second field and/or the third field is recorded in accordance with the defect entry type decided by the first field, wherein, in case of a defect
25 entry type having no corresponding position information, the

corresponding field is set to zero (0).

In another aspect of the present invention, an apparatus for recording defect management information on a recording medium, includes a pick-up, and a microcomputer controlling the pick-up so that defective clusters newly generated during a recording and/or reproducing of the recording medium are recorded as a defect entry, wherein the defect entry is recorded by configuring a first field that can identify a defect entry type, a second field recording position information of a defect area within a user data area, and a third field recording position information of a replacement area within a spare area, and controlling the pick-up so that position information corresponding to the second field and/or the third field is recorded in accordance with the defect entry type decided by the first field, wherein, in case of a defect entry type having no corresponding position information, the corresponding field is set to zero (0).

In a further aspect of the present invention, an apparatus for recording defect management information on a recording medium, includes a pick-up, and a microcomputer controlling the pick-up so that defective clusters within a spare area newly generated during a recording and/or reproducing of the recording medium are recorded as a defect entry, wherein status information for identifying a type of the defect entry (*i.e.*, defect entry type) is recorded in a first field of the

defect entry, a second field of the defect entry recording position information of a defect area within a user data area is set to zero (0), and a third field of the defect entry is recorded with an address of the defective cluster within the corresponding spare area.

It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

Brief Description of Drawings

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiments of the invention and together with the description serve to explain the principle of the invention.

In the drawings:

FIG. 1 illustrates exemplary process steps of a defect management method in a recording medium applied in the present invention;

FIG. 2A and FIG. 2B respectively illustrate a structure of a defect entry as a defect management information according to the present invention;

FIG. 3A to FIG. 3E illustrate examples for describing defect

entry types and recording methods according to the present invention;

FIG. 4A and FIG. 4B respectively illustrate a defect management method and a method for recording defect management information;

FIG. 5 illustrates a recording and reproducing apparatus of a recording medium according to the present invention;

FIG. 6 illustrates a flow chart of a method for recording defect management information according to the present invention; and

FIG. 7 illustrates a flow chart of a method for formatting the recording medium according to the present invention.

Best Mode for Carrying Out the Invention

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

Prior to describing the present invention, it should be noted that most terms disclosed in the present invention correspond to general terms well known in the art, but some terms have been selected by the applicant as necessary and will hereinafter be disclosed in the following description of the present invention. Therefore, it is preferable that the

terms defined by the applicant be understood on the basis of their meanings in the present invention.

A recording medium for use in the present invention is indicative of all recordable mediums, for example, an optical
5 disc, a magnetic disc, and a magnetic tape, etc. For the convenience of description and better understanding of the present invention, the optical disc, and more particularly, the blu-ray disc (BD) will hereinafter be exemplarily used as the above-mentioned recording medium in the present invention.

10 It is also apparent that the spirit and scope of the present invention will be identically applied to other types of recording media.

FIG. 1 illustrates exemplary process steps of a defect management method in a recording medium applied in the
15 present invention. Referring to FIG. 1, the optical disc sequentially consists of a lead-in area and a data area starting from the inner circumference of the disc. The data area includes a spare area and a user data area. In the example shown in FIG. 1, the spare area is formed in an inner
20 area of the data area. However, this structure is only exemplary and does not limit the structure of the optical disc. More specifically, the spare area may be provided in an outer area of the data area, or may be provided in both the inner and outer areas of the data area.

25 When a defect is detected in a particular recording unit

(e.g., a cluster) within the user data area, the data that are recorded or that are to be recorded on the cluster, from which the defect has been detected, are replacement recorded on a specific cluster within the spare area. After
5 replacement recording the defective cluster on the replacement cluster within the spare area, the fact that the data have been replacement recorded should be recorded as a separate set of management information. In other words, a defect management area (DMA) is provided in the lead-in area,
10 and the management information is recorded on the DMA. Most particularly, the management information is referred to as a defect list (DFL). Each defect list is configured of at least one defect entry. For example, referring to FIG. 1, when defective clusters A and B are detected within the user
15 data area, data corresponding to clusters A and B are replacement recorded one replacement clusters a and b within the spare area. The fact that the data have been replacement recorded is added to the defect list as a defect entry, thereby being recorded on the DMA.

20 FIG. 2A and FIG. 2B respectively illustrate a structure of a defect entry as a defect management information according to the present invention. More specifically, FIG. 2A illustrates a defect entry structure, and FIG. 2B illustrates defect entry types. Referring to FIG. 2A, one defect entry
25 may be configured of 8 bytes (i.e., 64 bits). Herein, the

64-bit defect entry is largely divided into 3 sections. The defect entry includes a first field (a 4-bit 'status 1' field and a 4-bit 'status 2' field), a second field (a 28-bit 'Defective Cluster first PSN' field), and a third field (a 28-bit 'Replacement Cluster first PSN' field). Herein, the first field indicates the type and status of the defect entry, the second field records a position information of the defective cluster, and the third field records a position information of the replacement cluster.

The 4-bit 'status 1' field is used as information deciding the defect entry type. Referring to FIG. 2B, for example, when the value of the 4-bit 'status 1' field is '0000b', this indicates that a replacement cluster is normally allocated and that the defect entry is replacement recorded. This defect entry is referred to as a 'Re-Allocatable Defect (RAD) 1 type'. When the value of the 4-bit 'status 1' field is '1000b', this indicates that a replacement cluster is normally allocated but the defect entry is not replacement recorded. This defect entry is referred to as a 'Re-Allocatable Defect (RAD) 2 type'. When the value of the 4-bit 'status 1' field is '0001b', this indicates that a replacement cluster is not allocated for the defective cluster. This defect entry type is referred to as a 'Non Re-allocatable Defect (NRD) type'. Furthermore, when the value of the 4-bit 'status 1' field is '0010b', this indicates that

a replacement cluster is normally allocated but the cluster is allocated in the spare area so as to be replacement recorded in a later process. This defect entry type is referred to as a 'Spare (SPR) type'. Finally, when the value
5 of the 4-bit 'status 1' field is '0111b', this indicates that a defect has been detected (or has occurred) in a replacement cluster, and therefore the cluster cannot be used replacement recording in a later process. This defect entry type is referred to as an 'unusable type'.

10 More specifically, a plurality of defect entries exists within the defect list (DFL). And, each defect entry is sorted in accordance with a particular sorting method and recorded on the defect list. Referring to FIG. 2B, the sorting method corresponds to recording the defect entry
15 starting from the second bit (bit 62) thereof in an ascending order. Accordingly, the defect entries are sorted by the 'status 1' field, which is configured of 4 bits (bit 63 to bit 60). This indicates that sorting is performed by each defect entry type. Herein, recording of the defect entry is
20 not performed starting from the first bit (bit 63) so that, when performing the recording process of the defect entries, 'RAD 1 type = 0000b' and 'RAD 2 type = 1000b' may be considered as the same defect entry. Therefore, when sorting the defect entries by ascending order starting from the
25 second bit (bit 62), defect entries within the defect list

are sorted by the following order: 'status 1' field → second field ('Defective Cluster first PSN' field) → 'status 2' field → third field ('Replacement Cluster first PSN' field).

FIG. 3A to FIG. 3E illustrate examples for describing defect entry types and recording methods according to the present invention. Herein, FIG. 3A illustrates the 'RAD 1 type' defect entry. More specifically, the RAD 1 defect entry has normally replacement recorded the defective cluster within the replacement cluster. Therefore, for example, the data that have been or that will be recorded on the defective cluster (A) within the user data area are replacement recorded in the replacement cluster (a) within the spare area. In other words, the method of recording the 'RAD 1 type' defect entry includes recording a '0000b' value identifying the defect entry as the 'RAD 1 type' within the 'status 1' field, recording a first physical sector number (PSN) of the defective cluster (A) within the second field ('Defective Cluster first PSN' field), recording a '0000b' value indicating a normal status within the 'status 2' field, and recording a first physical sector number (PSN) of the replacement cluster (a) within the third field ('Replacement Cluster first PSN' field). Accordingly, a value indicating a new status that is decided during a standardization process may be recorded in the 'status 2' field in the present invention. However, only the examples of the defect entries

having a normal status value '0000b' will be given in the description of FIG. 3A to FIG. 4B of the present invention.

FIG. 3B illustrates the 'RAD 2 type' defect entry. More specifically, the RAD 1 defect entry allocates a replacement

5 cluster corresponding to the defective cluster, but the replacement recording is not yet performed on the replacement cluster. Therefore, for example, a replacement cluster (a) is allocated within the spare area for the data that have been or that will be recorded on the defective cluster (A)

10 within the user data area. In other words, the method of recording the 'RAD 2 type' defect entry includes recording a '1000b' value identifying the defect entry as the 'RAD 2 type' within the 'status 1' field, recording a first physical sector number (PSN) of the defective cluster (A) within the

15 second field ('Defective Cluster first PSN' field), recording a '0000b' value indicating a normal status within the 'status 2' field, and recording a first physical sector number (PSN) of the replacement cluster (a) within the third field ('Replacement Cluster first PSN' field).

20 FIG. 3C illustrates the 'NRD type' defect entry. More specifically, the NRD defect entry has not yet allocated the replacement cluster corresponding to the defective cluster. Therefore, for example, when the defective cluster (A) is detected in the user data area, only the defect entry for

25 managing the detected defective cluster (A) is recorded. In

other words, the method of recording the 'NRD type' defect entry includes recording a '0001b' value identifying the defect entry as the 'NRD type' within the 'status 1' field, recording a first physical sector number (PSN) of the defective cluster (A) within the second field ('Defective Cluster first PSN' field), recording a '0000b' value indicating a normal status within the 'status 2' field, and recording zero values ('0 00 00 00h') to all 28 bits within the third field ('Replacement Cluster first PSN' field).

10 FIG. 3D illustrates the 'SPR type' defect entry. More specifically, the SPR defect entry represents a normal replacement cluster existing within the spare area for a later replacement recording process. Therefore, for example, when a defective cluster is detected (or occurs), replacement recording may be performed on the position of the replacement cluster designated within the first SPR defect entry among the plurality of defect entries registered as the SPR defect entry according to the defect list sorting. In other words, the method of recording the 'SPR type' defect entry includes recording a '0010b' value identifying the defect entry as the 'SPR type' within the 'status 1' field, recording zero values ('0 00 00 00h') to all 28 bits within the second field ('Defective Cluster first PSN' field) since a corresponding defective cluster is not yet allocated, recording a '0000b' value indicating a normal status within the 'status 2' field,

and recording a first PSN of the replacement cluster (e.g., 'a', 'b', and 'c') within the third field ('Replacement Cluster first PSN' field). Referring to FIG. 3D, if three replacement clusters (a), (b), and (c) are registered as SPR
5 type defect entries, the replacement clusters are sorted and recorded within the spare area by order of the lowest PSN, such as 'a' → 'b' → 'c'.

FIG. 3E illustrates the 'unusable type' defect entry. More specifically, the unusable defect entry represents clusters
10 that are not used due to defects detected within the spare area. Therefore, for example, when a particular cluster within the spare area is detected to be defective, the cluster is replaced with a normal replacement cluster registered within the SPR defect entry, whereas the defect-
15 detected cluster within the spare area is registered and managed as an 'unusable' defect entry. In other words, the method of recording the 'unusable' defect entry includes recording a '0111b' value identifying the defect entry as the 'unusable type' within the 'status 1' field, recording zero
20 values ('0 00 00 00h') to all 28 bits within the second field ('Defective Cluster first PSN' field) since a corresponding defective cluster does not exist, recording a '0000b' value indicating a normal status within the 'status 2' field, and recording a first PSN of the clusters (e.g., 'a', and 'c')
25 within the spare area that are detected to be defective

within the third field ('Replacement Cluster first PSN' field). Referring to FIG. 3E, if two replacement clusters (a) and (c) are detected to be defective within the spare area, each of the clusters is registered as an 'unusable' defect entry. And, these 'unusable' defect entries are sorted and recorded within the spare area by order of the lowest PSN, such as 'a' → 'c'.

More specifically, in the present invention, when recording the second field ('Defective Cluster first PSN' field) of the 'unusable' defect entry, all 28 bits therein is required to be recorded as zero values ('0 00 00 00h'). If an arbitrary set of dummy data that does not correspond to the zero value ('0 00 00 00h') is recorded on the second field ('Defective Cluster first PSN' field), sorting may be performed randomly and not by the particular sorting order described above. In other words, as the second field is sorted earlier than the third field, if the value of the second field is recorded as arbitrary dummy data, sorting of the 'unusable' defect entries may not be performed properly. Accordingly, if a formatting process including a certification process is to be performed, and if the sorting of the 'unusable' defect entries is not properly performed, a problem may occur in locating the place (or position) of the defective cluster designated by the corresponding 'unusable' defect entry. Particularly, when performing a formatting process including

certification, a pick-up means frequently performs search operations such as track jump operations in order to locate the defective cluster position (or place) corresponding to the 'unusable' defect entry within the spare area. Such frequent search operations deteriorates the overall system performance.

In order to resolve such problems, it is preferable that the 'unusable' defect entries are sorted within the spare area by an ascending order starting from the lowest PSN. Accordingly, in order to perform a preferable sorting of the 'unusable' defect entries, the second field ('Defective Cluster first PSN' field) value within the 'unusable' defect entries should be recorded as zero values ('0 00 00 00h'). Therefore, when performing the formatting process including certification, reference is made to the 'unusable' defect entries sorted as described above (e.g., sorting is performed by the position order of the defective clusters within the spare area that are recorded on the third field of the 'unusable' defect entries), so that the defective clusters can be certified by the PSN order sorted as described above. Thus, without having to perform any search operation or by performing only a minimum number of search operations, such as track jump operations, the system may search the position of each defective cluster within the spare area by a specific order so as to certify the corresponding cluster.

FIG. 4A and FIG. 4B respectively illustrate a defect management method and a method for recording defect management information. In the examples shown in FIG. 4A and FIG. 4B, each defect entry type is sorted to configure a defect list (DFL). For example, as shown in FIG. 4A, each of the defective clusters 'A' and 'C' and replacement clusters 'a' and 'c' configures the defect entries associated with the 'RAD 1 type'. Also, each of the defective clusters 'B' and 'D' and replacement clusters 'e' and 'f' configures the defect entries associated with the 'RAD 2 type'. And, the defective cluster 'E' configures the defect entry associated with the 'NRD type'. Furthermore, each of the replacement clusters 'h', 'i', and 'j' configures the defect entries associated with the 'SPR type'. Finally, each of the defective clusters 'b', 'd', and 'g' within the spare area configures the defect entries associated with the 'unusable type'.

In the example shown in FIG. 4A, FIG. 4B illustrates a defect list (DFL) having the defect entries sorted therein. The defect entries are first sorted by defect entry types, more specifically, by the order of 'RAD' type → 'NRD' type → 'SPR' type → 'unusable' type. Thereafter, within the same defect entry type, the defect entries are sorted in accordance with the values recorded in the second field ('Defective Cluster first PSN' field) and/or the third field ('Replacement

Cluster first PSN' field). Based upon the above-described sorting rule, FIG. 4B illustrates in a table form the final sorted configuration of the defect entries generated, as shown in FIG. 4A. Accordingly, although it is apparent that

5 the normal replacement clusters within the spare area are all included as the 'SPR' type entries, only 3 normal clusters 'h', 'i', and 'j' will be illustrated in FIG. 4B, for simplicity of the description of the present invention. Furthermore, apart from the defect entry types described in

10 the present invention, other defect entry types (e.g., a Possibly Bad Area (PBA) type) may exist, and, in this case, the same defect entry recording method and sorting method according to the present invention may be applied herein.

FIG. 5 illustrates an optical recording and reproducing

15 apparatus of a recording medium according to the present invention. The optical recording and reproducing apparatus, which records data on the optical disc or reproduces the data recorded thereon, includes a recording/reproducing device 20, a controller 12, an audio/video (AV) decoder 17, and an AV

20 encoder 18. The recording/reproducing device 20 includes a pick-up unit 11 for directly recording data on the optical disc or for reading data recorded on the optical disc, a signal processor 13 either recovering the reproduction signal received from the pick-up unit 11 to a desired signal value,

25 or modulating a signal to be recorded to an optical disc

recordable signal and transmitting the modulated signal to the pick-up unit 11, a servo 14 accurately reading the signal from the optical disc, or controlling the operations of the pick-up unit 11, a memory 15 for temporarily storing the management information including the defect management information, and a microcomputer 16 controlling the above operations. An apparatus only including the recording/reproducing device 20 is referred to as a "drive", which is also used as a peripheral computer device.

10 Also, the controller 12 controls the overall operation of the optical recording and reproducing apparatus. And, according to the present invention, the controller 12 refers to user commands through a user interface and transmits a recording (or writing) and/or reproducing (or reading) command for recording data on the optical disc and for reproducing data to the recording/reproducing device 20. In addition, in accordance with the controls of the controller 12, the AV decoder 17 decodes the signal read from the optical disc and decodes the read signal, so as to recover the signal as desired information, thereby providing the recovered information to the user. And, in order to perform the function of recording a signal on the optical disc, the AV encoder 18 converts an input signal into a signal of a specific format (e.g., an MPEG-2 transport stream) depending upon the controls of the controller 12 and, then, provides

15
20
25

the converted signal to the signal processor 13. Accordingly, depending upon the product, the microcomputer 16 and the controller 12 may be formed as a single body so as to form a controller part. Hereinafter, a method for recording defect management information and a method for formatting the recording medium using the optical recording and reproducing apparatus according to the present invention will now be described with reference to FIG. 6 and FIG. 7.

FIG. 6 illustrates a flow chart of a method for recording defect management information according to the present invention. When a disc is loaded in the optical recording and reproducing apparatus, the recording of data on the disc or the reading of data from the disc is initiated in accordance with the command of the controller 12 (S10). If a defect area is detected while performing Step 10 (S20), the microcomputer 16 decides whether or not the defect list (DFL) is to be updated (S30). More specifically, depending upon the system, either the defect list is immediately updated after the defect area has been detected, or the recording (or writing)/reproducing (or reading) process is performed during a predetermined period and all defect areas that are detected during the corresponding period are reported simultaneously so that the defect list can be updated.

In Step 30, if the defect list is to be updated, the defect entries that have already been registered within the defect

list are sorted along with the currently detected defect entries, so as to create a new defect list (S40). The sorting process is performed based upon the recording method by each defect entry type and sorting rule. Therefore, for
5 example, the format of the finally updated defect list may be the same as the format shown in FIG. 4B.

FIG. 7 illustrates a flow chart of a method for formatting the recording medium according to the present invention. In the present invention, the "formatting" process (wherein a
10 "re-formatting" process is also included) is used for disregarding (or ignoring) the data initially existing within the disc and newly using the disc. Accordingly, when a formatting process is performed in accordance with a user command (S100), the disc may be newly used (or be re-used).
15 When performing the formatting process, a certification process certifying all areas or a particular area within the disc may be selectively performed (S200). For example, all areas within the disc are sequentially certified starting from the first area so as to determine whether a defect
20 exists or not. However, when a defect is detected a defect list (DFL) in accordance with the above-described defect entry recording method and sorting method. This step is particularly referred to as a 'Full certification' method (S300).

25 Although the 'Full certification' process satisfies the

perfection of the certification process, a large amount of time is required for the process. Therefore, only the defective cluster registered as the defect area within the already existing defect list (DFL) may be selectively certified. This step is particularly referred to as a 'Quick certification' method (S400). When using the 'Quick certification' method, the certification process is performed based upon the registered defect entry. More specifically, the 'RAD 1' type, 'RAD 2' type, and 'NRD' type defect entries certify only the defective clusters in the user data area registered to the second field within each defect entry. Furthermore, the 'unusable' type defect entries certify only the defective clusters in the spare area registered to the third field within each defect entry.

For example, when performing the 'Quick certification' method based upon the defect list sorted as shown in FIG. 4A and FIG. 4B, the system is capable of sequentially certifying only the defective clusters starting from the inner circumference of the optical disc (*i.e.*, starting from the cluster having the lowest PSN). Therefore, clusters 'b', 'd', and 'g', which are the 'unusable' defective clusters within the spare area, are sequentially certified, and clusters 'A', 'B', 'C', 'D', and 'E', which are the defective clusters within the user data area, are also sequentially certified.

The recording medium, and the method and apparatus for

recording defect management information on the recording medium according to the present invention have the following advantages. By using the preferred defect management recording method and sorting method of the recording medium, 5 the defect management information can be efficiently managed. Also, sorting the defect entries configuring the defect management information may also be facilitated.

Industrial Applicability

10 It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention 15 provided they come within the scope of the appended claims and their equivalents.

[CLAIMS]

1. A method for recording defect management information of a recording medium, comprising:

5 recording a defect entry on the recording medium, wherein the defect entry comprises:

a first field that can identify a defect entry type;

10 a second field recording position information of a defect area within a user data area; and

a third field recording position information of a replacement area within a spare area; and

15 recording position information corresponding to the second field and/or the third field in accordance with the defect entry type decided by the first field, wherein, in case of a defect entry type having no corresponding position information, the corresponding field is set to zero (0).

2. The method of claim 1, wherein, when the defect entry is 20 an 'unusable' type, the second field value within the corresponding defect entry is set to zero (0).

3. The method of claim 1, wherein, when the defect entry is a 'spare (SPR)' type, the second field value within the 25 corresponding defect entry is set to zero (0).

4. The method of claim 1, wherein, when the defect entry is a 'non re-allocatable defect (NRD)' type, the third field value within the corresponding defect entry is set to zero (0).

5

5. In recording a defective cluster as a defect entry within a spare area, a method for recording defect management information of a recording medium, comprising:

recording status information for identifying a type of the defect entry in a first field of the defect entry;

setting to zero (0) a second field of the defect entry recording position information of a defect area within a user data area; and

recording an address of the defective cluster within the corresponding spare area in a third field of the defect entry, wherein position information of a replacement area within the spare area is recorded.

6. A method for updating defect management information, comprising:

when updating an already existing defect list by using a new defect entry as the defect management information, sorting the defect entries registered in the already existing defect list and the defect entries that are to be updated, thereby updating the defect list,

wherein the sorting of the defect entries is performed by sorting the defect entries by each type, and by sorting the defect entries by order of physical sector address (PSN) within the same defect entry type.

5

7. In a method for sorting a plurality of defect entries, the method for sorting defect entries comprising:

primarily sorting the defect entries by identifying the defect entries by each type; and

10 based upon the primary sorting, and within the same defect entry type, secondarily sorting the defect entries sequentially starting from the lowest physical sector number (PSN) among defective clusters and/or replacement clusters recording in the corresponding entry type.

15

8. The method of claim 7, wherein, when performing the secondary sorting, and when the defect entry type is an 'unusable' type, the corresponding defect entries are sorted by order of defective clusters having the lowest physical
20 sector number (PSN) within the spare area.

9. The method of claim 7, wherein, when performing the secondary sorting, and when the defect entry type is a 'spare (SPR)' type, the corresponding defect entries are sorted by
25 order of replacement clusters having the lowest physical

sector number (PSN) within the spare area.

10. The method of claim 7, wherein, when performing the secondary sorting, and when the defect entry type is a 'non re-allocatable defect (NRD)' type, the corresponding defect entries are sorted by order of defective clusters having the lowest physical sector number (PSN) within the user data area.

11. The method of claim 7, wherein, when performing the secondary sorting, and when the defect entry type is a 're-allocatable defect (RAD)' type, the corresponding defect entries are sorted by order of defective clusters having the lowest physical sector number (PSN) within the user data area.

12. A method for formatting a recording medium, comprising:

selecting a certification method; and

when using a quick certification method, certifying only defect entries included in a sorted defect list, so as to recheck whether any defect exists, wherein the defect entries on the sorted defect list are sorted by defect entry type, and wherein, within the same defect entry type, sorting is performed sequentially starting from a cluster having the lowest physical sector number (PSN), among defective clusters and/or replacement clusters recorded in the corresponding

defect entry type.

13. The method of claim 12, wherein, when using a quick certification method, and when the defect entry is an
5 'unusable' type, the corresponding defect entries are certified by order of defective clusters having the lowest physical sector number (PSN) within a spare area.

14. The method of claim 12, wherein, when using a full
10 certification method, all clusters are sequentially certified by order of the lowest physical sector number (PSN) starting from an inner circumference of the recording medium, thereby verifying whether a defect exists.

15. A recording medium, comprising:

a data area and a lead-in area adjacent to the data area; and

a defect management area recording in the lead-in area defect entries for managing defects within the data area,
20 wherein the defect entry being recorded in the defect management area comprises a first field that can identify a defect entry type, a second field recording position information of a defect area within a user data area, and a
third field recording position information of a replacement
25 area within a spare area, and wherein position information

corresponding to the second field and/or the third field is recorded in accordance with the defect entry type decided by the first field, wherein, in case of a defect entry type having no corresponding position information, the
5 corresponding field is set to zero (0).

16. An apparatus for recording defect management information on a recording medium, comprising:

a pick-up; and

10 a microcomputer controlling the pick-up so that defective clusters newly generated during a recording and/or reproducing of the recording medium are recorded as a defect entry, wherein the defect entry is recorded by configuring a first field that can identify a defect entry type, a second
15 field recording position information of a defect area within a user data area, and a third field recording position information of a replacement area within a spare area, and controlling the pick-up so that position information corresponding to the second field and/or the third field is
20 recorded in accordance with the defect entry type decided by the first field, wherein, in case of a defect entry type having no corresponding position information, the corresponding field is set to zero (0).

25 17. An apparatus for recording defect management

information on a recording medium, comprising:

a pick-up; and

a microcomputer controlling the pick-up so that defective clusters within a spare area newly generated during a recording and/or reproducing of the recording medium are recorded as a defect entry, wherein status information for identifying a type of the defect entry is recorded in a first field of the defect entry, a second field of the defect entry recording position information of a defect area within a user data area is set to zero (0), and a third field of the defect entry is recorded with an address of the defective cluster within the corresponding spare area.

FIG. 1

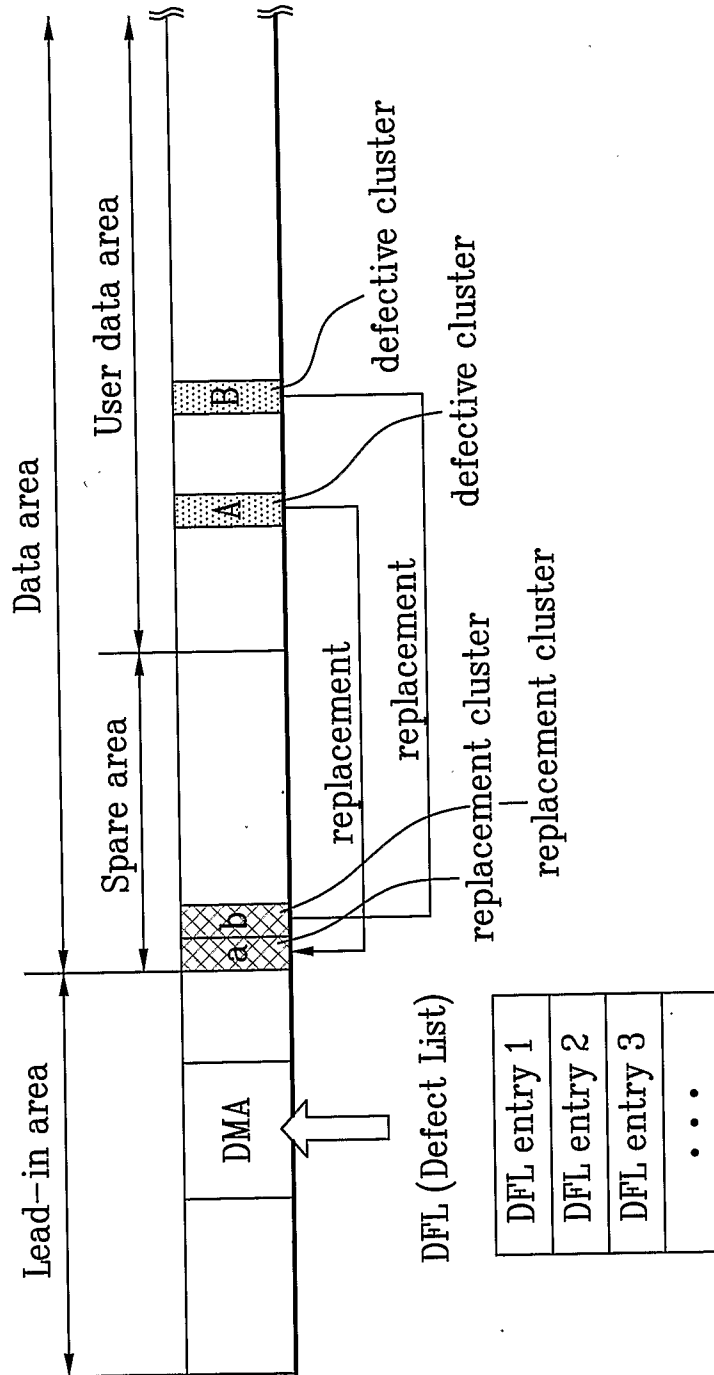


FIG. 2A

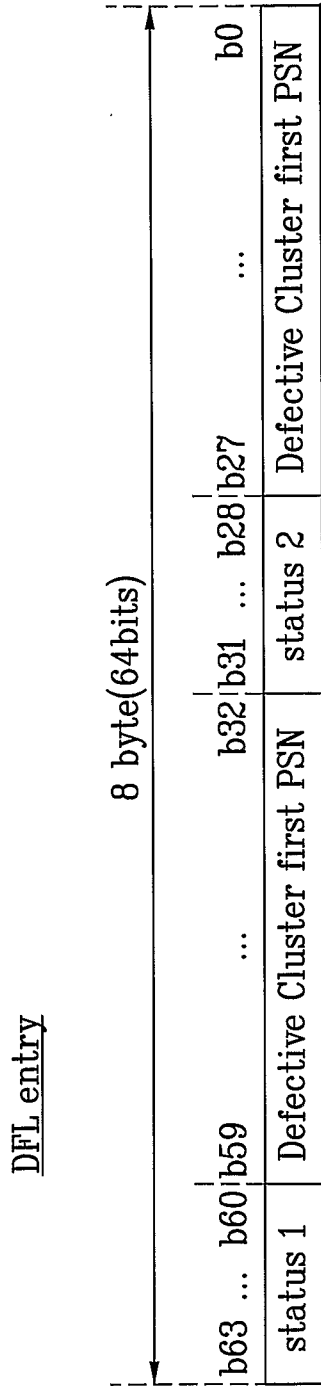


FIG. 2B


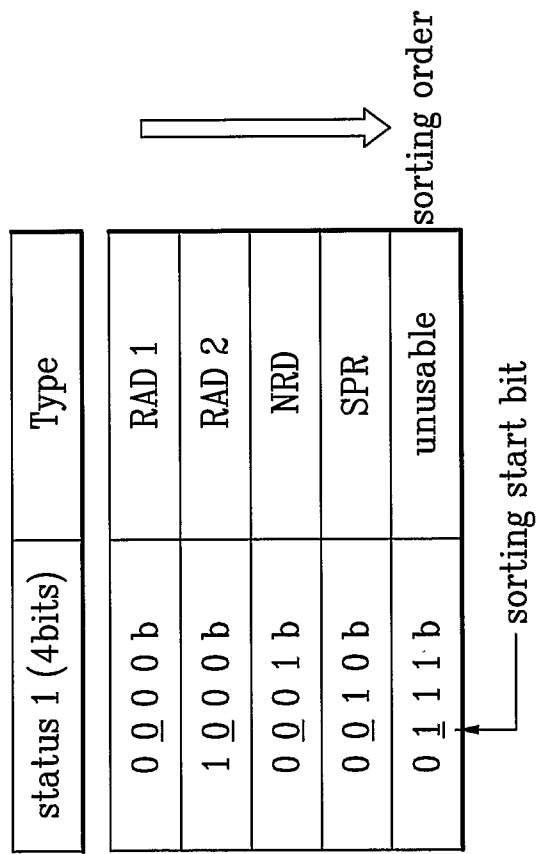


FIG. 3A


RAD type1 (status 1 : 0000b)

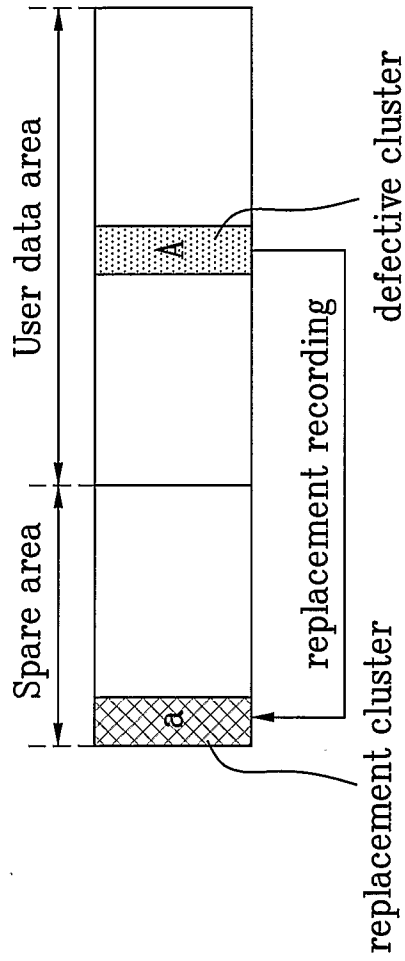

DFL entry	status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
	0000b	first PSN in 'A' Cluster	0000b	first PSN in 'a' Cluster

FIG. 3B


RAD type 2 (status1 : 1000b)

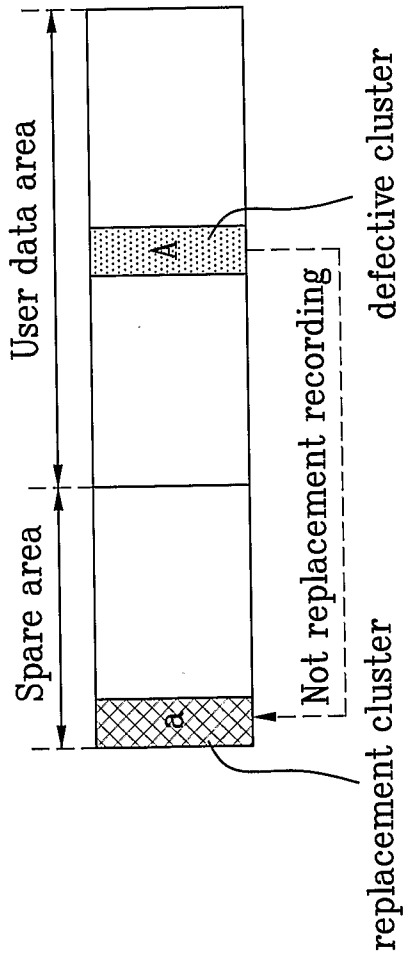

DFL entry	status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
	1000b	first PSN in 'A' Cluster	0000b	first PSN in 'a' Cluster

FIG. 3C

NRD type (status1 : 0001b)

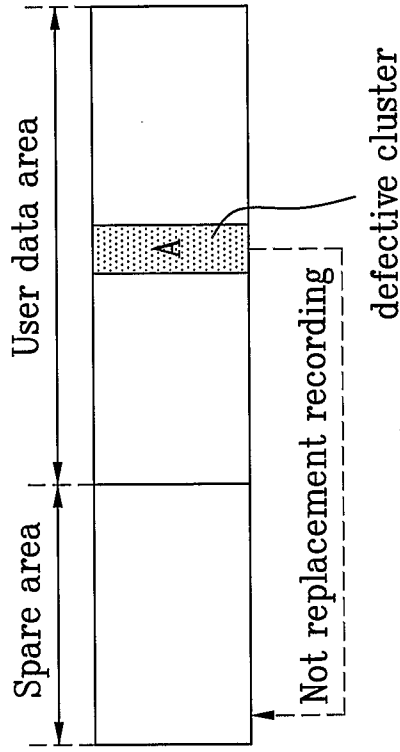


status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
0001b	first PSN in 'A' Cluster	0000b	0 00 00 00h

DFL entry

FIG. 3D

SPR type (status1 : 0010b)

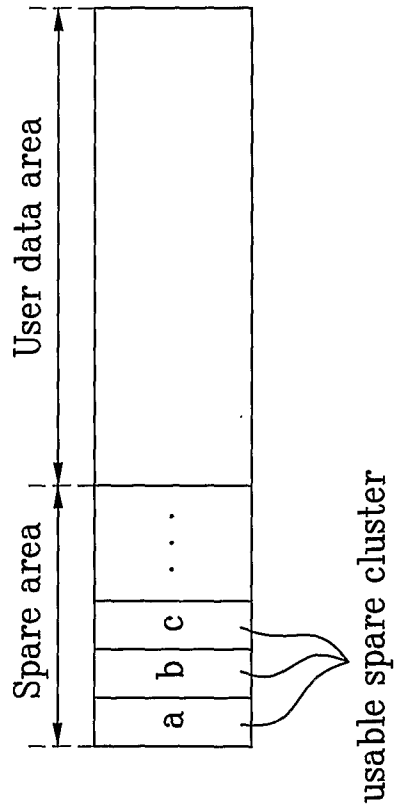


status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
0010b	0 00 00 00h	0000b	first PSN in 'a' Cluster
0010b	0 00 00 00h	0000b	first PSN in 'b' Cluster
0010b	0 00 00 00h	0000b	first PSN in 'c' Cluster

DFL entry

FIG. 3E

Unusable type (status1 : 0111b)

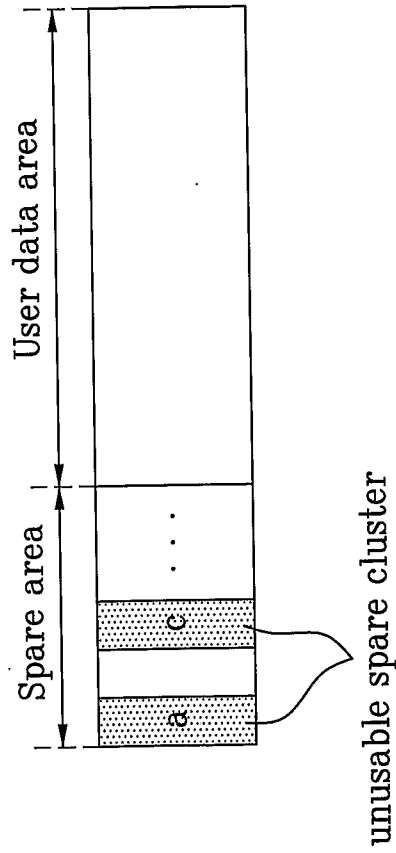

status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
0111b	0 00 00 00h	0000b	first PSN in 'a' unusable cluster
0111b	0 00 00 00h	0000b	first PSN in 'c' unusable cluster

DFL entry

FIG. 4A

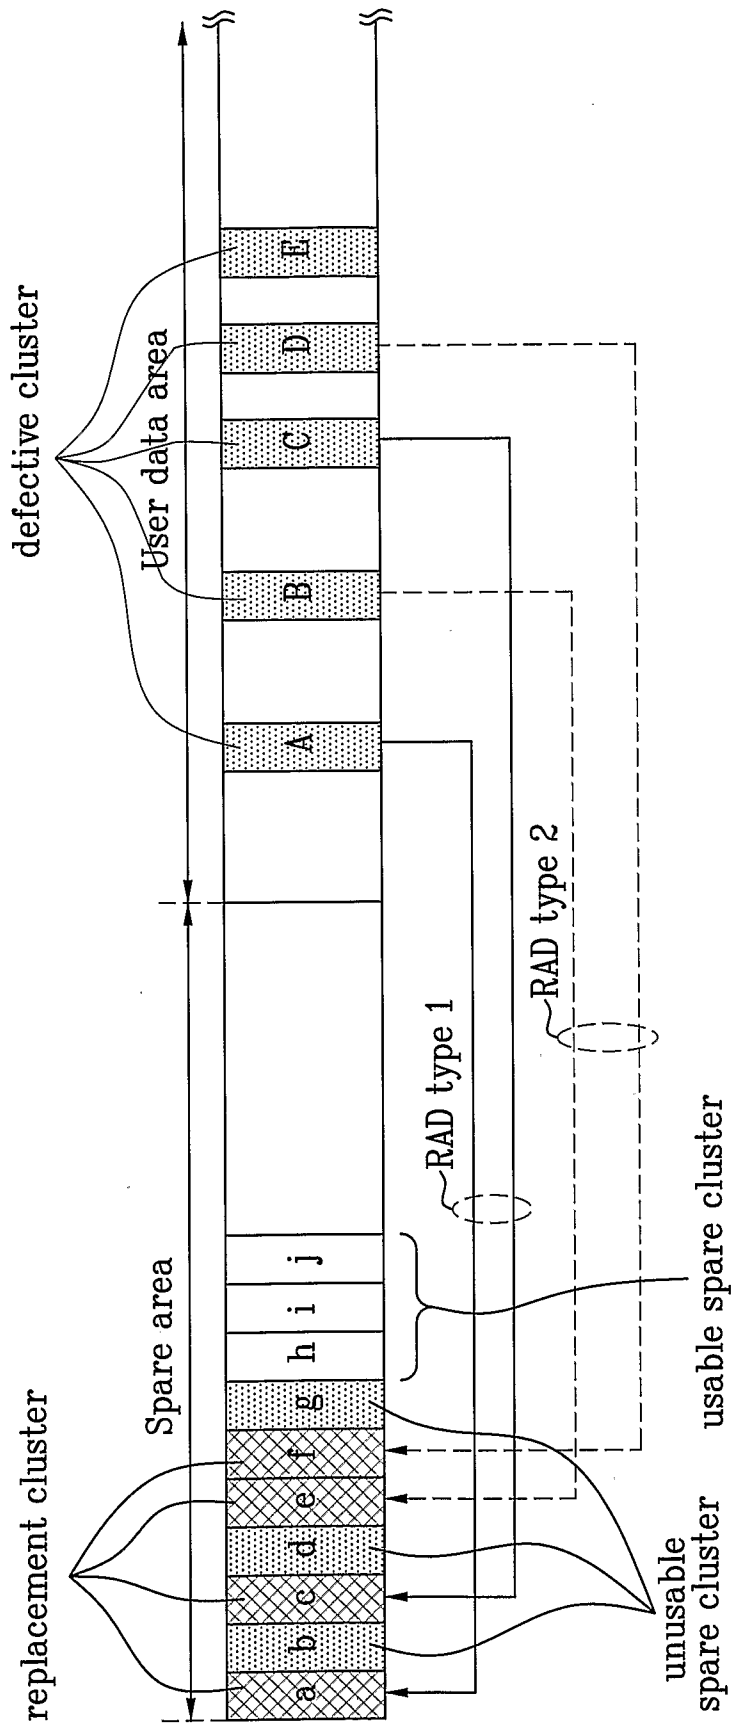


FIG. 4B

DFL (with sorting)

status1	Defective Cluster first PSN	status2	Replacement Cluster first PSN
0000b	first PSN in 'A' Cluster	0000b	first PSN in 'a' Cluster
1000b	first PSN in 'B' Cluster	0000b	first PSN in 'e' Cluster
0000b	first PSN in 'C' Cluster	0000b	first PSN in 'c' Cluster
1000b	first PSN in 'D' Cluster	0000b	first PSN in 'f' Cluster
0001b	first PSN in 'E' Cluster	0000b	0 00 00 00h
0010b	0 00 00 00h	0000b	first PSN in 'h' spare Cluster
0010b	0 00 00 00h	0000b	first PSN in 'i' spare Cluster
0010b	0 00 00 00h	0000b	first PSN in 'j' spare Cluster
0111b	0 00 00 00h	0000b	first PSN in 'b' Unusable Cluster
0111b	0 00 00 00h	0000b	first PSN in 'd' Unusable Cluster
0111b	0 00 00 00h	0000b	first PSN in 'g' Unusable Cluster

{ RAD (rows 1-4)
 { NRD (rows 5-6)
 { SPR (rows 7-9)
 { unusable (rows 10-12)

FIG. 5

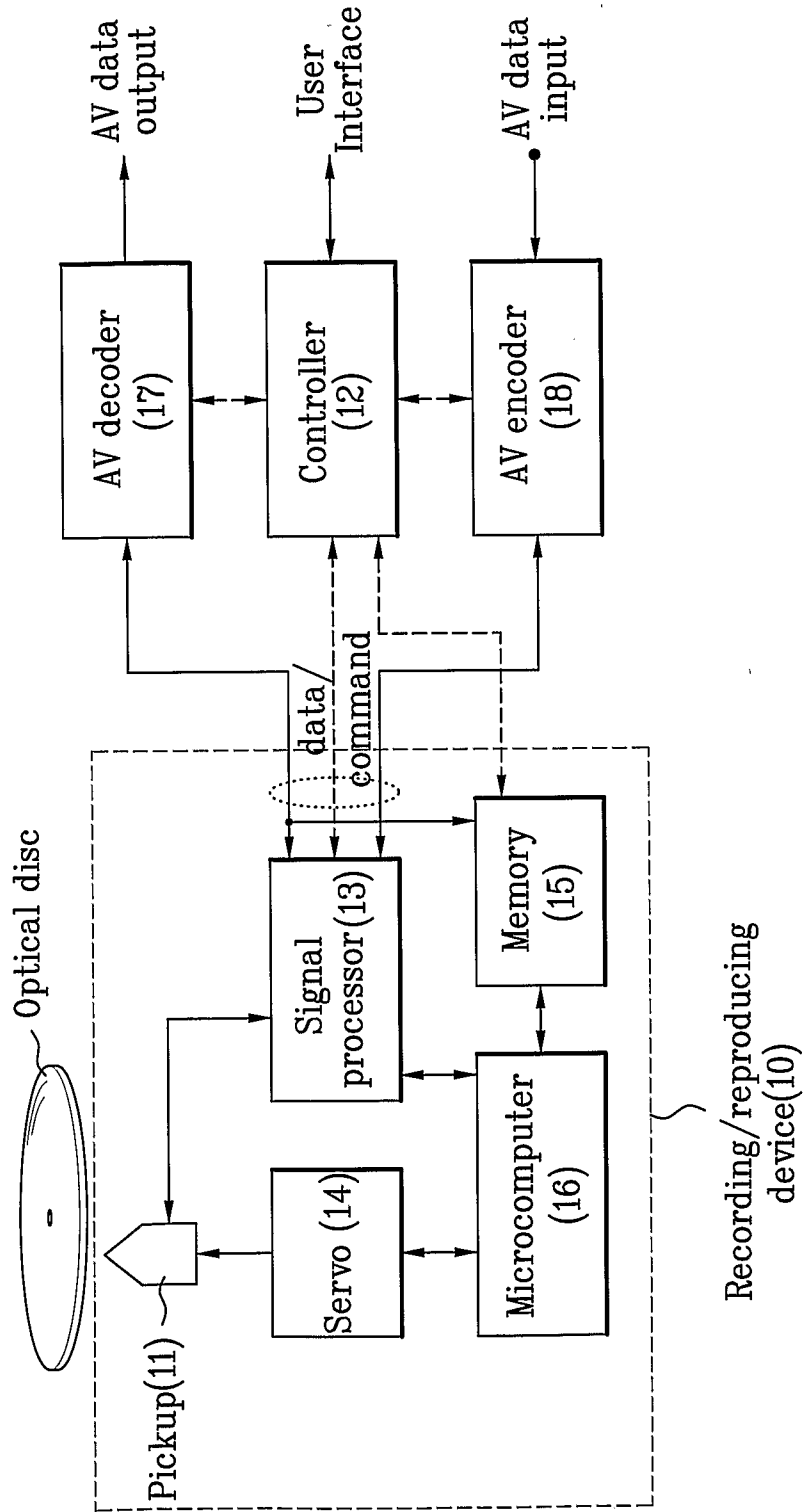


FIG. 6


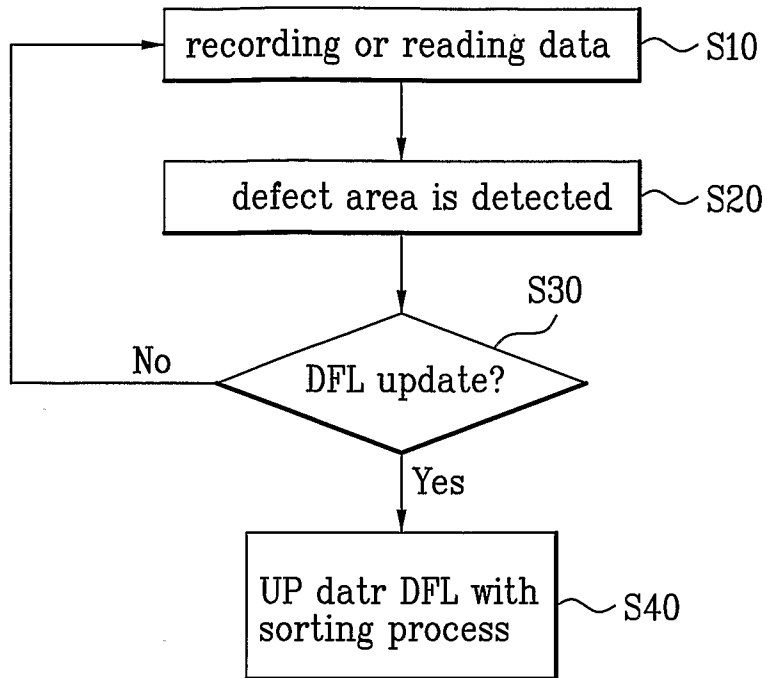


FIG. 7

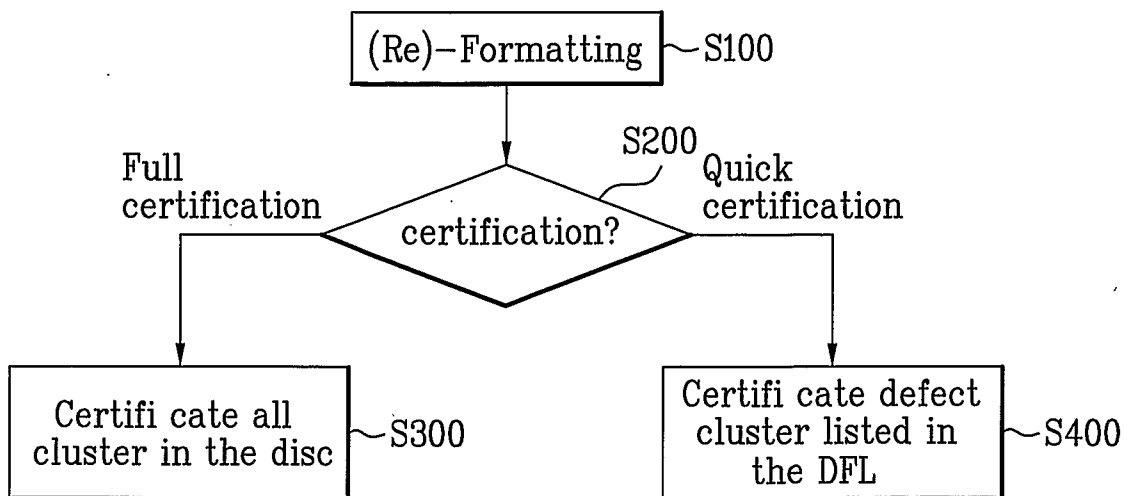

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR 2006/004484

A. CLASSIFICATION OF SUBJECT MATTER IPC ⁸ : G11B 20/18 (2006.01); G11B 7/007 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC ⁸ : G11B 20/18, G11B 7/007		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPI, EPODOC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003149918 A (Takaichi) 7 August 2003 (07.08.2003) <i>whole document</i>	1,5-7,12,15-17
	--	
A	EP 1347452 A2 (Matsushita) 24 September 2003 (24.09.2003) <i>whole document</i>	1,5-7,12,15-17
	--	
A	WO 03 079353 (Matsushita) 25 September 2003 (25.09.2003) <i>whole document</i>	1,5-7,12,15-17

<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 9 January 2007 (09.01.2007)		Date of mailing of the international search report 13 February 2007 (13.02.2007)
Name and mailing address of the ISA/ AT Austrian Patent Office Dresdner Straße 87, A-1200 Vienna Facsimile No. +43 / 1 / 534 24 / 535		Authorized officer GRÖSSING G. Telephone No. +43 / 1 / 534 24 / 386

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/KR 2006/004484

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
EP	A2	1347452	2003-09-24	DE	D1	60309364D	2006-12-14
				TW	B	244647B	2005-12-01
				US	A1	2006171282	2006-08-03
				US	A1	2006171281	2006-08-03
				US	A1	2003179669	2003-09-25
US	A1	2003149918	2003-08-07	WO	A1	02101744	2002-12-19
				CN	A	1462447	2003-12-17
				JP	A	2002334527	2002-11-22
WO	A	79353		none			