



(51) International Patent Classification:

F21S 8/08 (2006.01) *F21V 15/015* (2006.01)
F21V 15/00 (2015.01) *F21Y 103/00* (2016.01)
F21V 15/01 (2006.01)

(21) International Application Number:

PCT/US2018/043891

(22) International Filing Date:

26 July 2018 (26.07.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/537,251 26 July 2017 (26.07.2017) US

(71) Applicant: **HUBBELL INCORPORATED** [US/US]; 40 Waterview Drive, P.O. Box 1000, Shelton, CT 06484 (US).

(72) Inventors: **DAVIS, Michael**; 3434 Laurens Road, Apt. 922, Greenville, SC 29607 (US). **PATEL, Dhavalkumar**; 27 Nautical Drive, Greer, SC 29650 (US).

(74) Agent: **BARNER, Kevin**; Michel Best & Friedrich, LLP, 601 Pennsylvania Avenue, NW, Suite 700 South, Washington, DC 20004 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: LINEAR STRIP RETROFIT KIT

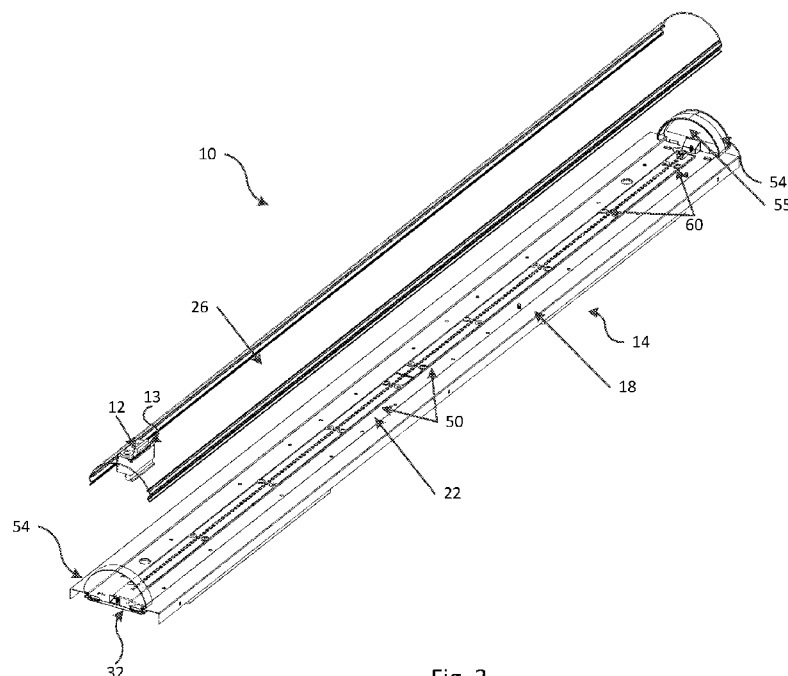


Fig. 3

(57) Abstract: A light fixture includes a housing, a recessed channel, a light-emitting element, and a lens positioned over the light-emitting element. The housing includes a mounting surface. The recessed channel includes a bottom and a pair of side walls extending along the length of the mounting surface. The light-emitting element is coupled to the bottom of the recessed channel. The lens is positioned over the light-emitting element and removably retained between the pair of side walls.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

LINEAR STRIP RETROFIT KIT

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of prior-filed, co-pending U.S. Provisional Application No. 62/537,251, filed July 26, 2017, and the entire contents of which are hereby incorporated by reference.

BACKGROUND

[0002] The present disclosure relates to the field of luminaires, and particularly to luminaire housings and lenses.

SUMMARY

[0003] In one aspect, a light fixture includes a housing, a recessed channel, a light-emitting element, and a lens positioned over the light-emitting element. The housing includes a mounting surface. The recessed channel includes a bottom and a pair of side walls extending along the length of the mounting surface. The light-emitting element is coupled to the bottom of the recessed channel. The lens is positioned over the light-emitting element and removably retained between the pair of side walls.

[0004] In another aspect, a light fixture includes a housing, a recessed channel, a light-emitting element, and a lens extending over the light-emitting element. The housing includes a first end, a second end, and a longitudinal axis extending therebetween. The housing includes a mounting surface positioned between the first and second end. The mounting surface includes the recessed channel extending from the first end to the second end along the longitudinal axis. The recessed channel includes a first side wall, a second sidewall, and a bottom disposed therebetween. The lens includes a pair of side portions and an apex portion therebetween, and the pair of side portions is received between the first side wall and the second side wall to removably retain the lens.

[0005] Other aspects of the disclosure will become apparent by consideration of the detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0006] Fig. 1 is a perspective view of a luminaire.
- [0007] Fig. 2 is a perspective view of the luminaire of Fig. 1.
- [0008] Fig. 3 is a perspective view of the luminaire in Fig. 1 with the lens removed.
- [0009] Fig. 4 is an end view of the luminaire in Fig. 1 with the lens removed.
- [0010] Fig. 5 is an enlarged perspective view of the luminaire in Fig. 1.
- [0011] Fig. 6 is an end view of the luminaire in Fig. 1 with the lens retained.

DETAILED DESCRIPTION

[0012] Before any embodiments are explained in detail, it is to be understood that the disclosure is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. A device consistent with the disclosure is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. Use of "including" and "comprising" and variations thereof as used herein is meant to encompass the items listed thereafter and equivalents thereof as well as additional items. Use of "consisting of" and variations thereof as used herein is meant to encompass only the items listed thereafter and equivalents thereof. Unless specified or limited otherwise, the terms "mounted," "connected," "supported," and "coupled" and variations thereof are used broadly and encompass both direct and indirect mountings, connections, supports, and couplings.

[0013] FIGS. 1-6 illustrate a light fixture or luminaire 10. In one embodiment, the luminaire 10 is used in a commercial or industrial environment. The luminaire 10 may be recessed or surface mounted and is electrically connected to a power source (not shown), such as a utility supply of electricity, a battery, a solar cell, a fuel cell, an alternator, a generator, etc. The lighting fixture 10 may include a transformer (not shown), such as a step-down transformer and/or an electronic driver. The luminaire 10 includes a housing 14 defining a mounting surface

18, a light-emitting element 22 (FIG. 3) coupled to the mounting surface 18, and a lens 26. In some embodiments, a lens may include one or more diffusers. As shown in FIG. 2, the housing 14 includes a first end 34 and a second end 38 and defines a longitudinal axis 42 extending between the first end 34 and the second end 38. The housing 14 may be formed from a sheet of metallic material. As shown in FIGS. 4 and 6, the housing 14 may include a driver or controller enclosure 46 containing controller hardware.

[0014] Mounting surface 18 is a generally planar, elongated, and extends generally parallel to longitudinal axis 42. A recessed channel 32 is centrally located in mounting surface 18. Recessed channel 32 includes a channel bottom 36, a first side wall 40, and a second side wall 44. The bottom 36 is generally planar, elongated, and extends generally parallel to longitudinal axis 42. In some embodiments, the channel 32 extends along the entire length of housing 14. The channel bottom 36 provides support for light-emitting element 22. For example, the light source is coupled to the channel bottom 36 by way of fasteners 60, such as screws, or by snap fits, adhesive, bonding, welding, or any other suitable coupling. The channel bottom 36 may also act as a heat sink for the light-emitting element 22.

[0015] As shown in FIG. 3 the light-emitting element 22 may include multiple light-emitting diode boards 50. Each LED board 50 includes multiple LEDs supported on an elongated circuit board (e.g., a printed circuit board or PCB). The circuit board is secured to the support surface 18 (FIG. 3). The LEDs may be arranged in a linear manner along the length of the circuit board, and the LED board 50 may be oriented parallel to the longitudinal axis 42 (FIG. 2) of the housing 14. In the illustrated embodiment, the light-emitting element 22 includes two LED boards 50 arranged in a linear manner along the length of the housing 14; in other embodiments, the light assembly 22 may include fewer or more light boards 50. In other embodiments, two or more LED boards 50 may be arranged adjacent along the longitudinal axis 42.

[0016] As shown in FIG. 4, a lens 26 covers the light-emitting element 22 and is retained in the recessed channel 32. The lens 26 has a pair of side portions 24 and an apex portion 28 between the pair of side portions 24, the side portions 24 configured to be removably retained within side walls 40, 44 of the recessed channel 32 and prevent substantial movement in a direction perpendicular to the longitudinal axis 42. Side walls 40, 44 may extend toward each

other at an acute angle from bottom 36 of recessed channel 32. Side portions 24 of lens 26 may extend away from each other at an angle substantially similar to the angle of side walls 40, 44. The spacing between side portions 24 may be selected such that lens 26 is elastically deformed when retained within side walls 40, 44 and frictionally interfaces with side walls 40, 44 of recessed channel 32, substantially preventing translation of lens 26 in recessed channel 32 in a direction parallel to longitudinal axis 42. A lens 26 may extend along the entire length of housing 14. In this embodiment, lenses 26 of a plurality of linearly adjacent luminaires 10 would form a continuous light seal.

[0017] Additionally, a luminaire 10 may include one or more end caps adjacent 54 to lens 26. An end cap 54 includes a pair of side portions and an apex portion between the pair of side portions, the side portions configured to be retained within the side walls of recessed channel 32. The side portions and apex portion of the end cap may be dimensioned similarly to side portions 24 and apex portion 28 of lens 26. Alternatively, side portions and apex portion of end cap may be dimensioned such that end cap overlaps side portions 24 and apex portion 28 of lens 26. An end cap may further have an opaque face portion 55 configured to prevent light from passing through an end of lens 26. End cap 54 may be configured to be retained in two recessed channels 32 of adjacent fixtures 10 for additional benefits such as, for example, providing additional alignment between fixtures.

[0018] A luminaire 10 may include one or more sensors 12, such as a motion sensor, an occupancy sensor, a photosensor, etc. Sensor 12 may be configured for wired or wireless networking with one or more of luminaire 10, a second luminaire substantially similar to luminaire 10, or a sensor of the second luminaire substantially similar to sensor 12. Sensor 12 is affixed in an aperture 13 of lens 26, such as, for example, a snap fitting. In a preferred embodiment, aperture 13 is configured such that sensor 12 is oriented perpendicular to the plane of the mounting surface 18. However, other configurations are possible, depending on the intended luminaire installation orientation and location. Alternatively, sensor 12 may be affixed in a mesial fitting (not shown), wherein a custom interior of the mesial fitting is configured to securably retain sensor 12 and an exterior of the mesial fitting is configured to be securable retained in a general purpose aperture 13 of lens 26. Said general purpose aperture 13 may be configured to retain a plurality of different mesial fittings corresponding to different sensors 12.

[0019] Although aspects have been described in detail with reference to certain preferred embodiments, variations and modifications exist within the scope and spirit of one or more independent aspects as described.

CLAIMS

What is claimed is:

1. A light fixture comprising:
 - a housing, including a mounting plate, having a length in a longitudinal direction;
 - a recessed channel in the mounting plate, the recessed channel including a bottom, a first side wall, and a second side wall, wherein the first side wall and the second side wall extend along the length of the mounting plate in the longitudinal direction;
 - a light-emitting element coupled to the bottom of the recessed channel; and
 - a lens positioned over the light-emitting element, the lens removably retained between the first wall and the second side wall.
2. The light fixture of claim 1, wherein
 - the lens comprises a pair of side portions and an apex portion therebetween, and the pair of side portions is received between the first side wall and the second side wall to removably retain the lens.
3. The light fixture of claim 1, further comprising
 - a sensor, wherein the sensor is affixed in an aperture of the lens.
4. The light fixture of claim 3, wherein
 - the sensor is affixed with a snap-fitting.
5. The light fixture of claim 2, wherein
 - the apex portion comprises an arcuate shape.
6. The light fixture of claim 1, wherein

the first side wall and the second side wall acutely extend from the bottom toward each other.

7. The light fixture of claim 1, wherein
the lens is fully retained along the entire length of the housing.
8. The light fixture of claim 1, further comprising
a second light-emitting element coupled to the bottom of the channel.
9. The light fixture of claim 1, further comprising
a pair of lens end caps, oppositely disposed along the longitudinal axis, adjacent to the lens, the pair of lens caps independently retained in the channel.

1/6

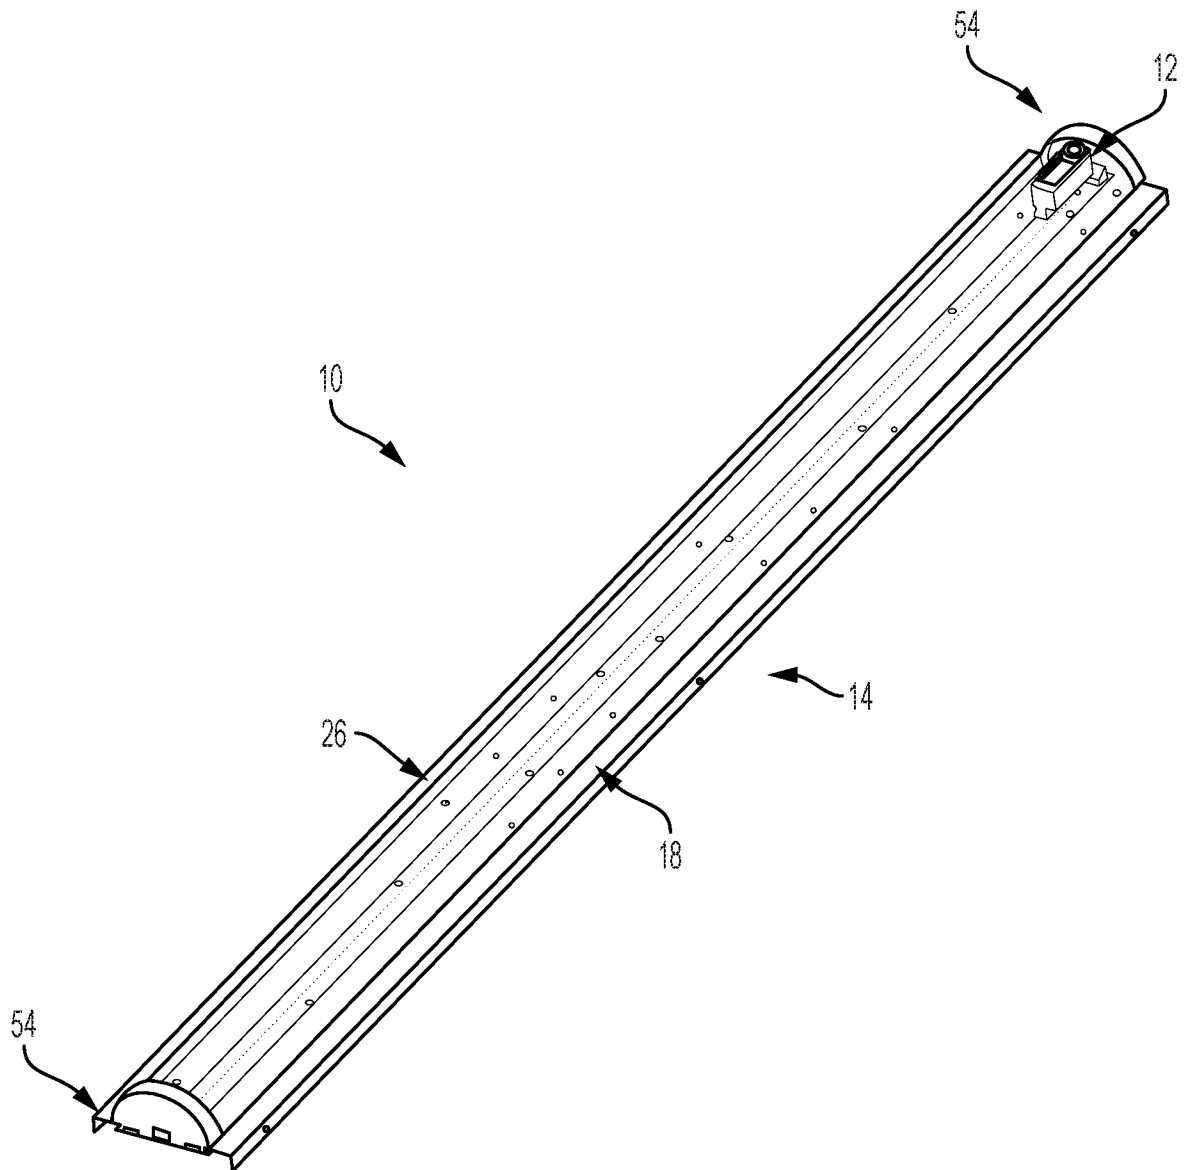


Fig. 1

2/6

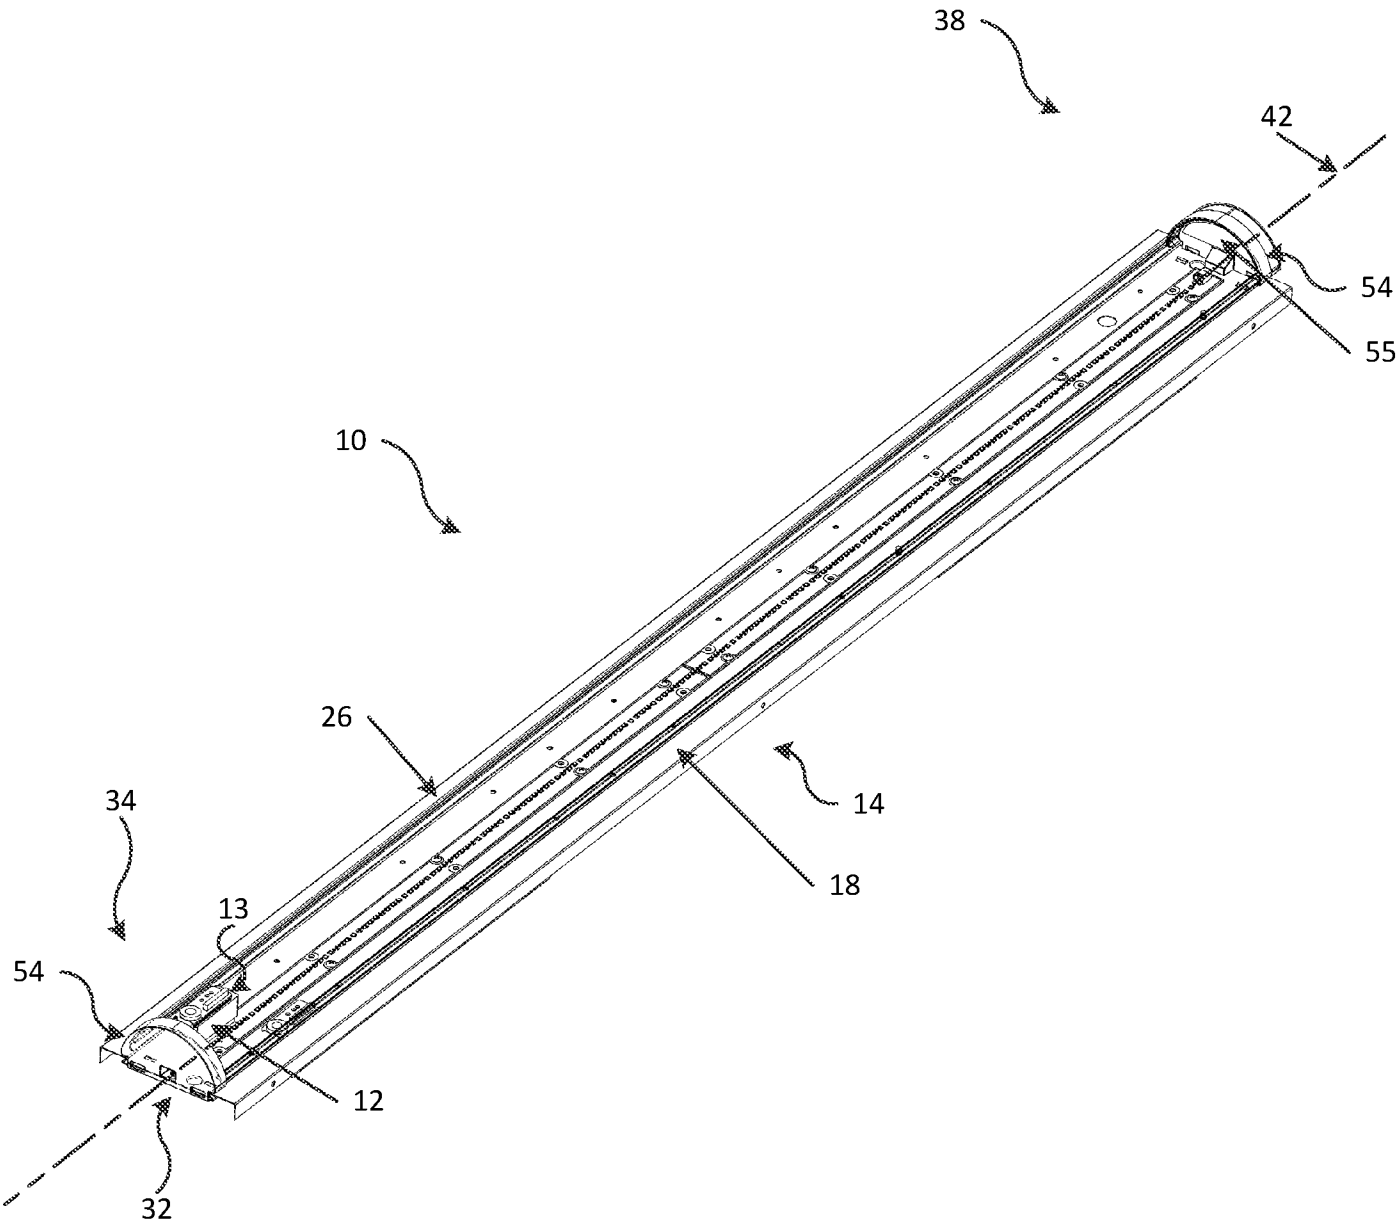


Fig. 2

3/6

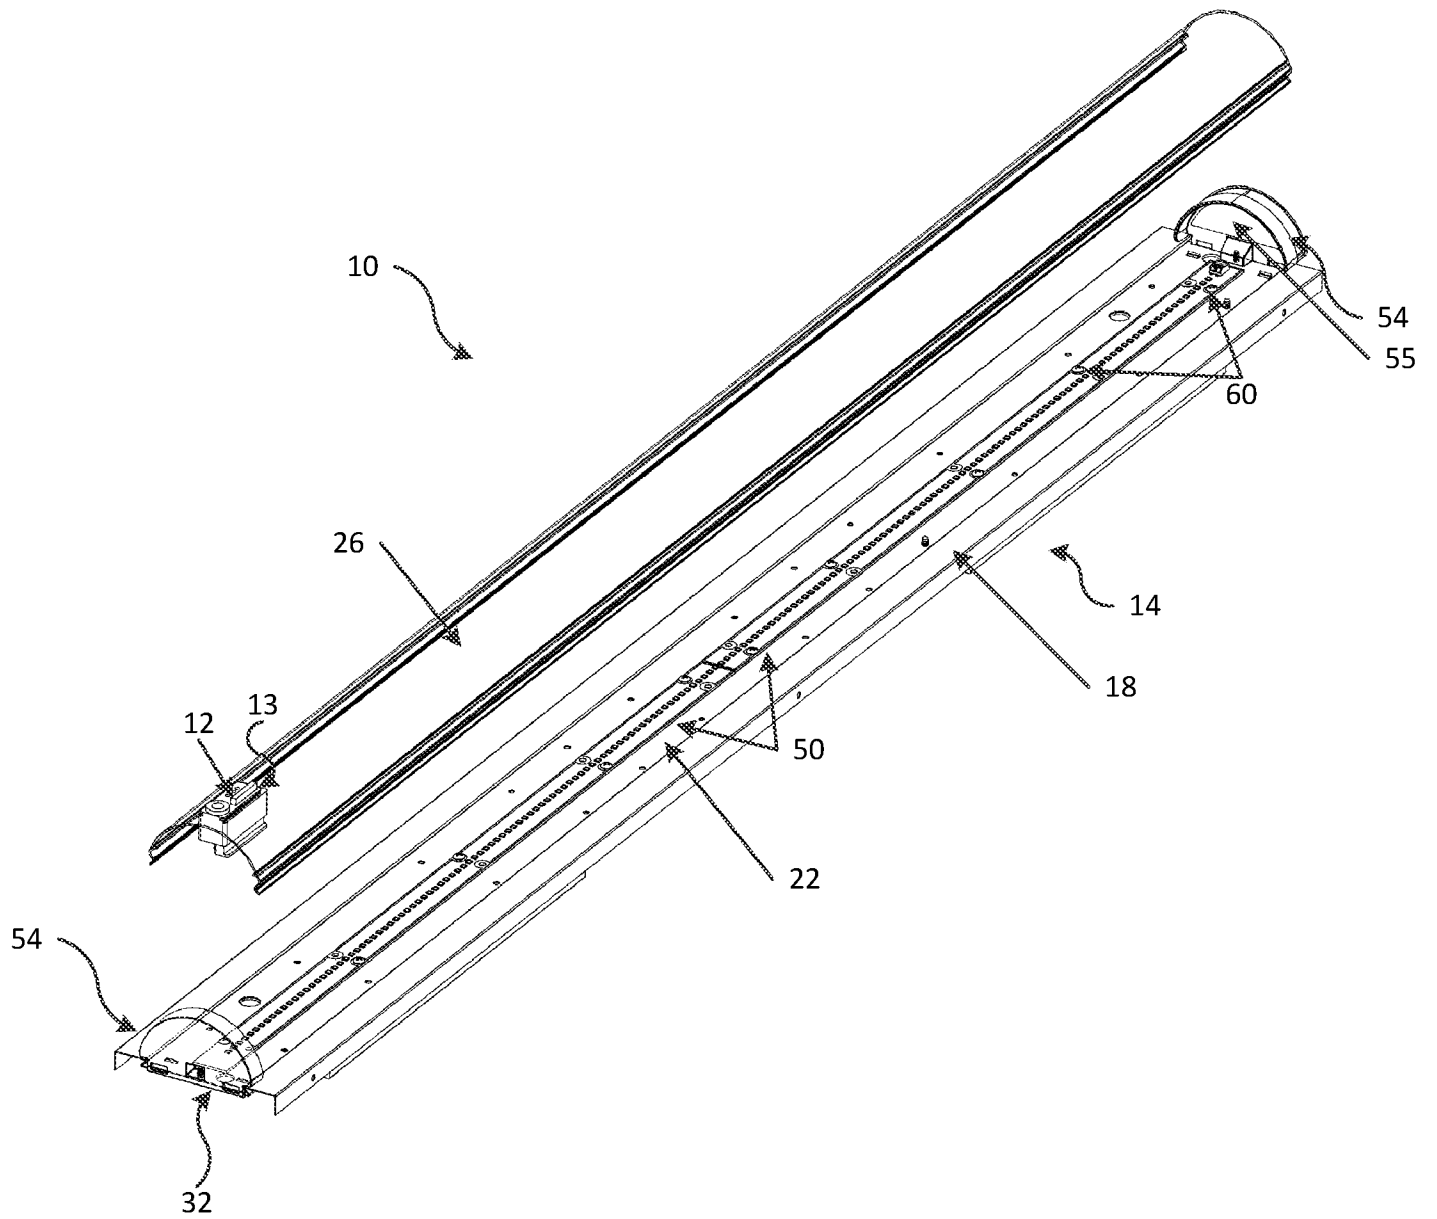


Fig. 3

4/6

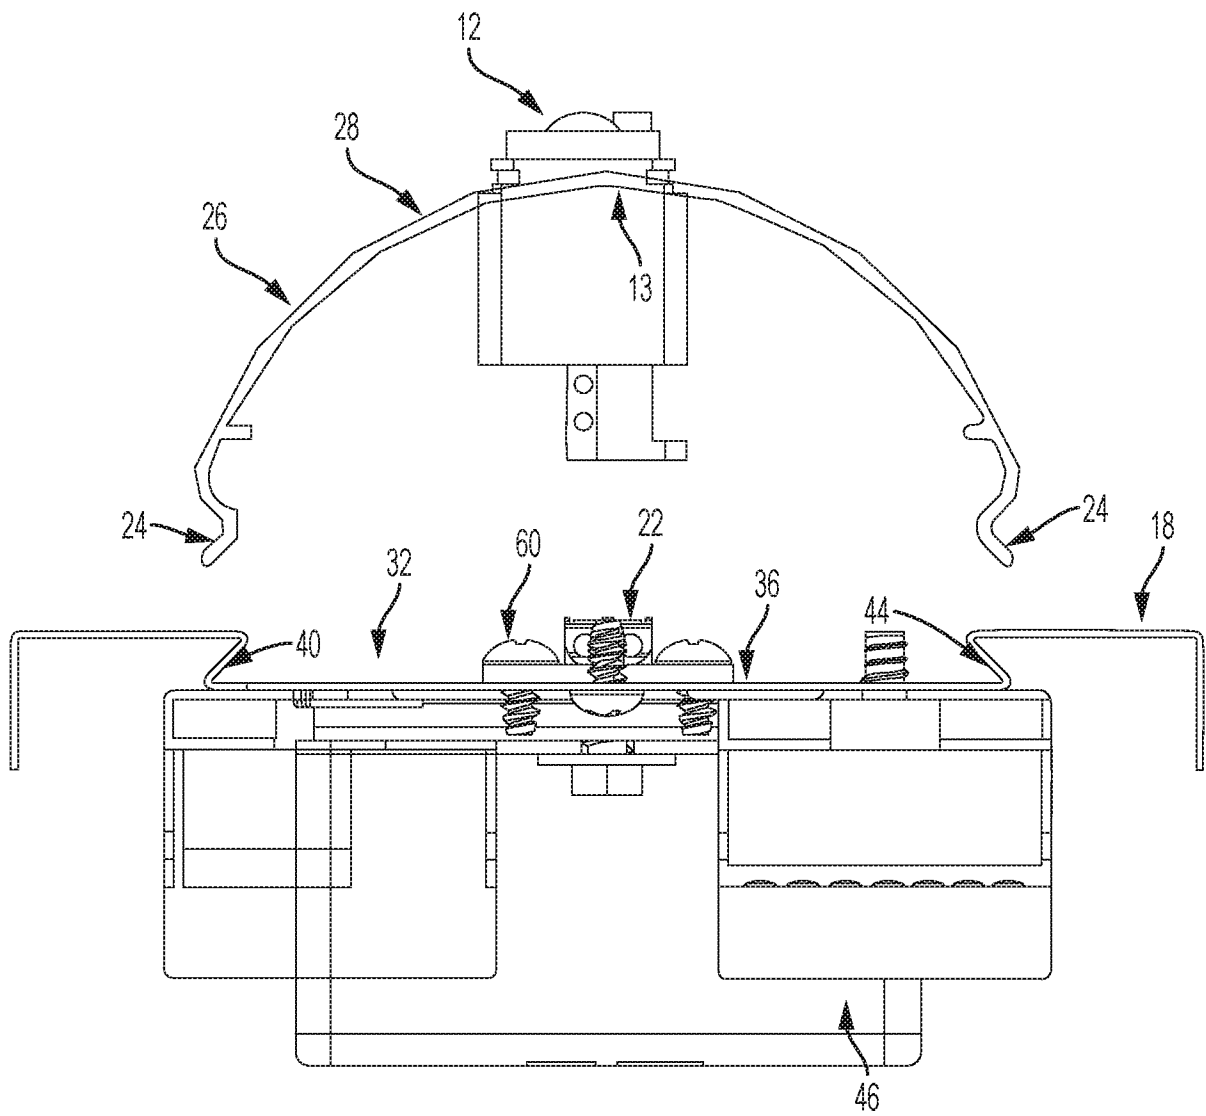


Fig. 4

5/6

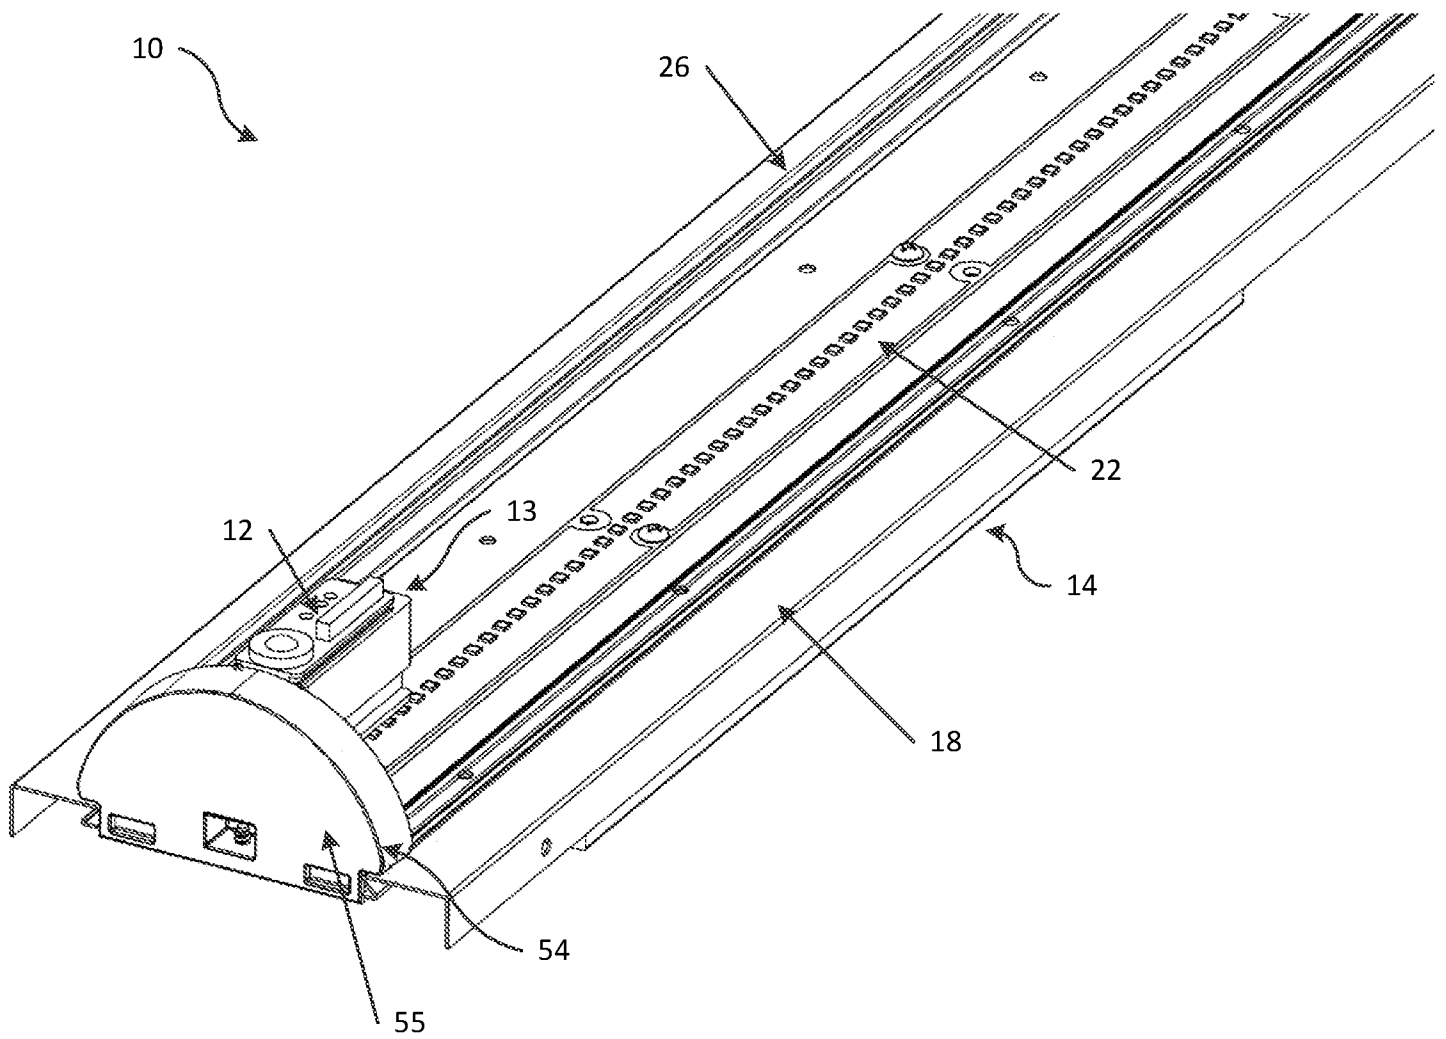


Fig. 5

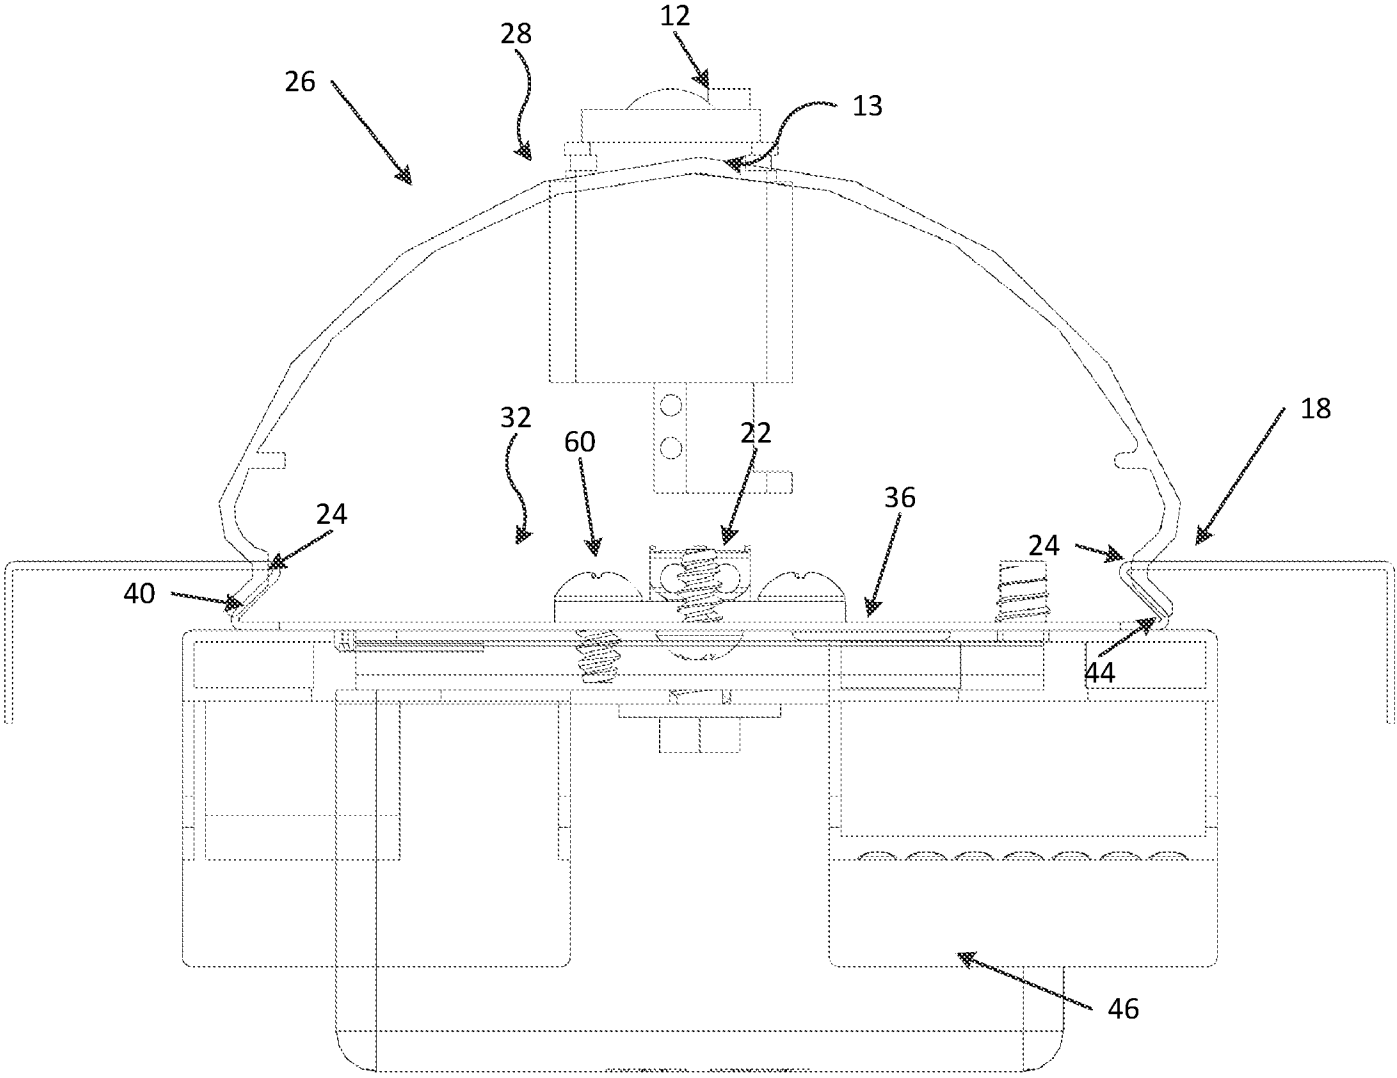


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US18/43891

A. CLASSIFICATION OF SUBJECT MATTER

IPC - F21S 8/08; F21V 15/00, 15/01, 15/015; F21Y 103/00 (2018.01)

CPC - F21S 8/00, 8/081; F21V 15/01, 15/015

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---	GB 2 338 545 A (HUBBELL INCORPORATED) December 22, 1999; abstract, figures 1, 5-7, page 5, paragraphs 2-3, page 6, paragraph 3	1-2, 5, 7 ---
Y ---	US 7,374,143 B1 (WITTKE, V) May 20, 2008; figures 1 & 4, column 3, lines 50-65	3 ---
Y ---	US 2004/0201996 A1 (WEBER, M) October 14, 2004; figure 3, paragraphs [0063] & [0074]	1-2, 4-9 ---
A ---	US 5,806,967 A (SOORUS, A et al.) September 15, 1998; figures 1, 5 & 7, column 6, lines 15-30	6
Y ---	US 9,133,993 B2 (DEVORRIS, P) September 15, 2015; figure 1, column 2, line 63 to column 3, line 5	8
Y ---		9



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 September 2018 (16.09.2018)

Date of mailing of the international search report

03 OCT 2018

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774