



(11) **EP 2 148 030 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

(15) Correction information:
Corrected version no 1 (W1 A1)
Corrections, see
Bibliography INID code(s) 71

(51) Int Cl.:
E05C 17/32 (2006.01)

(48) Corrigendum issued on:
31.03.2010 Bulletin 2010/13

(43) Date of publication:
27.01.2010 Bulletin 2010/04

(21) Application number: **09165674.4**

(22) Date of filing: **16.07.2009**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO SE SI SK SM TR
Designated Extension States:
AL BA RS

(30) Priority: **21.07.2008 IT MI20081325**


(71) Applicant: **Santoro, Giuseppe**
74013 Ginosa, (TA) (IT)

(72) Inventors:
• **Santoro, Giuseppe**
74013 Ginosa TA (IT)
• **Di Franco, Raffaele**
74013 Ginosa TA (IT)
• **Di Franco, Cosimo**
74013 Ginosa TA (IT)

(74) Representative: **Faraggiana, Vittorio et al**
Ing. Barzanò & Zanardo Milano S.p.A.
Via Borgonuovo 10
20121 Milano (IT)

(54) **Device for blocking a shutter of a window**

(57) A device for blocking a shutter of a fixture rotatable around a vertical axis. The device comprises a shoe intended to be mounted in a sliding manner along a rail of a horizontal profile of the shutter and an arm hinged against said shoe on one side and provided with constraint means on the other, so as to be hinged in a rotating manner with respect to a framework of the fixture. Said arm is intended to be hinged with respect to the framework at an axis for hinging the shutter against said framework, the arm having such length that the hinging between the arm and the shoe projects from said rail of the shutter during its opening movement, the shoe having a longitudinal extension sufficient to remain engaged into the rail when the hinging between the shoe and the arm is outside said rail, means for blocking the sliding of the shoe along the shutter of the fixture being present and thus fixing the shutter at a preset position.

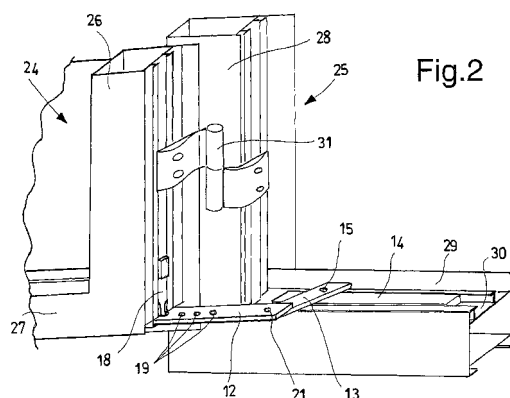

EP 2 148 030 A8