



US00D460342S

(12) **United States Design Patent**
Luu

(10) **Patent No.:** **US D460,342 S**

(45) **Date of Patent:** **** Jul. 16, 2002**

(54) **WALL PLATE HAVING CABLE/NETWORK CONNECTOR ON END SURFACE**

(75) **Inventor:** **Lionel V. Luu, Anaheim, CA (US)**

(73) **Assignee:** **Pacuma Co., Ltd., Hong Kong (JP)**

(**) **Term:** **14 Years**

(21) **Appl. No.:** **29/151,296**

(22) **Filed:** **Dec. 7, 2001**

Related U.S. Application Data

(62) Division of application No. 29/142,189, filed on May 22, 2001, which is a division of application No. 29/113,882, filed on Nov. 16, 1999, now Pat. No. Des. 443,500.

(51) **LOC (7) Cl.** **11-05**

(52) **U.S. Cl.** **D8/353; D13/146**

(58) **Field of Search** **D8/350, 353; D13/177, D13/139.6, 137.3, 133, 146, 139.8, 139.5; D26/51, 26; D14/125, 242, 256; 174/66; 439/107, 536, 540, 490; 362/95, 226, 406; 220/241; 710/69; 361/118, 117, 119, 643**

(56) **References Cited**

U.S. PATENT DOCUMENTS

D212,760 S	11/1968	Bordner	D26/51
D230,274 S	2/1974	Pulos	D26/51
4,000,405 A	12/1976	Horwinski	
D281,417 S	11/1985	Guichard	D26/51
4,611,264 A	9/1986	Bradley	362/95
4,872,081 A	10/1989	Murphy et al.	361/118
D305,641 S	1/1990	DeLuca	D26/51
5,114,365 A	5/1992	Thompson et al.	174/66
5,414,587 A	5/1995	Kiser et al.	361/118
5,473,517 A	12/1995	Blackman	362/95
D366,339 S	1/1996	Waller	D26/51
5,484,309 A	1/1996	Howard et al.	439/107
D366,878 S	2/1996	Wakabayashi et al.	D14/242

5,622,424 A	4/1997	Brady	362/95
D395,314 S	6/1998	Oikawa	D14/242
D399,825 S	10/1998	Heung et al.	D13/139.6
D401,566 S	11/1998	Gesmondi et al.	D13/177
D407,072 S	3/1999	Gaule	D13/177
5,923,517 A	7/1999	Murphy	361/118
D421,741 S	3/2000	Lien	D13/139.8
D424,520 S	5/2000	Yu	D26/51

Primary Examiner—B. J. Bullock

(74) *Attorney, Agent, or Firm*—Dickstein Shapiro Morin & Oshinsky LLP

(57) **CLAIM**

The ornamental design for a wall plate having cable/network connector on end surface, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of an embodiment of the design, showing a wall plate for a light switch in addition to electrical outlets, and having built-in cable or network connection capabilities.


FIG. 2 is a front view of the wall plate shown in FIG. 1, showing surge protection and ground indicator lights disposed on the top portion above the outlet openings, and two coaxial cable connection ports extending from the top portion on the left side of the figure.

FIG. 3 is a side view of the wall plate shown in FIG. 1.

FIG. 4 is a bottom view of the wall plate shown in FIG. 1; and,

FIG. 5 is a top view of the wall plate shown in FIG. 1, showing the two coaxial cable connection ports, one for input and one for output, provided on the left side of this surface, and the two coaxial connection ports, one for input and one for output, provided on the right side of this surface. The outlet holes for receiving the prongs of an electrical plug and the light switch are shown in the figures as dashed lines and form no part of the inventive design.

1 Claim, 1 Drawing Sheet

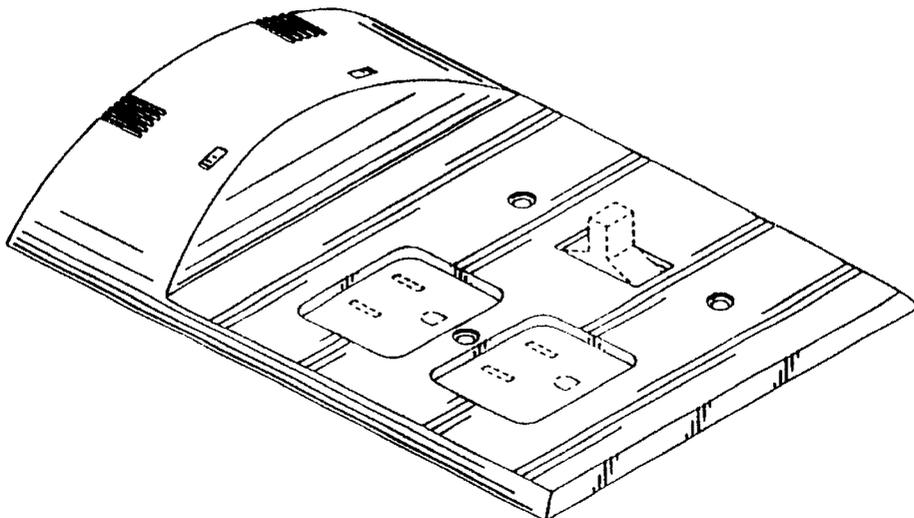

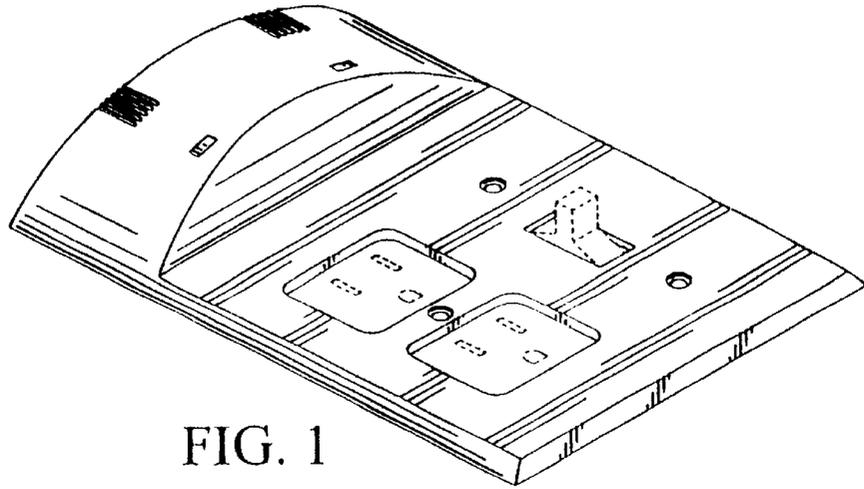


FIG. 1

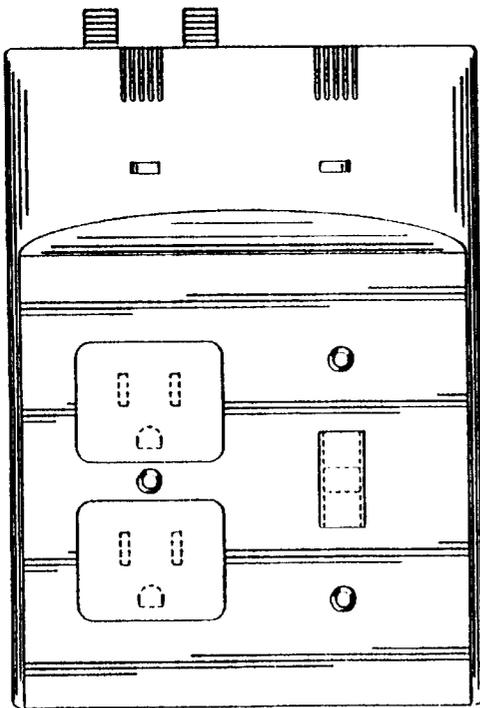


FIG. 2



FIG. 3

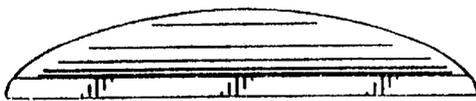


FIG. 4

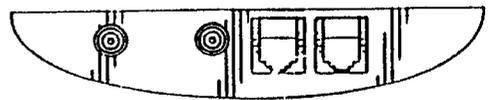


FIG. 5