



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : D21H 17/66, 21/22, A61L 15/18	A1	(11) International Publication Number: WO 97/39188 (43) International Publication Date: 23 October 1997 (23.10.97)
(21) International Application Number: PCT/SE97/00561 (22) International Filing Date: 10 April 1997 (10.04.97) (30) Priority Data: 9601412-1 15 April 1996 (15.04.96) SE (71) Applicant (for all designated States except US): STORA KOPPARBERGS BERGSLAGS AKTIEBOLAG [SE/SE]; Åsgatan 22, S-791 80 Falun (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): NORLANDER, Leif [SE/SE]; Länsmansvägen 7, S-791 61 Falun (SE). (74) Agent: HYNELL, Magnus; Hynell Patenttjänst AB, Patron Carls väg 2, S-683 40 Hagfors/Uddeholm (SE).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>	

(54) Title: METHOD OF PREPARATION OF A CELLULOSIC PULP, CELLULOSIC PULP TO BE USED IN ABSORBENT PRODUCTS, AND SUCH ABSORBENT PRODUCT

(57) Abstract

The invention relates to preparation of cellulosic pulp capable of being defibrated (fluffed) for the manufacture of an absorbent material intended to be incorporated as a component in absorbent products. The invention is characterized therein that a stock of cellulosic fibres in aqueous suspension is pH-adjusted to $4 < \text{pH} < 8$, that at least any water-soluble, non-polymeric aluminium salt is added to the stock, said salt in aqueous solution at said pH forming at least any hydrocomplex with aluminium of the type $\text{Al}(\text{OH})_n^x$, where n is a number between 1 and 3, and x is 0, + or 2+, that said salt in aqueous solution is caused to act on the cellulosic fibres in said suspension at said pH during a period of time of at least 2min, and that the fibre pulp thereafter is formed to a web, which is dewatered and dried. The invention also relates to the prepared cellulose pulp as such and to its use in absorbent products.

Knot content v. Defibration energy

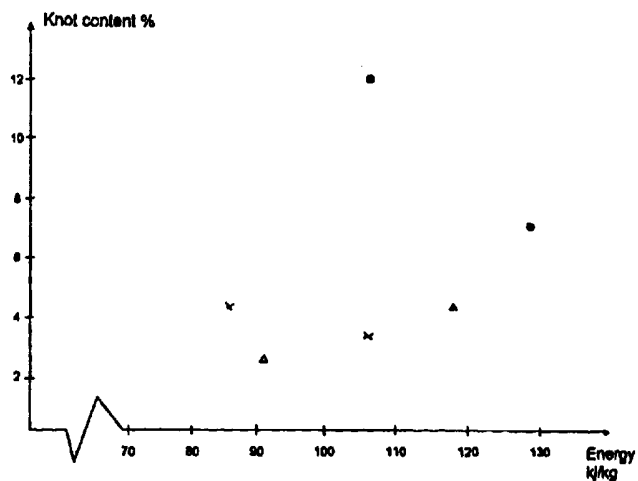

-●- Ref.
 -x- 90 kg aluminium sulphate/ton (start)
 -▲- 110 kg aluminium sulphate/ton

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD OF PREPARATION OF A CELLULOSIC PULP, CELLULOSIC PULP TO
BE USED IN ABSORBENT PRODUCTS, AND SUCH ABSORBENT PRODUCT

5 TECHNICAL FIELD

The invention relates to a method of preparation of a cellulosic pulp capable of being defibrated (fluffed) for the manufacture of an absorbent material intended to be incorporated as a component in absorbent products. The invention also relates to the cellulosic pulp, the absorbent material, and the absorbent product.

10

BACKGROUND OF THE INVENTION AND STATE OF THE ART

Chemical pulp, particularly bleached chemical pulp, and bleached and unbleached chemothermomechanically manufactured pulp, so called CTMP, are used as materials for the manufacture of absorbent materials intended to be incorporated as a main component in absorbent products, such as diapers, sanitary towels, incontinence protections and other hygiene products as well as some types of serviettes and the like.

Bleached chemical pulp has a good wettability and initially a good liquid distribution capacity and hence a high absorbency rate. On the other hand, it is difficult to defibrate properly because of its high fibre to fibre binding capacity. This is a drawback, i.e. because a better separation of fibres gives a higher network strength and hence increased strength to the absorbent product. In connection herewith should be mentioned that an increased strength is an increasingly important feature and in many cases a critical feature for applications such as napkins and sanitary towels, as there is a tendency to reduce the content of fluff pulp in such absorbent products in order to make them thinner. Often, debonders therefore are added to chemical pulp in order to improve the defibration efficiency. This, however, impairs the liquid distribution capacity of the defibrated pulp and hence its absorbency rate, which is a drawback.

30 As far as CTMP is concerned, the conditions are different. That kind of pulp is not as wettable as chemical defibrated pulp is in its defibrated condition and has therefore

usually not as good distribution features as the latter one. On the other hand, the defibration features are more favourable, which reduces the need of debonders.

In SE 500 871 experiments are described which show that the distribution features and the absorbency rate of CTMP fluff pulp can be improved by impregnation of the fibres in aqueous suspension with an aluminium salt in aqueous solution at a pH which preferably should lie in the range 8.5 to 9.5, particularly at pH 9. According to SE 500 858 of the same applicant, the improved distribution capacity and absorbency rate are attributed to the formation of a porous layer of hydrophilic chemicals attached to the fibre surface, which considerably increases the specific surface of the fibres. In EP 500 858 it is recommended that aluminium ions are added in the form of polyaluminium chloride or sulphate, aluminium phosphate or sodium aluminate or mixtures thereof, and it is also stated that polyaluminium ions appear to function more efficiently than ordinary aluminium ions. EP 500 571 recommends polyaluminium chloride, polyaluminium sulphate, sodium aluminate, and other basic aluminium compounds, but describes substantially only experiments made with additions of polyaluminium chloride and polyaluminium sulphate to CTMP at pH 9. In one case, CTMP fibres were impregnated with water-glass, which was precipitated at pH 9 with alum and polyaluminium chloride. Any significant increase of the absorbency rate could not be noticed in the case of alum and nor any increase of the network strength. Only in SE 500 871 experiments with chemical pulp are described, examples 1 and 17. At these experiments, the pulp was impregnated with polyaluminium sulphate at pH 3 and pH 11, and with polyaluminium chloride at pH 9, respectively. In both cases the absorbency rate was increased. In the first case, however, not clear at which pH; also the network strength was increased to some degree: from 3.7 to 4.3 N.

BRIEF DISCLOSURE OF THE INVENTION

It is a primary object of the invention to improve the defibration efficiency of chemical pulp in order to reduce the knot content and to increase the network strength of chemical pulp by improved separation of the fibres. Due to the improved defibration efficiency also the defibration energy supplied at the defibration can be reduced and the need of debonders be eliminated or significantly reduced. It is also an object to provide a

cellulosic pulp with good absorption features, including distribution features and a high absorbency rate, particularly an improved distribution capacity as compared with chemical fluff pulp, the defibration efficiency of which has been improved through the addition of organic debonder.

5

Experiments have also been made with CTMP, which indicate that the method of the invention can improve the absorbency rate of that type of pulp significantly, however not noteworthy its defibration efficiency in terms of reduced defibration energy and/or increased network strength.

10

The above objects and effects can be achieved therein that the invention is characterised by what is stated in the appending claims. Further characteristic features and aspects of the invention will be apparent from the following description of performed experiments and by the discussion in connection thereto.

15

BRIEF DESCRIPTION OF DRAWINGS

In the following description of performed experiments, reference will be made to the appending drawings, in which

- Fig. 1 and Fig. 2 show defibration energy and knot content, respectively, versus ash content at experiments performed at laboratory scale;
- Fig. 3A shows the distribution capacity of different, tested pulps;
- Fig. 3B shows the absorption capacity versus absorption time for various additions of aluminium sulphate;
- Fig. 4 shows the dependency of the ash content, the defibration energy and the knot content, of the pH value at the treatment with aluminium salt;
- Fig. 5 is a diagram from Paper Chemistry, An introduction, Dan Eklund, Tom Lindström, DT Paper Science Publications, p134-144;
- Fig. 6 shows knot content versus added amount of aluminium sulphate at pilot experiments; and
- Fig. 7 shows knot content related to defibration energy at different dosages of aluminium sulphate.

PERFORMED EXPERIMENTS

At the experiments bleached chemical fluff pulp fibres produced according to the sulphate pulp method was treated and tested. The fibre raw material was Nordic coniferous wood. A minor experiment also was made with CTMP fluff pulp.

5

At a first experiment series there were used couch strips, which never had been dried, of which sheets were made in sheet mold according to standard method in laboratory. The pulp concentration was 0.7%. The addition of aluminium sulphate, $Al_2(SO_4)_3$, and various salts, respectively, was made at about 1.5% pulp concentration before final dilution in
10 sheet mold. The aluminium sulphate chemical was aluminium sulphate in the form of a commercial product, which has 75% dry content, if not otherwise indicated. The aluminium sulphate, which was used in the experiments, was manufactured by Kemira AB. Any pH-adjustments were made with H_2SO_4 or NaOH, respectively.

15 Distribution tests were carried out on inclined plane with 30° inclination according to a method which is developed and standardised by the applicant. Briefly, the method implies that the test sample is placed on the inclined plane and that the lower edge of the test sample is caused to contact the test liquid. The amount of liquid which is absorbed is registered by time unit through weighing during a time period of 900 s, whereafter the
20 test sample is cut and strips are cut cross-wise relative to the flow direction and are weighed. Knot content was registered according to SCAN-CM 37:85. Network strength was tested by means of a measurement apparatus of type Alwetron at the rate 60 mm/min on test samples, 1 g, made according to SCAN 33:80. Other fluff properties were evaluated by standard methods which are described in WO93/16228 of the same
25 applicant. The defibration was made at a laboratory scale by means of a hammer hammer mill of type Kamas. Reported defibration energy is net energy. The results from initial experiments are shown in Table 1.

Table 1

Aluminium sulphate usage	g/kg	0	50	75	100
pH		6.5	6.5	6.5	6.5
Ash content	%	0.20	1.1	1.6	2.1
Surface weight	g/m ²	816	834	834	826
Thickness	mm	1.50	1.49	1.50	1.46
Density	kg/m ³	543	559	556	554
Defibration energy 3500 rpm	kJ/kg	156	151	122	111
Network strength	N/1g	6.8	6.8	7.5	7.7
Knot content	%	11.6	7.4	3.7	1.8
Distribution on inclined plane, 30° inclination					
Density of test sample	kg/m ³	155	152	150	154
Absorption capacity					
0-3 cm	g/g	9.5	10.4	9.8	9.3
3-6 cm	g/g	8.0	8.6	8.2	8.0
6-9 cm	g/g	8.6	9.0	8.6	8.4
9-12 cm	g/g	8.9	9.0	8.9	8.4
12-15 cm	g/g	9.0	8.8	9.0	8.6
15-18 cm	g/g	8.3	8.6	8.8	8.0
18-21 cm	g/g	7.8	8.1	8.1	6.6
21-24 cm	g/g	6.5	5.6	6.5	6.0

From Table 1 is evident that aluminium sulphate has a favourable impact on the defibration result. A substantial reduction of knot content and defibration energy is achieved at a large addition of aluminium sulphate, 75 to 100 kg/ton, in the form of a commercial product having a dry content of 75%. The improved separation of the fibres also gave rise to an increased network strength at a maintained absorption capacity at the measurement of liquid distribution on inclined plane. The ash content is a measure of the amount of aluminium which has been retained by the fibres. The defibration energy and the knot content versus the ash content and hence also versus the addition of aluminium sulphate also are shown by the charts in Fig. 1 and Fig. 2.

The wettability of the aluminium sulphate treated fibres in terms of liquid distribution on inclined plane was also compared with fibres which were treated with organic debonders. The comparison was made with wholly- and semi-treated commercial fluff pulp (Stora Fluff), which contains quarternary ammonium compounds (Berocell 509-Eka Nobel), which is a today conventional type of debonder. The wholly- and semi-treated fluff pulp had been treated with 2 and 4 kg/ton, respectively, of said debonder. Also completely untreated fluff pulp of type Stora Cell EC01, in the following denoted Ref, is included in

this comparative test. The measured distribution values are illustrated in Fig. 3A. The graphs in Fig. 3A show that the untreated fluff pulp and the aluminium sulphate treated pulps had essentially equally good distribution capacities, clearly superior to those of the debonder treated fluff pulps.

5

The experiments which are reported in Table 1 were carried out on fluff pulp sheets, which had been sheeted at pH 6 to 7. In order to investigate the role of the pH value for the achievement of the improved defibration properties derived by the addition of aluminium sulphate, there were also carried out experiments with lower and higher pH values. In all the experiments, aluminium sulphate was added in an amount

10 corresponding to 100 to 114 kg/ton. The measured values are given in Table 2.

Table 2 - The influence of the pH value on the efficiency of the addition of aluminium sulphate

		1	2	3	4
Aluminium sulphate	kg/ton	114	114	114	114
pH in stock		4.1	6.0	8.0	10.0
Surface weight	g/m ²	825	854	861	849
Thickness	mm	1.54	1.57	1.56	1.63
Density	kg/m ³	536	544	552	521
Ash content	%	0.32	2.4	2.4	1.0
Defibration energy	kJ/kg	145	101	144	159
Absorption SCAN					
Specific volume	dm ³ /kg	21.2	20.4	21.0	21.2
Wet specific volume	dm ³ /kg	7.8	7.1	7.6	7.8
Absorption time	s	2.6	2.1	2.1	2.1
Absorption capacity	g/g	9.2	8.4	9.1	9.2
Knot content	%	8.6	3.2	7.1	12.0

15

From Table 2 can be concluded that the retention of aluminium on the fibres in the form of measured ash content, and that particularly the defibration energy and the knot content are strongly pH related. This is also shown graphically in Fig. 4.

20

From Table 4 and from Fig. 4 can also be concluded that no correspondence to the improved defibration properties of fluff pulp sheets, which have been sheeted at pH 6 to 7, has been noticed at lower and higher pH values. Paper Chemistry, An introduction,

Dan Eklund, Tom Lindström, DT Paper Science Publications, p134-144 reports investigations which show that aluminium, originating from water-soluble aluminium salts, exists in the form of different hydroxycomplexes at $4 < \text{pH} < 8$, preferably at pH 5 to 7, see Fig. 5. The presence of these complexes in connection with the sheeting of the sheet seems to be a prerequisite for the achievement of an improved defibration result, which indicates that also other, non-polymeric aluminium salts than aluminium sulphate, as for example aluminium nitrate, aluminium hydroxide, aluminium oxyhydroxide, aluminium oxychloride, or other salts of non-polymeric aluminium compounds, which can be dissolved in acid or alkali such that, at the subsequent pH adjustment to the pH range $4 < \text{pH} < 8$, preferably pH 5 to 7, the above mentioned active aluminium complexes are established, can be expected to give the desired improvement of the defibration ability. This assumption is also supported by the fact that the ratio aluminium/sulphur in the sheets is substantially higher than in aluminium sulphate, which indicates that it is the said aluminium hydrocomplexes rather than the sulphate ions which are the active parts in the dissolved salt, see Table 4 below. Without binding the invention to any particular theory, the effect upon defibration ability possibly can be explained therein that aluminium hydrocomplexes bind to charged groups in cellulose, hemi-cellulose and lignin residues, which has impact upon the capacity of the fibre-to-fibre binding capacity of the fibres.

20

Experiments also were performed in order to test the possible effect of other water-soluble salts than aluminium salts - Na_2SO_4 , CaCl_2 and FeCl_3 - upon the defibration properties. As is evident from Table 3, it could not be noticed that these salts have any impact upon the binding capacity of the fibres in the form of reduced defibration energy and knot content or increased network strength at an ash content of about 2 to 4% in the sheet.

25

Table 3 - Investigation of the influence of other salts upon absorption properties, defibration energy, network strength and knot content

		1 Reference	2	3	4
Chemical			Na ₂ SO ₄	CaCl ₂	FeCl ₃
pH in stock		6.5	6.4	6.5	6.5
Ash content 575°C	%	0.20	2.53	2.89	4.8
Surface weight	g/m ²	834	847	872	914
Thickness	mm	1.50	1.59	1.61	1.60
Density	kg/m ³	555	533	542	570
Defibration energy, 3500 rpm	kJ/kg	151	145	153	162
Absorption SCAN					
Specific volume	dm ³ /kg	20.4	20.3	19.8	19.8
Wet specific volume	dm ³ /kg	7.7	7.6	7.5	7.7
Absorption time	s	2.4	2.5	2.5	1.8
Absorption capacity	g/g	9.2	8.9	8.7	9.1
Network strength	N/1g	7.0	7.1	6.7	6.4
Knot content	%	9.9	9.7	9.9	12.1

In order to verify the reproducibility of the achieved results when the invention is applied at a larger scale and also for the evaluation of the properties of absorption bodies manufactured from the fluff pulp treated according to the invention, a series of tests were then carried out at a pilot scale.

The pulp which was used during these tests consisted of bleached (delignified) fluff pulp manufactured according to the sulphate cellulose method from Nordic coniferous wood. The pulp was delivered as wet pulp from the pulp mill, dry content about 35%. Charges of about 60 kg conceived dry content were weighed, supplied to pulper and slushed at about 2.5% pulp concentration. In the pulp chest the pulp concentration was adjusted to 1.5% and aluminium sulphate was added. pH was adjusted to about 6.5. Thereafter the stock was stirred for 15 min prior to starting the sheet forming. The pulp concentration was kept at about 0.4% in the head box. The speed of the wire was 2.5 m/min and the formed web was dewatered in a single-filt press roll nip to a dry content of about 50%. Drying to 92 to 95% dry content was made on a cylinder dryer. Defibration was carried out in a hammer hammer mill of type Kamas H01 at a rotation speed of 3000 and 3500 rpm, respectively.

All statements concerning addition of aluminium sulphate also during these experiments refer to aluminium sulphate in the form of a commercial product, manufacturer Kemira AB, with about 75% dry content, if not otherwise is stated.

- 5 The results are evident from Table 4 and Table 5.

Table 4

Rotation speed of the defibration mill 3000 rpm		0 Reference At end	1 Al ₂ (SO ₄) ₃ 70 kg/ton At end	2 Al ₂ (SO ₄) ₃ 90 kg/ton At start	3 Al ₂ (SO ₄) ₃ 90 kg/ton At end	4 Al ₂ (SO ₄) ₃ 110 kg/ton At end
Surface weight	g/m ²	799	801	759	823	796
Thickness	mm	1.6	1.6	1.5	1.6	1.5
Density	kg/m ³	514	502	504	532	523
Defibration energy 3000 rpm	kJ/kg	108	109	87	101	92
Absorption SCAN						
Specific volume	dm ³ /kg	20.99	20.97	20.55	20.83	20.09
Wet specific volume	dm ³ /kg	7.87	7.90	7.59	7.68	7.57
Absorption time	s	2.7	2.0	2.0	2.0	2.0
Absorption capacity	g/g	9.2	9.3	8.8	9.1	8.6
Network strength	N/1g	8.3*	8.5	8.5*	8.3*	9.1*
Knot content	%	11.9	6.9	4.2	3.7	2.7
Al in pulp	mg/kg			7500		
SO ₄ in pulp	mg/kg			1800		
Ratio Al ₂ /SO ₄ ** in pulp				4.17		

*Standard deviation >0.5

** The ratio aluminium/sulphate in aluminium sulphate is 0.19

Table 5

Rotation speed of the defibration mill 3500 rpm		0 Reference At end	1 Al ₂ (SO ₄) ₃ 70 kg/ton At end	2 Al ₂ (SO ₄) ₃ 90 kg/ton At start	3 Al ₂ (SO ₄) ₃ 90 kg/ton At end	4 Al ₂ (SO ₄) ₃ 110 kg/ton At end
Surface weight	g/m ²	801	812	770	805	821
Thickness	mm	1.5	1.5	1.5	1.5	1.6
Density	kg/m ³	527	546	509	534	521
Defibration energy 3500 rpm	kJ/kg	129	122	107	117	118
Absorption SCAN						
Specific volume	dm ³ /kg	20.83	21.42	20.79	20.90	20.89
Wet specific volume	dm ³ /kg	7.85	7.90	7.64	7.81	7.69
Absorption time	s	2.6	2.1	2.1	2.2	2.1
Absorption capacity	g/g	9.9	9.3	8.85	9.2	8.8
Network strength	N/1g	7.9	7.9*	9.1*	8.2	8.6
Knot content	%	7.1	6.6	3.4	4.5	4.2

*Standard deviation >0.5

From Table 4 and Table 5 is evident that the improvements concerning defibration energy and knot content, which were noticed at laboratory scale and which have been reported in the foregoing, also were achieved in the pilot plant under conditions similar to those of full-scale production. The reduction of the knot content is also illustrated graphically in Fig. 6 and Fig. 7. Particularly Fig. 7 illustrates the reduction of consumed defibration energy in relation to the same defibration result registered as knot content.

10

Fluff treated with aluminium sulphate also has a higher network strength in consideration of the lower knot content, see particularly Table 5. This is considered to be a very substantial improvement, as there is a trend to use a reduced content of fluff pulp in diapers and other hygiene products. Therefore, the strength (network strength) in the absorption body is increasingly important.

15

Absorption bodies, as for example diapers, sanitary towels, incontinence products and similar hygiene articles, increasingly often are used in the compressed state, which implies densities larger than 150 kg/m³, and to a larger extent with the addition of some super absorbing product (SAP). Therefore, it is of essential importance, as far as the absorption properties of the fluff pulp are concerned, how the pulp functions in its compressed condition, i.e. when it has been compressed to a high density, and in the

20

presence of SAP. In Table 6 is shown that the fluff pulp, which has been treated with aluminium sulphate, in its compressed condition and in combination with super absorbing product (SAP=Favor SXM 75, trade name), gets a significantly increased absorbency rate, in comparison with the non-aluminium sulphate treated but SAP-containing reference pulp, and that the rewetting is significantly reduced; in one case with 41%, mean value 30%.

Table 6 Absorbency rate and rewetting; density appr 320 kg/m³

Rotation speed of the defibration mill 3500 rpm		0 Reference At end	1 Al ₂ (SO ₄) ₃ 70 kg/ton At end	2 Al ₂ (SO ₄) ₃ 90 kg/ton At end	3 Al ₂ (SO ₄) ₃ 110 kg/ton At end
Surface weight, guide value	g/m ²	1000	1000	1000	1000
Surface weight SAP, guide value	g/m ²	140	140	140	140
Sample weight incl SAP (12 x 30 cm)	g	39.6	41.2	39.6	41.5
Volume SAP	g	5	5	5	5
Surface weight, (fluff + SAP)	g/m ²	1137	1184	1138	1185
Thickness (")	mm	3.6	3.6	3.6	3.6
Density (")	kg/m ³	317	326	320	331
Absorbency rate 4 x 50 ml					
Dosage 1	ml/s	0.97	1.29	1.21	1.18
Dosage 2	ml/s	0.65	0.82	0.82	0.88
Dosage 3	ml/s	0.41	0.58	0.57	0.57
Dosage 4	ml/s	0.25	0.36	0.31	0.35
Rewetting -200 ml	g	6.3	3.8	5.8	3.7
Reduction of rewetting	%		40	8	41

SAP = Favor SXM 75. The test samples are made in dry sheet molds

10

In the Table 7 below, the results for test samples which have been compressed to dry density of appr. 170 kg/m³ are reported. From this table it is evident that the relative increase of absorbency rate is substantially smaller as compared with comparable samples with higher density. The increase is only 6% and is possibly not significant, as the reference sample has a somewhat lower total weight than the test samples. The rewetting, however, is improved in a similar way as for compressed samples.

15

Table 7 Absorbency rate and rewetting; density appr 170 kg/m³

Rotation speed of the defibration mill 3500 rpm		0 Reference	1 Al ₂ (SO ₄) ₃ 70 kg/ton	2 Al ₂ (SO ₄) ₃ 90 kg/ton	3 Al ₂ (SO ₄) ₃ 110 kg/ton
Surface weight; guide value	g/m ²	1000	1000	1000	1000
Surface weight SAP; guide value	g/m ²	140	140	140	140
Sample weight incl. SAP (12 x 30 cm)	g	37.8	40.2	39.3	41.7
Volume SAP	g	5	5	5	5
Surface weight, (fluff + SAP)	g/m ²	1135	1163	1153	1205
Thickness (")	mm	6.9	6.9	7.1	7.1
Density (")	kg/m ³	165	170	163	171
Absorbency rate 4 x 50 ml					
Dosage 1	ml/s	2.81	2.44	2.27	2.17
Dosage 2	ml/s	1.10	1.06	1.06	1.01
Dosage 3	ml/s	0.72	0.71	0.74	0.69
Dosage 4	ml/s	0.49	0.52	0.54	0.52
Rewetting - 200 ml	g	7.4	2.4	3.8	1.7

SAP = Favor SXM 75. The test samples are made in dry sheet molds

- The shorter absorption time according to SCAN was verified through investigation of absorption time for test samples made of chemical pulp without change of volume, wherein the test sample was compressed in its dry state to bulk 7.1 dm³/kg. The purpose with this test was to eliminate possible effects because of the fact that the fluff body changes its dimensions when being wetted. The result is shown in Table 8. The result possibly can be interpreted as an increased wettability of the chemical pulp fibres, but any corresponding increase of the absorbency rate was not noticed at the investigation of the absorption process on inclined plane, see Fig. 3B. The true causes of the result thus are not clear, since the samples also have different degree of separation of the fibres, which complicates the interpretation.

Table 8

Sample	Absorption time s	Absorption capacity g/g
Ref.	1.2	8.3
Al ₂ (SO ₄) ₃ , 70kg/ton	1.0	8.3
Al ₂ (SO ₄) ₃ , 110 kg/ton	1.0	8.3

Experiments also were carried out of additions of polyaluminium chloride to the stock at pH 6.5. The experiments are reported in Table 9, which shows that the addition of this aluminium salt had a negative impact upon the defibration ability. Knot content as well as defibration energy increased, which indicates that the desired effect of the invention in terms of defibration ability, which was achieved when the fibres had been treated with an aluminium salt at pH 6 to 7, is achieved only under the condition that the aluminium salt or salts is/are any non polymeric aluminium salt, which is soluble in water.

Table 9 - Tests with polyaluminium chloride

		0 Referenc c	1	2	3	4
Polyaluminium chloride (PAX - 14)	kg/ton	0	25	50	75	75
pH		6.4	6.5	6.4	6.4	5.4
Amount 1 M HCl*/ 5 M NaOH	ml	1.3*	1.2	2.6	4.2	3.8
Ash content (575°)	%	0.29	0.57	0.98	1.32	1.26
Surface weight	g/m ²	817	820	815	860	832
Thickness	mm	1.5	1.5	1.5	1.6	1.6
Density	kg/m ³	540	548	529	536	524
Defibration energy 3500 rpm	kJ/kg	147	164	175	184	182
Absorption SCAN						
Specific volume	dm ³ /kg	20.81	21.07	21.06	20.68	20.62
Wet specific volume	dm ³ /kg	7.79	8.96	8.04	8.10	7.85
Absorption time	s	2.7	2.7	2.5	2.3	2.2
Absorption capacity	g/g	9.3	9.3	9.6	9.4	9.4
Knot content	%	8.3	15.6	18.2	22.0	19.4

10

A minor test also was made on chemo-thermomechanical pulp, CTMP, with the addition of aluminium sulphate, pH \approx 6.5. A significant influence on the defibration energy was noticed only for the highest level of dosage of aluminium sulphate, 130 kg/ton, Table 10. Any significant influence on the defibration result in the form of increased network strength, however, could not be noticed, but there was achieved a high retention of aluminium and a substantial reduction of the absorption time, from 7.8 to 2.5 s.

15

Table 10 - Tests with CTMP-additions of debonder and aluminium sulphate, respectively

FF 950154:		0	1	2	3	4	5
		Referenc e					
Aluminium sulphate	kg/ton			50	75	100	130
Berocell 509	kg/ton		3				
pH		6.6-6.7	6.5-6.7	6.4-6.5	6.5-6.6	6.4-6.6	6.4-6.5
Aluminium content, sheet	mg/kg	12	11	4000	6100	7800	1000
Aluminium content, white water	mg/l	<0.5	<0.5	0.9	1.2	1.6	0.7
Surface weight	g/m ²	640	635	644	661	668	666
Thickness	mm	2.2	2.5	2.2	2.1	2.2	1.9
Density	kg/m ³	292	255	299	313	310	351
Defibration energy 3500 rpm	kJ/kg	87	77	96	94	86	72
Absorption SCAN							
Specific volume	dm ³ /kg	19.14	18.39	18.98	18.63	18.28	17.50
Wet specific volume	dm ³ /kg	8.24	8.18	8.46	8.29	8.25	8.20
Absorption time	s	7.6	6.6	4.6	3.2	2.8	2.5
Absorption capacity	g/g	9.3	9.2	9.6	9.4	9.2	9.1
Network strength	N/g	6.4	6.2	6.2	6.2	6.3	6.3

The improved defibration properties can be employed also when aluminium sulphate treated cellulose fibres are combined with a certain amount, 0 to 20%, of synthetic reinforcing fibres of e.g. rayon, polyester, polypropylene, polyethylene or so called binding fibres which are activated by heating. A good defibration result, with a low knot content, can be obtained with widely open screen in a hammer mill and also without any screen.

10

The above examples illustrate the high capacity of aluminium complexes formed in an aqueous solution adjusted to 4<pH<8 to improve the defibration properties of fluff pulp, and particularly chemical fluff pulp. The improved defibration properties provide possibilities to increase strength and to obtain a lower knot content in the defibrated material. These improvements of chemical pulp are achieved with maintained or to some extent improved wettability of the fibres.

15

CLAIMS

1. A method of preparation of cellulosic pulp capable of being defibrated (fluffed) for the manufacture of an absorbent material intended to be incorporated as a component in absorbent products, c h a r a c t e r i z e d in that a stock of cellulosic fibres in aqueous suspension is pH-adjusted to $4 < \text{pH} < 8$, that at least any water-soluble, non-polymeric aluminium salt is added to the stock, said salt in aqueous solution at said pH forming at least any hydrocomplex with aluminium of the type $\text{Al}(\text{OH})_n^x$, where n is a number between 1 and 3, and x is 0, + or 2+, that said salt in aqueous solution is caused to act on the cellulosic fibres in said suspension at said pH during a period of time of at least 2 min, and that the fibre pulp thereafter is formed to a web, which is dewatered and dried.
2. A method according to claim 1, c h a r a c t e r i z e d in that said hydrocomplex is one or more of the complexes which comprise $\text{Al}(\text{OH})_3^0$, $\text{Al}(\text{OH})_3^+$ and $\text{Al}(\text{OH})_2^{2+}$.
3. A method according to claim 1 or 2, c h a r a c t e r i z e d in that the stock is adjusted to a pH between 5 and 7, preferably between 5.5 and 6.5.
4. A method according to claim 1, c h a r a c t e r i z e d in that said salt in aqueous solution is caused to act on the cellulosic fibres at said pH during a period of time of 5 to 60 min.
5. A method according to claim 1, c h a r a c t e r i z e d in that said salt consists of at least any of the salts belonging to the group consisting of aluminium sulphate, aluminium nitrate, aluminium hydroxide, aluminiumoxy hydroxide, aluminiumoxy chloride and other salts of non-polymeric aluminium compounds which can be dissolved in acid or alkali to form said active aluminium hydrocomplexes at a subsequent pH-adjustment to the range $4 < \text{pH} < 8$.
6. A method according to any of claims 1-5, c h a r a c t e r i z e d in that said at least any water-soluble, non-polymeric aluminium salt is added to the stock in an amount corresponding to 3-24 g Al/kg pulp, preferably to 6-12 kg Al/kg pulp.

7. A method according to claim 5, characterized in that the salt is aluminium sulphate.
- 5 8. A method according to any of claims 1 to 7, characterized in that the cellulosic pulp is a chemical cellulose pulp.
9. A method according to claim 8, characterized in that the cellulosic pulp is a bleached (delignified) cellulose pulp manufactured according to the sulphate cellulose
- 10 method.
10. A method according to any of claims 8 to 9, characterized in that the cellulosic pulp is a mixture of chemical pulp and CTMP.
- 15 11. A method according to any of claims 8 to 10, characterized in that the cellulosic pulp exists as a mixture with synthetic fibres, including those types of synthetic fibres which belong to the group consisting of rayon-, polyester-, polypropylene-, polyethylene- and so called binding fibres which can be activated by heating.
- 20 12. A cellulosic pulp capable of being defibrated (fluffed) for the manufacture of an absorbent material intended to be incorporated as a main component in absorbent products, characterized in that it has been treated in an aqueous suspension at $4 < \text{pH} < 8$ with a water-soluble, non-polymeric aluminium salt, during a period of time of at least 2 min, whereupon the fibre pulp has been formed to a web which has been
- 25 dewatered and dried, that the defibrated material has a network strength of at least 7 N/1 g, and that the separated fibres have a knot content of max. 8%.
13. A cellulosic pulp according to claim 12, characterized in that the separated fibres have a knot content of max. 7%.
- 30 14. A cellulosic pulp according to claim 12 or 13, characterized in that the fibres in the thus treated cellulosic pulp can be separated through defibration in dry state by a

supply of defibration energy not exceeding 130 kJ/kg dry substance, preferably not exceeding 120 kJ/kg dry substance.

15. A cellulosic pulp according to any of claims 12 to 14, c h a r a c t e r i z e d in that
5 the defibrated material has a network strength of at least 8.0 N/1 g.

16. A cellulosic pulp according to any of claims 12 to 15, c h a r a c t e r i z e d in that
10 the defibrated material has a knot content of max. 8% and a network strength of at least 8.0 N/1 g.

17. An absorbent product, i.e. a product for the absorption of liquids from the human
body, containing an absorbent material consisting of cellulosic pulp according to any of
claims 12 to 16, c h a r a c t e r i z e d in that it contains less than 60% super absorbent
and that it has a dry density between 50 to 500 kg/m³.

15

18. An absorbent product according to claim 17, c h a r a c t e r i z e d in that it contains
a super absorbent and that it is compressed to a density of at least 150 kg/m³.

Fig. 1

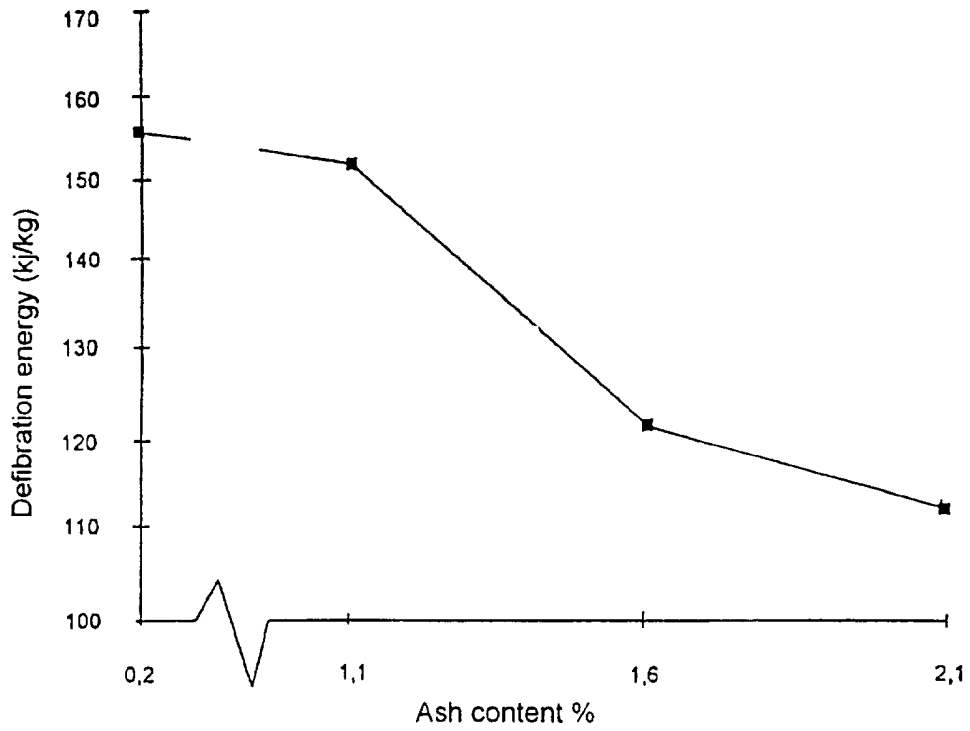


Fig. 2

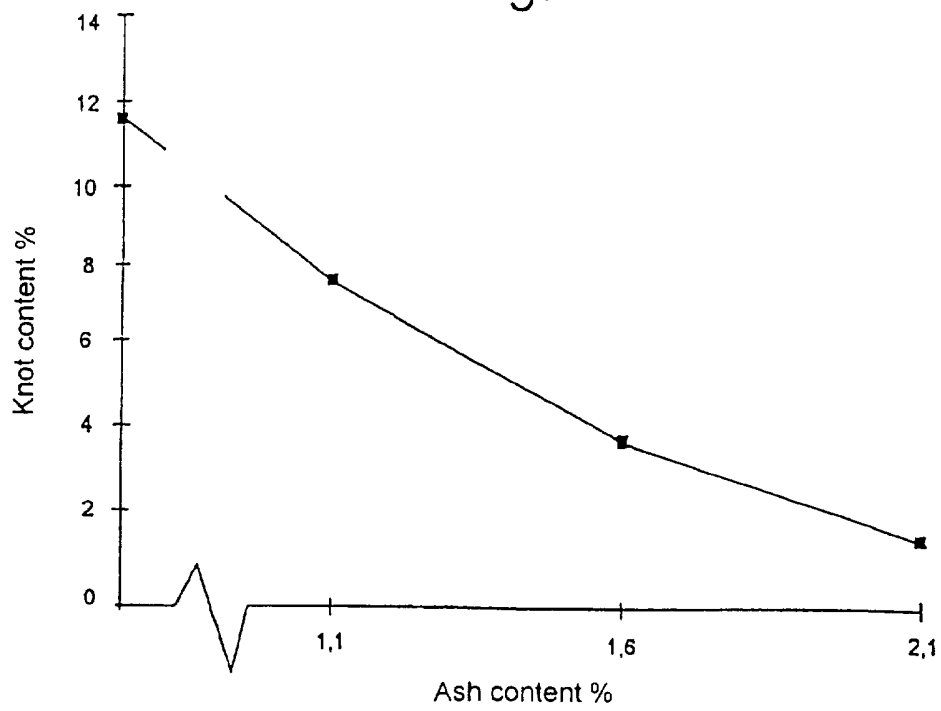


Fig. 3A

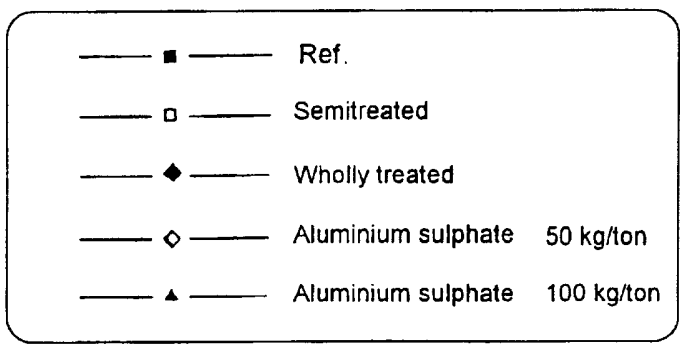
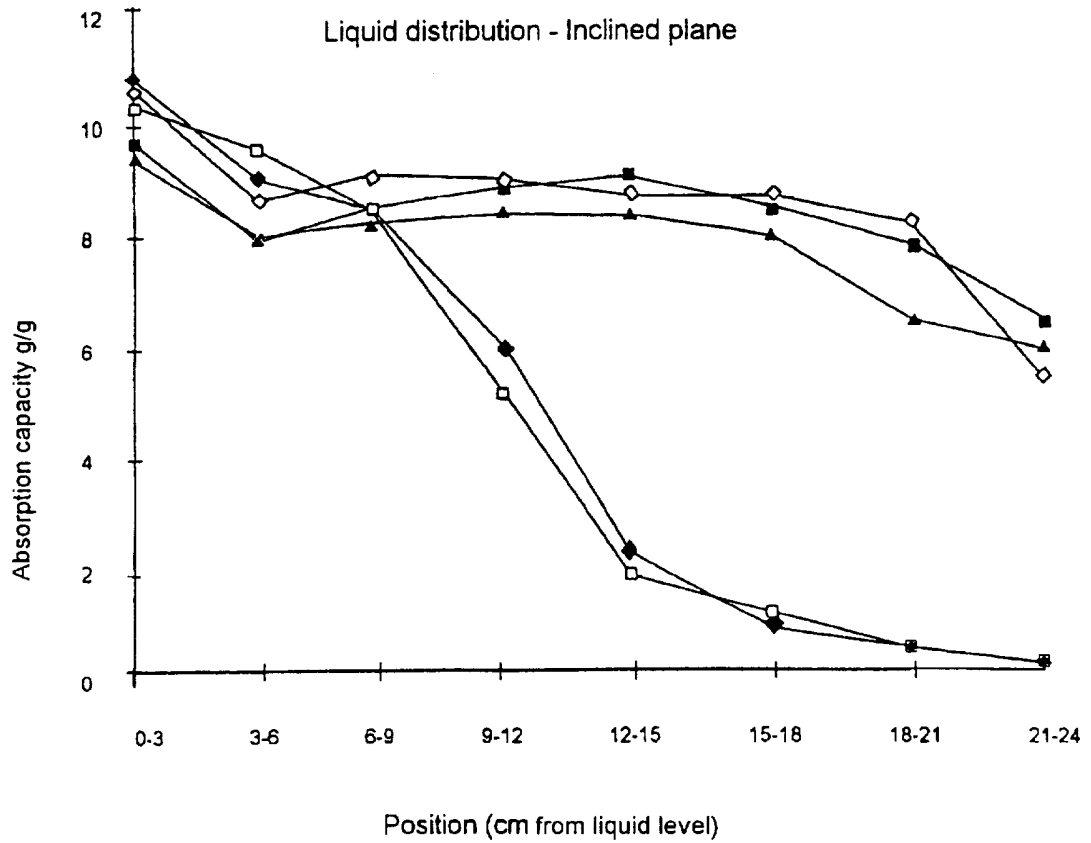


Fig. 3B

Reference pulp (Stora Cell EC01) and reference pulp with addition of different contents of aluminium sulphate
Liquid distribution on inclined plane, density 150 kg/m³

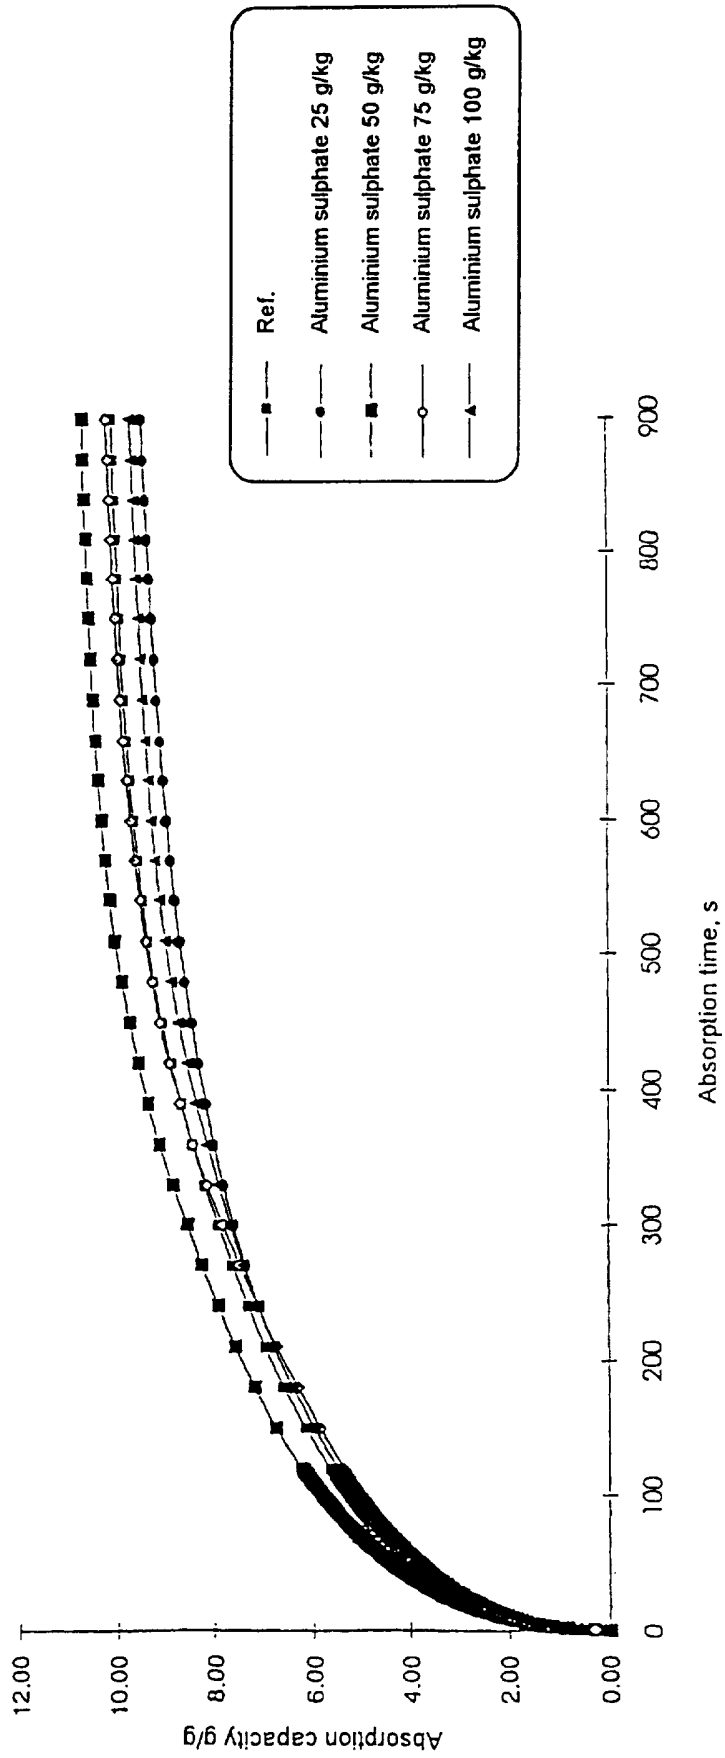


Fig. 4



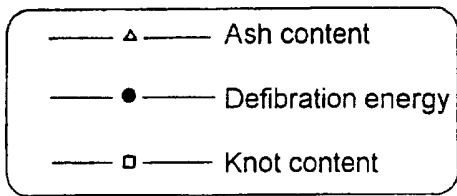


Fig. 5

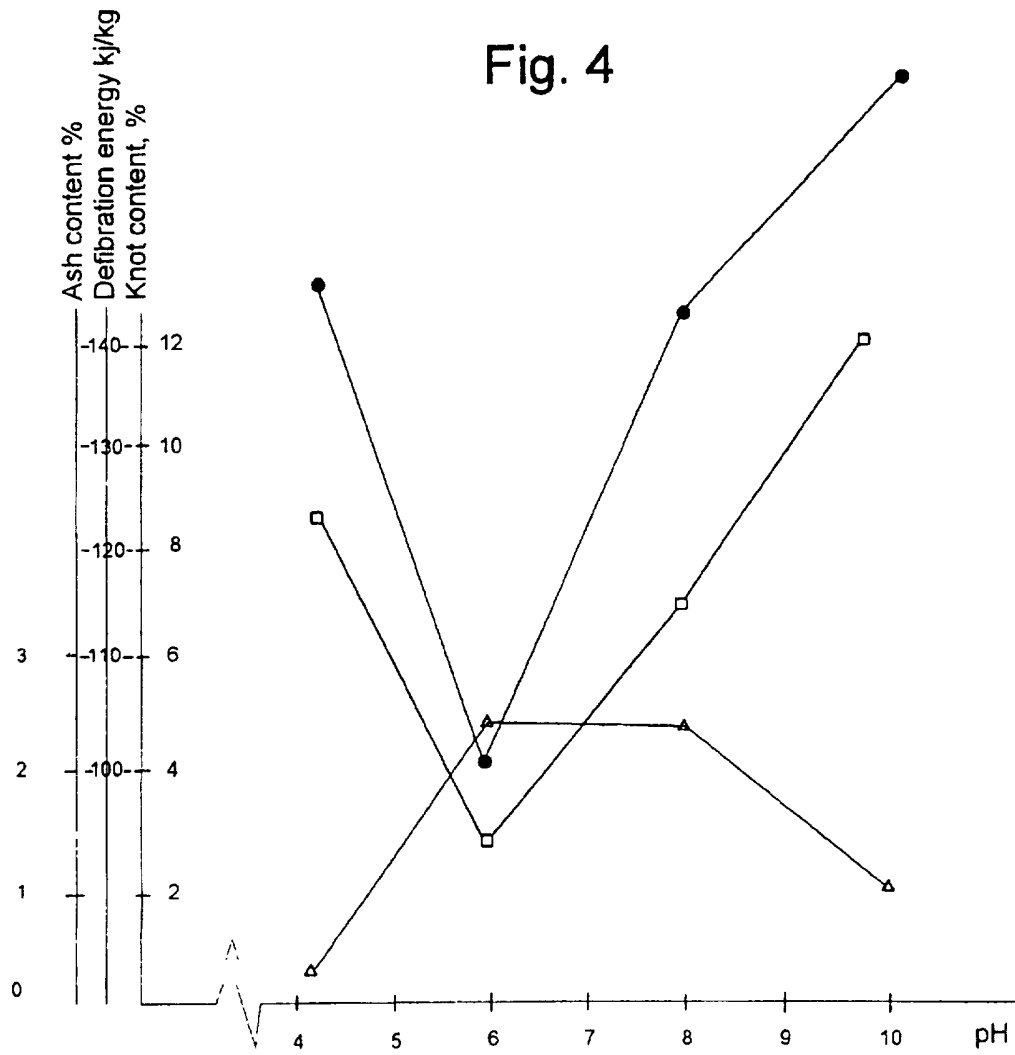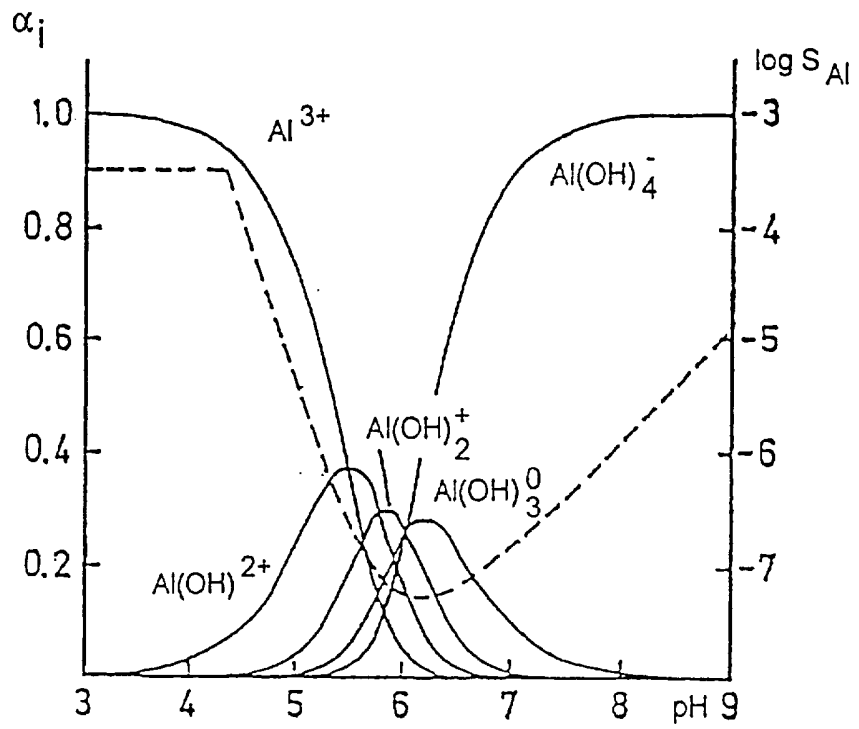

(Paper Chemistry, An introduction
 Dan Eklund, Tom Lindström
 DT Paper Science Publins, p 137)

Fig. 6

Knot content versus amount of added aluminium sulphate after defibration at two different rates of rotation






Fig. 7

Knot content v. Defibration energy

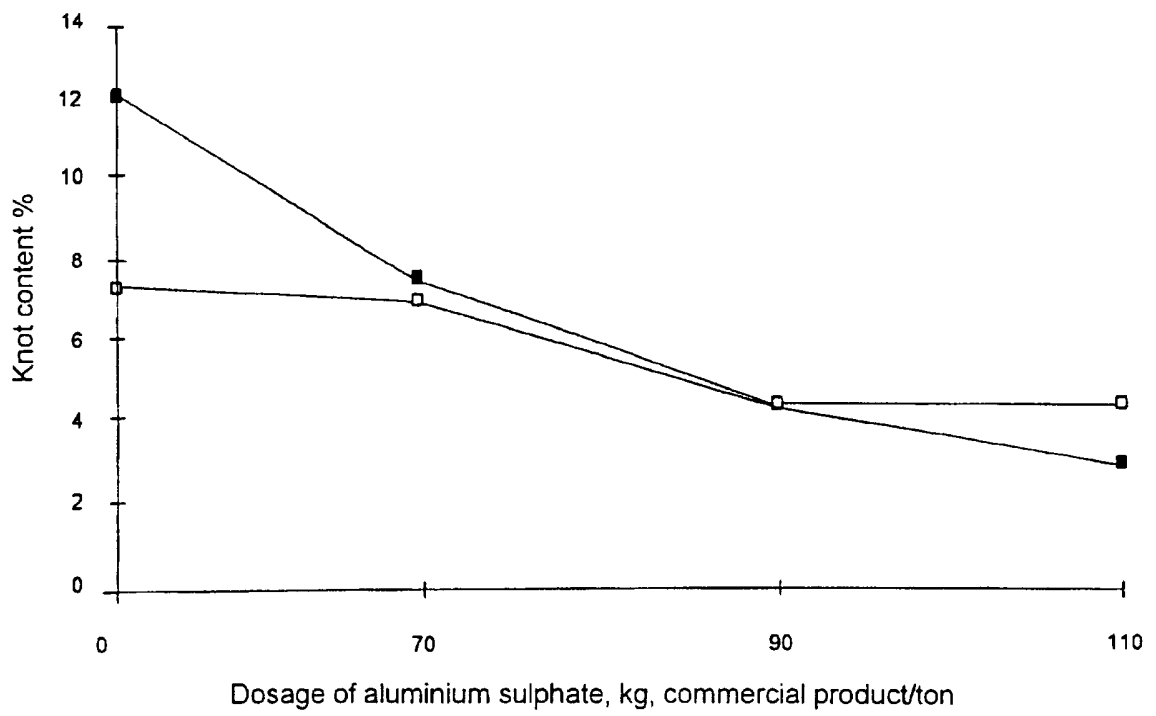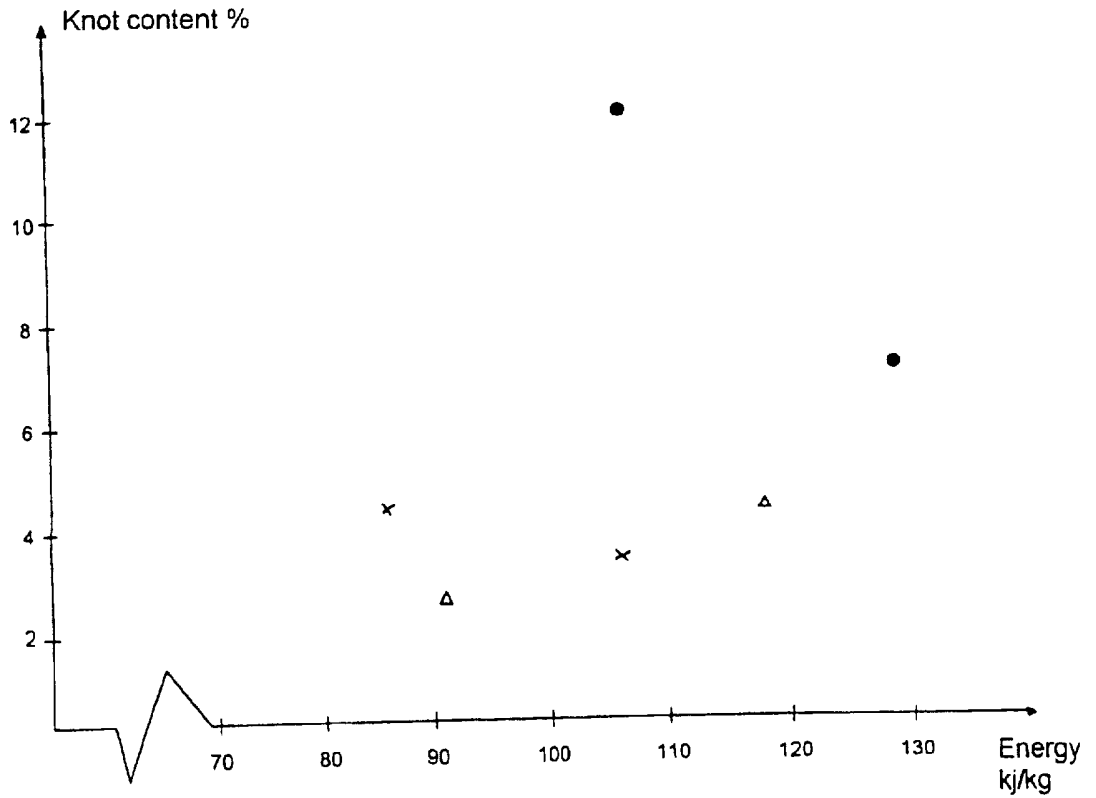

- ● — Ref.
- × — 90 kg aluminium sulphate/ton (start)
- ▲ — 110 kg aluminium sulphate/ton

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00561

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: D21H 17/66, D21H 21/22, A61L 15/18 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: A61L, D21H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	File WPI, Derwent accession no. 87-149264, Lengd Forestry Acad et al: "Prepn. of paper from pulp - involves using potash alum and/or aluminium sulphate to increase absorbency while maintaining wet strength", SU,A,1261996, 861007, DW8721 --	1-11
A	WO 9105106 A1 (SCA RESEARCH AB), 18 April 1991 (18.04.91), claims 1-5,10,22, abstract --	1-18
A	WO 9105108 A1 (SCA RESEARCH AB), 18 April 1991 (18.04.91), claims 1-7, abstract -- -----	1-18
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
8 July 1997		24 -07- 1997
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Barbro Nilsson Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

01/07/97

PCT/SE 97/00561

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9105106 A1	18/04/91	AT 154404 T	15/06/97
		AU 6505290 A	28/04/91
		AU 6516290 A	28/04/91
		DE 69007794 D,T	28/07/94
		EP 0493516 A,B	08/07/92
		EP 0577590 A,B	12/01/94
		ES 2052277 T	01/07/94
		SE 500858 C	19/09/94
		SE 500871 C	19/09/94
		SE 8903180 D	00/00/00
		SE 9002475 A	28/03/91
		SE 9002476 A	28/03/91
		US 5492759 A	20/02/96
		US 5601921 A	11/02/97
		WO 9105108 A	18/04/91
WO 9105108 A1	18/04/91	AT 154404 T	15/06/97
		AU 6505290 A	28/04/91
		AU 6516290 A	28/04/91
		DE 69007794 D,T	28/07/94
		EP 0493516 A,B	08/07/92
		EP 0577590 A,B	12/01/94
		ES 2052277 T	01/07/94
		SE 500858 C	19/09/94
		SE 500871 C	19/09/94
		SE 8903180 D	00/00/00
		SE 9002475 A	28/03/91
		SE 9002476 A	28/03/91
		US 5492759 A	20/02/96
		US 5601921 A	11/02/97
		WO 9105106 A	18/04/91