(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
12 February 2015 (12.02.2015)

WIPO | PCT

(10) International Publication Number
WO 2015/020741 A1

(51) International Patent Classification:
B05C 17/005 (2006.01) *E04F 21/165* (2006.01)

(21) International Application Number:
PCT/US2014/045018

(22) International Filing Date:
1 July 2014 (01.07.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/963,218 9 August 2013 (09.08.2013) US

(71) Applicant: **THE BOEING COMPANY** [US/US]; 5301 Bolsa Avenue, Mailcode: H011-B171, Huntington Beach, California 92647 (US).

(72) Inventors: **TOPF, Richard Philip**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **GUIRGUIS, Martin Hanna**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **TREND, Don David**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US). **DAVANCENS, Angelica**; 100 N. Riverside Plaza, Chicago, Illinois 60606 (US).

(74) Agents: **HALPERIN, Brett** et al.; 5301 Bolsa Avenue, Mailcode: H011-B171, Huntington Beach, California 92647 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DISPENSING AND DISTRIBUTING A FLUID

(57) Abstract: A method and apparatus for forming and shaping a fillet at an interface. A fluid may be dispensed from a nozzle onto the interface as the nozzle is moved along the interface to form the fillet. An exposed surface of the fillet may be worked using a fairing element associated with the nozzle, as the nozzle is moved along the interface and the fluid is dispensed from the nozzle.

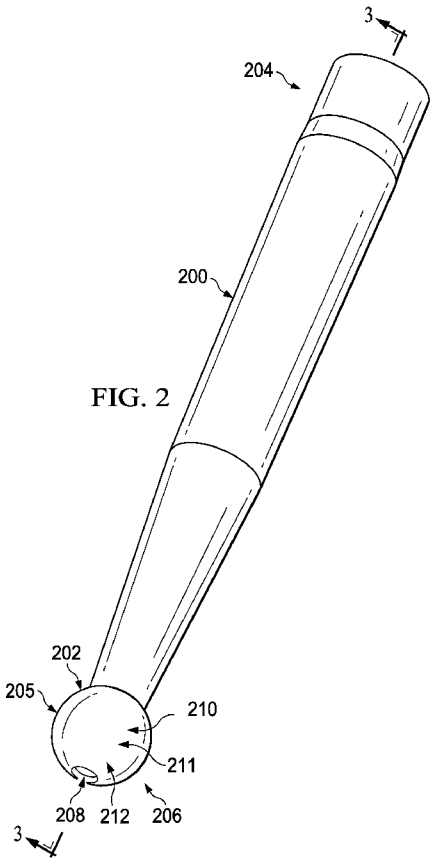


FIG. 2

WO 2015/020741 A1

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

METHOD AND APPARATUS FOR DISPENSING AND DISTRIBUTING A FLUID

BACKGROUND INFORMATION

1. **Field:**

The present disclosure relates generally to a nozzle and, in particular, to a nozzle for a fluid dispensing system. Still more particularly, the present disclosure relates to an apparatus and method for concurrently dispensing a fluid through a nozzle and fairing a surface of the fluid deposited to form a fillet using the nozzle.

Background:

Some manufacturing and assembly operations may require that a material be applied to the interface between two or more components to seal the interface, prevent a leakage of fluid through the interface, and/or reduce undesired electromagnetic effects at the interface. Oftentimes, the material used may include, for example, without limitation, a sealant material, a caulking material, an adhesive material, and/or some other type of material.

As one illustrative example, a first component and a second component may be joined to form an interface that is a corner. The corner may be an interior corner, which may be also referred to as an internal corner. A material, such as a sealant material, may be dispensed as a fluid and applied to the corner to form a fillet at this corner.

As used herein, a "fillet" may be a filling of an interior corner in which the filling has at least one surface that contacts the first component, at least one surface that contacts the second component, and at least one surface that contacts neither the first component nor the second component.

The fluid forming the fillet may then be allowed to cure, or harden, to form a seal at the interface. In some cases, the shape of the surface of the fillet not in contact with the first component or the second component may need to be changed. For example, without limitation, the fillet may need to be reworked such that the seal that will be formed has a surface shape that is resistant to inconsistencies. In one illustrative example, the fillet may be reworked such that the shape of the surface of the fillet not in contact with the first component or the second component has a curved shape with a desired radius of curvature. The curved shape may be, for example, a concave shape with respect to the corner. Depending on the implementation, the curved shape may have a constant and/or varying radius of curvature.

The curved shape desired for the fillet may be selected such that the seal formed at the corner has a reduced likelihood of peeling away from the corner over time or separating from the surfaces of the components joined at the corner. Some currently available techniques for forming fillets may include dispensing a bead of fluid at a corner using a dispensing device to form a fillet. Thereafter, one or more other tools may be used to rework the surface shape of the fillet such that the surface shape has a desired shape. The reworking of the surface shape may include fairing the surface of the fillet. As used herein, "fairing" may mean smoothing out, rounding, and/or reshaping the surface shape in some other manner after the fluid has been applied but prior to solidification of the fluid. In other words, fairing may be performed while the fluid that was applied to form the fillet is still workable.

The process of dispensing fluid to form a fillet and then reworking the surface shape of the fillet, as described above, may be more time-consuming than desired. In particular, using multiple tools to perform these different operations may be more time-consuming and, in some cases, more expensive, than desired.

Therefore, it would be desirable to have a method and apparatus that take into account at least some of the issues discussed above, as well as other possible issues.

SUMMARY

In one illustrative embodiment, an apparatus may comprise a nozzle and a fairing element associated with the nozzle. The nozzle may be configured to dispense a fluid onto an interface as the nozzle is moved along the interface to form a fillet. The fairing element may be configured to work an exposed surface of the fillet as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle.

In another illustrative embodiment, a fluid dispensing system may comprise a structure, a nozzle associated with the structure, and a fairing element associated with the nozzle. The structure may be configured for association with a fluid source. The nozzle may be configured to receive a fluid from the fluid source through the structure. The nozzle may be further configured to dispense the fluid onto an interface through an opening in the nozzle as the nozzle is moved along the interface to form a fillet at the interface. The opening may have a position that is one of on-center and off-center relative to a center axis of the structure. The fairing element may be configured to fair an exposed surface of the fillet such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle. The fairing element may have a curved shape configured to shape the exposed surface of the fillet to have the desired cross-sectional shape as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle. The curved shape may comprise at least one of a spherical shape, a convex shape, a concave shape, and a semi-

spherical shape. The curved shape may have a size selected based on at least one of a size or a shape of the interface.

In yet another illustrative embodiment, a method for forming and shaping a fillet at an interface may be provided. A fluid may be dispensed from a nozzle onto the interface as the nozzle is moved along the interface to form the fillet. An exposed surface of the fillet may be worked using a fairing element associated with the nozzle, as the nozzle is moved along the interface and the fluid is dispensed from the nozzle.

In still another illustrative embodiment, a method for concurrently forming and shaping a fillet at an interface may be provided. A fluid may be received within a nozzle from a fluid source through a structure with which the nozzle is associated. The nozzle may be moved along the interface. The fluid may be dispensed through an opening in the nozzle onto the interface as the nozzle is being moved along the interface to form the fillet. An exposed surface of the fillet may be faired using a curved shape of a fairing element associated with the nozzle as the nozzle is being moved along the interface and the fluid is being dispensed from the nozzle in a single pass such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape. The curved shape may comprise at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape. At least one of a rate or an amount of the fluid being dispensed out of the nozzle may be controlled such that the fairing element is able to work the exposed surface of the fillet to have the desired cross-sectional shape. The nozzle may be moved relative to the structure in a direction along a center axis of the structure as the nozzle is moved along the interface using one of a biasing element and a fluid pressure created by a fluid chamber located between the opening in the nozzle and an end of the structure such that the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

In summary, according to one aspect of the invention there is provided an apparatus including a nozzle configured to dispense a fluid onto an interface as the nozzle is moved along the interface to form a fillet; and a fairing element associated with the nozzle and configured to work an exposed surface of the fillet as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle.

Advantageously the apparatus wherein the fairing element is configured to work the exposed surface of the fillet by fairing the exposed surface such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle moving along the interface while the fluid is being dispensed from the nozzle.

Advantageously the apparatus wherein the fairing element has a curved shape configured to shape the exposed surface of the fillet to have the desired cross-sectional shape as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle.

Advantageously the apparatus wherein the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape.

Advantageously the apparatus wherein the curved shape has a size that is selected based on at least one of a size or a shape of the interface.

Advantageously the apparatus wherein the fairing element is formed by a portion of the nozzle.

Advantageously the apparatus further including a structure configured for association with the nozzle and a fluid source such that the nozzle is configured to receive the fluid from the fluid source through the structure.

Advantageously the apparatus wherein the nozzle is formed as part of the structure.

Advantageously the apparatus wherein the nozzle is separate from the structure and configured for attachment to the structure.

Advantageously the apparatus wherein the nozzle is at least one of attachable to and detachable from the structure.

Advantageously the apparatus further including a biasing element associated with at least one of the structure and the nozzle in which the biasing element allows the nozzle to move relative to the structure in a direction along a center axis of the structure such that an end of the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

Advantageously the apparatus wherein the nozzle includes a fluid chamber located between an opening in the nozzle through which the fluid is dispensed and an end of a structure in which the fluid chamber creates a fluid pressure that allows the fluid in the fluid chamber to function as a biasing element.

Advantageously the apparatus wherein the fairing element is at least one of attachable to and detachable from the nozzle.

Advantageously the apparatus wherein the nozzle includes an opening through which the fluid is dispensed.

Advantageously the apparatus wherein the opening has a position that is one of on-center and off-center relative to a center axis of a structure.

Advantageously the apparatus wherein the fluid is selected from one of a sealant, caulk, and an adhesive.

Advantageously the apparatus wherein the interface is an interior corner.

According to another aspect of the invention there is provided a fluid dispensing system including a structure configured for association with a fluid source; a nozzle associated with the structure and configured to receive a fluid from the fluid source through the structure in which the nozzle is configured to dispense the fluid onto an interface through an

opening in the nozzle as the nozzle is moved along the interface to form a fillet at the interface in which the opening has a position that is one of on-center and off-center relative to a center axis of the structure; and a fairing element associated with the nozzle and configured to fair an exposed surface of the fillet such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle in which the fairing element has a curved shape configured to shape the exposed surface of the fillet to have the desired cross-sectional shape as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle in which the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape and in which the curved shape has a size selected based on at least one of a size or a shape of the interface.

According to yet another aspect of the invention there is provided a method for forming and shaping a fillet at an interface, the method including dispensing a fluid from a nozzle onto the interface as the nozzle is moved along the interface to form the fillet; and working an exposed surface of the fillet using a fairing element associated with the nozzle as the nozzle is moved along the interface and the fluid is dispensed from the nozzle.

Advantageously the method wherein working the exposed surface of the fillet includes fairing the exposed surface of the fillet using a curved shape of the fairing element such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle.

Advantageously the method wherein fairing the exposed surface of the fillet includes fairing the exposed surface of the fillet using the curved shape of the fairing element such that the cross-sectional shape of the exposed surface takes on the desired cross-sectional shape in the single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle, wherein the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape.

Advantageously the method further including controlling at least one of a rate or an amount of the fluid being dispensed out of the nozzle such that the fairing element is able to work the exposed surface of the fillet to have a desired cross-sectional shape.

Advantageously the method further including receiving the fluid within the nozzle from a fluid source through a structure with which the nozzle is associated.

Advantageously the method further including moving the nozzle relative to the structure in a direction along a center axis of the structure as the nozzle is moved along the interface such that the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

Advantageously the method wherein moving the nozzle relative to the structure in the direction along the center axis of the structure includes moving the nozzle relative to the structure in the direction along the center axis of the structure using a biasing element associated with at least one of the structure and the nozzle.

Advantageously the method wherein moving the nozzle relative to the structure in the direction along the center axis of the structure includes moving the nozzle relative to the structure in the direction along the center axis of the structure using a fluid pressure created by a fluid chamber

located between an opening in the nozzle through which the fluid is dispensed and an end of the structure.

Advantageously the method wherein dispensing the fluid from the nozzle includes dispensing the fluid through an opening in the nozzle onto the interface while the nozzle is being moved along the interface to form the fillet.

Advantageously the method wherein dispensing the fluid through the opening in the nozzle includes dispensing the fluid through the opening in the nozzle onto the interface as the nozzle is moved along the interface to form the fillet, wherein the opening has a position that is one of on-center and off-center relative to a center axis of a structure.

According to still another aspect of the invention there is provided a method for concurrently forming and shaping a fillet at an interface, the method including receiving a fluid within a nozzle from a fluid source through a structure with which the nozzle is associated; moving the nozzle along the interface; dispensing the fluid through an opening in the nozzle onto the interface as the nozzle is being moved along the interface to form the fillet; fairing an exposed surface of the fillet using a curved shape of a fairing element associated with the nozzle as the nozzle is being moved along the interface and the fluid is being dispensed from the nozzle in a single pass such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in which the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape; controlling at least one of a rate or an amount of the fluid being dispensed out of the nozzle such that the fairing element is able to work the exposed surface of the fillet to have the desired cross-sectional shape; and moving the nozzle relative to the structure in a direction along a center axis of the structure as the nozzle is moved along the interface using one of a biasing element and a fluid pressure created by a fluid chamber located between the opening in the

nozzle and an end of the structure such that the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

The features and functions can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further objectives and features thereof, will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

Figure 1 is an illustration of a manufacturing environment in the form of a block diagram in accordance with an illustrative embodiment;

Figure 2 is an illustration of an isometric view of a structure and a nozzle associated with the structure in accordance with an illustrative embodiment;

Figure 3 is an illustration a cross-sectional view of a structure and a nozzle in accordance with an illustrative embodiment;

Figure 4 is an illustration of an opening in a nozzle having a different position relative to a center axis of a structure in accordance with an illustrative embodiment;

Figure 5 is an illustration of a cross-sectional view of a structure and a nozzle in accordance with an illustrative embodiment;

Figure 6 is an illustration of a nozzle attached to a structure in accordance with an illustrative embodiment;

Figure 7 is an illustration of a cross-sectional view of a structure and a nozzle in accordance with an illustrative embodiment;

Figure 8 is an illustration of a different type of nozzle attached to a structure in accordance with an illustrative embodiment;

Figure 9 is an illustration of a cross-sectional view of a structure and a nozzle in accordance with an illustrative embodiment;

Figure 10 is an illustration of a structure with a nozzle attached to the structure in accordance with an illustrative embodiment;

Figure 11 is an illustration of a cross-sectional view of a structure and a nozzle in accordance with an illustrative embodiment;

Figure 12 is an illustration of a nozzle attached to a different type of structure in accordance with an illustrative embodiment;

Figure 13 is an illustration of a cross-sectional view of a structure and a nozzle in accordance with an illustrative embodiment;

Figure 14 is an illustration of a cross-sectional view of a structure and a nozzle being used to apply a fluid to an interface in accordance with an illustrative embodiment;

Figure 15 is an illustration of a process for forming and working a fillet in the form of a flowchart in accordance with an illustrative embodiment;

Figure 16 is an illustration of a process for concurrently forming and fairing a fillet at an interface in the form of a flowchart in accordance with an illustrative embodiment;

Figure 17 is an illustration of an aircraft manufacturing and service method in the form of a flowchart in accordance with an illustrative embodiment; and

Figure 18 is an illustration of an aircraft in the form of a block diagram in which an illustrative embodiment may be implemented.

DETAILED DESCRIPTION

The illustrative embodiments recognize and take into account different considerations. For example, without limitation, the illustrative embodiments recognize and take into account that it may be desirable to have a method for both dispensing fluid and fairing a surface of the fluid deposited concurrently. Further, the illustrative embodiments recognize and take into account that it may be desirable to use the same tool to perform both the dispensing operations and the fairing operations included in forming a fillet. Using the same tool for both types of operations may reduce the overall time and cost needed to perform these operations.

Thus, the illustrative embodiments provide a method and apparatus for forming a fillet having a desired surface shape at an interface. In one illustrative embodiment, an apparatus may comprise a structure and a nozzle associated with the structure. The structure may be configured for association with a fluid source. The nozzle may be configured to receive a fluid from the fluid source through the structure. The nozzle may be further configured to dispense the fluid onto an interface as the nozzle is moved along the interface to form a fillet. The nozzle may have an outer nozzle shape configured to work an exposed surface of the fillet as the nozzle is moved along the interface.

Referring now to the figures and, in particular, with reference to **Figure 1**, an illustration of a manufacturing environment is depicted in the form of a block diagram in accordance with an illustrative embodiment. In this illustrative example, manufacturing environment **100** may be an

example of an environment in which fluid dispensing system **102** may be used. As depicted, fluid dispensing system **102** may include fluid source **104**, structure **105**, and nozzle **108**. Fluid source **104** may hold fluid **110**. Structure **105** may be configured to receive fluid **110** from fluid source **104** and allow fluid **110** to flow to nozzle **108**. Structure **105** may be comprised of any number of components.

In some cases, structure **105** may include control valve **106**. Control valve **106** may be configured to control the flow of fluid **110** to nozzle **108**. Nozzle **108** may be the portion of fluid dispensing system **102** through which fluid **110** is dispensed. In other words, fluid **110** may exit fluid dispensing system **102** through nozzle **108**.

In these illustrative examples, nozzle **108** may be associated with structure **105**. As used herein, when one component is "associated" with another component, the association is a physical association in the depicted examples. For example, without limitation, a first component, such as nozzle **108**, may be considered to be associated with a second component, such as structure **105**, by being secured to the second component, bonded to the second component, mounted to the second component, welded to the second component, fastened to the second component, and/or connected to the second component in some other suitable manner. The first component also may be connected to the second component using a third component. Further, the first component may be considered to be associated with the second component by being formed as part of and/or as an extension of the second component.

Although not shown in this example, nozzle **108** may be formed as part of structure **105** in some cases. In this manner, nozzle **108** may be considered a portion of structure **105** in these examples. In other illustrative examples, number of fluid transfer elements **112** may be used to connect nozzle **108** to structure **105**. In these examples, fluid **110** may flow through

structure **105** to nozzle **108** through number of fluid transfer elements **112**.

As used herein, a "number of" items may be one or more items. In this manner, number of fluid transfer elements **112** may be one or more fluid transfer elements. Further, as used herein, a "fluid transfer element," such as one of number of fluid transfer elements **112** may be any element configured to allow fluid **110** to flow through a channel located within the element. In one illustrative example, number of fluid transfer elements **112** may take the form of number of tubes **114**. In another illustrative example, number of fluid transfer elements **112** may take the form of number of hoses **116**.

Fluid **110** may be dispensed from nozzle **108** through opening **115** in nozzle **108**. In other words, opening **115** may be the exit hole in nozzle **108** through which fluid **110** exits nozzle **108**. Cross-sectional diameter **117** of opening **115** may be selected such that fluid **110** exits opening **115** with a desired pressure.

For example, without limitation, fluid **110** may have viscosity **118** within range **120**. Viscosity **118** may be a measure of the resistance of fluid **110** to gradual deformation by shear stress or tensile stress. In particular, viscosity **118** may indicate the resistance of fluid **110** to flow. A fluid having a higher viscosity may be more resistant to flow than a fluid having a lower viscosity.

Cross-sectional diameter **117** of opening **115** may be selected such that fluid **110** may exit opening **115** with a desired exit pressure, given range **120** of viscosity **118** of fluid **110**. Range **120** may be, for example, without limitation, between about 1 centipoise to about 20 centipoise (cP). Of course, in other illustrative examples, viscosity **118** of fluid **110** may fall within some other range.

In one illustrative example, fluid **110** may take the form of sealant **122** and fluid source **104** may take the form of sealant cartridge **124** configured to hold sealant **122**. Sealant **122** may

be a silicone-based sealant, a sealant for use in fuel tanks, or some other type of sealant. Of course, in other illustrative examples, fluid **110** may take some other form. For example, without limitation, fluid **110** may take the form of adhesive **123**, caulk **125**, or some other type of fluid having a higher viscosity than water.

In this illustrative example, interface **126** may take a number of different forms. For example, without limitation, interface **126** may take the form of an interior corner, an exterior corner, an edge, an angled joint, or some other type of surface. In one illustrative example, interface **126** may take the form of interior corner **128** formed by first object **130** and second object **132**. First object **130** and second object **132** may take the form of, for example, without limitation, a first panel and a second panel, respectively. The angle of interior corner **128** may be any value between about 5 degrees to about 175 degrees.

Nozzle **108** may be used to dispense fluid **110** onto interface **126** while concurrently fairing fluid **110** deposited at interface **126** as nozzle **108** is moved along interface **126**. More specifically, nozzle **108** may be used to simultaneously dispense fluid **110**, apply fluid **110** onto interface **126**, and work fluid **110** deposited at interface **126** as nozzle **108** is moved along interface **126**.

For example, without limitation, nozzle **108** may be used to dispense and apply fluid **110** onto interface **126** to form fillet **140**. Fillet **140** may be a filling for interface **126**. Fillet **140** may be formed such that fillet **140** has first surface **141** that may contact first surface **156** of first object **130**, second surface **143** that may contact second surface **158** of second object **132**, and exposed surface **133** that may contact neither first object **130** nor second object **132**. Nozzle **108** may be configured such that exposed surface **133** of fillet **140** may be worked and reshaped as nozzle **108** is moved along interface **126**.

As depicted, nozzle **108** may have inner nozzle shape **134** and outer nozzle shape **136**. Inner nozzle shape **134** may be the shape of the channel or hollow portion of nozzle **108** through which fluid **110** is received and dispensed. Outer nozzle shape **136** may be the shape of the outer surface of nozzle **108**.

Further, fairing element **137** may be associated with nozzle **108**. In this illustrative example, fairing element **137** may be considered part of nozzle **108**. Fairing element **137** may be the portion of nozzle **108** that surrounds opening **115** and that comes into contact with fluid **110** that has been deposited at interface **126**. In this illustrative example, fairing element **137** may be configured to work exposed surface **133** of fillet **140** while nozzle **108** is being moved along interface **126** and fluid **110** is being dispensed from nozzle **108**. In particular, fairing element **137** may be used to fair exposed surface **133**.

As depicted, the portion of outer nozzle shape **136** of nozzle **108** belonging to fairing element **137** may be configured such that exposed surface **133** of fillet **140** is faired to have desired cross-sectional shape **145**. In this manner, seal **151**, formed by fillet **140** when fillet **140**, is cured may have exposed surface **133** with desired cross-sectional shape **145**.

Desired cross-sectional shape **145** may be a shape in which exposed surface **133** of seal **151** formed by fillet **140** may be within tolerances. For example, without limitation, desired cross-sectional shape **145** may be selected such that seal **151** formed at interface **126** has a reduced likelihood of peeling away from interface **126** over time or separating from first surface **156** of first object **130** and/or second surface **158** of second object **132**.

For example, without limitation, the portion of outer nozzle shape **136** belonging to fairing element **137** may have a cross-sectional shape that takes the form of curved shape **138**. Curved shape **138** may be used to fair exposed surface **133** of fillet **140** at interface **126** before fluid **110** solidifies or

becomes unworkable. In other words, curved shape **138** may be used to smooth and round out exposed surface **133** of fillet **140** at interface **126** before fluid **110** solidifies or becomes unworkable.

Curved shape **138** may be implemented using a number of different shapes. Curved shape **138** may be comprised of any number of different radii of curvature. Curved shape **138** may be implemented comprising at least one of spherical shape **142**, convex shape **144**, concave shape **146**, semi-spherical shape **147**, or some other type of curved shape. Convex shape **144** and concave shape **146** may be with respect to opening **115**. The size of spherical shape **142** may determine the thickness of the deposition of fluid **110** at interface **126**.

Nozzle **108** may be moved along interface **126** such that the cross-sectional shape of exposed surface **133** of fillet **140** substantially conforms to curved shape **138** of nozzle **108**. In this manner, depending on the implementation of curved shape **138**, exposed surface **133** of fillet **140** may be reshaped to have desired cross-sectional shape **145** that is one of a convex shape, a concave shape, or some other type of shape.

The size of curved shape **138** may be selected based on a number of different factors. The size of curved shape **138** may be selected based on, for example, without limitation, at least one of a size or a shape of interface **126**. For example, without limitation, a cross-sectional diameter of curved shape **138** may be selected such that fairing element **137** does or does not come into contact with first surface **156** of first object **130** and/or second surface **158** of second object **132** as nozzle **108** is moved along interface **126**. In some cases, the cross-sectional diameter of curved shape **138** may be selected based on the angle between first surface **156** and second surface **158**.

Curved shape **138** may allow exposed surface **133** of fillet **140** to be faired just after fluid **110** has been deposited such that desired cross-sectional shape **145** for exposed surface **133**

of fillet **140** may be achieved in the same movement or pass of nozzle **108** along interface **126**. In other words, nozzle **108** may not need to be moved along the same portion of interface **126** again in order to achieve desired cross-sectional shape **145** for exposed surface **133**. Further, no other tools may be needed to work fillet **140** to achieve desired cross-sectional shape **145** for exposed surface **133**.

Depending on the implementation, curved shape **138** may be selected such that curved shape **138** has a transitional effect on fillet **140** such that the cross-sectional shape of exposed surface **133** of fillet **140** is gradually transformed into desired cross sectional shape **145**. However, this gradual transformation may still occur within the same pass of nozzle **108** moving along interface **126**.

In some illustrative examples, fairing element **137** may be detachable from the rest of nozzle **108**. For example, without limitation, fairing element **137** may be a separate component configured for attachment to and/or detachment from the rest of nozzle **108**. When fairing element **137** takes the form of this type of separate component, fairing element **137** may have exit **139** that coincides with opening **115** such that fluid **110** flows through opening **115** and exit **139**. Exit **139** may have a same or different cross-sectional diameter compared to cross-sectional diameter **117** as opening **115**.

As depicted, opening **115** in nozzle **108** may have position **150** with respect to curved shape **138**. Position **150** of opening **115** with respect to curved shape **138** may be selected to improve the precision and accuracy with which fillet **140** may be formed. In one illustrative example, opening **115** may be positioned such that position **150** of opening **115** lies along center axis **152** of structure **105**. However, in another illustrative example, position **150** of opening **115** may be selected offset from center axis **152**. In this manner, position **150** of opening **115** may be one of on-center and off-center relative to center axis **152**.

For example, without limitation, position **150** may be selected such that fluid **110** exits opening **115** in the direction of travel for nozzle **108**. Position **150** may be selected such that the dispensing of fluid **110** through opening **115** is more easily automated. In some cases, position **150** may be selected such that fairing of fillet **140** formed by fluid **110** is more easily and accurately performed to achieve desired cross-sectional shape **145** for fillet **140**.

In some illustrative examples, when nozzle **108** is a separate component attached to structure **105**, nozzle **108** may be configured to move relative to structure **105**. In particular, nozzle **108** may be configured to move relative to structure **105** in a direction along center axis **152**. Nozzle **108** may be moveable relative to structure **105** such that nozzle **108** may be configured to maintain contact with fillet **140** as nozzle **108** is moved along interface **126**. In this manner, nozzle **108** may be able to account for small undulations in first surface **156** of first object **130** and/or second surface **158** of second object **132** that may not be taken into account by the movement system (not shown) being used to move nozzle **108** along interface **126**.

In one illustrative example, nozzle **108** may be configured to move using biasing element **154**. Biasing element **154** may be associated with at least one of structure **105** and nozzle **108**. In one illustrative example, biasing element **154** may take the form of a mechanical spring that may allow nozzle **108** to move relative to structure **105** to accommodate variations in first surface **156** of first object **130** and/or second surface **158** of second object **132** forming interface **126**. Biasing element **154** may provide a force that allows a minimal contact pressure to be maintained with fillet **140** as nozzle **108** is moved along interface **126** such that undesired out-of-tolerance inconsistencies are not formed at exposed surface **133** of fillet **140**, first surface **156** of first object **130**, and/or second

surface **158** of second object **132** as nozzle **108** is moved along interface **126**.

In another illustrative example, nozzle **108** may be configured to move using fluid pressure **160**. In particular, nozzle **108** may have fluid chamber **162** configured to create fluid pressure **160**. Fluid chamber **162** may be located between opening **115** and end **161** of structure **105** to which nozzle **108** may be attached.

Fluid chamber **162** may be configured to hold fluid **110** within nozzle **108**. Fluid chamber **162** may have a larger cross-sectional area than opening **115** of nozzle **108**. In other words, fluid chamber **162** may have cross-sectional diameter **164** that may be greater than cross-sectional diameter **117** of opening **115** of nozzle **108**.

Consequently, fluid pressure **160** of fluid **110** may be higher within fluid chamber **162** than within opening **115** when the flow of fluid **110** into fluid chamber **162** is greater than the flow of fluid **110** out of fluid chamber **162**. In other words, fluid pressure **160** of fluid **110** may be higher within fluid chamber **162** than within opening **115** when the velocity of fluid **110** flowing into fluid chamber **162** is greater than the velocity of fluid **110** flowing out of fluid chamber **162**. The flow of fluid **110** may be affected by viscosity **118** of fluid **110**. The difference in fluid pressure **160** between fluid chamber **162** and opening **115** may result in movement of fluid **110** that is similar to the movement of a piston within a cylinder.

In one illustrative example, fluid chamber **162** may be formed from a material or coated in a material configured to make the flow of fluid **110** having viscosity **118** above range **120** through fluid chamber **162** easier.

In some cases, some type of control or feedback control may be used to control at least one of a rate or an amount of fluid **110** being dispensed from nozzle **108** such that fairing element **137** is able to work exposed surface **133** of fillet **140** to have

desired cross-sectional shape **145**. Further, with this type of control, fillet **140** having desired cross-sectional shape **145** along the length of fillet **140** may be formed with minimal waste of fluid **110**.

The illustration of manufacturing environment **100** and fluid dispensing system **102** with nozzle **108** in **Figure 1** is not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used. Some components may be optional. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

For example, without limitation, fluid source **104** may be considered separate from fluid dispensing system **102**. In some illustrative examples, one or more components of structure **105** and/or nozzle **108** may be disposable parts that may be detached from fluid source **104** and discarded after use.

In other illustrative examples, structure **105** may be considered part of fluid source **104**. For example, without limitation, in these examples, structure **105** may be formed as part of fluid source **104**.

With reference now to **Figure 2**, an illustration of an isometric view of a structure and a nozzle associated with the structure is depicted in accordance with an illustrative embodiment. In this illustrative example, structure **200** and nozzle **202** may be examples of implementations for structure **105** and nozzle **108**, respectively, in **Figure 1**.

Structure **200** may have first end **204** and second end **206**. First end **204** may be configured for attachment to a fluid source (not shown). Nozzle **202** may be associated with second end **206** of structure **200**. In particular, in this illustrative example,

nozzle **202** may be formed as part of structure **200** at second end **206** of structure **200**.

Further, nozzle **202** may include fairing element **205**. Fairing element **205** may be an example of one implementation for fairing element **137** in **Figure 1**.

As depicted, nozzle **202** may have opening **208** through which fluid (not shown) may be allowed to exit nozzle **202**. Opening **208** may be an example of one implementation for opening **115** in **Figure 1**.

Further, nozzle **202** may have outer nozzle shape **210**. Outer nozzle shape **210** may be an example of one implementation for outer nozzle shape **136** in **Figure 1**. In this illustrative example, outer nozzle shape **210** may include curved shape **211**. Curved shape **211** may be the portion of outer nozzle shape **210** belonging to fairing element **205**. Curved shape **211** may be an example of one implementation for curved shape **138** in **Figure 1**. In this illustrative example, curved shape **211** is implemented as spherical shape **212** with respect to opening **208**. In other words, the portion of outer nozzle shape **210** surrounding opening **208** may be spherical.

Spherical shape **212** may be an example of one implementation for spherical shape **142** in **Figure 1**. Spherical shape **212** may be used to smooth and round out, or fair, the fluid (not shown) that is dispensed through nozzle **202**.

With reference now to **Figure 3**, an illustration of a cross-sectional view of structure **200** and nozzle **202** from **Figure 2** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **200** and nozzle **202** from **Figure 2** is depicted taken with respect to lines **3-3** in **Figure 2**. As depicted, lines **3-3** bisect structure **200** and nozzle **202** from **Figure 2**. Inner nozzle shape **300** of nozzle **202** may be seen in this illustrative example.

Fluid (not shown) may flow through channel **302** formed by structure **200** and nozzle **202** and may exit nozzle **202** through

opening **208**. In this illustrative example, opening **208** may have position **306**, which may be on-center relative to center axis **304** of structure **200**. In this manner, the fluid (not shown) may exit opening **208** in a same direction as the direction in which the fluid (not shown) may flow through channel **302**.

Turning now to **Figure 4**, an illustration of opening **208** in nozzle **202** from **Figures 2-3** having a different position relative to center axis **304** of structure **200** is depicted in accordance with an illustrative embodiment. In this illustrative example, opening **208** may have position **400**, which may be off-center relative to center axis **304** (not shown) in **Figure 3** of structure **200**. In this manner, fluid (not shown) may exit opening **208** in a direction angled with respect to the direction in which the fluid (not shown) may flow through channel **302**.

With reference now to **Figure 5**, an illustration of a cross-sectional view of structure **200** and nozzle **202** from **Figure 4** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **200** and nozzle **202** from **Figure 4** with opening **208** off-center relative to center axis **304** of structure **200** is depicted taken with respect to lines **5-5** in **Figure 4**. As depicted, lines **5-5** bisect structure **200** and nozzle **202** from **Figure 4**.

With reference now to **Figure 6**, an illustration of a nozzle attached to a structure is depicted in accordance with an illustrative embodiment. In this illustrative example, structure **600** and nozzle **602** may be examples of implementations for structure **105** and nozzle **108**, respectively, in **Figure 1**. As depicted, structure **600** may have first end **604** and second end **606**. First end **604** may be configured for attachment to a fluid source (not shown). Nozzle **602** may be attached to second end **606** of structure **600**. In particular, in this illustrative example, nozzle **602** may be a separate component attached to second end **606** of structure **600**.

Nozzle **602** may include fairing element **603**. Fairing element **603** may be an example of one implementation for fairing element **137** in **Figure 3**. Further, as depicted, nozzle **602** may have opening **608** through which fluid (not shown) may be allowed to exit nozzle **602**. Opening **608** may be an example of one implementation for opening **115** in **Figure 1**.

Further, nozzle **602** may have outer nozzle shape **610**. Outer nozzle shape **610** may be an example of one implementation for outer nozzle shape **136** in **Figure 1**. The portion of outer nozzle shape **610** belonging to fairing element **603** may take the form of curved shape **611**.

Curved shape **611** may be an example of one implementation for curved shape **138** in **Figure 1**. In particular, curved shape **611** may be implemented as spherical shape **612** with respect to opening **608** in this illustrative example. In other words, the portion of outer nozzle shape **610** surrounding opening **608** may be spherical.

Spherical shape **612** may be an example of one implementation for spherical shape **142** in **Figure 1**. Spherical shape **612** may be used to smooth and round out, or fair, the fluid (not shown) that is dispensed through nozzle **602**.

With reference now to **Figure 7**, an illustration of a cross-sectional view of structure **600** and nozzle **602** from **Figure 6** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **600** and nozzle **602** from **Figure 6** is depicted taken with respect to lines **7-7** in **Figure 6**. As depicted, lines **7-7** bisect structure **600** and nozzle **602** from **Figure 6**. Inner nozzle shape **700** of nozzle **602** may be seen in this illustrative example.

Fluid (not shown) may flow through channel **702** formed by structure **600** and nozzle **602** and may exit nozzle **602** through opening **608**. In this illustrative example, opening **608** may have position **706**, which may be on-center relative to center axis **704** of structure **600**. In this manner, the fluid (not shown) may

exit opening **608** in a same direction as the direction in which the fluid (not shown) may flow through channel **702**.

With reference now to **Figure 8**, an illustration of a different type of nozzle attached to structure **600** from **Figures 6-7** is depicted in accordance with an illustrative embodiment. In this illustrative example, nozzle **800** may be another example of one implementation for nozzle **108** in **Figure 1**. Nozzle **800** may have opening **802** through which fluid (not shown) may exit. Further, as depicted, nozzle **800** may have fairing element **803**. Fairing element **803** may be an example of one implementation for fairing element **137** in **Figure 3**. Nozzle **800** may also have outer nozzle shape **804**. Outer nozzle shape **804** may be an example of one implementation for outer nozzle shape **136** in **Figure 1**.

The portion of outer nozzle shape **804** that belongs to fairing element **803** may take the form of semi-spherical shape **806**. Semi-spherical shape **806** may be an example of one implementation for semi-spherical shape **147** in **Figure 1**. Semi-spherical shape **806** of fairing element **803** may be used for fairing.

Turning now to **Figure 9**, an illustration of a cross-sectional view of structure **600** and nozzle **800** from **Figure 8** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **600** and nozzle **800** is depicted taken with respect to lines **9-9** in **Figure 8**. As depicted, lines **9-9** bisect structure **600** and nozzle **800** from **Figure 8**. Inner nozzle shape **900** of nozzle **800** may be seen in this illustrative example.

Fluid (not shown) may flow through channel **702** formed by structure **600** and nozzle **800** and may exit nozzle **800** through opening **802**. In this illustrative example, opening **802** may have position **904**, which may be on-center relative to center axis **704** of structure **600**. In this manner, the fluid (not shown) may exit opening **802** in a same direction as the direction in which the fluid (not shown) may flow through channel **702**.

With reference now to **Figure 10**, an illustration of a structure with a nozzle attached to the structure is depicted in accordance with an illustrative embodiment. In this illustrative example, structure **1000** and nozzle **1002** may be examples of implementations for structure **105** and nozzle **108**, respectively, in **Figure 1**.

As depicted, structure **1000** may have attachment feature **1004** configured for use in attaching structure **1000** to a fluid source (not shown). Fluid (not shown) from the fluid source (not shown) may flow through structure **1000** and through nozzle **1002**.

In this illustrative example, nozzle **1002** may have fairing element **1006**. Fairing element **1006** may be an example of one implementation for fairing element **137** in **Figure 1**. As depicted, nozzle **1002** may have outer nozzle shape **1008**. Outer nozzle shape **1008** may be an example of one implementation for outer nozzle shape **136** in **Figure 1**. As depicted, the portion of outer nozzle shape **1008** belonging to fairing element **1006** may take the form of semi-spherical shape **1011**. Semi-spherical shape **1011** may be an example of one implementation for semi-spherical shape **147** in **Figure 1**. Fluid (not shown) may be dispensed through opening **1014** of nozzle **1002** and applied to an interface (not shown), while being concurrently faired using semi-spherical shape **1011**.

Turning now to **Figure 11**, an illustration of a cross-sectional view of structure **1000** and nozzle **1002** from **Figure 10** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **1000** and nozzle **1002** from **Figure 10** may be depicted with respect to lines **11-11** in **Figure 10**. As depicted, lines **11-11** bisect structure **1000** and nozzle **1002** from **Figure 10**.

As depicted, nozzle **1002** may have fluid chamber **1100**. Fluid chamber **1100** may be configured to create a fluid pressure that allows nozzle **1002** to move relative to structure **1000** in a

direction along center axis **1102** of structure **1000**. In particular, fluid chamber **1100** may be configured to hold fluid (not shown) that flows through structure **1000** into nozzle **1002**. Fluid chamber **1100** may have diameter **1104** that may be greater than diameter **1106** of opening **1014**. This difference between diameter **1104** and diameter **1106** may create a fluid pressure that allows the fluid (not shown) within fluid chamber **1100** to function as a biasing element, such as, for example, without limitation, a damper, or a spring.

With reference now to **Figure 12**, an illustration of nozzle **1002** attached to a different type of structure is depicted in accordance with an illustrative embodiment. In this illustrative example, structure **1200** may be another example of one implementation for structure **105** in **Figure 1**. In this example, nozzle **1002** is attached to structure **1200**.

As depicted, structure **1200** may have attachment feature **1202** configured for use in attaching structure **1200** to a fluid source (not shown). Further, structure **1200** may have biasing element **1204** associated with structure **1200**. Biasing element **1204** may be configured to allow biased movement of nozzle **1002** relative to structure **1200** in a direction along center axis **1206** of structure **1200**. In this illustrative example, biasing element **1204** may take the form of a spring. Of course, in other illustrative examples, biasing element **1204** may take some other form.

Turning now to **Figure 13**, an illustration of a cross-sectional view of structure **1200** and nozzle **1002** from **Figure 12** is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **1200** and nozzle **1002** may be depicted with respect to lines **13-13** in **Figure 12**. As depicted, lines **13-13** bisect structure **1200** and nozzle **1002** from **Figure 12**.

With reference now to **Figure 14**, an illustration of a cross-sectional view of structure **200** and nozzle **202** from

Figures 4-5 being used to apply a fluid to an interface is depicted in accordance with an illustrative embodiment. In this illustrative example, a cross-sectional view of structure **200** and nozzle **202** is depicted taken with respect to lines **5-5** in **Figure 4**. Nozzle **202** from **Figures 4-5** may be used to dispense and apply fluid **1401** to interface **1400** to form fillet **1406** in this illustrative example.

Interface **1400** may take the form of a corner formed between first part **1402** and second part **1404**. Interface **1400** may be an example of one implementation for interface **126**, and interior corner **128** in particular, in **Figure 1**. Further, fillet **1406** may be an example of one implementation for fillet **140** in **Figure 1**. As depicted, spherical shape **212** of nozzle **202** may allow nozzle **202** to fair fillet **1406** while nozzle **202** is being moved in the direction of arrow **1405** and fluid **1401** is being dispensed from nozzle **202** all within a single pass. In particular, spherical shape **212** of nozzle **202** may be used to fair fillet **1406** such that exposed surface **1408** of fillet **1406** may have a desired cross-sectional shape, such as desired cross-sectional shape **145** in **Figure 1**.

Spherical shape **212** of nozzle **202** and position **400** of opening **208** of nozzle **202** may allow exposed surface **1408** to be faired to achieve the desired cross-sectional shape without requiring any additional passes of nozzle **202** along interface **1400**. In other words, nozzle **202** may not need to be moved along interface **1400** again. Further, no other tools may be needed to rework fillet **1406** in order to achieve the desired cross-sectional shape for exposed surface **1408**.

With reference now to **Figure 15**, an illustration of a process for forming and working a fillet is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 15** may be implemented using, for example, without limitation, nozzle **108** of fluid dispensing system **102** in **Figure 1**.

The process may begin by moving nozzle **108** along interface **126** (operation **1500**). Next, fluid **110** may be dispensed from nozzle **108** onto interface **126** as nozzle **108** is moved along interface **126** to form fillet **140** (operation **1502**). Further, exposed surface **133** of fillet **140** may be worked using fairing element **137** associated with nozzle **108**, while nozzle **108** is being moved along interface **126** and fluid **110** is being dispensed from nozzle **108**, (operation **1504**), with the process terminating thereafter.

In operation **1504**, fairing element **137** is used to work exposed surface **133** of fillet **140** such that a cross-sectional shape of exposed surface **133** of fillet **140** may take on desired cross-sectional shape **145**. The process described in **Figure 15** may be performed in a single pass of nozzle **108** concurrently moving along interface **126** and dispensing fluid **110** onto interface **126** moving such that exposed surface **133** of fillet **140** has desired cross-sectional shape **145**.

With reference now to **Figure 16**, an illustration of a process for concurrently forming and fairing a fillet at an interface is depicted in the form of a flowchart in accordance with an illustrative embodiment. The process illustrated in **Figure 16** may be implemented using, for example, without limitation, nozzle **108** of fluid dispensing system **102** in **Figure 1**.

The process may begin by receiving fluid **110** within nozzle **108** from fluid source **104** through structure **105** with which nozzle **108** is associated (operation **1600**). Next, nozzle **108** may be moved along interface **126** (operation **1602**).

Fluid **110** may be dispensed through opening **115** in nozzle **108** onto interface **126**, while nozzle **108** is being moved along interface **126**, to form fillet **140** (operation **1604**). Exposed surface **133** of fillet **140** may be faired using curved shape **138** of fairing element **137** associated with nozzle **108** as nozzle **108** is being moved along interface **126** and fluid **110** is being

dispensed from nozzle **108** in a single pass such that exposed surface **133** of fillet **140** has desired cross-sectional shape **145** (operation **1606**). Curved shape **138** may comprise at least one of spherical shape **142**, convex shape **144**, concave shape **146**, and semi-spherical shape **147**.

At least one of a rate or an amount of fluid **110** being dispensed from nozzle **108** may be controlled such that fairing element **137** is able to work exposed surface **133** of fillet **140** to have desired cross-sectional shape **145** along the length of fillet **140** (operation **1608**). Operation **1608** may be performed to ensure that only a single pass of nozzle **108** moving along interface **126** is needed to form fillet **140** and sufficiently work fillet **140** such that exposed surface **133** of fillet **140** has desired cross-sectional shape **145**. Further, operation **1608** may be performed to reduce the amount of fluid **110** wasted during the fillet-forming and fairing process.

Further, nozzle **108** may be moved relative to structure **105** in a direction along center axis **152** of structure 1**05** as nozzle **108** is moved along interface **126** such that nozzle **108** maintains contact with exposed surface **133** of fillet **140** at interface **126** as nozzle **108** is moved along interface **126** (operation **1610**), with the process terminating thereafter. In operation **1610**, one of biasing element **154** and fluid pressure **160** created by fluid chamber **162** located between opening **115** in nozzle **108** and end **161** of structure **105** may be used to allow nozzle **108** to move relative to structure **105** in a direction along center axis **152**.

Illustrative embodiments of the disclosure may be described in the context of aircraft manufacturing and service method **1700** as shown in **Figure 17** and aircraft **1800** as shown in **Figure 18**. Turning first to **Figure 17**, an illustration of an aircraft manufacturing and service method is depicted in the form of a flowchart in accordance with an illustrative embodiment. During pre-production, aircraft manufacturing and service method **1700**

may include specification and design **1702** of aircraft **1800** in **Figure 18** and material procurement **1704**.

During production, component and subassembly manufacturing **1706** and system integration **1708** of aircraft **1800** in **Figure 18** takes place. Thereafter, aircraft **1800** in **Figure 18** may go through certification and delivery **1710** in order to be placed in service **1712**. While in service **1712** by a customer, aircraft **1800** in **Figure 18** is scheduled for routine maintenance and service **1714**, which may include modification, reconfiguration, refurbishment, and other maintenance or service.

Each of the processes of aircraft manufacturing and service method **1700** may be performed or carried out by a system integrator, a third party, and/or an operator. In these examples, the operator may be a customer. For the purposes of this description, a system integrator may include, without limitation, any number of aircraft manufacturers and major-system subcontractors; a third party may include, without limitation, any number of vendors, subcontractors, and suppliers; and an operator may be an airline, a leasing company, a military entity, a service organization, and so on.

With reference now to **Figure 18**, an illustration of an aircraft is depicted in the form of a block diagram in which an illustrative embodiment may be implemented. In this example, aircraft **1800** is produced by aircraft manufacturing and service method **1700** in **Figure 17** and may include airframe **1802** with systems **1804** and interior **1806**. Examples of systems **1804** include one or more of propulsion system **1808**, electrical system **1810**, hydraulic system **1812**, and environmental system **1814**. Any number of other systems may be included. Although an aerospace example is shown, different illustrative embodiments may be applied to other industries, such as the automotive industry.

Apparatuses and methods embodied herein may be employed during at least one of the stages of aircraft manufacturing and service method **1700** in **Figure 17**. In particular, fluid

dispensing system **102** from **Figure 1** may be used for dispensing, for example, without limitation, sealant **122**, over various surfaces during any one of the stages of aircraft manufacturing and service method **1700**. For example, without limitation, fluid dispensing system **102** from **Figure 1** may be used for sealing fastener elements installed for aircraft **1800** during at least one of component and subassembly manufacturing **1706**, system integration **1708**, routine maintenance and service **1714**, or some other stage of aircraft manufacturing and service method **1700**.

In one illustrative example, components or subassemblies produced in component and subassembly manufacturing **1706** in **Figure 17** may be fabricated or manufactured in a manner similar to components or subassemblies produced while aircraft **1800** is in service **1712** in **Figure 17**. As yet another example, one or more apparatus embodiments, method embodiments, or a combination thereof may be utilized during production stages, such as component and subassembly manufacturing **1706** and system integration **1708** in **Figure 17**. One or more apparatus embodiments, method embodiments, or a combination thereof may be utilized while aircraft **1800** is in service **1712** and/or during maintenance and service **1714** in **Figure 17**. The use of a number of the different illustrative embodiments may substantially expedite the assembly of and/or reduce the cost of aircraft **1800**.

The flowcharts and block diagrams in the different depicted embodiments illustrate the architecture, functionality, and operation of some possible implementations of apparatuses and methods in an illustrative embodiment. In this regard, each block in the flowcharts or block diagrams may represent a module, a segment, a function, and/or a portion of an operation or step.

In some alternative implementations of an illustrative embodiment, the function or functions noted in the blocks may occur out of the order noted in the figures. For example,

without limitation, in some cases, two blocks shown in succession may be executed substantially concurrently, or the blocks may sometimes be performed in the reverse order, depending upon the functionality involved. Also, other blocks may be added in addition to the illustrated blocks in a flowchart or block diagram.

The description of the different illustrative embodiments has been presented for purposes of illustration and description, and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide different features as compared to other desirable embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.

CLAIMS:

What is claimed is:

1. An apparatus comprising:

a nozzle configured to dispense a fluid onto an interface as the nozzle is moved along the interface to form a fillet; and

a fairing element associated with the nozzle and configured to work an exposed surface of the fillet as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle.

2. The apparatus of claim 1, wherein the fairing element is configured to work the exposed surface of the fillet by fairing the exposed surface such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle moving along the interface while the fluid is being dispensed from the nozzle.

3. The apparatus of claim 2, wherein the fairing element has a curved shape configured to shape the exposed surface of the fillet to have the desired cross-sectional shape as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle.

4. The apparatus of claim 3, wherein the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape.

5. The apparatus of claim 3, wherein the curved shape has a size that is selected based on at least one of a size or a shape of the interface.

6. The apparatus of claim 1, wherein the fairing element is formed by a portion of the nozzle.

7. The apparatus of claim 1 further comprising:
a structure configured for association with the nozzle and a fluid source such that the nozzle is configured to receive the fluid from the fluid source through the structure.

8. The apparatus of claim 7, wherein the nozzle is formed as part of the structure.

9. The apparatus of claim 7, wherein the nozzle is separate from the structure and configured for attachment to the structure.

10. The apparatus of claim 7, wherein the nozzle is at least one of attachable to and detachable from the structure.

11. The apparatus of claim 7 further comprising:
a biasing element associated with at least one of the structure and the nozzle in which the biasing element allows the nozzle to move relative to the structure in a direction along a center axis of the structure such that an end of the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

12. The apparatus of claim 1, wherein the nozzle comprises:
a fluid chamber located between an opening in the nozzle through which the fluid is dispensed and an end of a structure in which the fluid chamber creates a fluid pressure that allows the fluid in the fluid chamber to function as a biasing element.

13. The apparatus of claim 1, wherein the fairing element is at least one of attachable to and detachable from the nozzle.

14. The apparatus of claim 1, wherein the nozzle comprises:

an opening through which the fluid is dispensed.

15. The apparatus of claim 14, wherein the opening has a position that is one of on-center and off-center relative to a center axis of a structure.

16. The apparatus of claim 1, wherein the fluid is selected from one of a sealant, caulk, and an adhesive.

17. The apparatus of claim 1, wherein the interface is an interior corner.

18. A fluid dispensing system comprising:

a structure configured for association with a fluid source;

a nozzle associated with the structure and configured to receive a fluid from the fluid source through the structure in which the nozzle is configured to dispense the fluid onto an interface through an opening in the nozzle as the nozzle is moved along the interface to form a fillet at the interface in which the opening has a position that is one of on-center and off-center relative to a center axis of the structure; and

a fairing element associated with the nozzle and configured to fair an exposed surface of the fillet such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle in which the fairing element has a curved shape configured to shape the exposed surface of the fillet to have the desired cross-sectional shape as the nozzle is moved along the interface and the fluid is being dispensed from the nozzle in which the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape and in

which the curved shape has a size selected based on at least one of a size or a shape of the interface.

19. A method for forming and shaping a fillet at an interface, the method comprising:

dispensing a fluid from a nozzle onto the interface as the nozzle is moved along the interface to form the fillet; and

working an exposed surface of the fillet using a fairing element associated with the nozzle as the nozzle is moved along the interface and the fluid is dispensed from the nozzle.

20. The method of claim 19, wherein working the exposed surface of the fillet comprises:

fairing the exposed surface of the fillet using a curved shape of the fairing element such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in a single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle.

21. The method of claim 20, wherein fairing the exposed surface of the fillet comprises:

fairing the exposed surface of the fillet using the curved shape of the fairing element such that the cross-sectional shape of the exposed surface takes on the desired cross-sectional shape in the single pass of the nozzle being moved along the interface while the fluid is being dispensed from the nozzle, wherein the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape.

22. The method of claim 19 further comprising:

controlling at least one of a rate or an amount of the fluid being dispensed out of the nozzle such that the fairing

element is able to work the exposed surface of the fillet to have a desired cross-sectional shape.

23. The method of claim 19 further comprising:

receiving the fluid within the nozzle from a fluid source through a structure with which the nozzle is associated.

24. The method of claim 23 further comprising:

moving the nozzle relative to the structure in a direction along a center axis of the structure as the nozzle is moved along the interface such that the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

25. The method of claim 24, wherein moving the nozzle relative to the structure in the direction along the center axis of the structure comprises:

moving the nozzle relative to the structure in the direction along the center axis of the structure using a biasing element associated with at least one of the structure and the nozzle.

26. The method of claim 24, wherein moving the nozzle relative to the structure in the direction along the center axis of the structure comprises:

moving the nozzle relative to the structure in the direction along the center axis of the structure using a fluid pressure created by a fluid chamber located between an opening in the nozzle through which the fluid is dispensed and an end of the structure.

27. The method of claim 19, wherein dispensing the fluid from the nozzle comprises:

dispensing the fluid through an opening in the nozzle onto the interface while the nozzle is being moved along the interface to form the fillet.

28. The method of claim 27, wherein dispensing the fluid through the opening in the nozzle comprises:

dispensing the fluid through the opening in the nozzle onto the interface as the nozzle is moved along the interface to form the fillet, wherein the opening has a position that is one of on-center and off-center relative to a center axis of a structure.

29. A method for concurrently forming and shaping a fillet at an interface, the method comprising:

receiving a fluid within a nozzle from a fluid source through a structure with which the nozzle is associated;

moving the nozzle along the interface;

dispensing the fluid through an opening in the nozzle onto the interface as the nozzle is being moved along the interface to form the fillet;

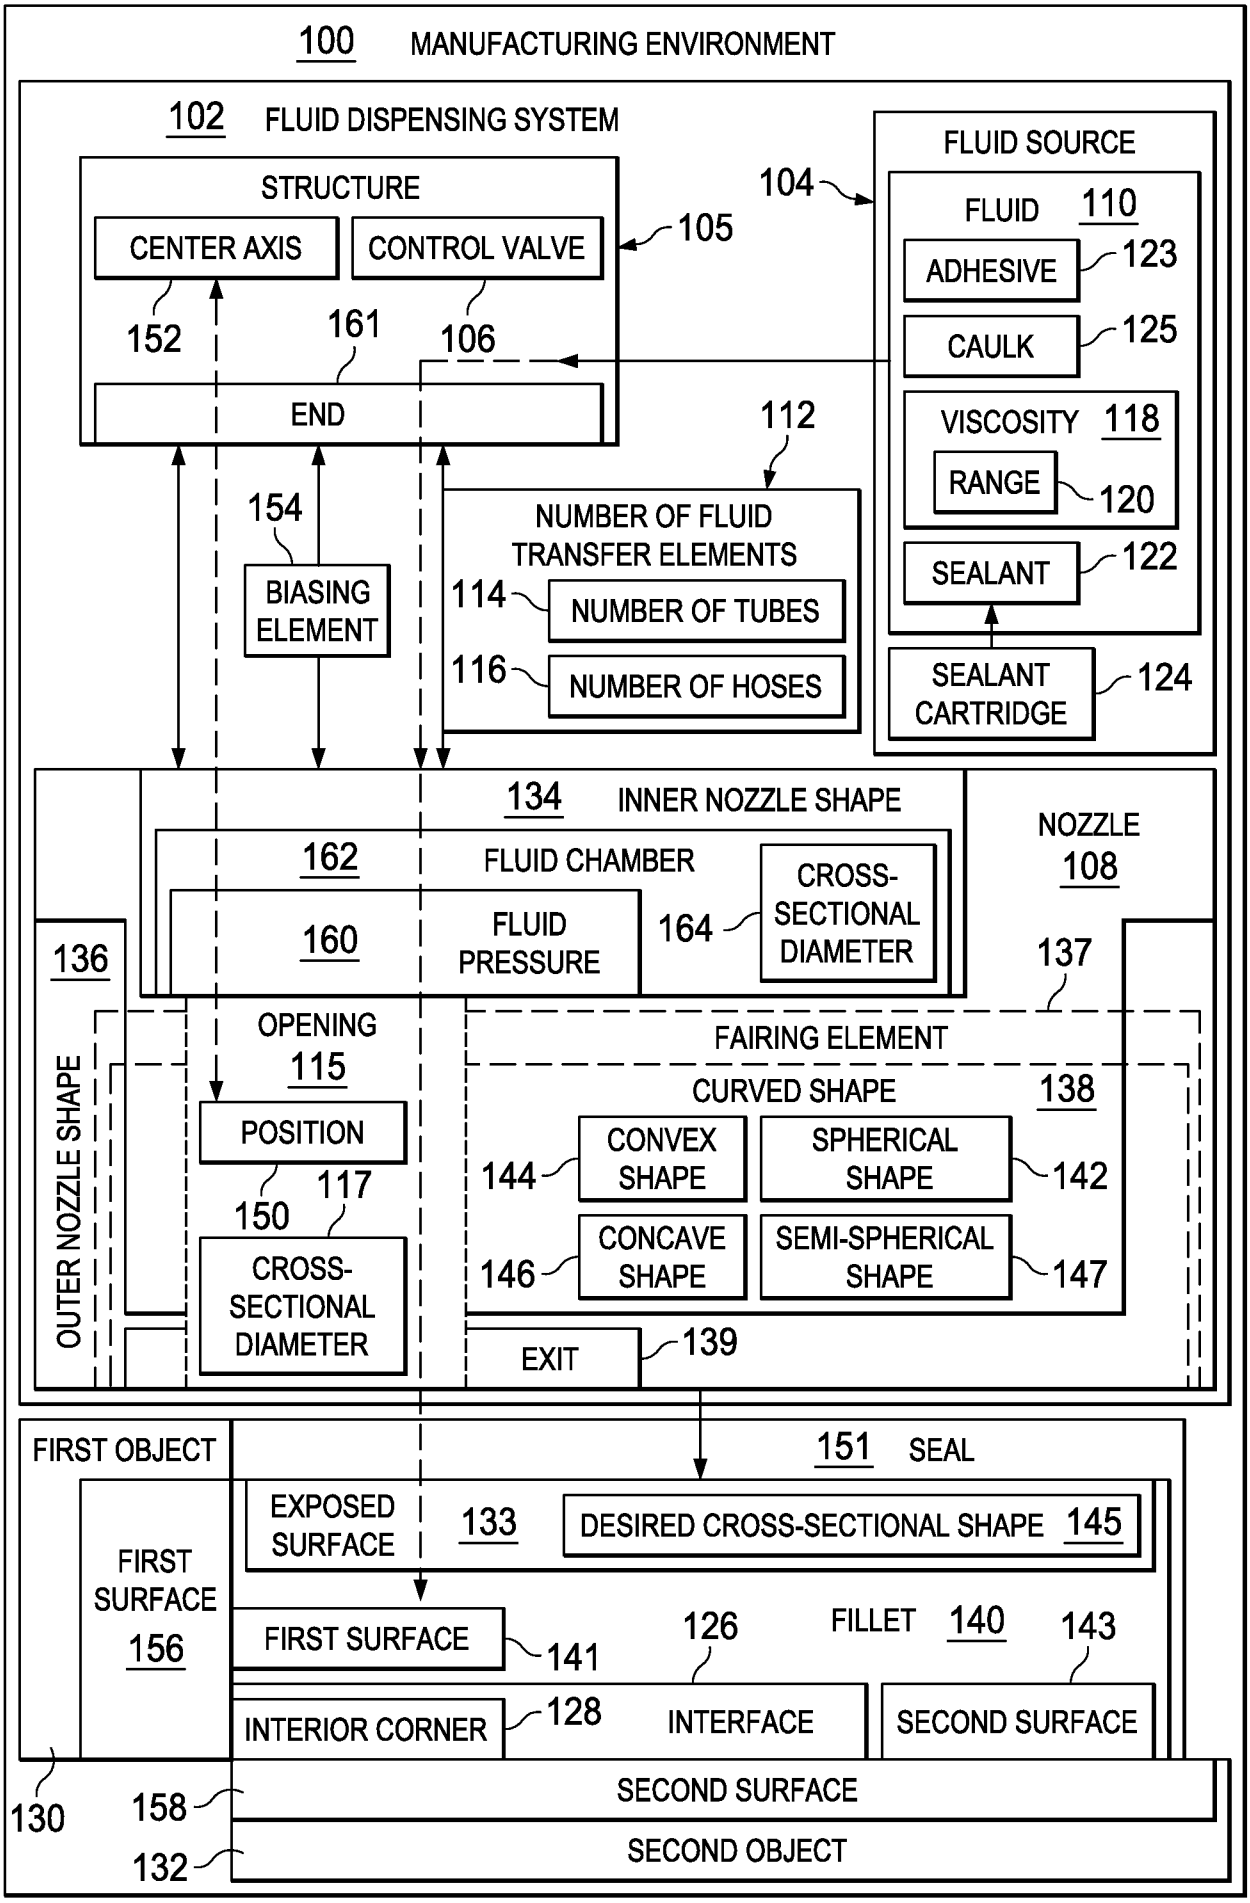
fairing an exposed surface of the fillet using a curved shape of a fairing element associated with the nozzle as the nozzle is being moved along the interface and the fluid is being dispensed from the nozzle in a single pass such that a cross-sectional shape of the exposed surface takes on a desired cross-sectional shape in which the curved shape comprises at least one of a spherical shape, a convex shape, a concave shape, and a semi-spherical shape;

controlling at least one of a rate or an amount of the fluid being dispensed out of the nozzle such that the fairing element is able to work the exposed surface of the fillet to have the desired cross-sectional shape;

and

moving the nozzle relative to the structure in a direction along a center axis of the structure as the nozzle is moved along the interface using one of a biasing element and a fluid pressure created by a fluid chamber located between the opening in the nozzle and an end of the structure such that the nozzle maintains contact with the exposed surface of the fillet as the nozzle is moved along the interface.

FIG. 1


100 MANUFACTURING ENVIRONMENT
102 FLUID DISPENSING SYSTEM
STRUCTURE
CENTER AXIS
CONTROL VALVE
105
152
161
106
END
FLUID SOURCE
104
FLUID 110
ADHESIVE 123
CAULK 125
VISCOSITY 118
RANGE 120
SEALANT 122
SEALANT CARTRIDGE 124
112
NUMBER OF FLUID TRANSFER ELEMENTS
114 NUMBER OF TUBES
116 NUMBER OF HOSES
154
BIASING ELEMENT
134 INNER NOZZLE SHAPE
NOZZLE 108
162 FLUID CHAMBER
160 FLUID PRESSURE
164 CROSS-SECTIONAL DIAMETER
136
137
OUTER NOZZLE SHAPE
OPENING 115
POSITION
150
117
CROSS-SECTIONAL DIAMETER
FAIRING ELEMENT
CURVED SHAPE 138
144 CONVEX SHAPE
SPHERICAL SHAPE 142
146 CONCAVE SHAPE
SEMI-SPHERICAL SHAPE 147
EXIT 139
FIRST OBJECT
151 SEAL
EXPOSED SURFACE 133
DESIRED CROSS-SECTIONAL SHAPE 145
FIRST SURFACE 156
FIRST SURFACE 141
126
FILLET 140
143
INTERIOR CORNER 128
INTERFACE
SECOND SURFACE
130
158
SECOND SURFACE
132
SECOND OBJECT

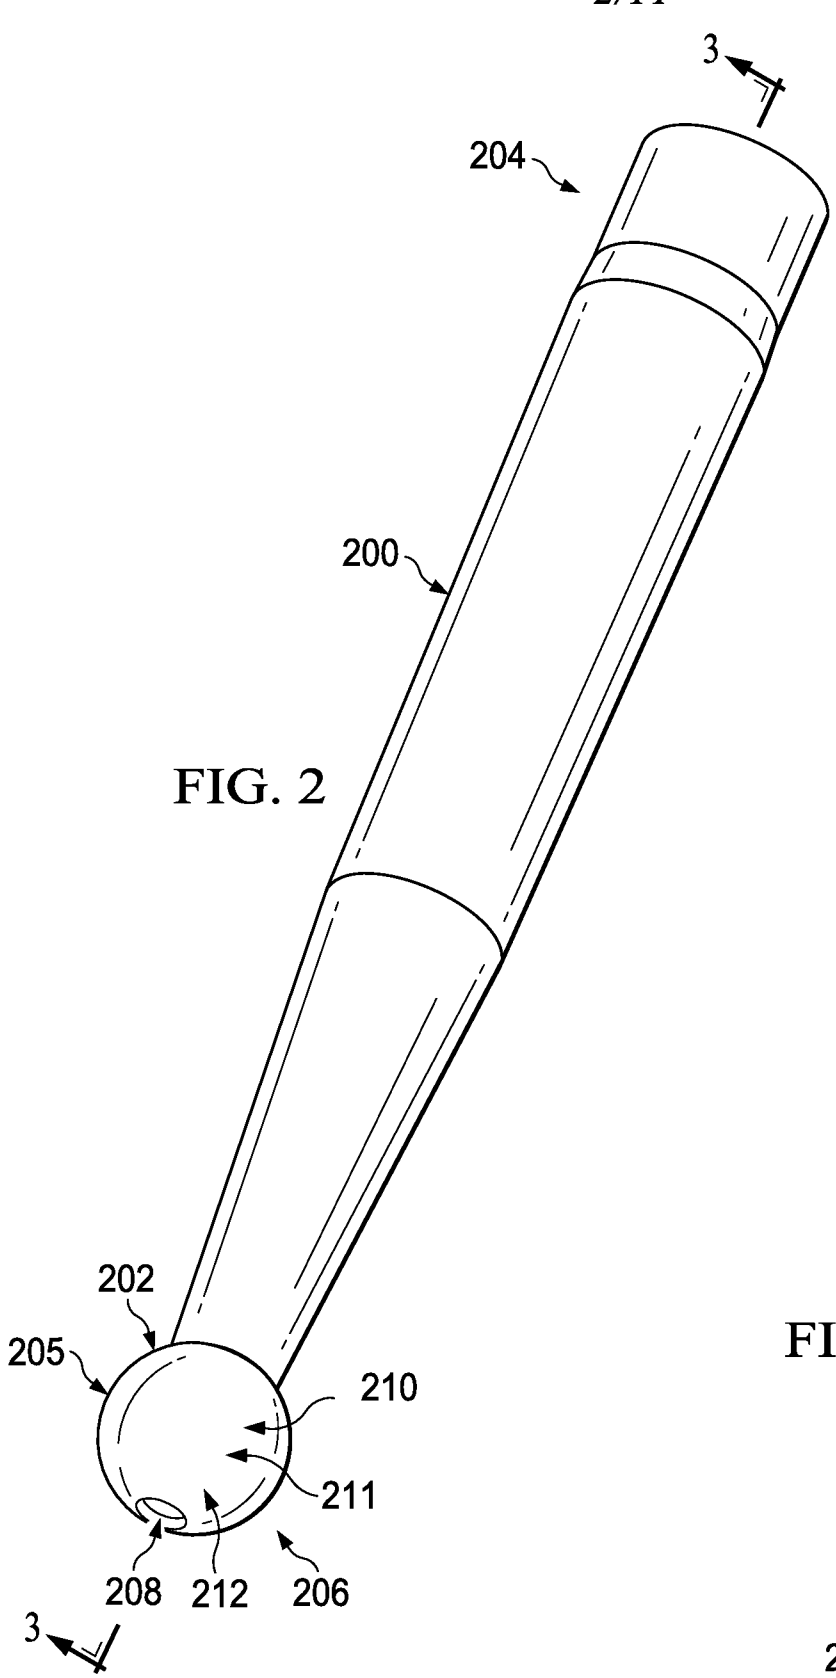

3
204
200
202
205
210
211
208
212
206
3

FIG. 2

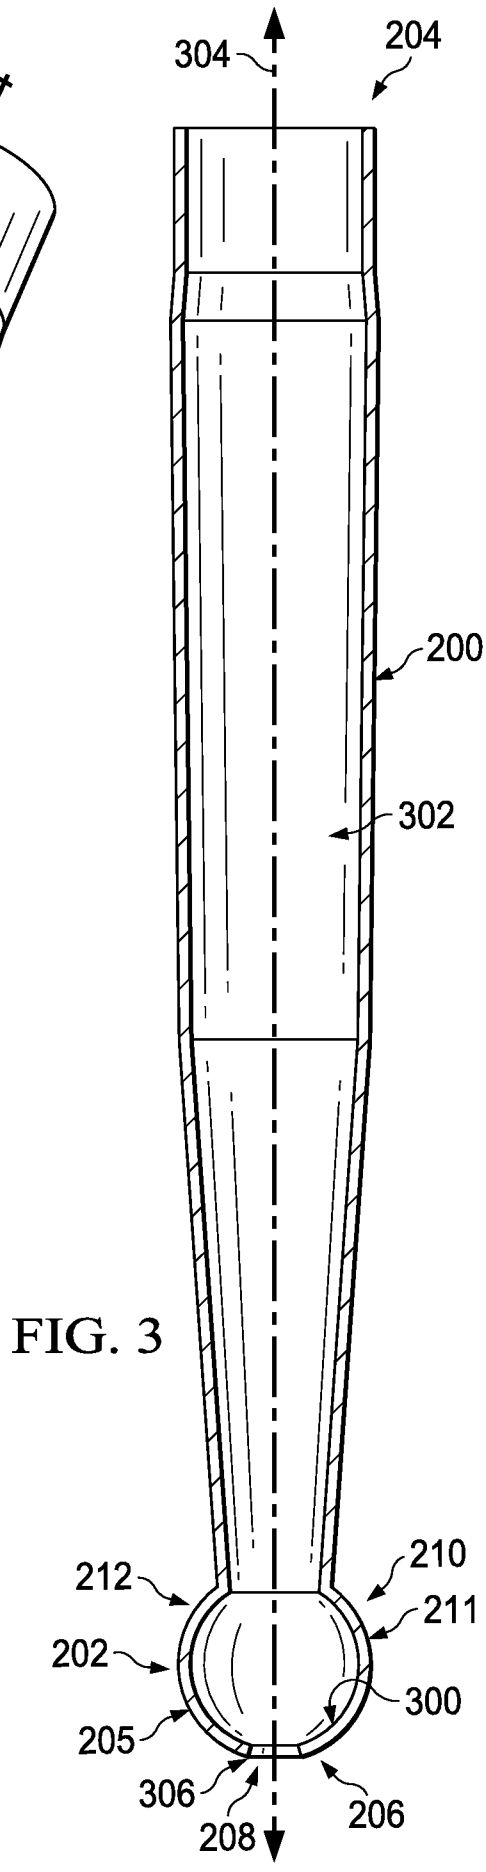

304
204
200
302
212
210
211
202
300
205
306
208
206

FIG. 3

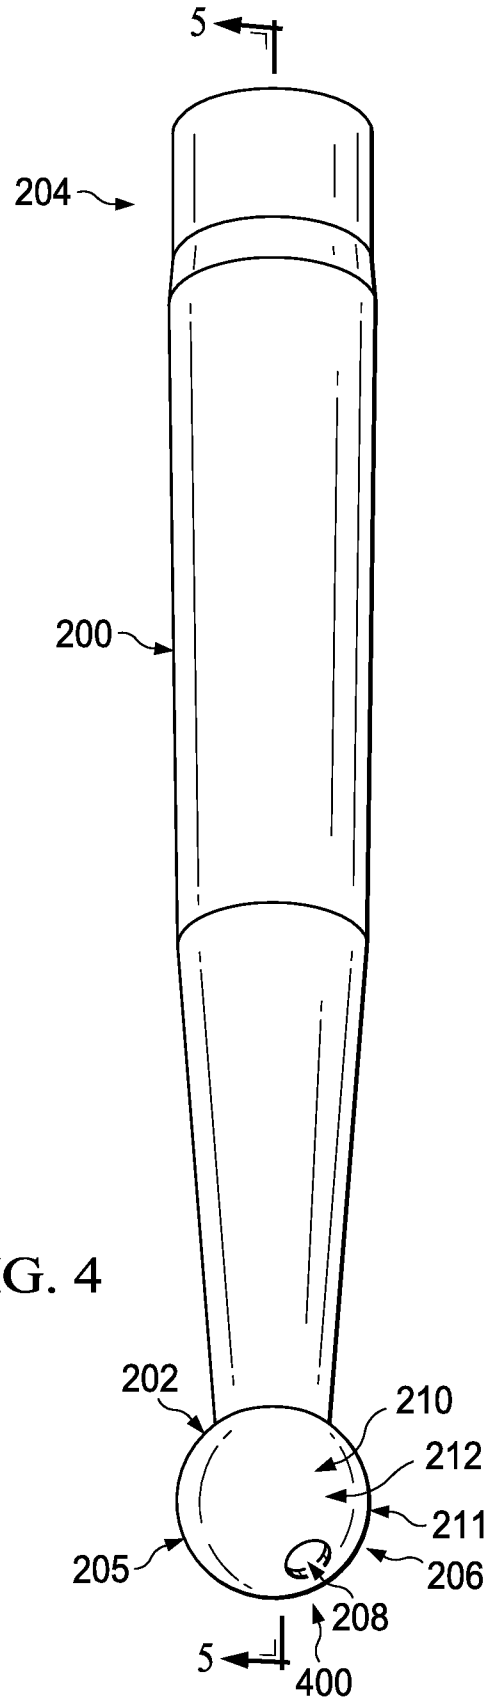

5
204
200
202
210
212
211
205
206
208
5
400

FIG. 4

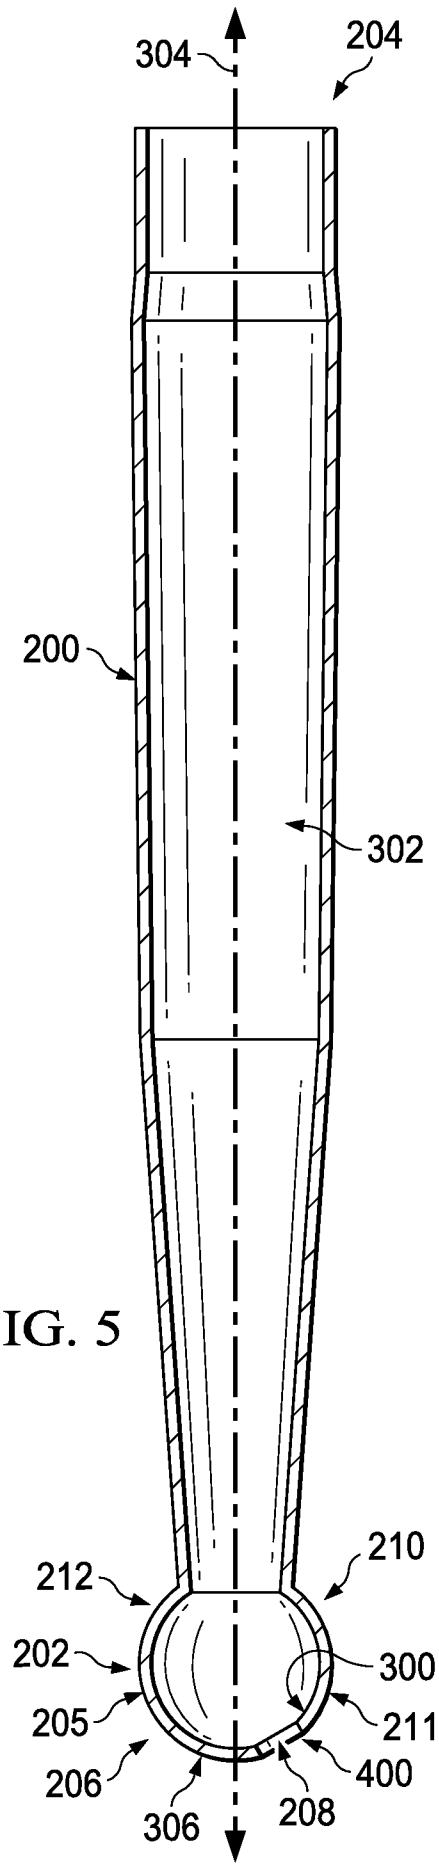

304
204
200
302
210
212
202
300
205
211
206
400
306
208

FIG. 5

FIG. 6

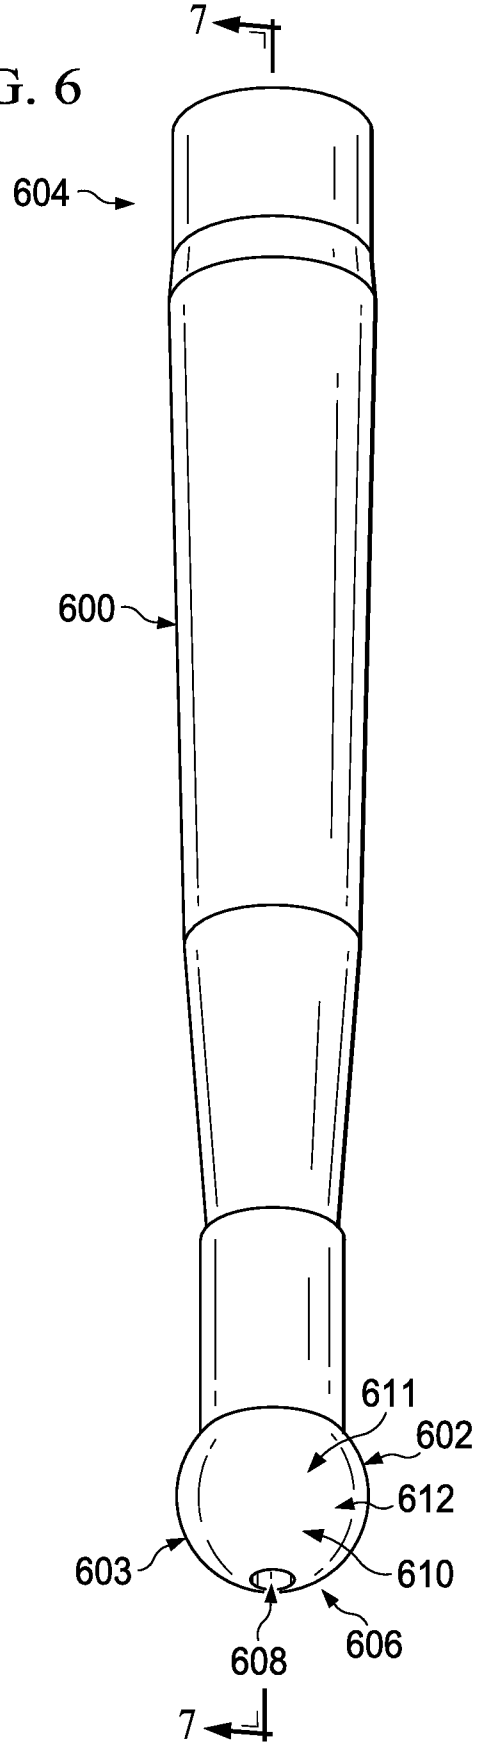

7
604
600
611
602
612
603
610
606
608
7

FIG. 7

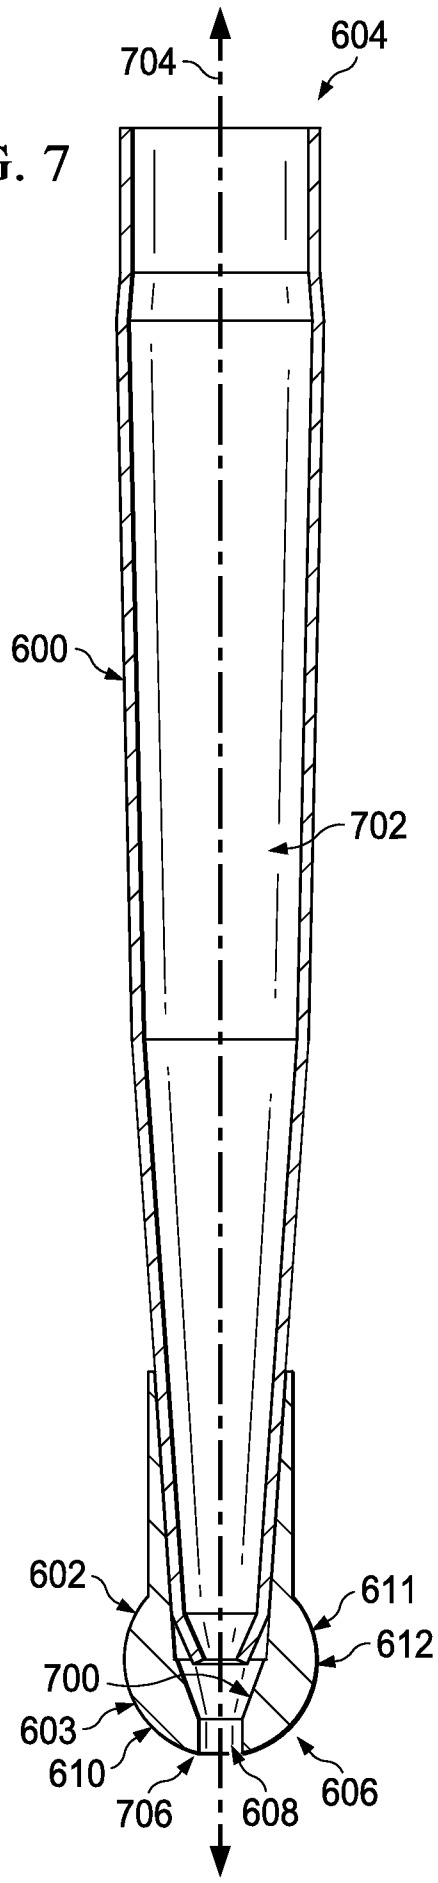

704
604
600
702
602
611
612
700
603
610
706
608
606

FIG. 8

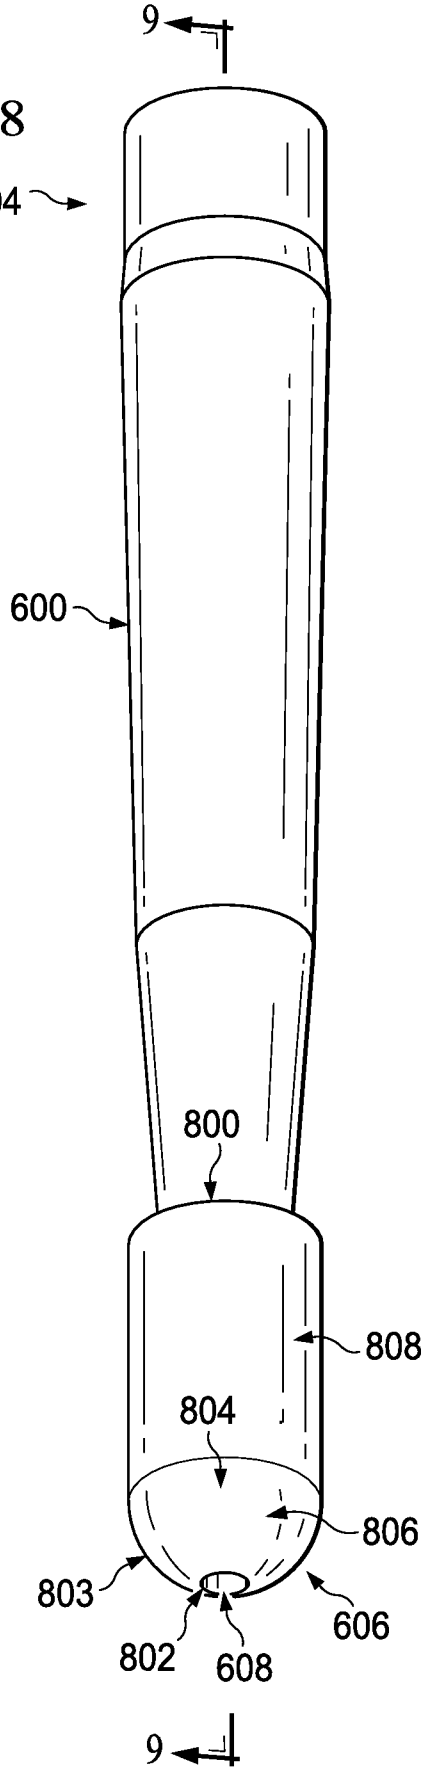

9
604
600
800
808
804
806
803
606
802
608
9

FIG. 9

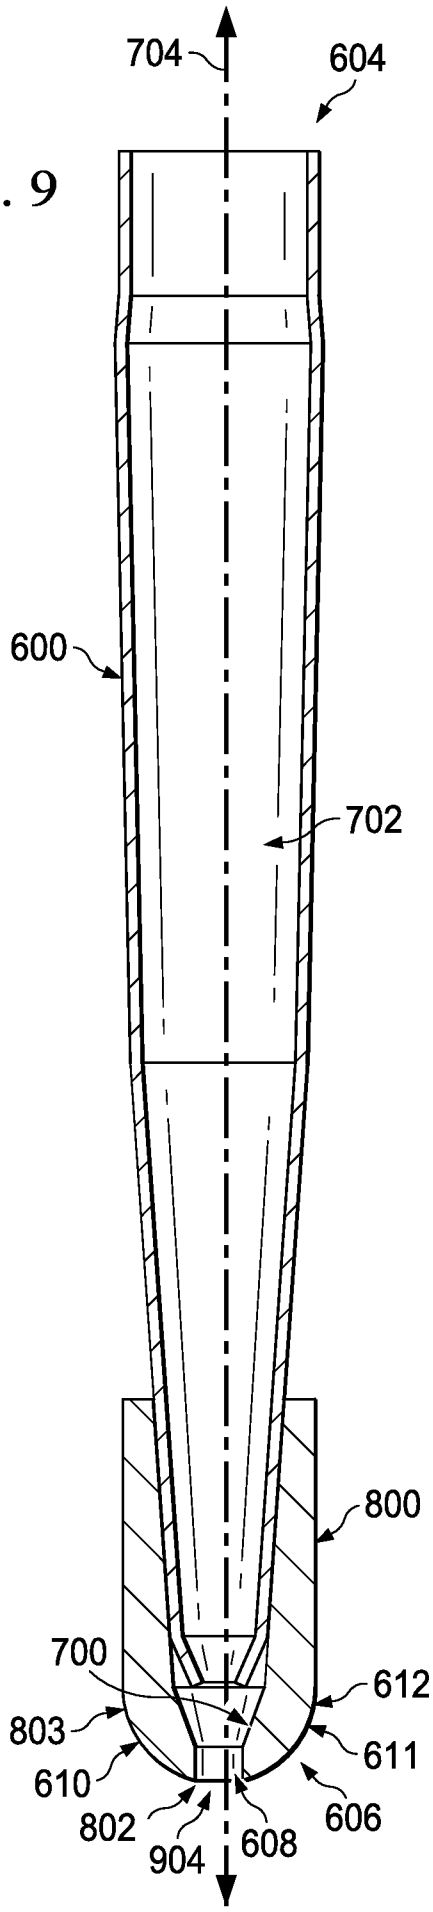

704
604
600
702
800
700
612
803
611
610
606
802
904
608

FIG. 10

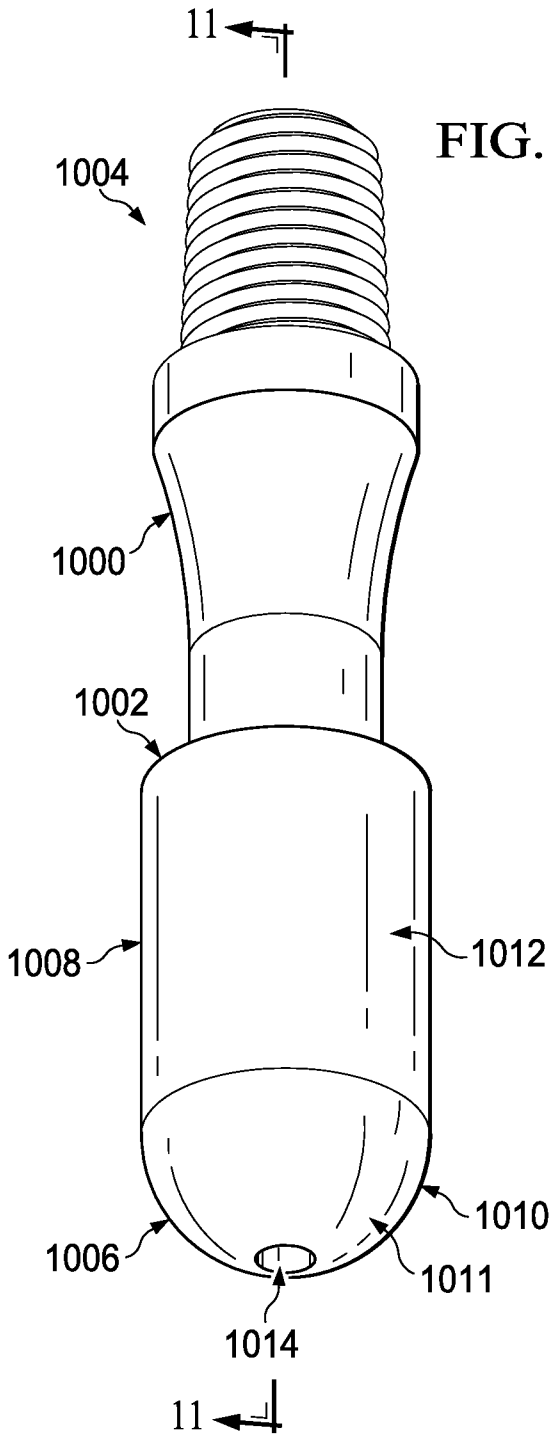
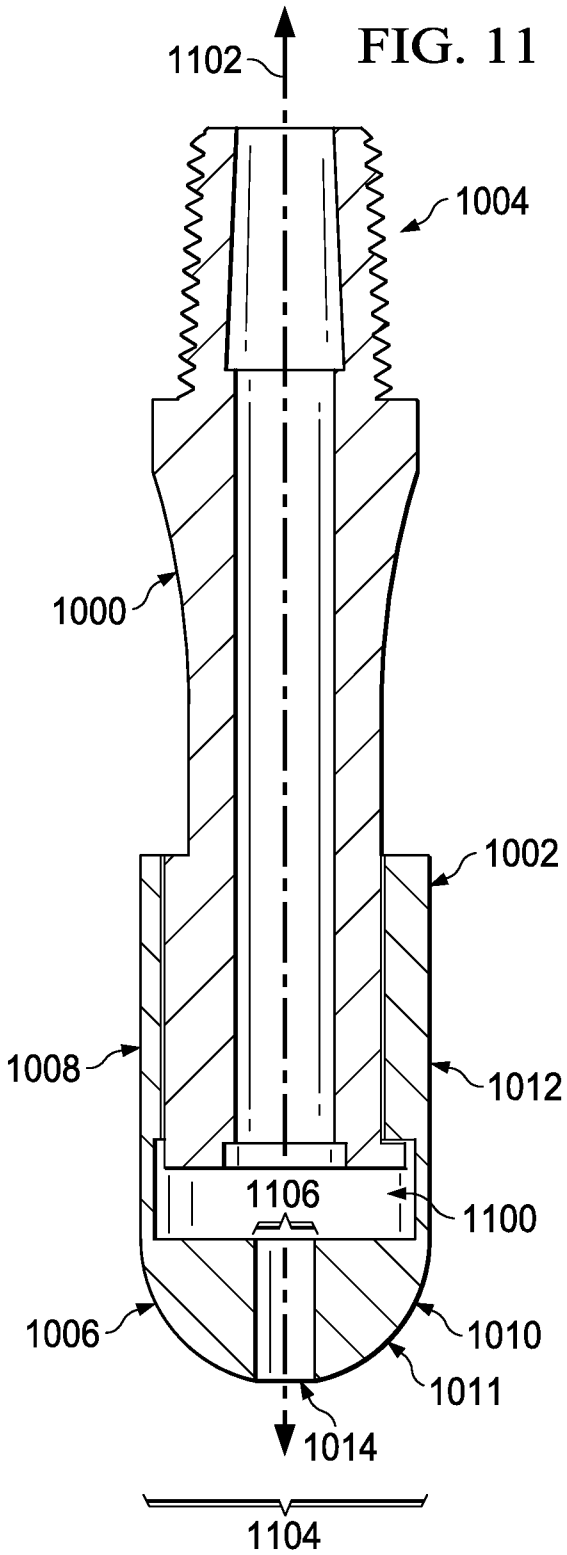

11
1004
1000
1002
1008
1012
1010
1006
1011
1014
11

FIG. 11


1102
1004
1000
1002
1008
1012
1106
1100
1006
1010
1011
1014
1104

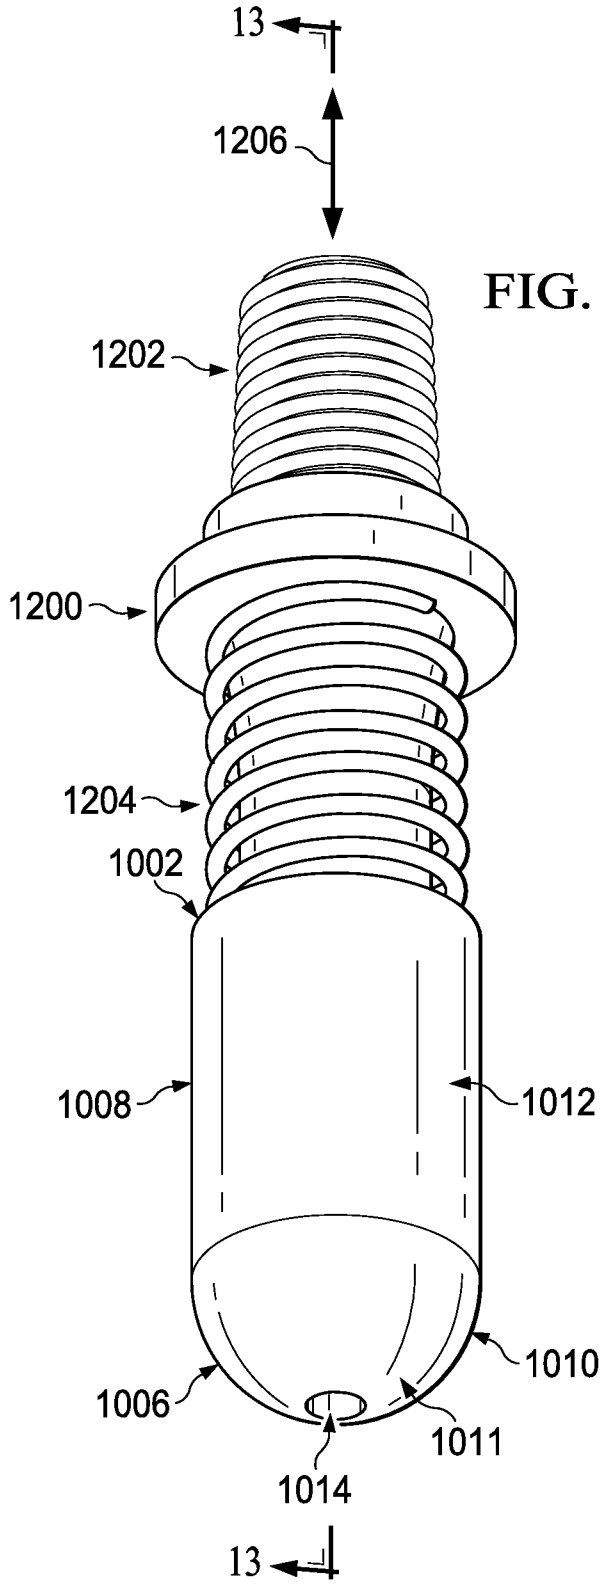

13
1206
1202
1200
1204
1002
1008
1012
1010
1006
1011
1014
13

FIG. 12

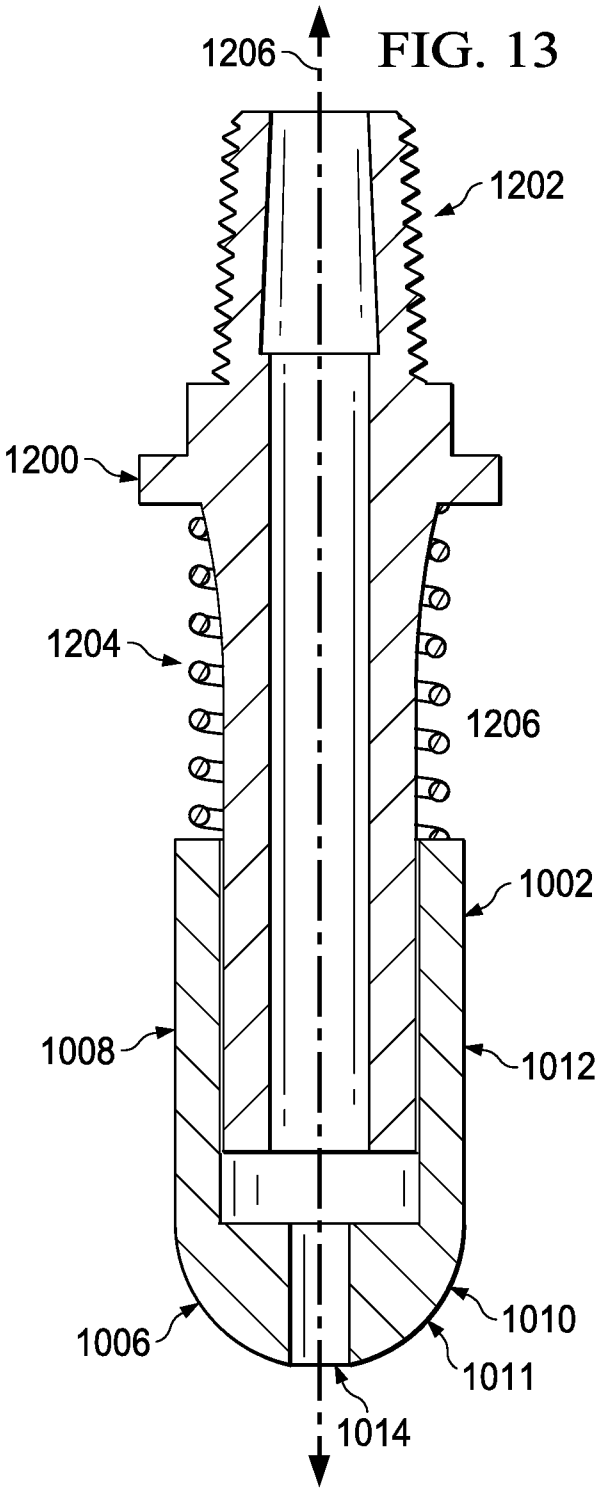

1206
1202
1200
1204
1206
1002
1008
1012
1010
1006
1011
1014

FIG. 13

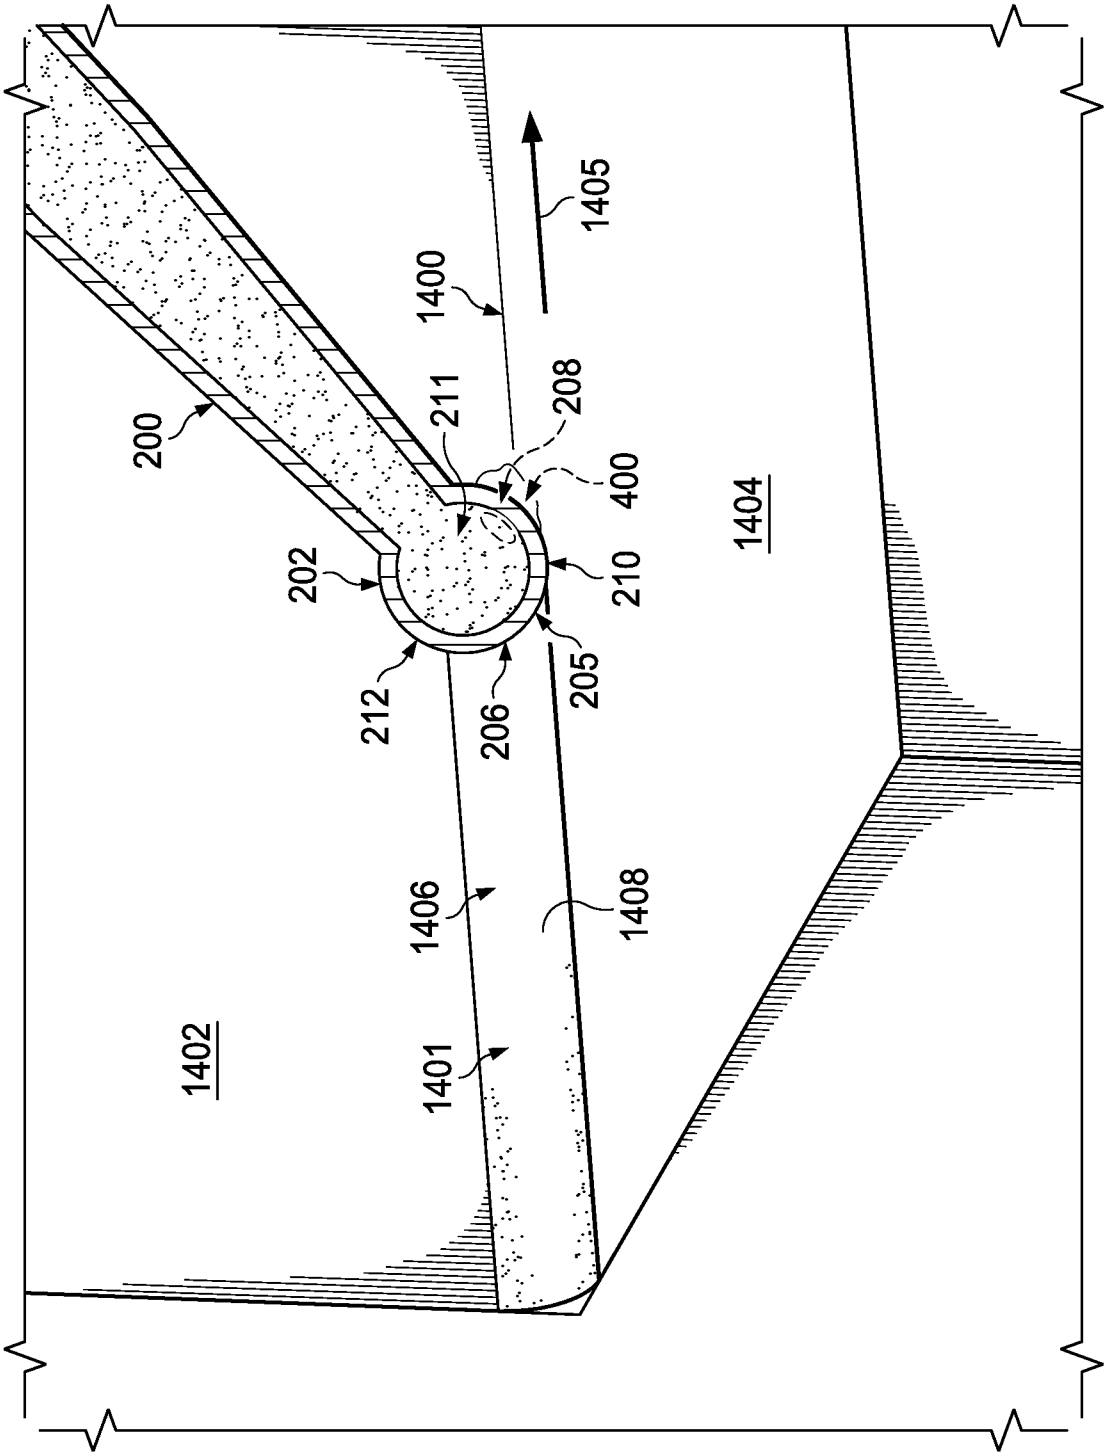

1405
1400
200
211
208
400
202
210
212
206
205
1404
1406
1408
1402
1401

FIG. 14

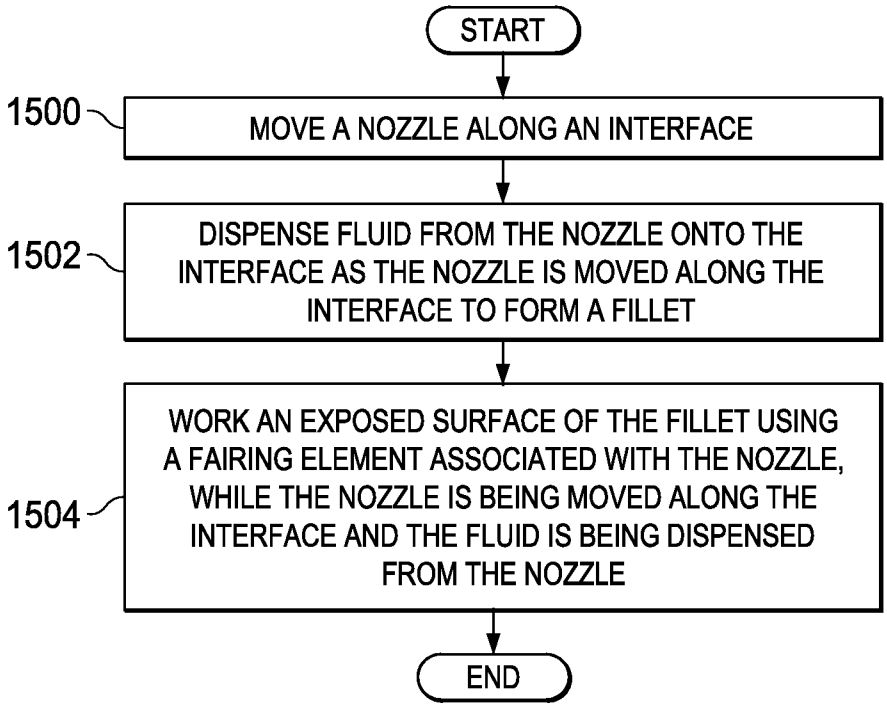

START
1500
MOVE A NOZZLE ALONG AN INTERFACE
1502
DISPENSE FLUID FROM THE NOZZLE ONTO THE INTERFACE AS THE NOZZLE IS MOVED ALONG THE INTERFACE TO FORM A FILLET
1504
WORK AN EXPOSED SURFACE OF THE FILLET USING A FAIRING ELEMENT ASSOCIATED WITH THE NOZZLE, WHILE THE NOZZLE IS BEING MOVED ALONG THE INTERFACE AND THE FLUID IS BEING DISPENSED FROM THE NOZZLE
END

FIG. 15

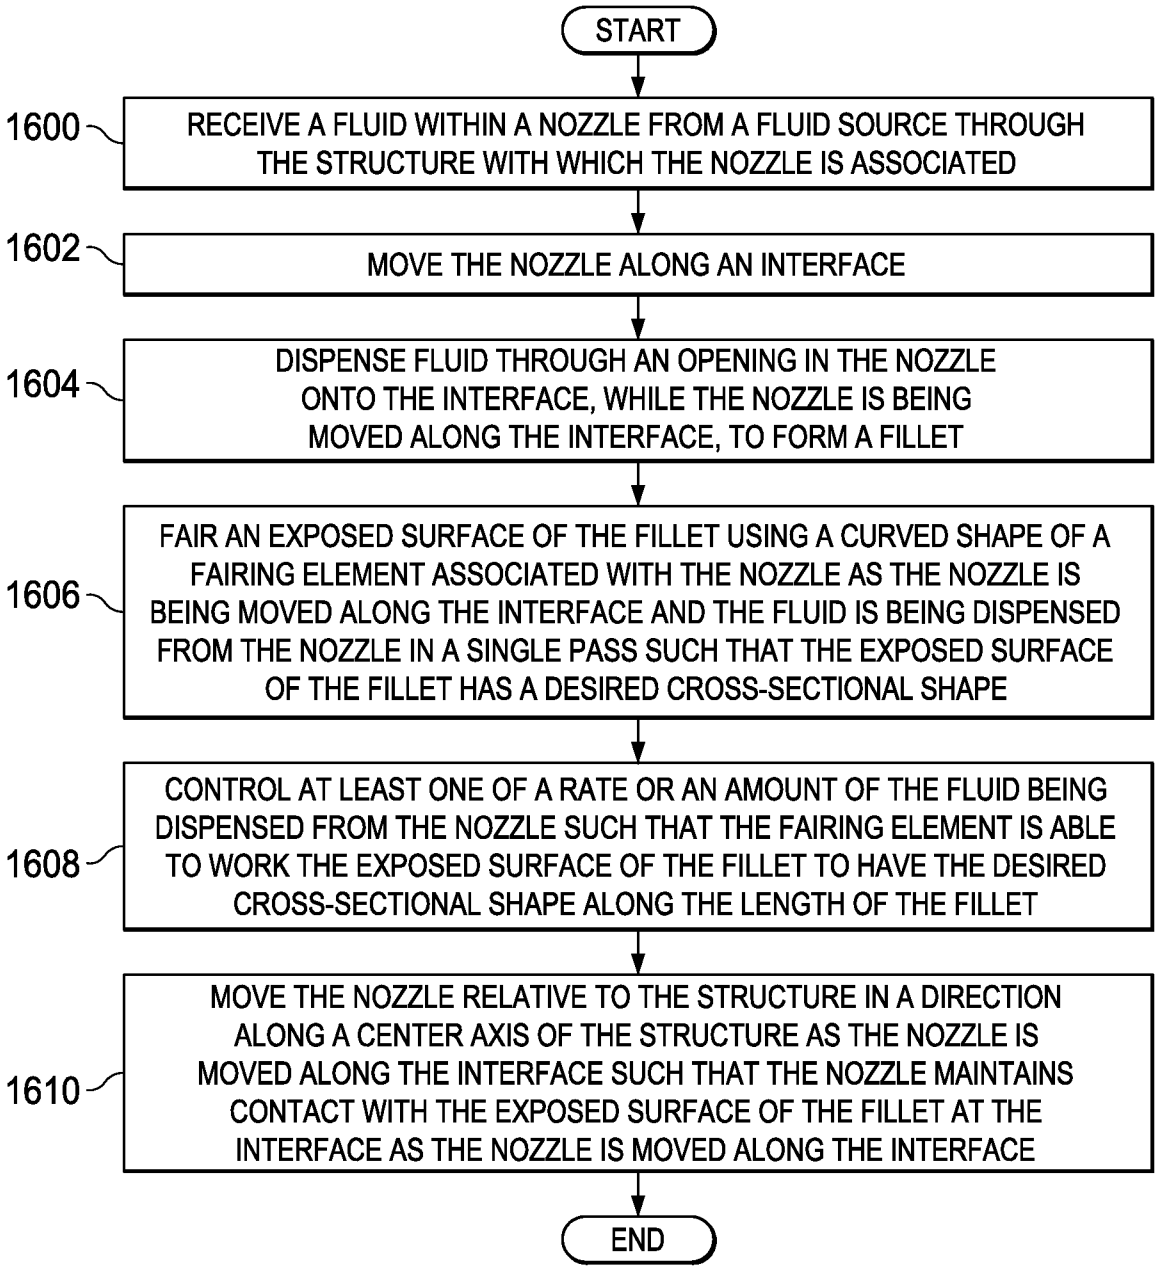

START
1600
RECEIVE A FLUID WITHIN A NOZZLE FROM A FLUID SOURCE THROUGH THE STRUCTURE WITH WHICH THE NOZZLE IS ASSOCIATED
1602
MOVE THE NOZZLE ALONG AN INTERFACE
1604
DISPENSE FLUID THROUGH AN OPENING IN THE NOZZLE ONTO THE INTERFACE, WHILE THE NOZZLE IS BEING MOVED ALONG THE INTERFACE, TO FORM A FILLET
1606
FAIR AN EXPOSED SURFACE OF THE FILLET USING A CURVED SHAPE OF A FAIRING ELEMENT ASSOCIATED WITH THE NOZZLE AS THE NOZZLE IS BEING MOVED ALONG THE INTERFACE AND THE FLUID IS BEING DISPENSED FROM THE NOZZLE IN A SINGLE PASS SUCH THAT THE EXPOSED SURFACE OF THE FILLET HAS A DESIRED CROSS-SECTIONAL SHAPE
1608
CONTROL AT LEAST ONE OF A RATE OR AN AMOUNT OF THE FLUID BEING DISPENSED FROM THE NOZZLE SUCH THAT THE FAIRING ELEMENT IS ABLE TO WORK THE EXPOSED SURFACE OF THE FILLET TO HAVE THE DESIRED CROSS-SECTIONAL SHAPE ALONG THE LENGTH OF THE FILLET
1610
MOVE THE NOZZLE RELATIVE TO THE STRUCTURE IN A DIRECTION ALONG A CENTER AXIS OF THE STRUCTURE AS THE NOZZLE IS MOVED ALONG THE INTERFACE SUCH THAT THE NOZZLE MAINTAINS CONTACT WITH THE EXPOSED SURFACE OF THE FILLET AT THE INTERFACE AS THE NOZZLE IS MOVED ALONG THE INTERFACE
END

FIG. 16

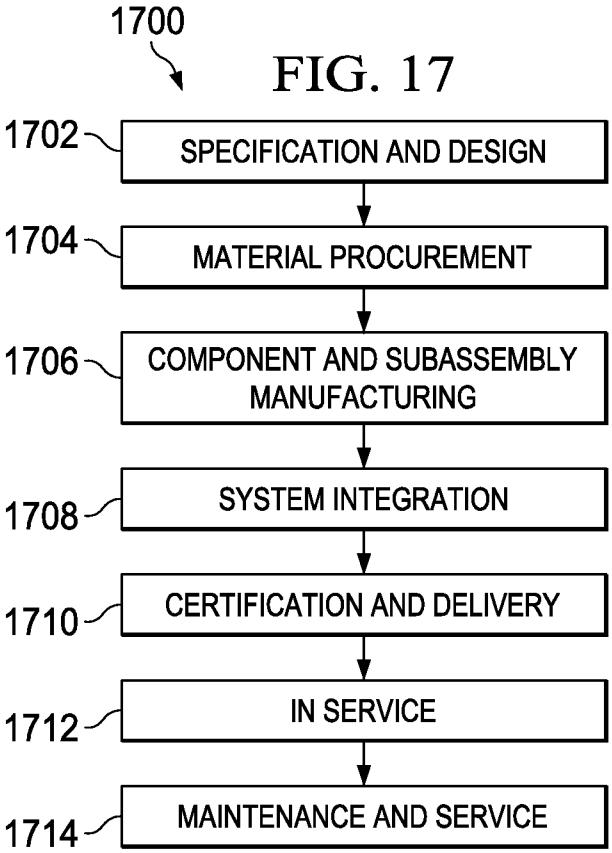

1700
1702
SPECIFICATION AND DESIGN
1704
MATERIAL PROCUREMENT
1706
COMPONENT AND SUBASSEMBLY MANUFACTURING
1708
SYSTEM INTEGRATION
1710
CERTIFICATION AND DELIVERY
1712
IN SERVICE
1714
MAINTENANCE AND SERVICE

FIG. 17

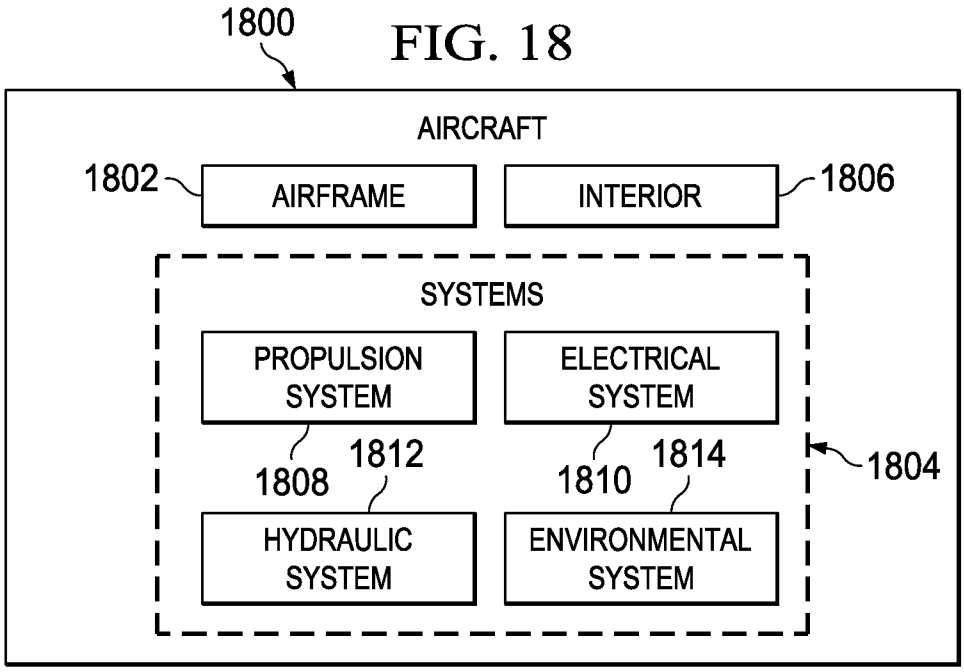

1800
AIRCRAFT
1802
AIRFRAME
INTERIOR
1806
SYSTEMS
PROPULSION SYSTEM
ELECTRICAL SYSTEM
1808
1812
1810
1814
1804
HYDRAULIC SYSTEM
ENVIRONMENTAL SYSTEM

FIG. 18

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/045018

A. CLASSIFICATION OF SUBJECT MATTER
INV. B05C17/005 E04F21/165
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B05C E04F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/093494 A1 (ILLINOIS TOOL WORKS [US]; MCMAHON MICHAEL J [US]; PIOTROWSKI STANLEY [) 19 August 2010 (2010-08-19) paragraph [0013] - paragraph [0016]; figure 17	1-11,18, 19,29
X	US 5 346 380 A (ABLES JAMES T [US]) 13 September 1994 (1994-09-13) column 2, line 1 - column 3, line 68; figure 5	1-11,18, 19,29
X	US 2 824 443 A (AMES ROBERT G) 25 February 1958 (1958-02-25) abstract; figure 3	1-11,18, 19,29
X	US 4 570 834 A (WARD DAVID J [GB]) 18 February 1986 (1986-02-18) abstract; figure 1	1,2,19

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
8 October 2014	15/10/2014

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Eberwein, Michael

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/045018

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 017 113 A (HEATON DONALD E [CA] ET AL) 21 May 1991 (1991-05-21) abstract; figure 4 -----	1,2,19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/US2014/045018

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010093494 A1	19-08-2010	EP 2396236 A1	21-12-2011
		NZ 594460 A	30-08-2013
		WO 2010093494 A1	19-08-2010
US 5346380 A	13-09-1994	NONE	
US 2824443 A	25-02-1958	NONE	
US 4570834 A	18-02-1986	AU 554768 B2	04-09-1986
		AU 1924983 A	29-03-1984
		DE 3368575 D1	05-02-1987
		DK 431583 A	24-03-1984
		EP 0106387 A1	25-04-1984
		ES 283167 U	01-02-1986
		FI 833331 A	24-03-1984
		GR 81264 A1	11-12-1984
		NO 833418 A	26-03-1984
		PT 77369 A	01-10-1983
		US 4570834 A	18-02-1986
US 5017113 A	21-05-1991	NONE	