



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
07.09.2011 Bulletin 2011/36

(51) Int Cl.:
E04G 21/32 (2006.01)

(21) Application number: **11425044.2**

(22) Date of filing: **23.02.2011**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **De Rossi, Agostino**
55049 Viareggio (Lucca) (IT)
• **Marianelli, Andrea**
Spianate Altopascio (Lucca) (IT)


(30) Priority: **26.02.2010 IT RM20100079**

(74) Representative: **Sneider, Massimo et al**
Lenzi & C.
Via Lucania, 13
00187 Roma (IT)

(71) Applicant: **CPL security Srl**
54100 Massa (IT)

(54) **Anchoring device for anti-fall systems, particularly suitable for metal covers**

(57) The present invention relates to improvements for anti-fall devices that can be directly anchored to metallic covering coat and that in case of fall provide for spreading stresses on the covering coat preventing its damage at the anchoring point; particularly, the improvements relate to the anchoring plate of the device to the cover, and the vertical elements (9,14) supporting the

anchoring cable which in case of fall can flatten and bring themselves in the same direction of the fall. This is achieved by enabling a rotation of the elements (9,14) transmitting the stress from the safety line to the metallic covering, both about a vertical and a horizontal axis 

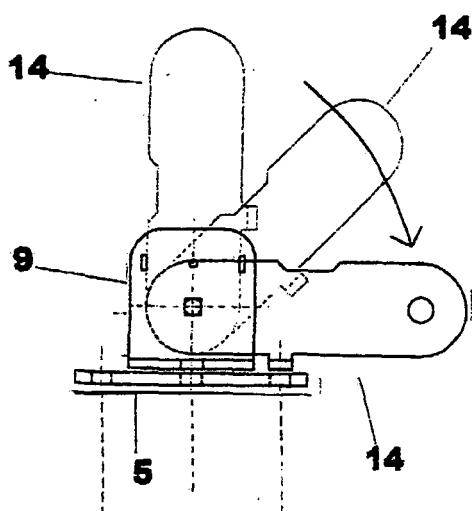


FIG.8

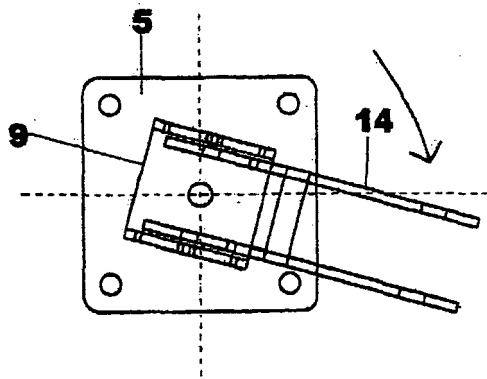


FIG.9

DescriptionSTATE OF THE ART

[0001] The present invention relates to improvements for anti-fall devices that can be directly anchored to a metallic covering coat of buildings and that in case of fall provide for spreading stresses on the covering coat preventing its damage at the point of the covering coat where the device is anchored.

[0002] Technological evolution and development of materials, together with arising needs prescribed by building regulations, are progressively asserting the use of metallic-type covering coats in the field of building construction and architecture, with an expansion of types and product range.

[0003] The use of metallic-type covering coats is also asserting in the field of restructuring and in renewal of existing buildings, in which there is a need for replacing the fiber cement-type covering coats, which usually contain asbestos, with new metallic-type covering coats.

[0004] Metallic-type covering coats are offered on the market in different materials, such as: sheet steel, aluminum, copper, specific alloys, with a wider expansion of iron and aluminum sheets.

[0005] The offered shapes too are different for ribbing, fixing method, junctions and exposures with single, double, coupled sheets with insulating or waterproofing materials.

[0006] The result is a wide range designed to meet a variety of needs arising from time to time.

[0007] This type of covers suitable for a variety of constructions has the advantage of lightness, so it is often used on lightweight, prefabricated structures and structures characterized by large bearing distances, typical of non-residential premises in particular for industrial use.

[0008] The installation of the anchoring devices on coats, to be used for subsequent accesses to the coat itself, presents considerable difficulties in presence of metallic-type coats.

[0009] On one hand because of the need for piercing metallic elements for the transition and anchoring of the vertical components of the anchoring devices and then for sealing the remaining spaces by means of dry usable products; on the other hand, because of the impossibility to directly bind the "ordinary" anchoring devices on metallic covering panels.

[0010] In fact, the stresses induced by the supporting devices and hence the covering panel against the possible fall of operators are important, with significant effort of the hook and the panel, thus irremediably damaged, resulting in a lack of or insufficient retention of the fall.

[0011] In the art the following patents are known:

WO 02/43809 A1, WO 03 039680 A1, AT 500 5522 A1, DE 39 23 691 C1.

Summary of the invention

[0012] These patents describe devices for protection against falls from height, none of which however can reduce the stresses transmitted during the fall to the anchoring systems and thereby to the cover of the building.

[0013] It is an object of the present patent to provide devices able to remedy the problems mentioned above.

[0014] According to the present patent, anchoring devices for anti-fall systems particularly suitable for metal covers comprise:

two end poles;
a large number of intermediate poles in relation to the extension of the cover surface;
a large number of corner poles in relation to the extension of the cover surface;
a fixing plate of each pole to the cover;
a steel cable of the line;
an energy dissipator;
a turnbuckle and accessory components of the cable fixing.

[0015] It is a first object of the present invention to realize a steel plate fixing the pole capable to offer a high resistance to tearing if operator falls.

[0016] It is a second object of the present invention to realize a pole, or rather an element capable to support the pole, to which the devices for workers' safety are fastened, capable to orient itself in accordance with the falling line of operator by rotating about its vertical axis, and moving from a vertical position to a position parallel with the falling line of operator.

[0017] The first object is achieved by realizing a shaped fixing plate and connection of the covering coat - a supporting component which has a specific metallic shape for any type of metal covering coat, and is provided with a double row of holes, preferably positioned near the terminal portions of at least two opposite sides of the plate in which the fixing rivets in the covering coat are placed. The plate also allows the anchorage on the side of the ribbing; in the middle of the shaped plate are planned at least four angular holes for the attachment of a base plate; the base plate comprises a steel plate provided with four angular holes placed in correspondence with the angular holes of the shaped plate.

[0018] The second object of the present invention is achieved by means of a rotating and swinging vertical supporting component for the steel cable, comprising:

- a U-shaped rotating base provided with a central hole in the bottom portion apt for securing it with a high-strength bolt to the base plate, mentioned earlier, said rotating base with its vertical sides arranged with holes for the insertion of retaining means and rotation of a vertical swinging component
- and a vertical component comprising a steel press-bent plate with holes arranged for the insertion of

horizontal rotating bolts, a coupling loop of the steel cable, and sealing bolts.

[0019] According to the present invention, in case of stress of the steel cable due to the fall of an operator, the vertical rotating and swinging component rotates positioning itself in the direction of the falling line and, at the same time, bends down bringing itself from a vertical position to a position parallel to the falling line, thereby avoiding that, like it happens with traditional poles supporting steel cables, the lever effect of the pole on the sealing plate would add to the traction due to the weight of the falling body, which often causes the unhinging of the plate from the covering coat, with easily imaginable consequences for both safety and restoration costs.

Brief description of the drawings

[0020] For a complete understanding of the objects mentioned above reference should be made to the following detailed description of an explanatory example, but not limited, provided with accompanying drawings, wherein:

Figure 1 shows a schematic view of a safety system used on buildings' covers

Figure 2 shows a sectional and plan view of the shaped plate for fixing to the covering coat

Figure 3 shows an axonometric view of the base plate

Figure 4 shows a bottom axonometric view of the rotating base

Figure 5 shows a side axonometric view of the vertical swinging component.

Figure 6 shows a side view of the vertical swinging component.

Figure 7 shows an exploded front view of the whole system.

Figure 8 shows a side view of the mounted rotating base and vertical swinging component.

Figure 9 shows a top view of the rotating base and vertical swinging component.

Detailed description of the invention

[0021] With reference to said figures, the anchoring device for anti fall systems particularly suitable for metallic covers, consists of:

- A shaped base plate (1), in steel or other suitable material, provided with a variety of holes (2) and (3) positioned along its terminal portions, suitable for the installation of rivets, or other similar anchoring means, to fix it to the covering panel; furthermore, the shaped plate (1) has at least four holes (4) to secure a second steel plate (5), and a series of service holes (6) to secure it to the covering beams;
- A second steel plate (5) provided with four holes (7)

positioned near the corners in correspondence with the holes (4) on the shaped base plate (1), for securing it to the steel shaped plate (1), and a central hole (8) to secure a retaining means for the anchorage of the rotating base (9).

- A rotating base (9) comprising a U-shaped plate, preferably made of steel, provided with a central hole (10) in the bottom side to secure it to the second steel plate (5) by means of a stopping device which anchors it to said second steel plate (5), but lets it free to rotate 360 degrees; the vertical sides of the rotating base (9) have holes (11) for the insertion of an horizontal rotation pin, holes (12) for the insertion of sealing bolts and holes (13) for the insertion of guarantee bands (13a), preferably made of plastic material, which pass through the holes (13) and are tensed and blocked in correspondence with the sealing bolts.
- A vertical swinging component (14) comprising a steel press-bent plate with holes (15) for the insertion of a rotation pin, also provided with holes (16) for the insertion of sealing bolts and with holes (17) for the insertion of a coupling loop of the steel safety cable.

[0022] The device of the present invention is installed by fixing the shaped base plate (1) to the covering panel by means of rivets or the like inserted through holes (2 and 3) and, if in correspondence with the cover supporting beam, securing means inserted into holes (6). To the shaped base plate (1) is then coupled the plate (5) by means of high-strength bolts inserted into holes (7); to the second steel plate (5) is coupled the rotating base (9), let free to rotate 360 degrees by means of a self blocking bolt inserted into a metal sleeve of rotation. To the rotating base (9) is coupled the press-bent plate (14), by means of staybolts inserted into the holes (11) of the rotating base (9) and into the holes (15) of the press-bent plate (14); so that the press-bent plate (14) can rotate relative to the second plate (5) together with the rotating base (9) and take positions different from the vertical one.

[0023] As mentioned, the press-bent plate (14) acts as a "pole" to support the steel cable to which the operator is hanged up with provided safety means during work carried out on the cover.

[0024] During the assembly phase, which provides tensioning of the steel cable of the operator anchoring line, which passes through the holes (17) of the press-bent plates (14), the press-bent plates (14) keep a vertical position thanks to the side sealing bolts inserted into holes (16); the bolts (16) are suitably sized to withstand the tensioning or the involuntary impact stresses with an operator during standard assembly and use steps.

[0025] In case of fall of an operator, there is a stress on the cable to which the operator is anchored that varies with the geometry and length of the line formed by the cable, and that is transferred to the press-bent plates (14). Press-bent plates (14), thanks to the possibility of rotating about two axes, undergo two movements caused

by the action of the cable, through the following steps:

- Breakup for the shearing of the side sealing bolts inserted into holes (12-16) for efforts of the cable higher than 200 daN
- Breakup of the guarantee bands (13a) in plastic material inserted into holes (13) as fall indicator which were tensed and blocked in correspondence with the sealing bolts when the device is in a vertical position.
- Rotation about the horizontal axis with lowering of the press-bent plate (14) up to the horizontal position parallel to that of the base plate
- Rotation about the vertical axis of the rotating base (9) and of the press-bent plate (14) up to position themselves aligned with the pulling direction of the steel cable of the line;
- beginning of the deformation of the steel cable of line (geometric, elastic and finally plastic) with actuation of the energy dissipator inserted in the line up to the falling stop

[0026] The double movement system of the final and intermediate components modifies the stresses induced by the steel cable to the anchoring plate and then to the building cover.

[0027] Compared to other anti-fall systems with rigid end poles, flexural stress is greatly reduced by the knocking down of the press-bent plate (14) (rotation about the horizontal axis), which results in turning it into a edgewise effort, lifted a few centimeters from the covering coat, with obvious ease of absorption by the cover.

[0028] Furthermore, the possibility of the components to rotate about a vertical axis, bringing themselves in the pulling direction of steel cable, prevents stress out of main levels of resistance and then the deformation of the components, with torsional stresses on the anchoring plate which indefinitely change the stress on anchorages. Possible moves for the devices are defined, being allowed to rotate around clearly identified axes

[0029] This is an important difference from other systems that require the abatement of vertical components for deformation of one or more of their parts, which do not allow to unequivocally define the amount of stress on the anchorage in different configurations as it is not possible to define the deformation level and mode.

[0030] As mentioned above, the possible movements of the system are required and provide the only break of the sealing bolts and guarantee bands.

[0031] After a fall it is required, in accordance with safety rules, to check all the components of the system, and their behaviors which, by the present patent, resulted not deformed after dynamic tests carried out on test field, with the possibility to simply restore the system by testing the anchoring components, and by replacing the sealing bolts and bands, but without the need to replace major components.

[0032] Furthermore, the possibility of the components to rotate about a vertical axis, bringing themselves in the

pulling direction of steel cable, prevents stress out of main levels of resistance and then the deformation of the components, with torsional stresses on the anchoring plate which indefinitely change the stress on anchorages. Possible moves for the devices are defined, being allowed to rotate around clearly identified axes

[0033] This is an important difference from other systems that require the abatement of vertical components for deformation of one or more of their parts, which do not allow to unequivocally define the amount of stress on the anchorage in different configurations as it is not possible to define the deformation level and mode.

[0034] As mentioned above, the possible movements of the system are required and provide the only break of the sealing bolts and guarantee bands.

[0035] After a fall it is required, in accordance with safety rules, to check all the components of the system, and their behaviors which, by the present patent, resulted not deformed after dynamic tests carried out on test field, with the possibility to simply restore the system by testing the anchoring components, and by replacing the sealing bolts and bands, but without the need to replace major components.

[0036] The guarantee band prevents the possible tampering of components that could compromise the safety system operation; in fact, the band covers the safety bolts and prevents them from being replaced by other unsuitable ones without removing the band.

[0037] The presence of the guarantee bands ensures that the system consists of elements correctly assembled and tested. Authorized maintenance envisaged by the laws in force provide for the replacement of the band with another one supplied by the manufacturer to ensure the successful enforcement of the checking for each element.

Claims

1. Anchoring device for anti-fall systems particularly suitable for metal covers, **characterized by** being composed of:

- a shaped base plate (1) in steel or other suitable material, provided with a variety of holes (2) and (3) positioned along its terminal portions, suitable for the installation of rivets or other similar anchoring means to secure it to the covering panel; the shaped base plate (1) has also at least four holes (4) to secure a second steel plate (5) and a series of service holes (6) for its securing to the covering beams;
- a second steel plate (5) provided of four holes (7) arranged near its corners in correspondence with the holes (4) on the shaped base plate (1) and a central hole (8) to secure a retaining means for a rotating base (9) anchorage;
- a rotating base (9) comprising a U-shaped steel

plate, provided with a central hole (10) in the bottom side for its securing to the second steel plate (5), by means of a stopping device which anchors it to said second steel plate (5), but lets it free to rotate 360 degrees; the vertical sides of the rotating base (9) have holes (11) for the insertion of a horizontal rotation pin; holes (12) for the insertion of sealing bolts and holes (13) for the insertion of guarantee bands (13a);
 - a vertical swinging component comprising a steel press-bent plate (14) with holes (15) for the insertion of rotation pins; holes (16) for the insertion of sealing bolts and holes (17) for the insertion of a coupling loop of the safety steel cable.

2. A method to achieve a fall protection using an anchoring device according to claim 1 **characterized in that** in case of a fall there is a stress on the steel cable of the line, which varies with the geometry and length of the line;
 said stress is transferred to the press-bent plates (14); said press-bent plates (14) thanks to their ability to rotate about two axes undergo two movements caused by the action of the cable, through the following steps:

- breakup for the shearing of the side sealing bolts inserted into holes (16) for efforts on cable higher than 200 daN
- breakup of the guarantee bands (13a) inserted into holes (13) which act as fall indicator as tensed over sealing bolts;
- rotation about the horizontal axis with lowering of the press-bent plate (14) up to the horizontal position parallel to that of the shaped base plate (1)
- rotation about a vertical axis of the rotating base (9) and press-bent plate (14) up to bring themselves aligned with the pulling direction of the steel cable line;
- beginning of the deformation of the steel cable line (geometric, elastic and finally plastic) with actuation of the energy dissipator inserted in the line up to the stop of the fall.

3. Anchoring device for anti-fall systems particularly suitable for metal covers according to claim 1 **characterized in that** guarantee bands passing through holes (13) are personalized and contain a code which guarantees the product.
4. Anchoring device for anti-fall systems particularly suitable for metal covers according to claim 1 **characterized in that** guarantee band (13a) covers sealing bolts preventing them from being replaced with others unsuitable without removing the band.

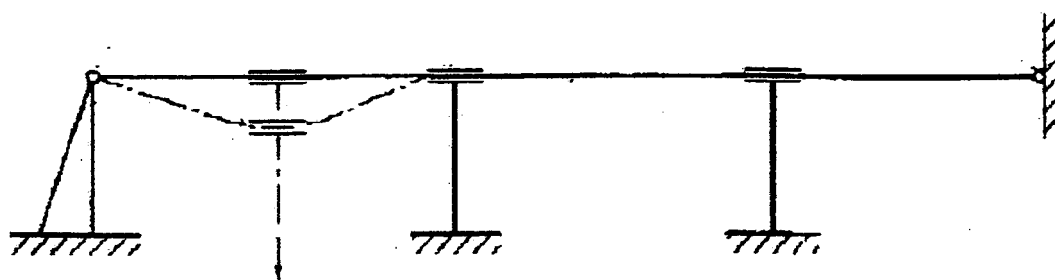


FIG 1

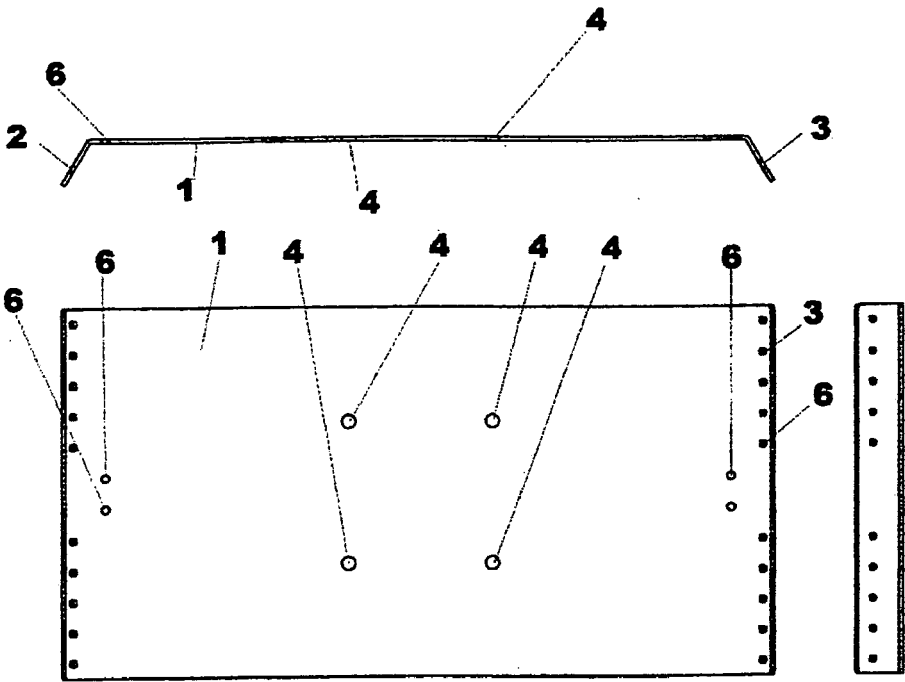


FIG. 2

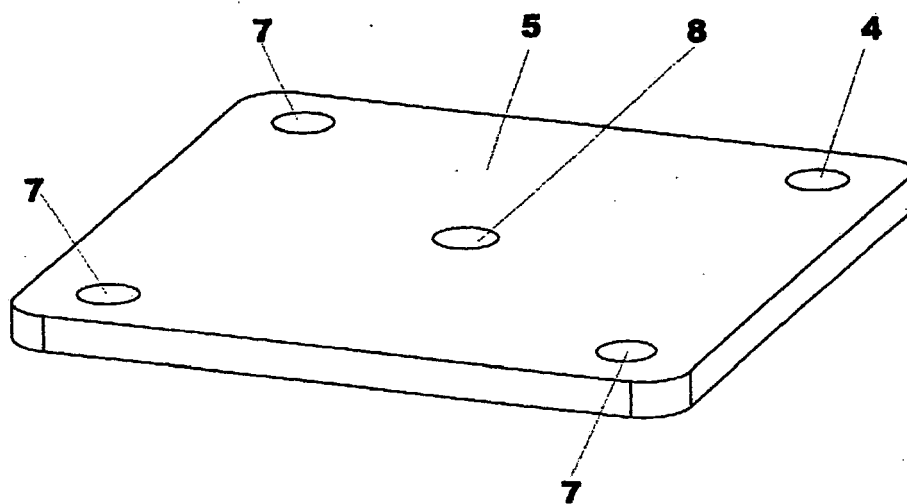


FIG 3

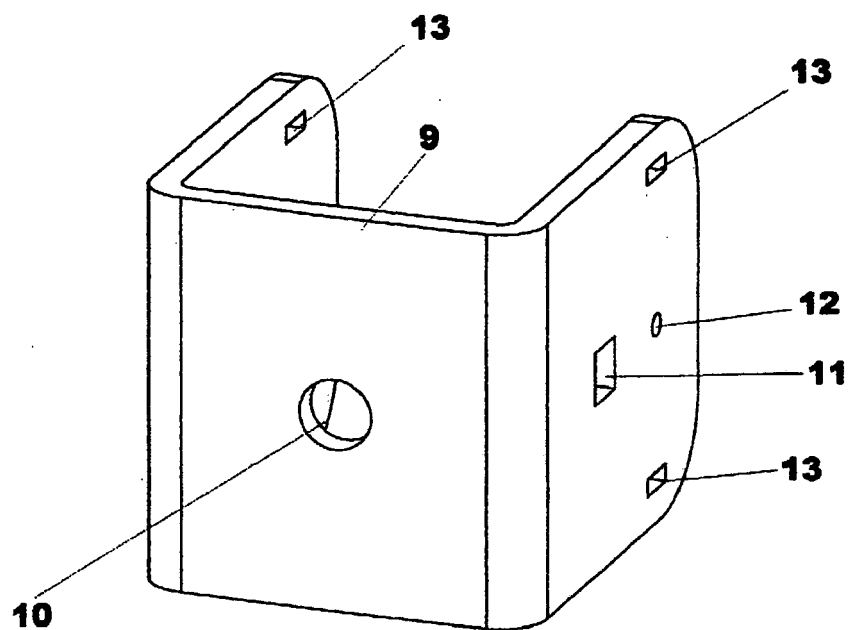


FIG. 4

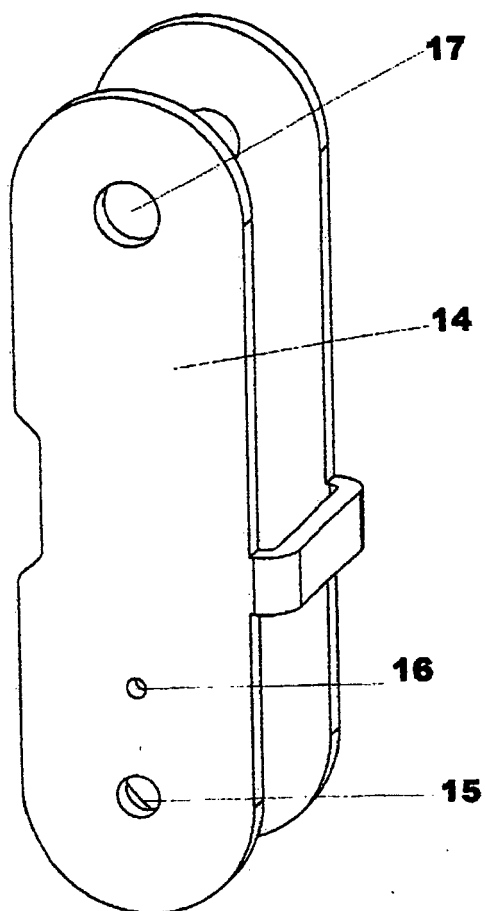


FIG.5

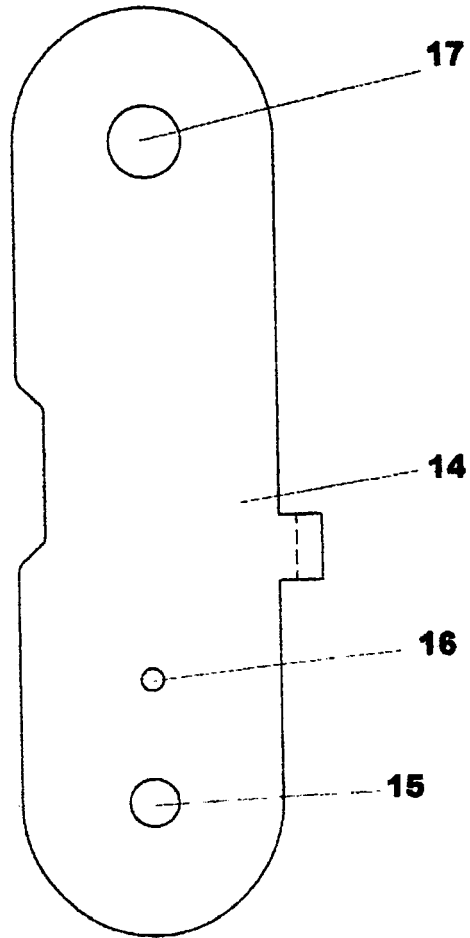


FIG.6

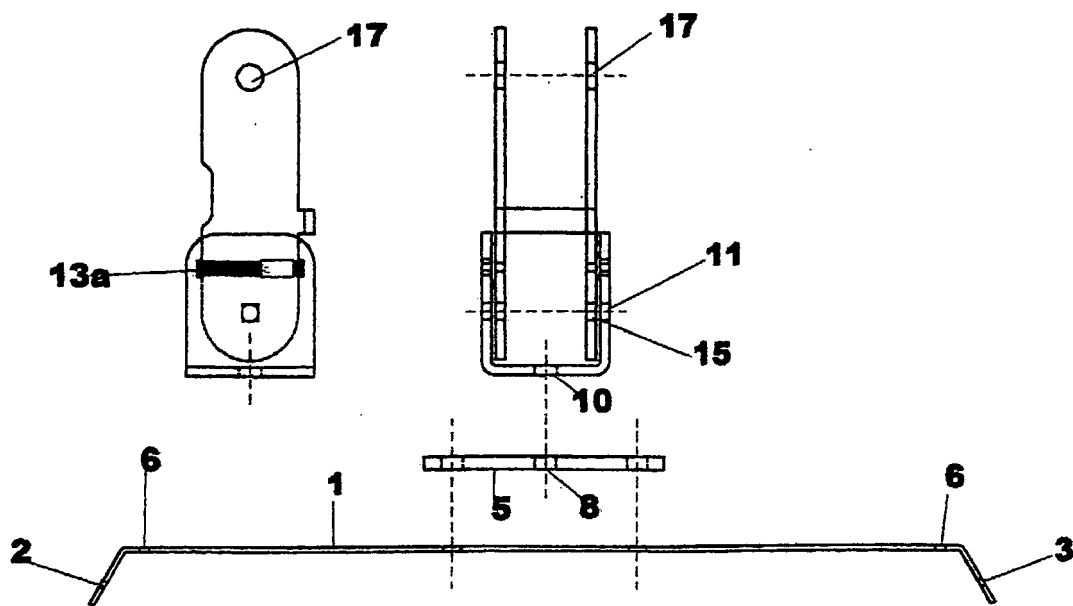


FIG.7

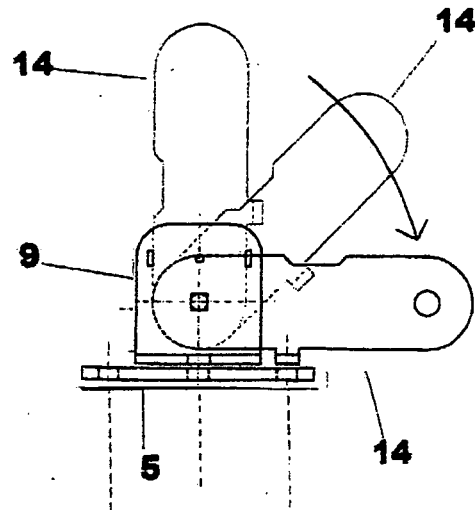


FIG.8

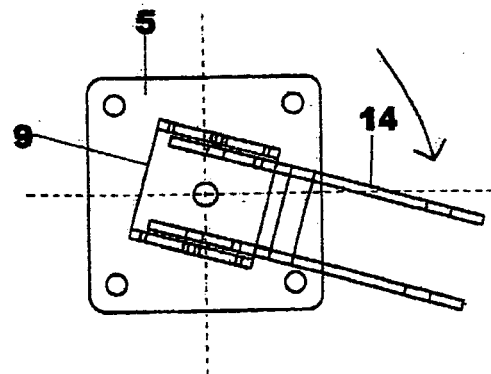


FIG.9



EUROPEAN SEARCH REPORT

Application Number
EP 11 42 5044

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 02/43809 A1 (UNILINE SAFETY SERVICES LTD [GB]; LUKE SIMON [GB]; LUKE MICHAEL [GB]) 6 June 2002 (2002-06-06) * the whole document *	1,2	INV. E04G21/32
A	WO 03/039680 A1 (ARGOUD RODOLPHE [FR]) 15 May 2003 (2003-05-15) * abstract; figures *	1,2	
A	AT 500 522 A1 (INNOTECH ARBEITSSCHUTZ GMBH [AT]) 15 January 2006 (2006-01-15) * abstract; figures *	1,2	
A	DE 39 23 691 C1 (IHB INDUSTRIE- UND HALLENBAU BIESEMANN [DE]) 31 May 1990 (1990-05-31) * abstract; figures *	1,2	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			E04G A62B
1	Place of search Munich	Date of completion of the search 7 June 2011	Examiner Scharl, Willibald
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 42 5044

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-06-2011

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0243809	A1	06-06-2002	AT 463285 T	15-04-2010
			AU 2389502 A	11-06-2002
			AU 2002223895 B2	01-06-2006
			CA 2436967 A1	06-06-2002
			CN 1477987 A	25-02-2004
			EP 1339460 A1	03-09-2003
			ES 2344192 T3	20-08-2010
			JP 2004522478 T	29-07-2004
			NZ 526734 A	27-08-2004
			PL 360951 A1	20-09-2004
			PT 1339460 E	02-06-2010
			US 2004050620 A1	18-03-2004
			ZA 200303946 A	08-04-2004

WO 03039680	A1	15-05-2003	AT 299037 T	15-07-2005
			DE 60204977 D1	11-08-2005
			DE 60204977 T2	18-05-2006
			EP 1441814 A1	04-08-2004
			ES 2242089 T3	01-11-2005
			FR 2831826 A1	09-05-2003
			US 2004256176 A1	23-12-2004

AT 500522	A1	15-01-2006	NONE	

DE 3923691	C1	31-05-1990	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0243809 A1 [0011]
- WO 03039680 A1 [0011]
- AT 5005522 A1 [0011]
- DE 3923691 C1 [0011]