



(51) International Patent Classification:

F24F 13/08 (2006.01) *F24F 11/00* (2006.01)
A62C 2/06 (2006.01)

(21) International Application Number:

PCT/GB2015/051104

(22) International Filing Date:

10 April 2015 (10.04.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1406537.9 11 April 2014 (11.04.2014) GB

(71) Applicant: **POLYSEAM LIMITED** [GB/GB]; Shaw Park, Silver Street, Huddersfield West Yorkshire HD5 9AF (GB).

(72) Inventors: **BOGSTAD, Kjetil**; Knausveien 27, N-3121 Nøtterøy (NO). **HLUCHAN, Wolodymyr**; 112 Hawthorne Way, Shelley, Huddersfield West Yorkshire HD8 8PX (GB).

(74) Agent: **APPLEYARD LEES**; 15 Clare Road, Halifax Yorkshire HX1 2HY (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: CHEMICAL DAMPER

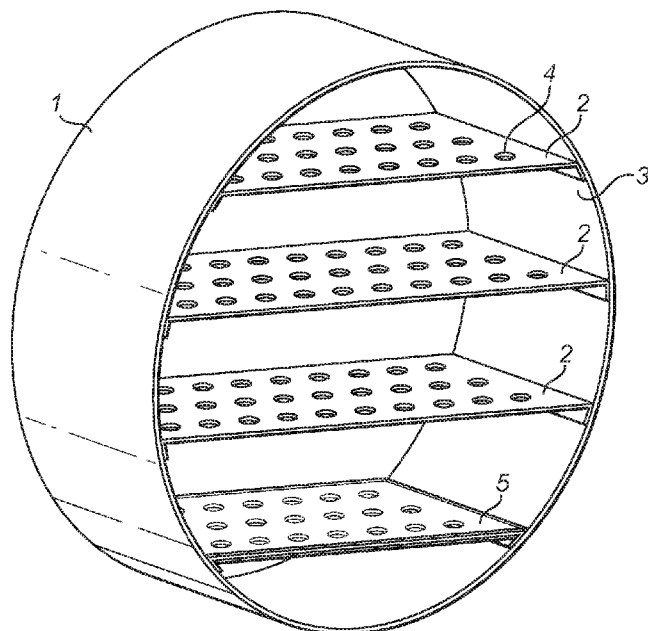


FIG. 2

(57) Abstract: According to the present invention, there is provided a damper for ducting comprising at least one fin comprising an intumescent composition.

Chemical Damper

The present invention relates to a damper for closing off a conduit. In particular the invention relates to a damper which prevents or inhibits the spread of a fire. These are often termed fire
5 dampers.

Fire dampers are commonly used in ducting for ventilation systems, including heating circuits and air conditioning systems. Dampers are usually located at a position where the ducting passes through a fire barrier, for example a wall, door or ceiling.

10

A traditional fire damper for ducting is shown in figure 1. In normal use (figure 1A) the damper is held open to allow air to flow through the duct. In a fire the damper automatically closes to seal the duct and prevent air flow (figure 1B).

15 Mechanical dampers of these types are usually held open during normal use by a magnetic or electrical signal. This magnetic or electrical signal is switched off in the event of a fire, and the damper is closed by a spring.

A disadvantage of these mechanical systems is that regular inspections and testing are
20 needed to ensure that the dampers are in working order. It can also be complex to retrofit dampers to old ducting due to the necessity of including electrical or magnetic opening means.

The present invention provides an alternative damper which is chemical-based.

25 According to a first aspect of the present invention there is provided a damper for ducting comprising at least one fin comprising an intumescent composition.

The damper of the present invention may be directly located within the ducting or may be provided in a housing which fits into the ducting or is adapted to connect to the ducting.

30

The damper of the present invention may be used with any type of ducting. The ducting will typically be tubular in nature. It may have any shape of cross-section. In some common embodiments the ducting is of circular cross-section, and substantially cylindrical. However in some other embodiments the ducting may be rectangular, of any relative dimensions.

35

The damper comprises at least one fin comprising an intumescent composition. Suitably the plane of the fin is substantially perpendicular to the cross-section of the ducting.

By the cross-section of the ducting we mean to refer to a plane through the ducting which is substantially perpendicular to the longitudinal axis of the ducting. Thus a cylindrical ducting will typically have a circular cross section.

- 5 The damper may comprise more than one fin. The plane of the or each fin is preferably substantially perpendicular to the cross section of the ducting.

Positioning the fin or fins substantially perpendicular to the cross-section ensures that any reduction of the area of cross-section is minimised and thus air flow through the ducting is not
10 significantly inhibited.

In this specification any reference to a fin applies as appropriate to each fin, in embodiments in which more than one fin is present.

- 15 The fin comprises an intumescent composition. In some embodiments the fin may consist essentially of the intumescent composition i.e. it is within the scope of the present invention to provide an intumescent composition of sufficient structural rigidity to be formed into a fin.

In some embodiments the fin comprises a substantially planar structure in which the
20 intumescent composition is contained. The substantially planar structure in which the intumescent composition is contained may be made of any suitable material. Suitable materials include metals, plastics, wood and ceramics.

In some preferred embodiments the fin comprises a substantially planar structure which is
25 coated with the intumescent composition. In some embodiments one face of the fin is coated with the intumescent composition. In preferred embodiments both faces of the fin are coated with the intumescent composition.

The fin may comprise a substantially solid planar substrate. However in preferred
30 embodiments the fin comprises one or more apertures. Suitably the fin may be perforated, or in the form of a grid or mesh.

The provision of apertures in the structure of the fin enables the intumescent composition to expand through the apertures.

35 The fins may be made from any suitable material. Such materials include plastics, metals, wood and ceramics. In embodiments in which the fin is a plastic fin the plastic suitably has a melting point which is at least as high as the temperature at which the composition intumesces.

In preferred embodiments the damper comprises a plurality of fins. These may be positioned in any orientation relative to each other.

- 5 In preferred embodiments each fin is substantially perpendicular to the cross-section of the ducting.

- In preferred embodiments the damper of the present invention comprises more than one fin. Preferably the damper comprises a plurality of fins which are substantially parallel to each other.
- 10

In preferred embodiments the fin or each fin is located within a housing.

- Preferably the present invention provides a damper for ducting comprising a housing and at least one fin located within the housing, wherein the fin comprises an intumescent composition
- 15

The housing is suitably shaped to fit within or connect to the ducting.

- Preferably the damper is shaped to connect to the ducting. Typically in use the damper will connect two sections of ducting on either side of a fire barrier.
- 20

In preferred embodiments the ducting is substantially cylindrical. Preferably the housing is ring shaped.

- 25 Suitably the damper of the present invention comprises a ring shaped housing comprising a plurality of fins which each comprise an intumescent composition.

- The plane of each fin is preferably substantially perpendicular to the circular face defined by the ring of the housing. The fins may be oriented in any position relative to each other. They may form a plurality of spoke or arcs. In some embodiments the fins may form a grid.
- 30

- In preferred embodiments the damper comprises a plurality of fins which are substantially parallel to each other. Preferably the fins are spaced approximately equidistant from each other.
- 35

Thus the present invention suitably provides a damper comprising a ring shaped housing comprising a plurality of fins which are substantially parallel to each other and substantially perpendicular to the circular cross-section of the ring wherein each fin comprises an intumescent composition.

In some embodiments the fins may be supported by one or more rods or a comb shaped support. This is particularly useful in dampers of large cross section as the supporting rods and combs can ensure that the fins remain substantially equidistant across their length.

5

When heated above a certain temperature the intumescent composition swells and forms a char. The distance between the fins is suitably selected to ensure the char is able to form quickly and close the gaps between the fins.

- 10 The distance between the fins is preferably at least 0.5 cm, preferably at least 1 cm, suitably at least 1.5 cm, for example at least 2 cm or at least 2.5 cm.

The distance between the fins may be up to 10 cm, suitably up to 8 cm, preferably up to 7 cm, suitably up to 6 cm, for example up to 5 cm or up to 4.5 cm.

15

The coating of intumescent compositions on each fin is preferably at least 0.1mm thick, suitably at least 0.25mm, for example at least 0.5mm. The coating suitably has a thickness of less than 10mm, preferably less than 5mm.

- 20 The formation of a char creates a thermal barrier and prevents heat (and smoke?) passing through the duct. The length of time for which the barrier will be effective depends on the depth of the fins. By the depth of a fin we mean to refer to the distance parallel to the longitudinal axis of the ducting that the fin extends.

- 25 Preferably the or each fin has a depth of at least 1 cm, preferably at least 3 cm, more preferably at least 5 cm.

In some preferred embodiments the or each fin has a depth of 5 to 15 cm, preferably 8 to 12 cm, suitably about 10 cm.

30

The depth of the fin will depend on the desired rating of the thermal barrier. This will depend on the fire ratings of the surrounding materials. For example a damper in ducting passing through a wall with a fire rating of one hour will need to withstand a fire for at least one hour.

- 35 In some embodiments the depth of the fin may be up to 20 cm or even up to 50 cm. This may be useful for example if the ducting is adjacent to a room containing flammable materials.

In some embodiments the damper of the present invention comprises a mesh which extends across the cross-section of the ducting or the housing when present. The mesh is suitably substantially adjacent to the fin or fins.

- 5 In some especially preferred embodiments the damper comprises two meshes and the fin or fins are positioned therebetween.

The mesh may suitably be provided to prevent expanded intumescent material from being blown away through the ducting.

10

Fixing means may be provided to secure the mesh or meshes in position. For example in one embodiment a plurality of metal fingers are provided. In another embodiment a flange may be provided around the edge of the housing to secure the mesh to.

- 15 In some embodiments the damper of the present invention comprises a ring shaped housing comprising a plurality of fins which comprise an intumescent composition; wherein each circular face of the housing is closed by a mesh and wherein the fins are substantially parallel to each other and substantially perpendicular to the meshes.

- 20 In some embodiments the damper does not include a mesh. The inclusion of a mesh or not will depend on the particular use of the ducting and whether it is likely to become blocked during normal operation.

- 25 The or each fin of the dampers of the present invention comprises an intumescent composition. Suitably each fin is coated with the intumescent composition. Suitably each side of each fin is coated with the intumescent composition.

- 30 The intumescent composition preferably comprises one or more compounds selected from ammonium polyphosphate, phosphoric acid, sulphuric acid, boric acid, salts of boric acid, ammonium tetraborate, potassium tetraborate, sodium tetraborate, ammonium phosphate, ammonium sulphate, ammonium halides, urea, guanylurea phosphate, reaction products of P_2O_5 and ammonia, tricresyl phosphate, alkyl phosphate, haloalkyl phosphates, melamine, melamine cyanurate, melamine phosphate, melamine pyrophosphate, melamine polyphosphate, dicyandiamide, azodicarbonamide, linear amines (e.g. ethylene diamine-o-phosphate), guanidine phosphate, melamine borate, melam, melem, melon, pentaerythritol, dipentaerythritol, tripentaerythritol, starch, sugar, glucose, dextrin, sorbitol, mannitol, phenol formaldehyde resins, and methylol melamine.
- 35

Any suitable intumescent composition may be included in the damper of the present invention. Many such compositions will be known to the person skilled in the art.

5 However the present inventors have developed a novel intumescent composition for use with the damper which is particular advantageous. This composition expands quickly at relatively low temperatures to produce a dense char.

Suitably the fin comprises an intumescent composition comprising:

- 10 (a) an intumescent material comprising phosphorus, sulfur, a halogen, a melamine compound, boron, a polyol or a mixture thereof;
- (b) an expandable intumescent material selected from graphite, silicate, vermiculite and mixtures thereof;
- (c) a polymeric binder; and
- 15 (d) a fibrous material.

Component (a) is an intumescent material comprising phosphorous, sulfur, a halide, boron, a melamine compound, a polyol or a mixture thereof. Intumescent materials of this type are well known to the person skilled in the art.

20

Component (a) may comprise phosphorus. By this we mean to include any compound comprising a phosphorus atom or ion. Such compounds include, but are not limited to, phosphates, polyphosphates and other phosphoric acid salts and derivatives.

25 Component (a) may comprise sulfur. By this we mean to include any compound comprising a sulfur atom or ion. Such compounds include, but are not limited to, sulfates and other sulfuric acid salts and derivatives.

Component (a) may comprise boron. By this we mean to include any compound comprising a boron atom or ion. Such compounds include, but are not limited to, borates and other boric acid salts and derivatives.

30

Component (a) may comprise a halogen. By this we mean to include any compound comprising a halogen atom or halide ion. Such compounds include, but are not limited to, chloride and bromide salts.

35

Component (a) may comprise one or more compounds selected from ammonium polyphosphate, phosphoric acid, sulphuric acid, boric acid, salts of boric acid, ammonium tetraborate, potassium tetraborate, sodium tetraborate, ammonium phosphate, ammonium

sulphate, ammonium halides, urea, guanylurea phosphate, reaction products of P_2O_5 and ammonia, tricresyl phosphate, alkyl phosphate, haloalkyl phosphates, melamine, melamine cyanurate, melamine phosphate, melamine pyrophosphate, melamine polyphosphate, dicyandiamide, azodicarbonamide, linear amines (e.g. ethylene diamine-o-phosphate),
5 guanidine phosphate, melamine borate, melam, melem, melon, pentaerythritol, dipentaerythritol, tripentaerythritol, starch, sugar, glucose, dextrin, sorbitol, mannitol, phenol formaldehyde resins, and methylol melamine.

10 In some preferred embodiments component (a) comprises a phosphorous containing intumescent material. Suitably component (a) comprises a phosphate-containing intumescent material.

In some especially preferred embodiments component (a) comprises ammonium polyphosphate.
15

In some preferred embodiments component (a) comprises a melamine compound. Preferably component (a) comprises melamine.

20 In some embodiments component (a) comprises a polyol, i.e. a polyhydric alcohol. Suitable polyhydric alcohols include sugars and other carbohydrates.

Preferred polyols are pentaerythritol, dipentaerythritol and tripentaerythritol. Pentaerythritol is especially preferred.

25 In some embodiments component (a) comprises a mixture of compounds.

In some embodiments component (a) comprises a first material selected from ammonium polyphosphate, phosphoric acid, sulphuric acid, boric acid, salts of boric acid, ammonium tetraborate, potassium tetraborate, sodium tetraborate, ammonium phosphate, ammonium sulphate, ammonium halides, urea, guanylurea phosphate, reaction products of P_2O_5 and ammonia, tricresyl phosphate, alkyl phosphate and haloalkyl phosphates; a second material selected from melamine, melamine cyanurate, melamine phosphate, melamine pyrophosphate, melamine polyphosphate, dicyandiamide, azodicarbonamide, linear amines (e.g. ethylene diamine-o-phosphate), guanidine phosphate, melamine borate, melam, melem,
30 melon; and a third material selected from pentaerythritol, dipentaerythritol, tripentaerythritol, starch, sugar, glucose, dextrin, sorbitol, mannitol, phenol formaldehyde resins, and methylol melamine.
35

In some preferred embodiments component (a) comprises a first material selected from ammonium polyphosphate, ammonium tetraborate and ammonium phosphate; a second material selected from melamine and dicyandiamide; and a third material selected from pentaerythritol, dipentaerythritol and tripentaerythritol.

5

Suitably component (a) comprises a phosphate-containing compound and a melamine compound. Preferably component (a) comprises ammonium polyphosphate and melamine.

10 In some especially preferred embodiments component (a) further comprises a polyol. Suitably component (a) comprises a phosphate-containing compound, a melamine compound and a pentaerythritol compound.

15 Component (b) comprises an expandable intumescent material selected from graphite, silicate, vermiculite and mixtures thereof. Materials of this type are known to the person skilled in the art. Preferably component (b) comprises an expandable graphite material.

20 Component (c) is a polymeric binder. Suitable polymeric binders include styrene/acrylic copolymers, vinyl acetate polymers, vinyl acetate/VeoVa/acrylate copolymers, acrylic polymers, acrylic/VeoVa copolymers, acrylic/styrene copolymers, styrene/butadiene copolymers, styrene/butadiene/acrylonitrile copolymers, polybutadiene polymers, alkyd polymers, epoxy polymers, polyurethane modified silanes, silicones, polysulphides, polyaspartic polymers and polyurethane polymers. VeoVa refers to the vinyl ester of versatic acid. As the skilled person will appreciate a number of versatic acids are available. Versatic acid 10, a highly branched isomer of decanoic acid is preferred.

25

Preferred polymeric binders for use in the compositions of the present invention are styrene/acrylic copolymers.

30 The polymeric binder is preferably incorporated into the composition as an aqueous emulsion. Such an emulsion typically comprises particles of the polymer suspended in an emulsion which coalesce on drying to form the polymeric binder.

35 Component (d) is a fibrous material. Suitable fibrous materials include silicate fibres, mineral fibres, aramid fibres, carbon fibres, imide fibres, cellulosic fibres and diatomaceous earth fibres. Especially preferred fibrous materials are alkaline earth silicate fibres. Suitably the fibres are from 1 μm to 1 mm in diameter.

In some embodiments the intumescent composition further comprises (e), an inorganic filler.

Suitable inorganic fillers include titanium dioxide, kaolin, barytes, perlite (aluminium silicate), cenospheres, carbonates (e.g. calcium carbonate and dolomite), metal hydroxides (e.g. aluminium hydroxide, magnesium hydroxide), huntite, hydromagnesite, vermiculite (mica), portland cement clinker, glass, plaster of paris (gypsum), calcined kaolin, fly ash, slag, calcium sulfate, silica gel, silicates (e.g. calcium silicate), silica (quartz), talc, wollastonite, zinc stearate, zinc oxide, aluminium oxide, zeolite, Ceepree (glass frits), lead oxide, silicon and borates (e.g. potassium tetraborate, potassium borate, ammonium tetraborate, sodium borate).

An especially preferred filler is titanium dioxide.

10 Component (a) is preferably present in the intumescent composition in an amount of at least 5 wt%, suitably at least 10 wt%, preferably at least 15 wt%, preferably at least 20 wt%, more preferably at least 25 wt%, for example at least 30 wt% or at least 35 wt%.

15 Component (a) may be included in the composition in an amount of up to 80 wt%, suitably up to 70 wt%, preferably up to 65 wt%, suitably up to 60 wt%, more preferably up to 55 wt%, for example up to 50 wt% or up to 45 wt%.

In embodiments in which component (a) comprises a mixture of compounds the above amounts refer to the total of all such compounds present in the composition.

20 In some embodiments the composition comprises ammonium phosphate or ammonium polyphosphate in an amount of from 10 to 40 wt%, suitably from 15 to 35 wt%, preferably from 20 to 30 wt%, for example from 22 to 28 wt%.

25 In some embodiments the composition includes a melamine component in an amount of from 1 to 20 wt% preferably from 2 to 15 wt%, suitably from 5 to 10 wt%.

In some embodiments the composition comprises a pentaerythritol component in amount of 1 to 20 wt% preferably from 2 to 15 wt%, suitably from 5 to 10 wt%.

30 In some especially preferred embodiments the intumescent composition comprises from 15 to 35 wt% of ammonium polyphosphate, from 2 to 15 wt% of melamine, and from 2 to 15 wt% of pentaerythritol.

35 Component (b) is preferably present in the intumescent composition in amount of at least 1 wt%, suitably at least 2.5 wt%, preferably at least 5 wt%, more preferably at least 7 wt%, for example at least 8 wt% or at least 10 wt%.

Component (b) may be included in the intumescent composition in an amount of up to 40 wt%, suitably up to 30 wt%, preferably up to 25 wt%, more preferably up to 20 wt%, for example up to 17 wt% or up to 15 wt%.

- 5 In embodiments in which component (b) comprises a mixture of compounds, the above amounts refer to the total amounts of all such compounds present in the composition.

Component (c) is a polymeric binder. This may suitably be incorporated into the composition in the form of a solution or emulsion, preferably an aqueous emulsion of polymeric binder.

10

The binder is suitably provided as a solution or emulsion comprising from 10 to 80 wt%, preferably from 30 to 70 wt%, typically from 35 to 65 wt% solids.

This solution or emulsion may be described as binder precursor composition.

15

The binder precursor composition is suitably incorporated in the intumescent composition in amount of at least 1 wt%, suitably in an amount of at least 5 wt%, preferably at least 10 wt%, more preferably at least 12 wt%, for example at least 15 wt%, at least 20 wt% or at least 25 wt%.

20

The binder precursor composition may be included in the composition in an amount of up to 50 wt%, suitably up to 45 wt%, more preferably up to 40 wt%, for example up to 35 wt%, up to 33 wt% or up to 30 wt%.

- 25 The binder precursor composition is suitably included in an amount to provide an intumescent composition comprising from 1 to 50 wt%, preferably from 10 to 35 wt%, and more preferably from 15 to 30 wt% polymeric binder.

Where a mixture of binders is included the above amount refers to the total amounts of all binders and binder precursor compositions included in the intumescent composition.

30

Component (d) is preferably present in the intumescent composition in amount of at least 0.1 wt%, preferably at least 0.25 wt%, suitably in an amount of at least 0.5 wt%, preferably at least 0.75 wt%, more preferably at least 1 wt%.

35

Component (d) may be included in the composition in an amount of up to 10 wt%, suitably up to 5 wt%, preferably up to 4 wt%, for example up to 3 wt%, or up to 2 wt%.

Where component (d) comprises a mixture of compounds the above amounts refer to the total of all such compounds present in the composition.

5 Component (e) is preferably present in the intumescent composition in amount of at least 0.1 wt%, preferably at least 1 wt%, suitably at least 2.5 wt%, preferably at least 5 wt%, more preferably at least 7 wt%.

10 Component (e) may be included in the composition in an amount of up to 30 wt%, suitably up to 25 wt%, preferably up to 20 wt%, more preferably up to 15 wt%, for example up to 12 wt%.

Where component (e) comprises a mixture of compounds the above amounts refer to the total of all such compounds present in the composition.

15 The intumescent composition may further comprise one or more solvents. Suitable solvents include water and other water-miscible solvents.

Suitably the composition comprises at least 1 wt% water, preferably at least 2.5 wt%, more preferably at least 5 wt%.

20 The intumescent composition may comprise up to 30 wt% water, preferably up to 20 wt%, more preferably up to 12 wt%.

25 The above amounts refer to water added to the composition in addition to any water included in other ingredients, for example a binder precursor composition.

30 The intumescent composition may comprise one or more further components selected from biocides, fragrances, fillers, adhesion agents, additional intumescent and fire-stop agents, buffers, dispersing agents, surfactants, deaerators, defoamers, surface control additives, hydrophobing agents, wetting additives, rheological additives, anti-cratering additives, radiation curing additives, anti-corrosion additives and anti-graffiti additives.

35 The composition may comprise a pH regulator. Any suitable pH regulator may be used and these will be known to the person skilled in the art. One suitable pH regulator is 2-amino-2-methyl-1-propanol.

Suitably the intumescent composition has a pH of from 5 to 13, suitably from 7 to 11.

Suitably the intumescent composition intumesces at a relatively low temperature and expands quickly to form a dense char, thus closing the damper.

The char formed suitably has sufficient structural rigidity to withstand a pressure difference of 300Pa between the fire and non-fire sides of the barrier formed.

- 5 Suitably the composition swells to at least 5 times (500%), preferably at least 7 times (700%) of its original thickness in less than 2 minutes when heated according to the EN1363-1 (ISO 834) fire test. The temperature in the furnace after 1 minute of this test is approximately 349 °C and after 2 minutes it is approximately 445 °C.
- 10 Suitably the intumescent composition of the present invention intumesces at a temperature of 200°C or less, preferably 150°C or less, preferably 120°C or less.

A preferred embodiment of the present invention will now be further described with reference to the accompanying figures in which:

15

Figure 2 shows a damper of the present invention;

Figure 3 shows a cross-sectional view of the damper of figure 2; and

20

Figure 4 shows the damper connected to a portion of ducting.

Preferred features of this embodiment will now be described. However it will be appreciated that these features may as appropriate apply to other embodiments of the invention.

25

The damper comprises a ring shaped housing 1 which is made of steel. Within the housing are a plurality of parallel fins 2 which are affixed to the internal surface of the housing 3. The fins each comprise a number of apertures 4. However it will be appreciated that fins which are solid or which are in the form of a grid or mesh could also be used. The fins in a preferred embodiment are made of steel but alternative materials may be used. In the embodiment

30 shown the fins are spot-welded onto the inside of the housing, but other methods of fixing the fins into the housing are within the scope of the invention.

35

Each fin is coated on both sides with a layer of intumescent material 5. This is only shown on the bottom fin in figure 2. However embodiments in which only one face of the fin is coated are also within the scope of the invention.

The intumescent material may be coated onto the fin by any suitable means, for example painting, dipping or casting into sheets.

In some embodiments the intumescent composition is structurally rigid and may itself be formed directly into a fin, rather than being applied to a separate substrate. In such embodiments the fin may be cast, moulded or extruded. It may be made by any other suitable method.

5

Each face of the damper housing is closed by a mesh 6 which can be seen in figure 3 but is not shown in figure 2. The mesh is suitably a metal or other material which can withstand high temperatures likely to arise in a fire. The mesh may be held in position by a plurality of metal fingers (not shown). The distance between the fins is preferably approximately equal. The distance is suitably selected to ensure that a char is able to form quickly and close the gaps between the fins.

10

The distance between the fins is preferably 0.5 to 10 cm, more preferably 1.5 to 7 cm, most preferably 2.5 to 4.5 cm.

15

According to the second aspect of the present invention there is provided ducting comprising a damper of the first aspect.

The present invention may also provide an intumescent composition as described herein.

20

The invention will now be further defined with reference to the following example.

Example 1

25

An intumescent composition of the invention was prepared comprising the following components:

Ingredient	Amount (g)
Water	245.8
Pentaerythritol	233.7
Melamine	233.7
Ammonium polyphosphate	767.4
2-amino-2-methyl-1-propanol	8.7
Alkaline earth silicate fibre	45.0
Styrene acrylic copolymer	803.2
Polyacrylate dispersion	25.4
Mineral hydrocarbon, silica and surface active material	2.1

Titanium dioxide	280.2
Expandable graphite	352.3
Preservative	2.1
Total	2999.6g

5 This composition was coated onto perforated steel fins which were located in the fire damper of figures 2 and 3. The damper was tested according to EN1366, Part 12. This is the fire resistance standard for non-mechanical dampers. The fire test curve that is used to heat the furnace as part of this test standard is EN1633-1 (ISO834).

Figure 5A shows the damper prior to the test open to allow air to pass freely through the ducting.

10 Figure 5B shows the damper after the test which clearly shows that a dense char has formed closing the ducting.

Claims:

1. A damper for ducting comprising at least one fin comprising an intumescent composition.
- 5 2. A damper according to claim 1 which is provided in a housing which fits into the ducting or is adapted to connect to the ducting.
- 10 3. A damper according to claim 1 or claim 2 wherein the plane of the fin is substantially perpendicular to the cross-section of the ducting.
4. A damper according to any preceding claim which comprises more than one fin.
- 15 5. A damper according to claim 4 wherein the fins are substantially parallel to each other.
6. A damper according to claim 5 wherein the fins are spaced approximately equidistant from each other.
- 20 7. A damper according to any preceding claim which comprises a ring shaped housing.
8. A damper according to claim 7 wherein at least one circular cross-section of the housing is closed by a mesh.
- 25 9. A damper according to any preceding claim wherein the intumescent composition preferably comprise one or more compounds selected from ammonium polyphosphate, phosphoric acid, sulphuric acid, boric acid, salts of boric acid, ammonium tetraborate, potassium tetraborate, sodium tetraborate, ammonium phosphate, ammonium sulphate, ammonium halides, urea, guanylurea phosphate, reaction products of P_2O_5 and ammonia, tricresyl phosphate, alkyl phosphate and haloalkyl phosphates; a second material selected from melamine, melamine cyanurate, melamine phosphate, melamine pyrophosphate, melamine polyphosphate, dicyandiamide, azodicarbonamide, linear amines (e.g. ethylene diamine-o-phosphate), guanidine phosphate, melamine borate, melam, melem, melon; and a third material selected from pentaerythritol, dipentaerythritol, tripentaerythritol, starch, sugar, glucose, dextrin, sorbitol, mannitol, phenol formaldehyde resins, and methylol melamine.
- 30 10. A damper according to any preceding claim wherein the intumescent composition comprises:
- 35

- (a) an intumescent material comprising phosphorus, sulfur, a halogen, a melamine compound, boron, a polyol or a mixture thereof;
 - (b) an expandable intumescent material selected from graphite, silicate, vermiculite and mixtures thereof;
 - 5 (c) a polymeric binder; and
 - (d) a fibrous material.
- 11. Ducting comprising a damper as claimed in any preceding claim.
- 10 12. An intumescent composition as defined in claim 10.
- 13. A damper substantially as described herein with reference to the examples.

1 / 4

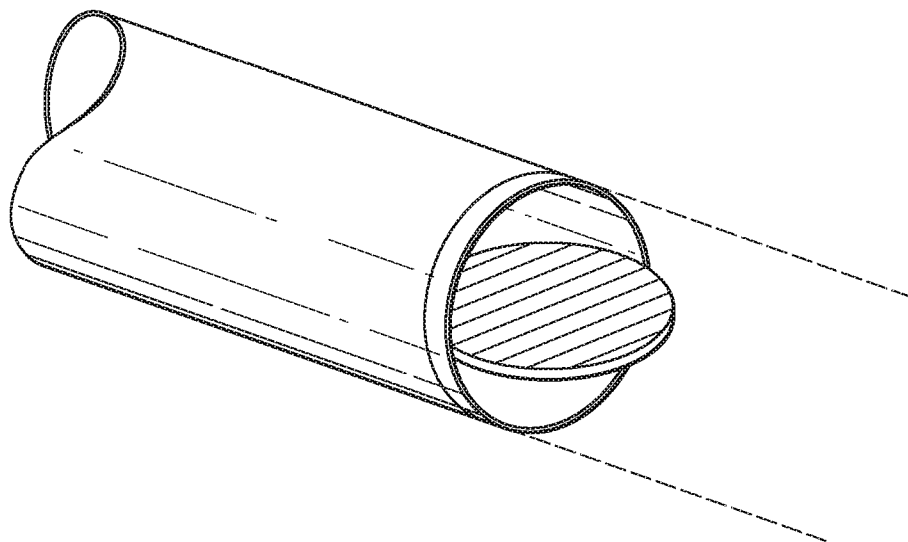


FIG. 1A

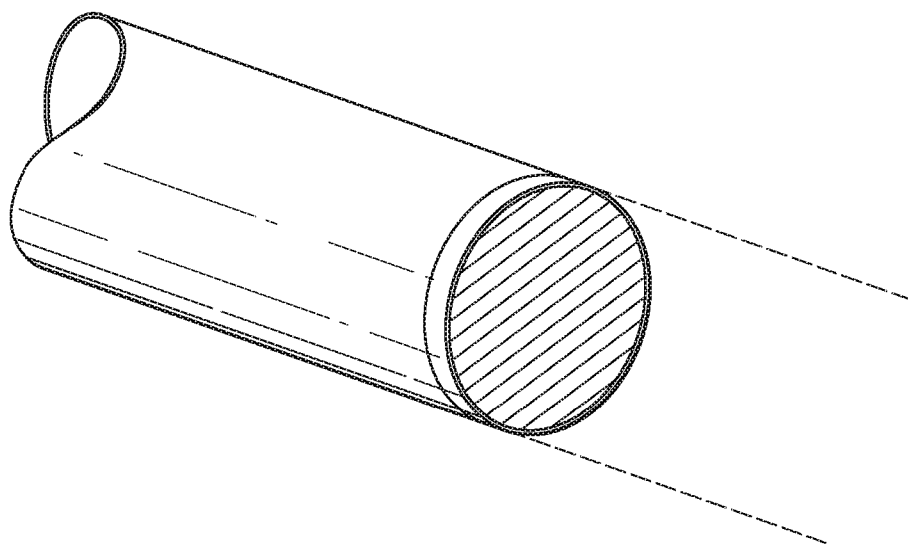


FIG. 1B

2 / 4

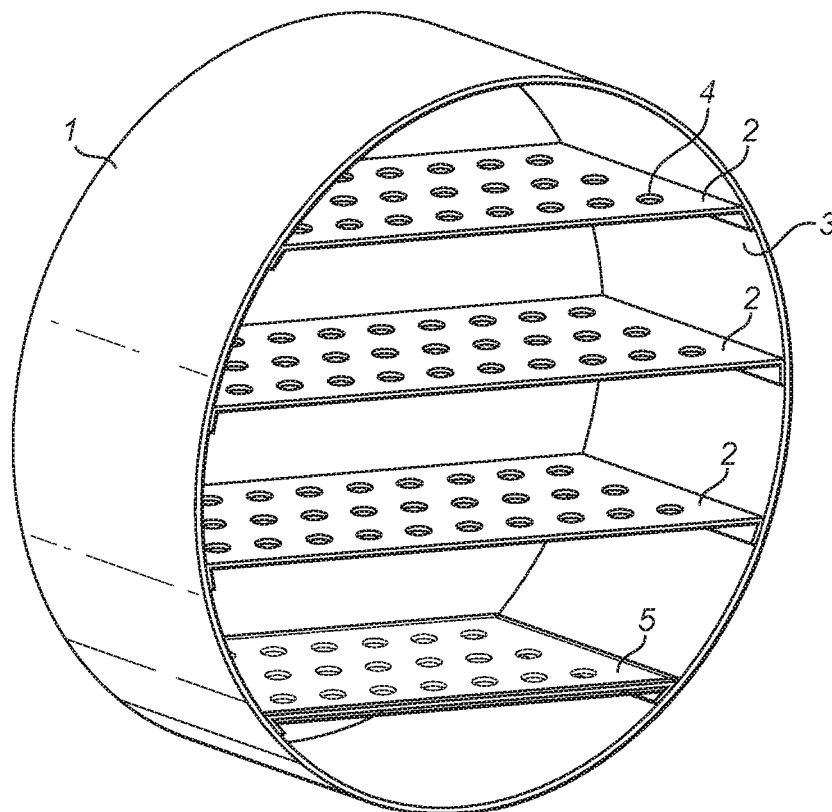


FIG. 2

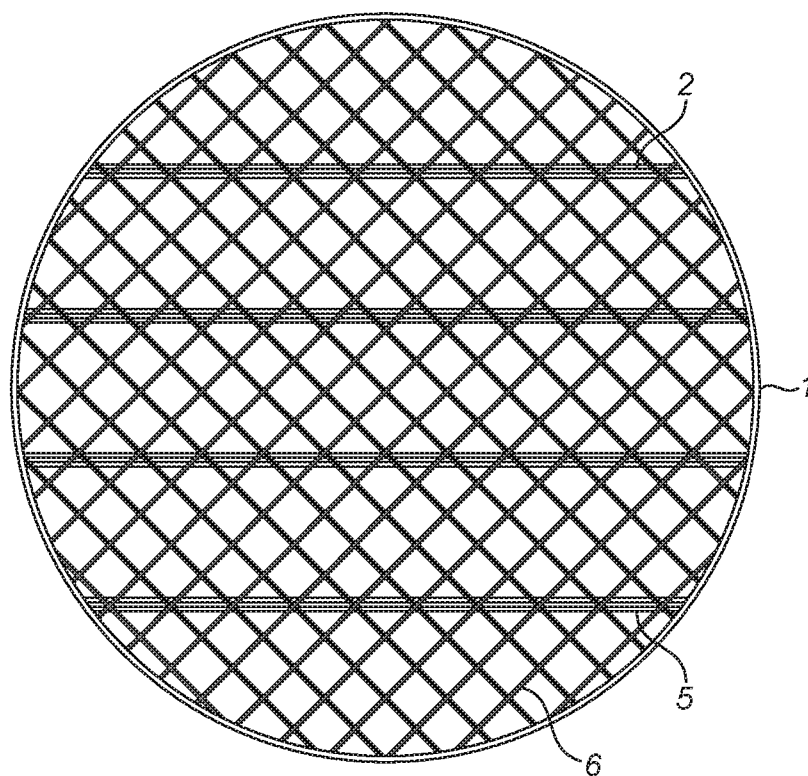


FIG. 3

3 / 4

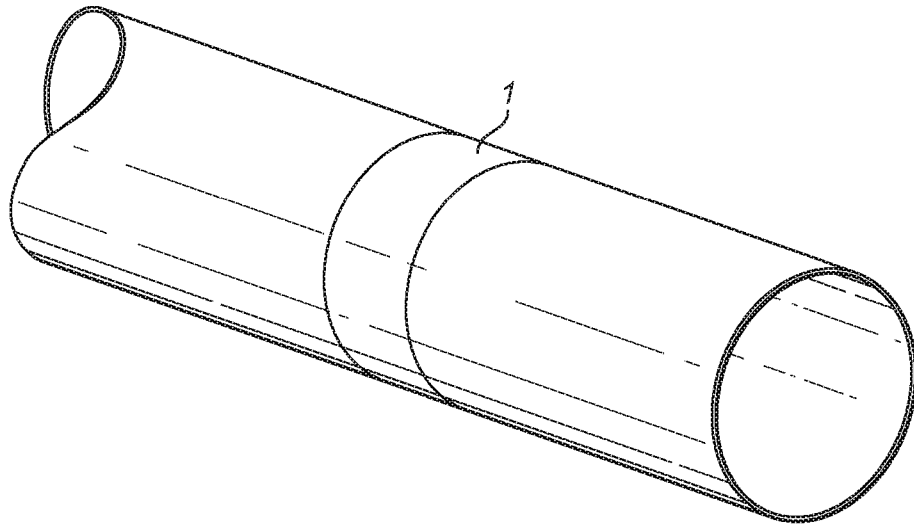


FIG. 4

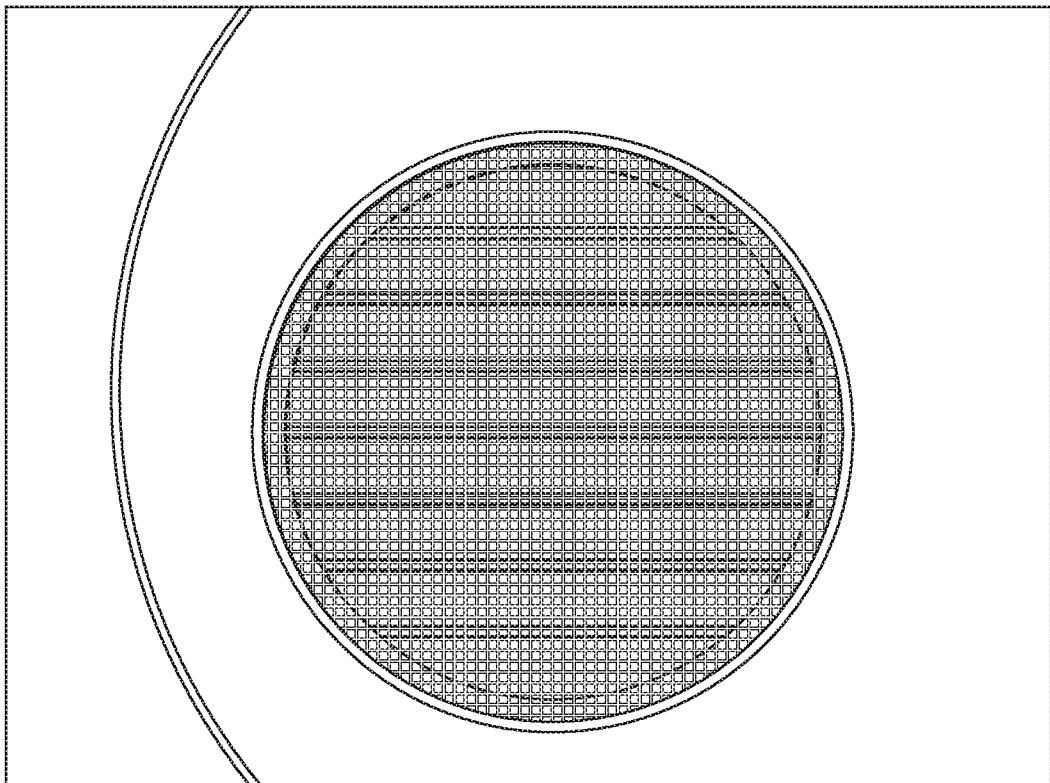


FIG. 5A

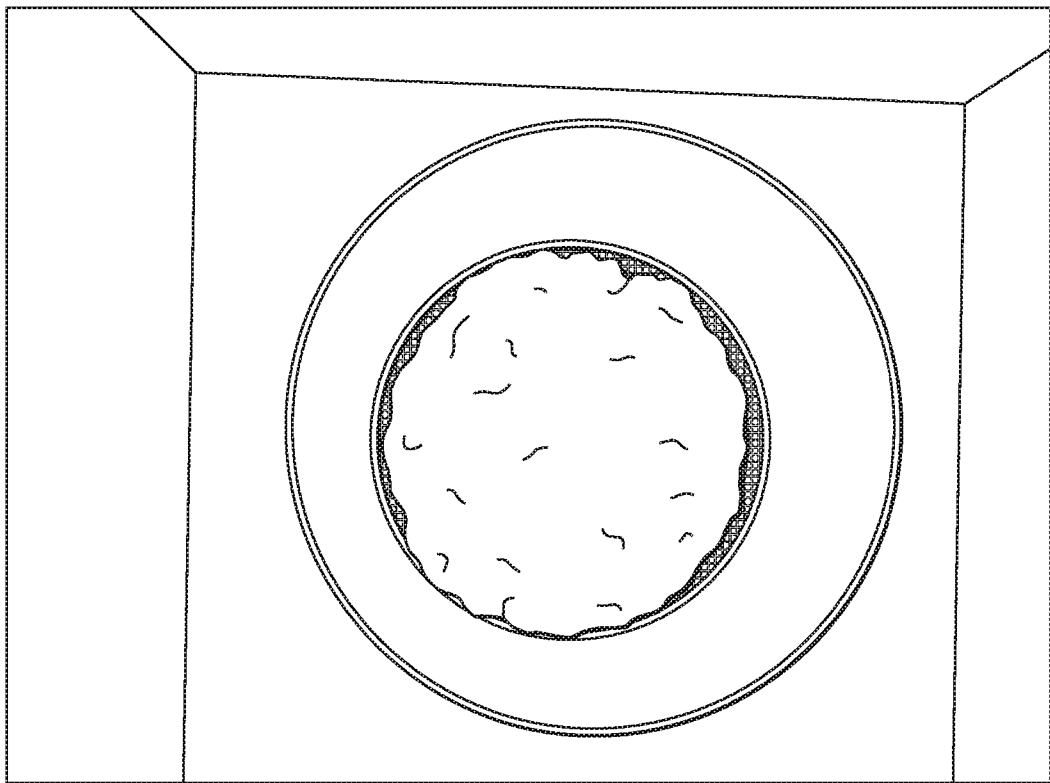


FIG. 5B

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2015/051104

A. CLASSIFICATION OF SUBJECT MATTER
INV. F24F13/08 A62C2/06 F24F11/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F24F A62C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96/12525 A1 (GEUKEN STEFAN [SE]; YLLNER NICLAS [SE]) 2 May 1996 (1996-05-02) the whole document	1-12
X	NZ 513 123 A (FIREPRO SYSTEMS LTD) 28 November 2003 (2003-11-28) the whole document	1-12
X	DE 20 52 683 A1 (AMMON J) 10 May 1972 (1972-05-10) abstract	1-12
X	DE 21 54 841 A1 (DELBAG LUFTFILTER GMBH) 10 May 1973 (1973-05-10) the whole document	1-12
	-/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 June 2015

Date of mailing of the international search report

18/06/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Valenza, Davide

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2015/051104

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/21260 A1 (LORIENT POLYPROD LTD [GB]; MANN ROBERT MCGOWAN [GB]) 29 March 2001 (2001-03-29) the whole document -----	1-12
X	GB 2 334 675 A (KOVACS LAURENCE KEITH [GB]) 1 September 1999 (1999-09-01) the whole document -----	1-12
X	WO 99/22107 A1 (LORIENT POLYPROD LTD [GB]; MANN ROBERT MCGOWAN [GB]) 6 May 1999 (1999-05-06) the whole document -----	1-12
X	FR 2 254 182 A5 (VERSINO JOSEPH [FR]) 4 July 1975 (1975-07-04) the whole document -----	1-12
X	DE 21 50 551 A1 (FLAMEX LTD) 19 April 1973 (1973-04-19) the whole document -----	1-12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB2015/051104

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 13
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.2

Claims Nos.: 13

Claim 13 does not meet the requirements of Article 6 PCT in that the matter for which protection is sought is not clearly defined. Claim 13 contains a reference to the description and the drawings. According to Rule 6.2(a) PCT, claims should not contain such references except where absolutely necessary, which is not the case here. The non-compliance with the substantive provisions is to such an extent that no meaningful search of claim 13 could be carried out at all (Article 17(2) PCT).

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guidelines C-IV, 7.2), should the problems which led to the Article 17(2) declaration be overcome.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2015/051104

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9612525	A1	02-05-1996	AU 3819795 A 15-05-1996
		DE 69533898 D1 03-02-2005	
		DE 69533898 T2 08-12-2005	
		EP 0957997 A1 24-11-1999	
		JP H10507662 A 28-07-1998	
		NO 971795 A 22-05-1997	
		US 5957211 A 28-09-1999	
		WO 9612525 A1 02-05-1996	

NZ 513123	A	28-11-2003	NONE

DE 2052683	A1	10-05-1972	NONE

DE 2154841	A1	10-05-1973	NONE

WO 0121260	A1	29-03-2001	AU 780465 B2 24-03-2005
		AU 7304100 A 24-04-2001	
		CA 2382760 A1 29-03-2001	
		GB 2355188 A 18-04-2001	
		HK 1033915 A1 15-10-2004	
		NZ 517518 A 26-09-2003	
		US 6752714 B1 22-06-2004	
		WO 0121260 A1 29-03-2001	

GB 2334675	A	01-09-1999	NONE

WO 9922107	A1	06-05-1999	AU 750983 B2 08-08-2002
		AU 8740598 A 17-05-1999	
		CA 2306854 A1 06-05-1999	
		DE 69830190 D1 16-06-2005	
		EP 1027517 A1 16-08-2000	
		WO 9922107 A1 06-05-1999	

FR 2254182	A5	04-07-1975	NONE

DE 2150551	A1	19-04-1973	NONE
