



(22) Date de dépôt/Filing Date: 2014/07/10

(41) Mise à la disp. pub./Open to Public Insp.: 2015/01/10

(45) Date de délivrance/Issue Date: 2021/07/13

(30) Priorités/Priorities: 2013/07/10 (US13/938,554);
2013/07/10 (US61/844,563)

(51) Cl.Int./Int.Cl. *B65D 55/02* (2006.01)


(72) Inventeur/Inventor:
NORRIS, JOSEPH, CA

(73) Propriétaire/Owner:
WIRELESS RESIDENT NURSE ALERT TECHNOLOGY,
INC., CA

(74) Agent: AVENTUM IP LAW LLP

(54) Titre : DISPOSITIF D'ENCEINTE VERROUILLABLE

(54) Title: LOCKABLE ENCLOSURE SYSTEM

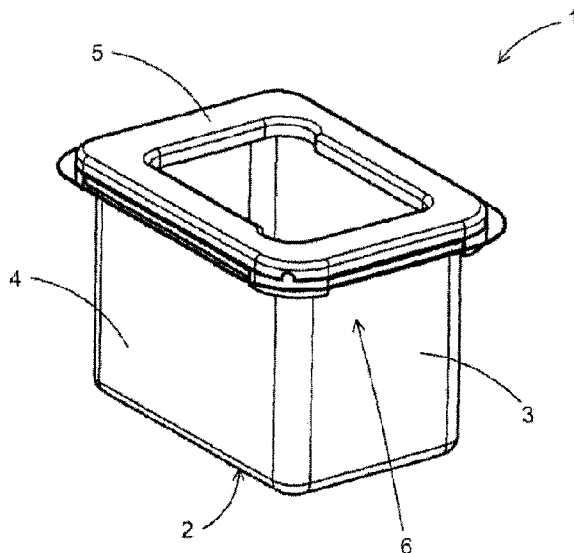

(57) Abrégé/Abstract:

A tamper-proof sealable enclosure system with a lockable lid openable, and re-lockable, through use of a locking tool. The enclosure system comprises a bottom container, which can optionally support a transparent film to provide water-resistance to the container, secured by a cover. The cover is provided with securing members which lockingly engage the bottom container. A lock release tool comprises latching members for engagement with the securing members, and a cam assembly and cam followers which operate on the latching members are operably able to pull the securing members outwards to release the locked engagement. The enclosure system can include a shock and water resistant wireless pager enclosure.

ABSTRACT

A tamper-proof sealable enclosure system with a lockable lid openable, and re-lockable, through use of a locking tool. The enclosure system comprises a bottom container, which can optionally support a transparent film to provide water-resistance to the container, secured by a cover. The cover is provided with securing members which lockingly engage the bottom container. A lock release tool comprises latching members for engagement with the securing members, and a cam assembly and cam followers which operate on the latching members are operably able to pull the securing members outwards to release the locked engagement. The enclosure system can include a shock and water resistant wireless pager enclosure.

LOCKABLE ENCLOSURE SYSTEM

TECHNICAL FIELD

5

The present disclosure relates to a tamper-proof sealable enclosure system. More particularly, the present deisclosure relates to a tamper-proof sealable enclosure system with a lockable lid openable, and re-lockable, through use of a locking tool.

10

BACKGROUND

15

It is well known that enclosures can be used to store many types of items, such as foodstuffs, medicine, or even electronic appliances. However, such enclosures can be subject to tampering when the lid is removed and the contents accessed.

20

As an example, this can occur in a workplace setting, where numerous co-workers share a communal fridge, where food in such a fridge can be easily accessed by any co-worker on site and removed or taken from such enclosures (i.e. food containers).

25

As another example, pocket pagers are placed in enclosures that are waterproof and/or shock-resistant. However, due to security requirements, it is desirable to make such enclosures tamper-proof

30

U.S. Patent No. 5,507,406 discloses a container comprising a receptacle and a lid combination which are formed of

thermoformed plastic such as PVC (polyvinyl chloride), PS (polystyrene), or PET (polyethylene). The receptacle and the lid have sections thereof which nest intimately together to form a seal. The receptacle includes a frangible portion which
5 breaks when the lid is removed.

A further example is U.S. Patent Application Publication No. US2012/0061412 which discloses a tamper-evident container which provides a visual indication to the container's owner if
10 the container has been opened, and then re-closed.

However, such a containers as those described above do not prevent access to the container, and the items therein; they merely indicate to the owner of the container that the
15 container itself has been tampered with or accessed. In essence, the container, and the items therein, do not prevent access from third parties to the containers contents, as these containers are not tamper-proof.

20 A number of attempts have been made to provide enclosures for pocket pagers that are water- and/or shock-resistant.

U.S. Pat. No. 6,031,524 issued Feb. 29, 2002 to Kunert discloses a complicated user-replaceable component assembly,
25 which permits replacement of components and devices such as portable electronic devices. An environmental seal is provided around the components to protect the inner circuitry of the electronic device. Shock-resistant mounting of the display panel beneath the keypad and accommodation for the electric
30 connection between the keypad and the portable electronic device's inner circuitry is provided. However, Kunert requires

the provision of a keypad on the enclosure, which is electrically connected to and substitutes for the keypad of the portable electronic device.

5 U.S. Pat. No. 6,646,864 issued Nov. 11, 2003 to Richardson discloses a protective case for an electronic device that has a touch screen. The touch screen is protected with a membrane adapted to the specific contour and profile of the electronic device and allows the user to use a touch screen interface
10 with no shortcomings. The protective case is further adapted to allow infra-red and other communication signals while the device is secured inside the case. Further, electrical connections can be made through the case without affecting the protection afforded the electronic device inside. The
15 enclosure is in the form of a hinged clamshell device with external ribs that prevent torsional stresses thereon and internal foam inserts for shock-relief. Keypad and touch screen input may be through a sheet of thin plastic disposed within an opening in the enclosure and sealed in water-
20 resistant fashion by the interposition of an O-ring between it and the enclosure opening. Thus, in assembling the enclosure, a number of components must be maintained in position simultaneously, which may be problematic, especially in a high-traffic environment such as at a facility.

25

U.S. Pat. No. 6,659,274 issued Dec. 9, 2003 to Enners discloses a container for a PDA comprising a three dimensional enclosure open at one end and through which the PDA can be inserted. A clear rubber screen is positioned over the touch
30 screen of the PDA, to provide touch point access thereto. The opening in the enclosure can be capped by a cover having an O-

ring across an internal projection, which matingly engages with the open end of the cover to provide a water-resistant seal. The rubber screen is integral with or permanently affixed to the enclosure, which provides significant
5 difficulties in construction and precludes the replacement of the screen in the event of a tear or rupture. As well, the use of clear rubber would appear to significantly increase the cost of construction. Furthermore, the material may not be highly conducive to accurate data entry therethrough, or to
10 visibility of the visual outputs of the pager.

U.S. Pat. No. 6,068,119 issued May 30, 2000 to Derr et al discloses a waterproof protective device for holding an apparatus having an interaction field formed from a
15 dimensionally stable protective housing having lower and upper housing parts. The two parts are releasably hingedly connected together and an inside contour of the protective housing is adapted and constructed to closely receive the apparatus with approximately no play. The protective housing is provided with
20 a transparent elastically flexible operating area of reduced wall thickness to enable an interaction field to be viewed and manipulated while encased within the enclosure. A seal is provided between the two parts in the form of a mating circumferential groove and rim, one or both of which may be
25 provided with lips. Derr et al's apparatus renders it awkward to insert the pager into and remove the pager from the enclosure. A separate pusher must be used to urge the pager out of the enclosure.

30 U.S. Pat. No. 4,836,256 issued Jun. 6, 1989 to Meliconi discloses a shock-proof protective sheath for television

remote controls, which comprises a hollow container and holder element, embodied in shock proof material that substantially matches and hugs the external profile of the appliance it encompasses. It is provided with at least two openings, one of which affords access to the remote control's push buttons and the other of which allows passage of the controlled pulses. The window on the front of the sheath, corresponding to the push buttons of the remote control is covered by a thin plastic material, welded or affixed by adhesive strip to the edges of the opening in the sheath, which allows buttons to be pressed while maintaining water tightness. Again, the permanent attachment of the window within the sheath increases the difficulty and cost of construction and precludes easy replacement of the screen in the event of a tear or a rupture.

U.S. Pat. No. 4,901,852 issued Feb. 20, 1990 to King discloses a protective cover for pagers comprising a film of transparent stretchable material (e.g. 595HC silicon plastic) formed to cover the top, four sides and at least a portion of the bottom of a pager. The cover includes accordion-type pleats, which are positioned to reside adjacent switches, a belt clip and the like, to allow operation thereof. While some modicum of watertightness may be provided, subject to the size and positioning of openings in the enclosure, King's enclosure provides no means of shock-resistance.

U.S. Design Pat. No. D455,730 issued Apr. 16, 2002 to Hakim-Nelson discloses a case of a certain dimension adapted to fit the pager, constructed of an entirely transparent material. Protrusions are provided to accommodate push buttons. Access to the enclosure is through a removable door. Again, there

appears to be only minimal shock-resistance to Hakim-Nelson's enclosure.

PCT International Application No. PCT/FI03/00434 published
5 Dec. 11, 2003 in the name of Bordi discloses a case where an
electronic device includes a watertight and at least partly
transparent case body substantially corresponding to the shape
of the electronic device, the case being open at one end, as
well as the lid watertightly closing the open end of the case
10 body. It also includes an annular intermediate part on which
both the case body and the lid are supported and to which they
can be latched. The case body includes an annular supporting
surface and the lid includes an annular pressure contact area,
so that when closing the lid, the sealing flange is pressed in
15 between the supporting surface and the pressure contact area
thereby closing the space defined by the lid and the case
body.

Finally, CA 2,517,541 issued February 28, 2007 to Lefebvre et
20 al. discloses a shock and water resistant wireless pager
enclosure comprises a bottom having thickened walls, a top lip
and interior foam strips. The top edges of the strips are
coplanar with the top. A transparent film is supported thereon
and on the lip and secured by a cover removably hinged to the
25 bottom by a protrusion at one end, through which a hinge pin
passes. The protrusion and pin are accepted in a trough in the
bottom. The bottom is rounded about the trough to facilitate
the hinged motion. The pin prevents the cover from sliding
laterally from the bottom. The bottom secures the pager, the
30 cover is fixed thereto by screws, pinching the film between
them. A cover loop proximate the protrusion facilitates

opening of the cover and provides a mechanism for attaching a clip. The cover may be multi-coloured for easy identification.; The bottom contains a ribbon strip to facilitate pager removal and/or an RFID device to locate the enclosure and thus the pager and/or the user.

Accordingly, it is desirable to provide an enclosure for a pocket pager or similar device that is water-resistant, of simple construction, and overcomes the disadvantages of the prior art devices noted above, including complexity construction with numerous parts. It is further desirable to provide an enclosure for a pocket pager that is shock-resistant, and also tamper-proof during normal use.

It would therefore be advantageous to have a tamper-proof sealable enclosure system, which can be used for various purposes, with a lockable lid openable through use of a locking tool. It would be still further advantageous to have a tamper-proof sealable enclosure system with a lockable lid openable, and re-lockable, through use of a locking tool. In this regard, the present enclosure system substantially fulfills this need.

25

SUMARY

It is an object to provide an improved, sealable enclosure system with a lockable lid, which can be used for various purposes. In the discussion below, references to "pager" should be understood as including any similar device for which

the same general requirements of water-resistance, shock-proofing, visibility of display and protection against tampering are applicable.

- 5 It is a further object to provide an improved, sealable enclosure system with a lockable lid openable, and re-lockable, through use of a locking tool.

According to one aspect of the present invention, there is
10 provided a lockable enclosure system comprising: a bottom portion with an open top and comprising a pair of opposed first and second side walls and a pair of opposed first and second end walls, each of said walls comprising a substantially planar upper edge region and a perimetric
15 flange, the first and second side walls and the first end wall each further comprising engagement members extending normally from the perimetric flange; a removable cover comprising;
(1) a plurality of securing members each extending from outer edges of the cover, the securing members being adapted to
20 lockably engage the first and second side walls and the first and second end walls; (2) recess regions between the securing members adapted to receive and engage the engagement members; and a lock release tool comprising (a) a base plate configured to be receivable over the removable cover; (b) a plurality of
25 latch members each adapted to engage a respective one of the securing members; (c) a cam assembly and a plurality of cam followers each cam follower being operatively connected to a respective one of the latch members; and (d) a rotatable handle operatively connected to the cam assembly to move the
30 cam followers selectively between a minimum engaged position in which the latch members are secured to the removable cover,

and a maximum engaged position in which pressure exerted by the cam followers moves the latch members to pull the securing members away from the first and second side walls and the first and second end walls to release the removable cover.

5

According to another aspect of the present invention, there is provided lockable enclosure system comprising: a bottom portion with an open top and comprising side walls and end walls, each of said walls comprising a substantially planar upper edge region and a perimetric flange; a removable cover comprising: a plurality of securing members each extending from outer edges of the cover, the securing members being adapted to lockably engage the first and second side walls and the first and second end walls to the perimetric flange; 10 a lock release tool configured to be receivable over the removable cover comprising (a) a plurality of latch members each adapted to engage a respective one of the securing members; (b) a cam assembly and a plurality of cam followers, each cam follower being operatively connected to a respective one of the latch members; and (c) a rotatable handle 20 operatively connected to the cam assembly to move the cam followers selectively between a minimum engaged position in which the latch members are secured to the removable cover, and a maximum engaged position in which pressure exerted by the cam followers moves the latch members to pull the securing 25 members away from the first and second side walls and the first and second end walls to release the removable cover.

According to a further aspect of the present invention, there is provided a lockable enclosure system for a wireless device, 30 the system comprising: (i) an enclosure comprising: (a) a bottom

portion with an open top and comprising a base, a pair of opposing first and second side walls and a pair of opposing first and second end walls, each said wall comprising a substantially planar upper edge region and a perimetric flange, the first and second side walls and the first end wall each further comprising engagement members extending normally from the flange, the second end wall comprising a protrusion defining a recess region, the bottom portion being adapted to receive and releasably secure the wireless device in a snug fit and to cushion the wireless device from shock; (b) a flexible, tear-resistant transparent film capable of accepting and transmitting pressure inputs to the wireless device, the film being configured to extend over and cover the common plane and be supported by the said walls and to completely cover the wireless device; (c) a removable cover having a lower surface adapted to press the film against the said walls to produce a water-resistant seal about the wireless device and comprising: (1) a planar outer surface including a central display aperture; (2) three securing members each extending from a respective one of three outer edges of the cover, the securing members being adapted to lockably engage the first and second side walls and the first end wall of the enclosure; (3) recess regions between the three securing members adapted to receive and engage the engagement members; and (4) a projecting member extending from the fourth outer edge of the cover, adapted to be received in the recess region of the enclosure; and (ii) a lock release tool comprising: (a) a base plate configured to be receivable over the cover; (b) three latch members each adapted to engage a respective one of the three securing members; (c) a cam assembly and a

plurality of cam followers each cam follower being operatively connected to a respective one of the three latch members; and (d) a rotatable handle operatively connected to the cam assembly to move the cam followers selectively between a minimum engaged position in which the latch members are secured to the removable cover of the enclosure, and a maximum engaged position in which pressure exerted by the cam followers moves the latch members to pull the three securing members away from the enclosure walls to release the cover from the enclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

The embodiments of the enclosure system will now be described by reference to the following figures, in which identical reference numerals in different figures indicate identical elements and in which:

Figure 1 is a perspective view of an embodiment of an enclosure for use in an enclosure system.

Figure 2 is an exploded perspective view of the enclosure shown in Figure 1.

Figure 3 is a perspective view of a second embodiment of an enclosure for use in an enclosure system, illustrating a closed top.

Figure 4 is an exploded perspective view of the enclosure

shown in Figure 3.

Figure 5 is a perspective view of a third embodiment of an enclosure for use in an enclosure system.

5

Figure 6 is a perspective view of the enclosure shown in Figure 5 in an opened position.

Figure 7 is an exploded perspective view of the enclosure
10 shown in Figure 5.

Figures 8A and **8B** each illustrate a top perspective view of an embodiment of a lock release tool for use in an enclosure system.

15

Figure 9 is a bottom perspective view of the lock release tool shown in Figures 8A and 8B.

Figure 10A is a partly exploded perspective view of the lock
20 release tool shown in Figures 8A and 8B.

FIGURE 10B is a plan view of the release tool shown in Figure 8, with the handle removed.

25 **Figure 11A** is an exploded perspective view of the lock release tool shown in Figures 8A and 8B.

Figure 11B illustrates a rotational element for use in the lock release tool shown in FIG. 11A.

Figure 12 illustrates rotational features lock release tool shown in FIG. 11A.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring now to **FIGS. 1 to 4**, an embodiment of an enclosure is shown, designed to be used as an enclosure system, in conjunction with the lock release tool, discussed in relation to **FIGS. 8 to 11** below.

Referring to **Figures 1** and **2**, there is shown an embodiment of a enclosure, shown generally at **1**, comprising an open-topped bottom container **3** and a removable plastic film **140** and a cover **5** having a central opening **7** defined therein. **Figures 3** and **4** illustrate a further embodiment of a variation of the cover **9** having a solid upper surface, rather than embodiment of the cover **5** shown in **Figures 1** and **2** having the central opening **7** defined therein.

The bottom container **3** and cover **5, 9** in an exemplary embodiment, can be injection molded out of a suitable thermoplastic such as an acetal copolymer plastic such as is manufactured under the Trade-mark DELRIN, though it will be understood that numerous other materials could be utilized.

With reference to **Figure 1**, the bottom container **3** has a

thickened bottom **2** and side **4** and end walls **6**. Preferably, the thickness of all three structures is the same. The bottom container **3** will also have a perimetric flange **13**, and engagement members **11** at each of the four corners of container

5 **3**.

As shown in **Figures 1** and **2**, above container **3**, waterproof membrane **140** is provided, which can be configured as shown so as to be secured over the container **3** at an upper edge

10 thereof, and thereafter trimmed to size, if necessary. The waterproof membrane **140** is a thin gauge transparent plastic sheet having dimensions at least equal that of the length and width of the lip **8** of the bottom container **3** shown in **Figure 2**, where the side walls **4** and end walls **6** terminate at the

15 open end of the container **3**. Preferably, the plastic film **140** is die cut to conform and correspond to the outer perimeter of the lip **8** of the container **3**, with apertures **12** therein corresponding to the position of securing members **10** on the cover **3** (shown in **Figure 4**), through which the securing

20 members **17** of the cover **3** are inserted. Suitable plastic film material may be static cling clear vinyl manufactured by Gerber Scientific Products Inc. as model No. AP50823 and having a thickness of 0.007". However, so long as the plastic film **140** is sufficiently flexible, any plastic film material

25 would be satisfactory.

The cover **5** (or **9** as shown in the embodiment shown in **Figures 3** and **4**), as best seen in **Figure 4**, comprises an outer perimeter **15** and securing members **17** extending downwardly, so

30 that on closing container **3**, they securely engage perimetric

flange **13**, to seal the container **3** in a closed position, in which membrane **140** is securely retained in the proper position, to provide water-resistance to the container **3**. Between adjacent securing members **17**, recesses (not shown) are configured to receive engagement members **11**, as shown in **Figure 4**, when the cover **5, 9** is secured to the container **3**.

Referring now to **FIGS. 5 to 7**, a further embodiment of an enclosure is shown, designed to be used as an enclosure system, in conjunction with a lock release tool, discussed in relation to **FIGS. 8 to 11** below.

FIGS. 5 and 6 are perspective views of the enclosure of this embodiment, in closed and open positions respectively; and **FIG. 7** is an exploded perspective view of the enclosure. Enclosure 110 comprises a substantially rectilinear container 120, having side walls 122 and end walls 123, upper edge region 124, a perimetric flange 125, and engagement members 126 at each of the four corners of container 120. Recess 190 provides for optional divider 193 for securing identification or tracking elements (not shown). Above container 120, waterproof membrane 140 is provided, which can be configured as shown so as to be secured over corresponding profiled areas at upper edge region 124, and thereafter trimmed to size.

Cover 150 comprises outer perimeter 151, top surface 152, and inner perimeter 153 defining aperture 154. As best seen in **FIGS. 6 and 7**, on three sides of cover 150, securing members 155 extend downwardly, so that on closing enclosure 120, they securely engage perimetric flange 125, to hold enclosure 110 in a closed position, in which membrane 140 is securely

retained in the proper position, to provide water-resistance to enclosure 110. Between adjacent securing members 155, recesses 156 are configured to receive engagement members 126. On the fourth side of cover 150, protrusion 159 having
5 longitudinal bore 160 is provided, which is configured to be received within recess 129 in container 120 (see FIG. 7). A pin (not shown) can be inserted through bore 160 to secure protrusion 159 within recess 129.

Referring now to **FIGS. 8 to 12**, a lock release tool in an
10 embodiment of the enclosure system is shown.

Figures 8A, 8B and **9** are top and bottom perspective views of lock release tool **200**, which is configured to be used with the enclosure **1** shown in **Figures 1 to 4**, or with the enclosure **110** shown in **FIGS. 5 to 7**. **Figures 10A** and **11A** are exploded
15 perspective views of lock release tool **200**.

As shown in **FIGS. 8A** and **8B**, lock release tool **200** comprises handle **240** that is operatively connected to cam assembly **230**. **FIG. 8A** illustrates the handle **240** removed from the cam assembly **230**, while **FIG 8B** illustrates the handle **240** attached
20 to cam assembly **230**.

With reference to **Figures 8A** and **8B**, the handle **240** can be secured to the cam assembly **230** by means of a screw **280**, and such screws can also be utilized to secure cover **250** to base
25 plate **210**. It will be understood that other variations as to the method of securement used can be effected, as would be apparent to a worker skilled in the art.

As shown in **FIG. 9**, lock release tool **200** comprises base plate **210**, having protruding portion **212**. As shown in **FIG. 10A**, lock release tool **200** further comprises cam assembly **230** and cam followers **232**, which are operatively connected to
5 corresponding latch members **220**, though it will be understood that variations as to the number of latch members and cam followers utilized could be effected.

Base plate **210** is configured to be compatible with the
10 dimensions and configuration of cover **5** or **9** of the enclosure embodiments shown in **FIGS 1-4**, or with the dimensions and configuration of enclosure **110** (see **FIG. 5**).

Cam assembly **230** is operatively connected to handle **240**. Cam followers **232** are in central contact with cam assembly **230**, and are also operatively connected to the base plate **210** by suitable means, such as pin elements **236**, as shown in **FIGS. 10B** and **11**. In **FIG. 10B**, handle **240** has been removed for the
15 sake of clarity to illustrate that when the cam assembly **230** is rotated (via the handle **240**), cam followers **232** separate and expand beyond the perimeter of the base plate (not shown).

FIG 12 illustrates the rotational mechanism of the cam
25 assembly **230** in greater detail, in which the cam followers have been removed for greater clarity. Cam assembly **230** includes a central handle base **275** that is attached to wheel **300**, which includes a series of grooves **305** arranged in a pin-wheel configuration around the central handle base **275**. Each
30 groove **305** has a seat **330** at one extremity thereof. Beneath the wheel **300**, on the base plate **210**, are a plurality of

tracks **310**, which mirror the plurality of tracks **315** etched into the lower surface of cover **250** (see **FIG 11A**). Each track **310** (and **315**) is oriented radially towards the centre of the wheel **300**, i.e. each track **310** is perpendicular to the tangentially circumferential grooves **305**.

The combination of a pin element **236**, inserted into a rotatable bushing **237** (see **FIG. 11A**), is inserted into each groove **305**. The bushing **237** can be made of a material that endures wear and tear, but also allows the bushing **237** to rotate about the pin element **236**, as the bushing **237** moves through the groove **305** when the wheel **300** is rotated. As an example, the bushing can be made out of brass.

As the wheel **300** rotates, the pin element **236** moves along the respective track **310**, between a position proximal **325** to the central handle base **275** and a position distal **335** to the central handle base **275**, thereby causing the cam follower **232** to move along a similar path to that of the pin element **236**.

When the pin element **236** is at the distal end **335** of the track **310**, the bushing **237** reaches the end of the groove **305** and "sits" in seat **330**. This prevents the cam assembly from rotating backwards when the tool **200** pushes out the securing elements **(17, 155)** from the enclosure, as the securing elements **(17, 155)** have resiliency. When the bushing **237** sits in seat **330**, the handle **240** "locks" in a position such that the cam followers **232** are separated.

Each seat **330** is located at the extremity of each groove **305** that corresponds to the cam assembly position in which the cam followers **232** separate.

- 5 Cover **250** is secured over base plate **210** and the cam mechanism, such that handle **240** is accessible from above cover **250** through aperture **252**, and without interference with the operational movement of latch members **220**.
- 10 It will be understood that the enclosure system can utilize different configurations of covers from that described above, such as a cover hinged on one end or side of the container **3**, provided that if, for example, a hinged variation of the cover is used, the number of cam followers **232** will match that of
- 15 the number of latch members **220**.

With reference to operation of the lock release tool with enclosure embodiments shown in **FIGS 1-4**, lock release tool **200** is placed over cover **5** of container **3** (as shown in **Figures 1**

20 and **2**) or solid cover **9** of container **3** (as shown in **Figures 3** and **4**), and base plate **210** located by means of protruding portion **212**, which is configured to be compatible with aperture **7** in the embodiment of the cover **5** of container **3** shown in **Figures 1** and **2**. Each of latch members **220** is aligned

25 with one of securing members **17**. Latches **222** engage with the lower edges of securing members **17**; latches **222** can be of any suitable configuration, such as V-shaped as shown, or a chamfered or otherwise rounded shape, configured to be compatible with a desired configuration of lower edges of

30 securing members **17**. Handle **240** can then be turned so that cam assembly **230** acts on cam followers **232**, which moves latch

members **220** outwards away from base plate **210**. This movement applies a pulling force simultaneously to each of securing members **17** by means of latches **222**, such that each of securing members **17** is released from perimetric flange **13** (as shown in **Figure 2**), and cover **5,9** can thereby be lifted from container **3** to open it and allow access to its contents. To close and lock the cover **5,9** again to the container **3**, the handle **240** can be turned in opposite direction, to re-engage the securing members **17** to the perimetric flange **13**.

In a further embodiment, the cover **5, 9** and container **3** can have every other side of an opposed configuration with respect to the combination of latches **222** and securing members **17** utilized. In such a configuration the cover **5,9** would have, for example, side A & C as latches **222** and sides B & D having securing members **17**. The container **3** would then have, in such a configuration, sides A & C having securing members **17** and sides B & D having latches **222**. Of course, it will be understood that the combinations, and locations, of these utilized could be varied, as desired.

With reference to operation of the lock release tool with enclosure embodiments shown in **FIGS 5-7**, lock release tool **200** is placed over cover **150** of enclosure **110**, and base plate **210** located by means of protruding portion **212**, which is configured to be compatible with aperture **154** in cover **150** of enclosure **110**, so that each of latch members **220** is aligned with one of securing members **155**. Latches **222** engage with the lower edges of securing members **155**; latches **222** can be of any suitable configuration, such as V-shaped as shown, or a chamfered or otherwise rounded shape, configured to be compatible with a desired configuration of lower edges of

securing members 155. Handle 240 can then be turned so that cam assembly 230 acts on cam followers 232, which moves latch members 220 outwards away from base plate 210. This movement applies a pulling force simultaneously to each of securing members 155 by means of latches 222, such that each of securing members 155 is released from perimetric flange 125, and cover 150 can thereby be lifted from container 120 to open enclosure 110 and allow access to its contents.

10 CONCLUSION

The simple design of the enclosure system, including the use of relatively universally available or readily manufactured parts renders the manufacture of the enclosure system straightforward and thus inexpensive. In addition, the enclosure system can be used for various storage purposes, such as food storage, storage of items such as jewelry and electronic items. The enclosure system can also be made of material that can be fire resistant as well, or water-proofed material.

The relatively few parts and innovative hinging mechanism, and in particular the features of the enclosure system, permit the development of a water-resistant and shock-resistant enclosure for a pager or similar device that can be quickly and easily opened and re-closed in the event of any necessary maintenance operation on the pager, obviating any complicated positioning procedures during assembly or re-assembly.

Despite these operational efficiencies, the enclosure system provides substantial water- and shock-resistance, which

greatly extends the life of the pagers in the harsh and unforgiving environment of the facility.

It will be apparent to those skilled in this art that various modifications and variations may be made to the embodiments disclosed herein without departing from scope of the enclosure system as defined by the claims that follow.

Other embodiments consistent with the enclosure system will become apparent from consideration of the specification and the practice of the enclosure system disclosed therein.

10 Accordingly, the specification and the embodiments are to be considered exemplary only, with the scope of the enclosure system being disclosed by the following claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A lockable enclosure system comprising:

5

i) a bottom portion with an open top and comprising a pair of opposed first and second side walls and a pair of opposed first and second end walls, each of said walls comprising a substantially planar upper edge region and a perimetric flange, the first and second side walls and the first end wall each further comprising engagement members extending normally from the perimetric flange;

10

15

ii) a removable cover comprising:
(1) a plurality of securing members each extending from outer edges of the cover, the securing members being adapted to lockably engage the first and second side walls and the first and second end walls;

20

(2) recess regions between the securing members adapted to receive and engage the engagement members; and

25

iii) a lock release tool comprising:
(a) a base plate configured to be receivable over the removable cover;
(b) a plurality of latch members each adapted to engage a respective one of the securing members;
(c) a cam assembly and a plurality of cam followers each cam follower being operatively connected to

30

a respective one of the latch members; and
(d) a rotatable handle operatively connected to the
cam assembly to move the cam followers
selectively between a minimum engaged position
in which the latch members are secured to the
removable cover, and a maximum engaged position
in which pressure exerted by the cam followers
moves the latch members to pull the securing
members away from the first and second side
walls and the first and second end walls to
release the removable cover.

2. The lockable enclosure system according to claim 1, wherein
the removable cover further comprises a planar outer surface
including a central aperture.

3. The lockable enclosure system according to claim 1, wherein
the removable cover comprises a solid planar outer surface.

4. The lockable enclosure system according to any one of claims
1 to 3, wherein the container system further comprises a
flexible, tear-resistant transparent film configured to
extend over and be supported by the said walls and to
completely cover the bottom portion.

5. A lockable enclosure system comprising:

- i) a bottom portion with an open top and comprising side
walls and end walls, each of said walls comprising a
substantially planar upper edge region and a
perimetric flange;

ii) a removable cover comprising a plurality of securing members each extending from outer edges of the cover, the securing members being adapted to lockably engage the first and second side walls and the first and second end walls to the perimetric flange; and

iii) a lock release tool configured to be receivable over the removable cover comprising

(a) a plurality of latch members each adapted to engage a respective one of the securing members;

(b) a cam assembly and a plurality of cam followers, each cam follower being operatively connected to a respective one of the latch members; and

(c) a rotatable handle operatively connected to the cam assembly to move the cam followers

selectively between a minimum engaged position in which the latch members are secured to the removable cover, and a maximum engaged position in which pressure exerted by the cam followers moves the latch members to pull the securing members away from the first and second side walls and the first and second end walls to release the removable cover.

6. The lockable enclosure system according to claim 5, wherein the lock release tool further comprises a base plate, the base plate being configured to be receivable over the removable cover.

7. The lockable enclosure system according to claim 5 or 6,

wherein the side walls comprise a pair of opposed first and second side walls, and the end walls comprise a pair of opposed first and second end walls.

5 8. The lockable enclosure system according to any one of claims 5 to 7, wherein the removable cover further comprises a planar outer surface including a central aperture.

9. The lockable enclosure system according to any one of claims
10 5 to 7, wherein the removable cover comprises a solid planar outer surface.

10. The lockable enclosure system according to any one of
claims 5 to 9, wherein the side walls and the end walls each
15 further comprise engagement members extending normally from the perimetric flange.

11. The lockable enclosure system according to claim 10,
wherein the removable cover further comprises recess regions
20 between the securing members adapted to receive and engage the engagement members of the perimetric flange.

12. The lockable enclosure system according to any one of
claims 5 to 11, wherein the container system further
25 comprises a flexible, tear-resistant transparent film configured to extend over and be supported by the said walls and to completely cover the bottom portion.

13. A lockable enclosure system for a wireless device, the
30 system comprising:

(i) an enclosure comprising:

5 (a) a bottom portion with an open top and comprising a base, a pair of opposing first and second side walls and a pair of opposing first and second end walls, each said wall comprising a substantially planar upper edge region and a perimetric flange, the first and second side walls and the first end wall each further comprising engagement members extending
10 normally from the flange, the second end wall comprising a protrusion defining a recess region, the bottom portion being adapted to receive and releasably secure the wireless device in a snug fit and to cushion the wireless device from shock;

15 (b) a flexible, tear-resistant transparent film capable of accepting and transmitting pressure inputs to the wireless device, the film being configured to extend over and cover the common plane and be supported by
20 the said walls and to completely cover the wireless device;

25 (c) a removable cover having a lower surface adapted to press the film against the said walls to produce a water-resistant seal about the wireless device and comprising:

(1) a planar outer surface including a central display aperture;

30 (2) three securing members each extending from a respective one of three outer edges of the cover, the securing members being adapted to lockably engage the

first and second side walls and the first end wall of the enclosure;

(3) recess regions between the three securing members adapted to receive and engage the engagement members;
5 and

(4) a projecting member extending from the fourth outer edge of the cover, adapted to be received in the recess region of the enclosure;

10 and

(ii) a lock release tool comprising:

(a) a base plate configured to be receivable over the
15 cover;

(b) three latch members each adapted to engage a respective one of the three securing members;

20 (c) a cam assembly and a plurality of cam followers each cam follower being operatively connected to a respective one of the three latch members; and

(d) a rotatable handle operatively connected to the cam
25 assembly to move the cam followers selectively between a minimum engaged position in which the latch members are secured to the removable cover of the enclosure, and a maximum engaged position in which pressure exerted by the cam followers moves the latch
30 members to pull the three securing members away from

the enclosure walls to release the cover from the enclosure.

14. The lockable enclosure system according to claim 13,
5 wherein the projecting member of the cover includes a bore adapted to receive a hinge pin securable within the recess region of the enclosure.

15. The lockable enclosure system according to claim 14,
10 wherein the hinge pin is removably securable.

16. The lockable enclosure system according to any one of claims 13 to 15, further comprising reinforcements secured within the bottom portion and substantially adjacent to each
15 said wall.

17. The lockable enclosure system according to claim 16, wherein the reinforcements comprise compressible material.

20 18. The lockable enclosure system according to claim 17, wherein the compressible material is a foam strip.

19. The lockable enclosure system according to claim 16, wherein the reinforcements comprise thickened sections of
25 the bottom portion.

20. The lockable enclosure system according to any one of claims 13 to 19, wherein the bottom portion of the enclosure further comprises a sub-enclosure adapted to receive an
30 additional device.

21. The lockable enclosure system according to claim 20,
wherein the additional device is selected from a passive
location identification element and an active tracking
device.

5

22. The lockable enclosure system according to any one of
claims 1 to 21, wherein when the cam followers are in the
maximum engaged position, the cam assembly is in a locked
position thereby preventing the securing members from
10 returning to the enclosure walls

23. The lockable enclosure system according to any one of
claims 1-4, 6 and 13-21, wherein:

a) the cam assembly includes a central handle base
15 attached to a wheel, the wheel positioned at a central
position in the base plate, the wheel comprising at
least three grooves arranged in a pinwheel pattern
around the central handle base, each groove having a
seat at an extremity thereof;

b) the base plate includes three tracks pointing radially
20 towards the centre of the base plate, each track
positioned within each one of the grooves and
perpendicular thereof;

c) a rotation element consisting of a pin element inserted
25 into a bushing, is placed within each groove such that
the pin element is positioned along the track within
the groove;

d) each cam follower is operatively connected to a
respective pin element;

30

such that when the wheel rotates, the pin element moves from a position proximal the central handle base to a position distal to the central handle base, and when the pin element is at a position distal to the central handle base, the
5 bushing sits in the seat of the groove thereby locking the cam assembly.

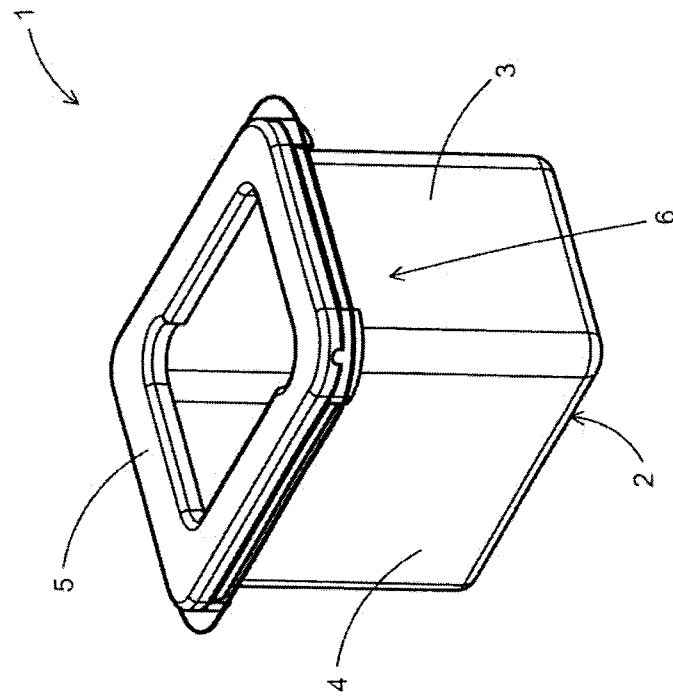


FIGURE 1

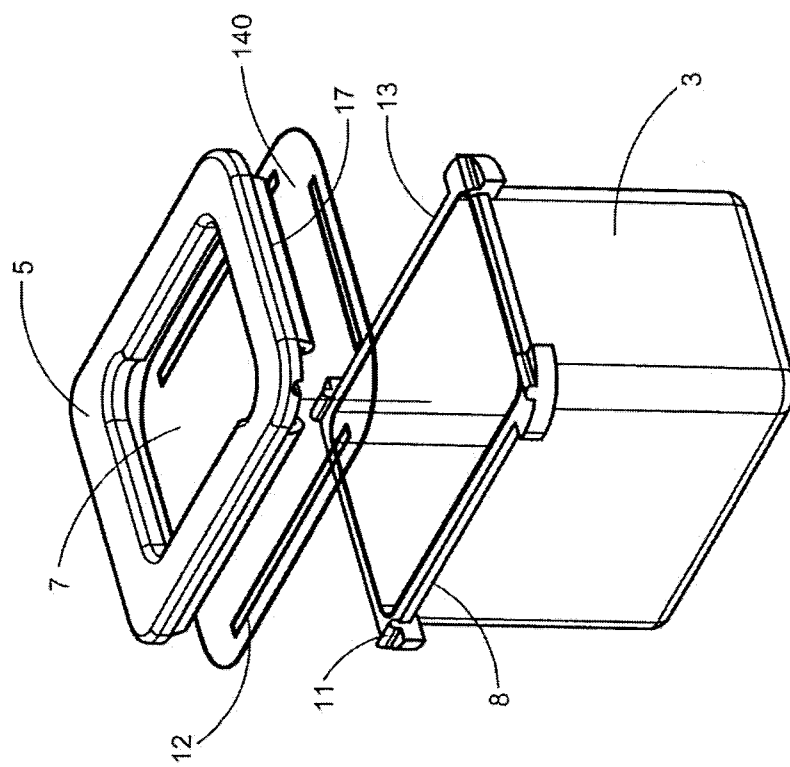


FIGURE 2

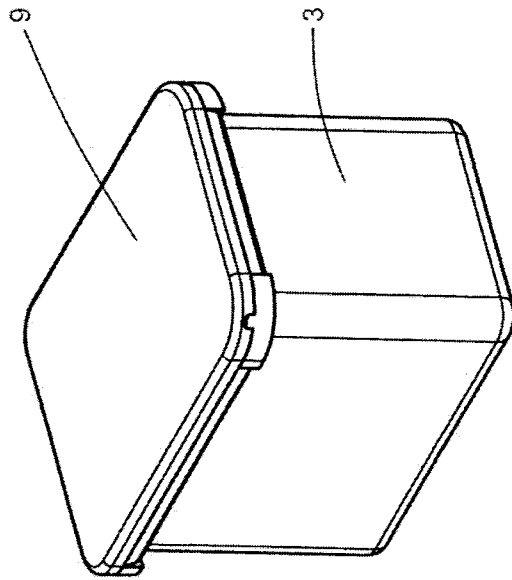


FIGURE 3

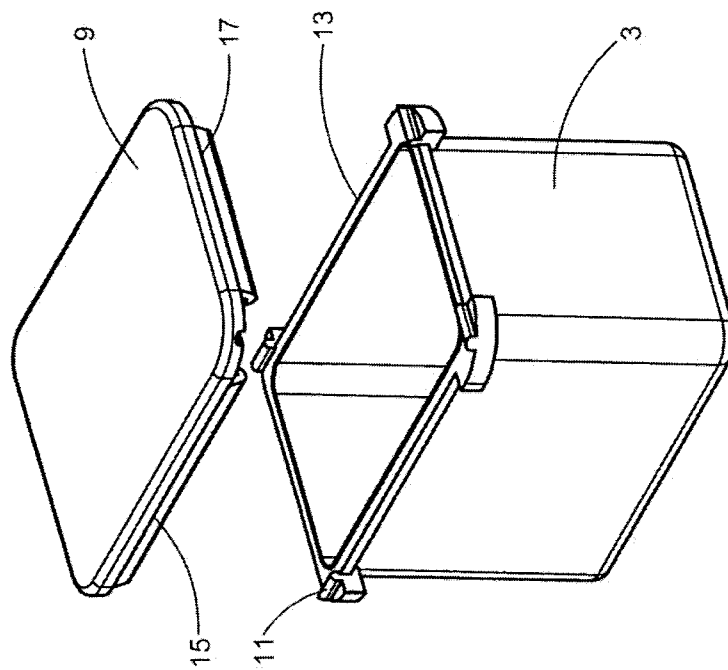


FIGURE 4

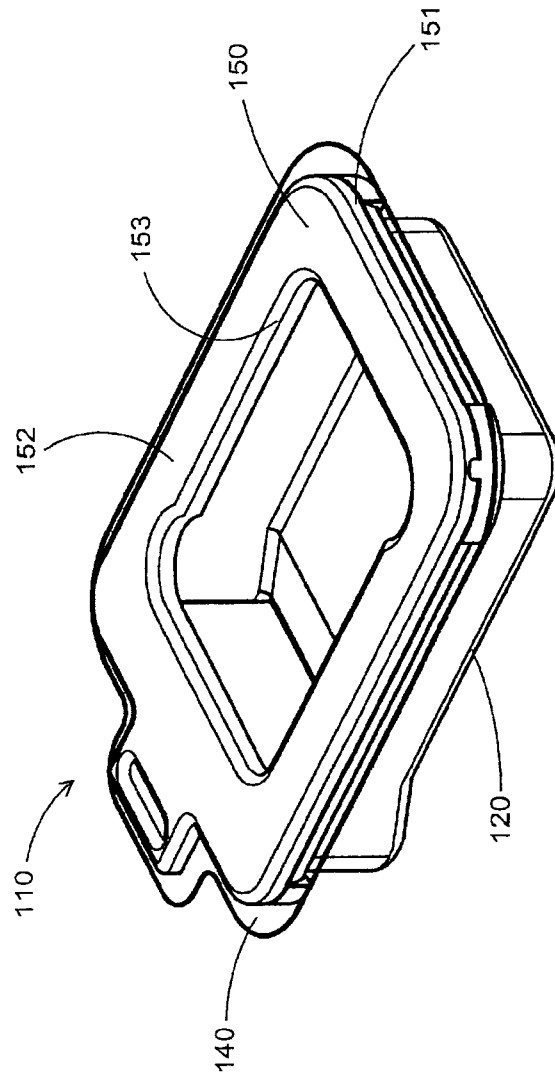


FIGURE 5

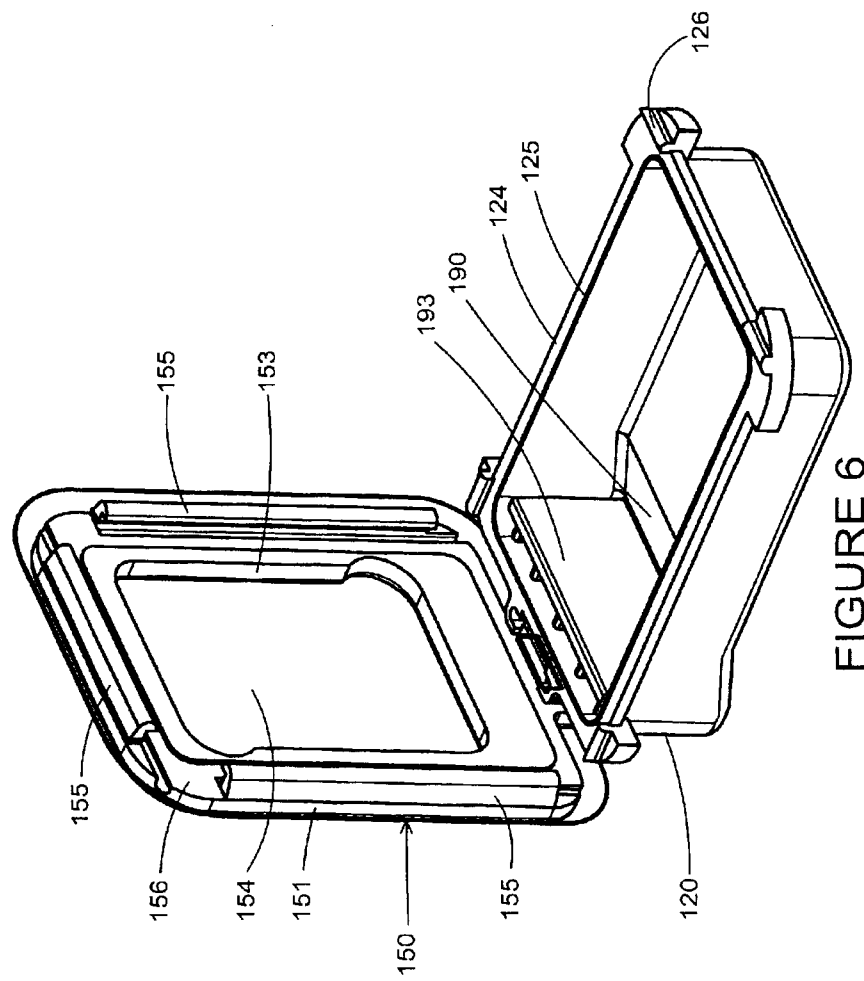


FIGURE 6

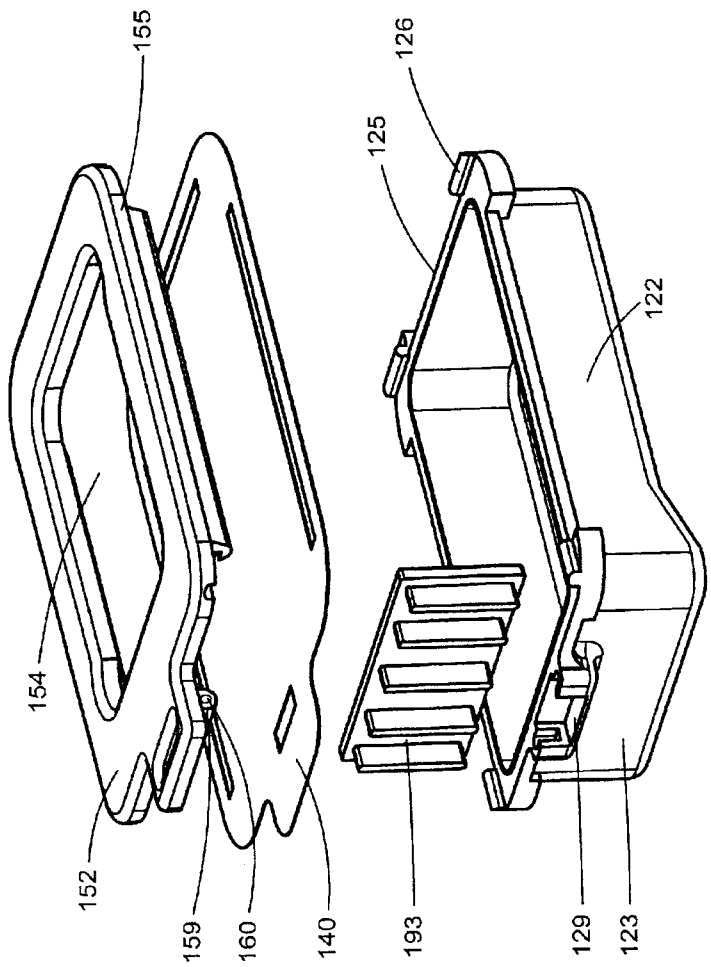


FIGURE 7

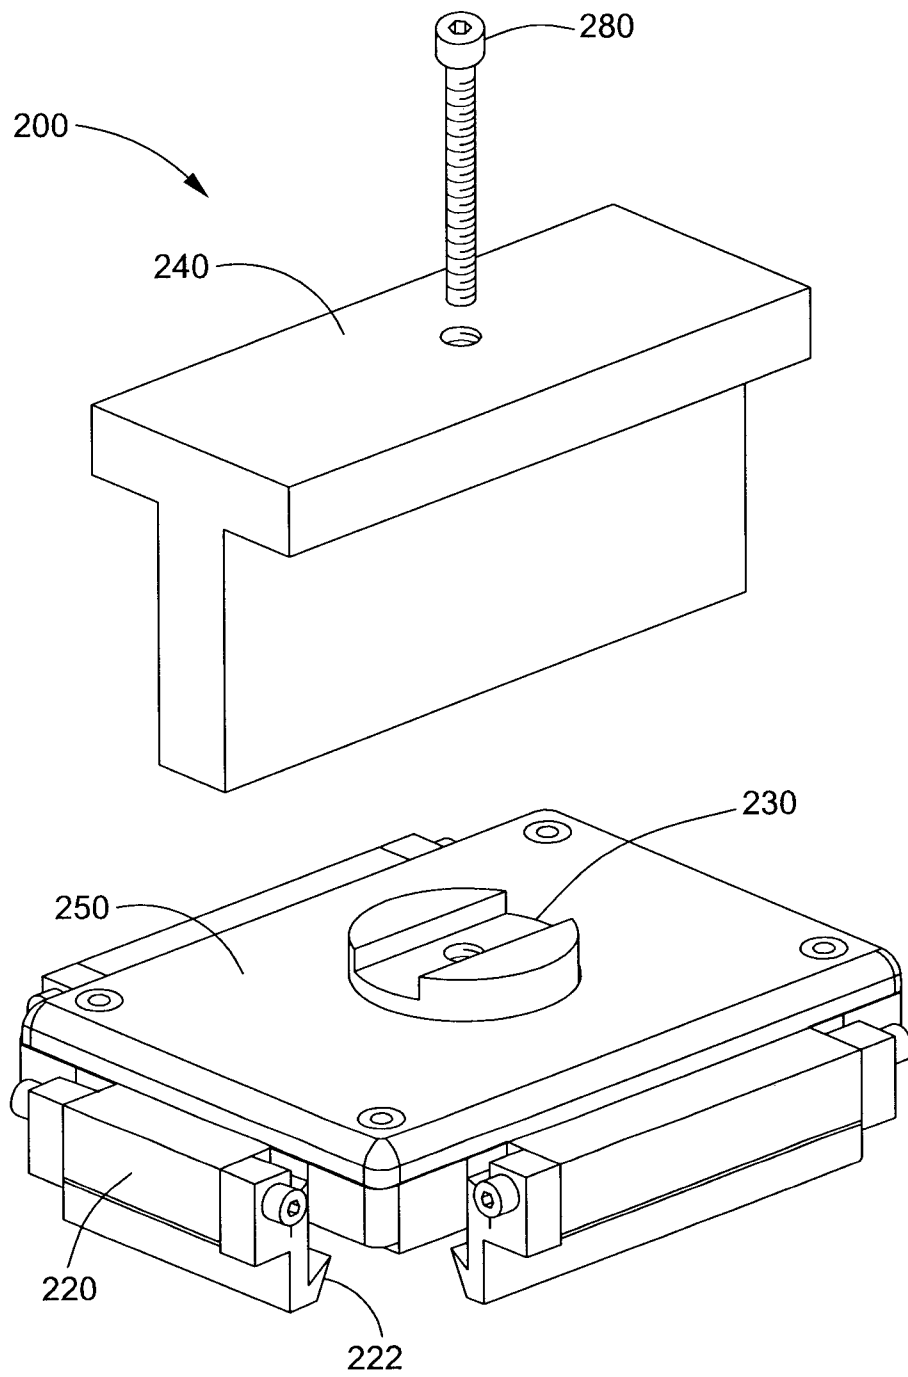


FIGURE 8A

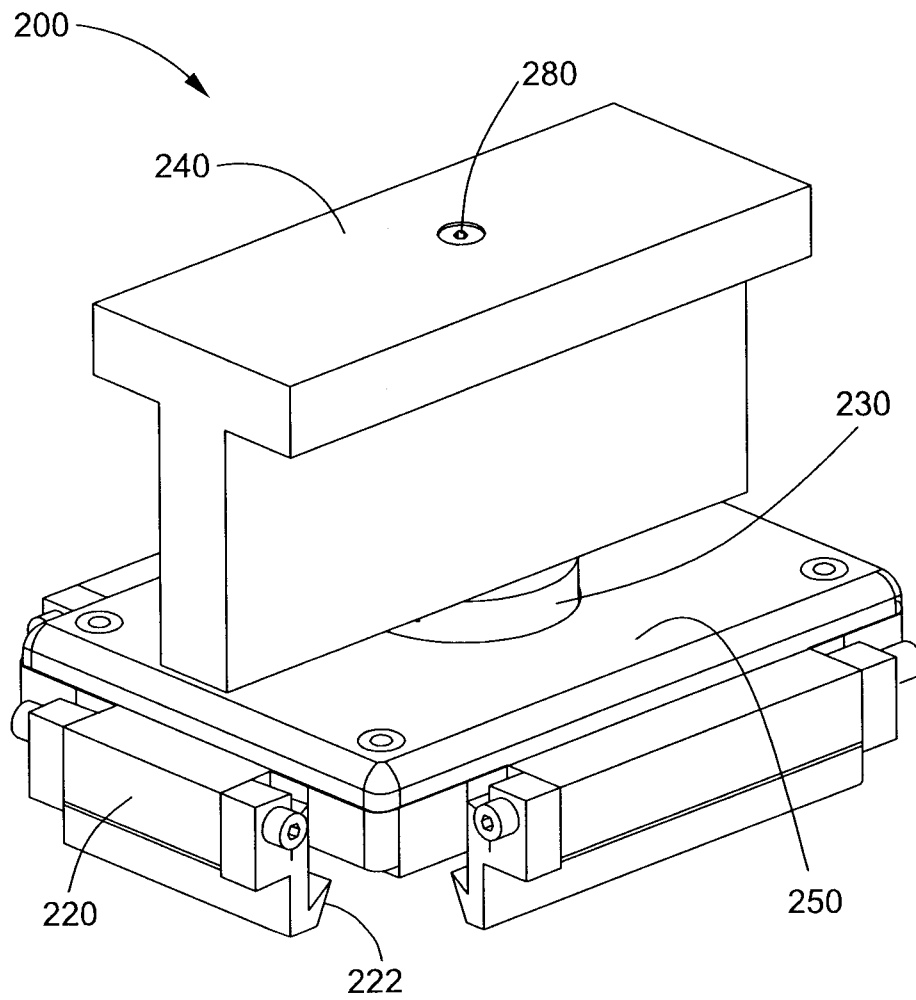


FIGURE 8B

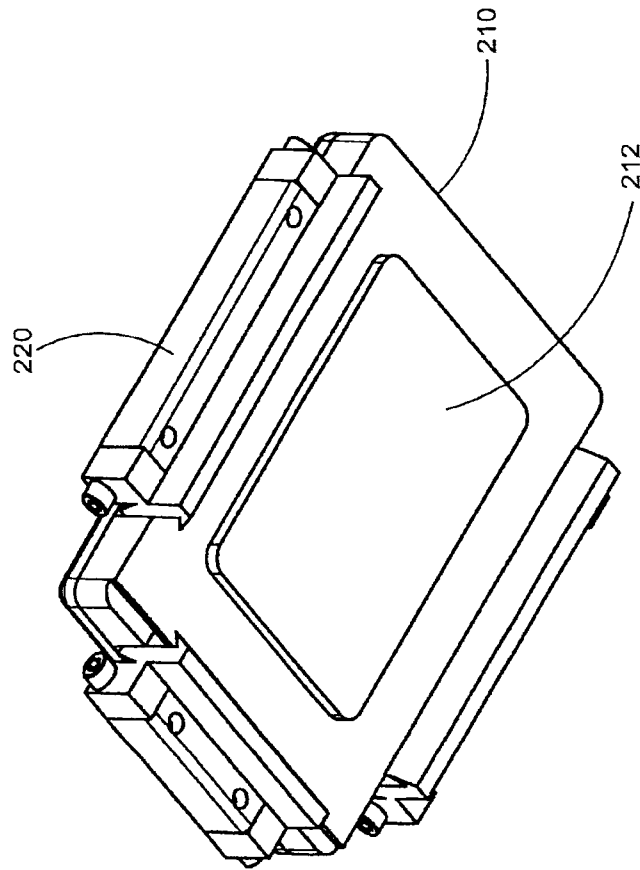


FIGURE 9

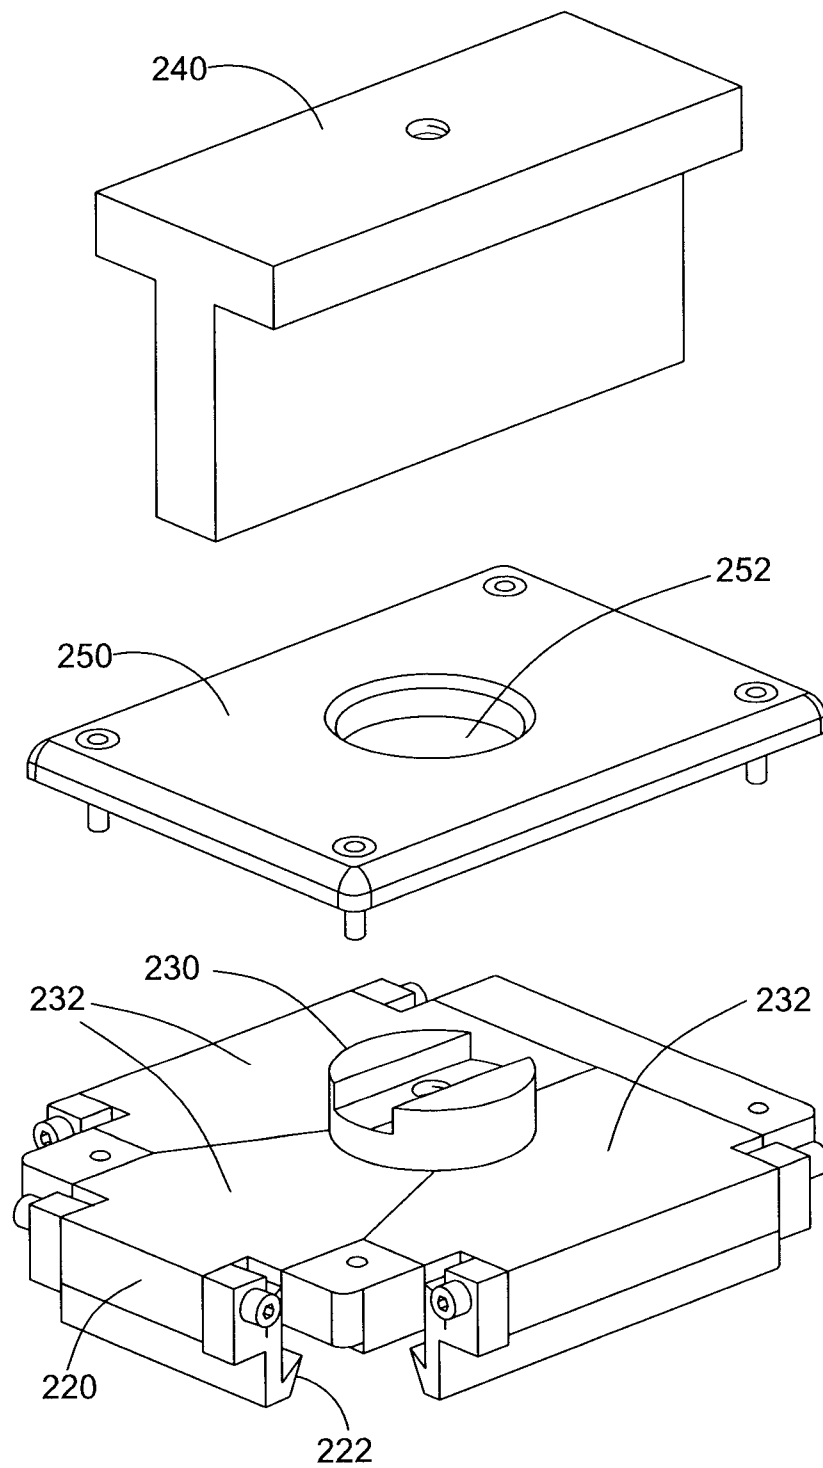


FIGURE 10A

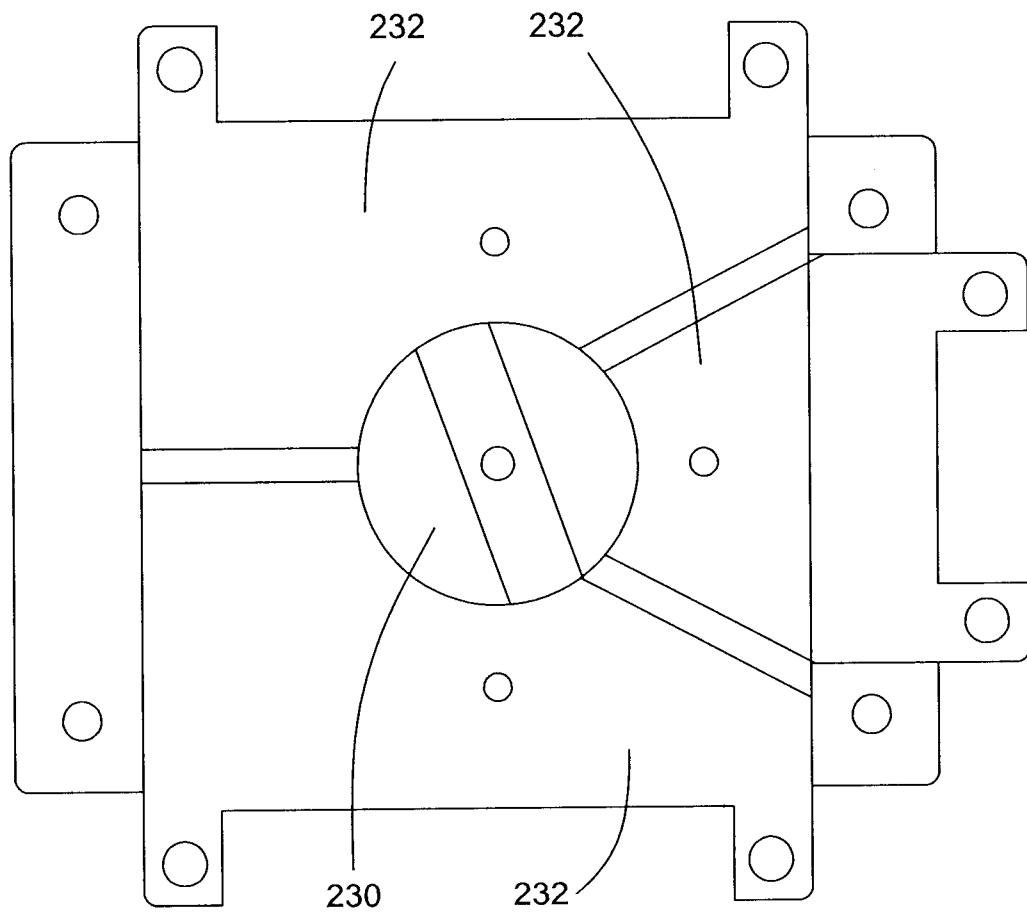
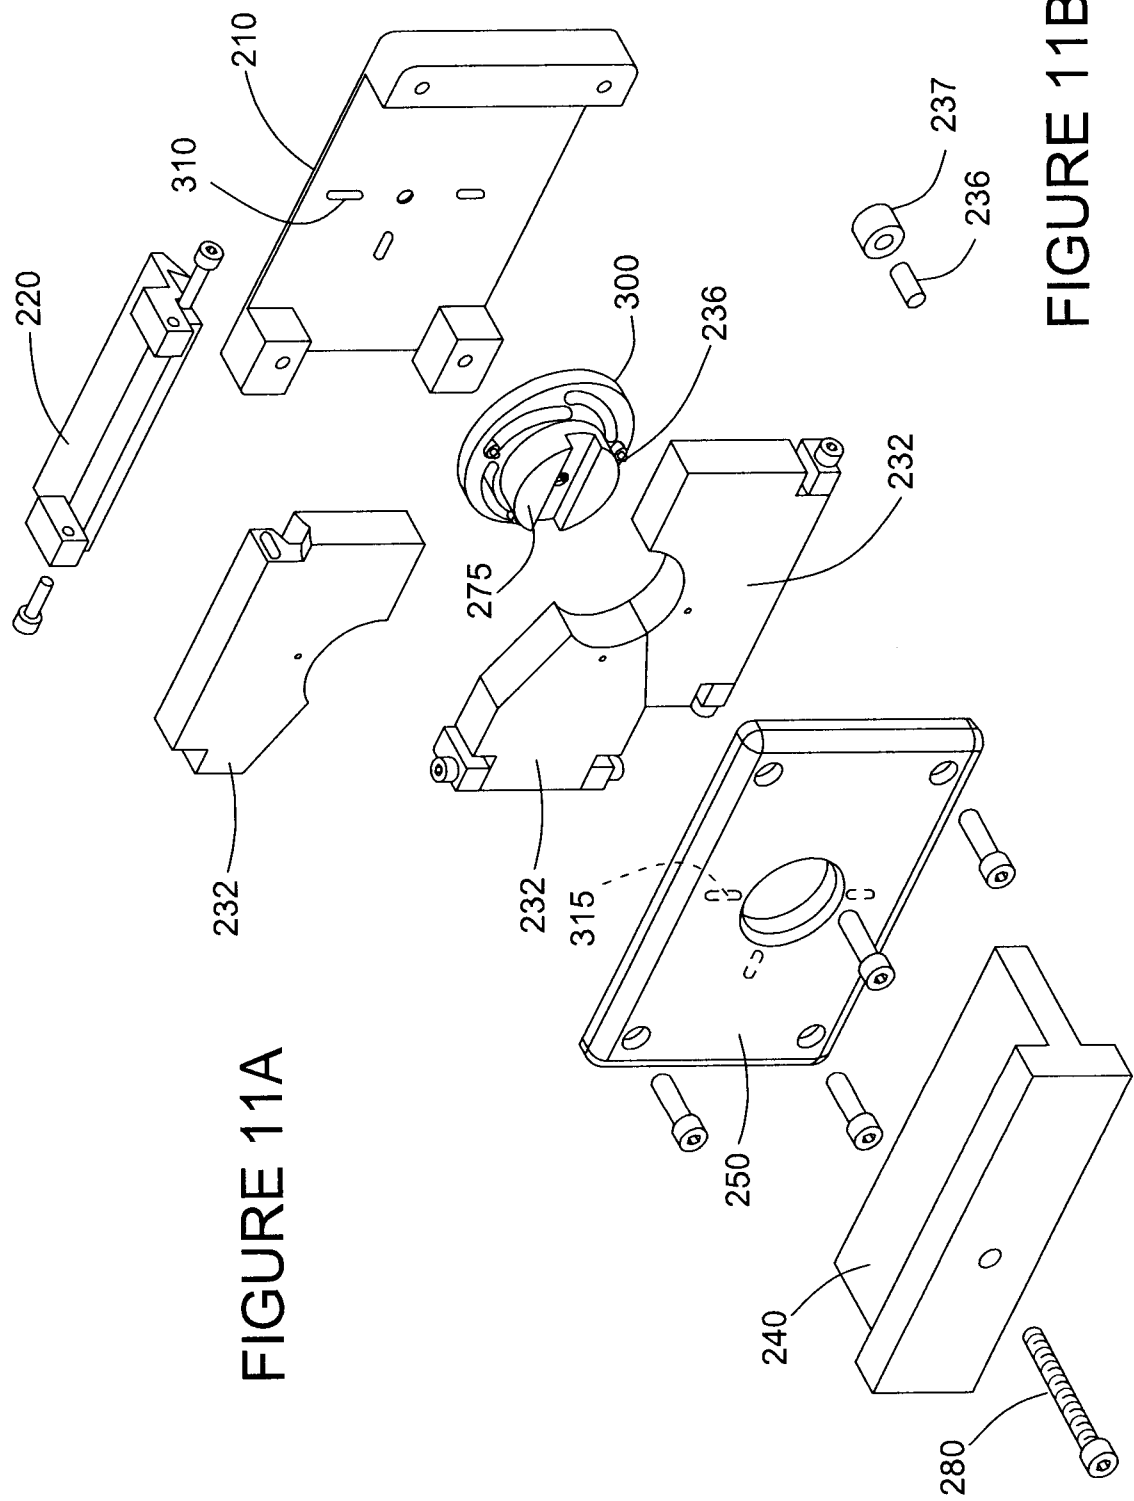


FIGURE 10B



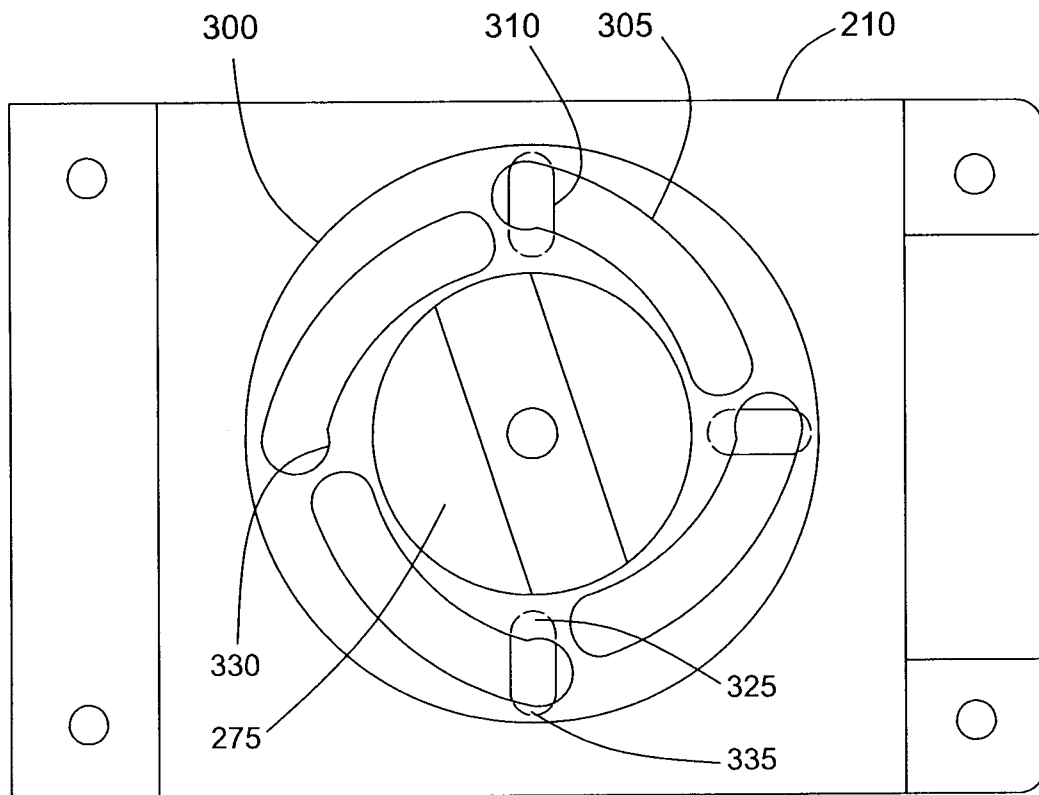


FIGURE 12

