



(22) **Date de dépôt/Filing Date:** 2015/05/29

(41) **Mise à la disp. pub./Open to Public Insp.:** 2016/07/19

(45) **Date de délivrance/Issue Date:** 2020/03/24

(30) **Priorité/Priority:** 2015/01/19 (US62/104,888)

(51) **Cl.Int./Int.Cl.** *B61K 9/08* (2006.01)


(72) **Inventeur/Inventor:**
MESHER, DAREL, CA

(73) **Propriétaire/Owner:**
TETRA TECH, INC., US

(74) **Agent:** ROBIC

(54) **Titre : APPAREIL DE COMMANDE DE PUISSANCE D'EMISSION DE LUMIERE ET METHODE**

(54) **Title: LIGHT EMISSION POWER CONTROL APPARATUS AND METHOD**

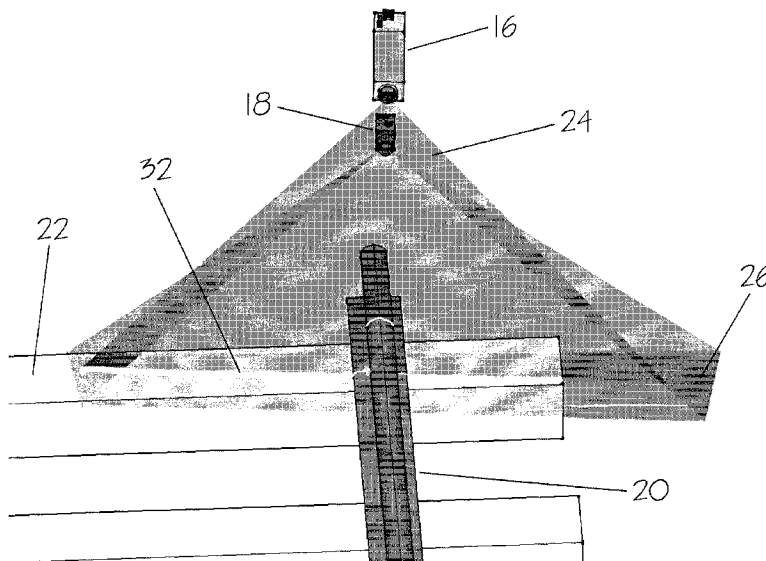

(57) **Abrégé/Abstract:**

A system and method for adjusting light emitter output for a railway track inspection system based on data feedback from one or more sensors.

ABSTRACT

A system and method for adjusting light emitter output for a railway track inspection system based on data feedback from one or more sensors.

LIGHT EMISSION POWER CONTROL APPARATUS AND METHOD

TECHNICAL FIELD

- 5 **[0002]** This disclosure relates to the field of railway track inspection and assessment systems.

BACKGROUND

- 10 **[0003]** Rail infrastructure owners are motivated to minimize staff exposure to unsafe environments and replace the time consuming and subjective process of manual crosstie (track) inspection with objective and automated processes. The motivation is driven by the desire to improve rail safety in a climate of increasing annual rail traffic volumes and increasing regulatory reporting requirements. Objective, repeatable, and accurate track inventory and condition assessment also provide owners with the innovative capability of
- 15 implementing comprehensive asset management systems which include owner/region/environment specific track component deterioration models. Such rail specific asset management systems would yield significant economic benefits in the operation, maintenance and capital planning of rail networks. A primary goal of such automated systems is the non-destructive high-speed assessment of railway track
- 20 infrastructure. Track inspection and assessment systems currently exist including, for example, Georgetown Rail (GREX) Aurora 3D surface profile system and Ensco Rail 2D video automated track inspection systems. Such systems typically use coherent light emitting technology, such as laser radiation, to illuminate regions of the railway track bed during assessment operations.
- 25 **[0004]** The effect of variations in surface properties of railroad tracks and surrounding surfaces has a significant impact on light levels reflected from these surfaces and subsequently detected by 3D sensors. Reflected light levels entering the sensors are not always optimum due to variations surface color (light or dark colored surfaces) or texture

for example. Incorrect lighting levels can cause the 3D track surface profile measured by a 3D sensor to be distorted or imperceptible, affecting the measured profile accuracy.

[0005] What is needed, therefore, is a way to control the intensity of light emitters in real time in order to achieve the clearest 3D profiles possible.

5

SUMMARY

[0006] A system for inspecting a railway track is disclosed wherein the system includes a power source (e.g., a gas powered engine providing electrical power, a generator or a battery); an adjustable intensity light emitting apparatus powered by the power source for
 10 emitting light energy toward a railway track; and a sensor for sensing the emitted light from the light emitting apparatus and acquiring three dimensional image data of the railway track to be stored in a data storage apparatus. The image data is preferably elevation (or range) and intensity data gathered using a 3D sensor. The system also includes at least one processor for controlling the optical power output of the light
 15 emitting apparatus, to adjust and compensate for changes in track bed color and texture variations and improve the ability to measure track bed profiles by 3D sensors. This ability to adjust the optical power output based on track surface characteristics provides improved accuracy railway track elevation and intensity measurements over a much wider range of real world conditions.

20 [0007] In one example the track bed surface is predominantly dark colored due, for example, to the placement of new wooden ties or localized grease contamination from lubricating devices, and the intensity of the light emitting source illuminating the track bed must be increased to reduce the number of undetectable reflected light areas in the profile measured by the 3D sensors. For typical 3D sensors, such dark areas which cause
 25 low intensity reflections can result in elevation zero value errors. Elevation zero value errors in 3D elevation and intensity profiles negatively impact the ability to generate accurate 3D elevation and intensity maps of the track bed surface thereby reducing the accuracy of subsequent inspection and assessment analyzes.

Robic Docket No. 17271-0003

[0008] In a related example the surface of the track bed is light colored due, for example, to the placement of concrete ties or localized light colored surface contaminations from fine soils due to mud holes, and the intensity of the light emitting source illuminating the track bed must be decreased to reduce the number of out-of-range reflected light areas in the profile measured by the 3D sensors. For typical 3D sensors, such high intensity reflections from light colored areas result in sensor saturation or out-of-range intensity conditions which produce invalid elevation measures. High intensity based out-of-range errors in 3D elevation and intensity profiles diminish the ability to generate accurate 3D elevation and intensity maps thereby reducing the accuracy of subsequent track bed inspection and assessments.

[0009] To compensate for undesirable light conditions, a system is disclosed for inspecting a railway track, the system comprising a power source; a light emitting apparatus powered by the power source for emitting light energy toward a railway track; a data storage apparatus in communication with a processor; at least one sensor for sensing reflected light emitted from the light emitting apparatus and acquiring three dimensional range and intensity data of the railway track to be stored in the data storage apparatus; and the processor wherein the processor includes an algorithm for adjusting the power of the light emitting apparatus, the algorithm comprising the steps of (a) calculating one or more intensity histograms for the at least one sensor channel; and (b) adjusting a light emitter control output value based at least in part on the calculated one or more intensity histograms; and a controller in communication with the processor wherein the controller is configured to control the light intensity of the light emitting apparatus in response to the light emitter control output value.

[0010] In certain embodiments, the algorithm for adjusting the power of the light emitting apparatus further comprises the step of calculating one or more aggregate intensity histograms for a target zone. In some example embodiments, the target zone further comprises at least one surface zone including one or more members selected from the group consisting of a gage tie zone, a rail zone, a field tie zone, and a field ballast zone. In some example embodiments, the algorithm for adjusting the power of the light emitting apparatus further comprises the steps of calculating a median histogram for the

target zone and adjusting a light emitter control output value based at least in part on the calculated median histogram.

[0011] The algorithm for adjusting the power of the light emitting apparatus may further comprise the steps of calculating aggregate zero value error counts for the target zone and
5 adjusting a light emitter control output value based at least in part on the calculated aggregate zero value error counts. Alternatively or additionally, the algorithm for adjusting the power of the light emitting apparatus further comprises the steps of calculating aggregate out-of-range error counts for the target zone and adjusting a light emitter control output value based at least in part on the calculated aggregate out-of-range
10 error counts.

[0012] The algorithm for adjusting the power of the light emitting apparatus may further comprise the step of determining whether the number of zero value errors is greater than a zero value error count number threshold. Additionally or alternatively, the algorithm for adjusting the power of the light emitting apparatus further comprises the step of
15 determining whether the number of out-of-range errors is greater than a range error count number threshold.

[0013] What is also disclosed herein is a method of inspecting a railway track bed using a light source with real time adjustable light emission, the method comprising the steps of emitting light from a light source toward a railway track bed; detecting light reflected
20 from the railway track bed using at least one sensor; calculating at least one intensity histogram for the at least one sensor channel; adjusting a light emitter control output value; and controlling the light intensity of the light emitting apparatus in response to the adjusted light emitter control output value. The step of calculating at least one intensity histogram may further comprise the step of calculating aggregate intensity histograms for
25 a target zone. The step of calculating at least one intensity histogram may further comprise the step of calculating a median histogram for the target zone. The step of adjusting a light emitter control output value may further comprise the step of adjusting a light emitter control output value based on the calculated median histogram.

[0014] The method described herein may further comprising the steps of calculating zero value errors for at least one sensor channel and determining whether the number of zero value errors are greater than a zero error count number threshold. Alternatively or additionally, the method may further include the steps of calculating out-of-range errors for at least one sensor channel and determining whether the number of out-of-range errors is greater than a range error count number threshold. In some embodiments, the step of calculating aggregate intensity histograms further comprises calculating aggregate intensity histograms for a plurality of surface zones. In certain embodiments, the step of calculating a median histogram further comprises calculating a median histogram for a plurality of surface zones.

According to another aspect, a system for inspecting a railway track is provided. The system comprises a power source; a light emitting apparatus powered by the power source for emitting light energy toward a railway track; at least one sensor for sensing reflected light emitted from the light emitting apparatus and acquiring three-dimensional data of the railway track; an a processor in communication with the at least one sensor. The processor includes an algorithm for adjusting the power of the light emitting apparatus, the algorithm comprising the steps of: a. analyzing the three-dimensional data from the at least one sensor; and b. adjusting a light emitter control output value based at least in part on the analyzed three-dimensional data. The system also includes a controller in communication with the processor wherein the controller is configured to control the light intensity of the light emitting apparatus in response to the light emitter control output value.

According to another aspect, a method of inspecting a railway track bed using a light source with real time adjustable light emission is provided. The method comprises the steps of: a) emitting light from a light source toward a railway track bed; b) detecting light reflected from the railway track bed using a least one sensor; c) measuring surface elevation of the railway track bed and light intensity of the reflected light based on the detected light to provide elevation and intensity data; d) analyzing the elevation and intensity data; e) adjusting a light emitter control output value based on the analyzed

elevation and intensity data; and f) controlling the light intensity of the light source in response to the adjusted light emitter control output value.

Yet according to another aspect, a method of inspecting a railway track bed using a light source with real time adjustable light emission. The method comprising the steps of: a) emitting light from a light source toward a railway track bed; b) sensing light reflected from the railway track bed; c) determining railway track bed surface conditions based on the sensed light reflected from the railway track bed; and d) adjusting the intensity of light emitted from the light source based on the railway track bed surface conditions.

[0015] The summary provided herein is intended to provide examples of particular disclosed embodiments and is not intended to limit the scope of the invention disclosure in any way.

BRIEF DESCRIPTION OF THE DRAWINGS

15

[0016] Further features, aspects, and advantages of the present disclosure will become better understood by reference to the following detailed description, appended claims, and accompanying figures, wherein elements are not to scale so as to more clearly show the details, wherein like reference numbers indicate like elements throughout the several views, and wherein:

20

[0017] FIG. 1 shows a graphical relationship between the control port input versus output power for a typical light emission source;

25

[0018] FIG. 2 shows 3D sensor intensity profile for reflected light levels for dark, light and normal surfaces, respectively for the profile of the same arbitrary stepped elevation object;

[0019] FIG. 3 shows a somewhat schematic diagram of a fixed output light line projector being used to illuminate a normal colored object and the resulting typical reflected normal line intensity detected by a 3D sensor;

[0020] FIG. 4 shows a somewhat schematic diagram of a fixed output light line projector being used to illuminate a light colored object and the resulting typical reflected high line intensity detected by a 3D sensor;

5 [0021] FIG. 5 shows a somewhat schematic diagram of a fixed output light line projector being used to illuminate a dark colored object and the resulting typical reflected low line intensity detected by a 3D sensor

[0022] FIG. 6 shows a block diagram of a light emission source power control system;

[0023] FIG. 7 shows track bed transverse zones defined and used by a light emission power control process to characterize profile intensity data based on the location where
10 the data was gathered; and

[0024] FIG. 8 shows a flow chart illustrating a light emission power control algorithm used by a light emission power control process.

[0025] The figures are provided to illustrate concepts of the invention disclosure and are not intended to limit the scope of the invention disclosure to the exact embodiments
15 provided in the figures.

DETAILED DESCRIPTION

[0026] Various terms used herein are intended to have particular meanings. Some of these terms are defined below for the purpose of clarity. The definitions given below are meant to cover all forms of the words being defined (e.g., singular, plural, present tense, 5 past tense). If the definition of any term below diverges from the commonly understood and/or dictionary definition of such term, the definitions below control.

[0027] "Track", "Railway track", "track bed" or "railway track bed" is defined herein to mean a section of railway including the rails, ties, components holding the rails to the ties, and ballast material.

10 [0028] "Sample" or "profile" is defined herein to include a discrete measurement of reflected light during a specifically defined time period.

[0029] A "processor" is defined herein to include a processing unit including, for example, one or more microprocessors, an application-specific instruction-set processor, a network processor, a vector processor, a scalar processor, or any combination thereof, 15 or any other control logic apparatus now known or later developed that is capable of performing the tasks described herein, or any combination thereof.

[0030] The phrase "in communication with" means that two or more devices are in communication with one another physically (e.g., by wire) or indirectly (e.g., by wireless communication).

20 [0031] Wide fan-angle line generators used in track inspection and assessment systems are typically high power Class IV, non-visible infrared laser sources (nominally wavelength of 808nm with a maximum power output of 10 watts in this example embodiment). These laser devices typically have a power control input port, allowing the direct control of the emitted laser optical output power. Based on the control signals 25 applied to the control port, the radiated laser power can be adjusted from 0 to 100 percent of the rated maximum output power. Adjustments to this control port are substantially instantaneous. A graphical representation of a typical laser control port input versus laser output power is shown in FIG. 1.

[0032] In a preferred embodiment, the uniform intensity line generated by a wide fan-angle light source is projected onto a surface of a track bed and is reflected and sensed by one or more sensors. The intensity detected by the sensors is a complex function of the characteristics of the surface illuminated by the light source. Of particular importance are the surface properties of texture, uniformity, and color. Changes in surface physical properties result in changes in reflected light levels. Light levels deviating substantially from mid-range negatively impact 3D elevation measurements. Low light levels result in missing or zero values for sections of a measured 3D elevation profile, and excessively high light levels can cause sensor saturation and introduce intensity out-of-range errors that result in measured elevation range errors.

[0033] It is not uncommon to have wide variations in the physical surface characteristics affecting reflected light levels during track surveys. These variations can be compensated for by adjusting the radiated light optical power (intensity) based on the track surface conditions on a near real-time basis during survey data collection. To this end, disclosed herein is a method of measuring surface elevation of a track bed using at least one 3D sensor, analyzing measured elevation and intensity data (for elevation zero value errors, out-of-range errors, and intensity distribution) and adjusting light emitter control voltage based on such analysis to improve measured 3D elevation data quality.

[0034] The effect of variations in surface properties (surface color in this example) on light 3D profile line intensity is demonstrated in FIGS. 2 through 5. Dark color surfaces reflect less energy (representing undetectable elevations within the measured profiles which are reported as elevation “Zero Value Errors”) as shown in the dark color surface image 10 in FIG. 2, and light color surfaces reflect more light for a given source radiated power (intensity) as shown in the light color surface image 12 in FIG. 2. A normal or average color surface is shown as the normal color surface image 14 in FIG. 2. The effect of surface color on reflected light levels is demonstrated for various crosstie colors in FIGS. 3 through 5. These figures include a light source 16 (e.g., a laser), a 3D sensor 18, a rail 20 and a tie 22. The light source 16 casts a light beam having a wide fan-angle 24. The 3D sensor 18 has a wide field of view 26 as shown in FIG. 3, and a 3D profile 28 can be seen where the light strikes the surface of the tie 22 and rail 20. FIG. 3 shows

moderate or normal light conditions resulting in a normal and desirable 3D profile line 28 intensity. FIG. 4 shows a resultant low 3D profile line 30 intensity when dark colored objects are encountered. Finally, FIG. 5 shows an example in which a high 3D profile 32 line intensity is acquired because of the presence of light colored objects.

5 [0035] FIG. 6 shows a light emitter power control system 34 including an enclosure 36 that includes a light source 16 and a 3D sensor 38. A processor 40 is shown for processing data collected from the 3D sensor wherein such data is stored in one or more sensor data storage devices 42. A light power controller 44 in communication with the processor 40 controls the output optical power of the emitted light based on the analysis
10 of data compiled by the 3D sensor 38. The light emitter power control system 34 preferably includes a collection of independent processes operating concurrently during active survey data collection. Processes are defined to interface, control and stream the surface elevation and surface reflection intensity data for each applicable 3D sensor. These data streams are segmented into fixed length and width 3D elevation and intensity
15 maps as separate data files, where each data file is preferably defined for example as 1.6m wide and 30.5m long segments of track for each applicable 3D sensor.

[0036] A primary light emitter power control process running on the processor 40 monitors the 3D sensor elevation and intensity data streams in real time and preferably calculates aggregate 3D surface intensity histograms, an elevation Zero Value Error
20 count, and an Out-of-Range Error count. The mathematical combination or aggregation of individual scan line intensity values, longitudinally in the direction of survey, is an efficient method to produce representative intensity measures required for real-time laser power control. To maximize efficiency and processing speed, intensity values from the same lateral offset, representing the same scan column, are processed in aggregate. The
25 number longitudinal scan line samples aggregated together should be preferably selected to be large enough to minimize the influence of data outliers (more than 1000 values for example) and small enough to be processed in real-time (1000 or less for example). Following fixed column based processing of scan intensity measures over a longitudinal interval, a single aggregate measure is produced for each column. This method of
30 producing aggregate measures for each scan column is applied continuously in the survey

direction during data collection. The aggregated intensity measures are further processed to produce histograms for each zone (as shown in FIG. 7, a ballast zone 54, a field tie end zone 56, a rail zone 58, and a gage zone 60) across the track bed. These zones defined by transverse offsets across the track bed are based substantially on sensor location and crosstie dimensions. If, in one example, the zones defined in FIG.7 have widths of 600 columns for gage tie zone 60, 150 columns for rail zone 58, 470 columns for field tie end zone 56, and 316 columns for ballast zone 54, then the total scan width would be 1536 columns. If in this example, 1000 longitudinal scans are used to calculate the aggregate intensity measures for each zone, then the gage tie zone 60 would result in an input matrix of intensity values that is 1000 rows by 600 columns producing a single aggregate measurement vector of length 600. Similar calculations for the remaining zones would produce aggregated intensity vectors of length 150 for zone 58, length 470 for zone 56, and length 316 for zone 54. A histogram for each of these aggregate zone intensity vectors is then calculated and the histograms are then used for track bed light emitter power control analysis. The process is repeated continuously and in substantially real-time during surveys.

[0037] FIG. 7 shows a segment of one half of the track bed surface with a width that is defined by the field of view of a single sensor centered over the rail. The track bed section shown in FIG. 7 contains a rail 48, a plurality of cross ties 50, and four separate transverse light emitter power control analysis zones as described above. These analysis zones correspond to the following: the ballast zone 54, the transverse section of track bed on the field side of the rail containing ballast only; the field tie end zone 56, the transverse section of track bed on the field side of the rail containing crosstie ends; the rail zone 58, the transverse section of track bed containing the rail; and the gage zone 60, the transverse section of track bed on the gage side of the rail containing crossties as shown in FIG. 7. The mean, median, maximum, minimum and other light intensity statistics, for example, are preferably calculated continuously for defined longitudinal intervals (for example, for each 5 meters along the track bed) for each aggregate parameter in each transverse zone. A new sample or profile of light intensity data preferably occurs about every 2 mm to about every 6 mm in the longitudinal direction depending on the speed of the 3D sensor 38.

[0038] A light emitter power control output value is adjusted if error conditions are detected (based on the Elevation Zero Value Error count and Range Error count) which exceed acceptable maximum error count thresholds. If a significant number of sensor elevation errors or out-of-range intensity errors are detected, the laser control power output level is adjusted based on the track bed surface intensity values for zones containing ties. The updated light emission power control value is increased if the profile intensity median value is less than a target intensity value, and decreased if the intensity median value is greater than the target intensity value. These steps are depicted as an algorithm in the flow chart shown in FIG. 8.

[0039] 3D sensor data is gathered in real time and zero value errors are calculated for each of the sensors (block 62). Out-of-Range errors are then calculated as shown in block 64. Then, a determination is made as to whether any of the sensor zero value error counts are greater than a predefined zero value error count threshold (block 66). If the maximum number of zero value errors for all sensors is below the zero value error count threshold, and the maximum number of out-of-range errors for all sensors is less than the range error count threshold (block 68) then the system exits without change to the light emitter control output signal as shown in block 70. If, however, any sensor zero value error count exceeds the zero value error count threshold or if any of the sensor out-of-range error counts exceed the range error count threshold, the light emitter power control output signal is adjusted to reduce sensor errors caused by higher than optimum radiated light source optical power. In order to calculate the correct laser control signal adjustment, intensity histograms are calculated for each of the applicable sensors (block 72), and then aggregate intensity histograms are preferably calculated for each of the light emitter power control analysis zones including the field ballast zone, the field tie zone, the rail zone, and the gage tie zone (block 74). Median histograms are then calculated (block 76). Aggregate zero value error counts are then calculated for each analysis zone (block 78), followed by aggregate out-of-range error counts (block 80). Then, light emitter power is adjusted based at least in part on the calculated zero error counts, range error counts and intensity histograms (block 82), resulting in an update of the Light emitter Output Control signal 84.

[0040] By providing a way to control laser optical output power based on measurement sensor feedback during railway track inspections, higher quality and more consistent 3D image data are achievable. With higher quality 3D imagery, a more accurate picture of overall railway structure is possible.

- 5 [0041] The foregoing description of preferred embodiments of the present disclosure has been presented for purposes of illustration and description. The described preferred embodiments are not intended to be exhaustive or to limit the scope of the disclosure to the precise form(s) disclosed. Obvious modifications or variations are possible in light of the above teachings. The embodiments are chosen and described in an effort to provide
- 10 the best illustrations of the principles of the disclosure and its practical application, and to thereby enable one of ordinary skill in the art to utilize the concepts revealed in the disclosure in various embodiments and with various modifications as are suited to the particular use contemplated.

CLAIMS

What is claimed is:

- 5 1. A system for inspecting a railway track, the system comprising:
 - a power source;
 - a light emitting apparatus powered by the power source for emitting light energy toward a railway track;
 - a data storage apparatus in communication with a processor;
 - 10 at least one sensor for sensing reflected light emitted from the light emitting apparatus and acquiring three dimensional range and intensity data of the railway track to be stored in the data storage apparatus; and
 - the processor wherein the processor includes an algorithm for adjusting the power of the light emitting apparatus, the algorithm comprising the steps of:
 - 15 a. calculating one or more intensity histograms for an at least one sensor channel; and
 - b. adjusting a light emitter control output value based at least in part on the calculated one or more intensity histograms ; and
 - a controller in communication with the processor wherein the controller is
 - 20 configured to control the light intensity of the light emitting apparatus in response to the light emitter control output value.

2. The system of claim 1 wherein the algorithm for adjusting the power of the light emitting apparatus further comprises the step of calculating one or more aggregate intensity histograms for a target zone.
3. The system of claim 2 wherein the target zone further comprises at least one surface zone including one or more members selected from the group consisting of a gage tie zone, a rail zone, a field tie zone, and a field ballast zone.
4. The system of claim 2 or 3 wherein the algorithm for adjusting the power of the light emitting apparatus further comprises the steps of calculating a median histogram for the target zone and adjusting a light emitter control output value based at least in part on the calculated median histogram.
5. The system of claim 4 wherein the algorithm for adjusting the power of the light emitting apparatus further comprises the steps of calculating aggregate zero value error counts for the target zone and adjusting a light emitter control output value based at least in part on the calculated aggregate zero value error counts.
6. The system of claim 4 wherein the algorithm for adjusting the power of the light emitting apparatus further comprises the steps of calculating aggregate out-of-range error counts for the target zone and adjusting a light emitter control output value based at least in part on the calculated aggregate out-of-range error counts.
7. The system of claim 5 wherein the algorithm for adjusting the power of the light emitting apparatus further comprises the step of determining whether the number of zero value errors are greater than a zero value error count number threshold.
8. The system of claim 6 wherein the algorithm for adjusting the power of the light emitting apparatus further comprises the step of determining whether the number of out-of-range errors are greater than a range error count number threshold.
9. A method of inspecting a railway track bed using a light source with real time adjustable light emission, the method comprising the steps of:

- a. emitting light from a light source toward a railway track bed;
 - b. detecting light reflected from the railway track bed using at least one sensor;
 - c. calculating at least one intensity histogram for the at least one sensor
 - 5 channel;
 - d. adjusting a light emitter control output value; and
 - e. controlling the light intensity of the light emitting apparatus in response to the adjusted light emitter control output value.
10. The method of claim 9 wherein the step of calculating at least one intensity
- 10 histogram further comprises the step of calculating aggregate intensity histograms for a target zone.
11. The method of claim 10 wherein the step of calculating at least one intensity histogram further comprises the step of calculating a median histogram for the target zone.
- 15 12. The method of claim 11 wherein in the step of adjusting a light emitter control output value further comprises the step of adjusting a light emitter control output value based on the calculated median histogram.
13. The method of any one of claims 9 to 12, further comprising the steps of calculating zero value errors for at least one sensor channel and determining whether the
- 20 number of zero value errors is greater than a zero error count number threshold.
14. The method of any one of claims 9 to 13 further comprising the steps of calculating out-of-range errors for at least one sensor channel and determining whether the number of out-of-range errors is greater than a range error count number threshold.
15. The method of claim 10 wherein the step of calculating aggregate intensity
- 25 histograms further comprises calculating aggregate intensity histograms for a plurality of surface zones.

16. The method of claim 11 wherein the step of calculating a median histogram further comprises calculating a median histogram for a plurality of surface zones.
17. A system for inspecting a railway track, the system comprising:
- a power source;
 - 5 a light emitting apparatus powered by the power source for emitting light energy toward a railway track;
 - at least one sensor for sensing reflected light emitted from the light emitting apparatus and acquiring three-dimensional data of the railway track;
 - a processor in communication with the at least one sensor wherein the processor
 - 10 includes an algorithm for adjusting the power of the light emitting apparatus, the algorithm comprising the steps of:
 - a. analyzing the three-dimensional data from the at least one sensor; and
 - b. adjusting a light emitter control output value based at least in part on the analyzed three-dimensional data; and
 - 15 a controller in communication with the processor wherein the controller is configured to control the light intensity of the light emitting apparatus in response to the light emitter control output value.
18. The system of claim 17, further comprising a data storage apparatus in communication with the processor for storing the acquired three dimensional data.
- 20 19. A method of inspecting a railway track bed using a light source with real time adjustable light emission, the method comprising the steps of:
- a. emitting light from a light source toward a railway track bed;
 - b. detecting light reflected from the railway track bed using a least one sensor;

c. measuring surface elevation of the railway track bed and light intensity of the reflected light based on the detected light to provide elevation and intensity data;

d. analyzing the elevation and intensity data;

e. adjusting a light emitter control output value based on the analyzed elevation
5 and intensity data;

f. controlling the light intensity of the light source in response to the adjusted light emitter control output value.

20. The method of claim 19 wherein the analyzing step further includes analyzing the
elevation and intensity data for elevation zero value errors, out-of-range errors and
10 intensity distribution.

21. A method of inspecting a railway track bed using a light source with real time adjustable light emission, the method comprising the steps of:

a. emitting light from a light source toward a railway track bed;

b. sensing light reflected from the railway track bed;

15 c. determining railway track bed surface conditions based on the sensed light reflected from the railway track bed;

d. adjusting the intensity of light emitted from the light source based on the railway track bed surface conditions.

20

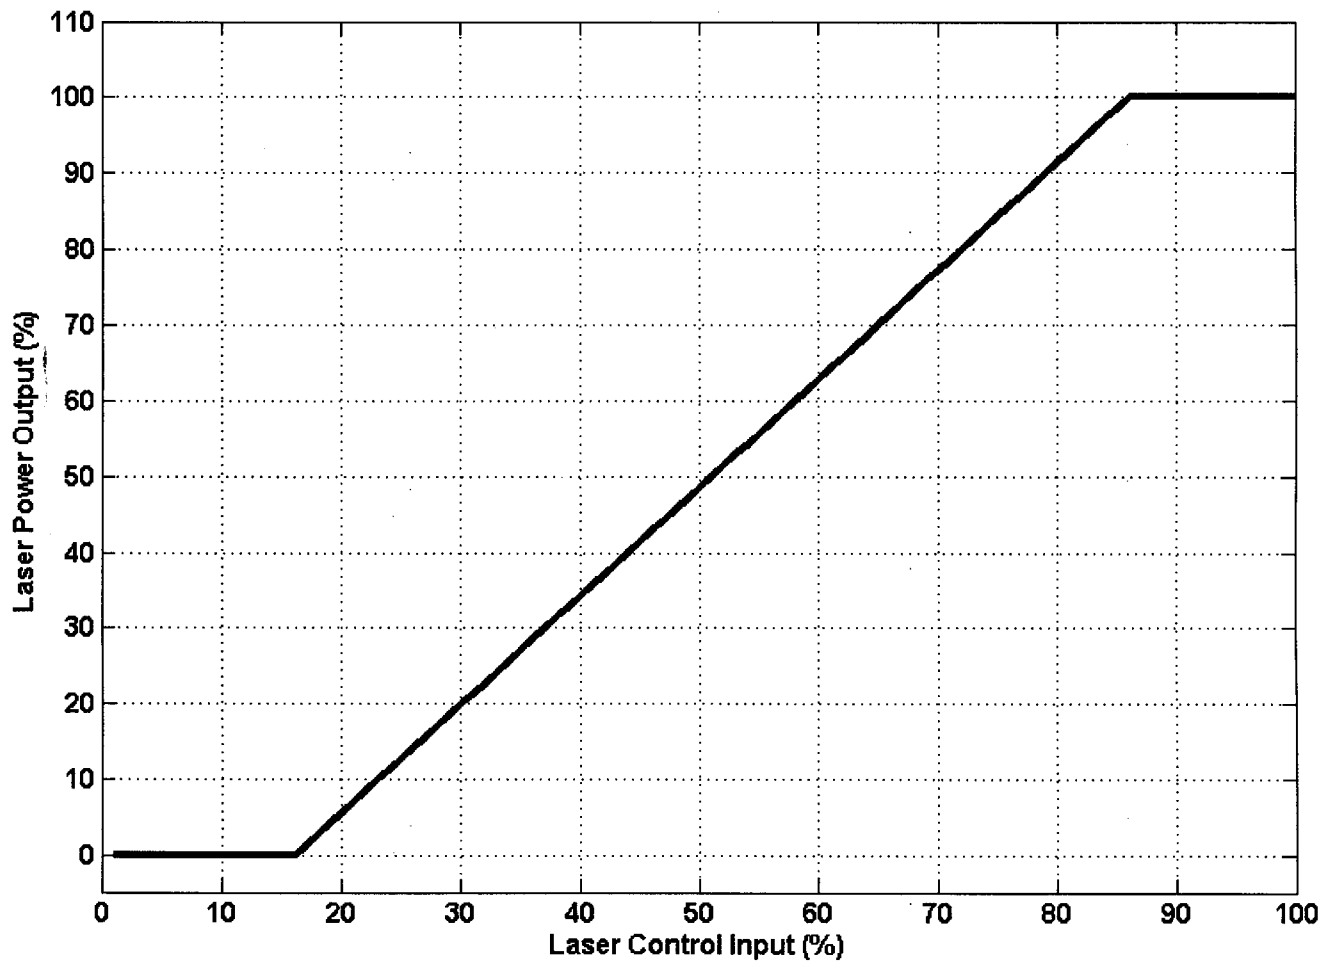


FIG. 1

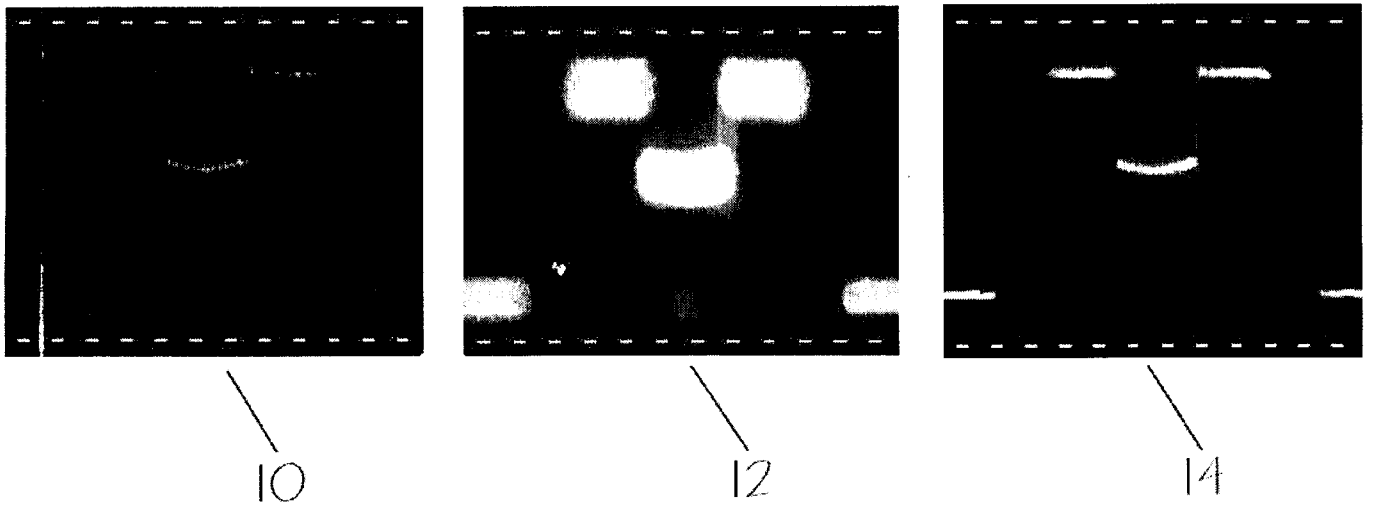


FIG. 2

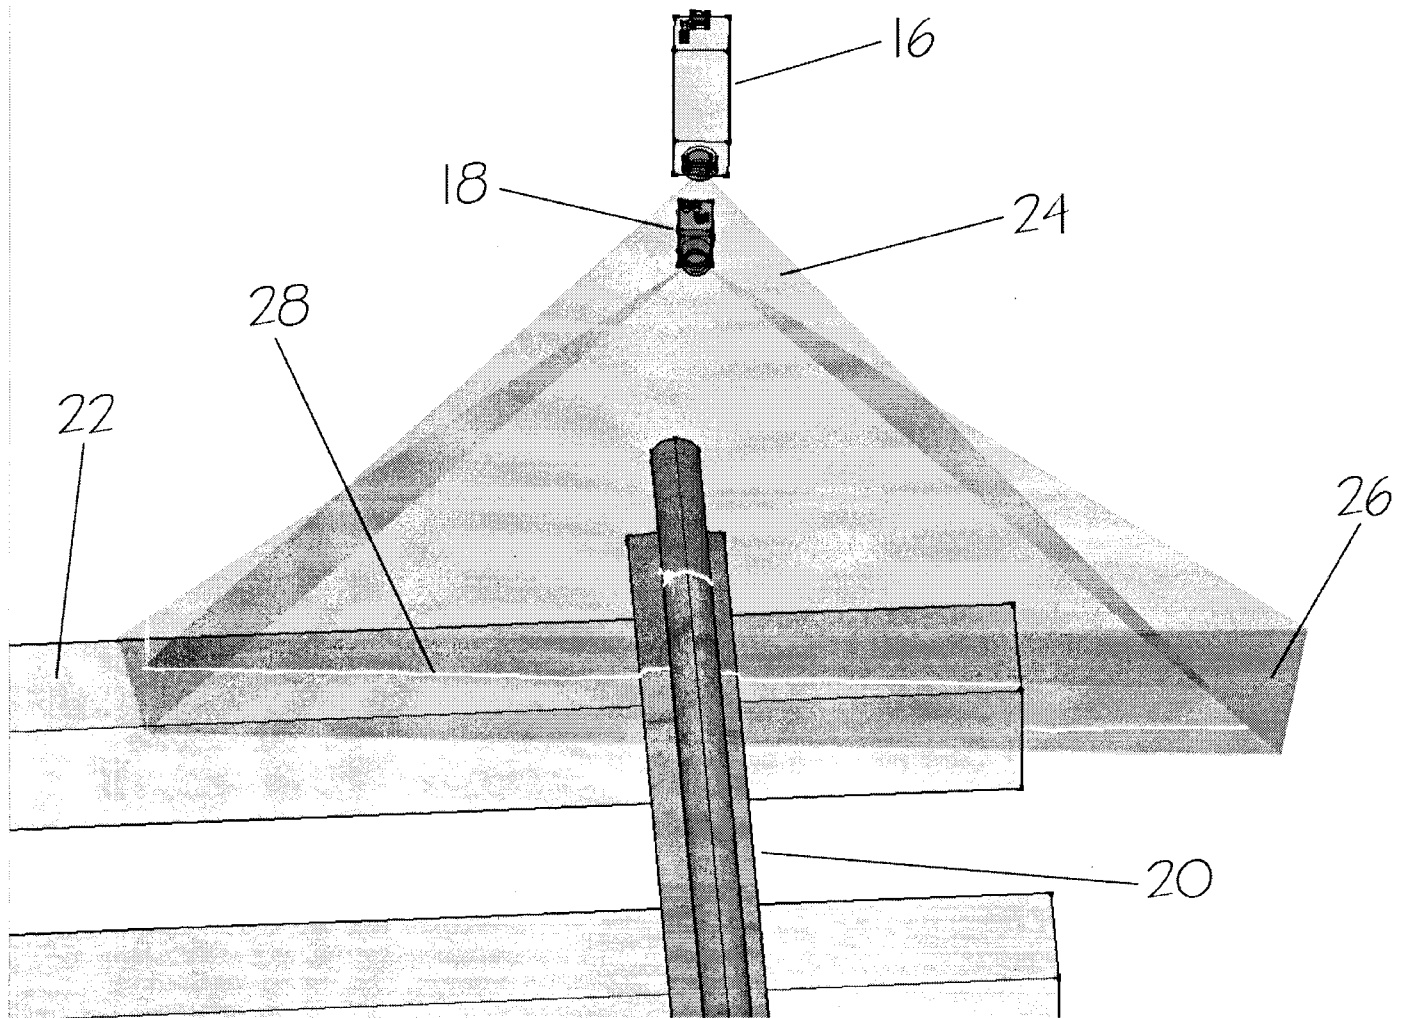


FIG. 3

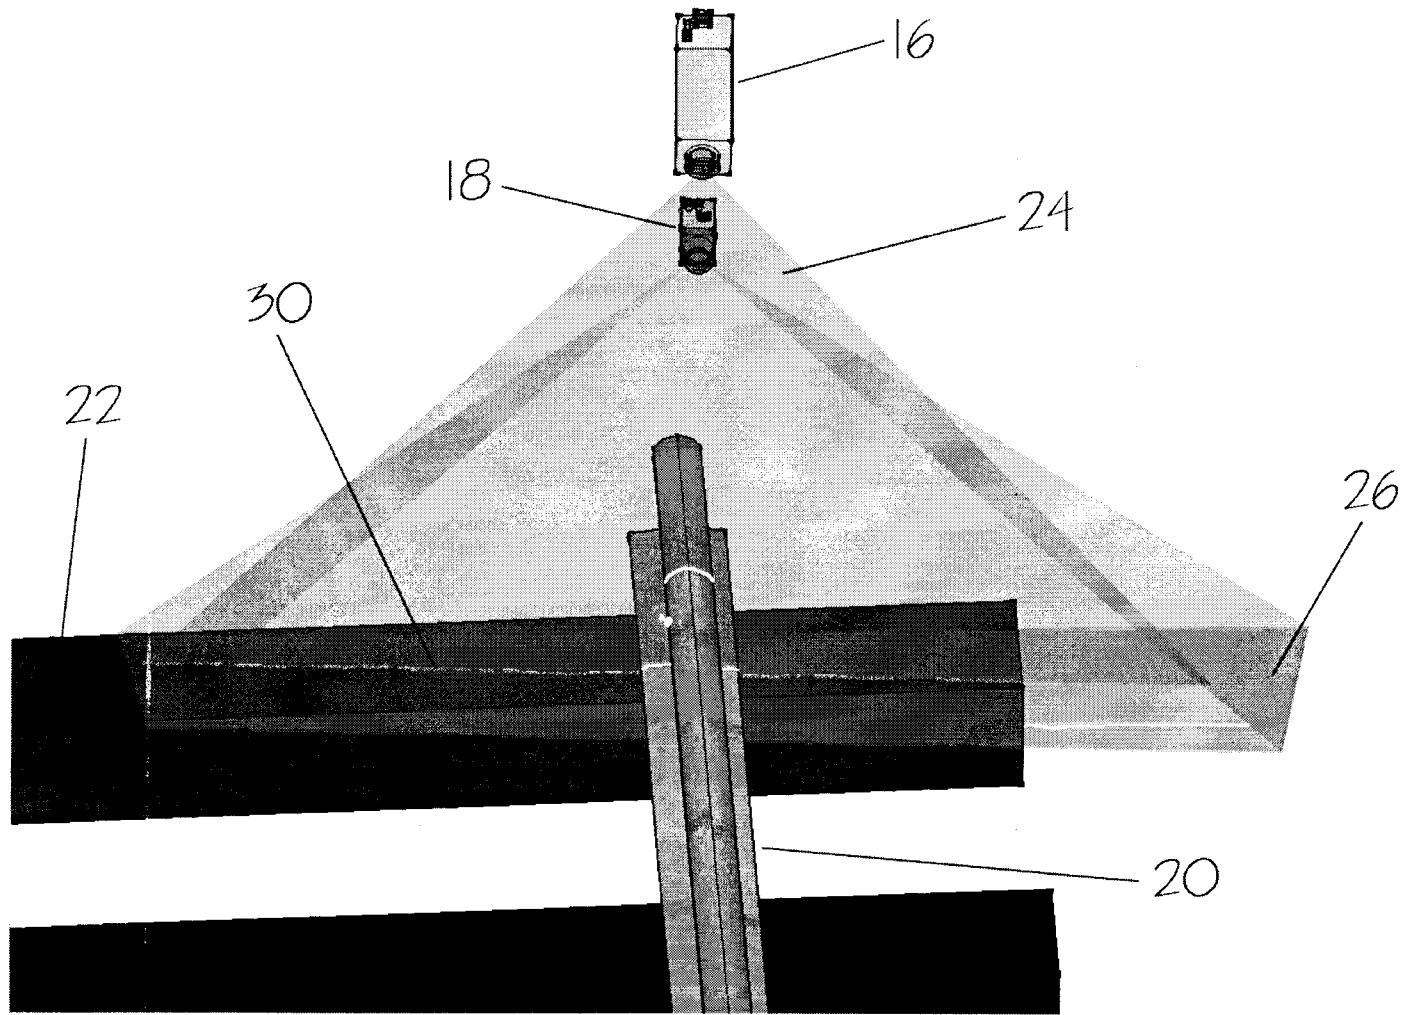


FIG. 4

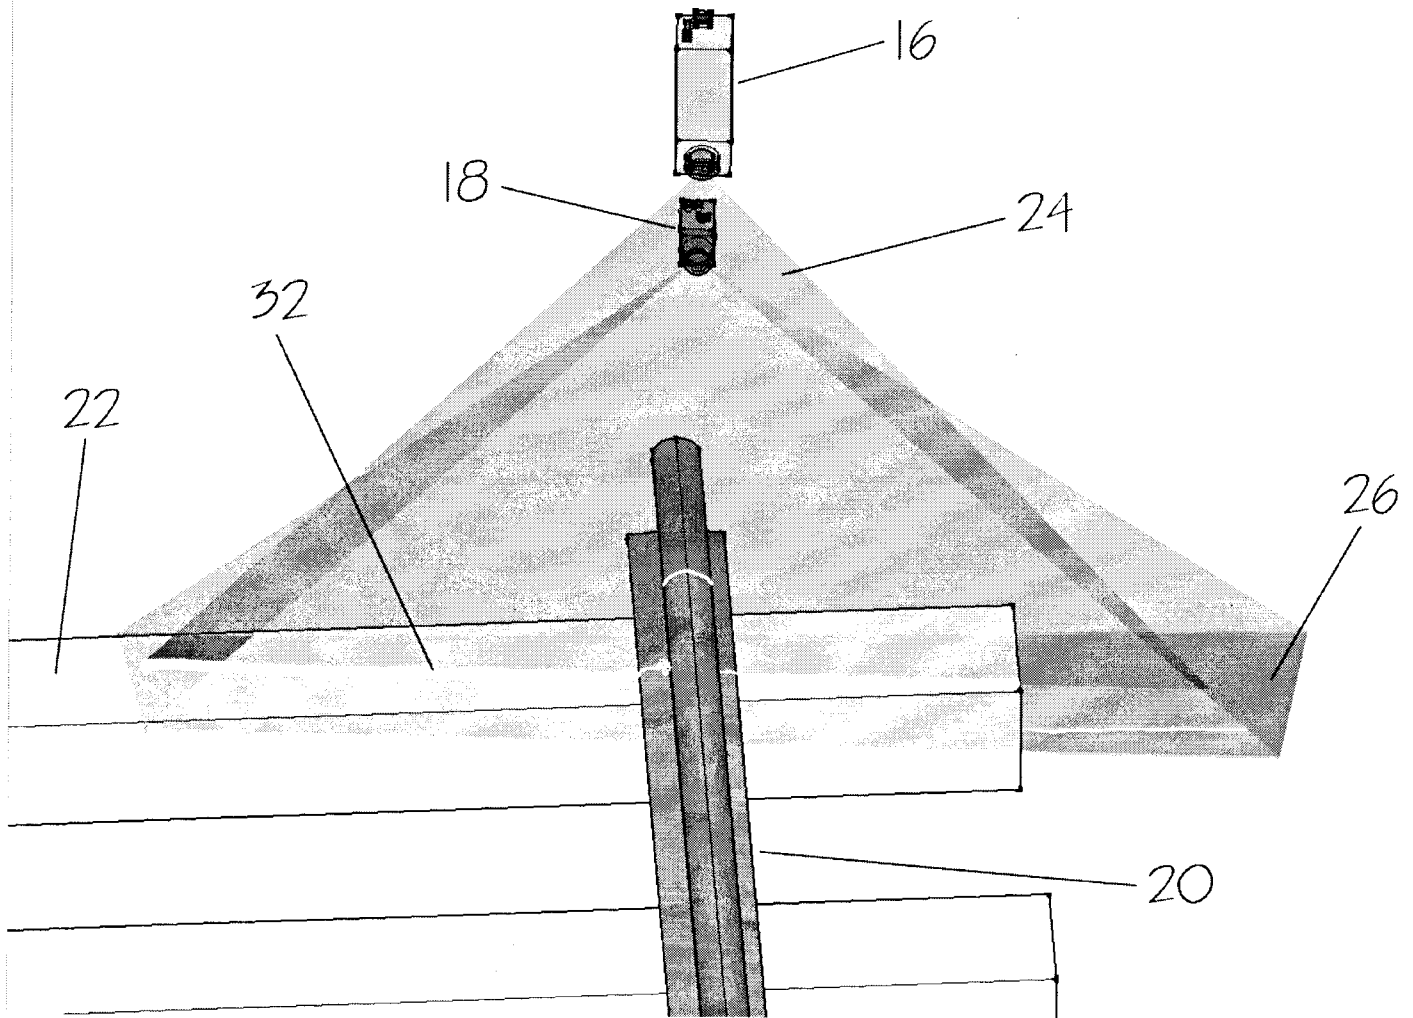


FIG. 5

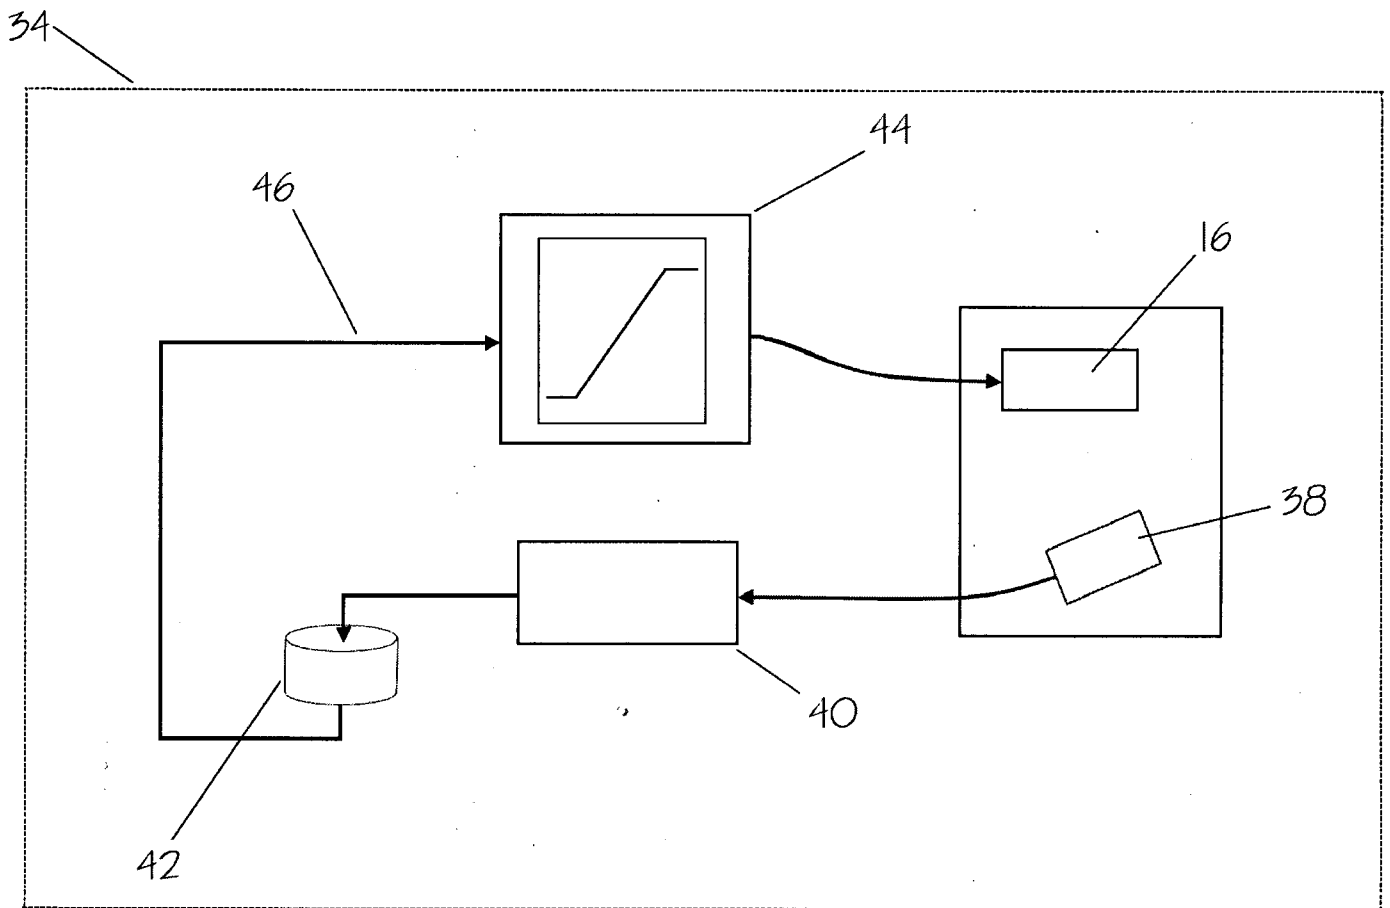


FIG. 6

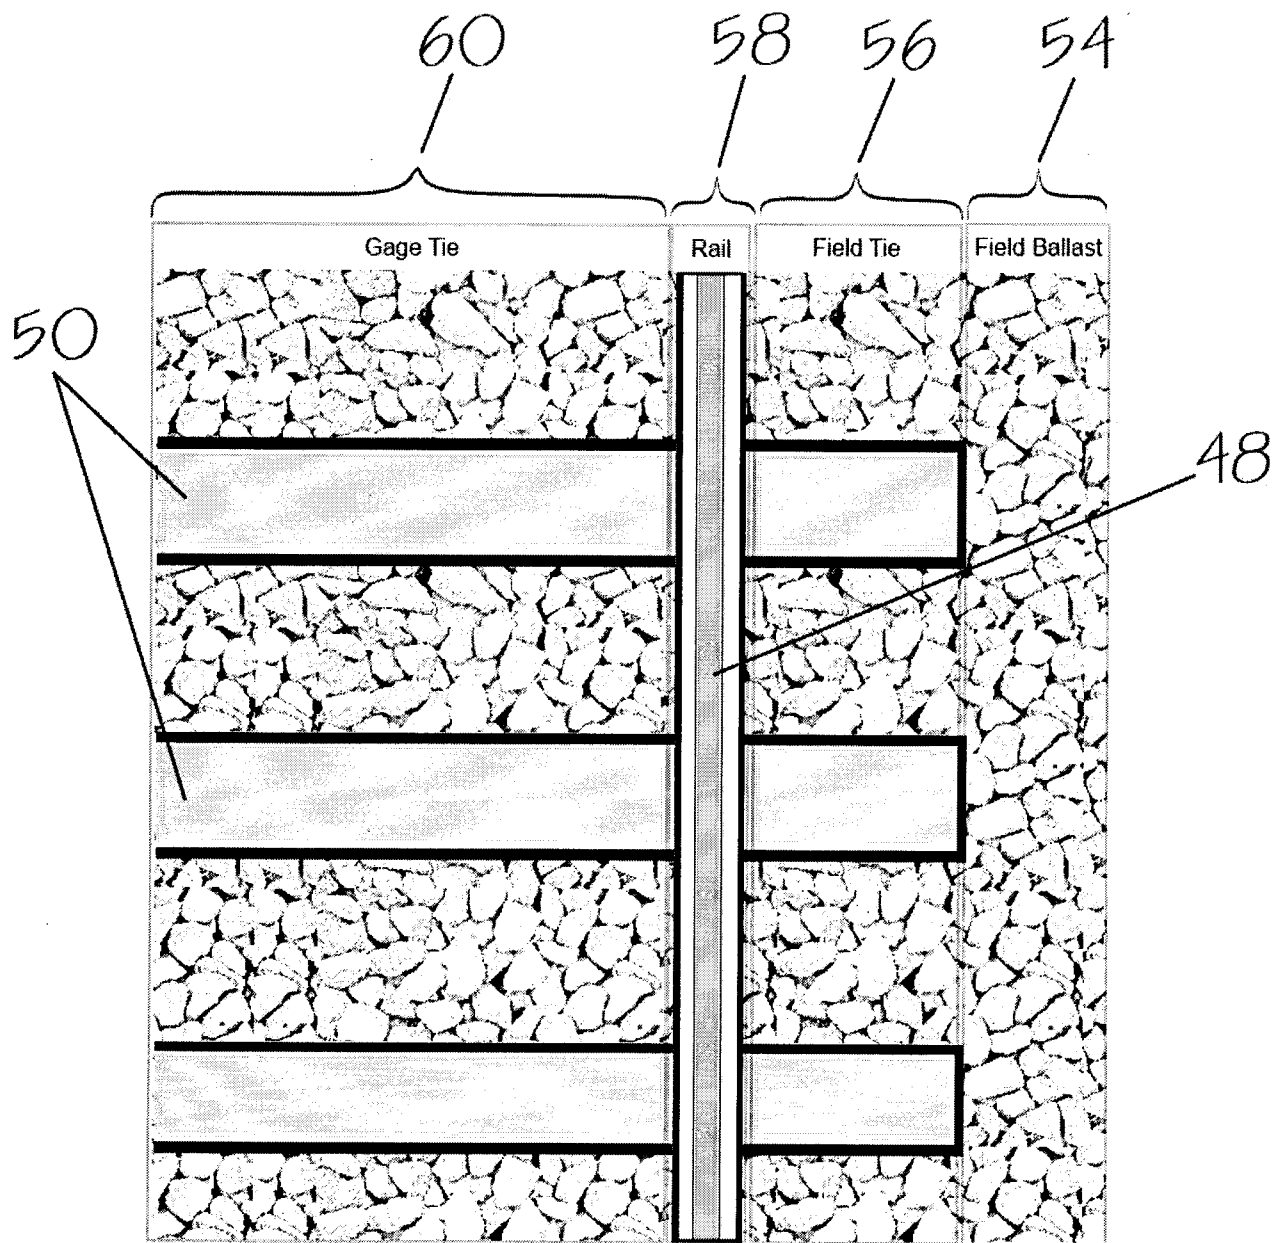


FIG. 7

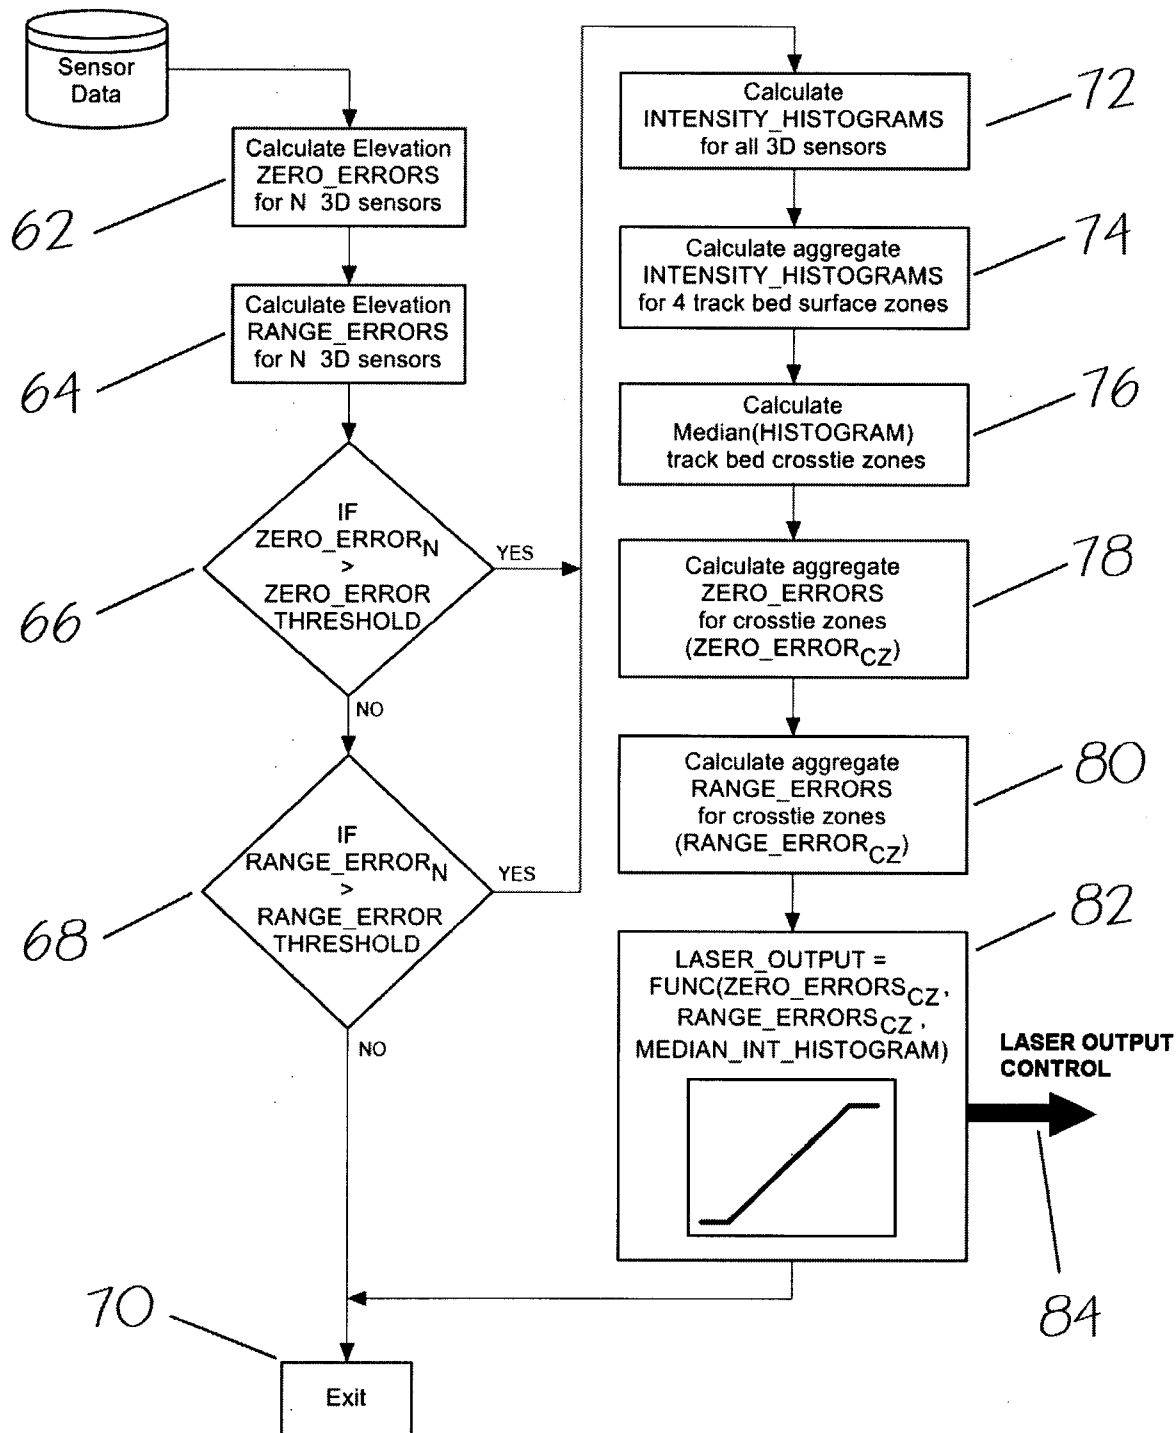


FIG. 8

