




(86) Date de dépôt PCT/PCT Filing Date: 2004/12/17
(87) Date publication PCT/PCT Publication Date: 2006/06/22
(85) Entrée phase nationale/National Entry: 2007/06/15
(86) N° demande PCT/PCT Application No.: US 2004/042620
(87) N° publication PCT/PCT Publication No.: 2006/065248

(51) Cl.Int./Int.Cl. *F03D 9/00* (2006.01),
H02P 9/04 (2006.01)
(71) Demandeur/Applicant:
COMPOSITE SUPPORT & SOLUTIONS, INC., US
(72) Inventeurs/Inventors:
HIEL, CLEMENT, US;
KORZENIOWSKI, GEORGE J., US
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : EOLIENNE A ACCROISSEMENT DE DIFFUSION
(54) Title: DIFFUSER-AUGMENTED WIND TURBINE

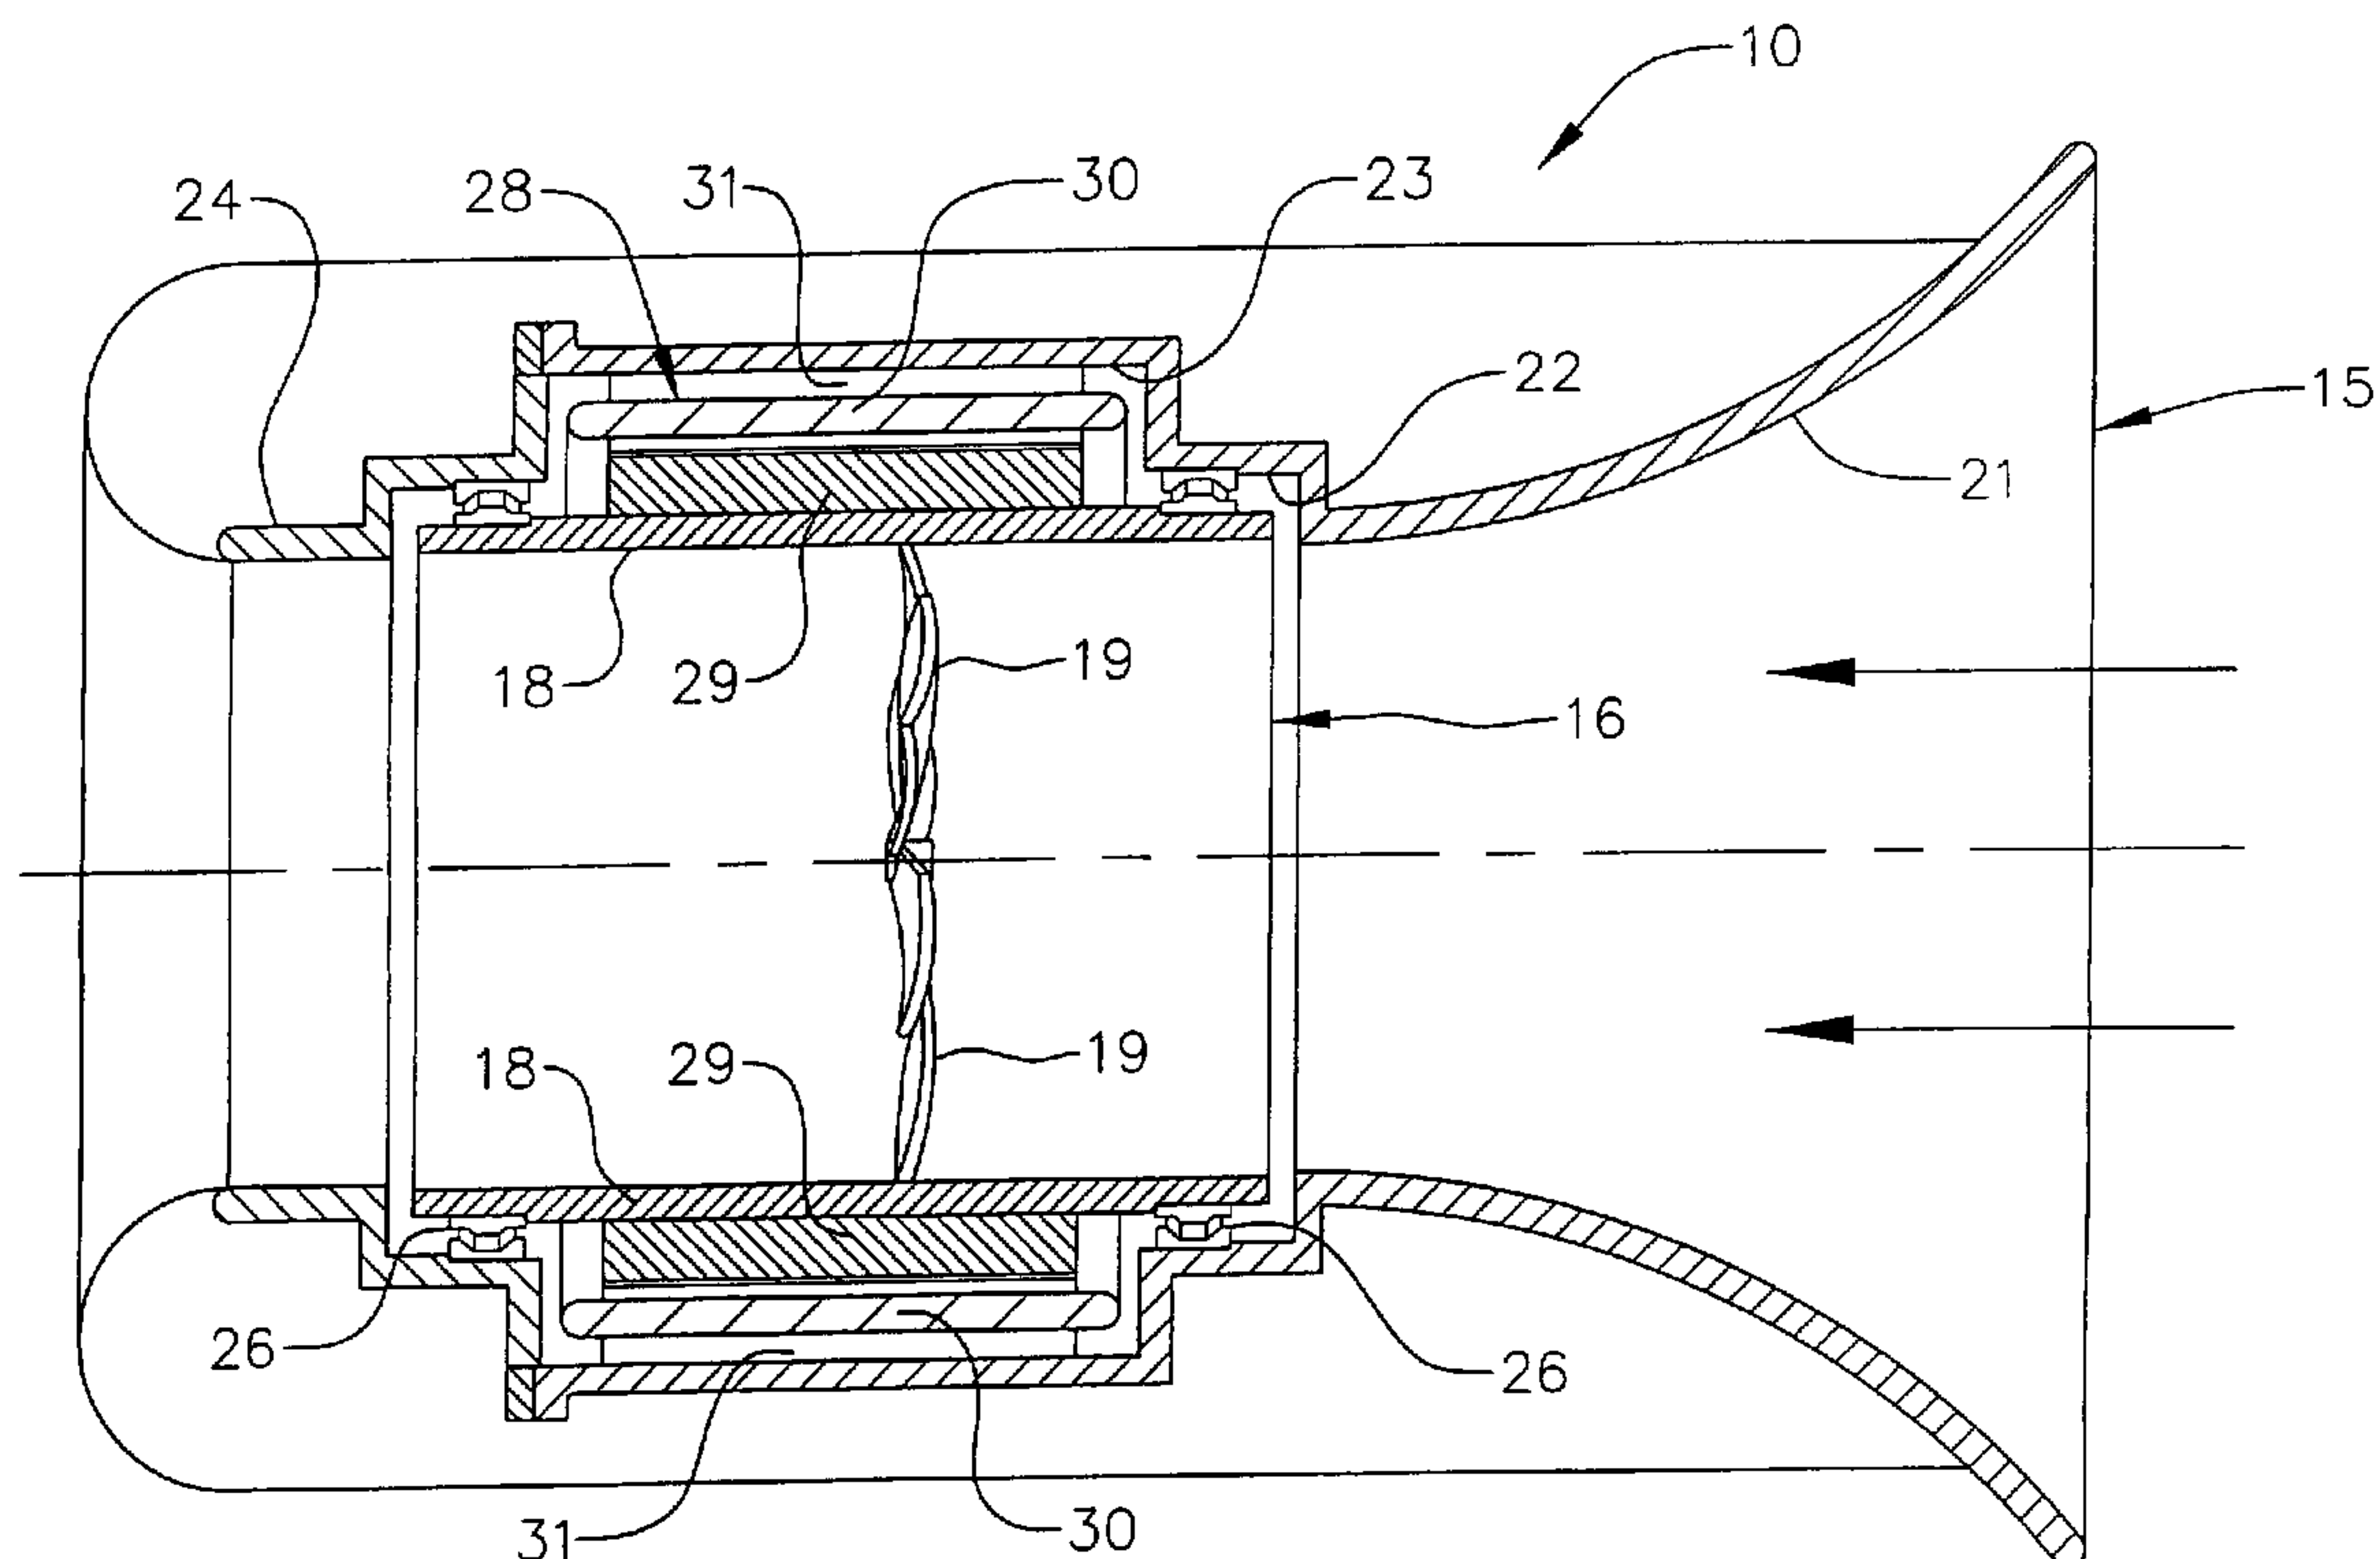

(57) **Abrégé/Abstract:**

A diffuser-augmented wind-turbine assembly in which the diffuser has a cylindrical central section rotatably supporting a rotor drum which in turn supports turbine blades without requiring a central support shaft. Wind energy drives the turbine blades and rotor drum, which in turn drive a generator of electrical power.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 June 2006 (22.06.2006)

PCT

(10) International Publication Number
WO 2006/065248 A3

(51) International Patent Classification:

F03D 9/00 (2006.01) **H02P 9/04** (2006.01)

(21) International Application Number:

PCT/US2004/042620

(22) International Filing Date:

17 December 2004 (17.12.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **COMPOSITE SUPPORT & SOLUTIONS, INC.** [US/US];
32526 Seahill Drive, Rancho Palos Verdes, CA 90275 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HIEL, Clement** [US/US]; 32526 Seahill Drive, Rancho Palos Verdes, CA 90275 (US). **KORZENIOWSKI, George, J.** [US/US];
5140 Alhama Drive, Woodlands Hills, CA 91364 (US).

(74) Agent: **PALMER, Russell, R., Jr.**; Christie, Parker & Hale, LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

(88) Date of publication of the international search report:

12 April 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DIFFUSER-AUGMENTED WIND TURBINE

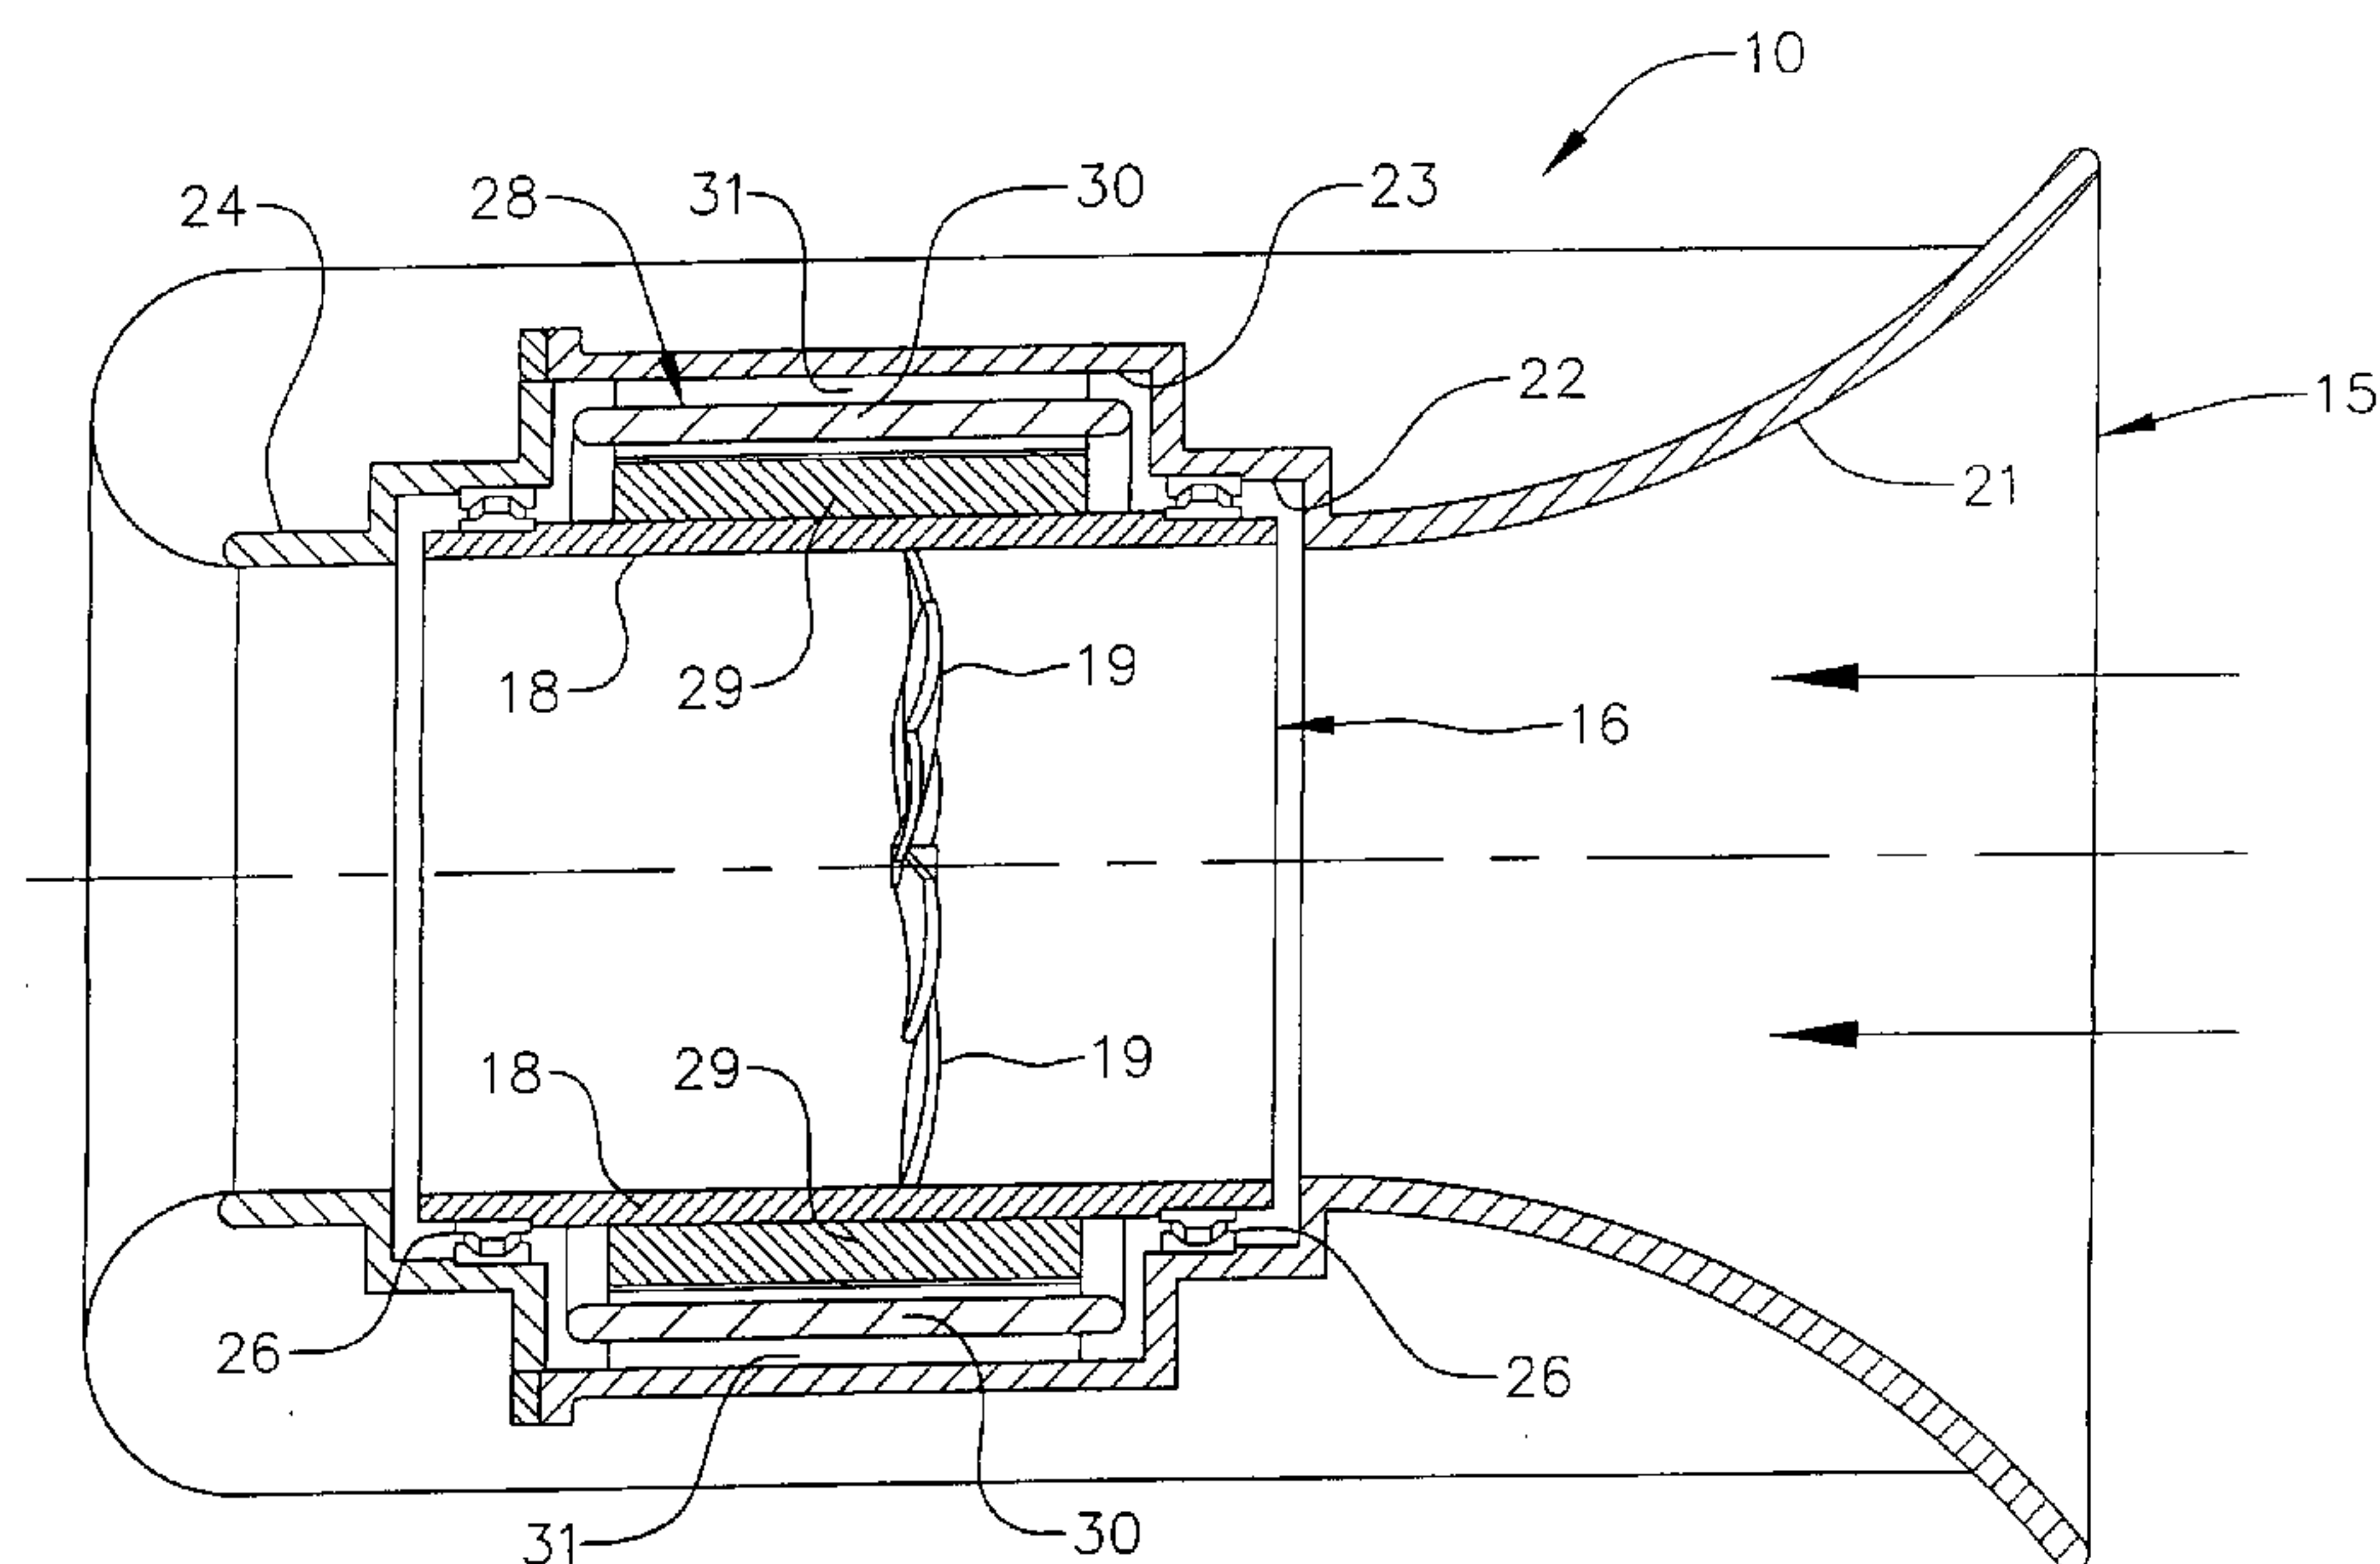

(57) Abstract: A diffuser-augmented wind-turbine assembly in which the diffuser has a cylindrical central section rotatably supporting a rotor drum which in turn supports turbine blades without requiring a central support shaft. Wind energy drives the turbine blades and rotor drum, which in turn drive a generator of electrical power.

1 DIFFUSER-AUGMENTED WIND TURBINE

BACKGROUND OF THE INVENTION

5 Wind turbines are in widespread use for the generation of electrical energy. In a typical form, a multi-blade turbine is rotatably mounted on a support such as a pole or tower to be driven by surface winds, the turbine in turn driving an electrical generator coupled, for example, to electrical utility lines. The turbine can be rotated about a vertical axis of the pole or tower to compensate for shifts in wind direction.

10 The use of diffusers with wind turbines is also known, the objective being to increase the efficiency of converting wind energy to electrical energy. Such known diffusers are typically mounted on the support tower, and a shaft-mounted turbine rotates within the diffuser. Such an arrangement is disclosed in U.S. Patent 4,075,500, which, for brevity, is incorporated herein by reference.

15 The improvement of this invention relates to integration of the turbine blades with a surrounding hollow cylindrical-shell rotor drum, the drum in turn being rotatably supported within a central part of the surrounding diffuser. A central hub and supporting shaft for the turbine blades is eliminated, and blade stiffness is significantly increased. The blades and rotor drum can be cast, or injection molded in a single manufacturing step.

20 SUMMARY OF THE INVENTION

25 A diffuser-augmented wind turbine for generating electrical power, and having a diffuser outer-housing shell with a cylindrical portion rotatably supporting a rotor drum having an inner surface rigidly supporting a plurality of turbine blades, the rotor drum being in driving engagement with a rotatable electrical generator. The device can also be operated in reverse as a wind-generating fan by supplying electrical energy to the generator to act as a motor.

BRIEF DESCRIPTION OF THE DRAWINGS

30 FIG. 1 is a perspective view of a pole-mounted wind-turbine assembly according to the invention;

FIG. 2 is a front view of a blade and rotor-drum assembly;

FIG. 3 is a sectional side elevation of the turbine assembly;

FIG. 4 is an exploded perspective view of the turbine assembly shown in FIG. 3;

35 FIG. 5 is a view similar to FIG. 3, but showing a side-mounted belt-driven electrical generator; and

FIG. 6 is a perspective view of an embodiment using inlet guide vanes.

1

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 shows a diffuser-augmented wind-turbine assembly 10 according to the invention, and rotatably mounted on a conventional support pole 11 so it can be moved by a fin 12 to compensate for shifting wind directions. The assembly has an outer diffuser shell 15, within which can be seen a blade and rotor-drum assembly 16 as described in greater detail below.

FIG. 2 shows assembly 16 in greater detail, and as having an outer cylindrical rotor drum 18, with turbine blades 19 extending radially therein, and preferably integrally formed with the rotor drum. The assembly can be cast or of welded construction if made of metal (e.g., aluminum), or integrally injected molded if made from a composite material strengthened by glass, carbon, or similar reinforcing fibers. Though six blades are shown, the number of blades can be selected by the designer. Multiple blades, such as five or six, are preferred as they improve turbine efficiency, as well as increasing the rigidity of assembly 16.

Turbine-blade strength and stiffness is significantly increased by the fixed support of the blades on the drum. The assembly is stable and balanced, and can be safely operated at high wind speeds encountered in storm conditions. For smaller wind-turbine assemblies which typically operate at high rotation speeds, centrifugal force compressively loads the blades, making them less prone to fatigue failure.

FIG. 3 is a sectional side elevation of one embodiment of assembly 10, and shows assembly 16 as rotatably mounted within diffuser shell 15. The diffuser shell is preferably molded from a strong composite material, and has an outwardly divergent section 21 which merges with outwardly stepped ring-shaped inner and outer cylindrical support sections 22 and 23. An end portion 24 of the diffuser shell is separately formed, and is rigidly secured to a more forward part of the diffuser shell after the blade and rotor drum is fitted therein. The outlet end of the diffuser shell may be made more divergent to optimize aerodynamic conditions.

A pair of spaced-apart ring-shaped bearings 26 have outer races secured to the inner surface of support section 22, and inner races secured to the outer surface of the rotor drum, thereby rotatably mounting assembly 16 within the diffuser shell. The absence of any clearance between the blade tips and the rotor drum (which forms a cylindrical part of the diffuser) is another feature eliminating tip losses, and producing high turbine efficiency. Magnetic bearings can also be used to augment bearings 26 for lower friction at high rotational speeds.

The embodiment shown in FIG. 3, and the exploded view of FIG. 4, positions the components of an electrical generator assembly 28 cylindrically around the rotor drum. These components include a cylindrical assembly 29 of permanent magnets secured to the outer surface of the rotor drum to rotate therewith. Slightly outwardly spaced from the

1 magnet assembly is a cylindrical assembly 30 of stator coils secured to a support ring 31 which is in turn rigidly secured to the inner surface of support section 23.

FIG. 5 shows an alternative embodiment using a conventional drum-shaped electrical generator 33 secured at one side of support section 23. Generator 33 is driven by a flexible
5 timing belt 34 engaged with a toothed wheel on the generator, and extending around a cylindrically toothed section of the rotor drum.

FIG. 6 shows another alternative embodiment using an assembly 35 of stator vanes or inlet guide vanes secured within the inner end of outwardly divergent section 21 of the diffuser shell. The use of such vanes is a known technique enabling use of fixed-pitch
10 turbine blades, but with the advantages of more complex variable-pitch blades. The diffuser shell can also be lined with a sound-absorbing material for noise reduction during turbine operation.

Other applications on the wind-turbine assembly include "reverse" operation as a wind-generating fan, by applying electrical energy to the generator which then acts as a
15 motor to rotate the blades. Another application involves adding blades to the outside of the rotor drum which is appropriately sealed to act as a wind-driven water pump, air compressor, or fan.

There has been described a wind-turbine assembly featuring a diffuser-supported assembly of turbine blades. The described designs are useful in both small and large wind
20 turbines, are economical to manufacture, and operate at high efficiency.

1 WHAT IS CLAIMED IS:

1. A diffuser-augmented wind-turbine assembly, the assembly having an diffuser
outer-housing shell with a cylindrical portion rotatably supporting a rotor drum having an
inner surface rigidly supporting a plurality of turbine blades, the rotor drum being in driving
5 engagement with a rotatable electrical generator.

2. The assembly of claim 1, wherein the rotor-drum inner surface is flush with
adjoining inner surfaces of the diffuser shell.

3. The assembly of claim 1, wherein the rotor drum and turbine blades are
10 integrally formed.

4. The assembly of claim 1, wherein the electrical generator comprises a
cylindrical magnet assembly secured to an outer surface of the rotor drum to rotate therewith,
and a cylindrical stator-coil assembly secured to an inner surface of the diffuser shell, and
15 extending around and slightly spaced from the magnet assembly.

5. The assembly of claim 1, and further comprising space-apart ring bearings
adjacent opposite ends of the rotor drum for rotatably supporting the drum within the diffuser
shell.


6. The assembly of claim 1, and further comprising a plurality of inlet guide
20 vanes secured within an inlet end of the diffuser shell upstream of the turbine blades.


7. The assembly of claim 1, wherein the electrical generator is drum shaped, and
secured to the diffuser shell radially outwardly of the rotor drum, and further comprising a
25 flexible belt engaged with the drum and generator.

30

35

1/6

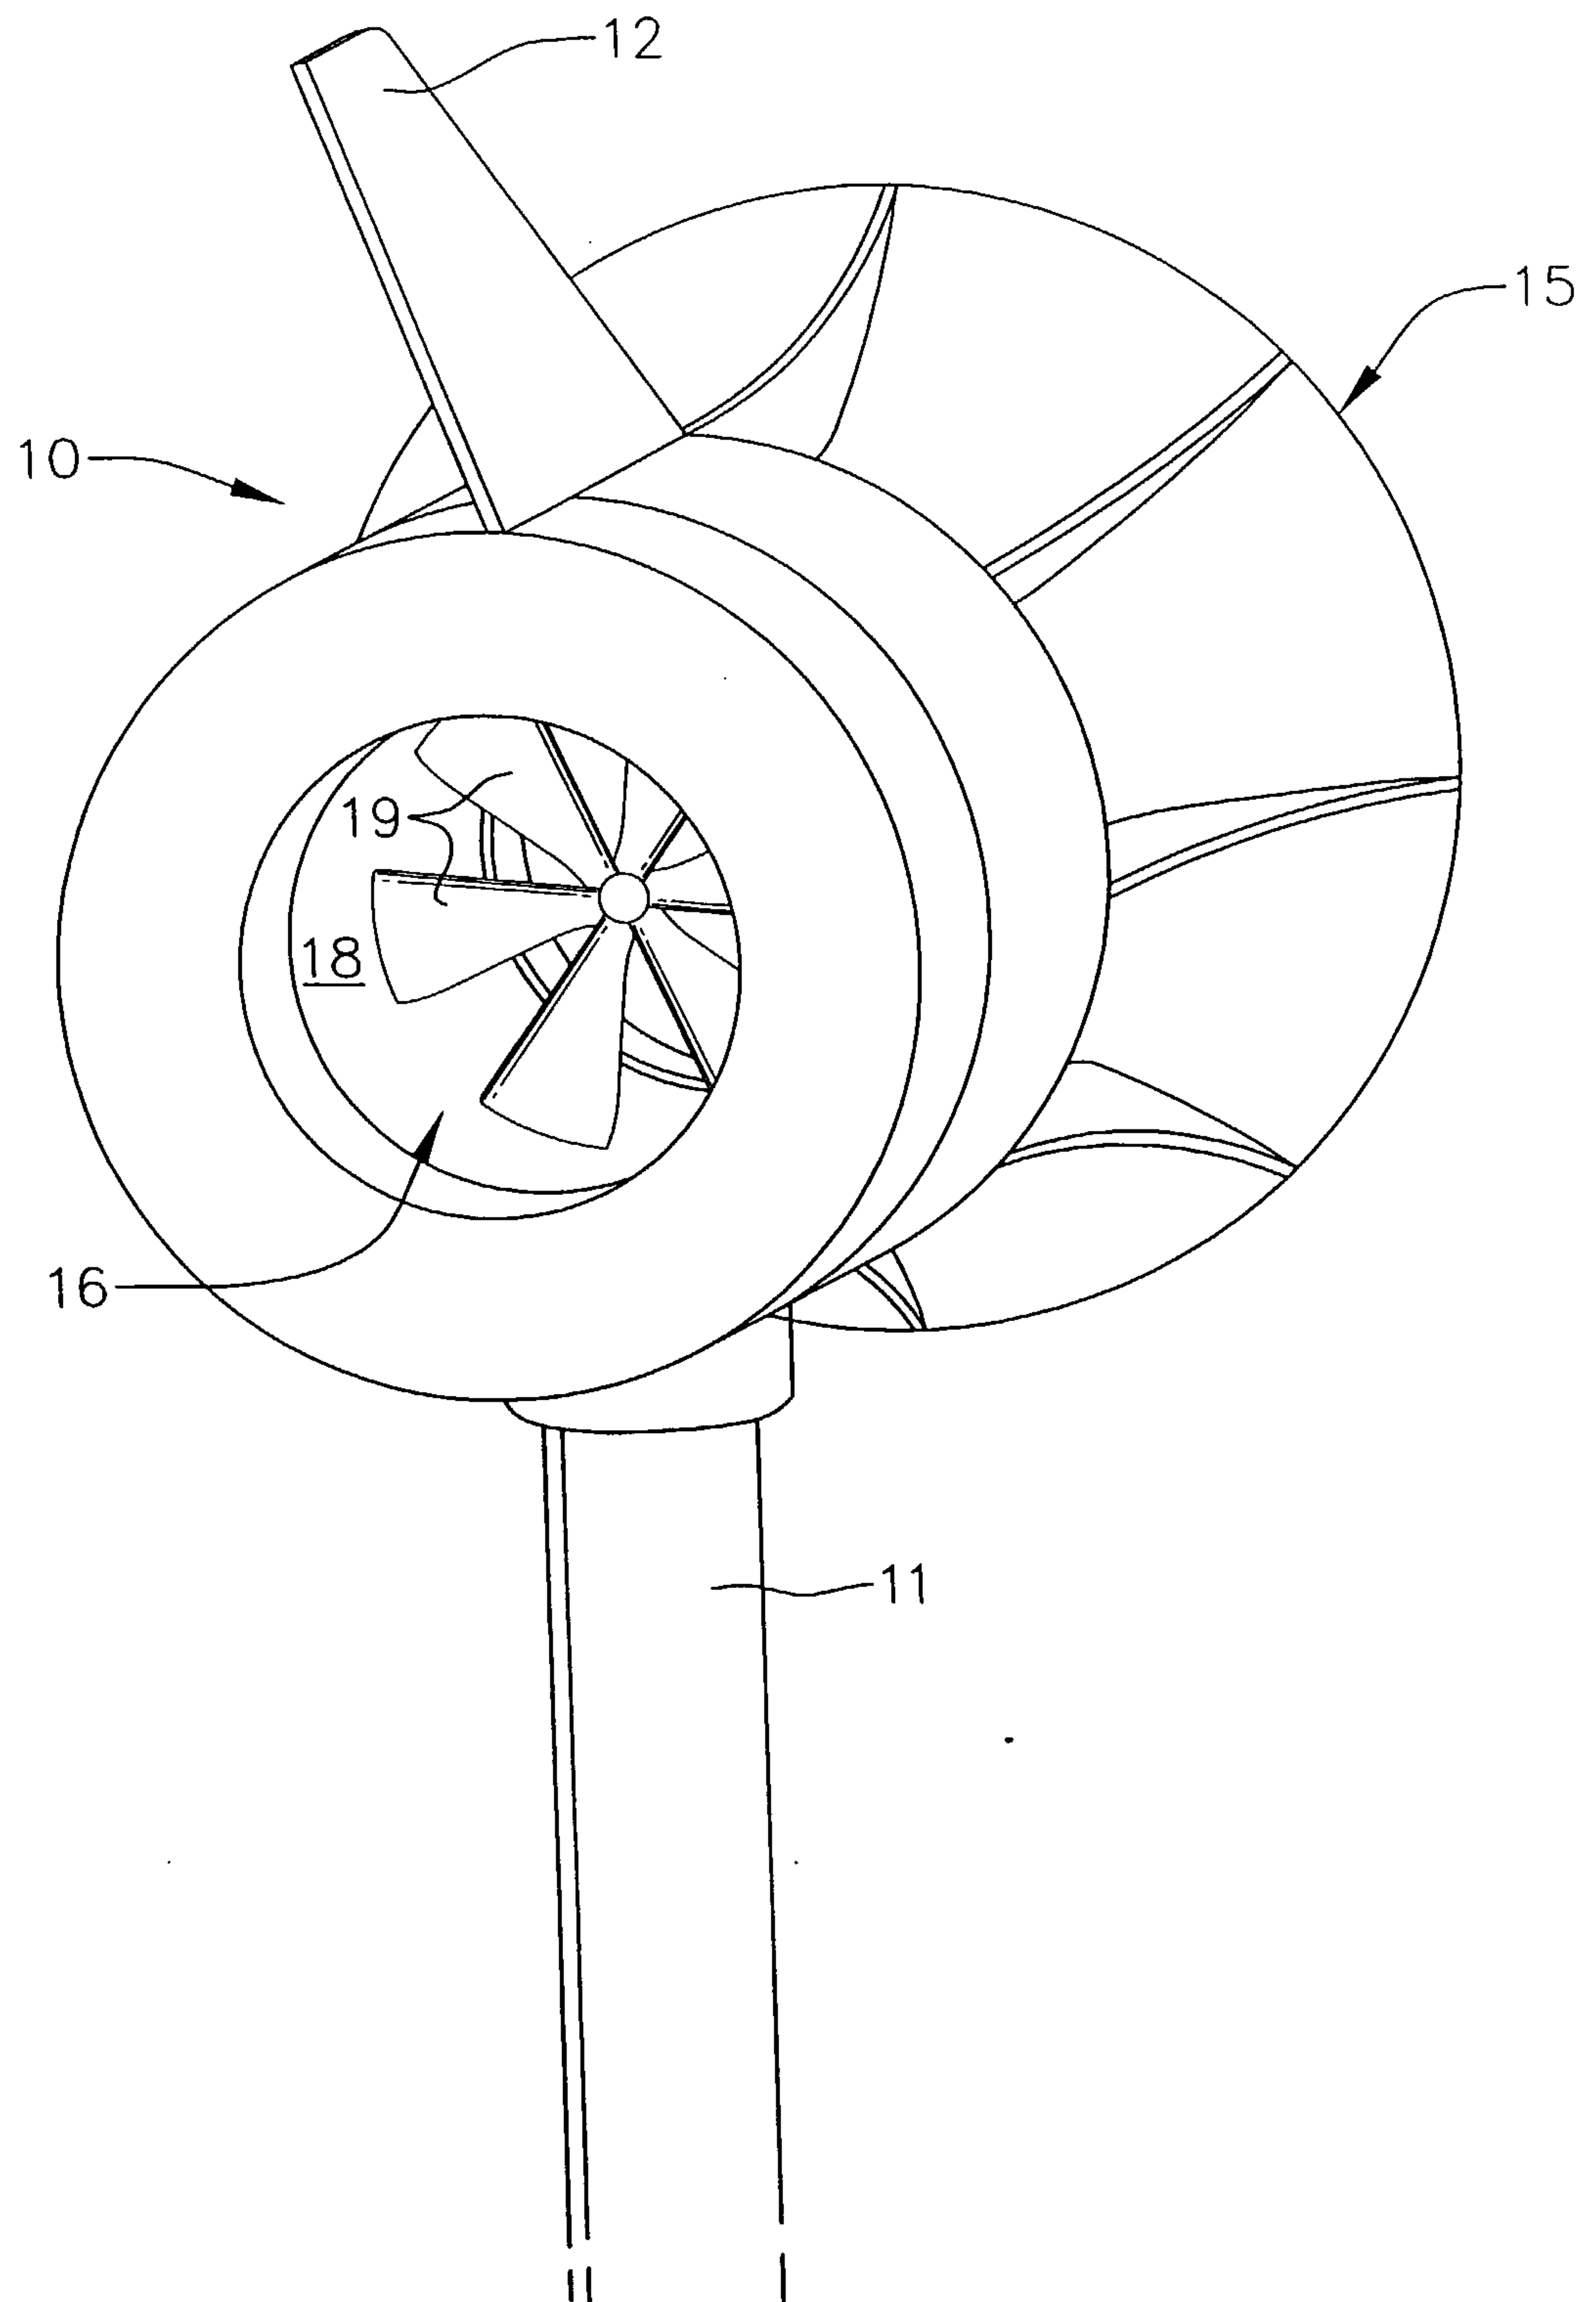FIG. 1

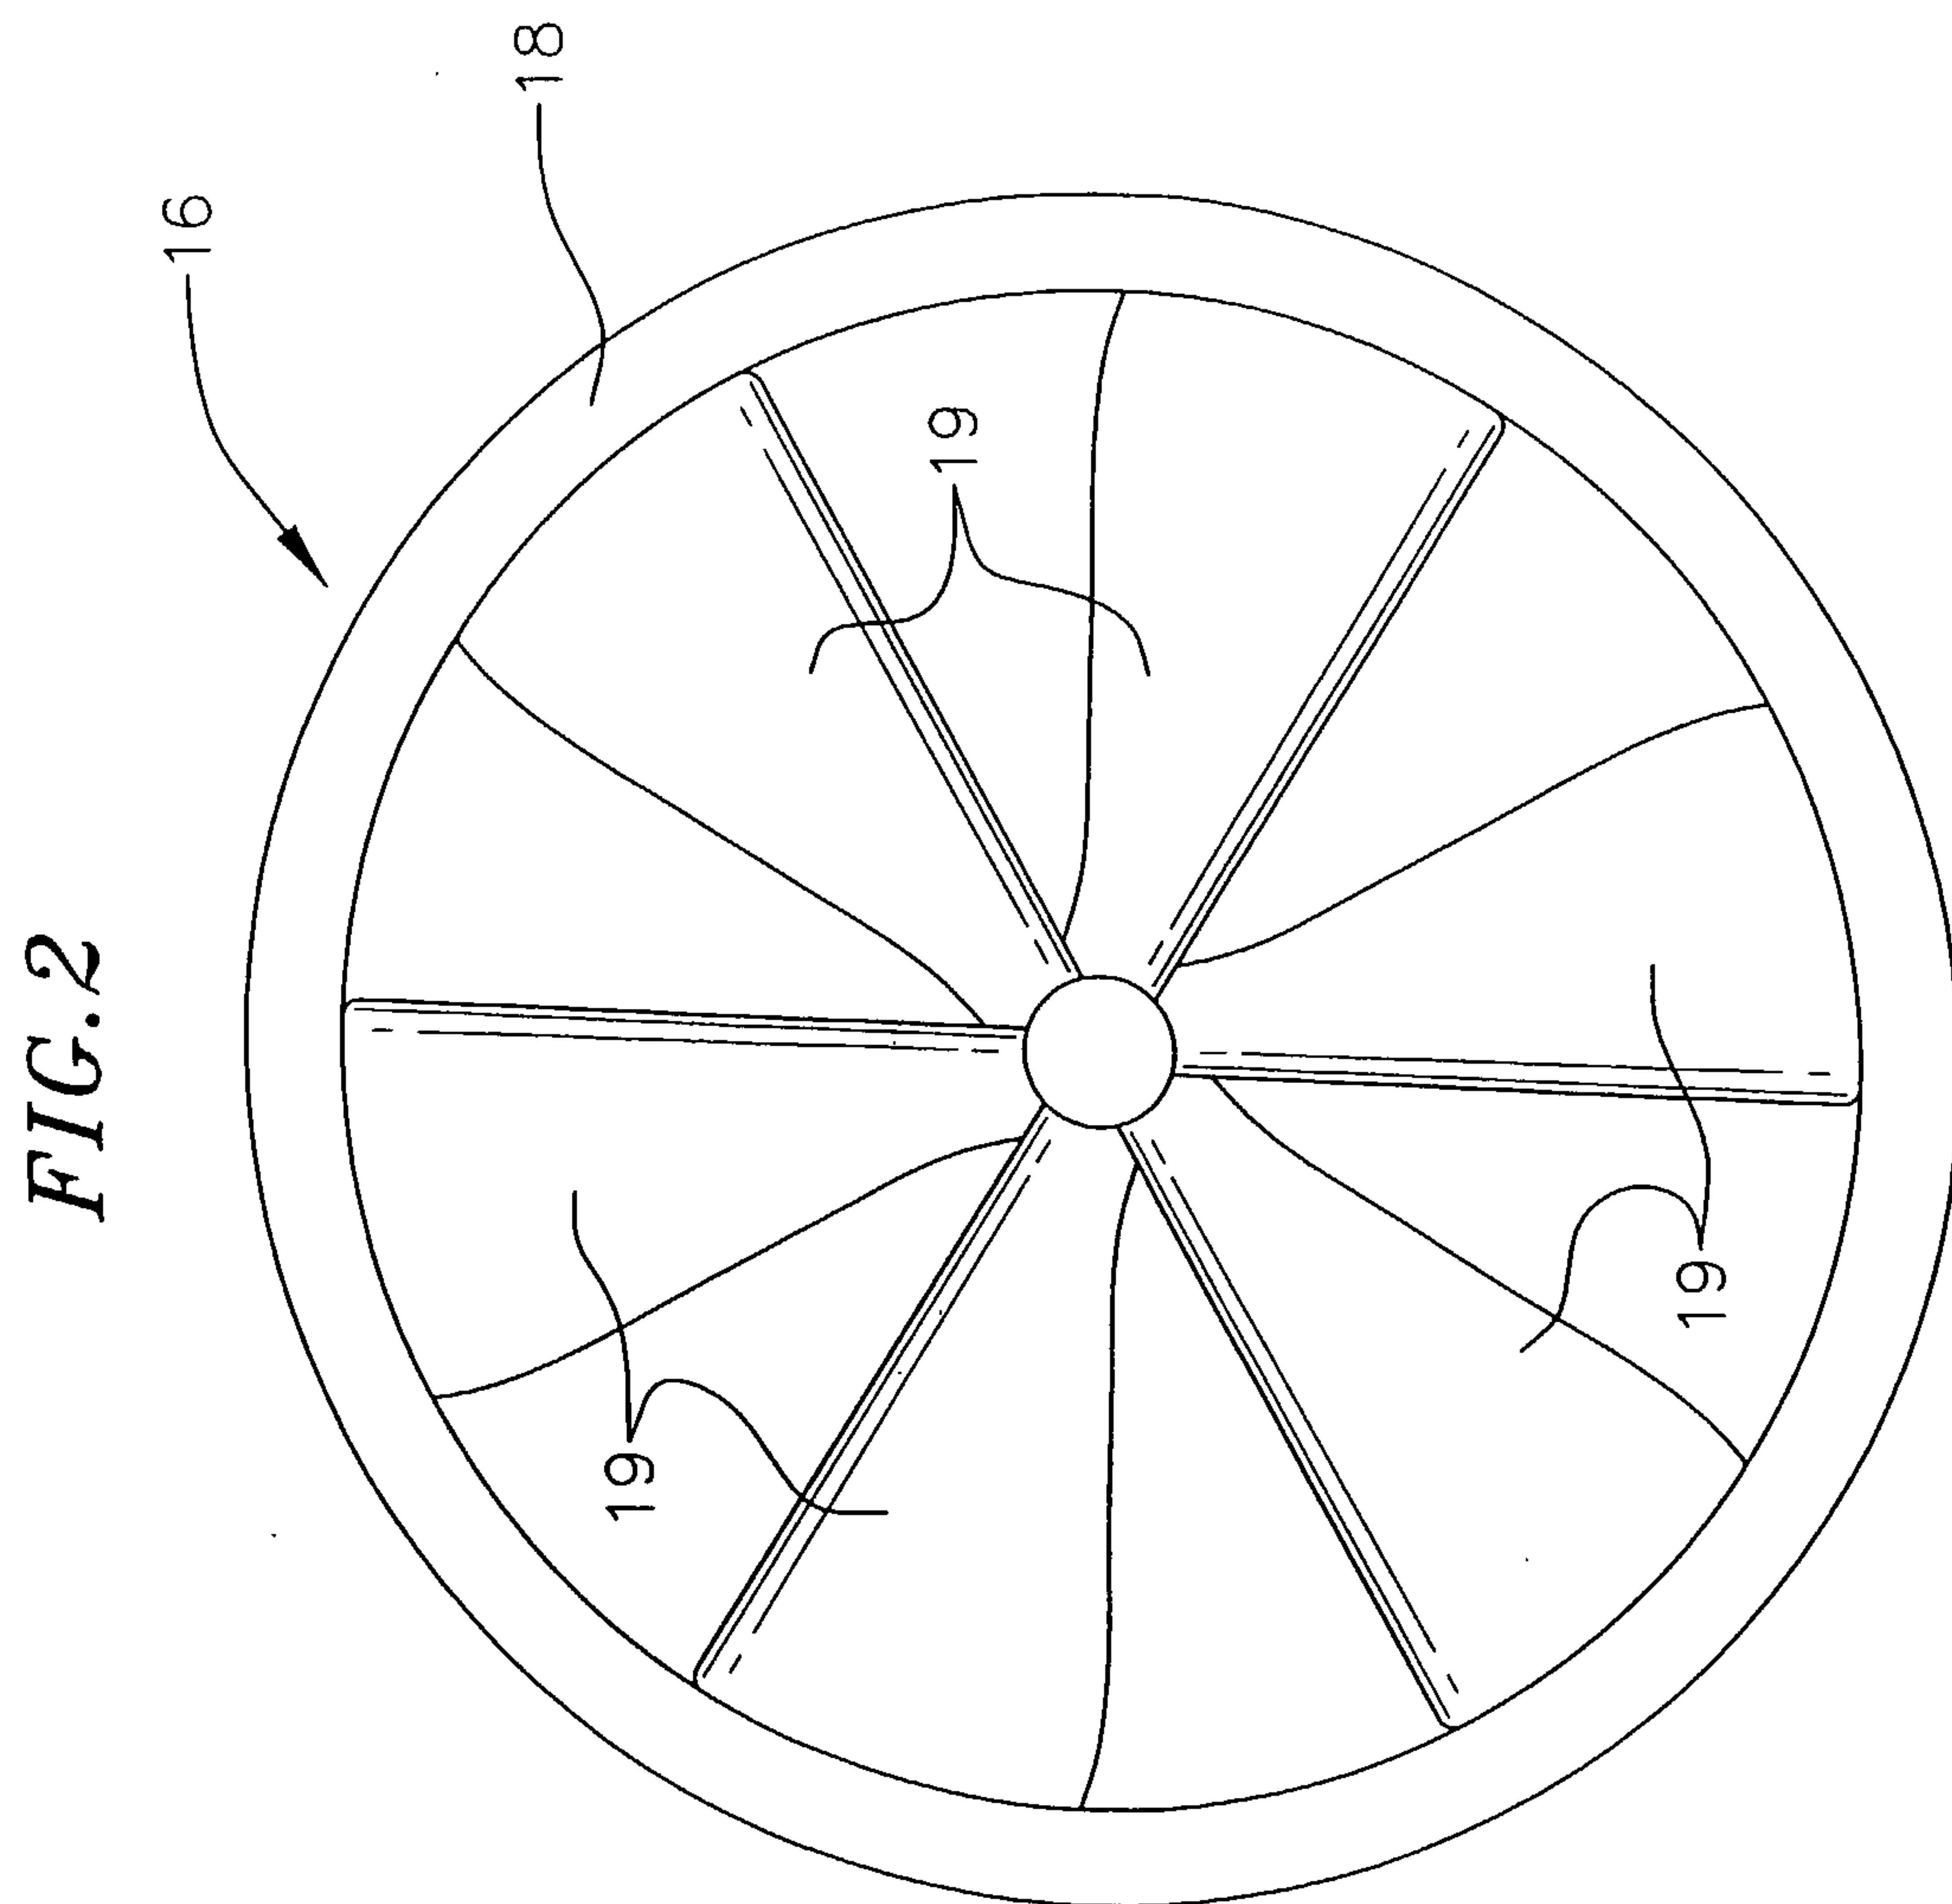

3/6

FIG. 3

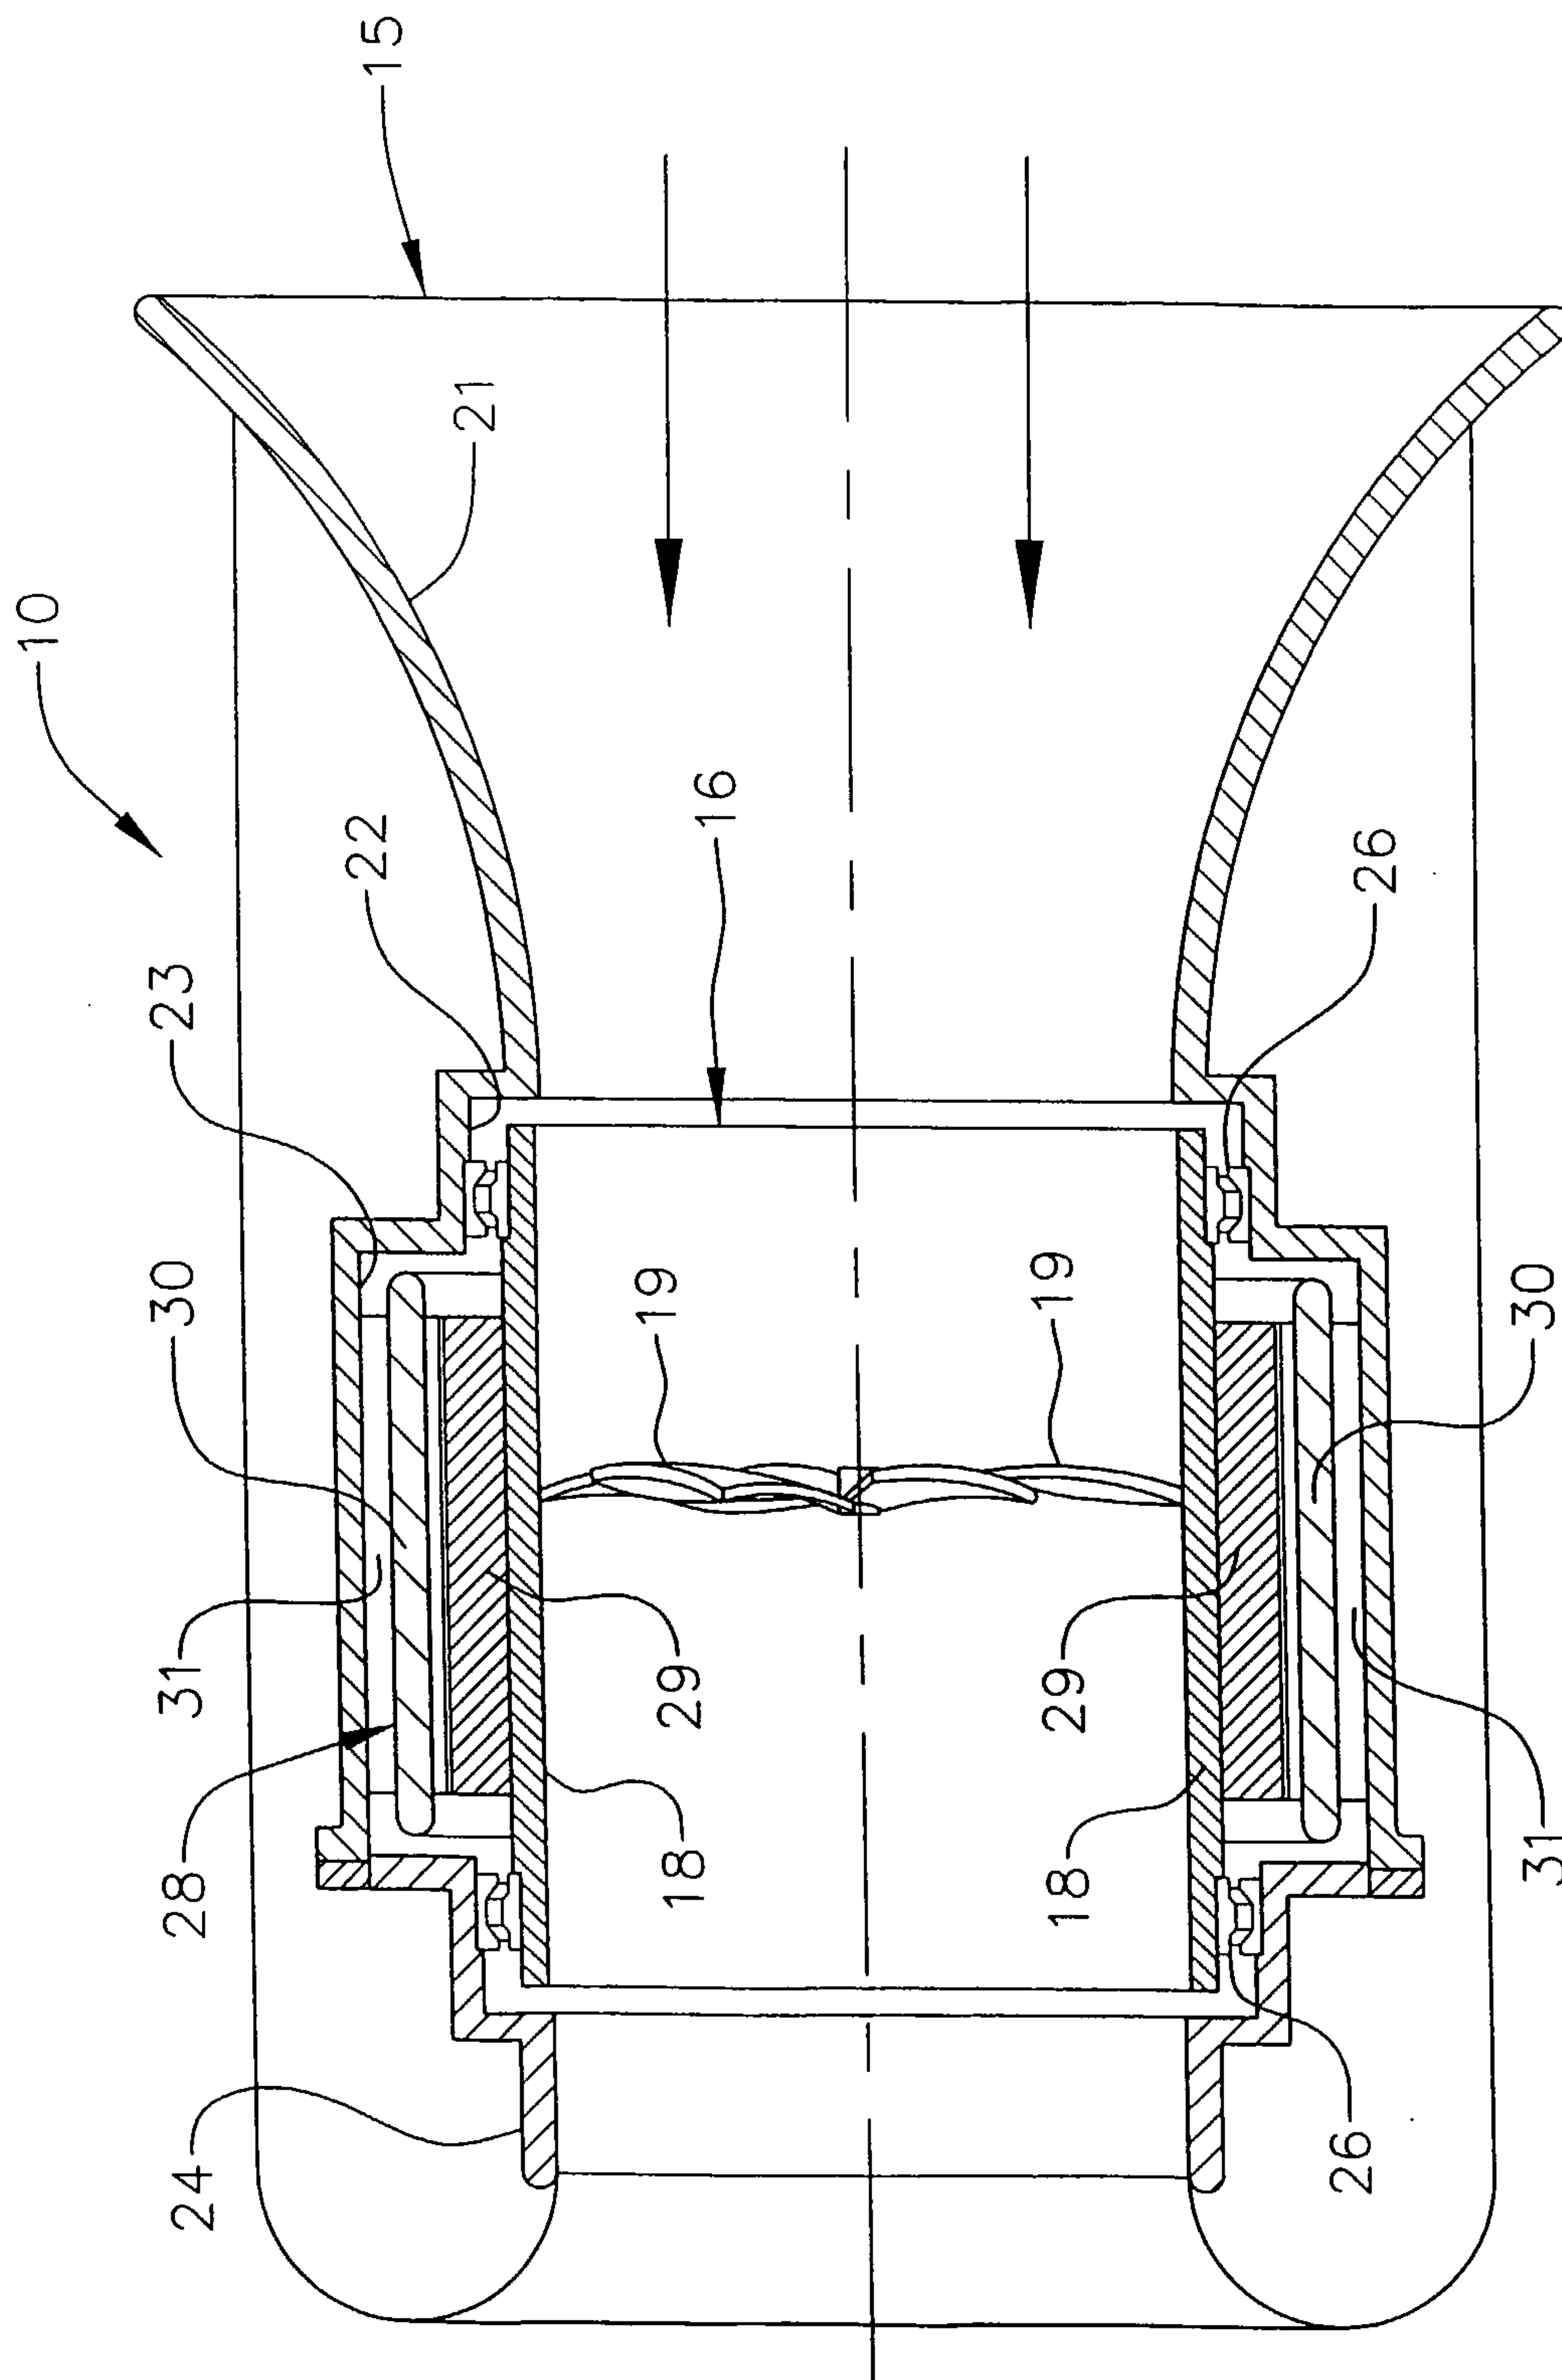


FIG. 4


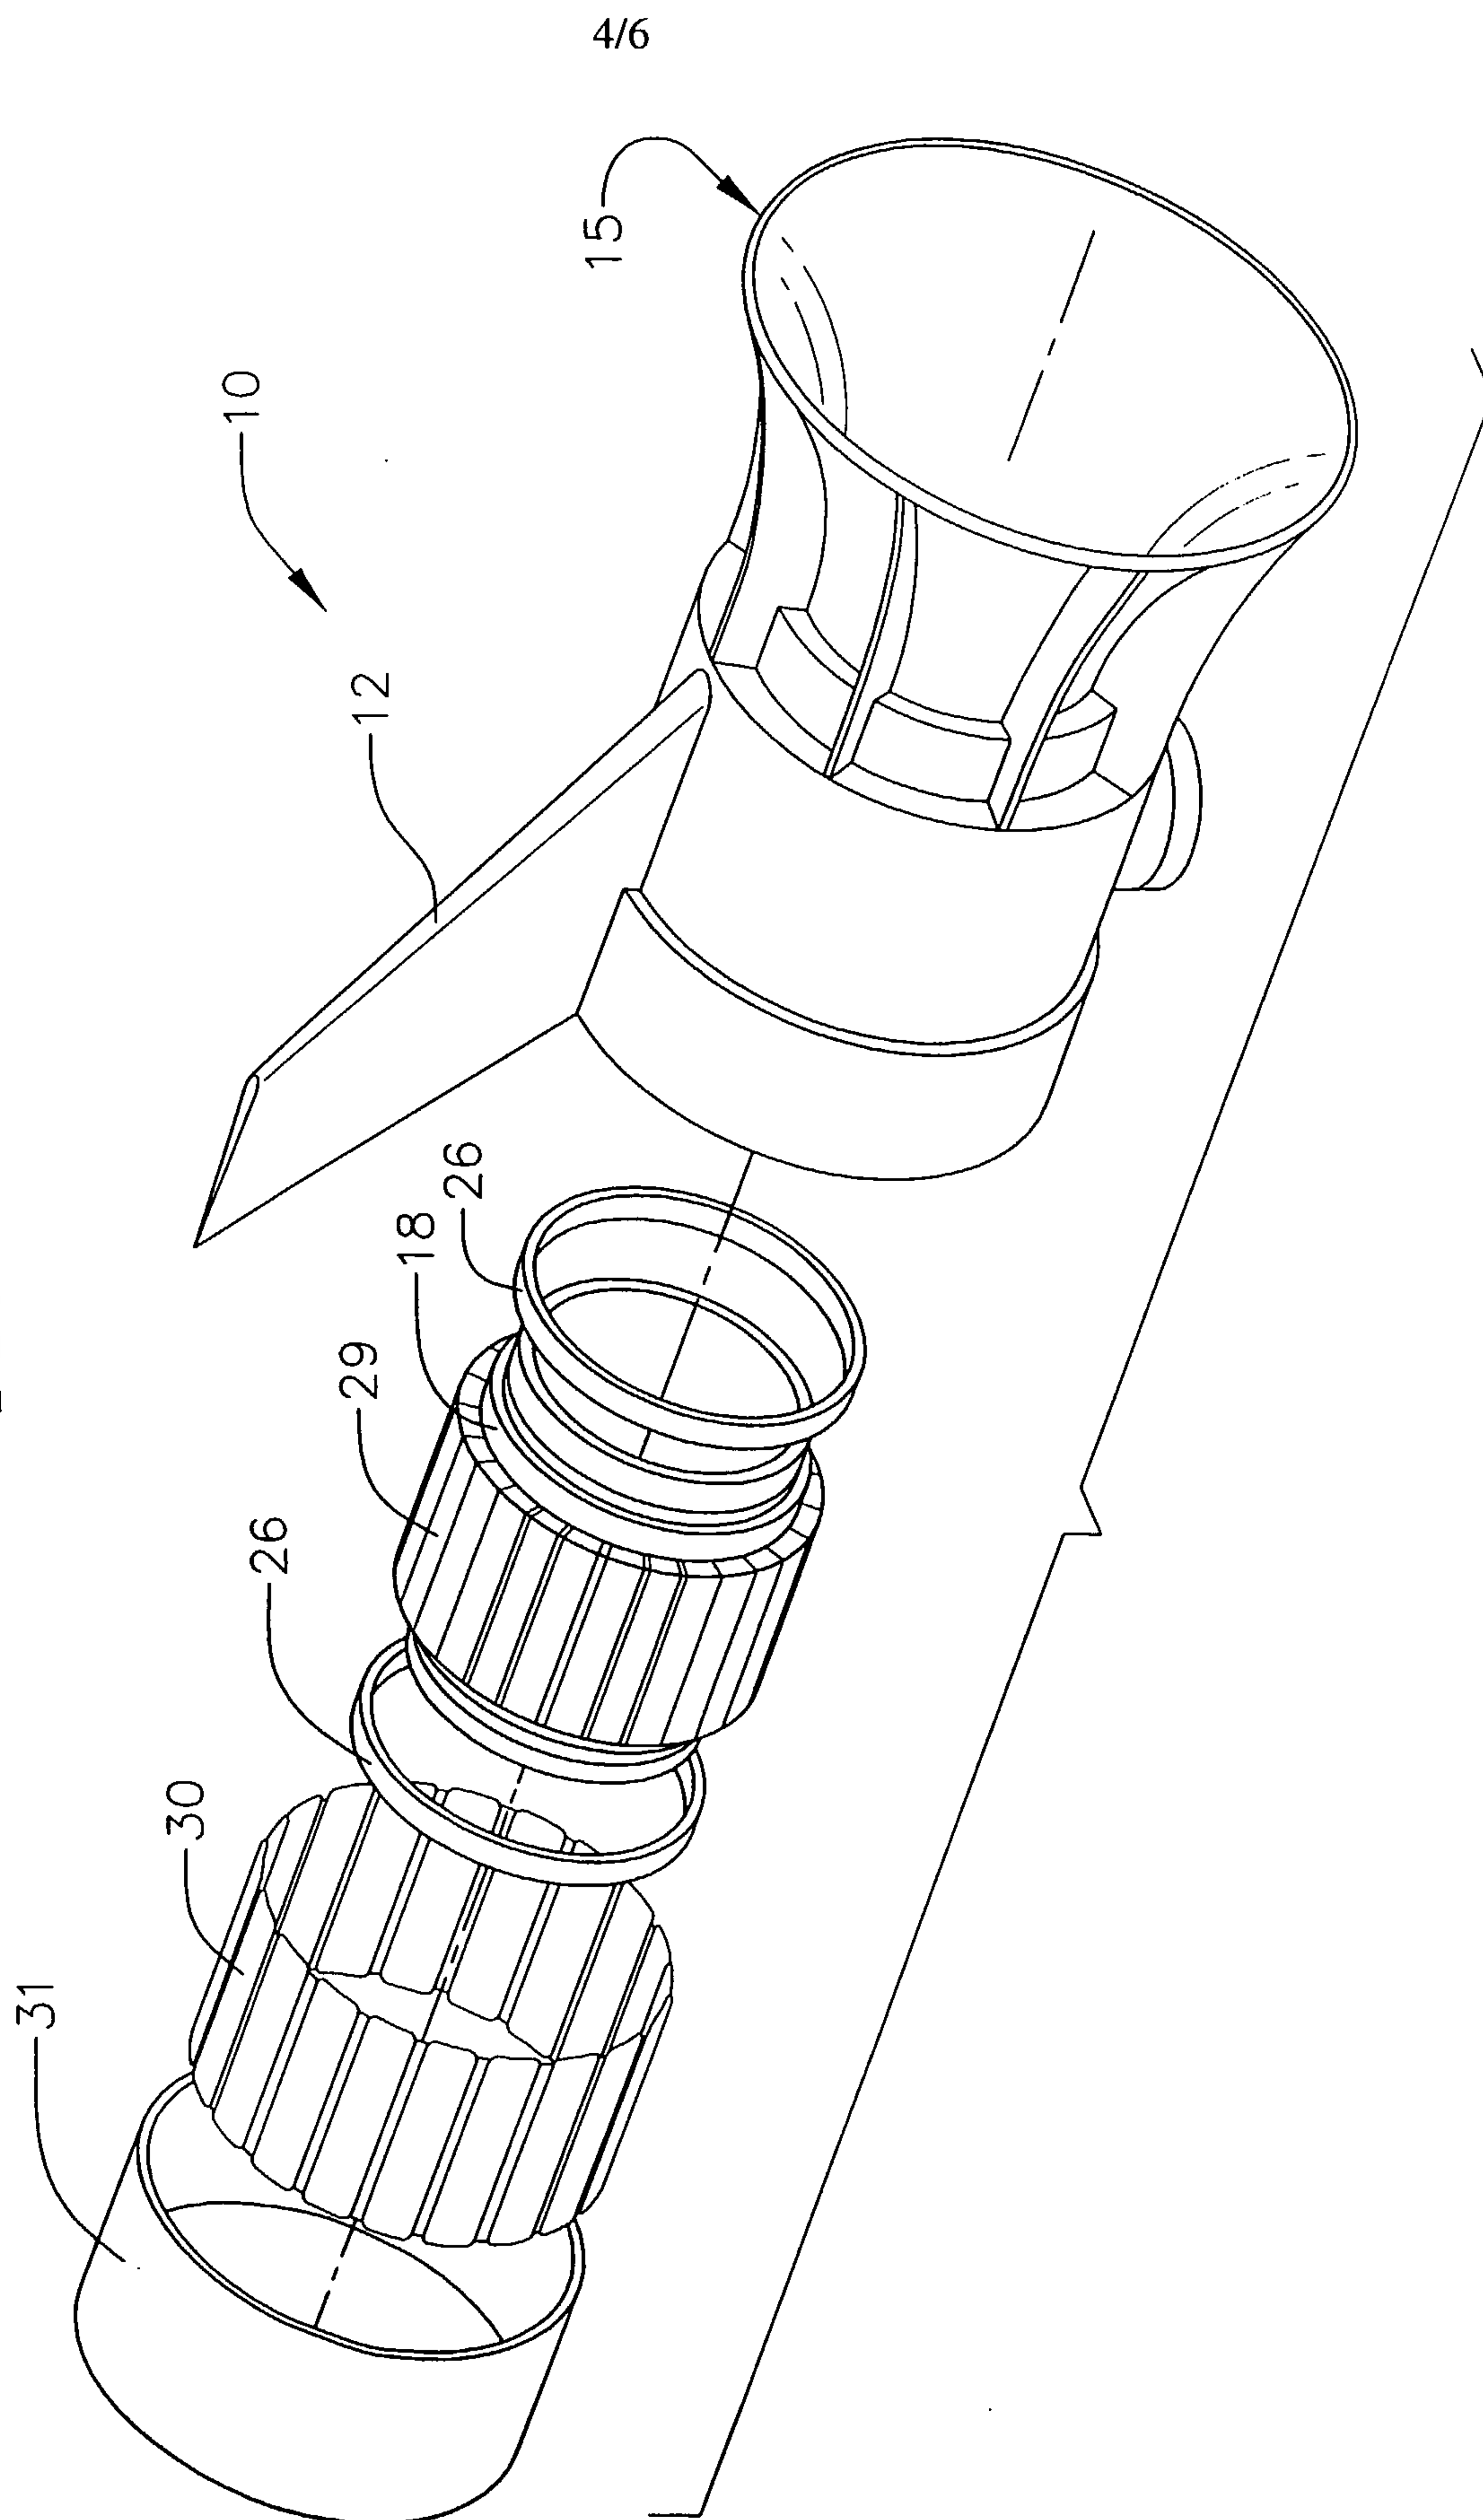


FIG. 5



6/6

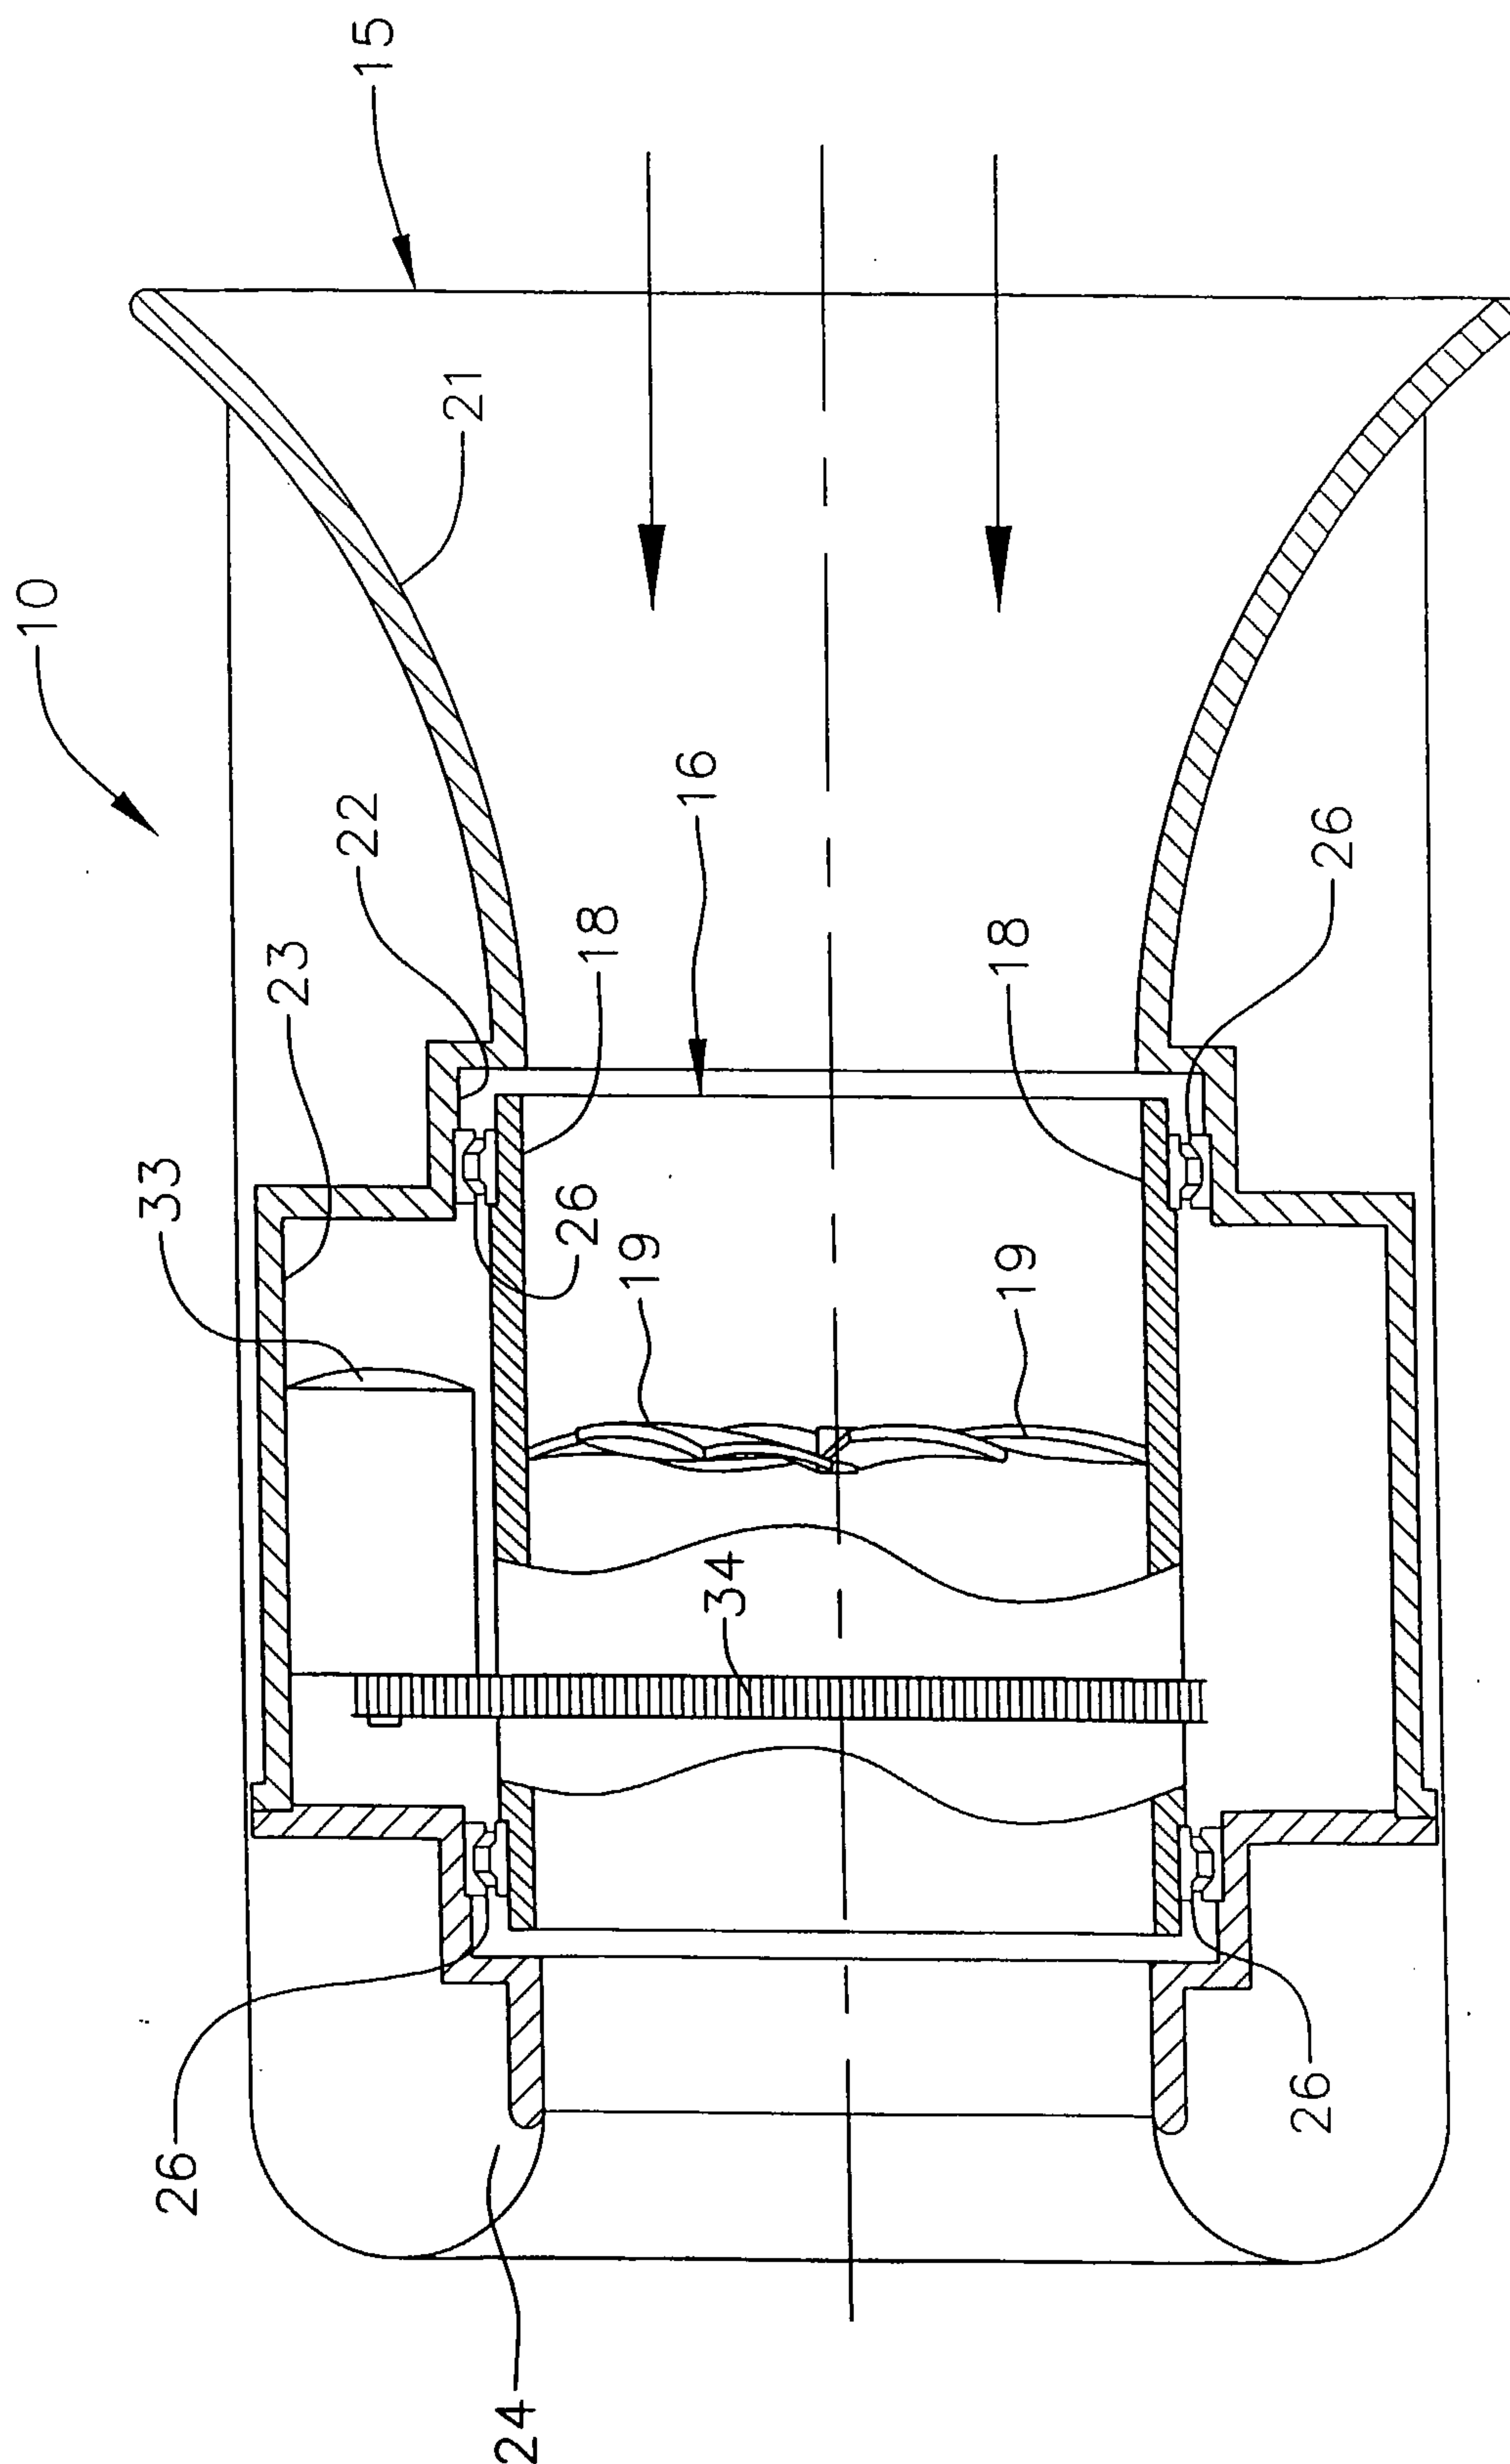