

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 June 2006 (22.06.2006)

PCT

(10) International Publication Number
WO 2006/065795 A2

(51) International Patent Classification: **Not classified**

(21) International Application Number:
PCT/US2005/045023

(22) International Filing Date:
12 December 2005 (12.12.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/635,932 14 December 2004 (14.12.2004) US
11/176,874 7 July 2005 (07.07.2005) US

(71) Applicant (for all designated States except US): **ALCATEL** [FR/FR]; 54, Rue La Boetie, F-75008 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ROSE, Laurence** [FR/US]; 6652 Smoketree Avenue, Oak Park, CA 91377 (US). **IVALDI, Guillaume** [FR/US]; 5910 Misty Court, Agoura Hills, CA 91301 (US).

(74) Agent: **HOERSTEN, Craig**; Alcatel, 3400 W. Plano Parkway, M/s Leg12, Plano, TX 75075 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RING RAPID SPANNING TREE PROTOCOL

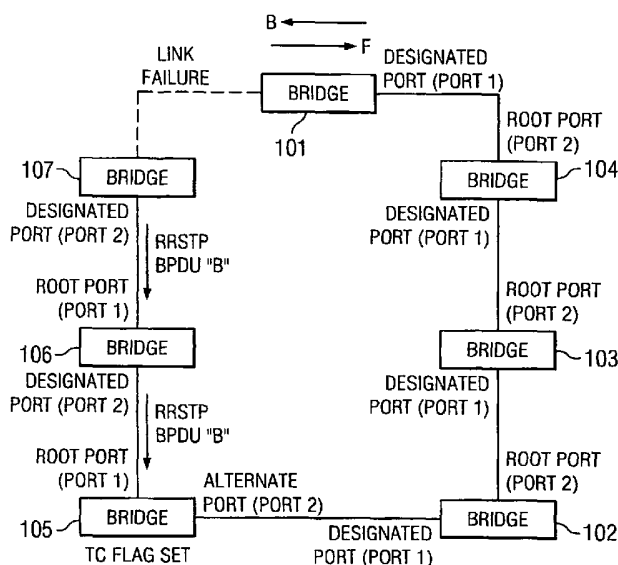

(57) Abstract: In a method for enabling facilitation of re-convergence, designation information for a first port of each one of a plurality of bridges in a multi-bridge ring is received and designation information for a second port of each one of a plurality of bridges in a multi-bridge ring is received. The first port of each one of a plurality of bridges is a first direction Ring Rapid Spanning Tree Protocol (RRSTP) port and the second port of each one of a plurality of bridges is a second direction RRSTP port. The first direction around the ring (e.g., a forward direction) is opposite the second direction around said ring (e.g., a backward direction). A first reserved MAC address is associated with the first direction port of each one of the bridges and a second reserved MAC address is associated with the second direction port of each one of the bridges.

WO 2006/065795 A2

RING RAPID SPANNING TREE PROTOCOL

FIELD OF THE DISCLOSURE

The disclosures made herein relate generally to communication network
5 path redundancy techniques and, more particularly, to spanning tree protocols.

BACKGROUND

Various types of spanning tree protocols are known (i.e., conventional
spanning tree protocols). Such conventional spanning tree protocols serve to
provide path redundancy for nodes of a network, while preventing any undesirable
10 loop in the network. Examples of conventional spanning tree protocols include,
but may not be limited to, Spanning Tree Protocol (STP), Rapid Spanning Tree
Protocol (RSTP) and Multiple Spanning Tree Protocol (MSTP). STP is a legacy
protocol in accordance with the IEEE 802.1D 1998 standard. RSTP is in
accordance with IEEE 802.1D 2004 standard. MSTP is in accordance with the
15 IEEE 802.1Q 2003 standard.

A particular process a spanning tree protocol performs when a change in
topology occurs is referred to as convergence calculation, convergence or re-
convergence. Examples of such topology changes include, but may not be limited
to, a link failing and a bridge or bridge port being added to the topology. Such a
20 convergence process comprises computing a new spanning tree from a root bridge
to all bridges and designating some bridge ports as “forwarding” or “discarding”.
Through this convergence process, a loop free topology is provided for. Once
convergence is finished, the network node topology is stable and the implemented

spanning tree protocol is in steady state, exchanging only hello message about every 2 seconds (i.e., referred as the “hello time”).

Avoiding loop in a network is an important task of a spanning tree protocol. When loop occurs, communication of information via an affected bridge
5 or bridges quickly becomes very confusing and demanding of processing resources (e.g., central processing unit resources). If loop occurs, a bridge may see the same station (i.e., its own MAC address) on two different ports at the same time, thus misleading the forwarding engine as to which destination port packets should be sent.

10 Loop in a network also adversely impacts functionality and/or efficiency of Source Learning Protocol. Source Learning Protocol refers to a software or hardware processing, whose role is maintaining a Layer 2 bridging table (i.e., the Filtering database). This Layer 2 bridging table associates any learned, given MAC address to a given port in a given VLAN. In doing so, it allows Layer 2
15 forwarding processing to take place (i.e., sending a given frame to the correct port). When loop occurs, each time a station is learned on a port, if that same MAC address has been seen before on another port, the Source Learning Protocol software carries out “Mac Address Movement” processing whereby it updates the Layer 2 bridging table according to the most recent information available (i.e.,
20 finding an old MAC address, deleting it and creating a new MAC address).

Conventional spanning tree protocols such as, for example, STP, RSTP and MSTP inhibit flooding or bridging of Bridge Protocol Data Units (BPDUs) by hardware. As is the case, conventional spanning tree protocols are only implemented in software because of the complexity of the associated algorithm.
25 Spanning tree protocol software is solely responsible for sending BPDUs across a network. This means that the more nodes there is in a given topology, the longer it takes to re-converge because each time a BPDU is received, it has to be processed

by spanning tree protocol software before the spanning tree protocol software can in turn send the BPDUs on one or several ports.

Hardware transit time through a non-overloaded bridge is estimated around 5 microseconds for small frame data units such as BPDUs. Software processing time to process and send one or several BPDUs can be as low as 10-50 milliseconds, in the case the software is not overloaded. But, it can increase dramatically, when software is getting congested. Thus, with conventional implementations of spanning tree protocols, it is not practical or realistic to guaranty sub-x millisecond re-convergence times for all topology because software-processing time is usually not negligible as compare to hardware transit time.

Ethernet Automatic Protection Switching (EAPS) is a proprietary protocol offered by Extreme Network. EAPS offers resilient packet ring (RPR) functionality to provide sub-second fail-over protocol that allows a ring topology to re-converge without the use of spanning tree protocol functionality (i.e., IEEE 802.1D). Extreme Network's EAPS claims to provide a sub-50ms recovery time, regardless of the number of nodes in a ring. However, it is probable that EAPS is subjected to transit time through all the nodes in a ring, which is accomplished via hardware to minimize the recovery delay. EAPS sends a "Topology Change" kind of frame in order to flush an associated forwarding table, thus allowing new topology to get learned. Accordingly, the claimed sub-50ms re-convergence time likely does not take into account that processing of topology change across the entire ring (including flushing the L2 forwarding table) in order to relearn the right topology. Probably, activating a link known in advance as the backup link after a failure occurs in the ring is considered as re-convergence.

EAPS ports are excluded from participating to any spanning tree protocols in a particular VLAN. Thus, EAPS is clearly not compatible with any spanning

tree protocol (e.g., STP RSTP or MSTP). EAPS relies on two distinct mechanisms: link down alerts and ring polling frames. EAPS elects a master node, which has a primary port and a secondary port. When a link down event occurs, the node that detects the link down event immediately sends a link down control
5 frame toward the master node. The master node is also responsible for activating the backup link, which is its secondary link. The secondary link on a master node is normally blocked to insure a loop-free topology. After a failure, when the secondary link is up, the master node flushes its own forwarding table and also sends a control frame to all other ring nodes, instructing them to flush their
10 forwarding tables. Ring polling frames are also used to monitor link failure. If a ring is safe, then each ring-polling frame is sent from the primary port and received on the secondary port. When a failure occurs, after the fail-period timer times out, the master node activates its secondary port and proceeds to the topology change kind or processing, in flushing its own forwarding table and in
15 instructing the other nodes to do so (i.e., via the control frame). It can be seen that the ring polling mechanism is also used to provide a back-up mechanism in case the link down” mechanism fails when, for example, a link down frames gets lost.

Therefore, an implementation of spanning tree protocol that overcomes drawbacks associated with conventional implementations of spanning tree
20 protocol would be useful, advantageous and novel.

SUMMARY OF THE DISCLOSURE

Embodiments of the present invention relate to devices at layer two (L2) of the Open Systems Interconnection (OSI) reference model, which are controlled by proprietary, standardized L2 (i.e., IEEE standardization) and layer 3 (L3) protocols (i.e., IETF standardization) protocols. These devices are hereinafter referred to as “bridges”. Such embodiments of the present invention are advantageous and novel implementations of Rapid Spanning Tree Protocol (RSTP). The current RSTP standard is defined in the document “IEEE 802.1D
2004 Standard for Local and Metropolitan Area Networks: Media Access Control (MAC) Bridges”.

The present invention is referred to herein as Ring rapid Spanning Tree Protocol (RRSTP). RRSTP solves a problem that exists with various conventional configurations of Spanning Tree Protocols (STPs). Examples of such STPs include, but are not limited to, basic STP (i.e., STP), Multiple STP (MSTP) and Rapid Spanning Tree Protocol (RSTP). The problem with such conventional configurations of STP is that convergence time depends on the number of nodes in a topology. As the number of nodes increases, the time for re-converge increases.

RRSTP overcomes limitations of conventional configurations of STP in facilitating re-convergence. More specifically, RRSTP provides a means of facilitating re-convergence with a bound convergence time and in a manner that maintains compatibility with RSTP. Because RRSTP supports RSTP, it has to insure that the “bridge max age” variable that also translates somehow into “hop-

count” should be set between 6 and 40, as per the standard, still limiting the ring size to less than a given maximum number of nodes, according to complex formulas in the different known STP standards.

To insure a bound convergence time, RRSTP relies on hardware of a node
5 (i.e., a bridge) to forward proprietary Bridge Protocol Data units (BPDUs). Advantageously, RRSTP allows sub 50 ms ring spanning tree re-convergence, for the RRSTP ring, but also allows a conventional Spanning Tree protocol (i.e., RSTP or MSTP) to apply anywhere else in the ring. This means that topology of the ring is not reduced solely to an RRSTP ring, but is essentially completely free
10 around the ring. The ring sub 50 milliseconds convergence is insured in the ring only and RRSTP provides for sub 50 milliseconds convergence with until the maximum hops induced by the “bridge max age” standard variable is achieved.

It remains true that, the number of nodes a ring still impacts total transit time and re-convergence time, even though RRSTP is implemented via hardware.
15 However, transit time across one bridge and the time it takes to send a frame over a 1Gbps link is about 10 microseconds. Thus, even with a big topology, the hardware transit time (i.e., time to transmit over a bridge and a 1Gbps link) is essentially negligible with respect to software processing time.

A key aspect of RRSTP protocol is that it provides for rapid convergence
20 in a ring topology, but maintains compatibility with other Spanning Tree Protocols. This allows for two ports on a bridge to be dedicated to RRSTP, while having all ports of the bridge participating to any STP standard, including the two that are participating to the RRSTP protocol. For conventional STPs (e.g., basic STP, RSTP, and MSTP), it is useful and advantageous for RRSTP ports to be still
25 participating to any conventional standard STP for any meshed topology, as it is any other port. In this manner, an RRSTP port interacts with the whole topology exchanging conventional BPDU frames (i.e., BPDU frames in accordance with a

conventional STP), and not only the ring topology.

In one embodiment of the present invention, a method comprises receiving designation information for a first port of each one of a plurality of bridges in a multi-bridge ring and receiving designation information for a second port of each one of a plurality of bridges in a multi-bridge ring. The first port of each one of a plurality of bridges is a first direction Ring Rapid Spanning Tree Protocol (RRSTP) port, the second port of each one of a plurality of bridges is a second direction RRSTP port and the first direction around the ring (e.g., a forward direction) is opposite the second direction around the ring (e.g., a backward direction). The method further comprises associating a first reserved MAC address with the first direction port of each one of the bridges and associating a second reserved MAC address with the second direction port of each one of the bridges.

In another embodiment of the present invention, a method comprises configuring two ports of each one of a plurality bridges in a multi-bridge ring for bi-directional transmission of information transmission units and configuring a forwarding table utilized by each one of the bridges such that a first one of the ports of each one of the bridges receives traffic associated with the first reserved MAC address and a second one of the ports of each one of the bridges receives traffic associated with the second reserved MAC address. The first one of the ports of each one of the bridges is a first direction port that transmits information transmission units in a first direction around the ring and the second one of the ports of each one of the bridges is a second direction port that transmits information transmission units in a first direction opposite the first direction around the ring

In another embodiment of the present invention, Spanning Tree Protocol (STP) software comprises a plurality of instructions. Instructions are provided for

configuring two ports of a respective bridge on which the RRSTP software resides for bi-directional transmission of information transmission units and for configuring a forwarding table utilized by the respective bridge such that the first direction RRSTP port receives traffic associated with the first reserved MAC
5 address and the second direction RRSTP port receives traffic associated with the second reserved MAC address. A first one of the ports is a first direction RRSTP port that transmits information transmission units in a first direction around a ring of bridges, a second one of the ports is a second direction RRSTP port that transmits information transmission units in a second direction around the ring of
10 bridges and the first direction around the ring of bridges is opposite the second direction.

These and other objects, embodiments, advantages and/or distinctions of the present invention will become readily apparent upon further review of the following specification and associated drawings.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

FIGS. 1A and 1B depict a method for facilitating re-convergence functionality in accordance with the present invention.

FIG. 2 depicts an embodiment of modification required to Disabled Port
5 role transition state machine of IEEE 802.1D 2004 standard for enabling re-convergence functionality in accordance with the present invention.

FIG. 3 depicts an embodiment of modification required to Port Transmit state machine of IEEE 802.1D 2004 standard for enabling re-convergence functionality in accordance with the present invention.

10 FIG. 4 depicts an embodiment of modification required to Port receive state machine of IEEE 802.1D 2004 standard for enabling re-convergence functionality in accordance with the present invention.

FIG. 5 depicts an embodiment of modification required to Port information state machine of IEEE 802.1D 2004 standard for enabling re-convergence
15 functionality in accordance with the present invention.

FIG. 6 depicts an embodiment of modification required to Topology Change state machine of IEEE 802.1D 2004 standard for enabling re-convergence functionality in accordance with the present invention.

FIG. 7 depicts a first alternate embodiment of a RRSTP-supporting node
20 topology.

FIG. 8 depicts a second alternate embodiment of a RRSTP-supporting node topology.

DETAILED DESCRIPTION OF THE DRAWING FIGURES

As disclosed above, the present invention (i.e., referred to herein as RRSTP) is advantageously implemented while a conventional version of spanning tree protocol (i.e., STP) is active. RRSTP is discussed hereinafter in reference to
5 the conventional version of STP being RSTP (i.e., Rapid Spanning Tree Protocol). A skilled person will have a full understanding of RSTP topology and RSTP functionality in response to a failure (e.g., a Root port failure), thus such topology and functionality will not be discussed in elaborate and complete detail herein.
10 However, to provide a general framework for this discussion, a brief discussion of an example of such a RSPT environment is presented herein.

One suitable example of a suitable RSTP environment in which RRSTP is capable of being facilitated is defined herein to be an environment in accordance with IEEE 802.1D 2004 standard. In this environment, all nodes (i.e., each one
15 including a bridge) within the environment are configured with the default setting for all performance parameters such as, for example, those performance parameters defined in the IEEE 802.1D 2004 standard within Table 17-1—RSTP Timer and Transmit Hold Count parameter values. The environment may include a relatively large number of nodes (e.g., 7 nodes or more) with RRSTP providing
20 advantageous functionality therein.

A Bridge Protocol Data Unit (i.e., BPDU) is a packet of information that conveys information between a bridge of each node within the RSTP environment. The BPDU is an example of a message priority vector that is structured as follow: <Root Id, Root Path Cost, Designated Bridge ID, Designated

Port ID, Port ID>. Each time a port receives such a BPDU, its compares the vector conveyed with its own held vector, which is referred to as a port priority vector. If information received via the BPDU is a takes precedence of information of the port priority vector, this condition triggers states machines computation for facilitating computation of all ports' role (e.g., Root port, Designated port, Backup port and Alternate port), thus allowing the re-design of a spanned tree of the RSTP environment. Such a re-design comprises election of one Root Bridge in the spanned tree, a Root Port on each bridge, a Designated Port for each link or local area network, none or more Alternate Port(s) that allows an alternate path toward the root bridge and none or more Backup Port that provides an alternate path toward the leaves of the tree (i.e., subtending nodes of the tree). The Root Bridge has the lowest bridge identifier (i.e., a MAC address and a priority). The Root Port provides the shortest distance to the Root Bridge (i.e., using the root path cost standard parameter to determine such distance. Alternate Port and Backup Port roles allow connectivity in case other network components fail. Any port can also be in Forwarding, Discarding or Learning states as defined in the IEEE 802.1D 2004 standard.

Topology Change and Proposal/Agreement messages are fully explained in the 802.1D 2004 standard. With respect to a Proposal/Agreement message, a Designated port that is "Discarding" is always attempting to become a Forwarding port. As described in paragraph 17.10 - Changing Port States of the 802.1D 2004 standard, "Any Designated Port that transitions to Discarding requests permission to transition to Forwarding in turn from its neighboring Bridge. The effect is that a "cut" in the active topology is propagated away from the Root Bridge until it reaches its final position in the stable active topology or the edge of the network". Thus, the effect is a temporary cut being propagated in the active topology during the proposal/agreement BPDUs exchanged between each neighbor. Such events are being spread from the current node till reaching each edge nodes. With respect to Topology Change messages, each time a port is becoming Designated

Forwarding (and was not Designated Forwarding before) or Root Forwarding (and was not Root Forwarding before), the respective Topology Change state machine treats that port as becoming active in the network topology and that bridge has to flush all MAC addresses on all ports (i.e., except on itself) and to propagate a
5 Topology Change message on all ports except on itself. Any port on any bridge receiving a Topology Change message in turn has to flush all MAC addresses on all ports except on itself and propagate a Topology Change message on all ports except on itself.

Turning now to discussion of specific aspects of the present invention,
10 RRSTP has a number of specific environment configuration requirements for facilitating re-convergence in a network of nodes. These specific environment configuration requirements must be in place for such re-convergence functionality in accordance with the present invention to be facilitated. Accordingly, a method for facilitating RRSTP functionality in accordance with the present invention
15 includes performing operations for implementing these specific environment configuration requirements. In one embodiment, such operations are preferably performed by software (i.e., STP software) configured for facilitating RRSTP functionality in accordance with the present invention. Such RRSTP functionality includes facilitating operations (e.g., instructing a user to perform such operations)
20 for implementing these specific environment configuration requirements and/or facilitating re-convergence functionality.

For each node, an operation is performed for facilitating designation of two RRSTP ports maximum per RRSTP ring. In association with facilitating designation of the two RRSTP ports, an operation is performed for associating a
25 first one of the RRSTP ports of each node with a forward direction (e.g., a first direction) and associating a second one of the RRSTP ports of each node with a backward direction (e.g., a second direction). In one embodiment, STP software in accordance with the present invention prompts a user to enter information that

designates the two RRSTP port for each node and to enter information that associates the first one of the RRSTP ports of each node with the forward direction and associates the second one of the RRSTP ports of each node with the backward direction.

5 Accordingly, it is disclosed herein that all ports associated with the forward direction allow looping around the ring in the forward direction and all ports associated with the backward direction allow looping around the ring in the backward direction. Thus, first direction around a ring of nodes is opposite the second direction around the node of rings.

10 An operation is performed for reserving two proprietary destination MAC addresses (i.e., media access control addresses) per RRSTP ring. These two destination MAC addresses are also referred to herein as RRSTP MAC addresses. A first one of the MAC addresses is associated with the forward direction and a second one of the MAC addresses is associated with the backward direction.
15 Preferably, the two MAC addresses are well-known proprietary MAC addresses. Each RRSTP BPDU complies with IEEE 802.1D 2004 BPDU format with the exception that its destination MAC address is proprietary.

 A conventional STP that a node supports (e.g., RSTP, MSTP etc) must also be supported normally on each RRSTP port. Thus, the method preferably,
20 but not necessarily, includes an operation for facilitating verification and/or implementation of the conventional STP one ach node.

 After designation of two RRSTP ports maximum per RRSTP ring is performed and after association of the RRSTP ports with their respective directions is performed, an operation is performed for configuring a Layer 2 (i.e.,
25 L2) forwarding table accessible by each one of the nodes such that each RRSTP

MAC address is associated to the port for that direction. In this manner, traffic associated with the RRSTP MAC addresses corresponding to the forward direction is sent to the RRSTP port associated with the forward direction and traffic associated with the RRSTP MAC addresses corresponding to the backward
5 direction is sent to the RRSTP port associated with the backward direction.

An operation is performed for configuring hardware of each node for sending BPDUs (i.e., BPDU frames) using either of the RRSTP MAC addresses to a CPU of such hardware. A BPDU transmitted using a RRSTP MAC address is referred to herein as a RRSTP BPDU. In one embodiment, STP software is
10 appropriated configured for programming a bridge of each node for sending each RRSTP BPDU to the CPU of the respective bridge. In this manner, each RRSTP BPDU is sent to a CPU of respective hardware and is also forwarded by the respective hardware.

Referring to the FIGS. 1A-1B, a method for facilitating re-convergence
15 functionality in accordance with the present invention is depicted. The re-convergence functionality is facilitated among a plurality of nodes in a ring of nodes. Each one of the nodes includes a respective bridge (i.e., Bridges 101-107). A backward direction B refers to a counterclockwise direction (i.e., from Bridge 101 directly toward Bridge 107). A forward direction F refers to a clockwise
20 direction (i.e., from Bridge 101 directly toward Bridge 104).

Upon detecting a link failure between Bridge 101 and Bridge 107 (FIG. 1A), STP software on Bridge 107 facilitates sending of a RRSTP BPDU-B (for backward) on its port 2 using a RRSTP MAC address associated with the backward direction. The RRSTP BPDU-B includes all standard fields for a
25 currently active conventional STP (i.e., RSTP in the present discussion). As was disclosed above in reference to environment configuration requirements for facilitating re-convergence in a network of nodes, conventional RSTP processing

remains unchanged and conventional RSTP BPDU dialog is transpiring during RRSTP functionality.

Still referring to FIG. 1A, STP software on Bridge 106 receives the RRSTP BPDU-B. Because there is no port designated as Alternate on Bridge 106
5 and a TC flag on Bridge 106 is not set (i.e., set to active), the STP software of Bridge 106 forwards the RRSTP BPDU-B at high speed by hardware toward the RRSTP port of Bridge 105 that defines the forward direction and the CPU drops the RRSTP BPDU-B (i.e., the RRSTP BPDU-B frame).

STP software on Bridge 105 receives the RRSTP BPDU-B. Because there
10 is an port designated as Alternate on Bridge 105 (FIG. 1A), the STP software of Bridge 105 triggers the Port Information state Machine (PIM) states RECEIVE_RRSTP, which is a RRSTP modified PIM RECEIVE state, and RRSTP modified version of rcvInfo() procedure. Port 1 of Bridge 105, which is currently designated as Root Forwarding (i.e., ROOT), immediately becomes
15 designated as Designated Forwarding (i.e., Designated port (forward)) as is depicted in FIG. 1B. Port 2 of Bridge 105, which is initially currently designated as Alternate, attempts to become designated as Root Forwarding (i.e., ROOT port (forward))). Thus, REROOT state of Root port transition state machine is triggered. According to the IEEE 802.1D 2004 standard, any port that was root
20 during the timer set by the "Recent Root timer" and that is currently designated as Designated Forwarding (i.e., Designated port (forward)) should become designated as Discarding. However, ReRoot state is not triggered on the RRSTP Designated port, in the RRSTP modified procedure setReRootTree(). Thus, Port 1 of the Bridge 105 does not become designated as Designated Discarding.
25 Therefore, Proposal/Agreement sequence is not triggered.

Port 2 of the Bridge 105 becomes designated as Root Forwarding. When Port 2 of Bridge 105 (i.e., the port initially designated as Alternate port) becomes

designated as Root Forwarding, STP software on Bridge 105 triggers state DETECTED_RRSTP on a RRSTP port of Bridge 105 and PROPAGATING_RRSTP state of the Topology Change (TC) state machine is also triggered on that bridge port. Thus, STP software of Bridge 105 immediately
5 sends a RRSTP_TC BPDU on Ports 1 and 2 of Bridge 105. STP software of Bridge 105 also facilitates flushing of the L2 (i.e., Layer 2) forwarding table on that RRSTP port.

In response to the RRSTP_TC BPDU being sent on Ports 1 and 2 of Bridge 105, STP software on Bridge 102 receives the RRSTP_TC BPDU. The
10 STP software on Bridge 102 detects the RRSTP_TC BPDU (i.e., the RRSTP frame) and a set TC flag. In response, the STP software on Bridge 102 triggers NOTIFIED_TC_RRSTP state on an RRSTP port.

STP software on Bridge 102 triggers PROPAGATING_WITHOUT_SENDING state of the Topology Change state
15 machine and facilitates flushing of the L2 forwarding table on the RRSTP port. The RRSTP_TC BPDU is also forwarded at high speed via the other RRSTP port toward Bridge 103. It is disclosed herein that all Bridges receiving the RRSTP_TC BPDU perform according to the above RRSTP functionality disclosed above for Bridge 102 (i.e., triggers
20 PROPAGATING_WITHOUT_SENDING state of the Topology Change state machine and flushing of the L2 forwarding table on the RRSTP port).

For enabling facilitation of RRSTP functionality as disclosed above in reference to FIGS. 1A and 1B, modification to various IEEE 802.1D 2004 standard state machines is required. The denoted instructions in FIG. 2 (i.e.,
25 encircled instructions 202) are such required modification to the Disabled Port role transition state machine. The denoted instructions in FIG. 3 (i.e., encircled instructions 302 and 304) are such required modification to IEEE 802.1D 2004

standard Port Transmit state machine. The denoted instructions in FIG. 4 (i.e., encircled instructions 402-410) are such required modification to IEEE 802.1D 2004 standard Port receive state machine. The denoted instructions in FIG. 5 (i.e., encircled instructions 502-508) are such required modification to IEEE
5 802.1D 2004 standard Port information state machine. The denoted instructions in FIG. 6 (i.e., encircled instructions 602-622) are such required modification to IEEE 802.1D 2004 standard Topology Change state machine.

Table 1 below disclosed a description of procedures for various RRSTP state machines. Table 2 below discloses a description of RRSTP per-port
10 variables.

Table 1 – RRSTP State Machine Procedures

findAlternate()	An implementation dependant procedure that returns true if a RRSTP Alternate port part of the same ring than the RRSTP port that receives the RRSTP BPDU that is found. It returns FALSE otherwise.
getLastRRstpOtherPortTree()	An implementation dependant procedure that returns true if a RRSTP BPDU is received on the RRSTP port part of the same RRSTP ring than the port that is calling that procedure (returns lastRRstpPort of the other RRSTP port). It returns FALSE otherwise.
getRecvRRstpThisPortTree()	An implementation dependant procedure that returns true if a RRSTP BPDU is received on the port that is calling that procedure (returns lastRRstpPort of that port). It returns FALSE otherwise.
rcvInfo()	Decodes the message priority and timer values from the received BPDU storing them in the msgPriority and msgTimes variables. Returns SuperiorRRstpInfo if: LastRRstpPort is true and findAlternateRRstpTree() is true. Returns OtherRRstpInfo if: LastRRstpPort is true and the RRSTP frame conveys a Topology Change flag. Returns SuperiorDesignatedInfo if: the received message conveys a Designated Port Role, and 1. the message priority is superior (17.6) to the Port's port priority vector, or 2. the message priority vector is the same as the Port's

	port priority vector, and any of the received timer parameter values (msgTimes—17.19.15) differ from those already held for the Port (portTimes—17.19.22). Returns RepeatedDesignatedInfo if: the received message conveys Designated Port Role, and a message priority vector and timer parameters that are the same as the Port's port priority vector or timer values. Returns InferiorDesignatedInfo if: the received message conveys a Designated Port Role, and a message priority vector that is worse than the Port's port priority vector. Returns InferiorRootAlternateInfo if: the received message conveys a Root Port, Alternate Port, or Backup Port Role and a message priority that is the same as or worse than the port priority vector. Otherwise, returns OtherInfo.
sendRRstpTree()	An implementation dependant procedure that is called only when one of the RRSTP port was active (Root or Designated forward) and becomes "DisabledPort". Sets the RRSTP variable, newInfoRRstp, to true on the other RRSTP port of the same RRSTP ring than the disabled port.
sendTcRRstp	A boolean. Used to send a Topology change flag in the txRRstp() procedure. Reset in the Port Transmit state machine state's TRANSMIT_RRSTP.
setRerootTree()	sets reRoot TRUE for all ports of the Bridge except if the port is a RRSTP port (rrstp is TRUE) with a DesignatedPort role, and if the last BPDU is a RRSTP

	BPDU received on the port (getRcvdThisPortRRstp() is TRUE).
setTcPropRRstpTree()	An implementation dependant procedure that sets tcPropRRstp on all ports if the port is not calling that procedure, if the port is a RRSTP port (rrstp is TRUE), and if the last BPDU is a RRSTP BPDU received on the port part (getRecvRRstpPortTree() is TRUE). The procedure sets tcProp on all ports if the port is not calling that procedure, and if the port is not a RRSTP port (rrstp is FALSE) or if the last BPDU is not a RRSTP BPDU received the port part (getRecvRRstpPortTree() is FALSE).
txRRstp()	Similar to the standard 802.1D 2004 txRstp procedure. However, the MAC DA must set according to the proprietary MAC DA addresses used for that RRSTP ring and direction and not according to the 802.1D 2004 standard. Moreover, the message priority vector RootBridgeId must be set to an arbitrary value, the highest possible. Beside newTcWhile() is not used. If sendTcrRstp is set to true, the Topology Change flag is set, and sendTcRRstp is reset.

Table 2 – RRSTP Per Port Variables

lastRRstpPort	A boolean. Reset when any valid RRSTP BPDU is received. Set by system dependent processes on any RRSTP port receiving a valid RRSTP BPDU. This variable is used to track the last port receiving the last valid RRSTP BBPDU.
newInfoRRstp	A boolean. Set if a RRSTP BPDU is to be transmitted. Reset by the Port Transmit State Machine.
rcvdRRstp	A boolean. Set by system dependent processes (during BPDU receive), this variable notifies the Port Receive state machine when a valid RRSTP BPDU is received on the Port. Valid here has the same meaning as in the 802.1D 2004 standard and related to the standard variable "rcvdBPDU" plus the following: 1. the port must be a RRSTP port (rrstp is set), and 2. the BPDU must be an RST BPDU with the MAC DA matching the MAC DA associated with the other port in the same ring, and 3. there must be either an Alternate RRSTP port on that bridge (findAlternate() is TRUE), or, a Topology Change flag is received in the RRSTP BPDU. If one of those RRSTP conditions is not set, the frame is dropped by software. Reset by the Port Receive state machine.
Rrstp	A boolean. Set if the port is declared as part of a RRSTP ring after the user enters a CLI command. Reset if the use declares that port as non-RRSTP, after the use enters a CLI command.
tcPropRRstp	A boolean: Set by the Topology Change state machine to indicate that a RRSTP topology change should be propagated

	through this port.
tcPropWithoutSendingRRstp	A boolean: Set by the Topology Change state machine to indicate that a RRSTP topology change should not be propagated through this port.

For security reason, Bridge configured in accordance with the present invention (e.g., with STP software in accordance with the present invention) drops any RRSTP frame on a non-RRSTP port, as defined by the variable rcvdRRstp.

5 RRSTP BPDUs are also burst limited as are standard STP BPDUs.

With respect to node topology requirements, it must also be understood that once a port is declared as an RRSTP port for a RRSTP ring, it cannot be used for another RRSTP ring. Additionally, because the standard is modified to allow very rapid re-convergence proposal/agreement sequence, allowed topologies are constrained. For example, node topologies where one link that is not part of the same RRSTP ring as a particular RRSTP ring (i.e., a port is either part of another RRSTP ring or is a STP/RSTP/MSTP port) would be in place between 2 RRSTP bridges already connected through RRSTP ports do not support RRSTP functionality in accordance with the present invention. Examples of alternate node topologies that have two point-to-point links as part of the same RRSTP port and, thus, do support RRSTP functionality in accordance with the present invention are disclosed in FIGS. 7 and 8.

Referring now to computer readable medium (e.g., software), it will be understood from the disclosures made herein that methods, processes and/or operations adapted for carrying out RRSTP functionality as disclosed herein are

tangibly embodied by computer readable medium having instructions thereon for carrying out such functionality. In one specific embodiment, the instructions are tangibly embodied for carrying out at least a portion of the functionality disclosed above in reference to FIGS. 1-6. The instructions may be accessible by one or
5 more data processing devices from a memory apparatus (e.g. RAM, ROM, virtual memory, hard drive memory, etc), from an apparatus readable by a drive unit of a data processing system (e.g., a diskette, a compact disk, a tape cartridge, etc) or both. Accordingly, embodiments of computer readable medium in accordance with the present invention include a compact disk, a hard drive, RAM or other
10 type of storage apparatus that has imaged thereon a computer program (i.e., a set of instructions) adapted for carrying out RRSTP functionality in accordance with the present invention made herein.

In the preceding detailed description, reference has been made to the accompanying drawings that form a part hereof, and in which are shown by way
15 of illustration specific embodiments in which the invention may be practiced. These embodiments, and certain variants thereof, have been described in sufficient detail to enable those skilled in the art to practice the invention. It is to be understood that other suitable embodiments may be utilized and that logical, mechanical and electrical changes may be made without departing from the spirit
20 or scope of the invention. For example, functional blocks shown in the figures could be further combined or divided in any manner without departing from the spirit or scope of the invention. To avoid unnecessary detail, the description omits certain information known to those skilled in the art. The preceding detailed description is, therefore, not intended to be limited to the specific forms set forth
25 herein, but on the contrary, it is intended to cover such alternatives, modifications, and equivalents, as can be reasonably included within the spirit and scope of the appended claims.

CLAIMS

WHAT IS CLAIMED IS:

1. A method, comprising:
 - 5 receiving designation information for a first port of each one of a plurality of bridges in a multi-bridge ring, wherein the first port of each one of a plurality of bridges is a first direction Ring Rapid Spanning Tree Protocol (RRSTP) port;
 - receiving designation information for a second port of each one of
 - 10 a plurality of bridges in a multi-bridge ring, wherein the second port of each one of a plurality of bridges is a second direction RRSTP port and wherein the first direction around said ring is opposite the second direction around said ring;
 - associating a first reserved MAC address with the first direction
 - 15 port of each one of said bridges; and
 - associating a second reserved MAC address with the second direction port of each one of said bridges.
2. The method of claim 1, further comprising:
 - configuring associated hardware of each one of said bridges to
 - 20 forward information transmission units using one of said reserved MAC addresses to a CPU of a respective one of said bridges.
3. The method of claim 1, further comprising:

supporting a conventional Spanning Tree Protocol on said RRSTP
ports of each one of said bridges simultaneously with
supporting said RRSTP on said RRSTP ports.

- 5 4. The method of claim 1 wherein associating said MAC addresses includes
configuring a forwarding table utilized by each one of said bridges such
that the first direction RRSTP port of each one of said bridges receives
traffic associated with the first reserved MAC address and the second
direction RRSTP port of each one of said bridges receives traffic
associated with the second reserved MAC address.
- 10 5. The method of claim 1 wherein said associating the first reserved MAC
address and said associating the second reserved MAC address is
performed, respectively, after receiving designation information for the
first direction RRSTP port and receiving designation information for the
second direction RRSTP port.
- 15 6. The method of claim 1, further comprising:
sending a RRSTP Bridge Protocol Data Unit (BPDU) using the
first reserved MAC address in the first direction toward a
second one of said bridges in response to detecting a link
failure at a first one of said bridges.
- 20 7. The method of claim 6, further comprising:
triggering at least one state of a port information state machine of
the second one of said bridges in response to receiving a
RRSTP BPDU by the second one of said bridges and the
second one of said bridges having a port designated as
25 Alternate, wherein said triggering initiates a port of the

second one of said bridges designated as Root Forwarding becoming designated as Designated Forwarding and wherein a port of the second one of said bridges designated as Alternate becoming designated as Root Forwarding.

5 8. The method of claim 7, further comprising:

triggering at least one state of the port information state machine of the second one of said bridges in response to the port of the second one of said bridges designated as Alternate becoming designated as Root Forwarding, wherein said
10 triggering initiates sending of a RRSTP TC BPDU on both of said RRSTP ports of the second one of said bridges toward a third one of said bridges and flushing the L2 forwarding table on the first one of said bridges.

9. The method of claim 7, further comprising:

15 triggering at least one state of the port information state machine of the third one of said bridges in response to the third one of said bridges receiving the RRSTP TC BPDU, wherein said triggering initiates flushing the L2 forwarding table on the first one of said bridges and sending of the RRSTP TC
20 BPDU in the first direction using the first reserved MAC address from the second one of said bridges toward a fourth one of said bridges.

10. The method of claim 1, further comprising:

25 configuring associated hardware of each one of said bridges to forward information transmission units using one of said reserved MAC addresses to a CPU of a respective one of said bridges; and

supporting a conventional Spanning Tree Protocol on said RRSTP
ports of each one of said bridges simultaneously with
supporting said RRSTP on said RRSTP ports;
wherein said associating includes configuring a forwarding table
5 utilized by each one of said bridges such that the first
direction RRSTP port of each one of said bridges receives
traffic associated with the first reserved MAC address and
the second direction RRSTP port of each one of said
bridges receives traffic associated with the second reserved
10 MAC address; and
said associating the first reserved MAC address and said
associating the second reserved MAC address is performed,
respectively, after receiving designation information for the
first direction RRSTP port and receiving designation
15 information for the second direct on RRSTP port.

11. The method of claim 10, further comprising:

sending a RRSTP BPDU using the first reserved MAC address in
the first direction toward a second one of said bridges in
response to detecting a link failure at a first one of said
20 bridges;
triggering at least one state of a port information state machine of
the second one of said bridges in response to receiving a
RRSTP BPDU by the second one of said bridges and the
second one of said bridges having a port designated as
25 Alternate, wherein said triggering initiates a port of the
second one of said bridges designated as Root Forwarding
becoming designated as Designated Forwarding and
wherein a port of the second one of said bridges designated
as Alternate becoming designated as Root Forwarding;

triggering at least one state of the port information state machine of
the second one of said bridges in response to the port of the
second one of said bridges designated as Alternate
becoming designated as Root Forwarding, wherein said
5 triggering initiates sending of a RRSTP TC BPDU on both
of said RRSTP ports of the second one of said bridges
toward a third one of said bridges and flushing the L2
forwarding table on the first one of said bridges; and
triggering at least one state of the port information state machine of
10 the third one of said bridges in response to the third one of
said bridges receiving the RRSTP TC BPDU, wherein said
triggering initiates flushing the L2 forwarding table on the
first one of said bridges and sending of the RRSTP TC
BPDU in the first direction using the first reserved MAC
15 address from the second one of said bridges toward a fourth
one of said bridges.

12. A method, comprising:

5 configuring two ports of each one of a plurality bridges in a multi-bridge ring for bi-directional transmission of information transmission units, wherein a first one of said ports of each one of said bridges is a first direction port that transmits information transmission units in a first direction around said ring and wherein a second one of said ports of each one of said bridges is a second direction port that transmits information transmission units in a second direction
10 opposite the first direction around said ring; and
configuring a forwarding table utilized by each one of said bridges such that the first one of said ports of each one of said bridges receives traffic associated with the first reserved MAC address and the second one of said ports of each one
15 of said bridges receives traffic associated with the second reserved MAC address.

13. The method of claim 12, further comprising:

20 configuring associated hardware of each one of said bridges to forward information transmission units using one of said reserved MAC addresses to a CPU of a respective one of said bridges.

14. The method of claim 13 wherein said configuring two ports of each one of the plurality bridges includes:

25 receiving designation information for the first one of said ports of each one of said bridges, wherein the first port of each one of said bridges is a first direction Ring Rapid Spanning Tree Protocol (RRSTP) port;

receiving designation information for the second one of said ports
of each one of said bridges and wherein the second port of
each one of said bridges is a second direction RRSTP port;
associating a first reserved MAC address with the first direction
5 RRSTP port of each one of said bridges; and
associating a second reserved MAC address with the second
direction RRSTP port of each one of said bridges.

15. The method of claim 14 wherein said associating the first reserved MAC
address and said associating the second reserved MAC address is
10 performed, respectively, after said receiving designation information for
the first direction RRSTP port and said receiving designation information
for the second direction RRSTP port.

16. Spanning Tree Protocol (STP) software, comprising:

instructions for configuring two ports of a respective bridge on
which said RRSTP software resides for bi-directional
transmission of information transmission units, wherein a
5 first one of said ports is a first direction RRSTP port that
transmits information transmission units in a first direction
around said ring, wherein a second one of said ports is a
second direction RRSTP port that transmits information
transmission units in a second direction around said ring
10 and wherein the first direction around a ring of bridges is
opposite the second direction; and

instructions for configuring a forwarding table utilized by the
respective bridge such that the first direction RRSTP port
receives traffic associated with the first reserved MAC
15 address and the second direction RRSTP port receives
traffic associated with the second reserved MAC address.

17. The STP software of claim 16, further comprising:

instructions for configuring associated hardware of the respective
bridge to forward information transmission units using one
20 of said reserved MAC addresses to a CPU of the respective
bridge.

18. The STP software of claim 17 wherein said instructions for configuring
two ports of the respective bridge includes:

instructions for receiving designation information for the first
25 direction RRSTP port of the respective bridge;

instructions for receiving designation information for the second
direction RRSTP port of the respective bridge;

instructions for associating a first reserved MAC address with the first direction RRSTP port of the respective bridge; and instructions for associating a second reserved MAC address with the second direction RRSTP port of the respective bridge.

- 5 19. The STP software of claim 18, further comprising:
instructions for changing a port designated as Root Forwarding to a port designated as Designated Forwarding and changing a port designated as Alternate to a port designated as Root Forwarding;
- 10 instructions for receiving a RRSTP Bridge Protocol Data Unit (BPDU);
instructions for facilitating determination of a port designated as Alternate; and
instructions for facilitating determination of whether a Topology
- 15 Change (TC) flag of the respective bridge is set.

- 20 20. The STP software of claim 19, further comprising:
instructions for sending a RRSTP TC BPDU on at least one of said RRSTP ports toward an adjacent bridge and flushing the L2 forwarding table of the respective bridge.
- 20

1/9

FIG. 1A

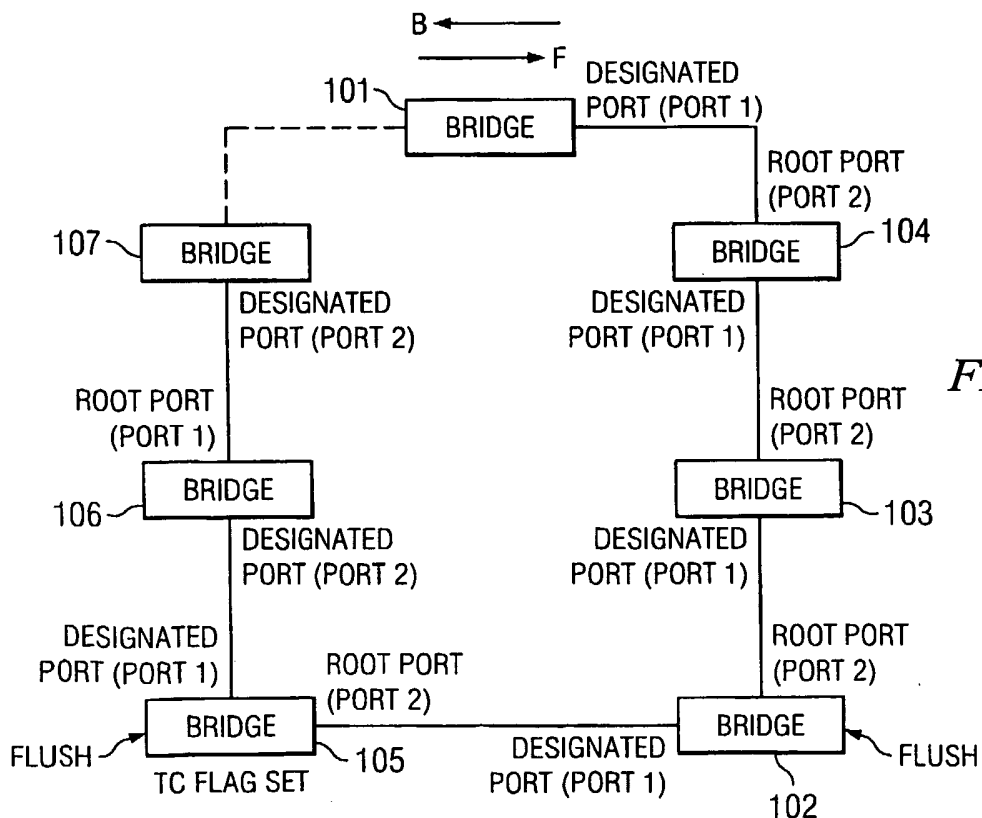
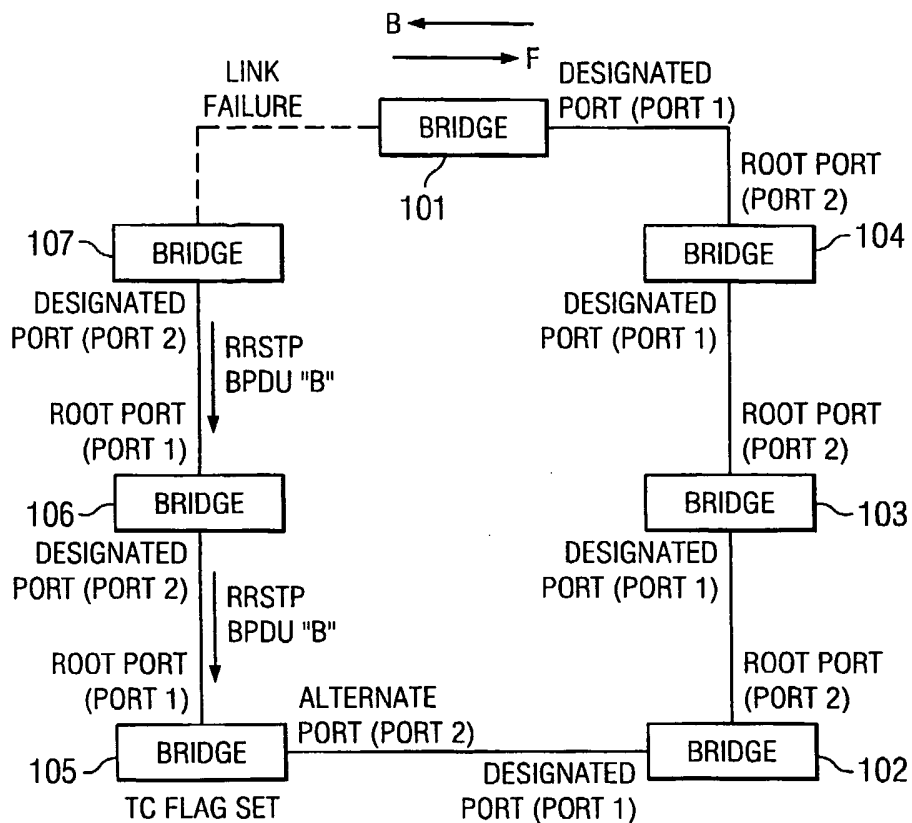


FIG. 1B

FIG. 2

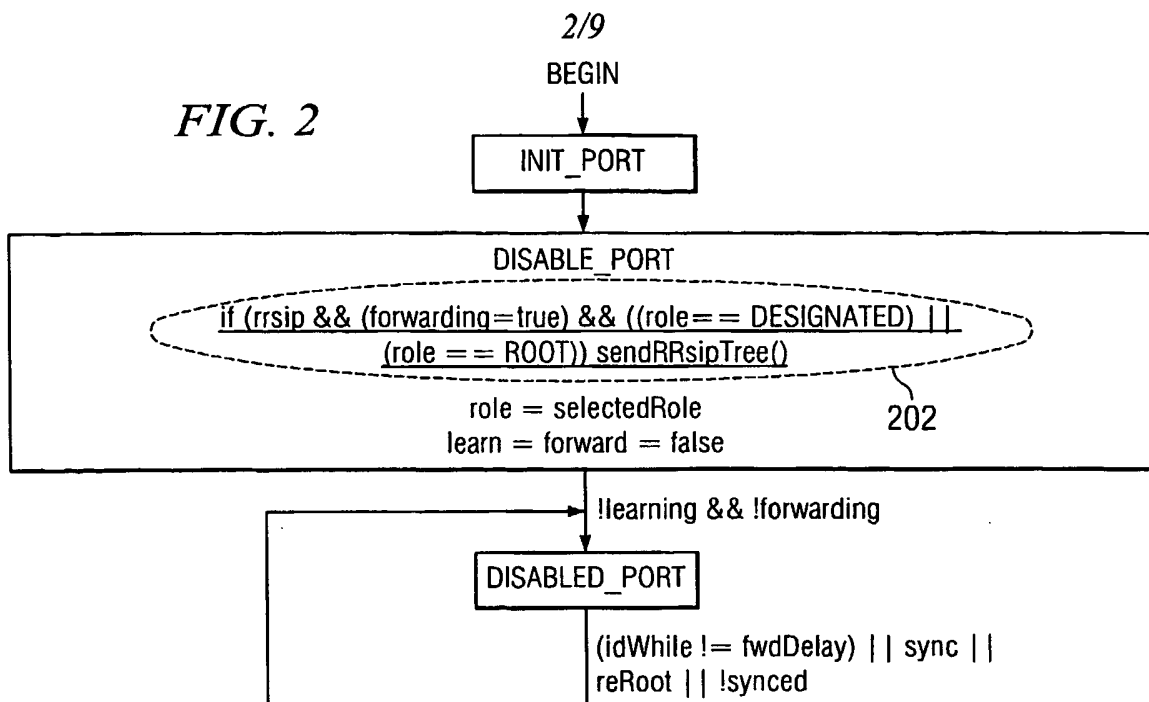


FIG. 4

BEGIN || ((rcvdBpdu || rcvdRRstp || (edgeDelaywhile != MigrateTime)) && !portEnabled)




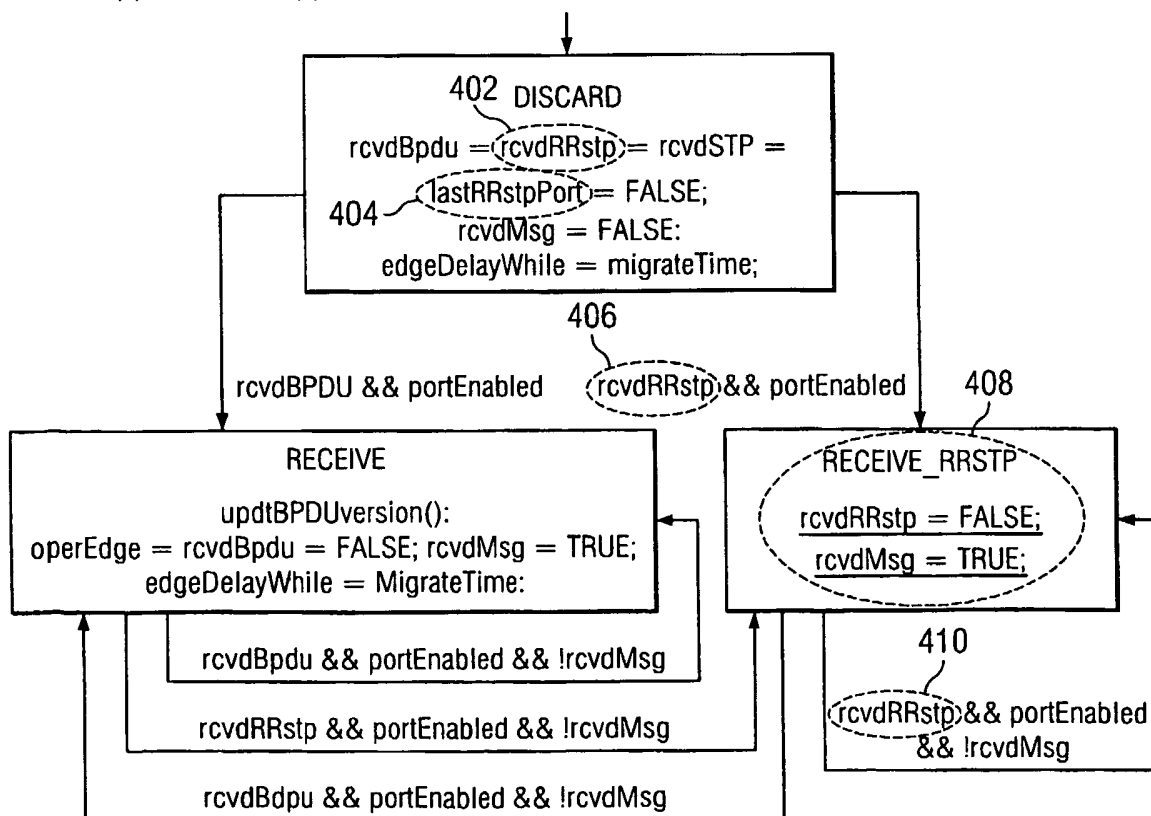


FIG. 3

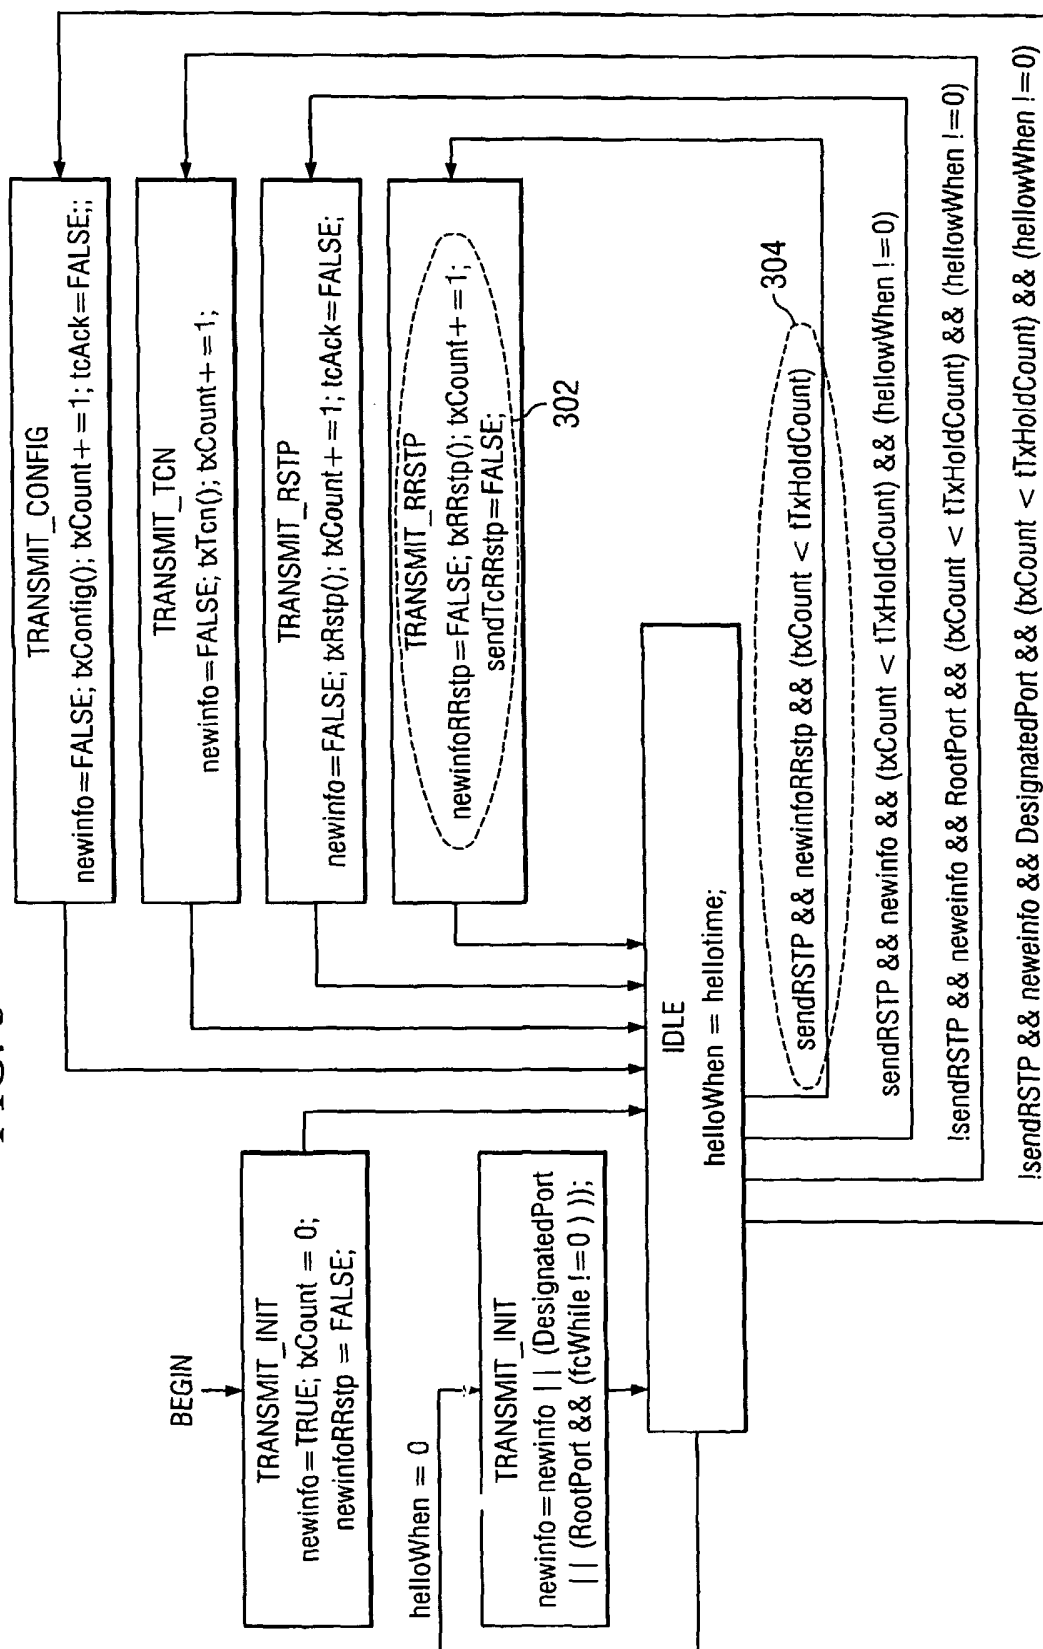


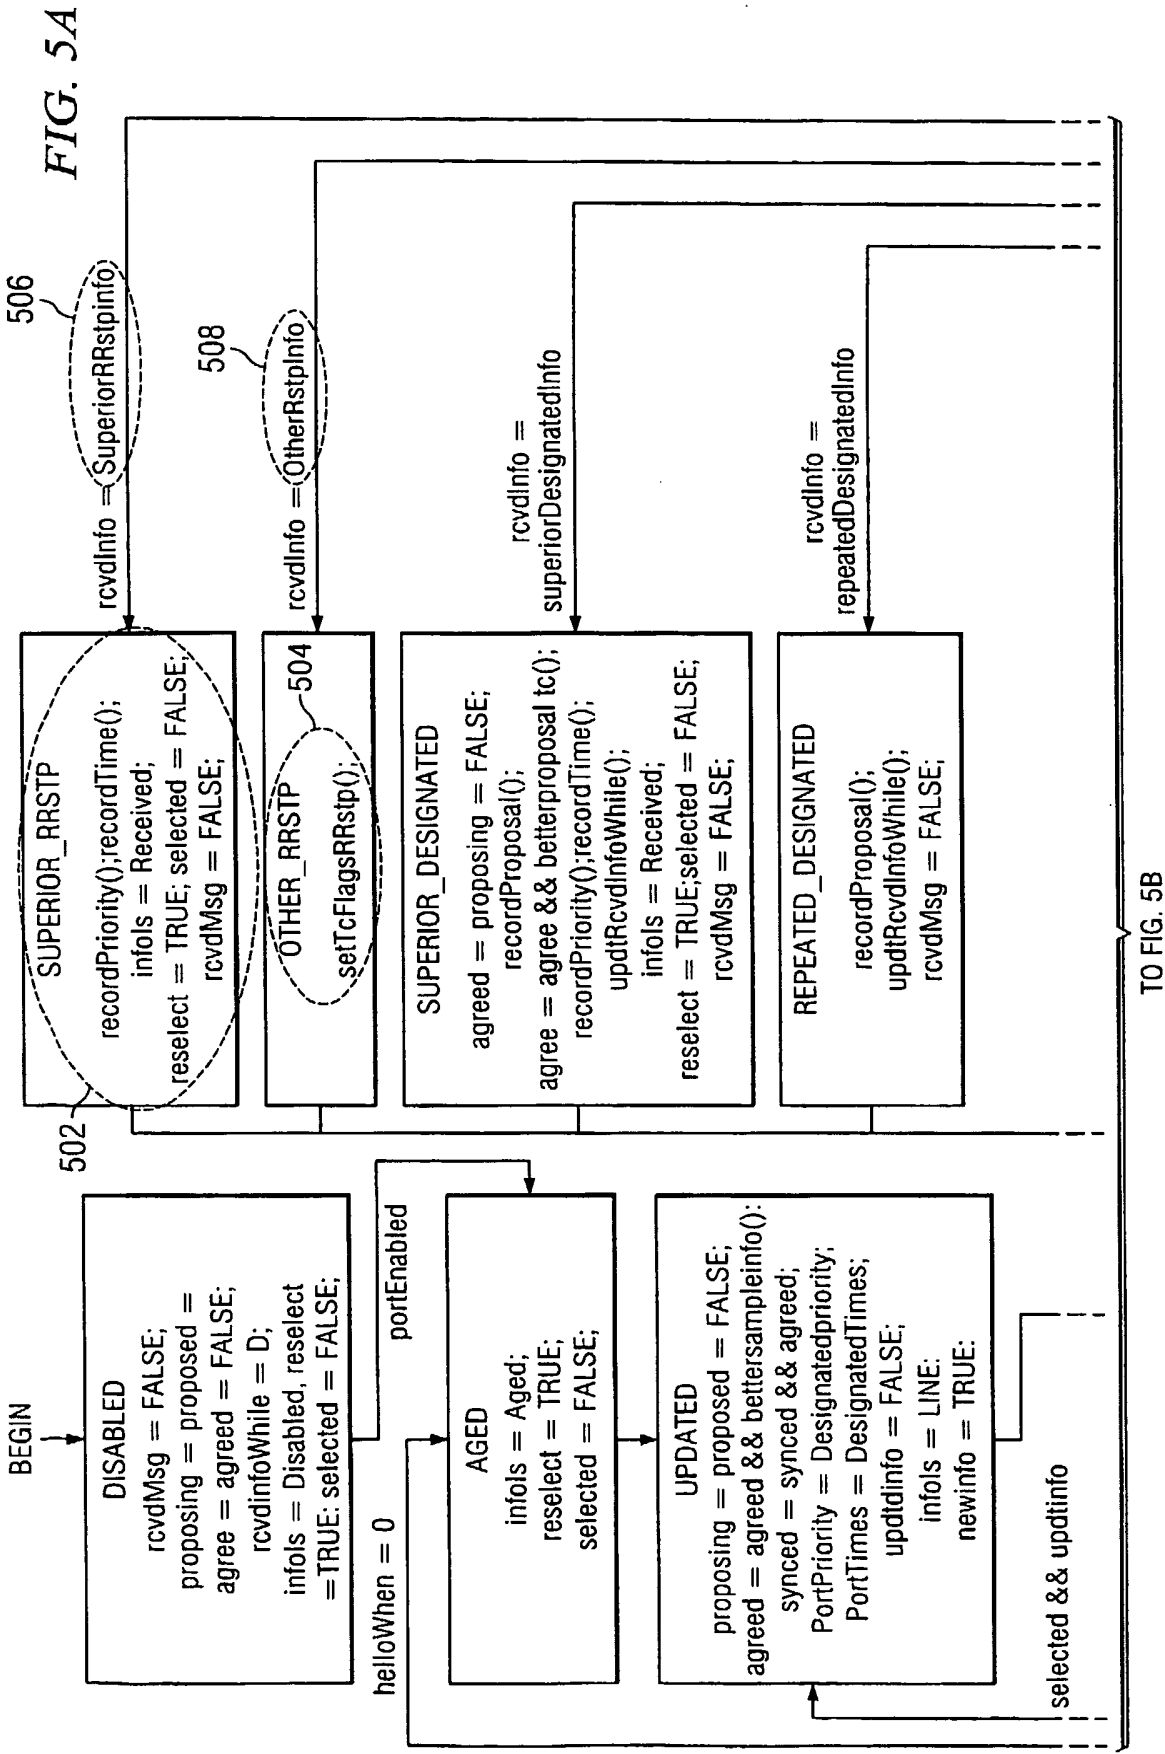

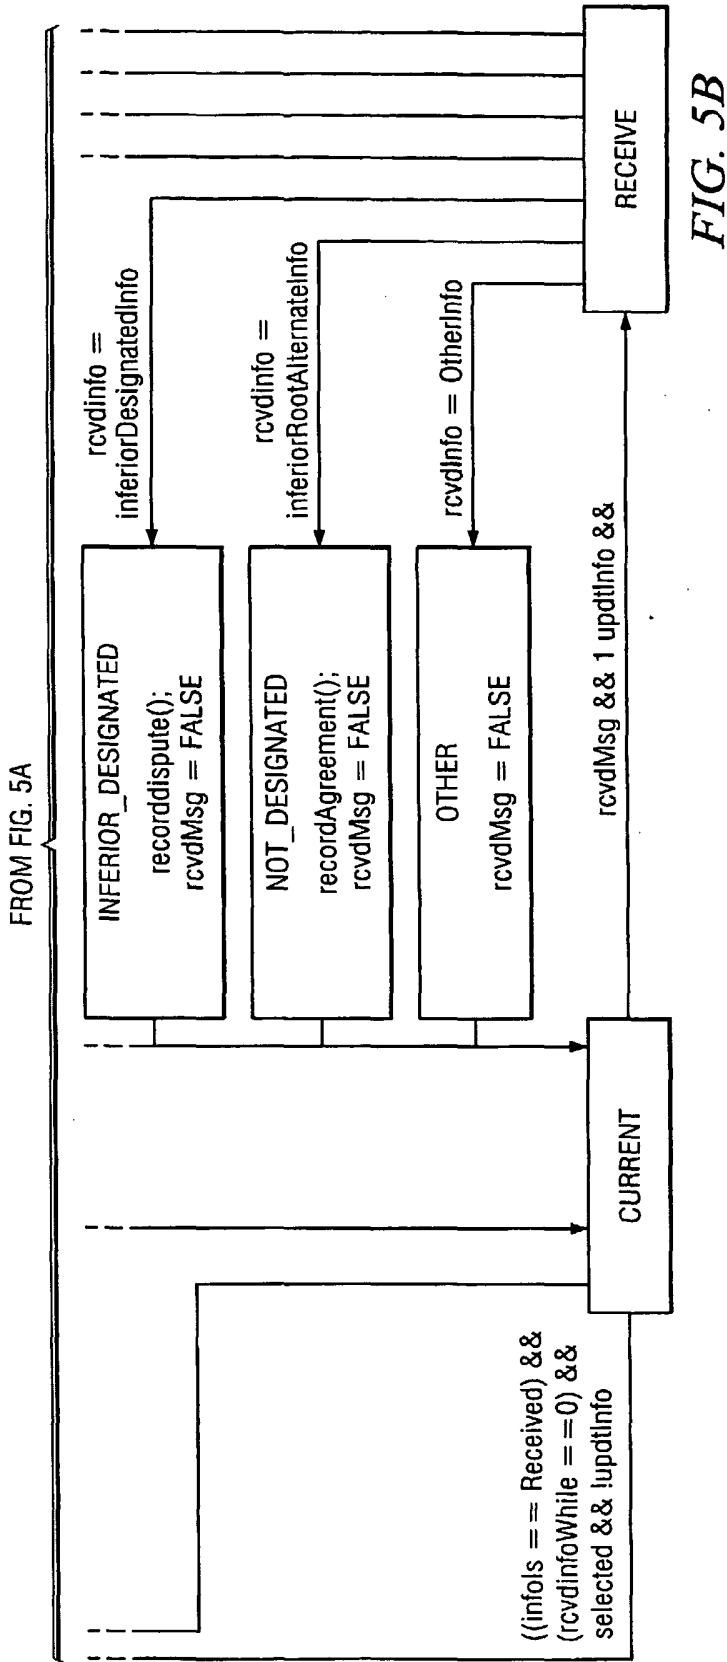


6/9

FIG. 6A

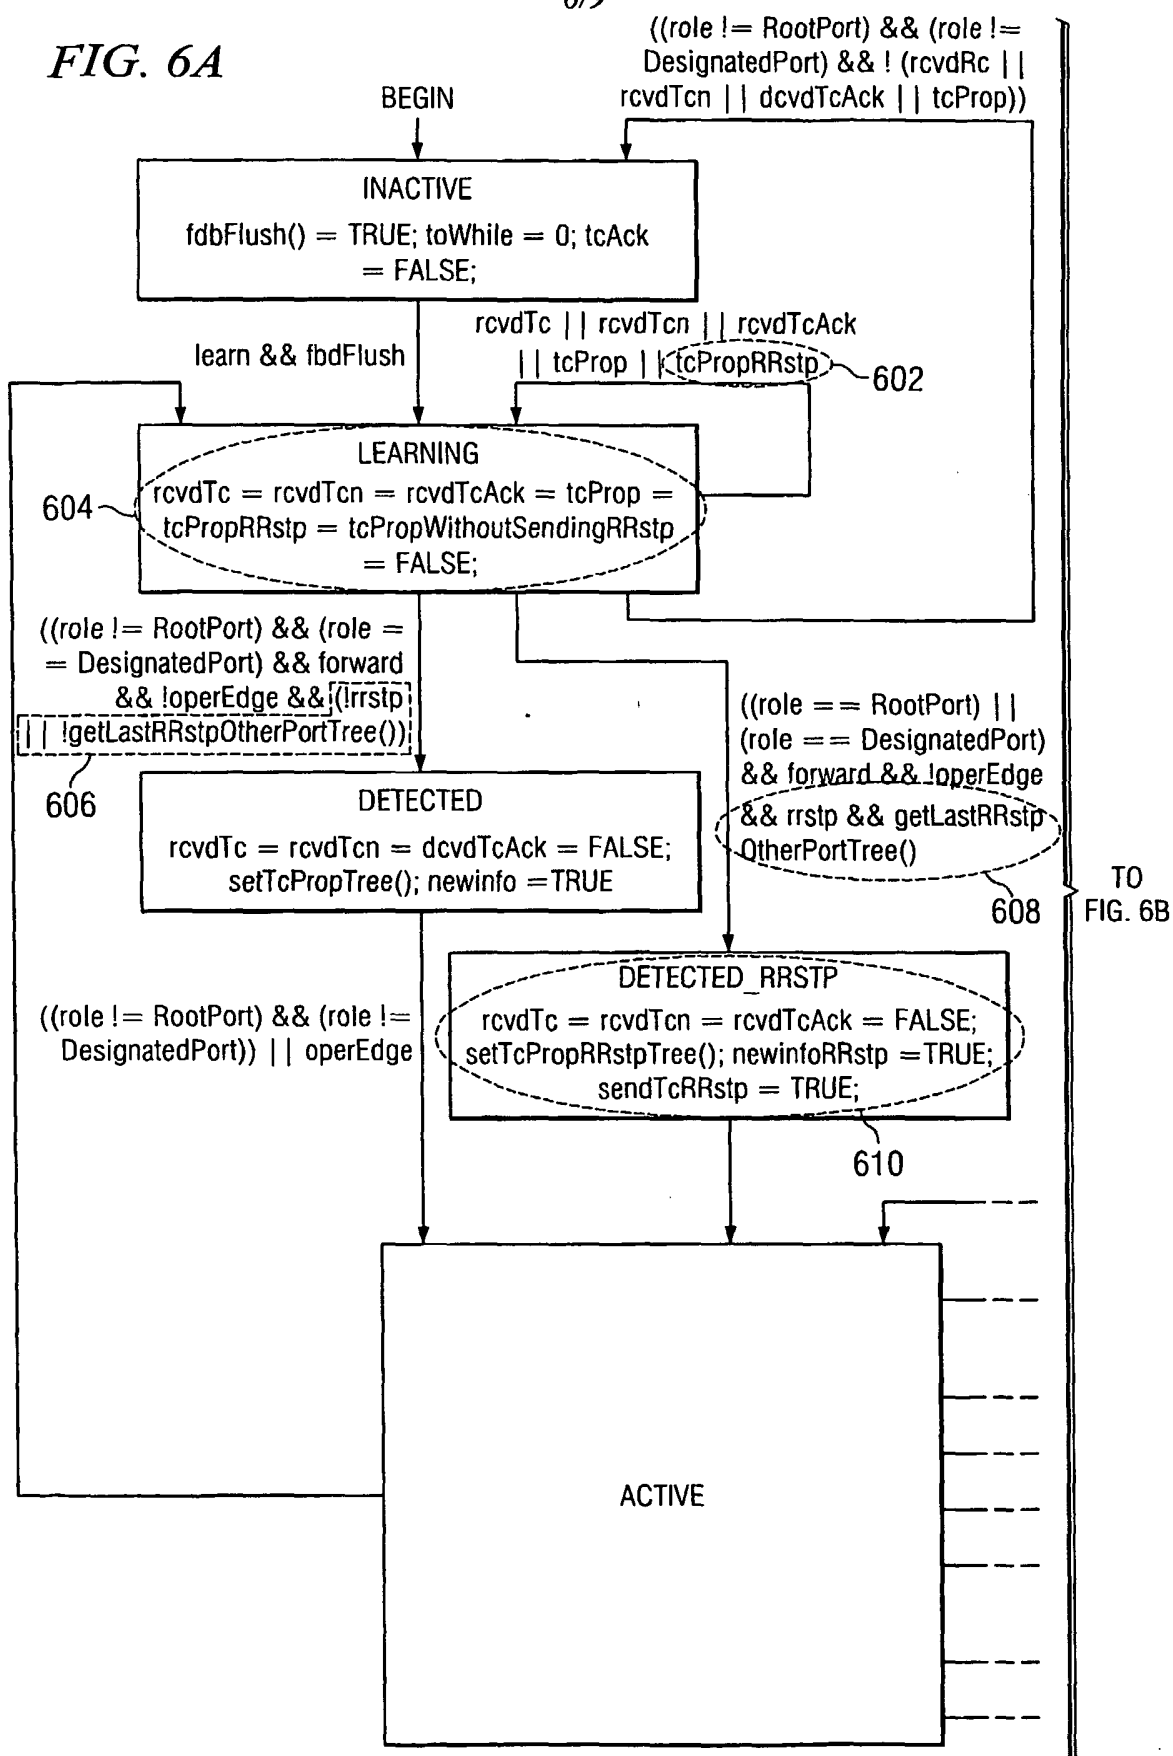


7/9

FIG. 6B

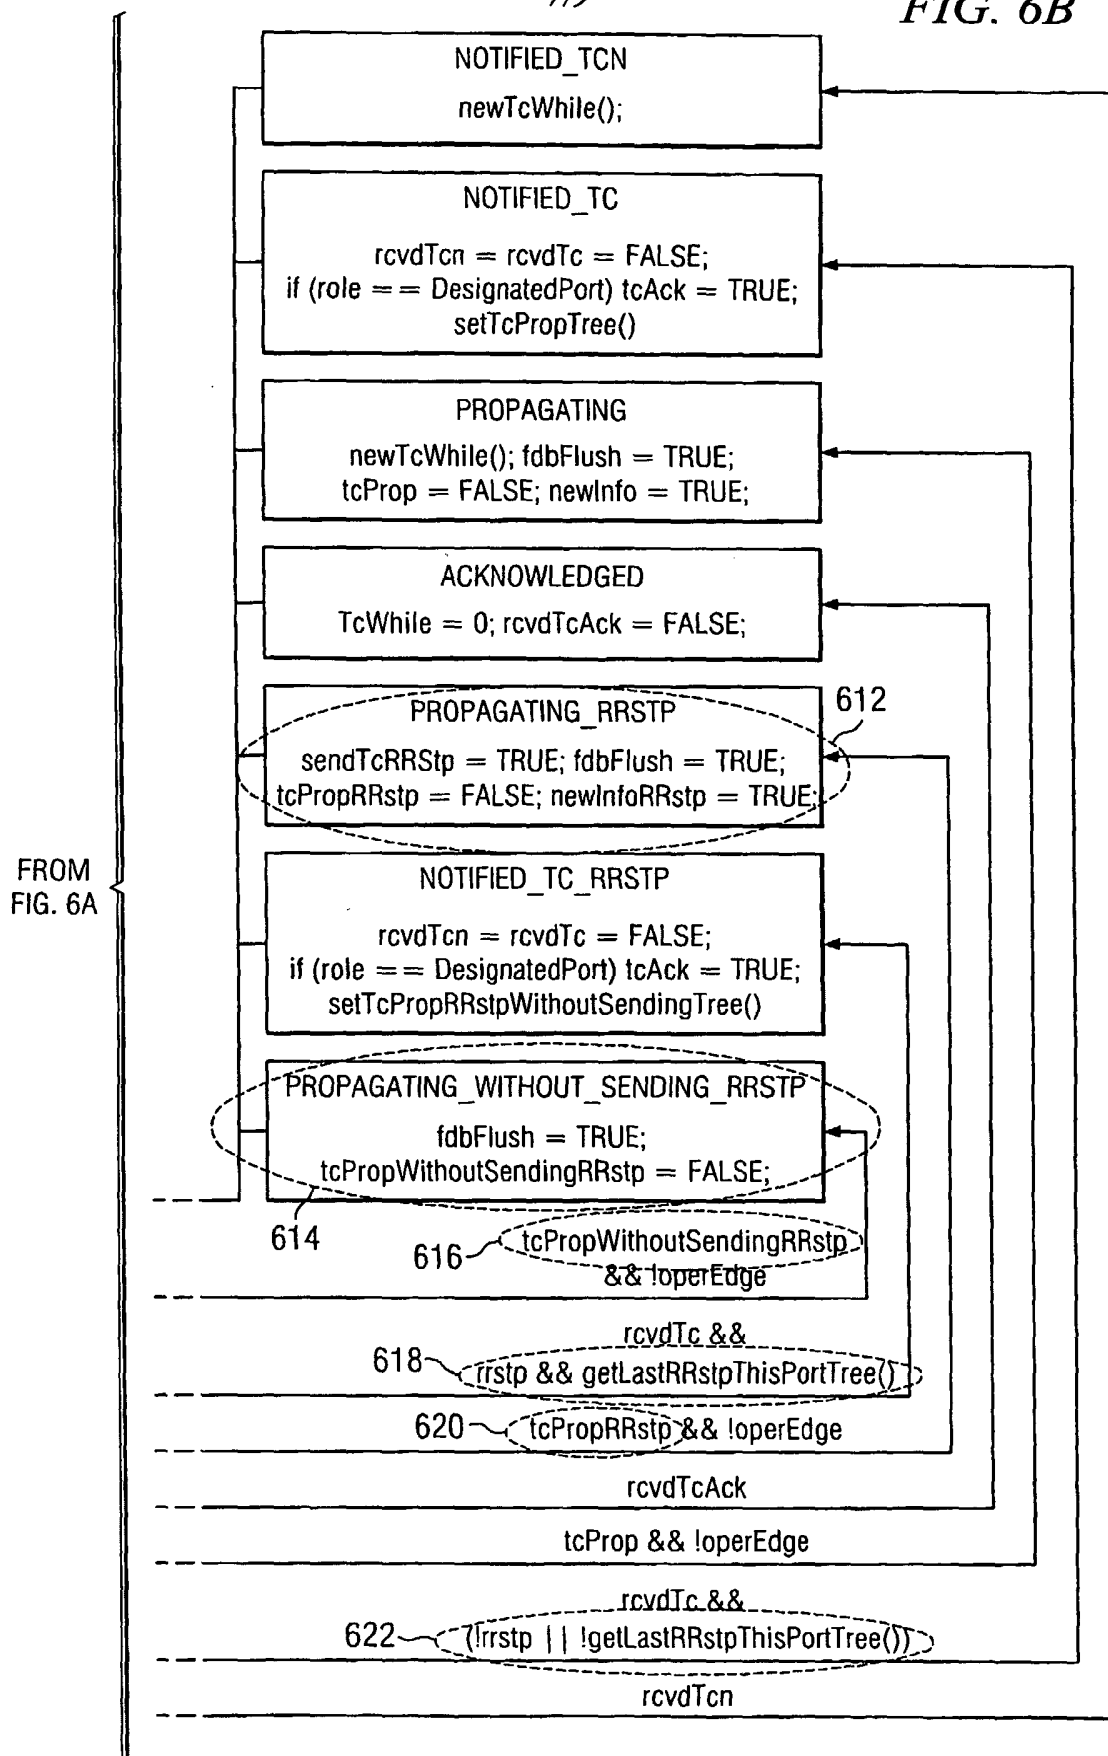

8/9

FIG. 7

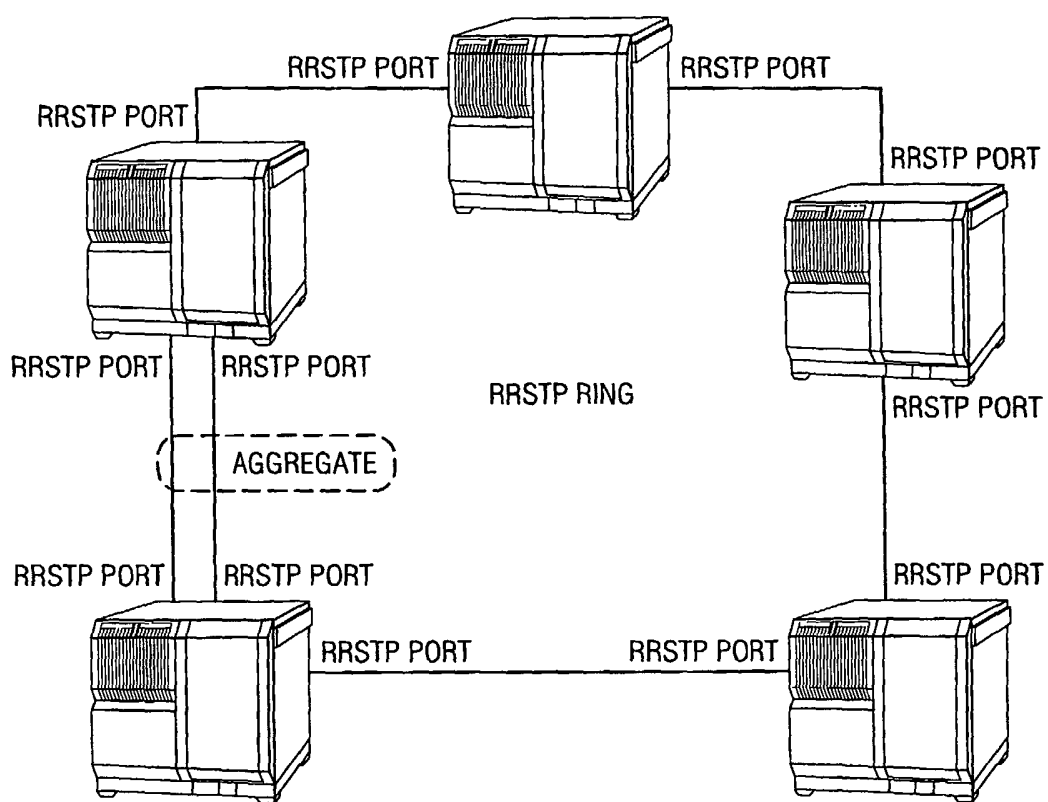

9/9

FIG. 8

