

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2012 (12.04.2012)

(10) International Publication Number
WO 2012/048281 A1

(51) International Patent Classification:
F21V 17/00 (2006.01) *F21V 23/00* (2006.01)
F21V 29/00 (2006.01) *F21Y 101/02* (2006.01)

fornia 94087 (US). **JUE, Clifford** [US/US]; 111 Ponderosa Court, Santa Cruz, California 95060 (US).

(21) International Application Number:
PCT/US2011/055459

(74) Agents: **KNITTEL, Marc R.** et al.; Kilpatrick Townsend & Stockton, Two Embarcadero Center, Eighth Floor, San Francisco, California 94111-3834 (US).

(22) International Filing Date:
7 October 2011 (07.10.2011)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
61/391,506 8 October 2010 (08.10.2010) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,


(71) Applicant (for all designated States except US): **SORAA, INC.** [US/US]; 485 Pine Avenue, Goleta, California 93117 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHUM, Frank Tin Chung** [US/US]; 1531 Oriole Avenue, Sunnyvale, Cali-

[Continued on next page]

(54) Title: HIGH INTENSITY LIGHT SOURCE

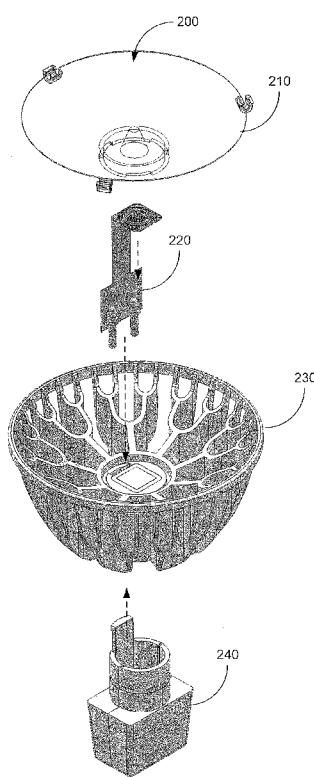

(57) Abstract: A light source comprises a heat-sink having a mounting region, and heat-dissipating fins, a base housing having an inner cavity and coupled to the heat-sink, and an integrated lighting module including: a printed circuit board; an LED on a substrate coupled to the printed circuit board within a first lateral region of the printed circuit board, and an electronic driving circuit for providing power to the LED and coupled to the printed circuit board within a second lateral region of the printed circuit board, wherein a bottom surface of the substrate is thermally coupled to the mounting region of the heat-sink, and wherein the second lateral region of the integrated lighting module is located within the inner cavity of the base housing.

FIG. 1B



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

HIGH INTENSITY LIGHT SOURCE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application relates to and claims priority to U.S. Provisional Patent 5 Application No. 61/391,506, filed 10/8/2010. This provisional patent application is incorporated herein by reference for all purposes.

BACKGROUND

[0002] The present invention relates to lighting. More specifically, the present invention relates 10 to high efficiency lighting sources.

[0003] The era of the Edison vacuum light bulb will be coming to an end soon. In many countries and in many states, common incandescent bulbs are becoming illegal, and more efficient lighting sources are being mandated. Some of the alternative light sources currently include fluorescent tubes, halogen, and light emitting diodes (LEDs). Despite the availability 15 and improved efficiencies of these other options, many people have still been reluctant to switch to these alternative light sources.

[0004] The inventors of the present believe that there are several key reasons why consumers have been slow to adopt the newer technologies. One such reason is the use of toxic substances 20 in the lighting sources. As an example, fluorescent lighting sources typically rely upon mercury in a vapor form to produce light. Because the mercury vapor is considered a hazardous material, spent lamps cannot simply be disposed of at the curbside but must be transported to designated hazardous waste disposal sites. Additionally, some fluorescent tube manufacturers go so far as to instruct the consumer to avoid using the bulb in more sensitive areas of the house such as bedrooms, kitchens, and the like.

25 [0005] The inventors of the present invention also believe that another reason for the slow adoption of alternative lighting sources is the low performance compared to the incandescent light bulb. As an example, fluorescent lighting sources often rely upon a separate starter or ballast mechanism to initiate the illumination. Because of this, fluorescent lights sometimes do not turn on “instantaneously” as consumers expect and demand. Further, fluorescent lights

typically do not immediately provide light at full brightness, but typically ramp up to full brightness within an amount of time (e.g. 30 seconds). Further, most fluorescent lights are fragile, are not capable of dimming, have ballast transformers that can emit annoying audible noise, and can fail in a shortened period of time if cycled on and off frequently. Because of this, 5 fluorescent lights do not have the performance consumers require.

[0006] Another type of alternative lighting source more recently introduced relies on the use of light emitting diodes (LEDs). LEDs have advantages over fluorescent lights including the robustness and reliability inherent in solid state devices, the absence of toxic chemicals that can be released during accidental breakage or disposal, instant-on capabilities, dimmability, and the 10 absence of audible noise. The inventors of the present invention believe, however, that current LED lighting sources themselves have significant drawbacks that cause consumers to be reluctant to using them.

[0007] A key drawback with current LED lighting sources is that the light output (e.g. lumens) is relatively low. Although current LED lighting sources draw a significantly lower amount of 15 power than their incandescent equivalents (e.g. 5-10 watts v. 50 watts), they are believed to be far too dim to be used as primary lighting sources. As an example, a typical 5 watt LED lamp in the MR-16 form factor may provide 200-300 lumens, whereas a typical 50 watt incandescent bulb in the same form factor may provide 700-1000 lumens. As a result, current LEDs are often used only for exterior accent lighting, closets, basements, sheds or other small spaces.

20 [0008] Another drawback with current LED lighting sources includes that the upfront cost of the LED is often shockingly high to consumers. For example, for floodlights, a current 30 watt equivalent LED bulb may retail for over \$60, whereas a typical incandescent floodlight may retail for \$12. Although the consumer may rationally “make up the difference” over the lifetime 25 of the LED by the LED consuming less power, the inventors believe the significantly higher prices greatly suppress consumer demand. Because of this, current LED lighting sources do not have the price or performance that consumers expect and demand.

[0009] Additional drawbacks with current LED lighting sources includes they have many parts and are labor intensive to produce. As merely an example, one manufacturer of an MR-16 LED lighting source utilizes over 14 components (excluding electronic chips), and another 30 manufacturer of an MR-16 LED lighting source utilizes over 60 components. The inventors of the present invention believe that these manufacturing and testing processes are more

complicated and more time consuming, compared to manufacturing and testing of a LED device with fewer parts and a more modular manufacturing process.

[0010] Additional drawbacks with current LED lighting sources, are that the output performance is limited by heat-sink volume. More specifically, the inventors believe for replacement LED

5 light sources, such as MR-16 light sources, current heat-sinks are incapable of dissipating very much heat generated by the LEDs under natural convection. In many applications, the LED lamps are placed into an enclosure such as a recessed ceiling that already have an ambient air temperatures to over 50 degrees C. At such temperatures the emissivity of surfaces play only a small roll of dissipating the heat. Further, because conventional electronic assembly techniques
10 and LED reliability factors limit PCB board temperatures to about 85 degrees C, the power output of the LEDs is also greatly constrained. At higher temperatures, the inventors have discovered that radiation plays much more important role thus high emissivity for a heat-sink is desirable.

[0011] Traditionally, light output from LED lighting sources have been increased by simply

15 increasing the number of LEDs, which has lead to increased device costs, and increased device size. Additionally, such lights have had limited beam angles and limited outputs.

[0012] Accordingly, what is desired is a highly efficient lighting source without the drawbacks described above.

BRIEF SUMMARY

20 [0013] The present invention relates to high efficient lighting sources. More specifically, the present invention relates to a novel LED lighting source and methods of manufacturing thereof. Some general goals include, to increase light output without increasing device cost or device size, to enable coverage of many beam angles, and to provide a high reliability product for long life (ROI).

25 [0014] Various embodiments of the present invention include a novel modular lighting source. More specifically, various embodiments include an MR-16 form factor light source. A lighting module includes from 20 to 110 LEDs arrayed in series upon a top surface of thermally conductive substrate (e.g. silicon substrate). The top surface of the silicon substrate is soldered onto a first portion of a flexible printed circuit substrate (FPC). The bottom surface of the
30 conductive silicon substrate is physically bonded to a recess of an MR-16 form factor heat-sink via a thermal epoxy. In various embodiments, electrical driving components are soldered onto a

second portion of the FPC, and the second portion of the FPC is inserted into an interior cavity of a thermally conductive plug base. A potting compound is then injected into the cavity of the plug base and to the recess of the heat-sink in one step. The potting compound allows heat generated by the silicon substrate and the electrical driving components to be transferred to the 5 heat-sink or thermally conductive plug base. A lens is then secured to the heat-sink.

[0015] In one embodiment, the electrical driving portion / module transforms the input power from 12 AC volts to a higher DC voltage, such as 40 volts 120 Volts. In turn, the driving portion drives the lighting module with the higher voltage, and the lighting module emits the light. The light is conditioned with the lens to the desired type of lighting, e.g. spot, flood, etc. In 10 operation, the driving module and the lighting module produce heat that is dissipated by the MR-16 form factor heat-sink. At steady state, these modules may operate in the range of approximately 75°C to 130°C.

[0016] In various embodiments of the present invention the MR-16 form factor heat-sink greatly facilitates the dissipation of heat. The heat-sink includes an inner core that has a diameter less 15 than half the outer diameter of the heat-sink. In various embodiments, the inner core is less than one third, one fourth, and one fifth the outer diameter. The silicon substrate of the LEDs is directly bonded to the inner core region via the thermal epoxy.

[0017] In various embodiments, because the diameter of the inner core is much less than the outer diameter, a larger amount of heat dissipating fins can be provided. A number of heat 20 dissipating fin configurations have been developed and studied by the inventors. Typical fin configurations include a number radiating fin “trunks” extending from the inner core. In some embodiments, the number of trunks range from 8 to 35. At the end of each trunk, two or more fin “branches” are provided having “U” branching shape. In various embodiments, at the end of each branch, two or more fin “sub-branches” are provided, also having a “U” branching shape. 25 In various embodiments, the fin thickness of the trunk may be thicker than the branches, which in turn may be thicker than the sub-branches, etc. The amount of heat flow from the inner core towards the outer diameter, airflow, and surface area are therefore carefully engineered to greatly increase heat dissipating capability.

[0018] Other aspects of various embodiments include: simplified construction facilitating high 30 volume manufacturing, flex interconnects to eliminate hand wiring, modular subassembly construction to enable parallel processing. Other features include thermal management aspects:

Fin branching algorithm, reduced cross section central core, airflow behind lens, single thermal interface, direct die attachment, flex printed circuits, base contour to minimize potting material, recessed front, ensured airflow with coverage; Low-Cost Manufacturing: flexible printed circuit interconnect (Main and interposer), flex circuit light chip interposer, redundant latching and

5 bonding features, and the like. Other aspects include: high temperature operation enabling a densely packed LED array, higher component reliability, high heat dissipation, maximum surface area, maximum airflow, minimum thermal interface losses, minimum length thermal paths within the electronics module, and the like. Advantages with embodiments of the present invention include operating a LED light source reliably at high temperatures, allowing the
10 concentration of a large number of LEDs in a small space while simultaneously operating them at higher power levels.

[0019] According to one aspect of the invention, a light source is described. One apparatus includes a heat-sink comprising a mounting region, and a plurality of heat-dissipating fins, and a base housing coupled to the heat-sink, wherein the base housing includes an inner cavity. A

15 device may include an integrated lighting module coupled to the heat-sink and to the base housing. The integrated lighting module may include a printed circuit board, a light emitting source formed on a top surface of substrate, wherein the top surface of the substrate is coupled to a first surface of the printed circuit board within a first lateral region of the printed circuit board, and an electronic driving circuit configured to provide electrical power to the light emitting source, wherein the electronic driving circuit is coupled to the first surface of the printed circuit board within a second lateral region of the printed circuit board. In various apparatus a bottom surface of the substrate is thermally coupled to the mounting region of the heat-sink, and wherein the second lateral region of the integrated lighting module is located within the inner cavity of the base housing.

20 25 [0020] According to yet another aspect of the invention, a method for assembling a light source is described. One technique includes receiving a heat-sink comprising a mounting region, and a plurality of heat-dissipating structures, and receiving a base housing coupled to the heat-sink, wherein the base housing includes an inner cavity. A process may include receiving an integrated lighting module, wherein the integrated lighting module includes a printed circuit board having a first lateral region and a second lateral region, wherein a first surface of the printed circuit board within the first lateral region is coupled to a top surface of a light emitting source substrate, and wherein the first surface of the printed circuit board within the second

lateral region is coupled to a plurality of electronic driving devices. A methodology may include disposing the second lateral region of the integrated lighting module within the inner cavity of the base housing, and coupling a bottom surface of the light emitting source substrate to the mounting region of the heat-sink.

5

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] In order to more fully understand the present invention, reference is made to the accompanying drawings. Understanding that these drawings are not to be considered limitations in the scope of the invention, the presently described embodiments and the presently understood best mode of the invention are described with additional detail through use of the accompanying drawings in which:

[0022] Figs. 1A-B illustrate various embodiments of the present invention;

[0023] Figs. 2A-B illustrate an embodiment of the present invention;

[0024] Fig. 3 illustrate a block diagram of a manufacturing process according to embodiments of the present invention;

[0025] Fig. 4 illustrate an example of an integrated lighting module according to embodiments of the present invention; and

[0026] Figs. 5A-B illustrate examples during the manufacturing process according to embodiments of the present invention.

20

DETAILED DESCRIPTION

[0027] Fig. 1A illustrates an embodiment of the present invention. More specifically, Fig. 1A-B illustrate embodiments of MR-16 form factor compatible LED lighting source 100 having GU 5.3 form factor compatible base 120. MR-16 lighting sources typically operate upon 12 volts, alternating current (e.g. VAC). In the examples illustrated, LED lighting source 100 is configured to provide a spot light having a 10 degree beam size. In other embodiments LED lighting sources may be configured to provide a flood light having a 25 or 40 degree beam size, or any other lighting pattern.

[0028] In various embodiments, an LED assembly described in the pending patent applications described above, and variations thereof, may be used within LED lighting source 100. These LED assemblies are currently under development by the assignee of the present patent application. In various embodiments, LED lighting source 100 may provide a peak output 5 brightness of approximately 7600 to 8600 candelas (with approximately 360 to 400 lumens), a peak output brightness of approximately 1050 to 1400 candelas for a 40 degree flood light (with approximately 510 to 650 lumens), and a peak output of approximately 2300 to 2500 candelas for a 25 degree flood light (with approximately 620 to 670 lumens), and the like. Various 10 embodiments of the present invention therefore are believed to have achieve the same brightness as conventional halogen bulb MR-16 lights.

[0029] Fig. 1B illustrates a modular diagram according to various embodiments of the present invention. As can be seen in Fig. 1B in various embodiments, light 200 includes a lens 210, an integrated LED module / assembly 220, a heat-sink 230, and a base housing 240. As will be discussed further below, in various embodiments, the modular approach to assembling light 200 15 are believed to reduce the manufacturing complexity, reduce manufacturing costs, and increase the reliability of such lights.

[0030] In various embodiments, lens 210 may be formed from a UV and resistant transparent material, such as glass, polycarbonate material, or the like. In various embodiments, lens 210 may be solid. In the case of lens 210, the solid material creates a folded light path such that light 20 that is generated by the integrated LED assembly 220 internally reflects within lens 210 more than one time prior to being output. Such a folded optic lens enables light 200 to have a tighter columniation of light than is normally available from a conventional reflector of equivalent depth.

[0031] In various embodiments, to increase durability of the lights, the transparent material 25 should be operable at an elevated temperature (e.g. 120 degrees C) for a prolonged period of time (e.g. hours). One material that may be used for lens 210 is known as Makrolon™ LED 2045 or LED 2245 polycarbonate available from Bayer Material Science AG. In other embodiments, other similar materials may also be used.

[0032] In Fig. 1B, lens 210 may be secured to heat-sink 230 via one or more clips integrally 30 formed on the edge of lens 210. In addition, lens 210 may also be secured via an adhesive proximate to where integrated LED assembly 220 is secured to heat-sink 230. In various

embodiments, separate clips may be used to restrain lens 210. These clips may be formed of heat resistant plastic material that is preferably white colored to reflect backward scattered light back through the lens.

[0033] In various embodiments of the present invention, LED assemblies may be binned based upon lumen per watt efficacy. For example, in some examples, an integrated LED module / assembly having a lumen per watt (L/W) efficacy from 53 to 66 L/W may be binned for use for 40 degree flood lights, a LED assembly having an efficacy of approximately 60 L/W may be binned for use for spot lights, a LED assembly having an efficacy of approximately 63 to 67 L/W may be used for 25 degree flood lights, and the like. In other embodiments, other classification or categorization of LED assemblies on the basis of L/W efficacy may be used for other target applications.

[0034] In some embodiments, as will be discussed below integrated LED assembly / module 220 typically includes 36 LEDs arranged in series, in parallel series (e.g. three parallel strings of 12 LEDs in series), or the like. In other embodiments, any number of LEDs may be used, e.g. 1, 10, 16, or the like. In other embodiments, the LEDs may be electrically coupled in other manner, e.g. all series, or the like. Further detail regarding such LED assemblies are provided in the patent applications incorporated by reference above.

[0035] In various embodiments, the targeted power consumption for LED assemblies is less than 13 watts. This is much less than the typical power consumption of halogen based MR-16 lights (50 watts). Accordingly, embodiments of the present invention are able to match the brightness or intensity of halogen based MR-16 lights, but using less than 20% of the energy.

[0036] In various embodiments of the present invention, LED assembly 220 is directly secured to heat-sink 230. As will be discussed below, LED assembly 220 typically includes a flat substrate such as silicon or the like. In various embodiments, it is contemplated that an operating temperature of LED assembly 220 may be on the order of 125 to 140 degrees C. The silicon substrate is then secured to the heat-sink using a high thermal conductivity epoxy (e.g. thermal conductivity ~96 W/m.k.). In some embodiments, a thermoplastic / thermo set epoxy may be used such as TS-369, TS-3332-LD, or the like, available from Tanaka Kikinzoku Kogyo K.K. Other epoxies may also be used. In some embodiments, no screws are otherwise used to secure the LED assembly to the heat-sink, however, screws or other fastening means may also be used in other embodiments.

[0037] In various embodiments, heat-sink 230 may be formed from a material having a low thermal resistance / high thermal conductivity. In some embodiments, heat-sink 230 may be formed from an anodized 6061-T6 aluminum alloy having a thermal conductivity $k = 167$ W/m.k., and a thermal emissivity $e=0.7$. In other embodiments, other materials may be used such as 6063-T6 or 1050 aluminum alloy having a thermal conductivity $k = 225$ W/mk and a thermal emissivity $e = 0.9$. In other embodiments, still other alloys such AL 1100, or the like may be used. Additional coatings may also be added to increase thermal emissivity, for example, paint provided by ZYP Coatings, Inc. utilizing CR₂O₃ or CeO₂ may provide a thermal emissivity $e = 0.9$; coatings provided by Materials Technologies Corporation under the brand 10 name Duracon™ may provide a thermal emissivity $e > 0.98$; and the like. In other embodiments, heat-sink 230 may include other metals such as copper, or the like.

[0038] In some example, at an ambient temperature of 50 degrees C, and in free natural convection heat-sink 230 has been measured to have a thermal resistance of approximately 8.5 degrees C / Watt, and heat-sink 290 has been measured to have a thermal resistance of approximately 7.5 degrees C / Watt. With further development and testing, it is believed that a thermal resistance of as little as 6.6 degrees C / Watt are achievable in other embodiments. In light of the present patent disclosure, it is believed that one of ordinary skill in the art will be able to envision other materials having different properties within embodiments of the present invention.

[0039] In various embodiments, base assemblies / modules 240 in Fig. 1B provides a standard GU 5.3 physical and electronic interface to a light socket. As will be described in greater detail below, a cavity within base module 240 includes high temperature resistant electronic circuitry used to drive LED module 220. In various embodiments, an input voltage of 12 VAC to the lamps are converted to 120 VAC, 40 VAC, or other voltage by the LED driving circuitry. The driving voltage may be set depending upon specific LED configuration (e.g. series, parallel / series, etc.) desired.

[0040] The shell of base assembly 240 may be formed from an aluminum alloy, and may formed from an alloy similar to that used for heat-sink 230 and / or heat-sink 290. In one example, an alloy such as AL 1100 may be used. In other embodiments, high temperature plastic material may be used. In some embodiments of the present invention, instead of being separate units, base assembly 240 may be monolithically formed with heat-sink 230.

[0041] As illustrated in Fig. 1B, a portion of the LED assembly 220 (silicon substrate of the LED device) contacts heat-sink 230 in a recess within the heat-sink 230. Additionally, another portion of the LED assembly 220 (containing the LED driving circuitry) is bent downwards and is inserted into an internal cavity of base module 240.

5 [0042] In various embodiments, to facilitate a transfer of heat from the LED driving circuitry to the shell of the base assemblies, and of heat from the silicon substrate of the LED device, a potting compound is provided. The potting compound may be applied in a single step to the internal cavity of base assembly 240 and to the recess within heat-sink 230. In various embodiments, a compliant potting compound such as Omegabond ® 200 available from Omega
10 Engineering, Inc. or 50-1225 from Epoxies, Etc. may be used. In other embodiments, other types of heat transfer materials may be used.

[0043] Figs. 2A-B illustrate an embodiment of the present invention. More specifically, Fig. 2A illustrates an LED package subassembly (LED module) according to various embodiments. More specifically, a plurality of LEDs 300 are illustrated disposed upon a silicon substrate 310.
15 In some embodiments, it is contemplated that the plurality of LEDs 300 are connected in series and powered by a voltage source of approximately 120 volts AC (VAC). To enable a sufficient voltage drop (e.g. 3 to 4 volts) across each LED 300, in various embodiments 30 to 40 LEDs are contemplated to be used. In specific embodiments, 37 to 39 LEDs are coupled in series. In other embodiments, LEDs 300 are connected in parallel series and powered by a voltage source of
20 approximately 40 VAC. For example, the plurality of LEDs 300 include 36 LEDs arranged in three groups each having 12 LEDs 300 coupled in series. Each group is thus coupled in parallel to the voltage source (40 VAC) provided by the LED driver circuitry, such that a sufficient voltage drop (e.g. 3 to 4 volts) is achieved across each LED 300. In other embodiments, other driving voltages are envisioned, and other arrangements of LEDs 300 are also envisioned.
25 [0044] In various embodiments, the LEDs 300 are mounted upon a silicon substrate 310, or other thermally conductive substrate. In various embodiments, a thin electrically insulating layer and / or a reflective layer may separate LEDs 300 and the silicon substrate 310. Heat produced from LEDs 300 is typically transferred to silicon substrate 310 and to a heat-sink via a thermally conductive epoxy, as discussed above.
30 [0045] In various embodiments, silicon substrate is approximately 5.7 mm x 5.7 mm in size, and approximately 0.6 microns in depth. The dimensions may vary according to specific lighting

requirement. For example, for lower brightness intensity, fewer LEDs may be mounted upon the substrate, accordingly the substrate may decrease in size. In other embodiments, other substrate materials may be used and other shapes and sizes may also be used

[0046] As shown in Fig. 2A, a ring of silicone 315 is disposed around LEDs 300 to define a

5 well-type structure. In various embodiments, a phosphorus bearing material is disposed within the well structure. In operation, LEDs 300 provide a blue-ish light output, a violet, or a UV light output. In turn, the phosphorous bearing material is excited by the blue / uv output light, and emits white light output. Further details of embodiments of plurality of LEDs 300 and substrate 310 are described in the co-pending application incorporated by reference and referred to above.

10 [0047] As illustrated in Fig. 2A, a number of bond pads 320 may be provided upon the top surface of substrate 310 (e.g. 2 to 4 bond pads). Then, a conventional solder layer (e.g. 96.5% tin and 5.5% gold) may be disposed upon silicon substrate 310, such that one or more solder balls 330 are formed thereon. In the embodiments illustrated in Fig. 2A, four bond pads 320 are provided, one at each corner, two for each power supply connection. In other embodiments, only 15 two bond pads may be used, one for each AC power supply connection.

[0048] Illustrated in Fig. 2A is a flexible printed circuit (FPC) 340. In various embodiments, FPC 340 may include a flexible substrate material such as a polyimide, such as Kapton™ from DuPont, or the like. As illustrated, FPC 340 may have a series of bonding pads 350, for bonding to silicon substrate 310, and bonding pads 360, for coupling to the high supply voltage (e.g. 120 20 VAC, 40 VAC, etc). Additionally, in some embodiments, an opening 370 is provided, through which LEDs 300 will shine through. In some embodiments, opening 370 may be a closed shape, e.g. circle, square, etc, however in other embodiments, opening 370 may be an open shape, e.g. similar to a tuning fork.

[0049] Various shapes and sizes for FPC 340 are contemplated in various embodiments of the 25 present invention. For example, as illustrated in Fig. 2A, a series of cuts 380 may be made upon FPC 340 to reduce the effects of expansion and contraction of FPC 340 versus substrate 310. As another example, a different number of bonding pads 350 may be provided, such as two bonding pads. As merely another example, FPC 340 may be crescent shaped, and opening 370 may not be a through hole. In other embodiments, other shapes and sizes for FPC 340 are 30 contemplated in light of the present patent disclosure.

[0050] In various embodiments, the silicon substrate 310 is bonded to a first portion of FPC 340. As shown in Figs. 2A and B, FPC 340 extends to a second portion, where the electronic driving components are bonded there to. In some embodiments, the side of the FPC 340 where the silicon substrate 310 is bonded to is the same side as where the electronic driving components are also bonded to.

[0051] In Fig. 2B, substrate 310 is bonded to FPC 340 via solder balls 330, in a conventional flip-chip type arrangement to the top surface of the silicon. By making the electrical connection at the top surface of the silicon, it is electrically isolated from the heat transfer surface of the silicon. This allows the entire bottom surface of the silicon substrate 310 to transfer heat to the heat-sink. Additionally, this allows the LED to be bonded directly to the heat-sink to maximize heat transfer instead of a PCB material that typically inhibits heat transfer. As can be seen in this configuration, LEDs 300 are thus positioned to emit light through opening 370. In various embodiments, the potting compound discussed above is also used to serve as an under fill operation, or the like to seal the space 380 between substrate 310 and FPC 340.

[0052] After the electronic driving devices and the silicon substrate 310 are bonded to FPC 340, the LED package sub assembly or module 220 is thus assembled. In various embodiments, these LED modules may then be individually tested for proper operation.

[0053] Fig. 3 illustrates a block diagram of a manufacturing process according to embodiments of the present invention. In various embodiments, some of the manufacturing separate processes may occur in parallel or in series. For sake of understanding, reference may be given to features in prior figures.

[0054] In various embodiments, the following process may be performed to form an LED assembly / module. Initially, a plurality of LEDs 300 are provided upon an electrically insulated silicon substrate 310 and wired, step 400. As illustrated in Fig. 2A, a silicone dam 315 is placed upon the silicon substrate 310 to define a well, which is then filled with a phosphor-bearing material, step 410. Next, the silicon substrate 310 is bonded to a flexible printed circuit 340, step 420. As disclosed above, a solder ball and flip-chip soldering (e.g. 330) may be used for the soldering process in various embodiments.

[0055] Next, a plurality of electronic driving circuit devices and contacts may be soldered to the flexible printed circuit 340, step 430. The contacts are for receiving a driving voltage of approximately 12 VAC. As discussed above, unlike present state of the art MR-16 light bulbs,

the electronic circuit devices, in various embodiments, are capable of sustained high-temperature operation, e.g. 120 degrees C.

[0056] In various embodiments, the second portion of the flexible printed circuit including the electronic driving circuit is inserted into the heat-sink and into the inner cavity of the base module, step 440. As illustrated, the first portion of the flexible printed circuit is then bent approximately 90 degrees such that the silicon substrate is adjacent to the recess of the heat-sink. The back side of the silicon substrate is then bonded to the heat-sink within the recess of the heat-sink using an epoxy, or the like, step 450. Subsequently a potting material is used to fill the air space within the base module and to serve as an under fill compound for the silicon substrate, step 460.

[0057] Subsequently, a lens may be secured to the heat-sink, step 470, and the LED light source may then be tested for proper operation, step 480.

[0058] Fig. 4 illustrates an embodiment of the present invention. More specifically, Fig. 4 illustrates a side view of a flexible printed circuit 500. In various embodiments, a top surface of silicon substrate 510 including the light emitting elements is shown bonded to a bottom surface of FPC 500 within a first region. Additionally, electronic driving circuits 520 and electrical connections 530 is also shown bonded to the bottom surface of FPC 500 with a second region. In various embodiments, FPC is typically insulated between the first region and the second region.

[0059] Figs. 5A-B illustrate various embodiments of the present invention. More specifically, Figs. 5A-B illustrate cross-section views of planned embodiments of the present invention.

[0060] In Fig. 5A, a cross-section of an embodiment of a MR-16 form factor compatible LED lighting source 600 having a GU 5.3 form factor compatible base, although other form factors are contemplated. In various embodiments, lighting source 600 includes a lens 610, an integrated LED assembly / module 620, a heat-sink 630, and a base assembly 640. As illustrated, integrated LED assembly / module 620 may include one or more bends. A white-spaced region 650 is also illustrated, illustrating contemplated air-gap regions between the FPC and heat-sink 630 and base assembly 640.

[0061] In various embodiments, lighting source 600 represents a configuration of an LED light source having a combination of performance characteristics that have not been previously achievable with LED light sources. More specifically, in a spot light configuration, as shown in Fig. 5A, the light source is characterized with a highly concentrated spot beam: FWHM beam

angle of approximately 9.8°, having a field angle of approximately 13.3°, and a full cutoff angle of approximately 31.4°. Additionally, the light source is characterized by high maximum intensity: center beam candlepower (CBCP) 24.60 cd/LPKG with 81.9% lumens efficiency.

[0062] In the cross-section in Fig. 5B, the air-gap region 650 is shown filled with potting material 660. As discussed above, the potting material 660 is used to fill the cavity within base assembly 640 about the second portion of the integrated LED assembly 620, and to fill the recess within heat-sink 630 where the LED silicon substrate contacts heat-sink 630. In various embodiments, all of the potting material 660 is applied in a single step.

[0063] Further embodiments can be envisioned to one of ordinary skill in the art after reading this disclosure. In other embodiments, combinations or sub-combinations of the above disclosed invention can be advantageously made. The block diagrams of the architecture and flow charts are grouped for ease of understanding. However it should be understood that combinations of blocks, additions of new blocks, re-arrangement of blocks, and the like are contemplated in alternative embodiments of the present invention.

[0064] The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense. It will, however, be evident that various modifications and changes may be made thereunto without departing from the broader spirit and scope.

WHAT IS CLAIMED IS:

1. A light source comprising:

a heat-sink comprising a mounting region, and a plurality of heat-dissipating fins;
a base housing coupled to the heat-sink, wherein the base housing includes an

5 inner cavity; and

an integrated lighting module coupled to the heat-sink and to the base housing,

wherein the integrated lighting module comprises:

a printed circuit board;

a light emitting source formed on a top surface of a substrate, wherein the

10 top surface of the substrate is coupled to a first surface of the printed circuit board within a first lateral region of the printed circuit board; and

an electronic driving circuit configured to provide electrical power to the light emitting source, wherein the electronic driving circuit is coupled to the first surface of the printed circuit board within a second lateral region of the printed circuit board; and

15 wherein a bottom surface of the substrate is thermally coupled to the mounting region of the heat-sink, and wherein the second lateral region of the integrated lighting module is located within the inner cavity of the base housing.

2. The light source of claim 1

wherein the bottom surface of the substrate is thermally coupled to the mounting 20 region of the heat-sink via a thermally conductive epoxy; and

wherein the heat-sink comprises aluminum or copper.

3. The light source of claim 1 further comprising a potting compound,

wherein the potting compound is disposed within the mounting region in contact with the first lateral region of the printed circuit board, and is disposed within the inner cavity in contact with 25 the second lateral region of the printed circuit board, wherein the potting compound is configured to conduct heat generated from the integrated lighting module to the heat-sink and to the base housing.

4. The light source of claim 1

wherein the electronic driving circuit is configured to receive AC voltage and is configured to provide the electrical power to the light emitting source in response to the AC voltage; and

5 wherein the electronic driving circuit comprises at least one resistor, at least one capacitor, at least one integrated circuit, and at least one switching component.

5. The light source of claim 1 wherein the printed circuit board comprises a flexible printed circuit board comprising polyimide.

6. The light source of claim 5 wherein the first lateral region of the flexible printed circuit board is oriented at approximately 90 degrees relative to at least a portion of the 10 second lateral region of the flexible printed circuit board.

7. The light source of claim 1 wherein the base housing comprises a GU 5.3 form factor compatible base.

8. The light source of claim 4
wherein the printed circuit board comprises a plurality of power pins;
15 wherein the plurality of power pins are configured to receive the AC voltage from an external supply.

9. The light source of claim 1
wherein the light emitting source comprises a plurality of light emitting diodes;
and

20 wherein the heat-sink comprises an MR-16 compatible form factor.

10. The light source of claim 9 further comprising a lens coupled to the heat-sink, wherein the lens is configured to focus light output from the plurality of light emitting diodes.

11. A method for assembling a light source comprises:
25 receiving a heat-sink comprising a mounting region, and a plurality of heat-dissipating structures;
 receiving a base housing coupled to the heat-sink, wherein the base housing includes an inner cavity;

receiving an integrated lighting module, wherein the integrated lighting module includes a printed circuit board having a first lateral region and a second lateral region, wherein a first surface of the printed circuit board within the first lateral region is coupled to a top surface of a light emitting source substrate, and wherein the first surface of the printed circuit board within the second lateral region is coupled to a plurality of electronic driving devices;

disposing the second lateral region of the integrated lighting module within the inner cavity of the base housing; and

coupling a bottom surface of the light emitting source substrate to the mounting region of the heat-sink.

10 12. The method of claim 11 wherein the coupling step comprises coupling the bottom surface of the light emitting source substrate to the mounting region of the heat-sink using a thermally conductive epoxy.

13. The method of claim 11 further comprising
disposing a thermally conductive potting compound within the mounting region to
15 be in contact with the first lateral region of the printed circuit board, and within the inner cavity
to be in contact with the second lateral region of the printed circuit board.

14. The method claim 11
wherein the electronic driving devices are configured to receive AC voltage and
are configured to provide electrical power to the light emitting source in response to the AC
20 voltage; and

wherein the electronic driving devices are selected from a group consisting of: a resistor, a capacitor, an integrated circuit, and a switching component.

15. The method of claim 11 wherein the printed circuit board comprises a flexible printed circuit board comprising polyimide.

25 16. The method of claim 1 wherein after the disposing step, the method
further comprises bending the first lateral region of the flexible printed circuit board relative to at
least a portion of the second lateral region of the flexible printed circuit board to angle of
approximately 90 degrees.

17. The method of claim 11 wherein the receiving the integrated lighting module further comprises:

receiving the printed circuit board;

receiving the light emitting source substrate;

receiving the plurality of electronic driving devices;

coupling the top surface of the light emitting source to the first surface of the printed circuit board within the first lateral region; and

coupling the plurality of electronic driving devices to the first surface of the print circuit board within the second lateral region.

10 18. The method of claim 17 further comprising coupling a plurality of power pins to the first surface of the printed circuit board within the second lateral region, wherein the printed circuit board comprises a plurality of power pins, wherein the plurality of power pins are configured to receive the AC voltage.

15 19. The method of claim 11

wherein the light emitting source comprises a plurality of light emitting diodes,

wherein the heat-sink comprises an MR-16 compatible form factor, and

wherein the base housing comprises a GU 5.3 form factor compatible base.

20 20. The method of claim 11 further comprising:

receiving a lens, wherein the lens is configured to redirect light output from the light emitting source; and

coupling the lens to the heat-sink.

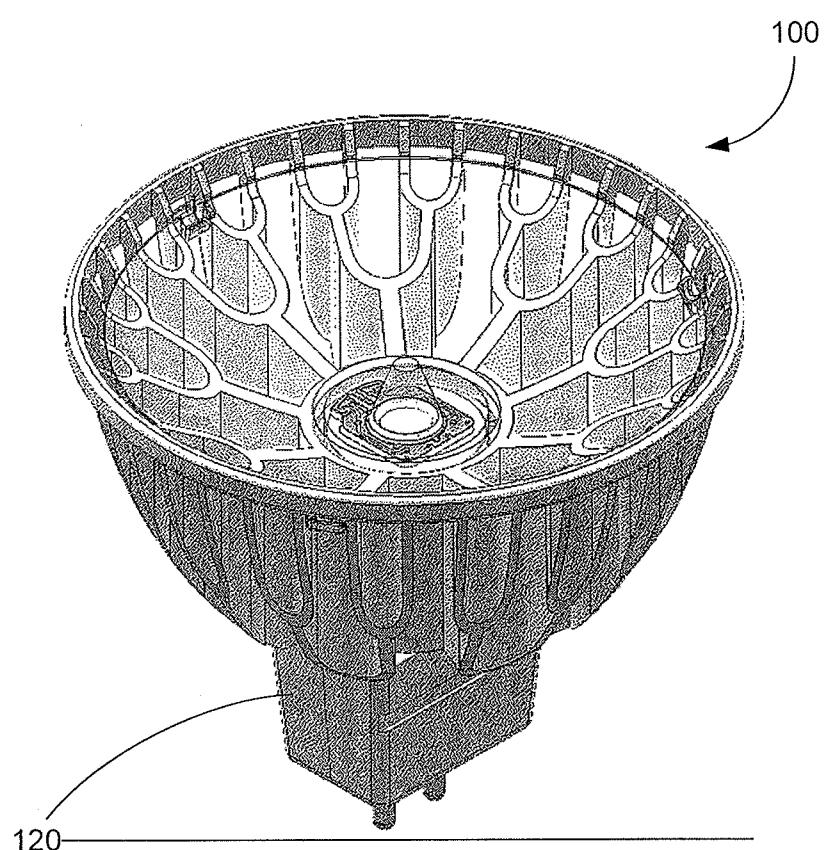


FIG. 1A

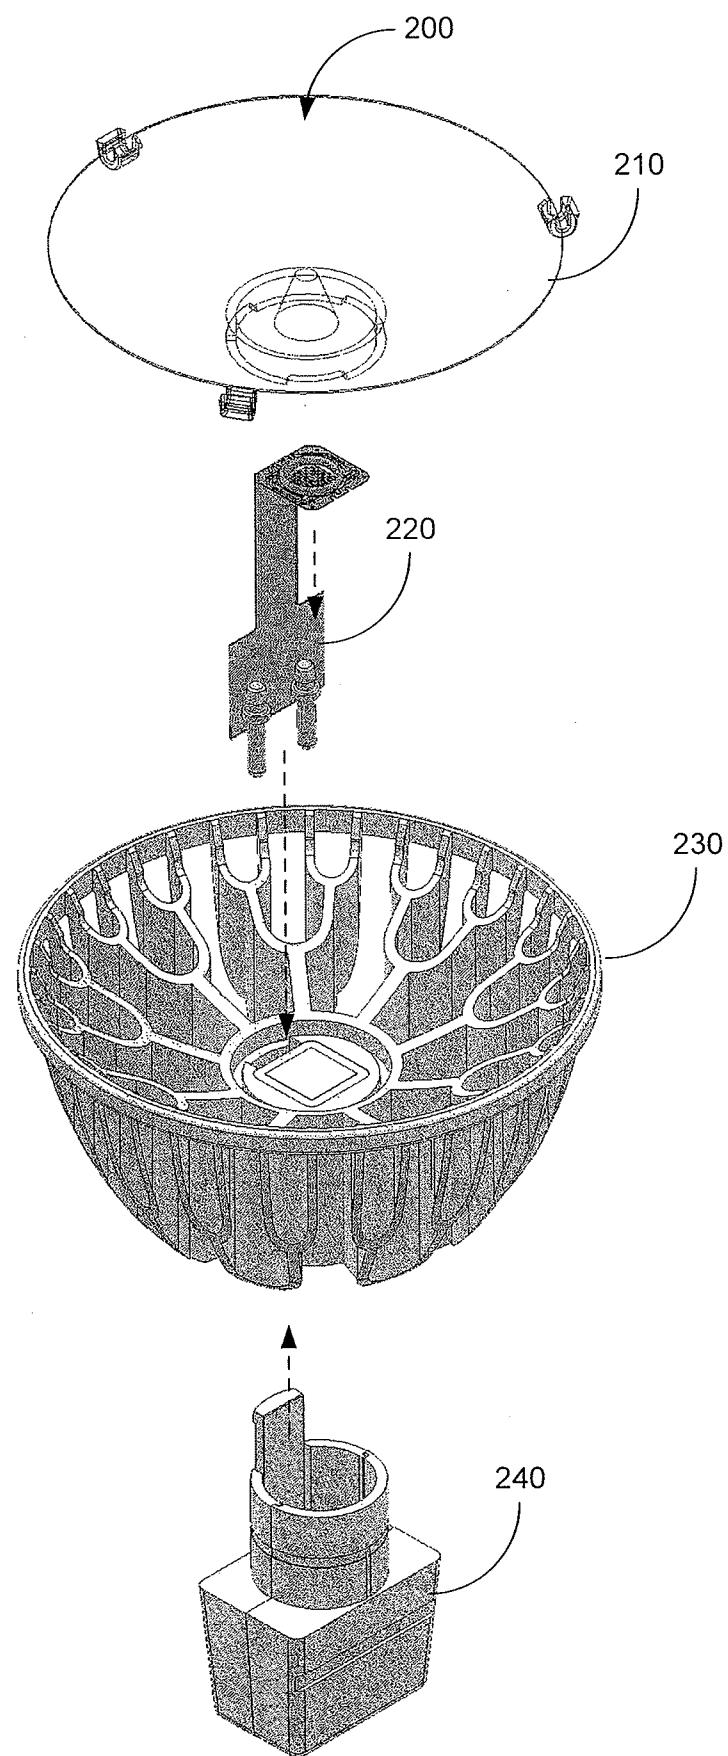


FIG. 1B

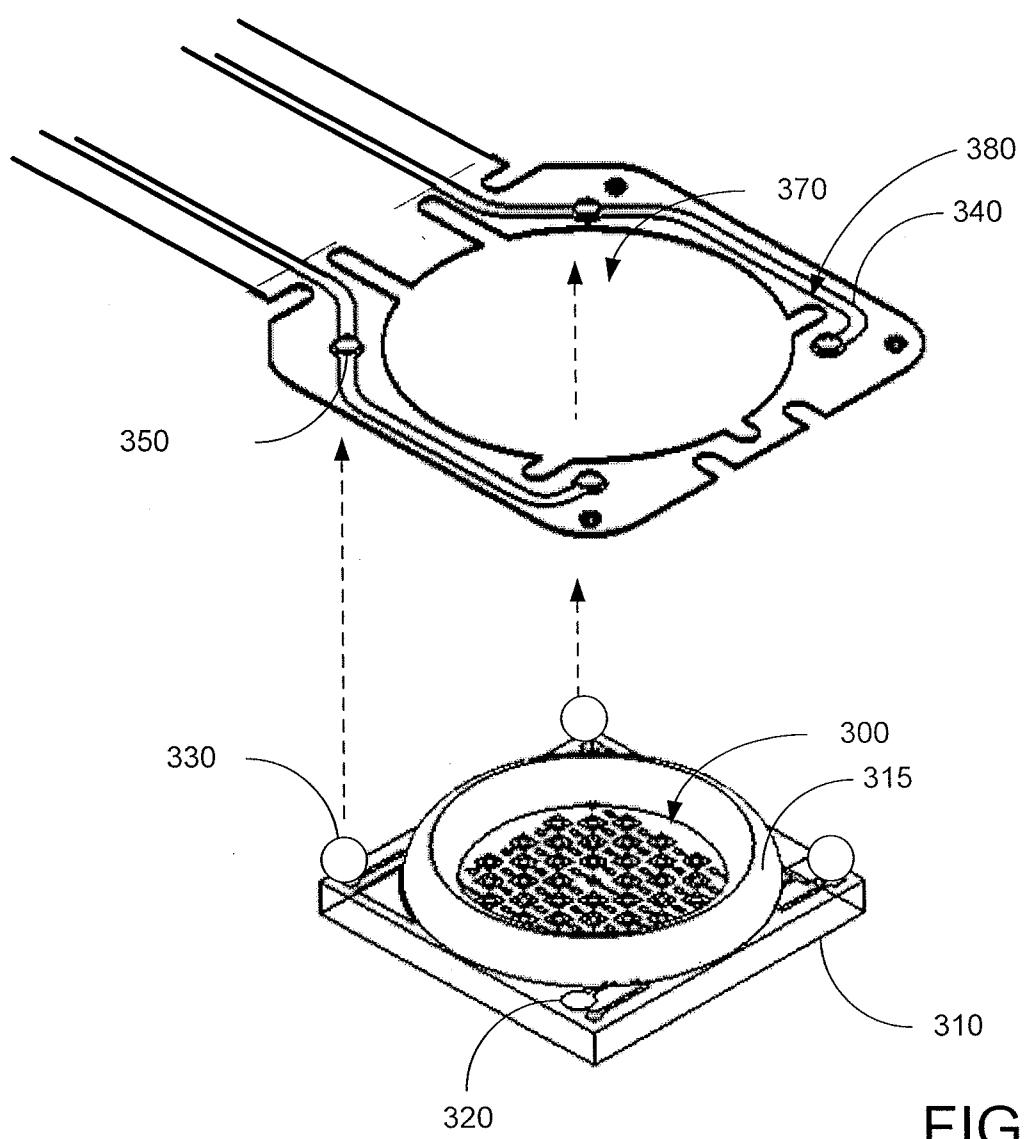


FIG. 2A

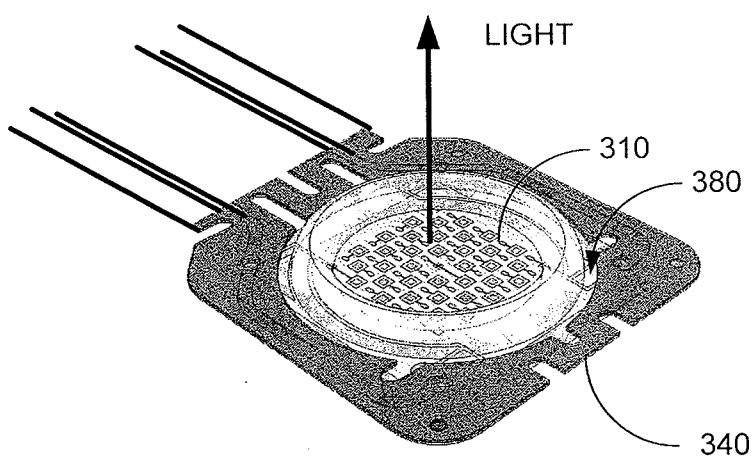


FIG. 2B

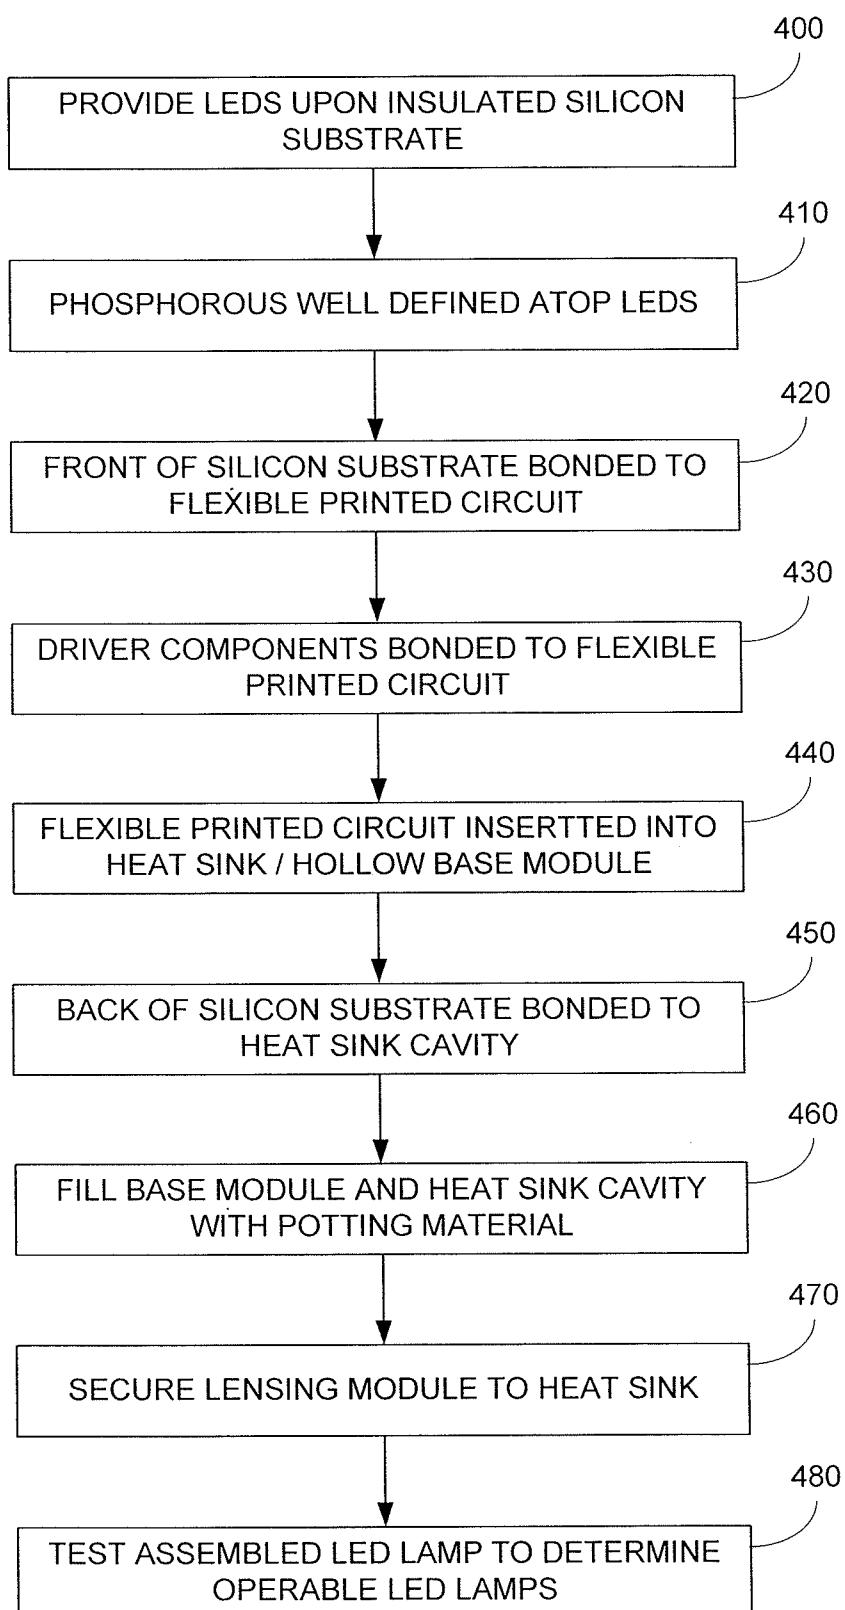
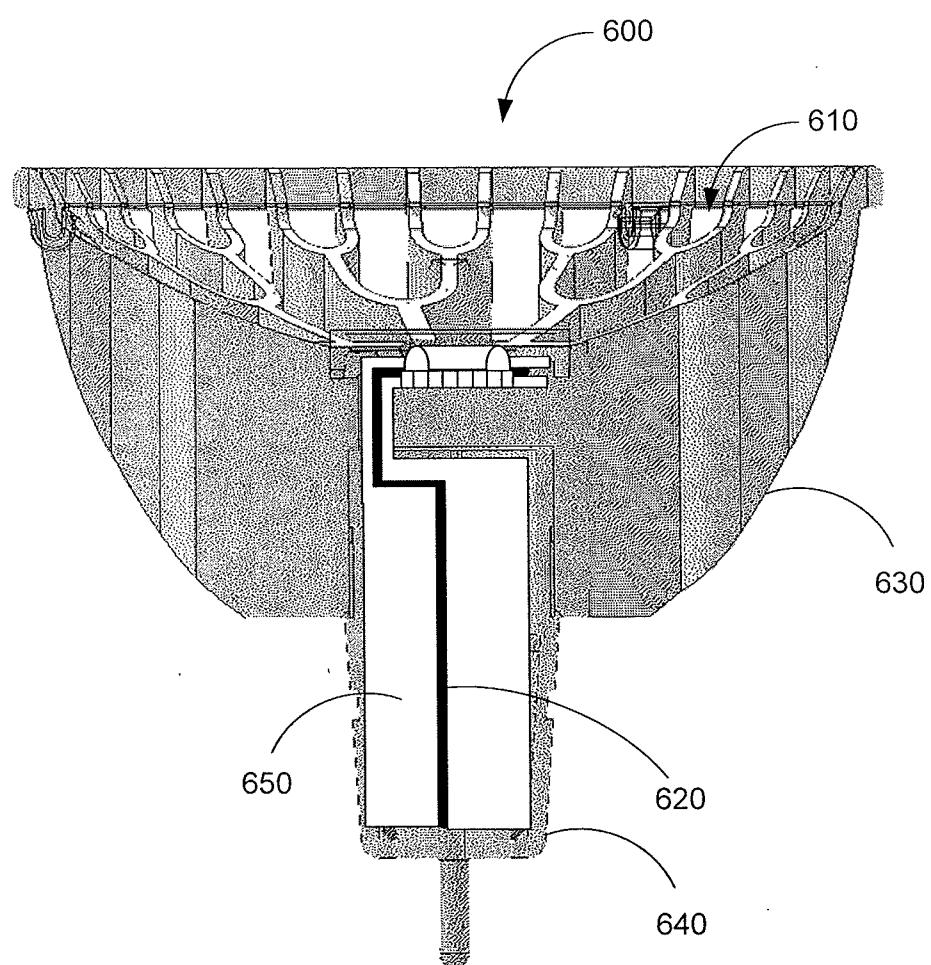
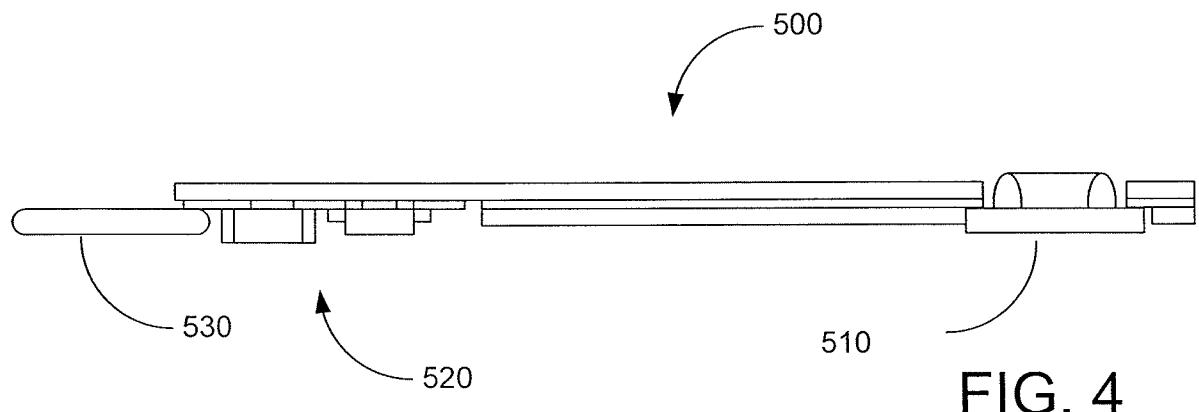


FIG. 3



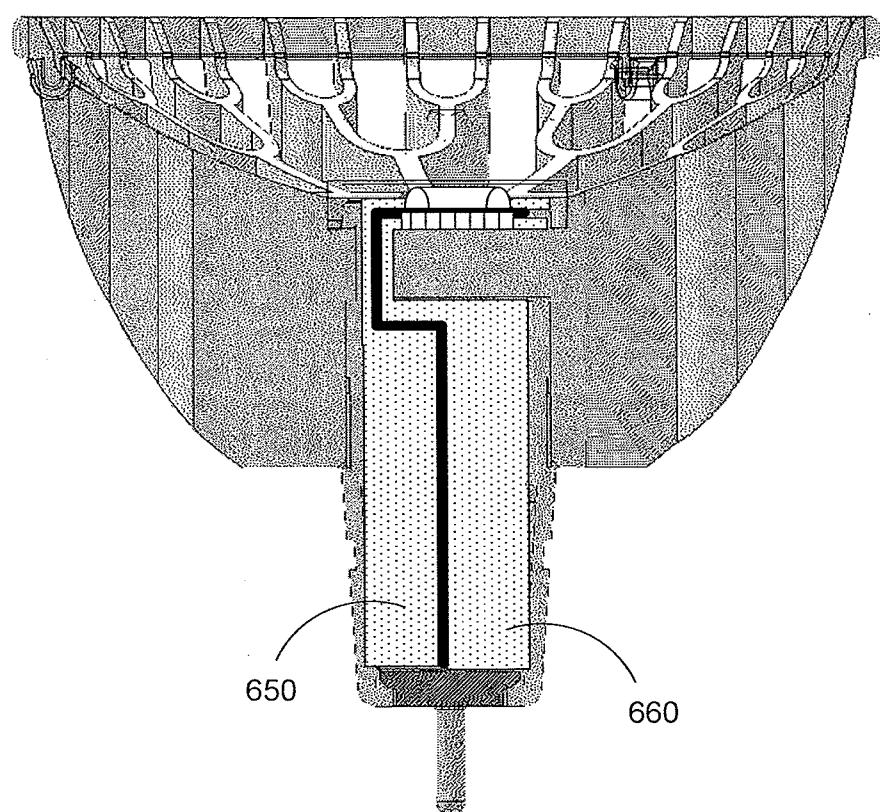


FIG. 5B

INTERNATIONAL SEARCH REPORTInternational application No.
PCT/US2011/055459**A. CLASSIFICATION OF SUBJECT MATTER****F21V 17/00(2006.01)i, F21V 29/00(2006.01)i, F21V 23/00(2006.01)i, F21Y 101/02(2006.01)n**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F21V 17/00; F21V 29/00; H01Q 1/26

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: light source, heat-sink, circuit board

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| A | US 2007-0007898 A1 (GERT W. BRUNING) 11 January 2007 See abstract, claims 1-9 and figure 3. | 1-20 |
| A | US 2008-0266866 A1 (TSAI CHIN SUNG) 30 October 2008 See abstract, claims 1-8 and figures 1-6. | 1-20 |
| A | US 2009-0244899 A1 (CHYN WEN-LONG) 01 October 2009 See abstract, claims 1-20 and figures 1-5. | 1-20 |
| A | US 2004-0264195 A1 (CHANG CHIA-FU et al.) 30 December 2004 See abstract, claims 1-8 and figures 1-3. | 1-20 |

 Further documents are listed in the continuation of Box C. See patent family annex.

| | |
|--|--|
| * Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family |
|--|--|

Date of the actual completion of the international search

21 MARCH 2012 (21.03.2012)

Date of mailing of the international search report

22 MARCH 2012 (22.03.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Cheongsa-ro,
Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

Kwak In Gu

Telephone No. 82-42-481-8537



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2011/055459

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|--|--|
| US 2007-0007898 A1 | 11.01.2007 | CN 1849707 A EP 1665380 A2 JP 04-685016 B2 JP 2007-505448 A JP 4685016 B2 US 7521872 B2 WO 2005-024898 A2 WO 2005-024898 A3 | 18.10.2006 07.06.2006 18.02.2011 08.03.2007 18.05.2011 21.04.2009 17.03.2005 17.03.2005 |
| US 2008-0266866 A1 | 30.10.2008 | US 7549774 B2 | 23.06.2009 |
| US 2009-0244899 A1 | 01.10.2009 | US 7677767 B2 | 16.03.2010 |
| US 2004-0264195 A1 | 30.12.2004 | None | |