



US009379057B2

(12) **United States Patent**
Huang et al.

(10) **Patent No.:** **US 9,379,057 B2**
(45) **Date of Patent:** **Jun. 28, 2016**

(54) **METHOD AND STRUCTURE TO REDUCE THE ELECTRIC FIELD IN SEMICONDUCTOR WIRING INTERCONNECTS**

H01L 21/76883 (2013.01); *H01L 23/5226* (2013.01); *H01L 23/53228* (2013.01); *H01L 23/53238* (2013.01)

(71) Applicants: **Elbert Emin Huang**, Carmel, NY (US); **Takeshi Nogami**, Schenectady, NY (US); **Raghuveer R. Patlolla**, Albany, NY (US); **Christopher J. Penny**, Poughkeepsie, NY (US); **Theodorus Eduardus Standaert**, Clifton Park, NY (US)

(58) **Field of Classification Search**
USPC 257/751
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,891,513	A	4/1999	Dubin et al.	
6,057,581	A	5/2000	Doan	
6,143,645	A	11/2000	Hsu et al.	
6,573,551	B1	6/2003	Kim et al.	
7,071,099	B1 *	7/2006	Greco	H01L 21/76807 257/752
7,086,138	B2	8/2006	Anderson	
7,514,361	B2	4/2009	Bonilla et al.	
7,544,609	B2 *	6/2009	Angyal	H01L 21/7684 257/E21.584
7,727,888	B2	6/2010	Yang et al.	
7,745,282	B2	6/2010	Yang et al.	
8,039,966	B2	10/2011	Yang et al.	
8,138,604	B2	3/2012	Yang et al.	

(Continued)

OTHER PUBLICATIONS

Anonymous; Bi-directionally Self Aligned Vias; IP.com Number: IPCOM0002310970; Sep. 26, 2013.

(Continued)

Primary Examiner — Jarrett Stark
Assistant Examiner — Charles N Ausar-El

(74) *Attorney, Agent, or Firm* — Steven J. Meyers; Howard M. Cohn

(72) Inventors: **Elbert Emin Huang**, Carmel, NY (US); **Takeshi Nogami**, Schenectady, NY (US); **Raghuveer R. Patlolla**, Albany, NY (US); **Christopher J. Penny**, Poughkeepsie, NY (US); **Theodorus Eduardus Standaert**, Clifton Park, NY (US)

(73) Assignee: **International Business Machines Corporation**, Armonk, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/474,935**

(22) Filed: **Sep. 2, 2014**

(65) **Prior Publication Data**

US 2016/0064321 A1 Mar. 3, 2016


(51) **Int. Cl.**
H01L 23/528 (2006.01)
H01L 21/768 (2006.01)
H01L 23/522 (2006.01)
H01L 23/532 (2006.01)

(52) **U.S. Cl.**
CPC *H01L 23/528* (2013.01); *H01L 21/7684* (2013.01); *H01L 21/76807* (2013.01); *H01L 21/76843* (2013.01); *H01L 21/76864* (2013.01);

(57) **ABSTRACT**

Embodiments of the present invention provide increased distance between vias and neighboring metal lines in a back end of line (BEOL) structure. A copper alloy seed layer is deposited in trenches that are formed in a dielectric layer. The trenches are then filled with copper. An anneal is then performed to create a self-forming barrier using a seed layer constituent, such as manganese, as the manganese is drawn to the dielectric layer during the anneal. The self-forming barrier is disposed on a shoulder region of the dielectric layer, increasing the effective distance between the via and its neighboring metal lines.

9 Claims, 10 Drawing Sheets

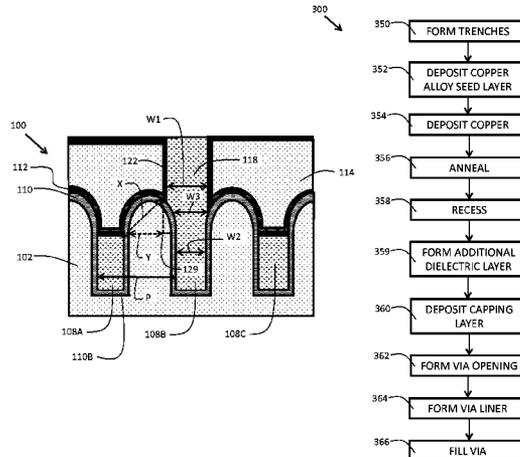

(56)

References Cited

U.S. PATENT DOCUMENTS

8,299,625 B2 10/2012 Ponoth et al.
 8,361,900 B2 1/2013 Pan et al.
 8,492,897 B2 * 7/2013 Cabral, Jr. H01L 23/53238
 257/751
 8,716,134 B2 * 5/2014 Edelstein H01L 21/4814
 257/751
 9,190,321 B2 * 11/2015 Cabral, Jr. H01L 21/76846
 2001/0001717 A1 5/2001 Kumauchi et al.
 2002/0121699 A1 9/2002 Cheng et al.
 2008/0179747 A1 * 7/2008 Sakai H01L 21/76805
 257/751
 2009/0035588 A1 * 2/2009 Li H01L 23/5226
 428/457
 2010/0038789 A1 * 2/2010 Cheng H01L 21/28556
 257/753
 2010/0207177 A1 8/2010 Liu et al.
 2011/0006429 A1 * 1/2011 Liu H01L 21/76831
 257/751
 2011/0101529 A1 * 5/2011 Kao H01L 23/53238
 257/751
 2011/0266676 A1 * 11/2011 Isobayashi H01L 21/76831
 257/751
 2013/0307150 A1 * 11/2013 Edelstein H01L 23/53238
 257/741
 2014/0021615 A1 * 1/2014 Ryan H01L 23/53209
 257/751

2014/0065815 A1 * 3/2014 Tanwar H01L 21/76832
 438/627
 2014/0097538 A1 * 4/2014 Zhao H01L 23/53238
 257/751
 2014/0117547 A1 * 5/2014 Lin H01L 23/53233
 257/751
 2014/0217591 A1 * 8/2014 Ryan H01L 23/53238
 257/751
 2014/0264874 A1 * 9/2014 Sung H01L 23/5329
 257/751

OTHER PUBLICATIONS

Narasimha, S. et al; 22nm High-Performance SOI Technology Featur-
 ing Dual-Embedded Stressors, Epi-Plate High-K Deep-Trench
 Embedded DRAM and Self-Aligned Via 15LM BEOL; IEEE; 2012;
 IEDM12, 52-55.
 Xia, F. et al; Characterization and Challenge of TDDDB Reliability in
 Cu/Low K Dielectric Interconnect; IEEE; 2011; IRPS11, 61-64.
 Koike, J. et al; Cu Alloy Metallization for Self-Forming Barrier
 Process; IEEE; 2006; pp. 161-163.
 Ohoka, Y. et al; Integration of Self-Formed Barrier Technology for
 32nm-node Cu Dual-Damascene Interconnects with Hybrid Low-k
 (PAr/SiOC) Structure; 2006 Symposium on VLSI Technology Digest
 of Technical Papers; IEEE 2006.
 Usui, T. et al; Highly Reliable Copper Dual-Damascene Intercon-
 nects With Self-Formed MnSixOy Barrier Layer, IEEE Transactions
 on Electron Devices, vol. 53, No. 10, Oct. 2006; pp. 2492-2499.

* cited by examiner

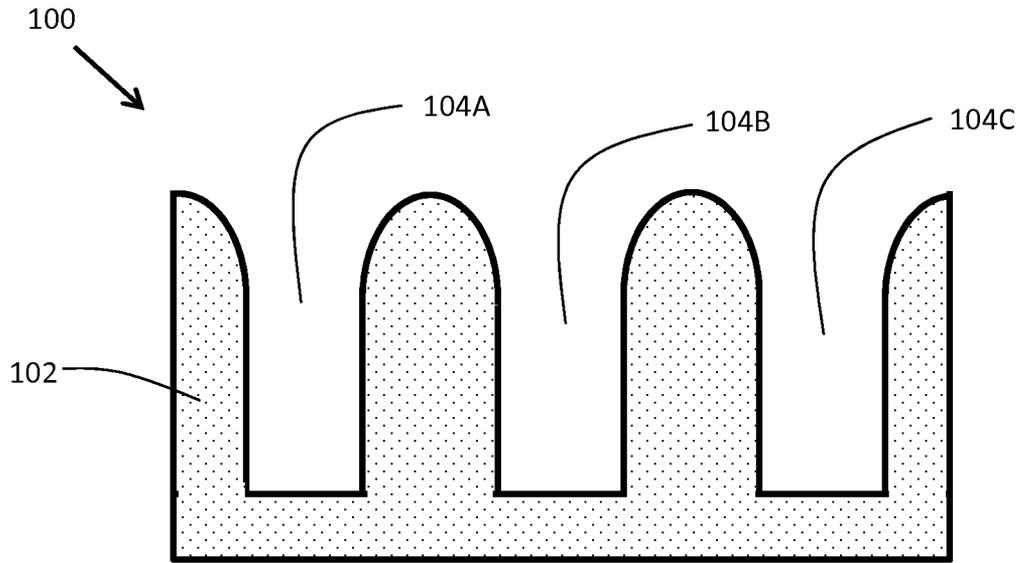


FIG. 1A

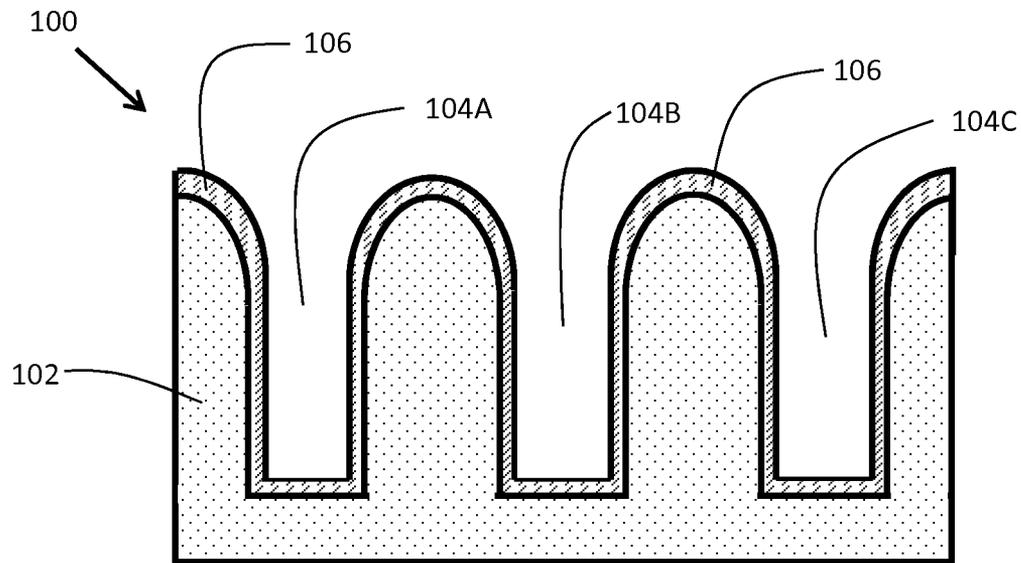


FIG. 1B

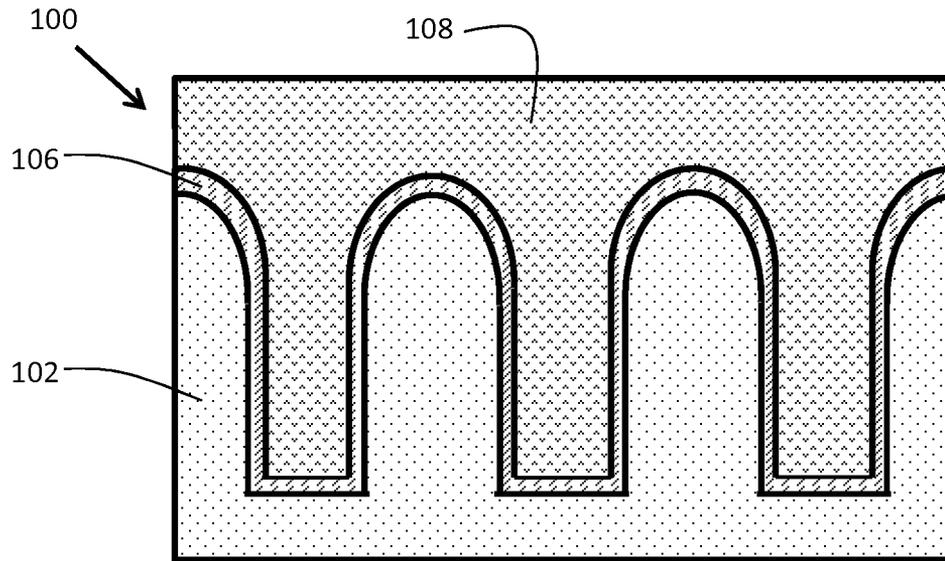


FIG. 1C

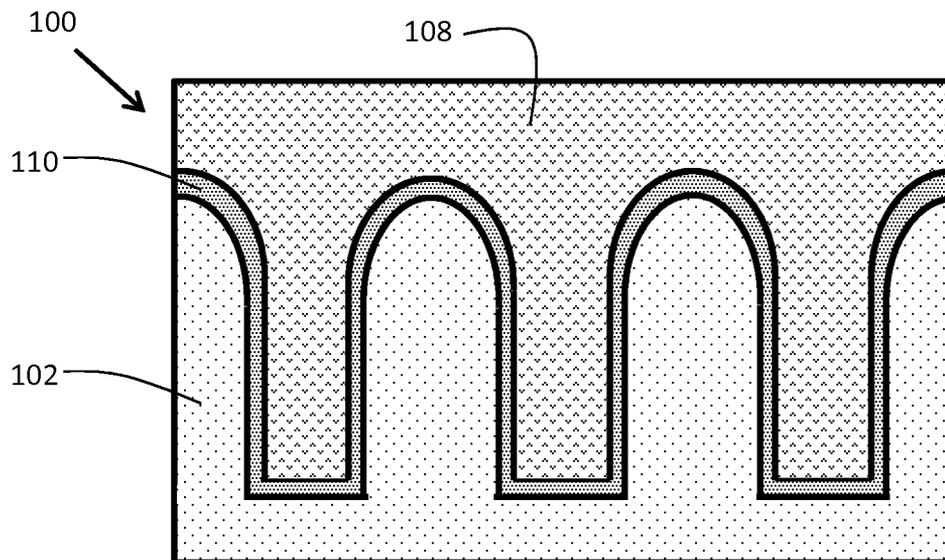


FIG. 1D

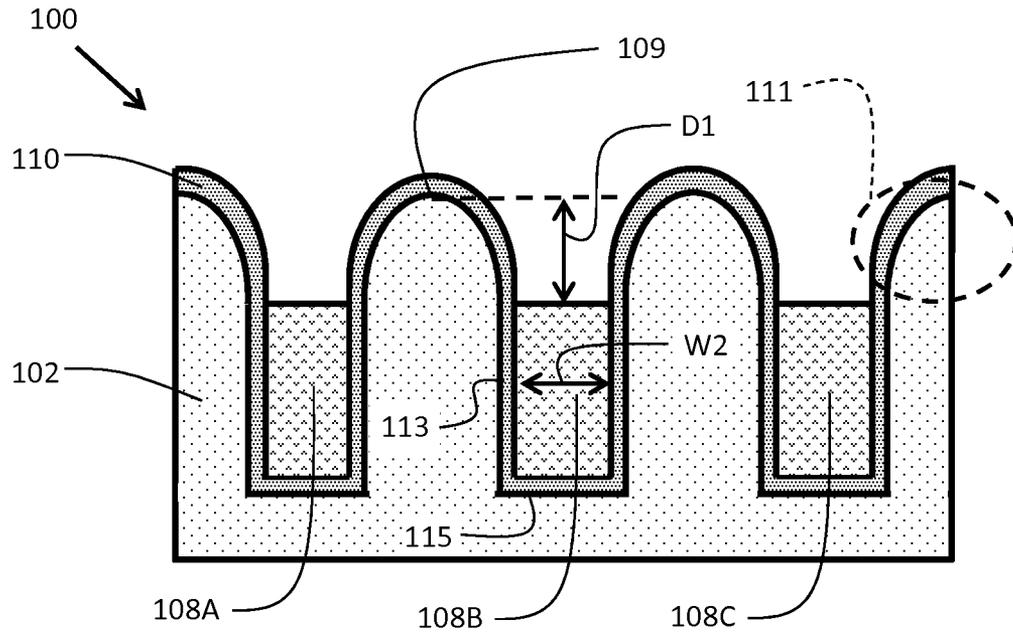


FIG. 1E

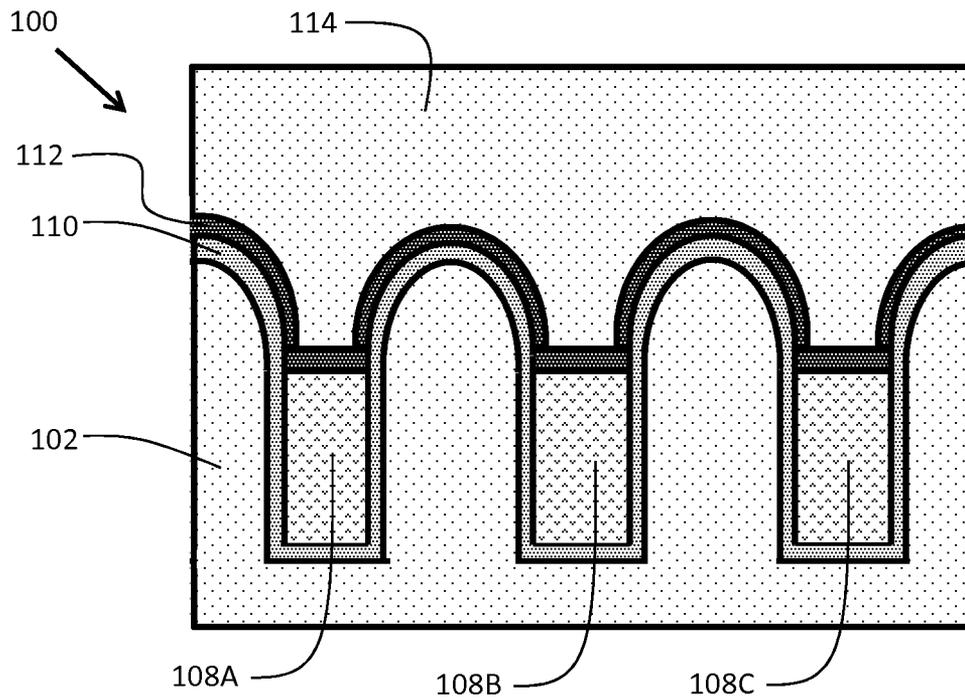


FIG. 1F

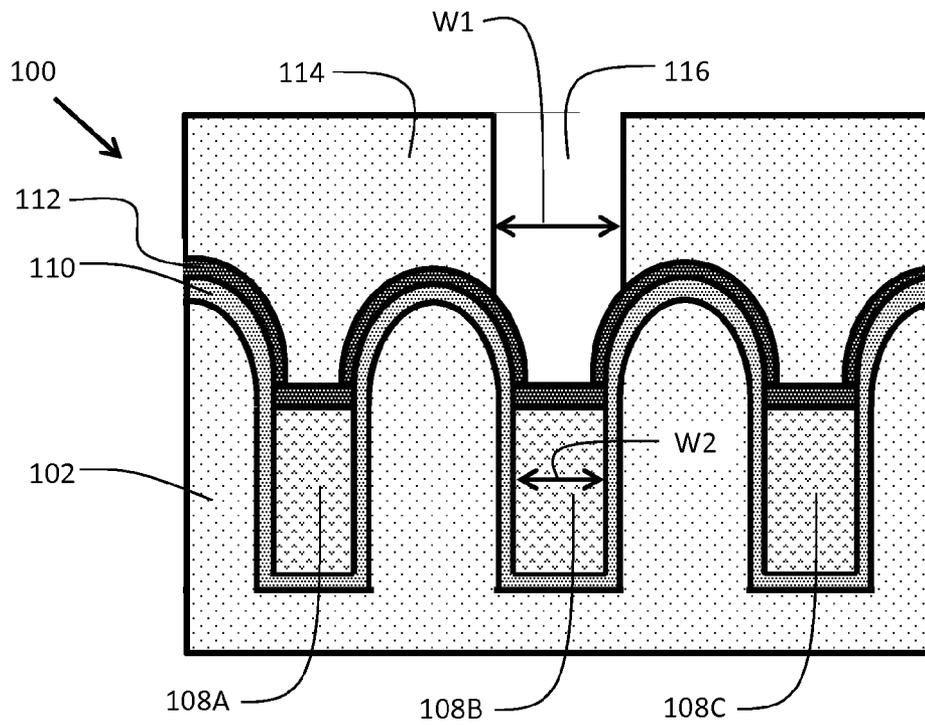


FIG. 1G

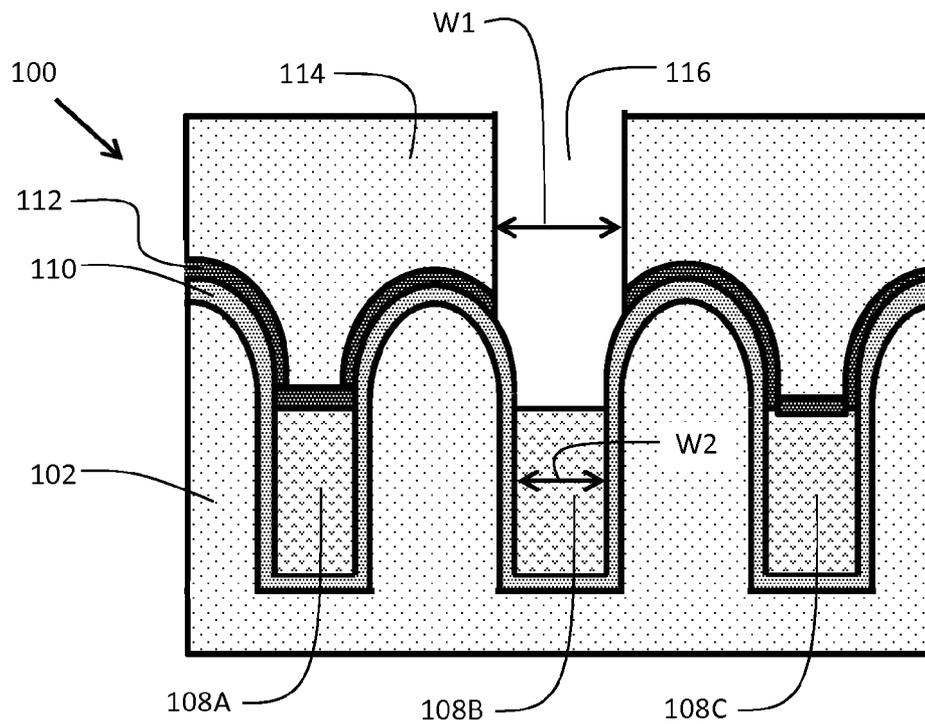
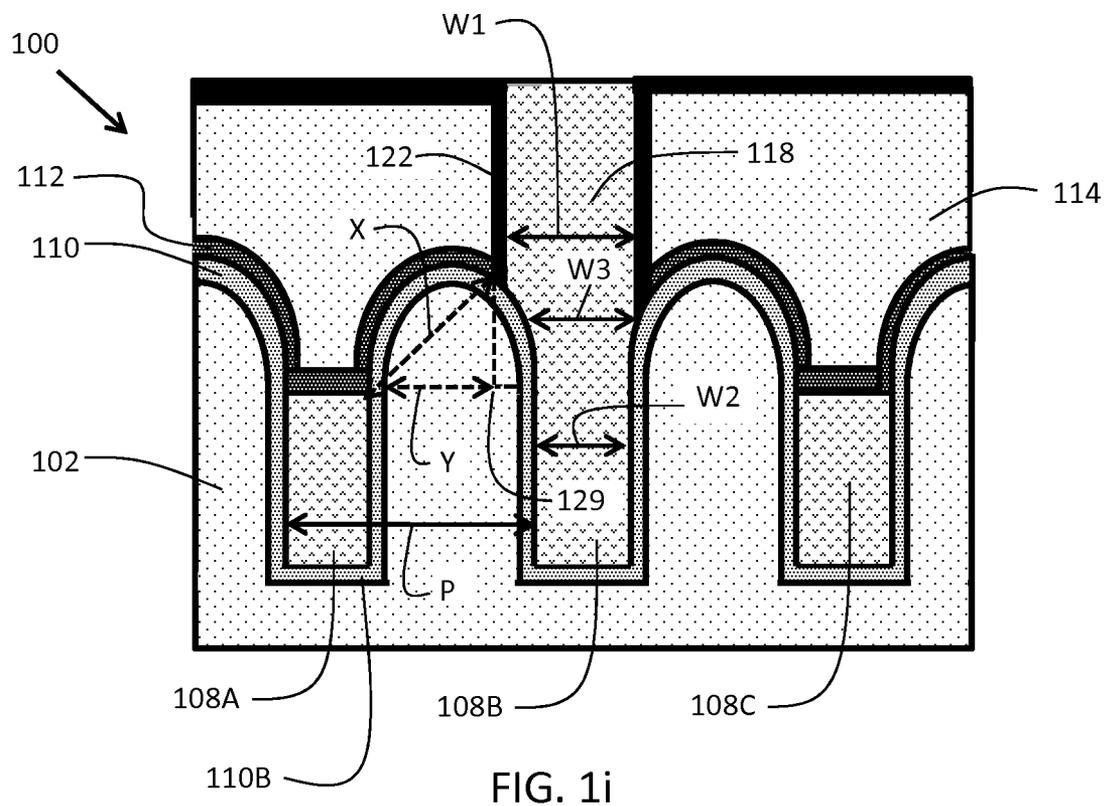
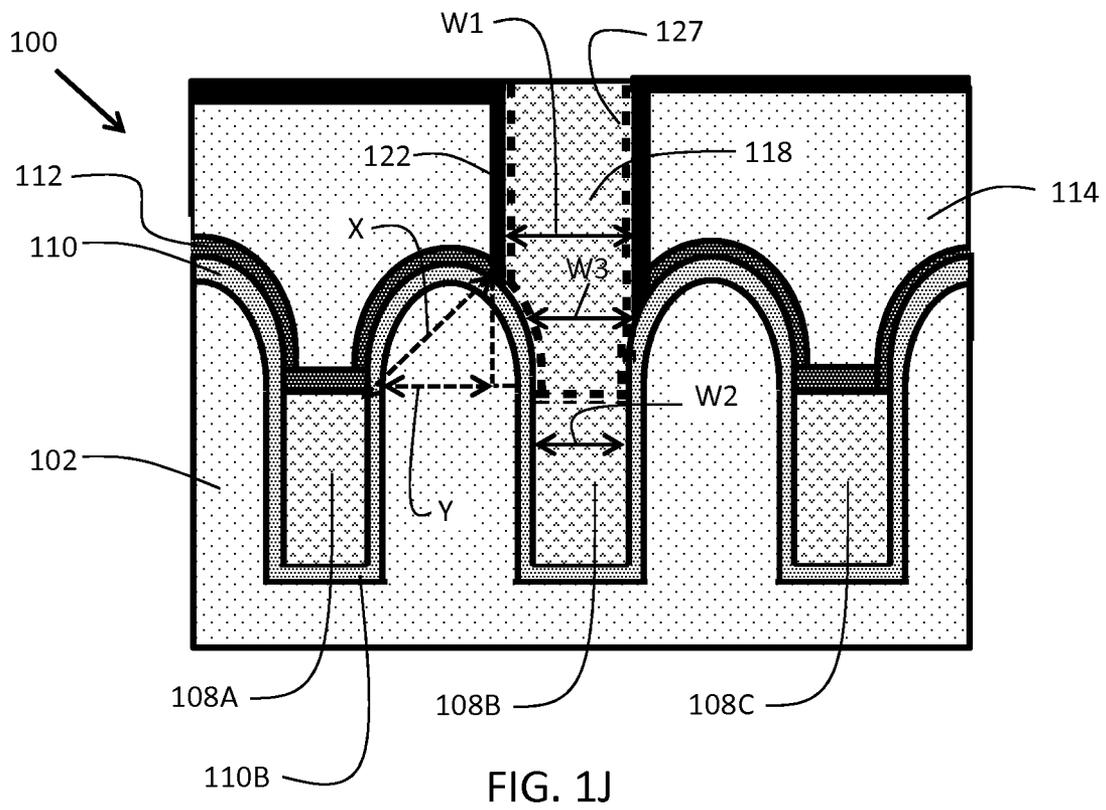


FIG. 1H





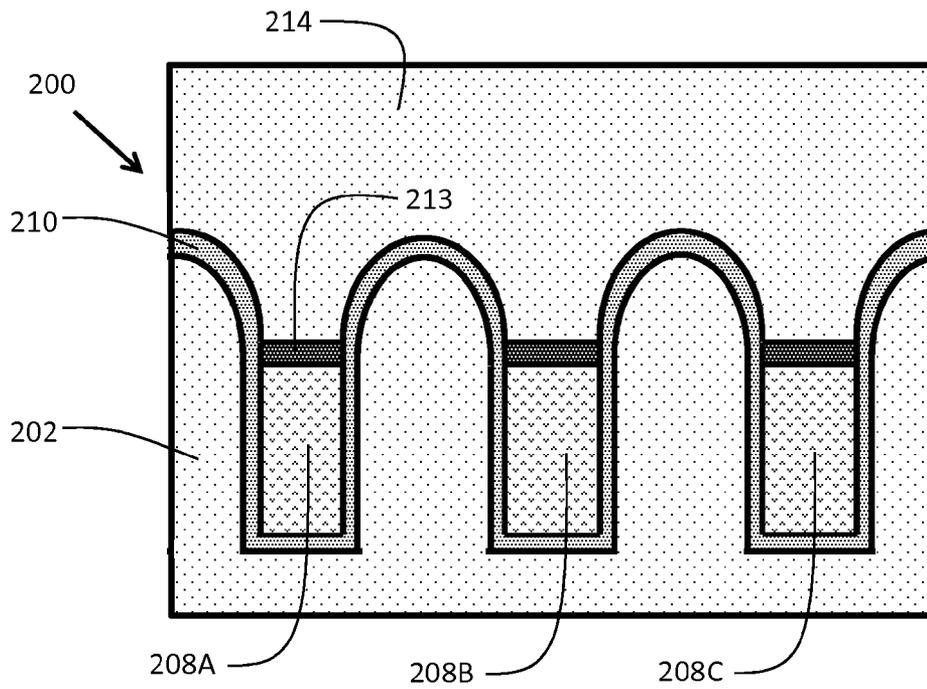


FIG. 2A

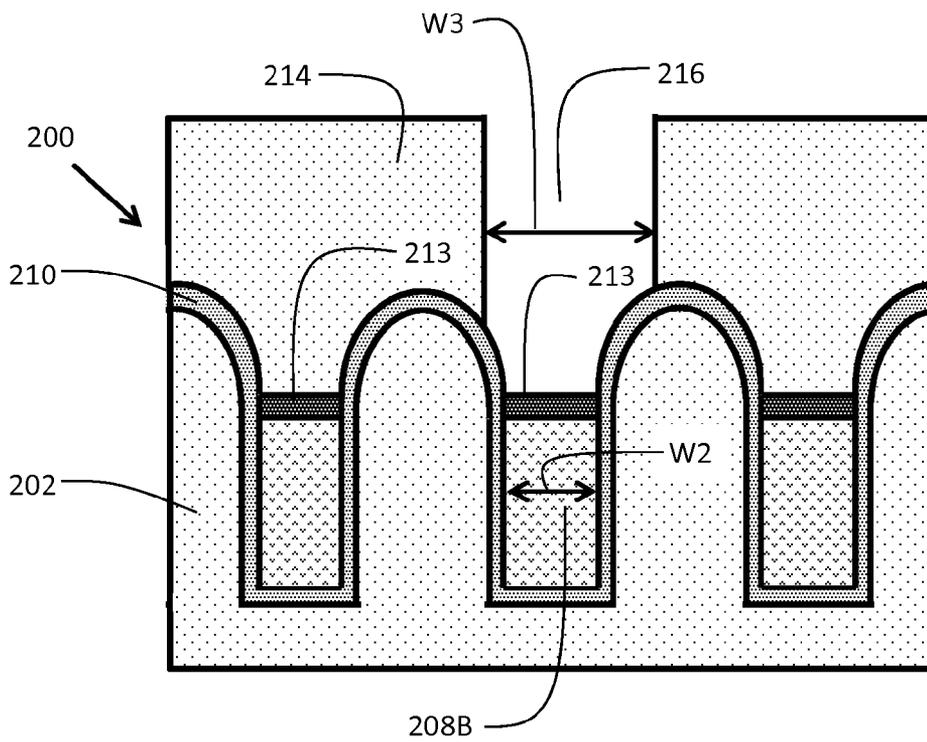


FIG. 2B

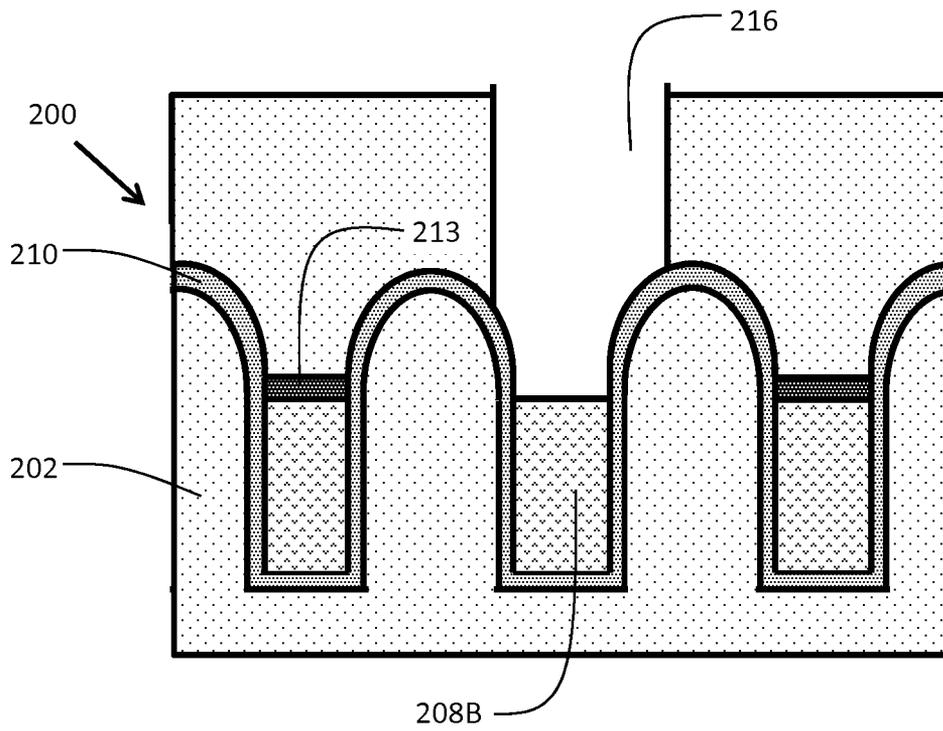


FIG. 2C

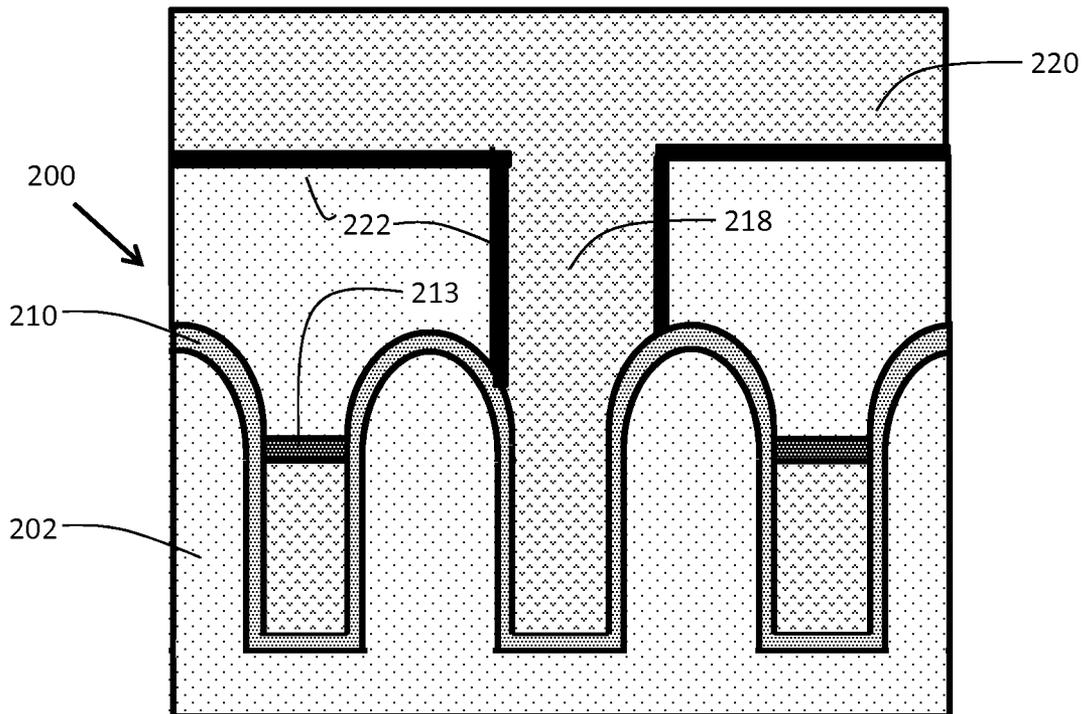


FIG. 2D

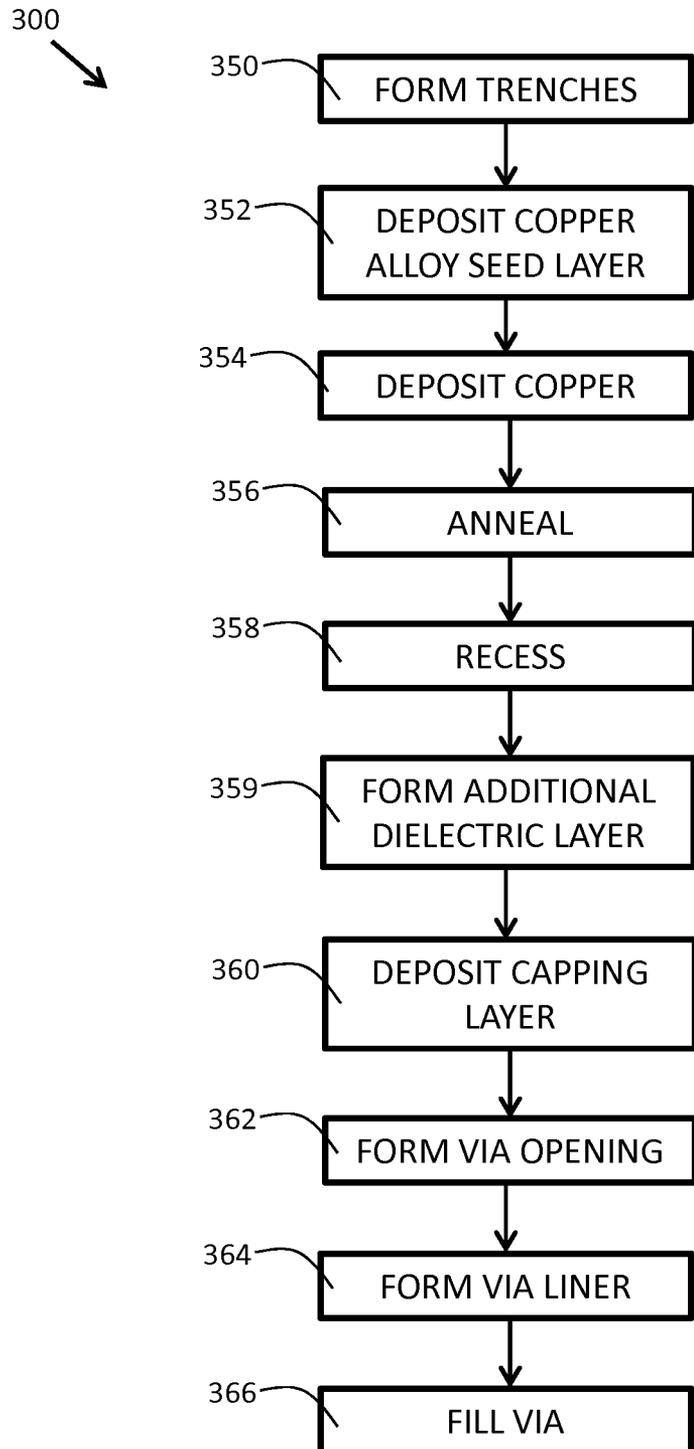


FIG. 3

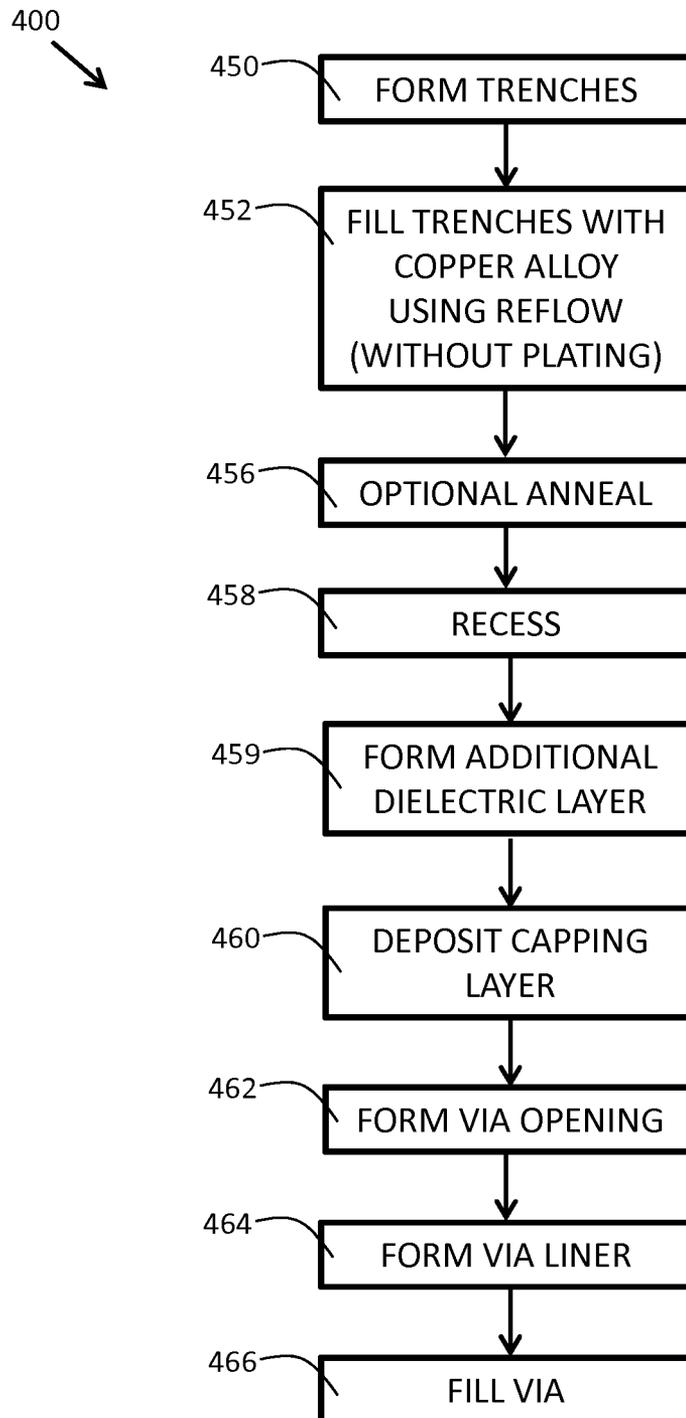


FIG. 4

1

METHOD AND STRUCTURE TO REDUCE THE ELECTRIC FIELD IN SEMICONDUCTOR WIRING INTERCONNECTS

FIELD OF THE INVENTION

The present invention relates generally to semiconductor fabrication, and more particularly, to back-end-of-line (BEOL) structures and methods of formation.

BACKGROUND OF THE INVENTION

In modern integrated circuits (ICs), high levels of functionality are achieved on a single chip by integrating large numbers of devices. One process commonly employed in achieving high circuit densities is by using back-end-of-line (BEOL) interconnect structures to link numerous devices, thereby forming a complex integrated circuit. BEOL interconnect structures are often fabricated by damascene processes, such as a dual damascene process in which a dielectric layer is deposited, vias and trenches are etched in the dielectric layer, and the vias and trenches are filled with a conductor using a single blanket deposition followed by planarization. This process is replicated to stack different conductive and via levels to create a multi-level, high density framework of conductive interconnections. As feature sizes continue to shrink with advances in technology, the dimensions of the interconnect structure spacing and thicknesses of the dielectric layers are correspondingly reduced. Reduced spacing between interconnect structures creates the potential for various issues, such as dielectric breakdown. It is therefore desirable to have improved BEOL interconnect structures and methods for fabricating BEOL interconnect structures to mitigate the aforementioned issues.

SUMMARY OF THE INVENTION

In a first aspect, embodiments of the present invention provide a method of forming a semiconductor structure, comprising: forming a plurality of M(x) trenches in a first dielectric layer thereby creating a shoulder region on a top surface of the first dielectric layer; forming a manganese copper alloy seed layer on the first dielectric layer; filling the plurality of M(x) trenches with copper to form a plurality of M(x) copper regions; annealing the plurality of M(x) copper regions to form a manganese silicate liner between the first dielectric layer and the M(x) copper regions; recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer, thereby leaving the manganese silicate liner on the top surface of the first dielectric layer and forming a plurality recessed M(x) copper regions; forming a blanket capping layer over the manganese silicate liner on the top surface of the first dielectric layer and the plurality of recessed M(x) copper regions; forming a second dielectric layer over the blanket capping layer; forming an opening in the second dielectric layer and the blanket capping layer to expose one of the plurality of M(x) copper regions and an adjacent portion of the manganese silicate liner on the top surface of the first dielectric layer; and filling the opening in the second dielectric layer with metallurgy to form a via, wherein the via has a non-planar bottom surface comprising a lower portion and an upper portion, wherein the lower portion of the non-planar bottom surface of the via in electrical contact with the one of the plurality of M(x) copper regions previously exposed, and wherein an upper portion of the non-planar bottom surface of the via is in contact with the manganese silicate liner on the

2

first dielectric layer. In a second aspect, embodiments of the present invention provide a semiconductor structure comprising: an M(x) copper region in a dielectric layer, wherein a shoulder region of the dielectric layer are adjacent to, and above each of the M(x) copper regions; a barrier layer disposed on the shoulder region, a sidewall of the M(x) copper region, and an underside of the M(x) copper region; a via in electrical contact with the first M(x) copper region, wherein the via has a non-planar bottom surface; and a via barrier layer disposed on sidewalls of the via.

BRIEF DESCRIPTION OF THE DRAWINGS

The structure, operation, and advantages of the present invention will become further apparent upon consideration of the following description taken in conjunction with the accompanying figures (FIGS.). The figures are intended to be illustrative, not limiting.

Certain elements in some of the figures may be omitted, or illustrated not-to-scale, for illustrative clarity. The cross-sectional views may be in the form of “slices”, or “near-sighted” cross-sectional views, omitting certain background lines which would otherwise be visible in a “true” cross-sectional view, for illustrative clarity.

Often, similar elements may be referred to by similar numbers in various figures (FIGS.) of the drawing, in which case typically the last two significant digits may be the same, the most significant digit being the number of the drawing figure (FIG.). Furthermore, for clarity, some reference numbers may be omitted in certain drawings.

FIG. 1A is a semiconductor structure at a starting point for embodiments of the present invention.

FIG. 1B is a semiconductor structure after a subsequent process step of depositing a seed layer.

FIG. 1C is a semiconductor structure after a subsequent process step of depositing a copper layer.

FIG. 1D is a semiconductor structure after a subsequent process step of performing an anneal to form a barrier layer.

FIG. 1E is a semiconductor structure after a subsequent process step of performing a recess of the copper material.

FIG. 1F is a semiconductor structure after a subsequent process step of depositing a blanket capping layer and an additional dielectric layer.

FIG. 1G is a semiconductor structure after a subsequent process step of forming a via cavity.

FIG. 1H is a semiconductor structure after a subsequent process step of opening an M(x) copper region.

FIG. 1i is a semiconductor structure after a subsequent process step of forming a via.

FIG. 1J is a semiconductor structure in accordance with alternative embodiments after a subsequent process step of forming a via.

FIG. 2A is a semiconductor structure in accordance with an alternative embodiment of the present invention, following from FIG. 1E, after a subsequent process step of depositing a copper-selective capping layer and an additional dielectric layer.

FIG. 2B is a semiconductor structure after a subsequent process step of forming a via cavity.

FIG. 2C is a semiconductor structure after a subsequent process step of opening an M(x) copper region.

FIG. 2D is a semiconductor structure after a subsequent process step of forming a via.

FIG. 3 is a flowchart indicating process steps for embodiments of the present invention.

FIG. 4 is a flowchart indicating process steps for alternative embodiments of the present invention.

DETAILED DESCRIPTION

Embodiments of the present invention provide increased distance between vias and neighboring metal lines in a back end of line (BEOL) structure. A copper alloy seed layer is deposited in trenches that are formed in a dielectric layer. The trenches are then filled with copper. An anneal is then performed to create a self-forming barrier using a seed layer constituent, such as manganese, as the manganese is drawn to the dielectric layer during the anneal. The self-forming barrier is disposed on a shoulder region of the dielectric layer, increasing the effective distance between the via and its neighboring metal lines.

FIG. 1A is a semiconductor structure **100** at a starting point for embodiments of the present invention. A dielectric layer **102** has a plurality of trenches **104A**, **104B**, and **104C** formed therein. The dielectric layer may be an interlayer dielectric (ILD), and may be comprised of silicon oxide, or other suitable material. The dielectric layer **102** may be part of a BEOL stack that may include multiple metal and via layers. In this disclosure, the term “M(x)” denotes a generic metal level, while the term “M(x+1)” denotes a metal level that is one level above metal level M(x). In embodiments, there may be 10 or more metal levels in an integrated circuit, with via levels connecting the adjacent metal levels. In subsequent process steps, metallization lines for metal level M(x) will be formed in the trenches **104A-104C**.

FIG. 1B is semiconductor structure **100** after a subsequent process step of depositing a copper alloy seed layer **106**. In embodiments, the seed layer may be deposited using a physical vapor deposition (PVD) process. The seed layer **106** serves multiple purposes. It provides adhesion for a subsequent copper fill process. Additionally, the copper alloy serves to provide a self-forming barrier after an anneal process. In embodiments, the seed layer **106** is a copper manganese alloy (CuMn). In other embodiments, the seed layer **106** may comprise other materials to create a self-forming barrier. The other materials included in seed layer **106** may include, but are not limited to, aluminum, germanium, magnesium, nickel, and titanium. Thus, in embodiments, the seed layer **106** may include CuAl, CuGe, CuMg, CuNi, or CuTi. In some embodiments, a conformal film may be deposited by chemical vapor deposition (CVD) prior to the seed layer. In embodiments, the conformal film is comprised of ruthenium or cobalt.

FIG. 1C is semiconductor structure **100** after a subsequent process step of depositing a copper layer **108**. The copper layer **108** may be deposited using an electroplating process or other suitable technique. The copper layer **108** adheres to copper alloy seed layer **106** during the electroplating process.

FIG. 1D is semiconductor structure **100** after a subsequent process step of performing an anneal to form a barrier layer **110**. In embodiments that utilize a CuMn seed layer **106**, the resulting barrier layer may be manganese silicate (MnSiO₃). In embodiments, the anneal may be performed at a process temperature ranging from about 100 degrees Celsius to about 450 degrees Celsius for a duration ranging from about 1 minute to about 60 minutes. This anneal is engineered to drive dopants to the dielectric interface.

FIG. 1E is semiconductor structure **100** after a subsequent process step of performing a recess of the copper material to form copper regions **108A**, **108B**, and **108C**. In embodiments, the recess may be performed using a chemical mechanical polish (CMP) process, by adjusting the param-

eters of the CMP tool to intentionally achieve an over-polish condition. Additionally, a wet etch process may be used to further etch the copper regions. The wet etch may include an SC-1 (ammonium hydroxide and/or hydrogen peroxide) etchant. In another embodiment, the wet etch process may comprise an alanine wet etch. The copper regions **108A-108C** are recessed to a depth D1 below the top surface **109** of the dielectric region **102**. In embodiments, D1, may range from approximately one third of the trench width W2 to roughly the same distance as W2. In embodiments, D1 ranges from about 10 nanometers to about 30 nanometers below the top surface **109** of the dielectric layer **102**. If D1 is too small, the separation between the landing via and the adjacent line below is reduced. That in turn creates the need to significantly tighten the overlay tolerances, and adversely impacts the product yield. If D1 is too large, it places a burden on the yield of the landing vias. This is because the anisotropic etching (e.g. using RIE) of the vias typically becomes more difficult as it has to traverse longer vertical distances. One advantage of embodiments of the present invention is that the via opening can be larger than the line width, which helps the via cavity formation process. The self-forming barrier **110** is disposed on a shoulder region (indicated generally as **111**) of the dielectric layer **102**. The shoulder regions **111** are disposed above and between each of the copper regions **108A**, **108B**, and **108C**. Copper regions **108A**, **108B**, and **108C** are M(x) copper regions. The barrier layer **110** is disposed on the shoulder region **111**, sidewall portions **113** of each M(x) copper region, and underside **115** of each M(x) copper region.

FIG. 1F is semiconductor structure **100** after a subsequent process step of depositing a blanket capping layer **112** and then depositing an additional dielectric layer **114**. In embodiments, dielectric layer **114** may be comprised of the same material as dielectric layer **102**. In other embodiments, dielectric layer **114** may be of a different material than dielectric layer **102**. In embodiments, capping layer **112** is comprised of at least two of silicon, nitrogen and carbon, and may include silicon nitride (SiN). In other embodiments, capping layer **112** is comprised of silicon carbon nitride (SiCN), silicon oxynitride SiON, or other suitable material. In embodiments, the capping layer **112** is deposited using a chemical vapor deposition (CVD) process or plasma-enhanced chemical vapor deposition (PECVD) process.

FIG. 1G is semiconductor structure **100** after a subsequent process step of forming a via cavity. This may be accomplished by patterning a hardmask layer (not shown) utilizing industry-standard lithographic and patterning techniques, followed by an anisotropic etch to form via cavity **116**. In embodiments, the anisotropic etch is performed using a reactive ion etch (RIE) process. The via cavity has a width W1, while the copper region **108B** has a width W2. In embodiments, width W1 is greater than width W2. In embodiments, width W2 ranges from about 20 nanometers to about 40 nanometers, and width W1 is about 10 percent to about 20 percent larger than width W2. The larger width W1 makes the via cavity **116** that is above copper region **108B** less sensitive to overlay errors, and also can serve to relax the lithographic requirements for making the via cavity **116**.

FIG. 1H is semiconductor structure **100** after a subsequent process step of opening an M(x) copper region **108B**. Copper region **108B** represents a metallization line at metal level M(x). After subsequent process steps, via cavity **116** will hold a via that connects copper region **108B** to a metallization line at level M(x+1). The opening of copper region **108B** may be accomplished by utilizing a selective etch process to remove the capping layer **112** that is exposed in via cavity **116**. For example, if capping layer **112** is comprised of silicon nitride,

and dielectric layer **114** is comprised of silicon oxide, then there are a variety of known etch techniques for selectively removing the capping layer **112**, while preserving the dielectric layer **112**, and the barrier layer **110**. The barrier layer **110** may serve as an etch stopping layer during the formation of via cavity **116**.

FIG. **1i** is semiconductor structure **100** after a subsequent process step of forming a via **118**. The via cavity **116** (FIG. **1H**) is filled with metallurgy, which may include copper. The bottom of the via is in contact with the shoulder regions of dielectric (see **111** of FIG. **1E**), thus forming a non-planar bottom of the via. First, a via barrier layer **122** is formed on the sidewalls of the via cavity **116**, as well as the top of dielectric layer **114**. The via barrier layer **122** serves to prevent diffusion of copper into the dielectric layer **114**. In embodiments, the via barrier layer **122** is comprised of MnSiO₃.

Further illustrated in FIG. **1i** is the shoulder separation distance X , which represents the distance from the nearest corner of an adjacent $M(x)$ metal region to where shoulder/sidewall meeting point of the via **118**. In embodiments, the dimension X ranges from about 0.35 times the metal region pitch P to about 0.7 times the metal region pitch P . In some embodiments, the pitch P may be approximately twice the metal width $W2$. In comparison, without the benefits of embodiments of the present invention, the via **118** would extend through the shoulder to point **129**, resulting in a via separation distance Y , where $Y < X$. Thus, embodiments of the present invention create a greater separation between $M(x)$ metal regions and adjacent overlying vias. The greater separation results in a decreased electric field, which allows for the same voltages to be used at reduced dimensions, and serves to reduce the probability of time-dependent dielectric breakdown (TDDB).

Continuing with FIG. **1i**, the via has a body which is adjacent dielectric **114** and a via bottom along **112** and the underlying copper region **108B**. It can be seen that via **118** may have bottom which is non-planar. As a result, the bottom of the via may have two widths. It may have a first width $W3$ in an upper portion of the non-planar bottom of the via, and a second width in a lower portion of the non-planar bottom of the via where it meets the copper region **108B**. Accordingly, the lower width of the bottom of the via will most likely equal the width of underlying trench, $W2$. Thus, the width $W3$ in the upper portion of the via bottom may be greater than (wider than) the via bottom at the lower portion of the via bottom. The width of the via cavity, $W1$, may be greater than or equal to the width $W3$ of the upper portion of the non-planar via bottom.

FIG. **1J** shows another embodiment in which an additional liner **127** which may be comprised of ruthenium or cobalt may be deposited using a chemical vapor deposition process, prior to the deposition of barrier layer **122**. In such a case, manganese from a CuMn seed layer diffuses through the cobalt or ruthenium film to form the barrier layer **122** (e.g. MnSiO₃) at the dielectric interface. The additional liner **127** may be in direct contact with the $M(x)$ copper region **108B** and the via **118**. In other embodiments, not shown. The barrier layer may comprise Ta and/or TaN. It will form on the sidewalls of the via opening and on top of the underlying copper region **108B** so as to contact a portion of the copper region **108B**. In this embodiment, an additional liner **127** comprising ruthenium or cobalt or manganese may be formed on the Ta containing barrier layer **122**.

FIG. **2A** is a semiconductor structure **200** in accordance with an alternative embodiment of the present invention, following from FIG. **1E**, after a subsequent process step of depositing a copper-selective capping layer and an additional

dielectric layer. As stated previously, similar elements may be referred to by similar numbers in various figures (FIGS.) of the drawing, in which case typically the last two significant digits may be the same. For example, dielectric layer **202** of FIG. **2** is similar to dielectric layer **102** of FIG. **1**. With semiconductor structure **200**, instead of using a blanket capping layer such as **112** of FIG. **1F**, a copper-selective capping layer **213** is deposited. The copper-selective capping layer **213** does not deposit on the barrier layer **210** that is disposed on dielectric layer **202**. In embodiments, the barrier layer **210** is comprised of MnSiO₃ that self-forms during an anneal. Thus, the copper-selective deposition process deposits capping layer **213** only on the metal lines **208A**, **208B**, and **208C**. In embodiments, the copper-selective capping layer is comprised of cobalt. In other embodiments, the copper-selective capping layer is comprised of cobalt tungsten phosphorus (CoWP). In other embodiments, the copper-selective capping layer is comprised of ruthenium and/or nickel.

FIG. **2B** is semiconductor structure **200** after a subsequent process step of forming a via cavity **216**. This may be accomplished by patterning a hardmask layer (not shown) utilizing industry-standard lithographic and patterning techniques, followed by an anisotropic etch to form via cavity **216**. In embodiments, the anisotropic etch is performed using a reactive ion etch (RIE) process. The via cavity has a width $W3$, while the copper region **208B** has a width $W2$. In embodiments, width $W3$ is greater than width $W2$. In embodiments, width $W3$ ranges from about 20 nanometers to about 40 nanometers, and width $W3$ is about 10 percent to about 20 percent larger than width $W2$. As shown, via cavity **216** is off-center from copper region **208B**, illustrating the effects of an overlay error. The larger width $W3$ makes the via cavity less sensitive to overlay errors, and also can serve to relax the lithographic requirements for making the via cavity **216**. Thus, even if the via cavity **216** is off center with respect to the copper region **208B**, the via still fully contacts the metal wiring below.

FIG. **2C** is semiconductor structure **200** after a subsequent process step of opening an $M(x)$ copper region **208B**. Copper region **208B** represents a metallization line at metal level $M(x)$. After subsequent process steps, via cavity **216** will hold a via that connects copper region **208B** to a metallization line at level $M(x+1)$. The opening of copper region **208B** may be accomplished by utilizing a selective etch process to remove the capping layer **213** that is exposed in via cavity **216**.

FIG. **2D** is semiconductor structure **200** after a subsequent process step of forming a via **218**. First, a via barrier layer **222** is formed on the sidewalls of the via cavity **216**. The via barrier layer **222** serves to prevent diffusion of copper into the dielectric layer **214**. In embodiments, the via barrier layer **222** is comprised of MnSiO₃. In other embodiments, the via barrier layer **222** is comprised of tantalum nitride (TaN). Other materials are possible for via barrier layer **222**. The via barrier layer **222** may be deposited via atomic layer deposition (ALD), physical vapor deposition (PVD), or other suitable method. Then the via cavity is filled with copper to form via **218**. Metal deposition may then continue with formation of an $M(x+1)$ metallization line **220**. Alternatively, a single damascene process may be used to form the via, such as illustrated in FIG. **1i**.

As can now be appreciated, embodiments of the present invention provide increased spacing between a via and neighboring metal lines. The self-forming barrier continues from the trench sidewall and on to the shoulder regions of the dielectric that is disposed between the lines. Due to the curvature of the shoulder regions, the distance between vias and neighboring metal lines is increased. The longer path results

in a decreased electric field, which allows for the same voltages to be used at reduced dimensions, and serves to reduce the probability of time-dependent dielectric breakdown (TDDB).

FIG. 3 is a flowchart 300 indicating process steps for embodiments of the present invention. In process step 350, trenches are formed in a dielectric layer (see FIG. 1A). In process step 352, a copper alloy seed layer is deposited (see 106 of FIG. 1B). In embodiments, the copper alloy seed layer may comprise a copper-manganese alloy. In process step 354, a copper layer is deposited (see 108 of FIG. 1C). The copper layer may be deposited by an electroplating process. In process step 356, an anneal is performed. This causes a self-forming barrier layer to form along the dielectric layer (see 110 of FIG. 1D). In the case of a copper-manganese seed layer, the manganese (Mn) migrates to the dielectric surface (at an elevated process temperature of the anneal) and forms an MnSiO₃ film, which is a dielectric film. In process step 358, a recess is performed. This may include a CMP over-polish, and/or a wet etch, such as a SC-1 (ammonium hydroxide and/or hydrogen peroxide) or an alanine wet etch.

In process step 359, an additional dielectric layer is formed (see 114 of FIG. 1F), and a recess is formed to create a via cavity (see 116 of FIG. 1G). In process step 360, a capping layer is deposited on the metallization lines. This may include depositing a blanket capping layer (see 112 of FIG. 1F), or a copper-selective capping layer (see 213 of FIG. 2B). In process step 362, a via opening is formed in the upper dielectric layer and the underlying M(x) metallization line is exposed (see 116 of FIG. 1H). In process step 364, a via barrier layer is formed (see 112 of FIG. 1i). The via barrier layer serves as a liner to prevent copper diffusion into the dielectric layers. In process step 366, the via is filled with copper, such as by a single damascene process, (see 118 of FIG. 1j). From this point forward, industry-standard techniques may be used to complete the fabrication of the integrated circuit (IC). These steps may include additional back-end-of-line (BEOL) layer formation, followed by packaging and test.

FIG. 4 is a flowchart 400 indicating process steps for alternative embodiments of the present invention. In process step 450, trenches are formed in a dielectric layer (see FIG. 1A). In process step 452, trenches are filled with a copper alloy using a reflow process, without a plating operation. In embodiments, this process step may start with a conformal CVD cobalt or ruthenium film. Then, a Physical Vapor Deposition (PVD) process may be used to deposit Cu with the Mn (or other dopant), followed by a Cu reflow process. One way to achieve Cu reflow is by controlling the wafer process temperature (in some embodiments, keeping the wafer process temperature in the range of about 200 degrees Celsius to about 400 degrees Celsius) and argon ion bombardment which results in bottom-up fill for the smaller features without using plating. The thermal budget of this process may be adequate to drive the Mn to the dielectric interface, but an additional anneal may be used if necessary to complete the Mn diffusion. In process step 456, an anneal is performed. In process step 458, a recess is performed. This may include a CMP over-polish, and/or a wet etch, such as a SC-1 (ammonium hydroxide and/or hydrogen peroxide) or an alanine wet etch. In process step 459, an additional dielectric layer is formed (see 214 of FIG. 2A), and a recess is formed to create a via cavity (see 216 of FIG. 2B).

In process step 460, a capping layer is deposited on the metallization lines. This may include depositing a blanket capping layer (see 112 of FIG. 1F), or a copper-selective capping layer (see 213 of FIG. 2B). In process step 462, a via opening is formed in the upper dielectric layer and the under-

lying M(x) metallization line is exposed (see 116 of FIG. 1H). In process step 464, a via barrier layer is formed (see 112 of FIG. 1i). The via barrier layer serves as a liner to prevent copper diffusion into the dielectric layers. In process step 466, the via is filled with copper (see 118 of FIG. 10). From this point forward, industry-standard techniques may be used to complete the fabrication of the integrated circuit (IC). These steps may include additional back-end-of-line (BEOL) layer formation, followed by packaging and test.

Although the invention has been shown and described with respect to a certain preferred embodiment or embodiments, certain equivalent alterations and modifications will occur to others skilled in the art upon the reading and understanding of this specification and the annexed drawings. In particular regard to the various functions performed by the above described components (assemblies, devices, circuits, etc.) the terms (including a reference to a "means") used to describe such components are intended to correspond, unless otherwise indicated, to any component which performs the specified function of the described component (i.e., that is functionally equivalent), even though not structurally equivalent to the disclosed structure which performs the function in the herein illustrated exemplary embodiments of the invention. In addition, while a particular feature of the invention may have been disclosed with respect to only one of several embodiments, such feature may be combined with one or more features of the other embodiments as may be desired and advantageous for any given or particular application.

What is claimed is:

1. A method of forming a semiconductor structure, comprising:
 - forming a plurality of M(x) trenches in a first dielectric layer thereby creating a shoulder region on a top surface of the first dielectric layer;
 - forming a manganese copper alloy seed layer on the first dielectric layer;
 - filling the plurality of M(x) trenches with copper to form a plurality of M(x) copper regions;
 - annealing the plurality of M(x) copper regions to form a manganese silicate liner between the first dielectric layer and the M(x) copper regions;
 - recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer, thereby leaving the manganese silicate liner on the top surface of the first dielectric layer and forming a plurality recessed M(x) copper regions;
 - forming a blanket capping layer over the manganese silicate liner on the top surface of the first dielectric layer and the plurality of recessed M(x) copper regions;
 - forming a second dielectric layer over the blanket capping layer;
 - forming an opening in the second dielectric layer and the blanket capping layer to expose one of the plurality of M(x) copper regions and an adjacent portion of the manganese silicate liner on the top surface of the first dielectric layer;
 - filling the opening in the second dielectric layer with metallurgy to form a via, wherein the via has a non-planar bottom surface comprising a lower portion and an upper portion, wherein the lower portion of the non-planar bottom surface of the via is electrical contact with the one of the plurality of M(x) copper regions previously exposed, and wherein an upper portion of the non-planar bottom surface of the via is in contact with the manganese silicate liner on the first dielectric layer;
 - prior to filling the plurality of M(x) trenches, forming a second liner layer comprising cobalt or ruthenium; and

9

recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer comprising removing a portion of the second liner layer to leave a portion the manganese silicate layer exposed on the shoulder region of the first dielectric layer.

2. The method of claim 1 wherein the upper portion is wider than the lower portion.

3. The method of claim 1, wherein annealing occurs at a process temperature ranging from about 100 degrees Celsius to about 450 degrees Celsius for a duration ranging from about 1 minute to about 60 minutes.

4. The method of claim 1, wherein recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer comprises performing an over-polish operation with a chemical mechanical polish tool.

5. The method of claim 4, wherein recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer further comprises a wet etch process.

6. The method of claim 1, wherein recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer comprises recessing the plurality of M(x) copper regions to a level ranging from about 10 nanometers to about 30 nanometers below the top surface of the first dielectric layer.

7. The method of claim 1, wherein forming a blanket capping layer comprises forming a layer comprising at least two of silicon, nitrogen and carbon.

8. A method of forming a semiconductor structure, comprising:

forming a plurality of M(x) trenches in a first dielectric layer thereby creating a shoulder region on a top surface of the first dielectric layer;

forming a manganese copper alloy seed layer on the first dielectric layer;

filling the plurality of M(x) trenches with copper to form a plurality of M(x) copper regions;

annealing the plurality of M(x) copper regions to form a manganese silicate liner between the first dielectric layer and the M(x) copper regions;

recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer, thereby leaving the manganese silicate liner on the top surface of the first dielectric layer and forming a plurality recessed M(x) copper regions;

forming a blanket capping layer over the manganese silicate liner on the top surface of the first dielectric layer and the plurality of recessed M(x) copper regions;

forming a second dielectric layer over the blanket capping layer;

forming an opening in the second dielectric layer and the blanket capping layer to expose one of the plurality of M(x) copper regions and an adjacent portion of the manganese silicate liner on the top surface of the first dielectric layer;

filling the opening in the second dielectric layer with metallurgy to form a via, wherein the via has a non-planar bottom surface comprising a lower portion and an upper

10

portion, wherein the lower portion of the non-planar bottom surface of the via is electrical contact with the one of the plurality of M(x) copper regions previously exposed, and wherein an upper portion of the non-planar bottom surface of the via is in contact with the manganese silicate liner on the first dielectric layer; and

forming metallurgy to form a via comprising forming a second manganese silicate liner on the second dielectric layer and filling the via with copper.

9. A method of forming a semiconductor structure, comprising:

forming a plurality of M(x) trenches in a first dielectric layer thereby creating a shoulder region on a top surface of the first dielectric layer;

forming a manganese copper alloy seed layer on the first dielectric layer;

filling the plurality of M(x) trenches with copper to form a plurality of M(x) copper regions;

annealing the plurality of M(x) copper regions to form a manganese silicate liner between the first dielectric layer and the M(x) copper regions;

recessing the plurality of M(x) copper regions to a level below a top surface of the first dielectric layer, thereby leaving the manganese silicate liner on the top surface of the first dielectric layer and forming a plurality recessed M(x) copper regions;

forming a blanket capping layer over the manganese silicate liner on the top surface of the first dielectric layer and the plurality of recessed M(x) copper regions;

forming a second dielectric layer over the blanket capping layer;

forming an opening in the second dielectric layer and the blanket capping layer to expose one of the plurality of M(x) copper regions and an adjacent portion of the manganese silicate liner on the top surface of the first dielectric layer;

filling the opening in the second dielectric layer with metallurgy to form a via, wherein the via has a non-planar bottom surface comprising a lower portion and an upper portion, wherein the lower portion of the non-planar bottom surface of the via is electrical contact with the one of the plurality of M(x) copper regions previously exposed, and wherein an upper portion of the non-planar bottom surface of the via is in contact with the manganese silicate liner on the first dielectric layer;

forming metallurgy to form a via comprising forming a second manganese silicate liner on the second dielectric layer and filling the via with copper; and

forming a third liner comprising cobalt or ruthenium between the second manganese silicate liner and the copper filling the via, wherein the third liner is in direct contact with the M(x) copper region and the copper filling the via.

* * * * *