

(51) International Patent Classification:
C10G 75/00 (2006.01) *C10G 31/00* (2006.01)(21) International Application Number:
PCT/CA2009/000487(22) International Filing Date:
14 April 2009 (14.04.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HER MAJESTY THE QUEEN IN RIGHT OF CANADA AS REPRESENTED BY THE MINISTER OF NATURAL RESOURCES** [CA/CA]; 580 Booth Street, 16th Floor, Ottawa, Ontario K1A 0E4 (CA).


(72) Inventor; and

(75) Inventor/Applicant (for US only): **HEERZE, Louis D.** [CA/CA]; 14704 63rd Avenue, Edmonton, Alberta T6H 4Y8 (CA).(74) Agent: **SHAPIRO COHEN**; P.O. Box 13002, Kanata, Ontario K2K 0E2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: PETROLEUM BIOPROCESSING TO PREVENT REFINERY CORROSION

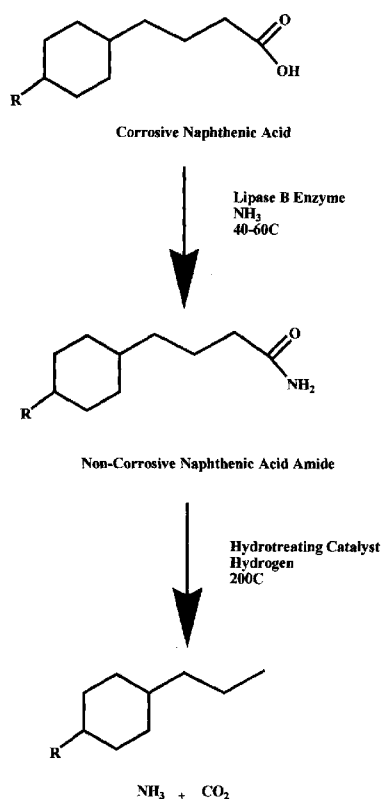**Figure 1**

(57) **Abstract:** The present invention relates to the bioupgrading of crude oil is directed to a process for decreasing the acidity of an acidic crude oil, comprising contacting an acidic crude oil with a mixture nitrogen containing compounds selected from the group comprising ammonia, ammonia hydroxide, amines and the salts thereof, and in the presence of lipase enzyme, under conditions of suitable temperature and pressure sufficient to form the corresponding amide. The resulting naphthenic acid derived amides can then be processed normally in a refinery using such processes as cracking or hydrotreating and converted to hydrocarbon, ammonia and carbon dioxide without causing damage to the refinery infrastructure. This enzyme process is done at reduced temperatures (40-60°C) and pressures requiring less energy.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

— *with amended claims and statement (Art. 19(1))*

PETROLEUM BIOPROCESSING TO PREVENT REFINERY CORROSION

Field of the Invention

5 The present invention relates to a process for bioupgrading crude oil. More specifically, the present invention discloses the use of lipase enzyme to convert naphthenic acid compounds, in combination with ammonia hydroxide or other amines, into amides that do not possess any corrosive properties. The resulting naphthenic acid derived amides can then be processed normally in a refinery using such processes as
10 cracking or hydrotreating and converted to hydrocarbon, ammonia and carbon dioxide without causing damage to the refinery infrastructure.

Background of the Invention

15 The quality of crude oil throughout the world is reduced by acidic components found in the oil. During refining, at temperatures between 220 and 400 °C, these species can become corrosive. Acidic species such as naphthenic acids that have boiling points in this temperature range will condense on metal surfaces leading to damage in the refinery infrastructure, potential safety issues, and costly repairs. As a
20 result, oils with high acid content, whether from conventional (crude oil) or oil sands (bitumen) sources, are more difficult to market and their value is significantly discounted.

 Conventional methods to remove corrosive species from crude oil involve
25 costly and energy-intensive chemical and thermal processes. For example, the current technologies developed to remove organic acids from crude oil involve either thermal decomposition at 400°C (Blum *et al.* in U.S. Patent 5,820,750), adsorbing onto inert materials (Varadaraj in U.S. Patent 6,454,936), treating with surfactants (Gorbaty *et al.* in Canadian Patent 2,226,750) or converting the organic acids into various derivatives
30 that are easier to remove (Brons in U.S. Patent 5,871,637, Sartori *et al.* in Canadian Patents 2,343,769 and 2,345,271, and Varadaraj *et al.* in U.S. Patent 6,096,196).

Efforts to minimize organic acid corrosion have included a number of approaches for neutralizing and removing the acids from the oil. For example, there are numerous approaches in the literature on the reduction of the organic acid species in crude oil. They include thermal decomposition of organic acids using high temperatures in the presence (U.S. Patents 5,914,030, 5,928,502) or absence (U.S. Patent 5,820,750) of a metal catalyst and treatment of corrosive acids with group IA and IIA metal oxides, hydroxides and hydrates to form metal salts of naphthenic acids which are then thermally decomposed at elevated temperatures (U.S. Patents 5,985,137, 5,891,325, 5,871,637, 6,022,494, 6,190,541, 6,679,987). Other methods include chemical formation of esters of the organic acids in the presence of alcohol and a base (U.S. Patents 5,948,238, 6,251,305, 6,767,452, and Canadian Patent 2,343,769), reducing acidity by the formation of various salts of organic acids using base (U.S. Patents 5,643,439, 5,683,626, 5,961,821, 6,030,523), removal of naphthenic acids using detergents or surfactants (U.S. Patents 6,054,042, 6,454,936), absorbing organic acids onto polymeric amines (U.S. Patents 6,121,411, 6,281,328) and by adding corrosion inhibitors to crude oil to prevent naphthenic acid induced metal corrosion (U.S. Patent 5,552,085).

U.S. Patent 6,258,258 and Canadian Patent 2,345,271 describe the formation of naphthenic acid amides by treating crude oil with excess ammonia at elevated temperatures (above 180 °C) and elevated pressures (100-400 kPa).

While these processes have achieved varying degrees of success, most of these methods are costly and energy-intensive and their effectiveness somewhat limited. As a result, there is a need to develop alternative approaches to eliminate the corrosive species in petroleum and for treating acidic crudes.

Recently it has been reported that lipase B (Mickiyo in European Patent 0287634), from the fungi *Candida Antarctica*, produced by industrial enzyme producer Novozymes, demonstrated catalytic activity in the hydrolysis of fatty acids and converts them into fatty acid esters in the presence of alcohol (Anderson *et al.* in

Biocat. Biotrans. 1998, 16, 181-204). The enzyme also has the ability to convert fatty acids, carboxylic acids and triglycerides into amides by the addition of amines or ammonia (DeZoete *et al.* in PCT Patent Application PCT/EP1994/003038 with publication number WO 95/07359; DeZoete *et al.* in *Ann. NY Acad. Sci.* 1996, 799, 346-350; Egraz in U.S. Patent 5,973,203; Hacking *et al.* in *Biotech. Bioeng.* 2002, 68, 84-91; Ignacio *et al.* in *Chem. Soc. Rev.* 2004, 33, 201-9; Irimescu *et al.* in *Tet. Lett.* 2004, 45, 523-525; Litjens *et al.* in PCT WO 00/58490; Madeira Lau *et al.* in *Org. Lett.* 2000, 2, 4189-4191; and Tuccio *et al.* in *Tet. Lett.* 1991, 32, 2763-2764).

10 However, the art is substantially bereft of methods for upgrading the quality of crude oil comprising naphthenic acids by the use of enzymes or biocatalysts. U.S. Patents 7,101,410, 6,461,859 and 5,358,870 describe the use of biocatalysts, such as bacteria, fungi, yeast, and algae, hemoprotein, and a cell-free enzyme preparation from *Rhodococcus sp.* ATCC 53969, respectively, to improve the quality of oil specifically
15 target organic sulphur containing molecule by reducing the sulphur content as well as lowering their viscosity. U.S. Patent 5,858,766 describes the use of microorganisms (a bacteria strain) in a bioupgrading capacity to selectively remove organic nitrogen and sulphur in oil as well as remove metals.

20 There remains the need for bioprocesses, as an attractive alternative to current upgrading methods, that use enzymes to improve the quality of crude oil and bitumen by removing acidic species.

25 **Summary of the Invention**

 The present invention is directed to bioupgrading, i.e., using enzymes to improve the quality of crude oil and bitumen. The advantages of bioupgrading technologies lie in that they operate under much milder conditions, for example, at lower temperatures and pressures, compared to those required by conventional
30 technologies. Consequently, much less energy will be required. As a result, the environmental impacts would be reduced. Furthermore, since biocatalysts and enzymes are specific in their conversions, only the undesirable components - in this case,

corrosive species - are converted into non-corrosive ones without affecting the rest of the crude oil. The result is an improvement in the overall quality of the oil and refinery corrosion prevention.

5 The present invention identifies a bioupgrading use for a lipase enzyme, more specifically but not limited to lipase B (NovozymeTM 435) originally isolated from the fungi *Candida antarctica*, and now a recombinant enzyme expressed in *Aspergillus oryzae*. This lipase enzyme has the capability to convert organic acids including naphthenic acid model compounds, in combination with ammonia hydroxide or other
10 amines, into chemical species (amides) that do not possess any corrosive properties. The amide products generated from enzyme reaction were confirmed by gas chromatography-mass spectrometry (GC-MS) analysis. The resulting naphthenic acid derived amides can then be processed normally in a refinery using such processes as cracking or hydrotreating and converted to hydrocarbon, ammonia and carbon dioxide
15 without causing damage to the refinery infrastructure.

One of the advantages of this lipase B enzyme is that the enzyme is thermostable and can function at temperatures of 40-60°C. The enzyme can carry out bioconversions in organic solvents such as toluene or heptane and possesses broad
20 substrate specificity. As such, lipase B, and/or similar suitable enzymes, can be used to reduce the corrosive properties of crude oil and bitumen by converting organic acids including naphthenic acids in crude oil into a non-corrosive species such as naphthenic acid amides. This process is done at reduced temperatures (40-60°C) and pressures that require less energy. The resulting naphthenic acid derived amides can then be
25 processed normally in a refinery using such processes as cracking or hydrotreating and converted to hydrocarbon, ammonia and carbon dioxide without causing damage to the refinery infrastructure.

In one aspect of the present invention, it discloses a process for decreasing the
30 acidity of an acidic crude oil, comprising:

a. contacting an acidic crude oil with at least one nitrogen containing compound, and

b. incubating the mixture obtained from step (a) in the presence of lipase enzyme;

under conditions of suitable temperature and pressure sufficient to form the corresponding amides.

5

Brief Description of the Drawings

The invention will now be described by way of reference to the drawings, in which:

10 Figure 1 illustrates the bioprocess to reduce refinery corrosion using lipase B;

Figure 2 is a GC elution profile for the incubation of the lipase B enzyme with 4-phenylbutyric acid and ammonium hydroxide;

Figure 3 is a mass spectrum of the major product generated from the lipase B catalyzed reaction of 4-phenylbutyric acid with ammonium hydroxide as shown in
15 Figure 2;

Figure 4 illustrates donor specificity of lipase B using model naphthenic acid model compounds and ammonium hydroxide;

Figure 5 illustrates acceptor specificity of lipase B using various amine acceptor substrates and 4-phenylbutyric acid;

20 Figure 6 illustrates the effect of the amount of lipase B on product formation for the reaction between either cyclohexylbutyric acid or 4-phenylbutyric acid and ammonium hydroxide;

Figure 7 illustrates the effect of incubation time on product formation for the reaction between cyclohexylbutyric acid and ammonium hydroxide;

25 Figure 8 is the ^1H NMR spectra of the *Athabasca* naphthenic acids (upper) and the product generated from the reaction of *Athabasca* naphthenic acids with dodecylamine using lipase B (lower);

Figure 9 is the ^1H NMR spectra of the Asia 3 naphthenic acids (upper) and the product generated from the reaction of Asia 3 naphthenic acids with dodecylamine
30 using lipase B (lower);

Figure 10 illustrates the effect of the amount of dodecylamine on product formation for the reaction with 4-phenylbutyric acid;

Figure 11 illustrates the effect of the amount of ammonium carbamate on product formation for the reaction with 4-phenylbutyric acid;

Figure 12 illustrates donor specificity of lipase B using various amine acceptor substrates using optimized conditions;

5 Figure 13 illustrates the effect of incubation time and temperature on product formation for the reaction between phenylbutyric acid and hexylamine; and

Figure 14 illustrates the conversion of 4-phenylbutyric acid by Lipase B in the presence of hexylamine over 4 consecutive 24 h incubations in the bioreactor.

10 **Detailed Description of the Invention**

Crude oils can contain organic acids that are mainly comprised of naphthenic acids that contribute to corrosion of refinery equipment at elevated temperature.

15 The present invention discloses that when organic acids, such as naphthenic acids, found in crude oil or bitumen are treated with enzymes, in particular lipase enzyme, in combination with ammonia hydroxide or other amines, they can be converted into naphthenic acids derived amides that do not possess corrosive properties. The process is accomplished by dissolving the naphthenic acid containing
20 crude oil or bitumen in diluent (organic solvent). To the naphthenic acid solution were added ammonium hydroxide and/or other amines, such as ammonium carbamate or dodecylamine, and lipase enzyme resin. The mixture was then incubated at 40°C – 60 °C in a reactor with mixing. The resulting naphthenic acid derived amides found in
25 the diluted crude oil or bitumen can then be processed normally in a refinery using such processes as cracking or hydrotreating and converted to hydrocarbon, ammonia and carbon dioxide without causing damage to the refinery infrastructure.

In a preferred embodiment of the invention, a lipase enzyme that is capable of synthesizing amides from carboxylic acids is used. For example, the lipase B enzyme
30 from *Candida antarctica* is a thermostable enzyme that can complete this biochemical conversion at temperatures of 40-60°C.

Enzyme optimization studies using model naphthenic acid compounds and lipase B were performed to maximize the conversion of the acid substrates. Experiments were conducted by increasing the concentrations of the amine acceptor substrate (ammonium carbamate, hexylamine and dodecylamine) to maximize the conversion. The applicant has found that the optimal ratio of the amine acceptor substrate was between 1 to 1.1 and 1 to 1.4.

The lipase B enzyme was further tested at 60°C to determine if enhanced product conversion could be obtained at a temperature at which crude oil is held prior to being sent to an upgrader or refinery for processing. The results show that a dramatic improvement of conversion at 60°C compared to the conversion at 40°C.

The present invention may be demonstrated with reference to the following non-limiting examples.

General Conditions

Isolation of Naphthenic Acids from Crude Oil

The naphthenic acids from crude oil samples were obtained by absorbing the acids onto ion exchange resin. One or ten gram samples of the oils were taken and dissolved in either 4 mL or 40 mL of toluene. Each sample was done in duplicate and selected samples were repeated several times. To the diluted oil samples was added freshly prepared QAE SephadexTM A-25 acid ion exchange resin to a concentration of 200 mg of resin/gram of crude oil. The resin was first prepared by washing the resin with 20 mL 1M Na₂CO₃/NaHCO₃ followed by deionized water (3 x 5 mL) until the pH was approximately equal to 7, and finally with 5 mL of methanol. After adding the ion exchange resin to the diluted crude oil sample, it was gently stirred for 18 h.

The crude oil/resin mixture was then poured into a fritted glass filter and washed with three times with toluene (5-7 mL) and then 2:1 toluene/methanol (3 x 5 mL) to remove the unbound material. The naphthenic acid component was removed from the resin by adding 5 mL 1M formic acid and 10 mL 1:1 toluene/methanol. The

resin and acid solution was stirred and allowed to equilibrate for 1-2 h prior to elution. The above process was repeated one more time using 3 mL 1M formic acid and 10 mL 1:1 toluene/methanol. The resin is mixed and allowed let stand for 1 h. It is then filtered by vacuum and washed until clear with 2:1 toluene/methanol as before. The solvent was then removed from the combined formic acid extracts under vacuum to yield the naphthenic acid extract. The extracts were then weighed and characterized by ^1H and ^{13}C NMR, infrared (IR) spectroscopy and high temperature simulated distillation boiling point (BP) analysis as well as elemental (CHNOS) analysis.

10 NMR Analysis of Naphthenic Acid Samples

The samples for ^1H NMR spectroscopy were prepared by mixing approximately 20 mg of the sample with 700 μL of deuteriochloroform (CDCl_3). The NMR spectroscopic analyses were performed at room temperature ($20 \pm 1^\circ\text{C}$) on a Varian InovaTM 600 MHz NMR spectrometer, operating at 599.7 MHz for proton.

The proton spectra were collected with an acquisition time of 3.0 s, a sweep width of 20,000 Hz, a pulse flip angle of 30.6° (3.3 μs), and a 1 s recycle delay. These pulse recycle conditions permitted the collection of quantitative spectra for all protonated molecular species in the samples. The spectra, resulting used 0.3-Hz line broadening to improve the signal-to-noise ratio, were referenced to the residual chloroform resonance at 7.24 ppm.

25 Fourier Transform Infrared Spectroscopy

Fourier Transform Infrared (FTIR) samples were prepared by dissolving 50 mg quantities of acid-toluene or acid-white oil samples in 600 μL methylene chloride. Spectra were collected using a Thermo-NicoletTM FTIR spectrometer and a 0.1 mm KBr fixed cell. A total of 128 transients were collected.

30 Gas Chromatography Mass Spectrometry

Samples were analyzed on a Hewlett PackardTM 6890 gas chromatograph with a 5973 series mass selective detector and a 30-m HP Rb-5MS column. The initial GC

temperature program used for analysis was 45°C for 5 min followed by an increase of 8°C/min to 340°C with a final hold time of 5 minutes.

Experiments Using Lipase B-Acrylic Acid (Novozyme™ 435)

1. Trial incubations of lipase B-acrylic acid, phenylbutyric acid and amine acceptor substrates

Fifteen mg (91.4 µmol) of phenylbutyric acid was combined with 100 mg of *C. antarctica* lipase B –acrylic resin and amine substrates, ammonium hydroxide (6 µL, 108 µmol, dodecylamine (18.5 mg, 100 µmol) or cyclopentylamine (6 µL, 8.5 mg, 100.6 µmol) in 0.7 mL of toluene. The reaction was allowed to proceed with end-over-end mixing at room temperature for 4 h. After incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and the reaction mixture was carefully removed by pipette and then analyzed by GC-MS.

2. Trial incubations of lipase B-acrylic acid, ammonium hydroxide and carboxylic acid donor substrates

Fifteen mg of 4-phenylbutyric acid (91.4 µmol), 4-cyclohexylbutyric acid (88.1 µmol), trans-styrylacetic acid (92.5 µmol) or indan-2-carboxylic acid (92.5 µmol) were combined with 20 mg of lipase B –acrylic resin and amine substrate, ammonium hydroxide (10 µL, 180 µmol) in 0.7 mL of toluene or heptane. The reaction was allowed to proceed with end-over-end mixing at room temperature for 18 h. After incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and the reaction mixtures were carefully removed by pipette and then analyzed by GC-MS.

3. Time dependent incubation of 4-cyclohexylbutyric acid and ammonium hydroxide with lipase B-acrylic acid

Fifty-one mg (299.6 µmol) of 4-cyclohexylbutyric acid was combined with 100 mg of lipase B –acrylic resin (specific activity 10,000 U/g) and amine substrate, ammonium hydroxide (6 µL, 8.5 mg, 100.6 µmol) in 1 mL of toluene. The reaction was allowed to proceed with end-over-end mixing at 40°C for 1, 2, 4, 8 and 24 h. After

incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and the reaction mixtures were carefully removed by pipette and then analyzed by GC-MS.

5 **4. Concentration dependent incubation of 4-cyclohexylbutyric acid or 4-phenylbutyric acid and ammonium hydroxide with various amounts of lipase B-acrylic acid**

10 Fifty mg of either 4-cyclohexylbutyric acid (293.7 μmol) or 4-phenylbutyric acid (304.9 μmol) was combined with the amine substrate, ammonium hydroxide (6 μL , 8.5 mg, 100.6 μmol) in 1 mL of toluene. Various amounts (10, 50 or 100 mg) of lipase B –acrylic resin was added to the incubation mixtures and the reaction incubated with end-over-end mixing at 40°C for 18 h. After incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and the reaction mixtures were carefully removed by pipette and then analyzed by GC-MS.

15

5. **Trial incubation of *Athabasca* and *Asia* 3 naphthenic acids with lipase B and amine substrate**

20 The naphthenic acids isolated from *Athabasca* bitumen (50 mg) was dissolved in 1 mL of toluene. To the naphthenic acid solution was added ammonium hydroxide (6 μL , 8.5 mg, 100.6 μmol), ammonium carbamate (7.8 mg, 100 μmol) or dodecylamine (18.5 mg, 100 μmol) and 200 mg of lipase B- acrylic acid resin. After addition of the resin, the sample was then incubated overnight (approximately 18 hours) at 40°C with end-over-end mixing. Each sample was done in duplicate.

25

30 Freshly prepared QAE SephadexTM A-25 acid ion exchange resin (at a concentration of 200 mg of resin/gram) was added to the lipase-reacted samples. The ion exchange resin was first prepared by washing the resin with 20 mL 1M $\text{Na}_2\text{CO}_3/\text{NaHCO}_3$ followed by deionized water (3 x 5 mL) until the pH was approximately equal to 7, and finally with 5 mL of methanol. After adding the ion exchange resin to the diluted crude oil sample, it was gently stirred for 18 h.

The enzyme reaction mixture was then poured into a fritted glass filter and washed with three times with toluene (5-7 mL) and then 2:1 toluene/methanol (3 x

5 mL) to remove the unbound material. The material that was unbound to the resin was the lipase converted naphthenic acids. The naphthenic acid component was removed from the resin by adding 5 mL 1M formic acid and 10 mL 1:1 toluene/methanol. The resin and acid solution was stirred and allowed to equilibrate for 1-2 h prior to elution.

5 The above process was repeated one more time using 3 mL 1M formic acid and 10 mL 1:1 toluene/methanol. The resin is mixed and allowed let stand for 1 h. It is then filtered by vacuum and washed until clear with 2:1 toluene/methanol as before. The solvent was then removed from the samples under vacuum to yield the naphthenic acid extract and the enzyme converted product. The samples were then weighed and the
10 samples generated from the reaction with dodecylamine, characterized by ^1H NMR. D_2O exchange experiments were done on the same samples by adding a drop of D_2O to the NMR tube and re-recording the spectrum.

Another experiment was done using the Asia 3 crude oil naphthenic acid sample
15 was done as described above. Approximately 100 mg of Asia 3 naphthenic acids were dissolved in 4 mL of toluene. Separately, 37.2 mg dodecylamine was added to another 4 mL of toluene. One millilitre aliquots of the acid and dodecylamine were added to reaction vials, two of which contained approximately 200 mg of the lipase B -acrylic resin. The two other control vials did not receive any enzyme resin. An additional 1 mL
20 of toluene was added to each of the reaction vials to thoroughly mix the substrates and the enzyme resin, and then incubated overnight (approximately 18 hours) at 40°C with end-over-end mixing.

After reaction, the naphthenic acids were removed using ion exchange resin.
25 The unbound material which represents the lipase generated products. The samples were then weighed and characterized by ^1H NMR. D_2O exchange experiments were done on the same samples by adding a drop of D_2O to the NMR tube and re-recording the spectrum.

30

Lipase B Optimization Experiments

1. Concentration dependent incubation of 4-phenylbutyric acid and ammonium carbamate or dodecylamine with various amounts of lipase B-acrylic acid

Fifty mg (304.9 μmol) of 4-phenylbutyric acid was combined with the amine substrate, ammonium carbamate (amounts ranging from 64 to 384 μmol) or dodecylamine (amounts ranging from 108 to 755 μmol) in 3 mL of toluene. One hundred mg of lipase B –acrylic resin was added to the incubation mixtures and the reaction incubated with end-over-end mixing at 40°C for 18 h. All samples were run in duplicate. After incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and 200 μL of the reaction mixtures were carefully removed by pipette and then analyzed by GC-MS.

2. Incubations of lipase B-acrylic acid, ammonium carbamate, hexylamine or dodecylamine and carboxylic acid donor substrates using optimized conditions

Fifty mg of 4-phenylbutyric acid (304.9 μmol), 4-cyclohexylbutyric acid (293.7 μmol), trans-styrylacetic acid (308.3 μmol) or indan-2-carboxylic acid (308.3 μmol) were combined with 100 mg of lipase B –acrylic resin and amine substrates, ammonium carbamate (30 mg, 384 μmol), dodecylamine (80 mg, 432 μmol) or hexylamine (50 μL , 38 mg, 491 μmol) in 3 mL of toluene. The reaction was allowed to proceed with end-over-end mixing at 40°C for 18 h. All samples were run in duplicate. After incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and 200 μL of the reaction mixtures were carefully removed by pipette and then analyzed by GC-MS.

3. Effect of temperature on product formation on the incubation of 4-phenylbutyric acid and hexylamine with lipase B-acrylic acid

Fifty mg (304.9 μmol) of 4-phenylbutyric acid was combined with 100 mg of lipase B –acrylic resin and amine substrate, ammonium hydroxide (50 μL , 38 mg, 491 μmol) in 1 mL of toluene. The reaction was allowed to proceed with end-over-end

mixing at either 40 or 60°C for 0, 1, 3, 6 and 24 h. All samples were run in duplicate. After incubation, the immobilized enzyme was allowed to settle to the bottom of the vial, and 200 µL of the reaction mixtures were carefully removed by pipette and then analyzed by GC-MS.

5

Bioreactor Studies

1. Bioreactor design for use with lipase B

10 A 2-mL coarse filtered fritted glass funnel was placed in a 25-mL glass vial with a Teflon lined silicone septum. 1.2 mm ID Teflon tubing was run from the bottom of the glass vial through the septum and a peristaltic pump and back through the septum into the fritted glass funnel. The fritted glass funnel was charged with 100 mg the lipase B-acrylic resin. The reaction components including the amine and carboxylic
15 acid donor substrate or the naphthenic acid samples were dissolved (suspended in 10-mL of toluene and the liquid reaction mixture was placed in the glass vial that was fitted with a small stirring bar to ensure the reaction mixture was homogeneous throughout incubation. The reaction mixture was then circulated through the peristaltic pump and drip fed into the fritted glass funnel containing the lipase enzyme. The entire
20 apparatus was incubated at a temperature of either 40 or 60°C with the exception of the peristaltic pump and a minimal length of Teflon tubing.

2. Lipase B stability experiments

25 Using the bioreactor apparatus described above, the fritted glass funnel was charged with 100 mg of lipase B-acrylic acid resin. Fifty milligrams of 4-phenylbutyric acid and hexylamine (50-µL, 38 mg, 491 µmol) was dissolved in 10-mL of toluene in the glass vial. The assembled bioreactor was incubated at 40°C for 24 h. After incubation, the fritted glass funnel was allowed to drain and the reaction mixture was
30 removed. A fresh reaction mixture containing 50 mg of 4-phenylbutyric acid and 50-µL of hexylamine dissolved in toluene was placed in the glass vial, and the incubation restarted without changing the lipase B-acrylic acid resin in the fritted glass

funnel, and allowed to proceed for 24 h. This was repeated for 2 additional consecutive incubations, or 4 incubations in total. From each reaction mixtures, a 200- μ L sample was removed by pipette and then analysed by GC-MS.

5 **Results**

1. **Use of the lipase B enzyme in a bioprocess to reduce the corrosive properties of oil**

10 This lipase B enzyme could be used to reduce the corrosive properties of crude oil and bitumen by converting the naphthenic acids in crude oil into a non-corrosive species (naphthenic acid amides) as shown in Figure 1. The generated amides would then treated by conventional hydrotreating processes resulting in an improved product that is no longer corrosive.

15

To determine whether the lipase B enzyme could function in a bioupgrading process, the immobilized enzyme (onto acrylic acid) was tested for the ability to bio-convert the model naphthenic acid compounds into amide products in combination with ammonium hydroxide in toluene.

20

The results in Figures 2 and 3 demonstrate that the model naphthenic acid compounds can be converted into the desired amides as identified by gas chromatography-mass spectrometry (GC-MS) analysis. The results also indicate that the reaction proceeded cleanly with no side products being generated during the reaction. Similar assays were also performed using heptane as the solvent for the enzyme reaction with the same results.

25 The results in Figure 4 also demonstrate that the lipase B enzyme can convert the model naphthenic acid acyl donor substrates into product to the same extent confirming the broad substrate specificity for the enzyme. A complimentary set of experiments were done to assess the capability of the lipase B enzyme to transfer an acyl group from phenylbutyric acid to a panel of amine acceptor substrates including ammonium carbamate, ammonium hydroxide, cyclopentylamine and dodecylamine. All

30

four amines were substrates for the lipase B enzyme as shown in Figure 5 with a slight preference for the long chain alkyl amine, dodecylamine.

In Figure 6, the enzyme reaction was shown to proceed in a concentration dependent fashion when increased amounts of the immobilized lipase B enzyme were added to the reaction mixture containing either cyclohexyl- or phenylbutyric acid and ammonium hydroxide in toluene.

In Figure 7, the amount of product formed also increased in a time dependent manner in incubations with cyclohexylbutyric acid and ammonium hydroxide at 40°C.

The enzyme results with the model naphthenic acid compounds are good predictors for the lipase B converting actual naphthenic acids found in crude oil. A series of experiments were done using the naphthenic acids isolated from *Athabasca* and Asia 3 crude oil samples. The *Athabasca* naphthenic acid isolate were dissolved in toluene and incubated with lipase B using ammonium hydroxide, ammonium carbamate and/or dodecylamine as the substrate. After the incubation, the resulting naphthenic acid amide could be readily separated from the unreacted naphthenic acid starting material by adsorbing the acid onto ion exchange resin. When using the *Athabasca* naphthenic acids as the donor substrate, 10, 15 and 13 % of the starting material was converted into the product amide when using ammonium hydroxide, dodecylamine and ammonium carbamate as the donor amine substrate. A preliminary characterization of the product generated from the reaction of the *Athabasca* naphthenic acids with dodecylamine was done using ¹H NMR. The results in Figure 8 show a significant change in the amide product (bottom spectra) when compared to the naphthenic acid starting material (top spectra). The broad signal centred around 10.8 ppm, which is characteristic of carboxylic acids, is completely absent in the product spectra. This signal is replaced in the anticipated amide product with a new set of signals at 5.4 ppm. The characteristic chemical shifts for amide protons are between 4 and 9 ppm.

A complimentary set of experiments was done using the naphthenic acids isolated from Asia 3 crude oil, dodecylamine and lipase B. After reaction with lipase, the product was isolated from the naphthenic acid starting material as before, weighed and then subjected to ^1H NMR analysis. The results indicated approximately a 50 % conversion of Asia 3 naphthenic acids into product. The NMR spectra in Figure 9 again show a difference of the enzyme product (lower spectra) when compared with the starting material.

The combined results of the naphthenic acids isolated from *Athabasca* and Asia 3 crude oil suggest that the lipase B enzyme can convert naphthenic acids into naphthenic acid amides. The spectra in Figures 8 and 9 show the presence of additional peaks in the regions of 4 to 9. These peaks are suggestive of materials that originate from acrylic acid polymer support that is used to immobilize the lipase B enzyme.

Enzyme optimization studies were performed to maximize to conversion of the acid substrate into product. These experiments were done by increasing the concentrations of the amine acceptor substrate (ammonium carbamate and dodecylamine) to maximize the conversion of the donor substrate, phenylbutyric acid.

The results in Figures 10 and 11 demonstrate that the optimal ratio of the acceptor substrate dodecylamine and ammonium carbamate was 1 to 1.4 and 1 to 1.3 respectively. Using these ratios of substrates, more than half of the starting material was converted into product. These optimized conditions were then used to determine if enhanced conversion of a panel of acid donor substrates into product amines could be achieved.

Figure 12 shows the results of the experiments where an additional amine substrate, hexylamine, was also added to the studies. As expected, this amine was a substrate for the lipase enzyme. The results show a significant increase in amide formation. Generally a 5 to 11-fold increase in substrate conversion was achieved when compared to the preliminary results shown in Figure 4.

As mentioned previously, *C. antarctica* lipase B has the ability to function at a wide variety of elevated temperatures. The lipase enzyme was tested at 60°C to determine if enhanced product conversion could be obtained at a temperature at which crude oil is held prior to being sent to an upgrader or refinery for processing. The results in Figure 13 show that a dramatic improvement was observed in the conversion of hexylamine and phenylbutyric acid into product at 60°C when compared to the conversion at 40°C. After 6 h of reaction, 63% of the substrates were converted into product at 60°C as compared to only 27% at 40°C. After 24 h of incubation, 99% of the substrates were converted to product at 60°C compared to 64% at 40°C.

At this point, it was determined that characterization had proceeded sufficiently far to warrant an experimental setup which would more closely mimic a possible final application, and also provide better mixing of the reaction solution with the inert Lipase B-acrylic resin beads. The new miniature bioreactor apparatus would need to be rapidly assembled and dismantled, and easily scalable from small volumes (5-10 mL) to much larger volumes in the future, without changing the basic design. To this end, an apparatus was constructed to mimic a batch feed fixed bed reactor system, appropriately scaled to the volumes which were currently in use. A 2 mL fritted glass Buchner funnel with a coarse filter was used to support the Lipase and placed in a 25 mL glass vial with a Teflon and silicone septum. 1.2 mm ID Teflon tubing was used in conjunction with a peristaltic pump to drip the reaction solution from the glass vial to the Lipase in the fritted glass funnel, thus ensuring adequate exposure of the reaction mixture to the immobilized Lipase B-acrylic acid resin.

Following the design and assembly of the bioreactor, the stability of the enzyme over time in the bioreactor was determined. Literature reports indicated that Lipase B was stable over time across multiple runs in other industrial applications. This experiment was performed to confirm the stability across several runs in the presence of organic acids in an organic system. Further, this would confirm the feasibility of the bioreactor design for use in a bioupgrading process for converting naphthenic acids. The reactor was charged with Lipase at the outset, and a freshly prepared reaction mixture of hexylamine and PBA was used in 4 successive 24 h incubations. GC-MS

analysis (Figure 14) showed product formation was consistent with the performance observed in the previous apparatus, and the enzyme remained stable and productive over 4 consecutive 24 h runs.

Claims:

1. A process for decreasing the acidity of an acidic crude oil, comprising:

5 a. contacting an acidic crude oil with at least one nitrogen containing compound, and

b. incubating the mixture obtained from step (a) in the presence of lipase enzyme;

10 under conditions of suitable temperature and pressure sufficient to form the corresponding amides.

2. The process according to claim 1 wherein at least one nitrogen containing compound is selected from the group comprising ammonia, ammonia
15 hydroxide, amines and the salts thereof.

3. The process according to claim 1, wherein the acidic crude oil is organic acid containing crude oil.

20 4. The process according to claim 3, wherein the acidic crude oil is naphthenic acid containing crude oil

5. The process according to any of claims 1 to 4, wherein an organic solvent or diluent is present.

25 6. The process according to any of claims 1 to 5, wherein the lipase enzyme is an enzyme that biosynthesizes amides.

7. The process according to claim 6, wherein the lipase enzyme is lipase B.

30 8. The process according to any of claims 1 to 7, wherein the temperature is between 20 and 80 °C.

9. The process according to claim 8, wherein the temperature is between 40 and 60 °C.

5 10. The process according to any of claims 1 to 9, wherein the pressure is at room pressure.

11. The process according to any of claims 2 to 10, wherein the amines are long chain alkyl amine.

10

12. The process according to claim 11, wherein the amines are selected from a group comprising ammonium carbamate, dodecylamine, cyclopentylamine and hexylamine.

15 13. The process according to any of claims 1 to 12, wherein the ratio of amine to the naphthenic acid presented in the acidic crude oil is 1 to 2.

14. The process according to claim 13, wherein the ratio of amine to the naphthenic acid presented in the acidic crude oil is between 1 to 1.1 and 1 to 1.4.

20

15. The process according to any of claims 1 to 14, wherein the organic solvent or diluent has a boiling point below 100 °C.

25 16. The process according to claim 15, wherein the organic solvent or diluent is hydrophobic.

17. The process according to claim 16, wherein the organic solvent or diluent is selected from the group comprising of toluene, hexane, and heptane.

30 18. The process according to any of claims 1 to 17, wherein the mixture from step (a) and (b) was incubated for 1 to 5 days.

19. The process according to claim 18, wherein the mixture was incubated for 24 hours.

20. The process according to any of claims 3 to 19, wherein the ammonia
5 hydroxide is present in at least one to one molar ratio to naphthenic acid.

21. The process according to any of claims 1 to 20, wherein the lipase enzyme is in solution.

10 22. The process according to any of claims 1 to 20, wherein the lipase enzyme is in insoluble form mobilized onto an inert support.

AMENDED CLAIMS
received by the International Bureau on
12 February 2010 (12.02.2010)

Claims:

1. A process for decreasing the acidity of an acidic crude oil, comprising:
 - a. contacting an acidic crude oil with at least one nitrogen containing compound, and
 - b. incubating the mixture obtained from step (a) in the presence of lipase enzyme;under conditions of suitable temperature and pressure sufficient to form the corresponding amides.
2. The process according to claim 1 wherein the at least one nitrogen containing compound is selected from the group comprising ammonia, ammonia hydroxide, amines and the salts thereof.
3. The process according to claim 1, wherein the acidic crude oil is organic acid containing crude oil.
4. The process according to claim 3, wherein the acidic crude oil is naphthenic acid containing crude oil.
5. The process according to any one of claims 1 to 4, wherein an organic solvent or diluent is present.
6. The process according to any one of claims 1 to 5, wherein the lipase enzyme is an enzyme that biosynthesizes amides.
7. The process according to claim 6, wherein the lipase enzyme is lipase B.

8. The process according to any one of claims 1 to 7, wherein the temperature is between 20 and 80 °C.
9. The process according to claim 8, wherein the temperature is between 40 and 60 °C.
10. The process according to any one of claims 1 to 9, wherein the pressure is at room pressure.
11. The process according to any one of claims 2 to 10, wherein the amines are long chain alkyl amine.
12. The process according to claim 11, wherein the amines are selected from a group comprising ammonium carbamate, dodecylamine, cyclopentylamine and hexylamine.
13. The process according to any one of claims 1 to 12, wherein the ratio of amine to naphthenic acid presented in the acidic crude oil is 1 to 2.
14. The process according to claim 13, wherein the ratio of amine to naphthenic acid presented in the acidic crude oil is between 1 to 1.1 and 1 to 1.4.
15. The process according to any one of claims 5 to 14, wherein the organic solvent or diluent has a boiling point below 100 °C.
16. The process according to claim 15, wherein the organic solvent or diluent is hydrophobic.
17. The process according to claim 16, wherein the organic solvent or diluent is selected from the group comprising of toluene, hexane, and heptane.

18. The process according to any one of claims 1 to 17, wherein the mixture from step (a) and (b) was incubated for 1 to 5 days.

19. The process according to claim 18, wherein the mixture was incubated for 24 hours.

20. The process according to any of claims 3 to 19, wherein ammonia hydroxide is present in at least one to one molar ratio to naphthenic acid.

21. The process according to any of claims 1 to 20, wherein the lipase enzyme is in solution.

22. The process according to any of claims 1 to 20, wherein the lipase enzyme is in insoluble form mobilized onto an inert support.

AMENDMENT AND STATEMENT UNDER ARTICLE 19

Pursuant to Article 19 of the PCT, in response to the International Search Report and Written Opinion mailed on December 18, 2009, Applicant submits herewith the following amendment.

In the Claims

Please replace pages 19 to 21 containing Claims 1 to 22 presently on file with new pages 19 to 21 containing amended Claims 1 to 22, submitted herewith.


REMARKS

The Applicant has amended claims 13-15 and 20 to comply with Article 6 of the PCT by the addition of a proper antecedent. The

Applicant has amended claims 2, 4, 5-6, 8, 10-11 and 18 to effect minor editorial changes. Claims 1, 3, 7, 9, 12, 16-17, 19, and 21-22, submitted herein, are unchanged.

We confirm that no new subject matter has been added to the application by the amendments submitted herewith. Support for the new claims can be found throughout the specification of the application as originally filed.

Respectfully submitted,



SHAPIRO COHEN

P.O. Box 13002

Kanata, ON K2K 0E2

CANADA

Telephone: (613) 232-5300

1/13

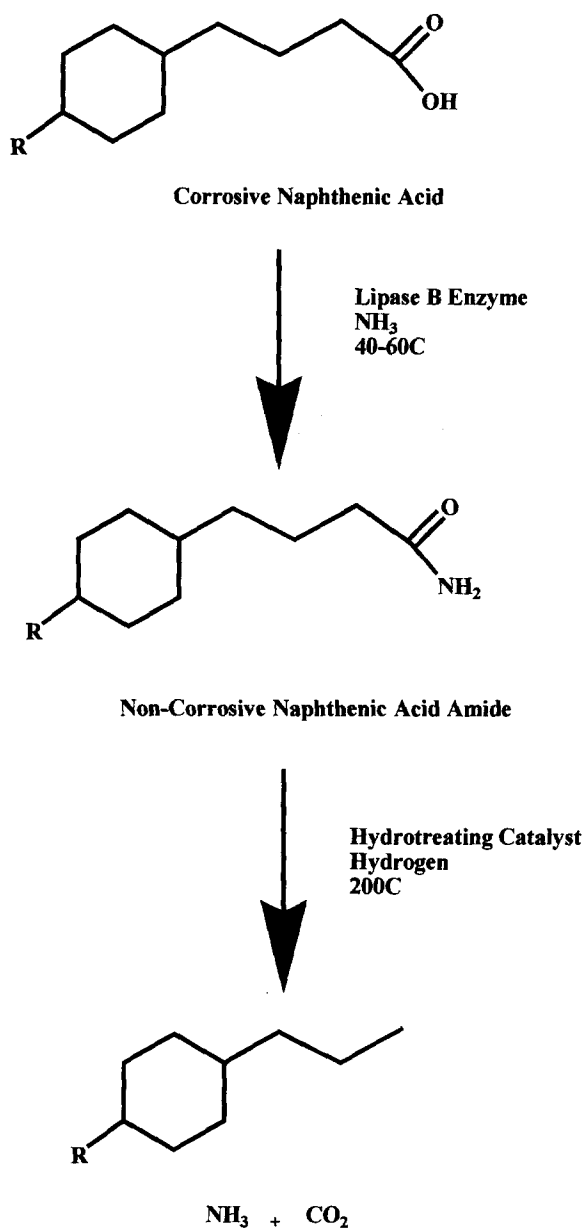


Figure 1

2/13

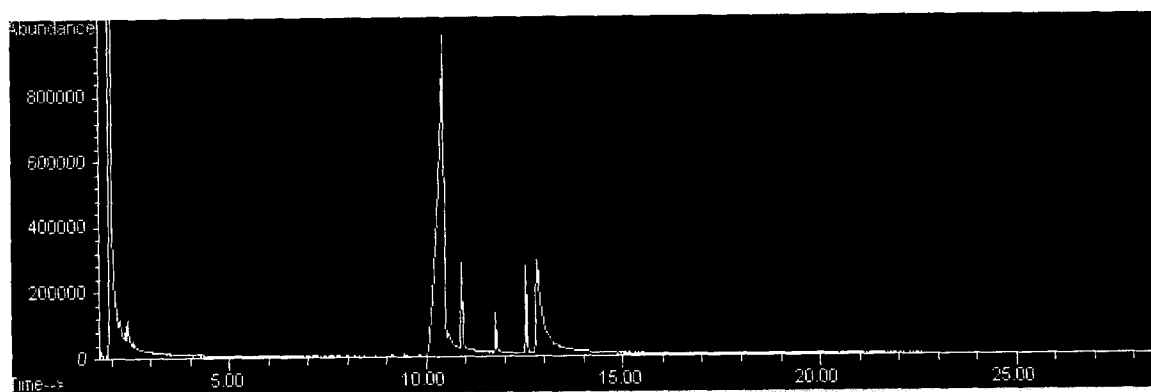


Figure 2

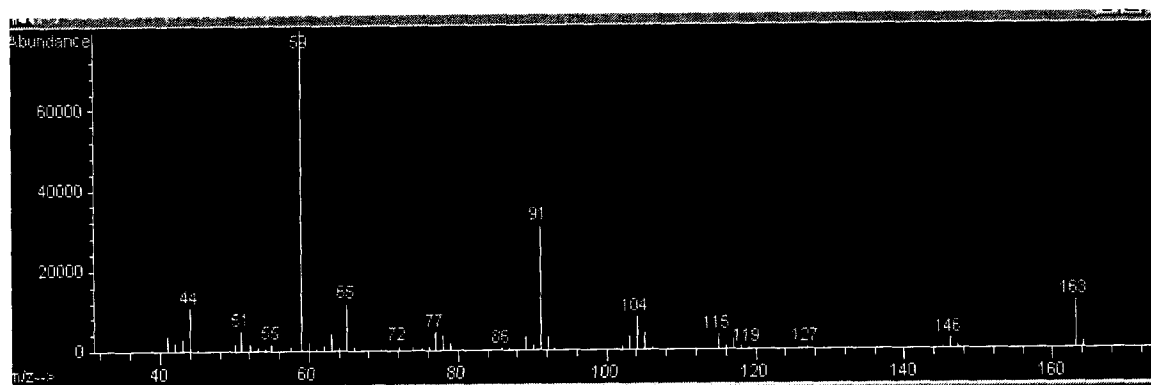


Figure 3

3/13

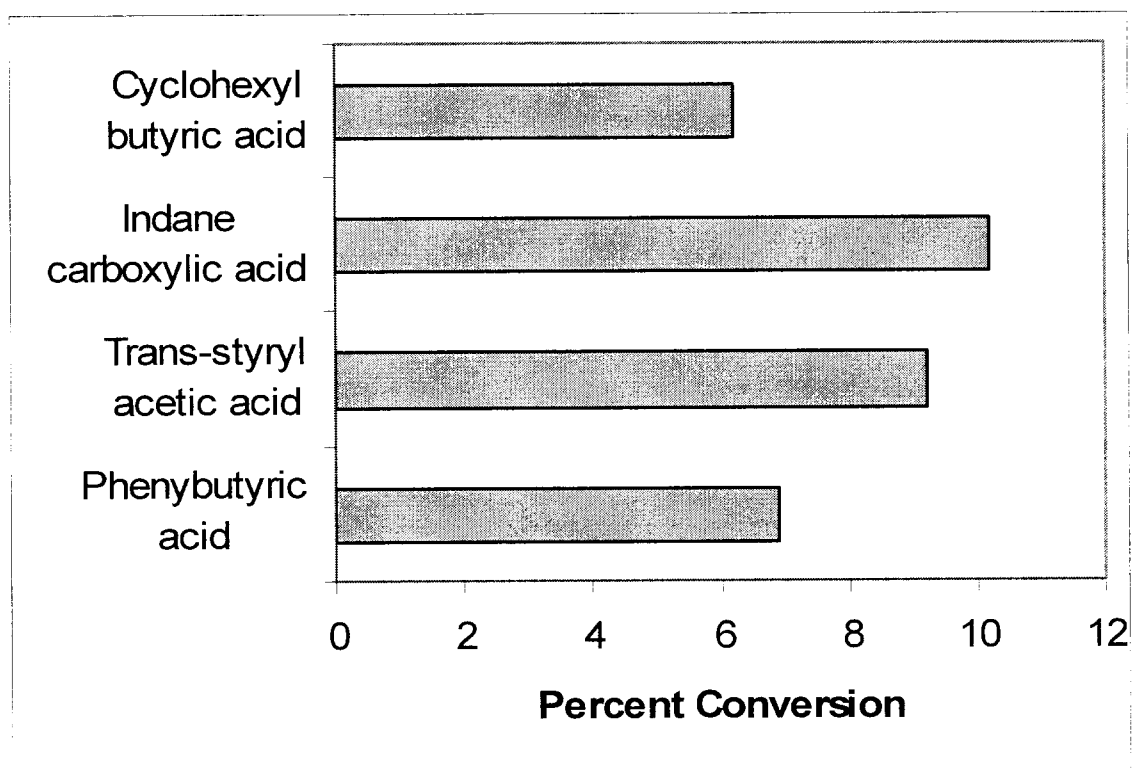


Figure 4

4/13

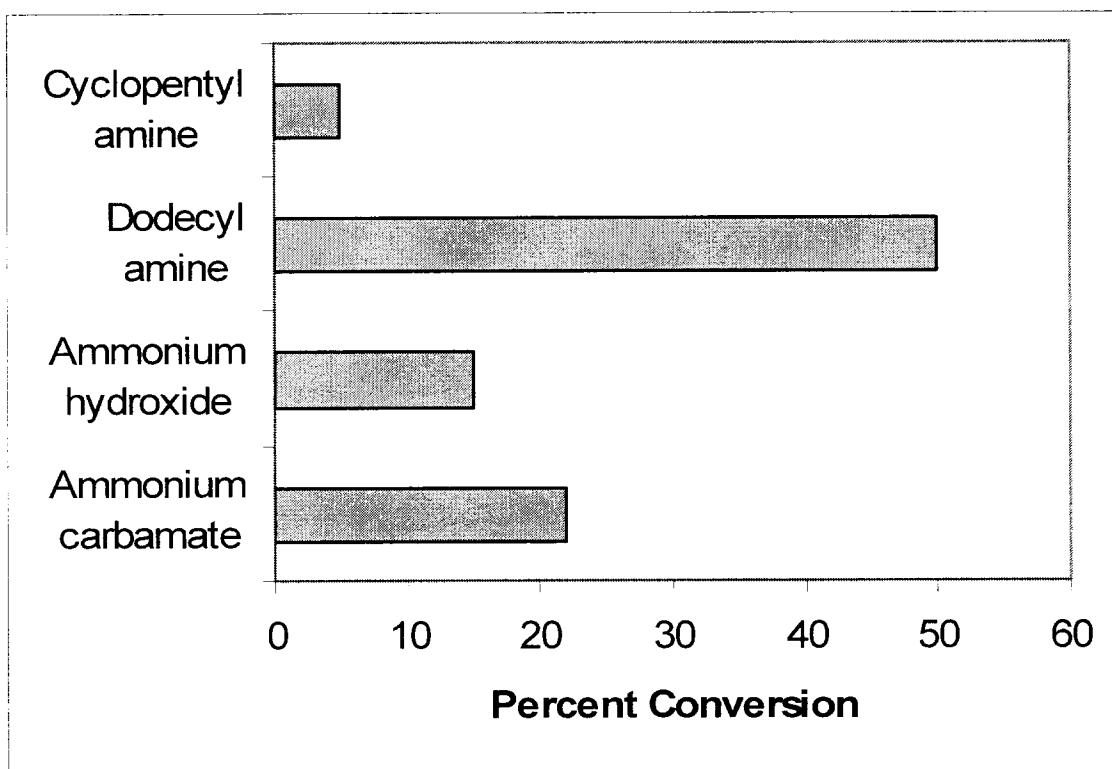


Figure 5

5/13

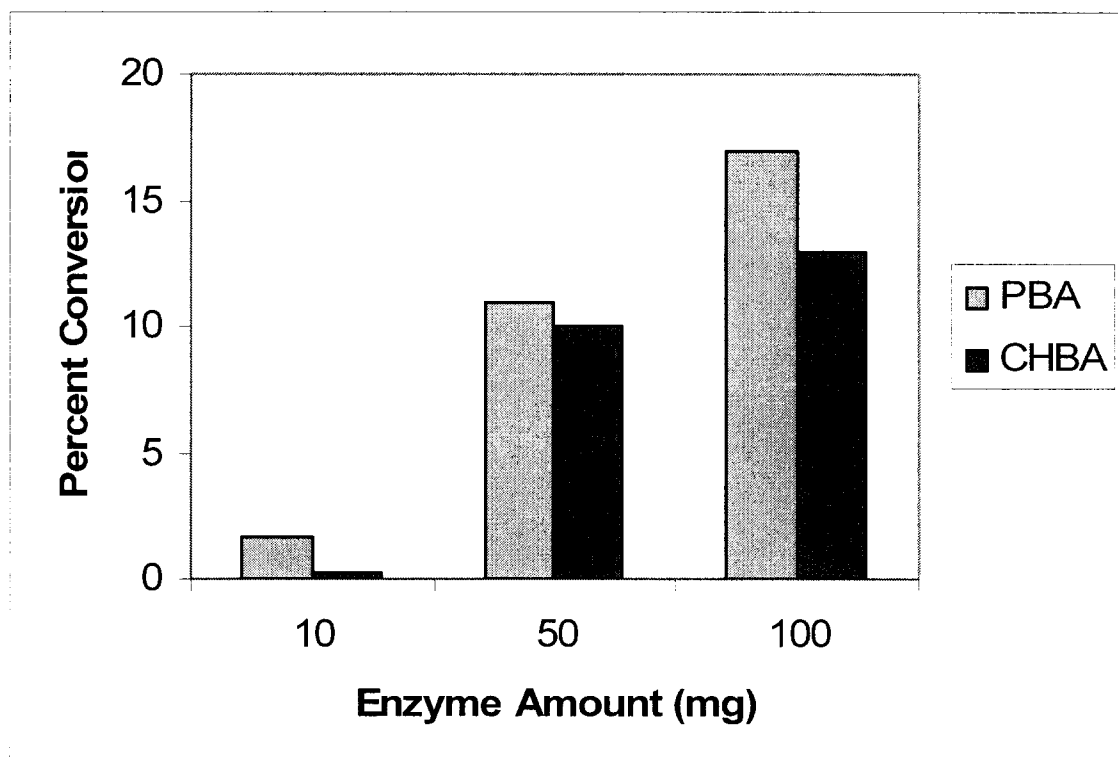


Figure 6

6/13

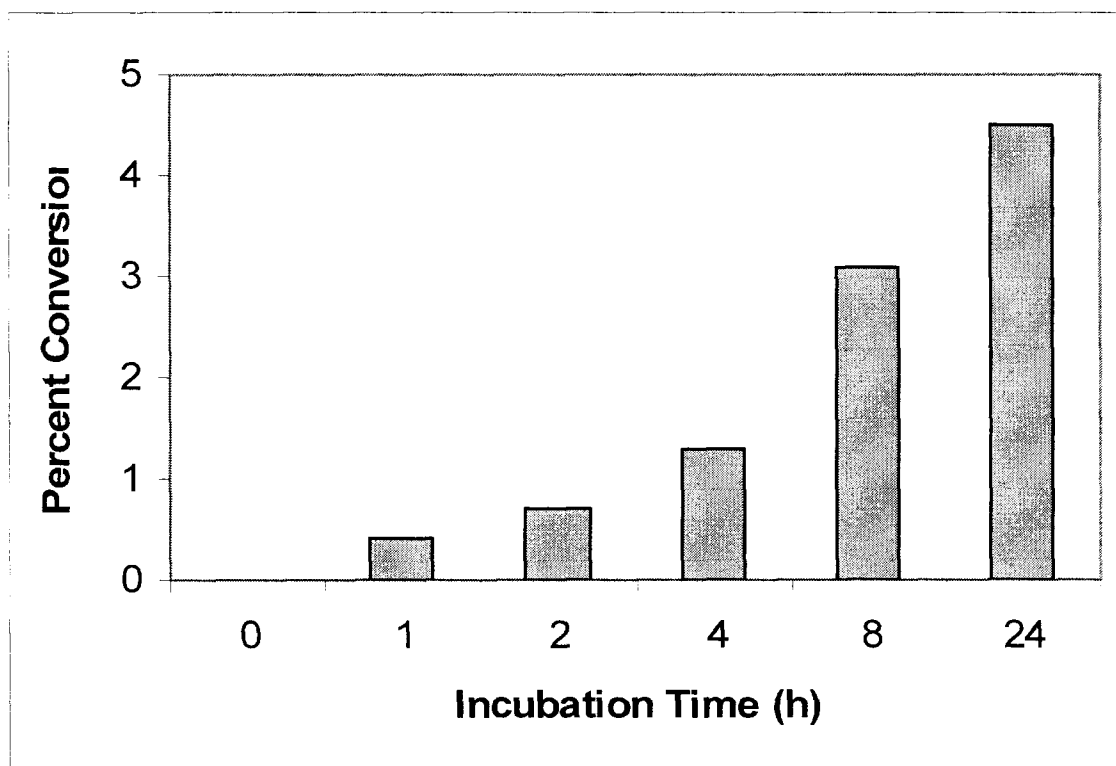


Figure 7

7/13

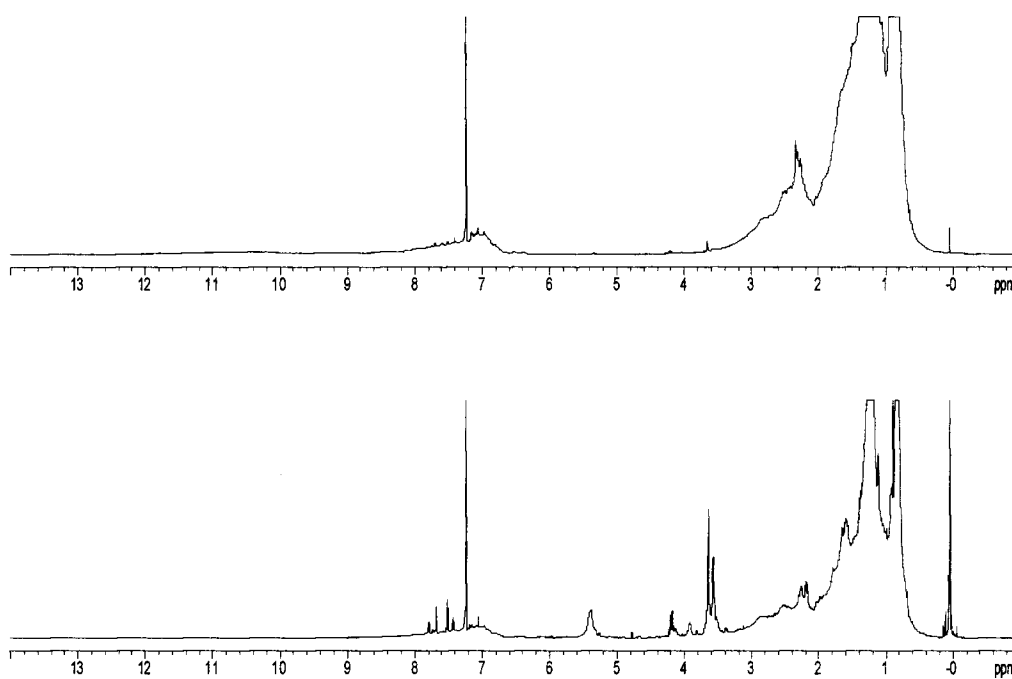


Figure 8

8/13

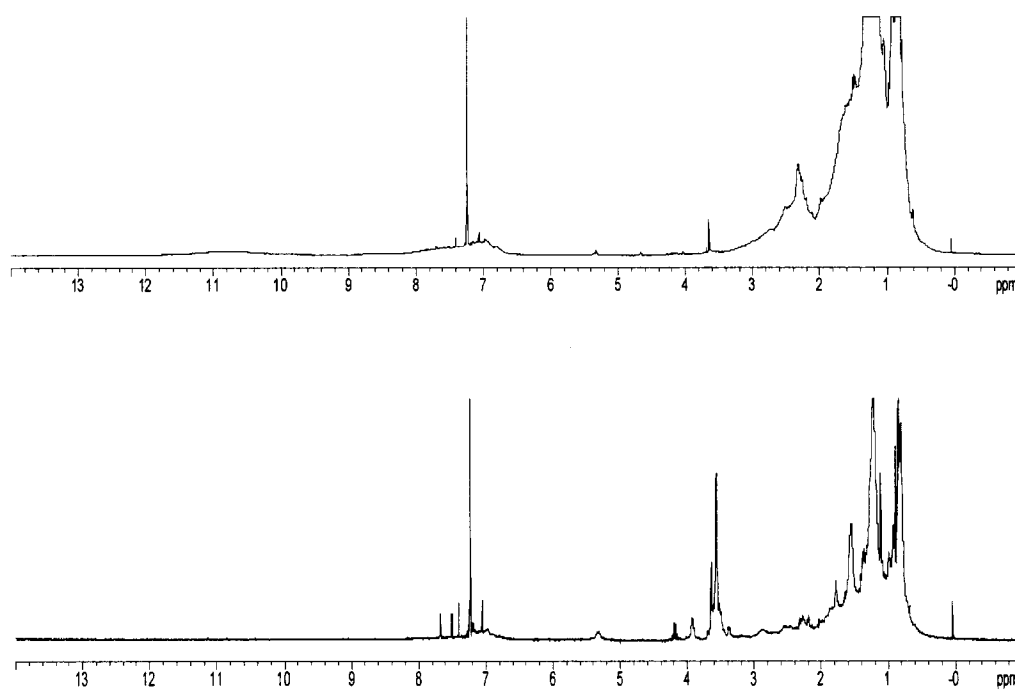


Figure 9

9/13

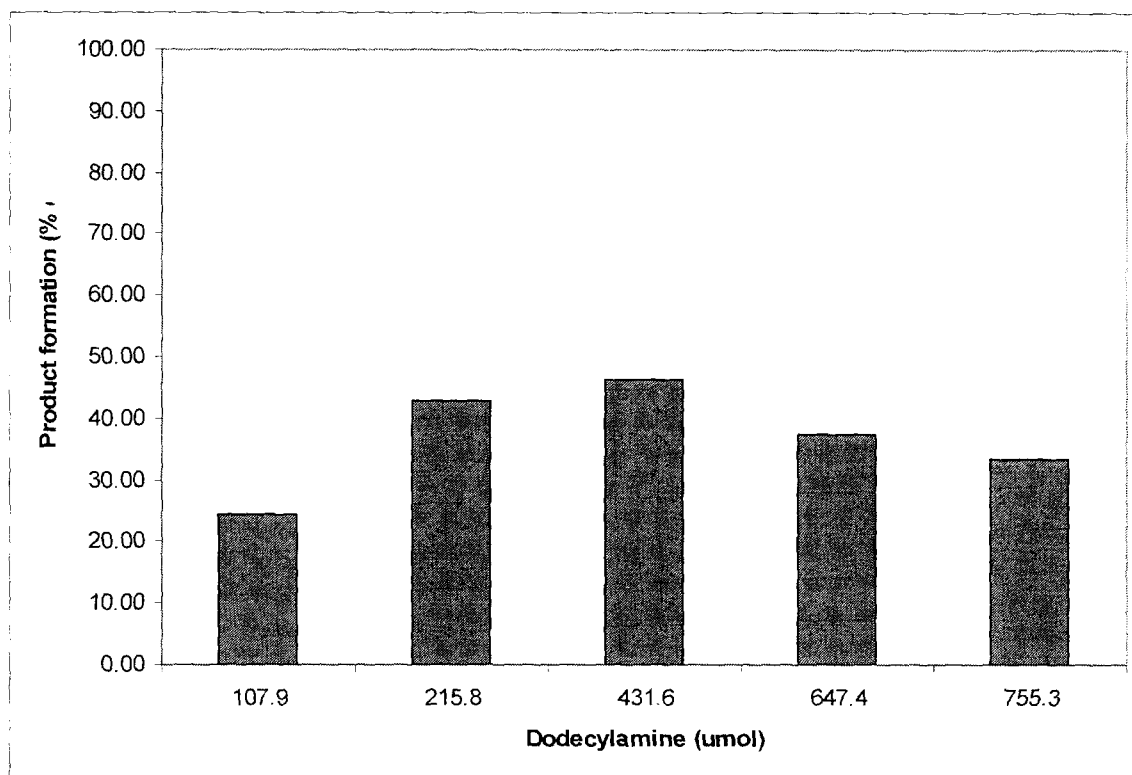


Figure 10

10/13

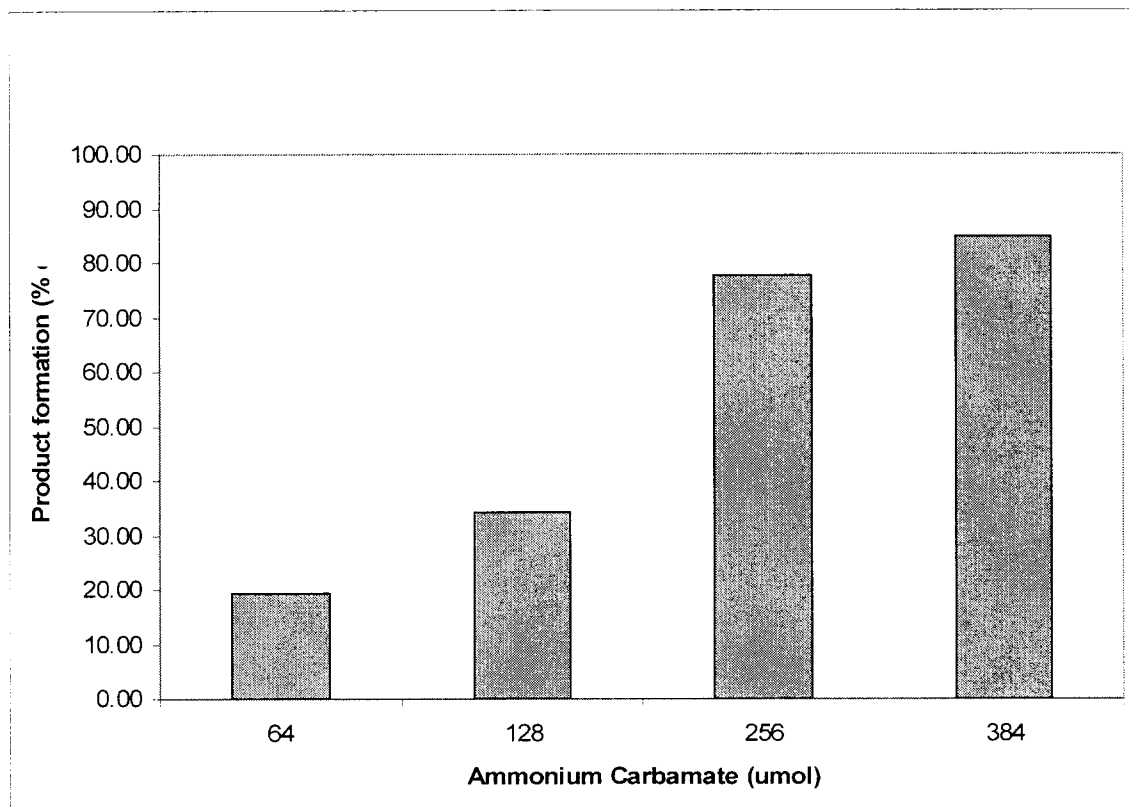


Figure 11

11/13

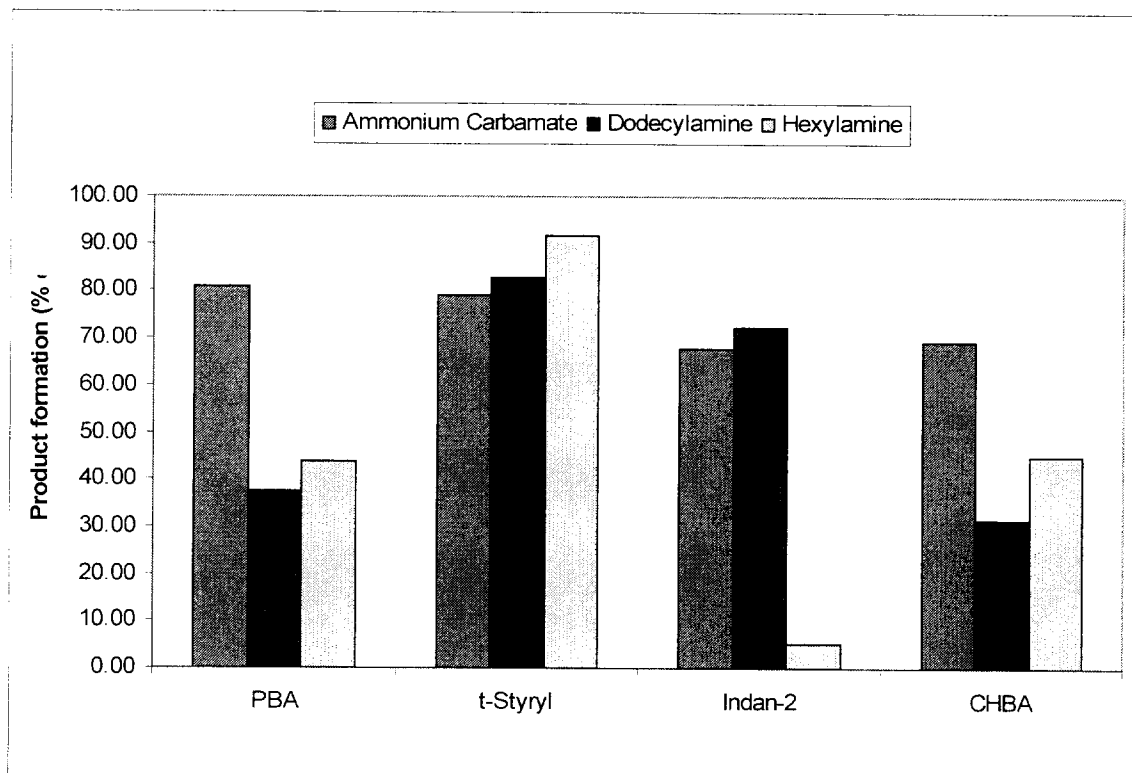


Figure 12

12/13

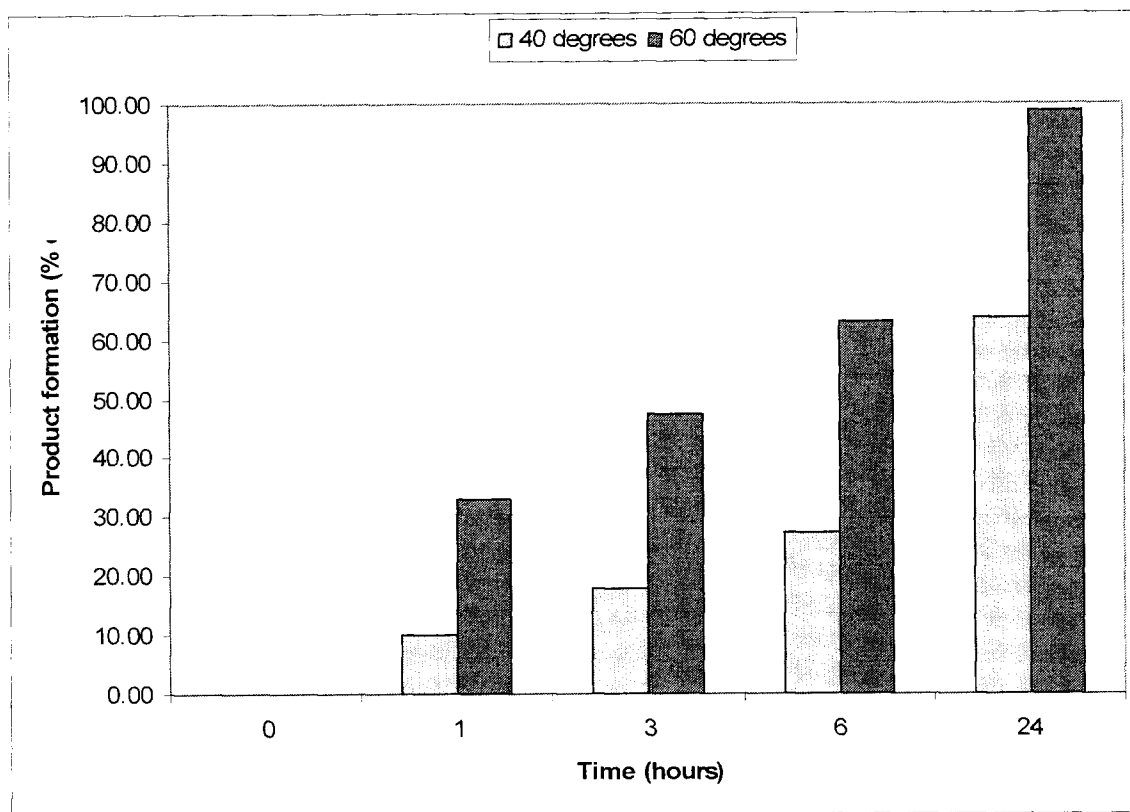


Figure 13

13/13

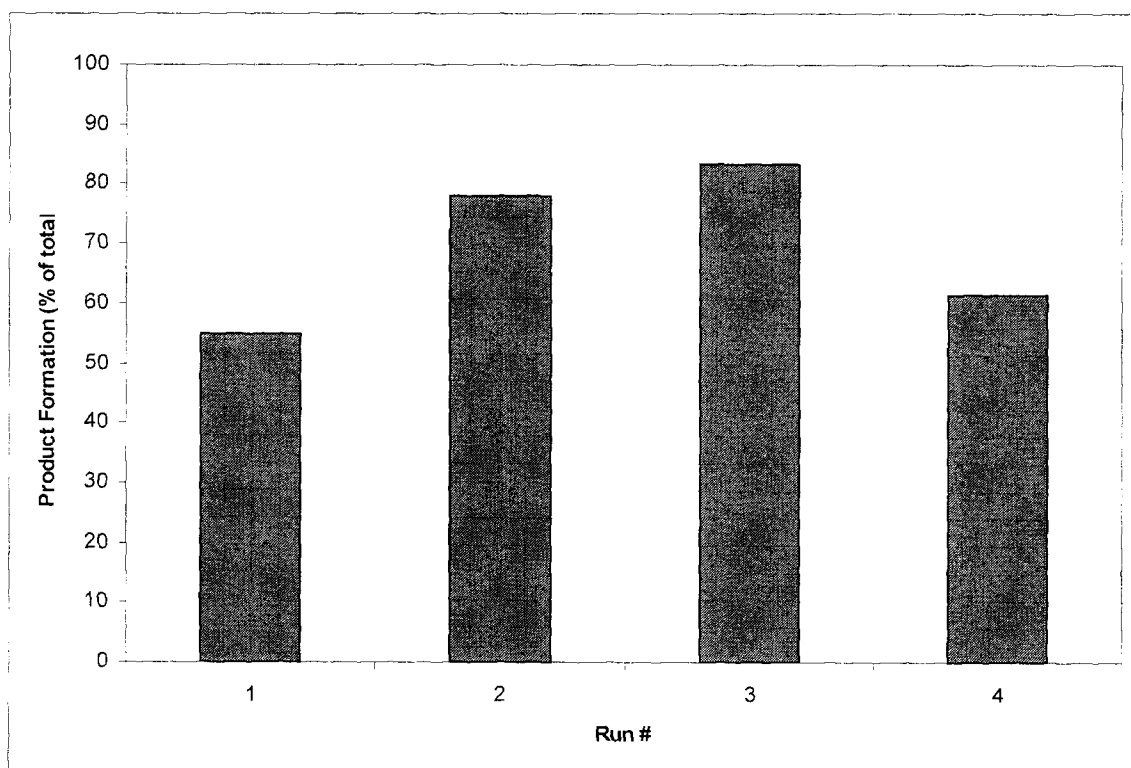


Figure 14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2009/000487

A. CLASSIFICATION OF SUBJECT MATTER IPC: C10G 75/00 (2006.01) , C10G 31/00 (2006.01) According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C10G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used) Canadian Patents Database, Delphion, SCOPUS, (Keywords: lipase, nitrogen, ammonia, ammonia hydroxide, amines, acidic crude, naphthenic acid, corrosion)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95/07359 (DE ZOETE et al.) 16 March 1995 (16-03-1995) Whole document.	1-22
A	US 6258258 (Sartori et al.) 10 July 2001 (10-07-2001) Whole document.	1-22
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents :	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search	Date of mailing of the international search report	
18 November 2009 (18-11-2009)	18 December 2009 (18-12-2009)	
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 001-819-953-2476	Authorized officer Chi Wing Hung 819-994-7614	

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2009/000487

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
WO9507359A1	16-03-1995	AU7696494A NL9301574A	27-03-1995 03-04-1995
US6258258B1	10-07-2001	AU748645B2 AU6508999A CA2345271A1 EP1128903A1 ID28651A JP2003535151T NO20011716A NO20011716D0 WO0020113A1	06-06-2002 26-04-2000 13-04-2000 05-09-2001 21-06-2001 25-11-2003 23-05-2001 05-04-2001 13-04-2000