

**(12) STANDARD PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. **AU 2006254342 B2**

- (54) Title  
**Machine for the production of sheet elements from composite material**
- (51) International Patent Classification(s)  
**B32B 37/10** (2006.01)      **B30B 5/02** (2006.01)
- (21) Application No: **2006254342**      (22) Date of Filing: **2006.06.01**
- (87) WIPO No: **WO06/128699**
- (30) Priority Data
- (31) Number      (32) Date      (33) Country  
**0950/05**      **2005.06.03**      **CH**
- (43) Publication Date: **2006.12.07**  
(44) Accepted Journal Date: **2011.03.03**
- (71) Applicant(s)  
**3S Swiss Solar Systems AG**
- (72) Inventor(s)  
**Boos, Christoph;Zahnd, Jurg**
- (74) Agent / Attorney  
**FB Rice & Co, Level 23 44 Market Street, Sydney, NSW, 2000**
- (56) Related Art  
**DE 3017273 A1**  
**EP 0066556 A2**  
**US 6367530 B1**

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
7. Dezember 2006 (07.12.2006)

PCT

(10) Internationale Veröffentlichungsnummer  
**WO 2006/128699 A3**

(51) Internationale Patentklassifikation:  
*B32B 37/10* (2006.01) *B30B 5/02* (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2006/005221

(22) Internationales Anmeldedatum:  
1. Juni 2006 (01.06.2006)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
0950/05 3. Juni 2005 (03.06.2005) CH

(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme  
von US): **3S SWISS SOLAR SYSTEMS AG** [CH/CH];  
Schachenweg 24, CH-3250 Lyss (CH).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US): **ZAHND, Jürg**  
[CH/CH]; Schulweg 15, CH-3427 Utzenstorf (CH).  
**BOOS, Christoph** [CH/CH]; Blumensteinstr. 8, CH-3012  
Bern (CH).


(74) Anwalt: **LINDMAYR, BAUER, SECKLEHNER**;  
Rechtsanwalts-OEG, Rosenauerweg 16, A-4580 Windis-  
chgarsten (AT).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für  
jede verfügbare nationale Schutzrechtsart): AE, AG, AL,  
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES,  
FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,  
LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI,  
NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,

[Fortsetzung auf der nächsten Seite]

(54) Title: MACHINE FOR THE PRODUCTION OF SHEET ELEMENTS FROM COMPOSITE MATERIAL

(54) Bezeichnung: MASCHINE ZUR HERSTELLUNG VON PLATTENFÖRMIGEN ELEMENTEN AUS VERBUNDMATE-  
RIAL

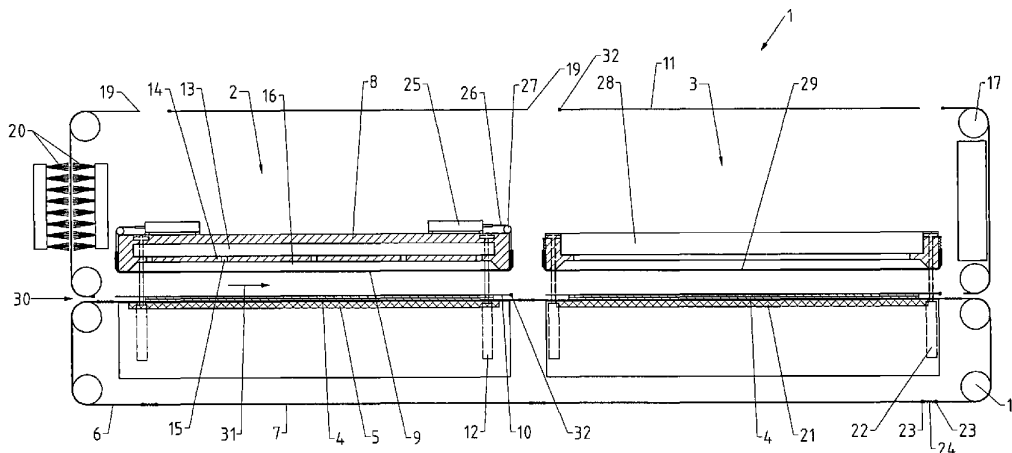

WO 2006/128699 A3

(57) Abstract: The machine (1) comprises a heating plate (5), conveyor means (6) for transporting the elements (4) along a transport path leading over the heating plate (5), an upper piece (8) which may be displaced perpendicular to the heating plate (5), a membrane (9) arranged on the upper piece (8) and a separation film (10) arranged between the membrane (9) and the heating plate (5) which may be displaced synchronously with the conveyor means. The separating film (10) is divided into sections (11) and each section (11) is exclusively retained on a single edge arranged perpendicular to the transport direction by retainer means (32). The sections (11) hence lie loose and tension-free on the elements (4). The membrane (9) lies on a circulating boundary surface (46) of the upper piece (8) facing the heating plate (5) and may be brought directly onto the plane of the surface of the heating plate (5) in order to form a sealed chamber therewith. The membrane (9) is connected with tensioning means (25, 26, 27).

(57) Zusammenfassung: Die Maschine (1) weist eine Heizplatte (5), Fördermittel (6) zum Transportieren der Elemente (4) längs eines über die Heizplatte (5) führenden Förderwegs, einen senkrecht zur Heizplatte (5) bewegbaren Oberteil (8), eine am Oberteil (8) angeordnete Membrane (9) und einer zwischen der Membrane (9) und der Heizplatte (5) angeordneten, synchron mit den Fördermitteln bewegbaren Trennfolie (10) auf. Die Trennfolie (10) ist in Abschnitte

[Fortsetzung auf der nächsten Seite]



SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(84) Bestimmungsstaaten** (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Veröffentlicht:**

— mit internationalem Recherchenbericht

**(88) Veröffentlichungsdatum des internationalen**

**Recherchenberichts:**

19. April 2007

*Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.*

---

(11) unterteilt und jeder Abschnitt (11) ist ausschliesslich an einem einzigen, quer zum Förderweg orientierten Rand durch Haltemittel (32) gehalten. Die Abschnitte (11) liegen somit lose und spannungsfrei auf den Elementen (4) auf. Die Membrane (9) liegt an einer umlaufenden, der Heizplatte (5) zugewandten Randfläche (46) des Oberteils (8) an und ist direkt auf die Ebene der Oberfläche der Heizplatte (5) bringbar, um mit dieser eine abgeschlossene Kammer zu bilden. Schliesslich ist die Membrane (9) mit Spannmitteln (25, 26, 27) verbunden.

Machine for the production of sheet elements from composite material

The invention relates to a machine for producing board-shaped elements of composite material, with a heated plate, conveyor means for transporting the elements along a conveyor path running above the heated plate, a top part which can be moved vertically with respect to the heated plate, a membrane disposed on the top part and a separating film disposed between the membrane and the heated plate which can be moved synchronously with the conveyor means.

When producing board-shaped elements made from composite material, for example photovoltaic elements, several layers, including glass amongst others, are assembled under the effect of pressure and heat. The machines needed for this process generally have a heatable laminating station, a cooling station and conveying means for intermittently conveying the elements. The laminating station has a heated plate and a top part which can be lowered onto the heated plate, and a membrane is provided which forms a closed chamber in conjunction with the heated plate in the lowered state. By evacuating this chamber, gas can be removed from around the elements and the membrane is applied to the heated plate due to the pressure acting on the side of the membrane facing away from the chamber so that the elements are pressed together.

In terms of conveying means for the elements, known means comprise a conveyor belt, which simultaneously protects the heated plate against dirt, for example adhesive spilling out of the elements. In order to protect the vacuum membrane as well, a known approach is to provide a separating film for the elements, covering their top surface. Both the conveyor belt and the separating film may be used in the form of endless webs. The disadvantage of this is that control mechanisms have to be provided in order to ensure that the webs do not run sideways off the rollers conveying and turning the webs. Instead of using endless webs, a known way of avoiding this problem is to use sections which are conveyed by means of traction elements, for example chains, disposed to the side of the displacement path. This being the case, the sections are inter-connected by spring elements to form an endless loop. Due to the spring elements, the sections are subjected to tensile stress in the conveying direction, which causes the sections of separating film lying on top to lift off the elements as soon as the pressing force is removed. Any adhesive which leaks out between the separat-

ing film and the elements exerts a force directed upwards towards the elements, which is particularly problematic in the laminating station because the adhesive between the layers of elements has not yet set at this stage.

In the case of many known machines, the membrane is clamped in a frame, which is in turn sealed with respect to the heated plate and its edge by means of a peripherally extending seal when the press is closed. Apart from the extra work needed to produce the frame and the seal, the disadvantage of this approach is the fact that the membrane is subjected to high tensile forces in the region of the frame during the pressing operation. Tearing of the membrane during the pressing operation can cause damage to the elements to be laminated. During operation, the membrane is exposed to high temperature fluctuations, as a result of which it expands and contracts again with every work cycle. If the membrane is retained in the frame too loosely, there is a tendency for creases to form and it has to be tautened again. The job of subsequent tautening takes time because the frame has to be dismantled and then screwed back down again after tautening.

Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present invention as it existed before the priority date of each claim of this application.

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

According to one aspect of the invention there is provided a machine for producing board-shaped elements of composite material, with a heated plate, conveyor means for conveying the elements along a conveyor path leading across the heated plate, a top part which can be moved vertically with respect to the heated plate, a membrane disposed on the top part and a separating film disposed between the membrane and the heated plate which can be moved synchronously with the conveyor means, wherein the separating film is divided into sections, every section is retained exclusively at a single edge oriented transversely to the

conveying path by retaining means, the sections are not connected to one another, and the retaining means can be moved along the conveyor path by drive means.

The advantages of this solution reside in the fact that the separating film conforms efficiently to the shape of the elements to be laminated because it lies loosely on the elements and the separating film is not stretched when the press is opened, which means that no force is transmitted by the separating film to the elements. Also, a saving is made on components and the work involved in inter-connecting the sections of separating film which has to be carried out in the case of known machines.

In one embodiment of the invention, the drive means have peripherally extending traction means, in particular chains. These traction means may be guided next to the heated plate and can be easily synchronised with the conveyor means.

In another embodiment, the sections are guided in a circle by pulley means, and in a region where the sections are guided essentially vertically in a downward direction, guides in the form of brushes are provided, with bristles oriented towards at least one of the two surfaces of the sections. Without these guides, the sections of the separating film at the rear as viewed in the conveying direction, which are effectively held by the retaining means at the front end only, drop downwards in this region and prevent the elements from getting into the machine.

In another embodiment, the retaining means have a C-shaped section, into the lengthways orifice of which a closed loop of the section extends, in which an anchoring bar is accommodated, the diameter of which is bigger than the width of the orifice. These retaining means are particularly simple and inexpensive to manufacture and also ensure that the sections of separating film are secured without creases.

By virtue of another aspect of the invention, the objective is achieved due to the fact that the membrane lies against a peripherally extending peripheral surface of the top part facing the heated plate, the membrane can be fitted on the surface of the heated plate or its edge in an arrangement which provides a seal with the region of its surface lying opposite the peripheral surface to prevent excessive external pressure and the membrane is connected to clamping means disposed on the top part.

A major advantage of this solution resides in the fact that the membrane itself provides the seal on the heated plate forming a closed chamber in conjunction with it, with the separating film and optionally the conveying means inserted in between but without a frame incorporating an additional seal. During the pressing operation, therefore, few tensile forces act on the membrane because the zone in which the membrane is clamped is disposed on a level with the heated plate and not above the heated plate, as is the case with the prior art. The maximum tensile force in the membrane does not therefore occur until the press is opened, so that any tearing of the membrane which might occur does not cause damage to the laminated elements. Furthermore, a pre-defined clamping action can be obtained and maintained in the membrane by the clamping means, thereby avoiding excessive strain and creases in the membrane.

In one embodiment, the clamping means are connected to the membrane by means of clamp mechanisms. The clamp mechanisms enable the membrane to be held and clamped without having to provide holes in its edge, which can tear open in a known manner.

In another embodiment, every clamp mechanism comprises two clamping jaws which can be clamped to one another by screws and which have longitudinally disposed recesses and clamp the membrane between them, and a section deflecting the membrane is placed in at least one of the recesses. These inexpensive features enable the membrane to be secured particularly reliably without excessive strain, due to a strong pinching action.

In another embodiment, the clamping means contain a mechanism which generates at least one force. Other than a mechanism which stores a force, such as a spring, a device such as a servo-motor may be used to generate a force, which maintains a constant clamping action even in the event of big changes to the length of the membrane.

In another embodiment, the device generating the force is piston-cylinder unit. Such a unit saves on space and is particularly easy to operate.

In another embodiment, finally, the device generating the force is connected to the membrane via traction means. This feature enables the device generating the force to be positioned where space is left available on the machine.

The invention will be explained in more detail below with reference to examples of embodiments illustrated in the appended drawings.

Of these:

Fig. 1 is a schematically illustrated longitudinal section through an embodiment of the machine proposed by the invention,

Fig. 2 shows a detail from Fig. 1 on a larger scale than in Fig. 1,



Fig. 3 shows the same detail as Fig. 2 but in a different operating mode,

Fig. 4 shows an embodiment of the retaining means for the separating film,

Fig. 5 shows an embodiment of the clamping means for the membrane and

Fig. 6 shows a detail from a machine of the type known from the prior art.

Firstly, it should be pointed out that the same parts described in the different embodiments are denoted by the same reference numbers and the same component names and the disclosures made throughout the description can be transposed in terms of meaning to same parts bearing the same reference numbers or same component names. Furthermore, the positions chosen for the purposes of the description, such as top, bottom, side, etc., relate to the drawing specifically being described and can be transposed in terms of meaning to a new position when another position is being described.

The embodiments illustrated as examples represent possible design variants of the machine and it should be pointed out at this stage that the invention is not specifically limited to the design variants specifically illustrated, and instead the individual design variants may be used in different combinations with one another and these possible variations lie within the reach of the person skilled in this technical field given the disclosed technical teaching. Accordingly, all conceivable design variants which can be obtained by combining individual details of the design variants described and illustrated are possible and fall within the scope of the invention.

For the sake of good order, finally, it should be pointed out that, in order to provide a clearer understanding of the structure of the machine, it and its constituent parts are illustrated to a certain extent out of scale and/or on an enlarged scale and/or on a reduced scale.

Fig. 1 is a highly simplified schematic diagram showing a view in section through the longitudinal axis of one embodiment of a machine 1 proposed by the invention. The machine is naturally mounted in a frame, although this is not illustrated in order to retain clarity. In the machine, board-shaped elements 4, such as photovoltaic elements, are

conveyed by a conveyor means 6 into a laminating station 2, where the elements 4 are laminated under the effect of pressure and heat. The elements 4 are then conveyed by the conveyor means 6 in the direction of arrow 31 to a cooling station 3, where they remain under pressure for a certain period of time. The laminating station 2 essentially comprises a heated plate 5 and a top part 8 which can be moved vertically with respect to it. Reference 12 denotes lifting drives, by means of which the top part 8 can be lowered and raised relative to the heated plate 5. On its bottom face, the top part 8 bears a membrane 9, which forms a closed chamber with the heated plate 5 which can be evacuated when the top part 8 is in the lowered state. When the chamber is evacuated, the elements 4 to be laminated are pressed by the membrane 9 against the heated plate 5 and any air inclusions which might still exist between the layers of elements 4 are removed and adhesive disposed between the layers of elements 4 is activated due to the pressure and/or the heat. A chamber 16 is formed in the top part 8 between the membrane 9 and an intermediate wall 14, to which a negative pressure or a positive pressure can be applied in order either to raise the membrane 9 or push it down. A cavity 13 provided in the top part communicates with the chamber 16 via orifices 15 disposed in the intermediate wall 14.

The cooling station 3 essentially comprises a cooling plate 21 and a top part 28 which can be moved relative to it by means of lifting drives 22 and which, like the top part 8 of the laminating station 2, likewise bears a membrane 29.

The conveyor means 6 in this example are provided in the form of rectangular sections 7 of flat, flexible material, which are retained both by the front edge in the conveying direction 31 and at the rear edge in the conveying direction by retaining means 23. The retaining means 23 of two adjacent sections 7 of the conveyor means 6 are connected to one another by springs 24 so that the conveyor means 6 forms an endless loop guided around pulley blocks 18, the re-circulating strand of which is guided underneath the cooling plate 21 and the heated plate 5.

A separating film 10 is laid without any tension on every element 4 or group of elements 4 at the intake end 30 into the machine 1, on the one hand in order to protect the membrane 9 from soiling, for example due to adhesive spilling out of the elements 4, and on the other hand to prevent any force, which might occur in particular when opening the laminating

station 2, from causing a relative movement between the individual layers of elements 4. Every section of the separating film 10 is retained at a leading edge in the conveying direction 31, oriented perpendicular to the conveying direction by retaining means 32, in the form of a section in the embodiment illustrated as an example here, which is moved along the conveyor path by a traction means drive, for example a chain, disposed at both ends of the conveyor path. The retaining means 32 will be described in more detail below with reference to Fig. 4. The other edges of the sections 11 of separating film 10 are free, so that every section lies loosely on the elements 4 as it is conveyed through the machine 1. This is of particular advantage on the run leading away from the laminating station 2 to the cooling station 3 because the elements 4 are still hot here and the adhesive joining the individual layers has not yet set and is therefore sticky and has a tendency to flow. If the separating film were tensioned on this run, as is the case with the machines known from the prior art mentioned above, this could lead to an undesired relative movement between the layers. The other advantage which this arrangement has over that known from the prior art is that a retaining means can be dispensed with on one side for each section of the separating film 10 and the springs connecting the sections can be dispensed with altogether. The traction means drive moving the retaining means 32 runs in a circle and the sections 11 of separating film 10 are guided by means of pulley blocks 17, as a result of which they are fed above the top parts 28 respectively 8 of the cooling station 3 and laminating station 2 back to the intake end 30 of the machine 1, on the left-hand side in Fig. 1. Guides may be provided above the machine (not illustrated), across which the free end 19 of every section of the separating film 10 is dragged. In order to prevent the sections 11 from simply falling in the region in which they are fed back in an essentially vertical direction with respect to the intake end 30, guides are provided there in the form of elongate brushes 20 oriented in the conveying direction 31. Rigid guides disposed on both faces of the separating film 10 would be inappropriate because they would then have to be separated from one another by a space to enable the retaining means 32 to pass through between them. Depending on the stiffness of the separating film 10, the latter would be able to fold backwards and forwards between the guides in this space, thereby undesirably leading to bending. By contrast, the brushes on the two sides of the separating film 10 may reach as far as its top surface, because their bristles flex, thereby enabling the retaining means 32 to pass by without any difficulty.

Although these are not illustrated, cleaning mechanisms may be provided on the run on

which the conveyor means 6 and the separating film 10 are directed on leaving the cooling station 3 back to the intake end 30 of the machine 1, by means of which any soiling such as adhesive residues may be removed from the conveyor means 6 and separating film 10. As clearly illustrated in Fig. 1, the conveyor means 6 and the separating film 10 do not have to be of the same length. For example, the separating film 10 may perfectly easily have one or more sections than the conveyor means 6.

Fig. 2 is a detail from Fig. 1 on a larger scale illustrating the laminating station 2 in the opened position, in other words with the top part 8 raised. The element 4 to be laminated is positioned on the heated plate 5 with a section 7 of the conveyor means disposed in between and covered by means of a section 11 of the separating film. As may be seen from this drawing, the retaining means 32 of section 11, the retaining means 23 of section 7 and the springs 24 which interconnect the sections 23 are positioned so that they are clamped by the top part 8 as it is moved downwards. The retaining means 32 of section 11 and the retaining means 23 of section 7 are offset from one another in the conveying direction so that they do not lie on top of one another. The membrane 9 is guided around the edges 46 of the top part 8, and a seal 34 may be inserted between the membrane 9 and the top part 8. The edges of the membrane 9 are held by means of a clamp mechanism 33 which co-operates with a clamp drive 25. The clamp drive 25 is advantageously provided in the form of a hydraulically or pneumatically driven piston-cylinder unit. In order to save on space, it is of advantage if the clamp drive 25 is disposed above on the top part 8 and its force is transmitted to the clamp mechanisms 33 via traction means 26, for example Bowden cables fed by pulley blocks 27, for example. The clamp drive 25 enables a pre-defined tension to be maintained in the membrane 9. To this end, it may be connected to the control system of the machine.

Fig. 3 illustrates the laminating station closed, in other words the top part 8 has been lowered by means of the lifting drive 12 until the peripherally extending bottom edge 46 presses the seal 34, the membrane 9, the section 11 of separating film and the section 7 of the conveyor means 6 in a sealing arrangement against the heated plate 5 and its edge lying at the same level. As a result, a closed chamber 35 is formed between the heated plate 5 and the membrane 9, in which the elements 4 to be laminated are disposed. This chamber 35 is now evacuated so that gas is removed from around the elements 4 and the membrane 9 lies tightly on the elements 4 whilst section 11 of the separating film 10 lies loosely on top of them.

Fig. 4 illustrates an example of an embodiment of the retaining means 32 of section 11 of the separating film 10 on a larger scale than in the preceding drawings. Section 11 of the separating film 10 is provided with a loop 36 at a single edge, which may be formed by folding it over and welding, adhering or stitching. This loop 36 is retained in the lengthways orifice of a C-shaped section 37 by means of an anchoring bar 38, the diameter of which is bigger than the width of said orifice. The anchoring bar is advantageously of a tubular shape.

Fig. 5 illustrates the clamp mechanism for the membrane 9 on an even larger scale than illustrated in Figures 2 and 3 above. The membrane 9 is clamped between two clamping jaws 39 and 40, of which clamping jaw 39 is connected to the traction means 26, although this is not illustrated. In order to improve the hold of the membrane 9 in the clamp mechanism 33, the clamping jaw 40 is also provided with longitudinally extending recesses in which the fitting sections 42 fit. The clamping jaw 39 also has recesses in the region of the fitting sections, so that the membrane 9 is bent round on clamping, which significantly increases friction resistance to being torn out. Screws 41 are used to clamp the clamping jaws 39 and 40 together.

Fig. 6 is a schematic diagram showing a detail of a laminating press of the type known from the prior art. The membrane 9 is secured by means of a clamping frame 43 attached to the top part 8. The clamping frame 43 is fixedly screwed to a flange of the top part by means of screws 45 which are inserted through holes provided in the membrane 9. In order to seal the frame 43 on the heated plate 5 and its edge, it is necessary to provide a seal 44 in the clamping frame 43.

**List of reference numbers**

1	Machine	26	Traction means
2	Laminating station	27	Pulley block
3	Cooling station	28	Top part of 3
4	Board-shaped element	29	Membrane
5	Heated plate	30	Intake end
6	Conveyor means	31	Conveyor mechanism
7	Section of 6	32	Retaining means for 11
8	Top part of 2	33	Clamp mechanism
9	Membrane	34	Seal
10	Separating film	35	Chamber
11	Section of 10	36	Loop
12	Lifting drive for 8	37	C-section
13	Cavity in 8	38	Bar
14	Intermediate wall of 8	39	Clamping jaw
15	Orifice in 14	40	Clamping jaw
16	Chamber	41	Screw
17	Pulley block for 10	42	Fitting section
18	Pulley block for 6	43	Clamping frame
19	Free end of 10	44	Seal
20	Brushes	45	Screw
21	Cooling plate	46	Peripheral surface
22	Lifting drive for 28		
23	Retaining means for 6		
24	Spring		
25	Clamp drive		

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. Machine for producing board-shaped elements of composite material, with a heated plate, conveyor means for conveying the elements along a conveyor path leading across the heated plate, a top part which can be moved vertically with respect to the heated plate, a membrane disposed on the top part and a separating film disposed between the membrane and the heated plate which can be moved synchronously with the conveyor means, wherein the separating film is divided into sections, every section is retained exclusively at a single edge oriented transversely to the conveying path by retaining means, the sections are not connected to one another, and the retaining means can be moved along the conveyor path by drive means.
2. Machine as claimed in claim 1, wherein the drive means have circulating traction means, in particular chains.
3. Machine as claimed in any one of the preceding claims, wherein the sections are guided in a circle by pulley means, and in a region in which the sections are fed essentially vertically downwards, guides are provided in the form of brushes with bristles directed towards at least one of the two surfaces of the sections.
4. Machine as claimed in any one of the preceding claims, wherein the retaining means comprise a C-shaped section, into the lengthways orifice of which a closed loop of the section extends, in which an anchoring bar is accommodated, the diameter of which is bigger than the width of the orifice.
5. A machine for producing board-shaped elements of composite material substantially as hereinbefore described with reference to the accompanying drawings.

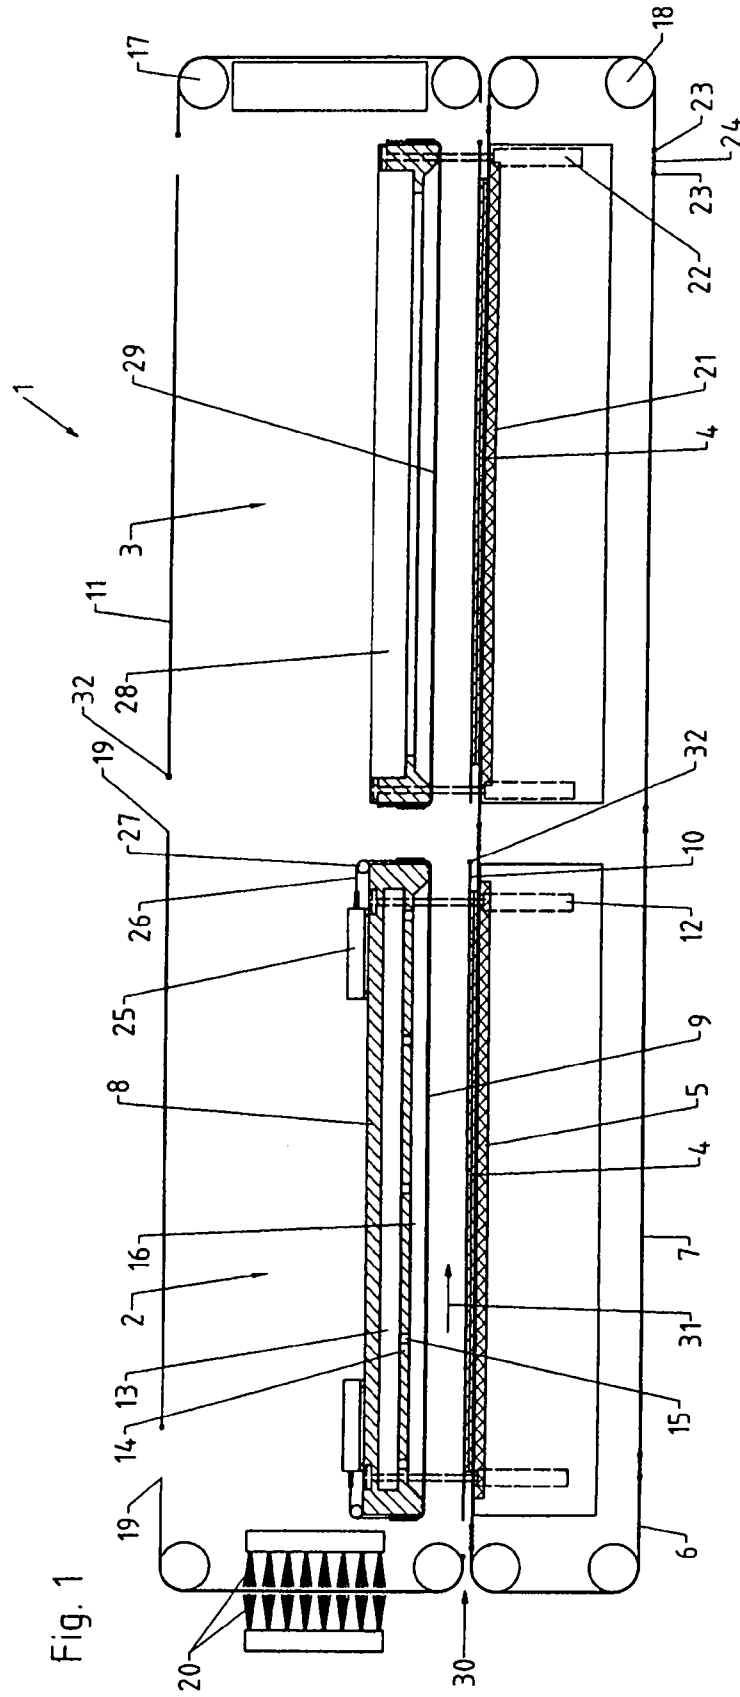


Fig. 1



Fig. 2

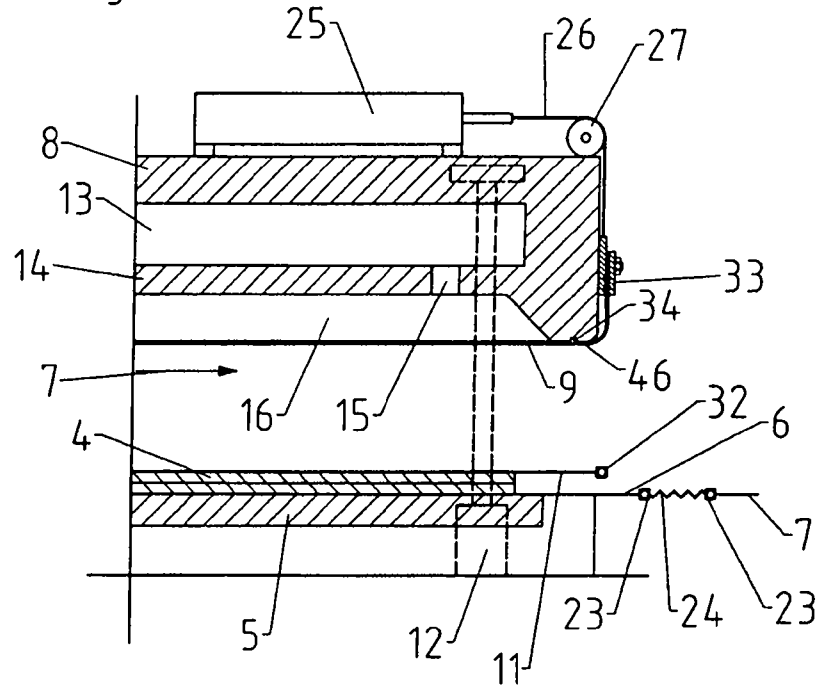


Fig. 3

