



(51) International Patent Classification:

C09K 19/60 (2006.01) C09K 19/18 (2006.01)  
C09K 19/12 (2006.01) C09K 19/30 (2006.01)  
C09K 19/16 (2006.01) C09K 19/04 (2006.01)

(21) International Application Number:

PCT/EP2017/000069

(22) International Filing Date:

20 January 2017 (20.01.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16154744.3 8 February 2016 (08.02.2016) EP

(71) Applicant: MERCK PATENT GMBH [DE/DE]; Frankfurter Strasse 250, 64293 Darmstadt (DE).

(72) Inventors: WITTEK, Michael; Elisabethenstrasse 16, 64390 Erzhausen (DE). KLASS, Dagmar; Schmelzerweg 41, 64291 Darmstadt (DE). KIRSCH, Peer; Beethovenring 28, 64342 Seeheim-Jugenheim (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: LIQUID-CRYSTALLINE MEDIUM AND HIGH-FREQUENCY COMPONENTS COMPRISING SAME

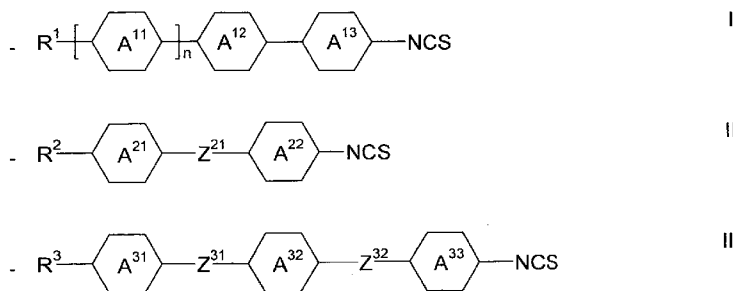

(57) Abstract: The present invention relates to liquid-crystalline media comprising - one or more pleochroic compounds, and - one or more compounds selected from the group of compounds of formulae I, II and III, ( I, II and III ) in which the groups have the meanings as set forth in claim 1, and to components comprising these media for high-frequency technology, in particular phase shifters and microwave array antennas.



**Liquid-crystalline medium and high-frequency components  
comprising same**

5 The present invention relates to liquid-crystalline media and to high-frequency components comprising same, especially microwave components for high-frequency devices, such as devices for shifting the phase of microwaves, in particular for microwave phased-array antennas.

10 Liquid-crystalline media have been used for some time in electro-optical displays (liquid crystal displays: LCDs) in order to display information.

More recently, liquid-crystalline media have also been proposed for use in components for microwave technology, such as, for example, in  
15 DE 10 2004 029 429.1 A and in JP 2005-120208 (A).


As a typical microwave application, the concept of the inverted microstrip line as described by K.C. Gupta, R. Garg, I. Bahl and P. Bhartia: *Microstrip Lines and Slotlines*, 2<sup>nd</sup> ed., Artech House, Boston, 1996, is employed, for  
20 example, in D. Dolfi, M. Labeyrie, P. Joffre and J.P. Huignard: *Liquid Crystal Microwave Phase Shifter*. *Electronics Letters*, Vol. 29, No. 10, pp. 926-928, May 1993, N. Martin, N. Tentillier, P. Laurent, B. Spingart, F. Huert, PH. Gelin, C. Legrand: *Electrically Microwave Tunable Components Using Liquid Crystals*. 32<sup>nd</sup> European Microwave Conference, pp. 393-  
25 396, Milan 2002, or in Weil, C.: *Passiv steuerbare Mikrowellenphasenschieber auf der Basis nichtlinearer Dielektrika* [Passively Controllable Microwave Phase Shifters based on Nonlinear Dielectrics], Darmstädter Dissertationen D17, 2002, C. Weil, G. Lüssem, and R. Jakoby: *Tunable Invert-Microstrip Phase Shifter Device Using Nematic Liquid Crystals*, *IEEE MTT-S Int. Microw. Symp.*, Seattle, Wash-  
30 ington, June 2002, pp. 367-370, together with the commercial liquid crystal K15 from Merck KGaA. C. Weil, G. Lüssem, and R. Jakoby: *Tunable Invert-Microstrip Phase Shifter Device Using Nematic Liquid Crystals*, *IEEE MTT-S Int. Microw. Symp.*, Seattle, Washington, June 2002, pp. 367-  
35 370, achieved phase shifter qualities of 12°/dB at 10 GHz with a control voltage of about 40 V therewith. The insertion losses of the LC, i.e. the

losses caused only by the polarisation losses in the liquid crystal, were given as approximately 1 to 2 dB at 10 GHz in Weil, C.: Passiv steuerbare Mikrowellenphasenschieber auf der Basis nichtlinearer Dielektrika [Passively Controllable Microwave Phase Shifters based on Nonlinear Dielectrics], Darmstädter Dissertationen D17, 2002. In addition, it was described that the phase shifter losses are determined primarily by the dielectric LC losses and the losses at the waveguide junctions. T. Kuki, H. Fujikake, H. Kamoda and T. Nomoto: Microwave Variable Delay Line Using a Membrane Impregnated with Liquid Crystal. *IEEE MTT-S Int. Microwave Symp. Dig.* 2002, pp. 363-366, June 2002, and T. Kuki, H. Fujikake, T. Nomoto: Microwave Variable Delay Line Using Dual-Frequency Switching-Mode Liquid Crystal. *IEEE Trans. Microwave Theory Tech.*, Vol. 50, No. 11, pp. 2604-2609, November 2002, also address the use of polymerised LC films and dual-frequency switching-mode liquid crystals in combination with planar phase shifter arrangements.


A. Penirschke, S. Müller, P. Scheele, C. Weil, M. Wittek, C. Hock and R. Jakoby: "Cavity Perturbation Method for Characterization of Liquid Crystals up to 35GHz", 34<sup>th</sup> European Microwave Conference – Amsterdam, pp. 545-548 describe, *inter alia*, the properties of the known single liquid-crystalline substance K15 (Merck KGaA, Germany) at a frequency of 9 GHz.

A. Gaebler, F. Goelden, S. Müller, A. Penirschke and R. Jakoby "Direct Simulation of Material Permittivities using an Eigen-Susceptibility Formulation of the Vector Variational Approach", 12MTC 2009 – International Instrumentation and Measurement Technology Conference, Singapore, 2009 (IEEE), pp. 463-467, describe the corresponding properties of the known liquid-crystalline mixture E7 (Merck KGaA, Germany).


DE 10 2004 029 429.1 A describes the use of liquid-crystalline media in microwave technology, *inter alia* in phase shifters. Therein liquid-crystalline media are investigated with respect to their properties in the corresponding frequency range. In addition, it describes liquid-crystalline media which comprise a small amount of a single compound of the formula

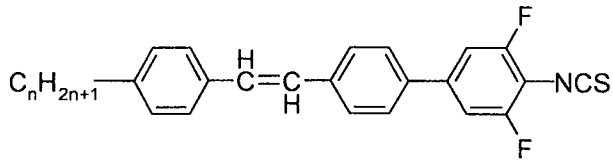






5 respectively

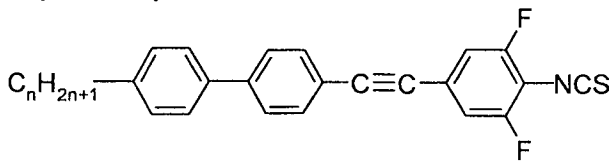


10 in combination with the well known cyanobiphenyl compound



15 and also media comprising, besides other compounds,

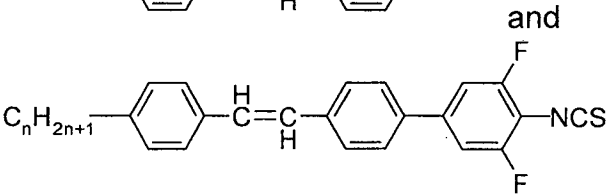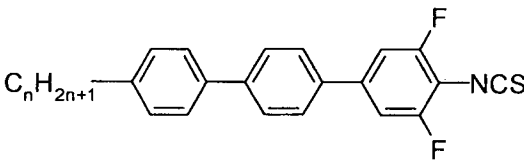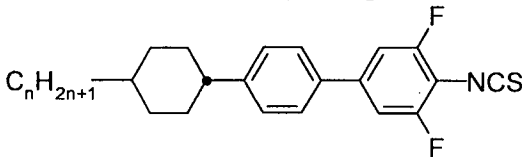


30 respectively

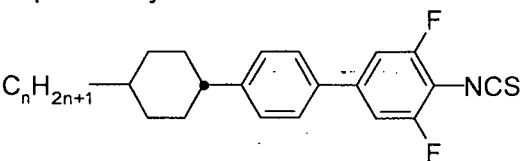

35

- 4 -

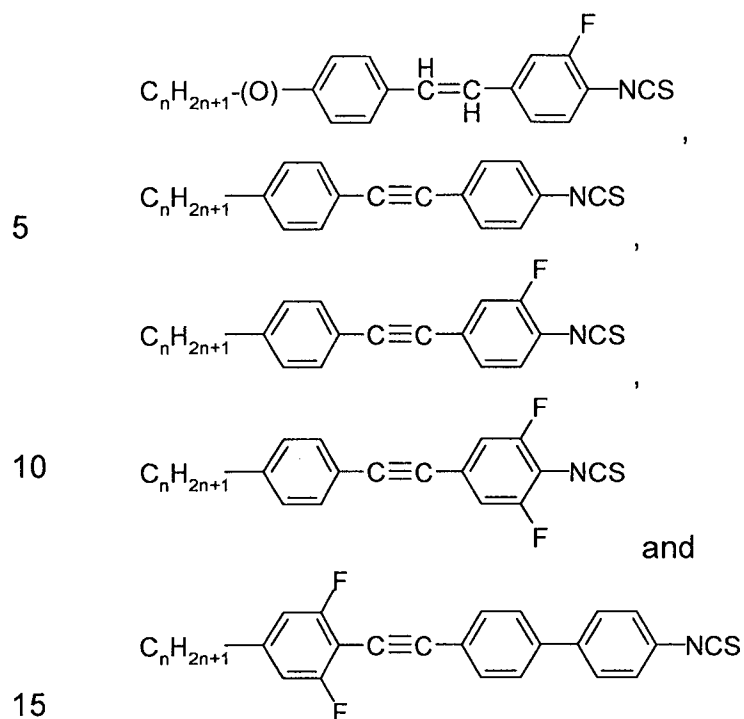

20

These relatively simple mixtures, however, show limited performance for the application in devices operating in the microwave regime and even in terms of their general physical properties, such as the clearing point and the phase range, and especially their stability against storage at low temperatures and their viscosities, and in particular their rotational viscosity.

25

Further liquid-crystalline media for microwave applications comprising one or more of these compounds, as well as similar ones, are proposed for microwave applications in DE 10 2010 025 572 A and WO 2013/034227.


30

It is proposed in e.g. "Influence of dye molecules on the birefringence of liquid crystal mixtures at near infrared frequencies", Simpson, S.H., Richardson, R.M., and Hanna, S., Journal of Chemical Physics, (2007), Vol. 127, Issue (10) pp. 104901-104901-14 to use a dye in a guest-host system to shift the absorption edge closer to the near infrared region in order to increase the (effective) birefringence of liquid crystals.

35

Moreover, "Liquid crystal dyes with high solubility and large dielectric anisotropy", Wu, Shin-Tson, Margerum, J. David, Ho, Mei-Sing, and Fung,

Bing M., Appl. Phys. Lett. (1994), 64 (17) pp. 2191 - 2193 describes azo dyes of the general formula



10 with  $n$  ranging from 4 to 14, especially  $n$  being 4, 5 and 6, and their behaviour in the near infrared range and proposes, amongst other uses, to use them as “dopants” for nonpolar, high birefringent LCs for IR and millimetre wave modulators.

15 Polymer stabilization of liquid-crystalline media as well as doping by chiral dopants has been proposed for various reasons for several types of display applications.

20 However, liquid-crystalline compositions typically used so far have inadequate or insufficient material properties, such as disadvantageously high losses and/or inadequate phase shifts. Known devices for high frequency-technology comprising liquid-crystalline media still lack sufficient stability and in particular fast response.

25 Thus, there is a need in the art for novel liquid-crystalline media having advantageous and improved properties, which in high frequency-technology applications can mean particular, hitherto rather unusual and uncommon properties or combinations of properties.

30 An object of the present invention is to provide suitable liquid-crystalline media with reduced dielectric loss in the microwave region and improved material quality, wherein a figure of merit,  $\eta$ , relates a high tunability with a concomitant low dielectric loss. It is a further object to provide liquid-crystalline media which exhibit improved response times, in particular for applications in devices using planar structures such as e.g. phase shifters and leaky antennas, while at the same time providing further benefits such as broad and stable nematic phase ranges, improved low-temperature  
35 behaviour and an improvement in the operating properties at low

- 6 -

temperatures and also in the shelf life. Further objects of the present invention are immediately evident to the person skilled in the art from the following detailed description.


5 The object is solved by the subject-matter defined in the independent claims, while preferred embodiments are set forth in the respective dependent claims and are further described below.

10 The present invention in particular provides the following items including main aspects, preferred embodiments and particular features, which respectively alone and in combination contribute to solving the above object and eventually provide additional advantages.

15 A first aspect of the present invention provides a liquid-crystalline medium, comprising

(i) one or more pleochroic compounds,

20 (ii) one or more compounds selected from the group of compounds of formulae I, II and III




25

in which

30  $R^1$  denotes H, unfluorinated alkyl or unfluorinated alkoxy having 1 to 17 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl having 2 to 15 C atoms,


$n$  denotes 0 or 1, and

35




independently of one another, denote


5




10

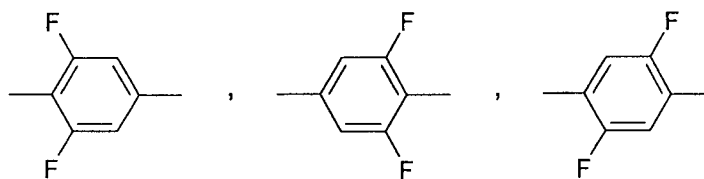

or




15




alternatively denotes

20



25




in which

30

$R^2$  denotes H, unfluorinated alkyl or unfluorinated alkoxy having 1 to 17 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl having 2 to 15 C atoms,


35

$Z^{21}$  denotes *trans*-CH=CH-, *trans*-CF=CF- or -C≡C-, and




independently of one another, denote


5




10

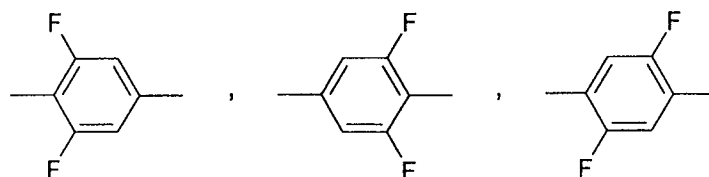

or



15



20


in which

$R^3$  denotes H, unfluorinated alkyl or unfluorinated alkoxy having 1 to 17 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl having 2 to 15 C atoms,

25


one of  $Z^{31}$  and  $Z^{32}$  denotes *trans*-CH=CH-, *trans*-CF=CF- or -C≡C-, and the other one denotes *trans*-CH=CH-, *trans*-CF=CF- or a single bond, and

30




35

independently of one another, denote

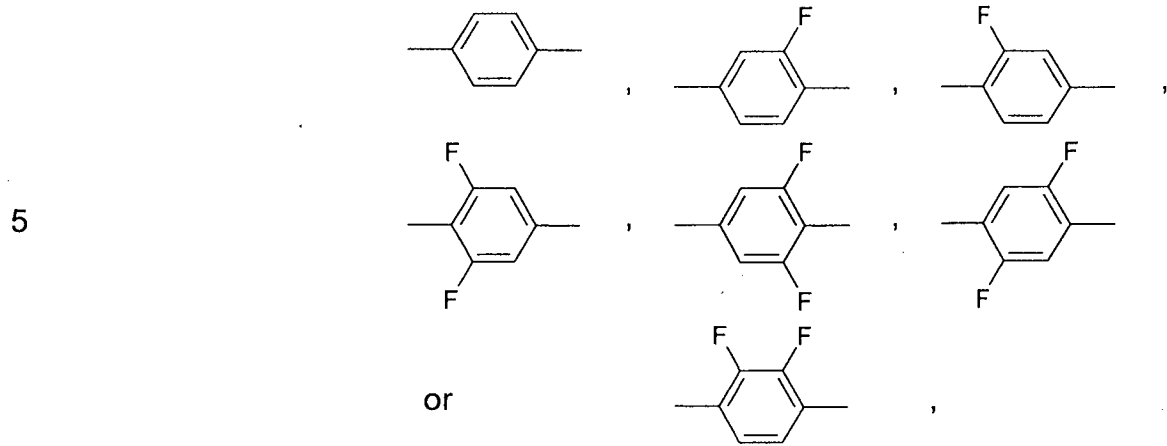


10



alternatively denotes

15



20

and optionally (iii) one or more polymerisable compounds.

Preferably, the one or more pleochroic compounds are mesogenic compounds. Moreover, the optionally provided one or more polymerisable compounds are mesogenic compounds.

25

It has surprisingly been found that by providing the liquid-crystalline media according to the invention which comprise a combination of one or more pleochroic compounds and one or more compounds selected from the group of compounds of formulae I, II and III as set forth above it is possible to obtain media having a suitably fast switching time, a suitable nematic phase range and an improved or at least suitable dielectric loss.

30

In the present invention it was advantageously recognized that by using one, two or more pleochroic additives, in particular dichroic dyes, in media containing one or more compounds selected from the group of compounds

35

of formulae I, II and III significant benefits in terms of the tunability of the liquid-crystal medium can be provided.

5 Such pleochroic additives exhibit electromagnetic absorption spectra which differ depending on the orientation of the propagation of the light relative to the average direction of the long molecular axis of the mesogenic hosts. The latter direction is called the director. Especially in case where these additives show an absorption in the visible spectrum of the electromagnetic radiation or in the adjacent UV or near IR regions, they are typically called pleochroic dyes. Preferably, the pleochroic dyes provided in the media according to the present invention are dichroic dyes, i.e. they exhibit a different spectrum for two different directions of the orientation of their director relative to the light propagation, i.e. parallel and perpendicular to it. The ratio of their respective absorption values is called the dielectric ratio. This is dependent on the order parameter of the mesogenic host and on the relative degree of the orientation of the respective additives in the host. Thus, preferably compounds with an elongated structure, similar to a mesogenic core and/or mesogenic groups and/or typical end groups present in liquid crystalline compounds are used according to the present application.

A further advantage of the use of pleochroic dyes has been found especially in case one or more fluorescent dyes are used. Preferably, either all or most dyes used may be fluorescent dyes or only one or two of them. Considering that the liquid crystalline media are employed in cavities for most applications in the microwave regime there exists a possibility of an undesired leakage of the material. Such an incident may be conveniently detected by the colour of the dye present in the material. In this case a fluorescent dye has the advantage of being particularly easily detectable under special illumination, in particular with UV irradiation. But also non-fluorescent dyes may be beneficially used in some cases.

Preferably, the liquid-crystalline medium according to the invention comprises one or more pleochroic dyes selected from the group of azo dyes and thiadiazol dyes.

Another aspect of the invention relates to a composite system which comprises the liquid-crystalline medium according to the invention and a polymer obtained or obtainable from the polymerisation of one or more polymerisable compound(s).

Preferably, a polymer stabilized system is obtainable or respectively obtained by polymerisation of one or more compounds of the formula P as defined herein alone or in combination with one or more further polymerisable compounds from a respective mixture, which optionally and more preferably further comprises a polymerisation initiator.

It has been found that by using polymerisable compound(s), in particular reactive mesogen(s), a stabilised liquid-crystalline phase which has a broad temperature range and an improved, faster switching time, good tunability and acceptable loss can be obtained.

Further aspects of the invention relate to the use of the liquid-crystalline media and the composite systems according to the invention in components or devices for high frequency technology, in particular to components suitable for operation in the microwave range, preferably a phase shifter or a LC based antenna element operable in the microwave region, and microwave antenna arrays.

It was advantageously found that the use of one or more pleochroic compounds can provide significant benefits in terms of the tunability of the liquid-crystal medium comprising one or more compounds selected from the group of compounds of formulae I, II and III as set forth above, which in turn can be favourable for the use in the above components and devices.

The term "liquid crystal", "mesomorphic compound" or "mesogenic compound", also shortly referred to as "mesogen", means a compound which under suitable conditions of temperature, pressure and concentration can exist as a mesophase (nematic, smectic, etc.) or in particular as a LC phase. Non-amphiphilic mesogenic compounds

comprise for example one or more calamitic, banana-shaped or discotic mesogenic groups.

5 The term "mesogenic group" means in this context a group with the ability to induce liquid crystal (LC) phase behaviour. The mesogenic compounds according to the invention do not necessarily have to exhibit an LC phase themselves. It is also possible that they show LC phase behaviour only in mixtures with other compounds. For the sake of simplicity, the term "liquid crystal" is used hereinafter for both mesogenic and LC materials.

10

The term "chiral" in general is used to describe an object that is non-superimposable on its mirror image. "Achiral" (non-chiral) objects are objects that are identical to their mirror image. The terms chiral nematic and cholesteric are used synonymously in this application, unless explicitly stated otherwise.

15

The wavelength of light referred to in this application is 550 nm, unless explicitly specified otherwise.

20 The cell gap of the cells preferably is in the range from 1  $\mu\text{m}$  to 20  $\mu\text{m}$ , in particular within the range from 2.0  $\mu\text{m}$  to 10  $\mu\text{m}$ .

Without limiting the present invention thereby, in the following the invention is illustrated by the detailed description of the aspects, 25 embodiments and particular features, and particular embodiments are described in more detail.

It has surprisingly been found that by the combined provision of one or more pleochroic compounds and one or more compounds selected from 30 the group of compounds of formulae I, II and III as set forth above in a liquid-crystalline media can be obtained with favourable characteristics, including suitably fast switching time, a suitable nematic phase range and an improved or at least suitable dielectric loss.



35 The pleochroic additives used according to the present invention are preferably dichroic dyes, and they preferably exhibit a large dichroic ratio.

That means that their spectral properties significantly differ for observation along the director and perpendicular to it.

5 The concentration of the pleochroic compound, in particular the dichroic dye and respectively the total concentration of the dichroic dyes in the LC medium are preferably in the range from 0.1 % or more to 15 % or less, more preferably from 0.5 % or more to 10 % or less, and most preferably from 1.0 % or more to 8 % or less.

10 Preferred dyes are selected from the group of azo dyes and thiadiazol dyes. The above preferred concentration ranges apply in particular to these preferred dichroic dyes.

15 The azo dyes used according to the present invention preferably comprise one or two diazo groups linked to aromatic rings. They are more preferably selected from the group of formulae A and D, preferably of formula A

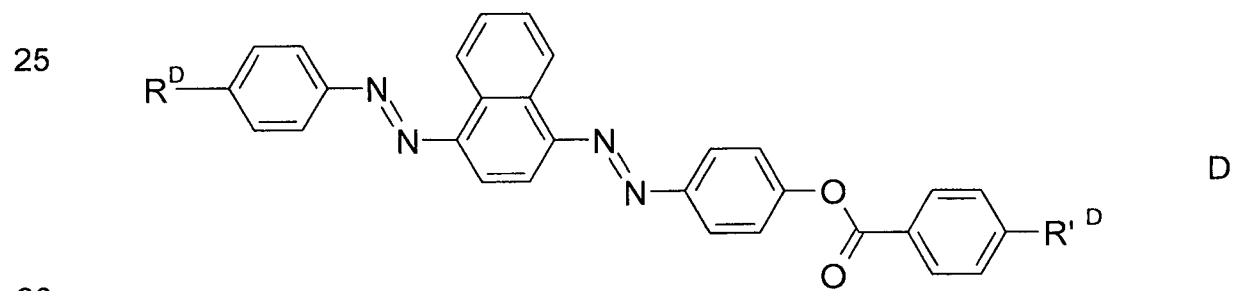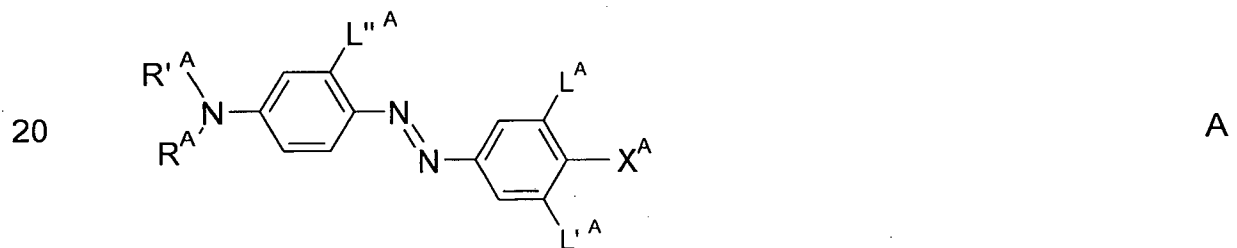

wherein

35 X<sup>A</sup> is a polar group, preferably selected from F, Cl, CN, CF<sub>3</sub>, OCF<sub>3</sub>, SF<sub>5</sub> or SF<sub>4</sub>CF<sub>3</sub>, more preferably Cl, CF<sub>3</sub>, SF<sub>5</sub> or SF<sub>4</sub>CF<sub>3</sub>, and most preferably Cl or CF<sub>3</sub>,


$L^A$ ,  $L'^A$  and  $L''^A$  are independently of each other H, F, Cl or CN, preferably H, F or Cl, and most preferably H or F,

5  $R^A$  and  $R'^A$  are independently of each other alkyl having 1 to 6 C atoms, preferably 1 to 3 C atoms, and most preferably 1 C atom, or alkenyl having 2 to 6 C atoms, preferably 2 or 3 C atoms, and

10  $R^D$  and  $R'^D$  are independently of each other alkyl having 1 to 6 C atoms, preferably 2 to 5 C atoms, and most preferably 4 or 5 C atoms, or alkenyl having 2 to 6 C atoms, preferably 3, 4 or 5 C atoms.

The thiadiazol dyes used according to the present invention are preferably dibenzothiadiazoles, more preferably selected from formula T

15

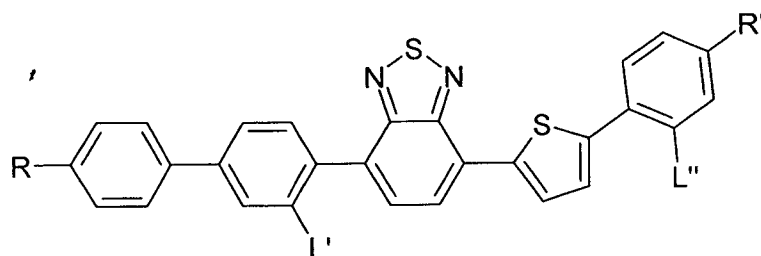

20

wherein

25  $R$  and  $R'$  are independently of each other alkoxy having 1 to 6 C atoms, preferably 2 to 5 C atoms, and most preferably 4 or 5 C atoms, and


$L'$  and  $L''$  are independently of each other H, F or Cl, preferably F.

30

According to the invention optionally one or more polymerisable compounds are provided in the liquid-crystalline media. According to a preferred embodiment one or more polymerisable compounds are present in the liquid-crystalline media of the invention.

35

Preferably, the liquid-crystalline medium according to the invention comprises one or more compounds of formula P



wherein

5  $P^a$ ,  $P^b$  each, independently of one another, are a polymerisable group,

10  $Sp^a$ ,  $Sp^b$  each, independently of one another, denote a spacer group,

$s1$ ,  $s2$  each, independently of one another, denote 0 or 1,

$n1$ ,  $n2$  each, independently of one another, denote 0 or 1,

15  $Q$  denotes a single bond,  $-CF_2O-$ ,  $-OCF_2-$ ,  $-CH_2O-$ ,  $-OCH_2-$ ,  $-(CO)O-$ ,  $-O(CO)-$ ,  $-(CH_2)_4-$ ,  $-CH_2-CH_2-$ ,  $-CF_2-CF_2-$ ,  $-CF_2-CH_2-$ ,  $-CH_2-CF_2-$ ,  $-CH=CH-$ ,  $-CF=CF-$ ,  $-CF=CH-$ ,  $-CH=CF-$ ,  $-(CH_2)_3O-$ ,  $-O(CH_2)_3-$ ,  $-C\equiv C-$ ,  $-O-$ ,  $-CH_2-$ ,  $-(CH_2)_3-$ ,  $-CF_2-$ , preferably  $-CF_2O-$ ,

20  $Z^1$ ,  $Z^4$  denote, independently of one another, a single bond,  $-CF_2O-$ ,  $-OCF_2-$ ,  $-CH_2O-$ ,  $-OCH_2-$ ,  $-(CO)O-$ ,  $-O(CO)-$ ,  $-(CH_2)_4-$ ,  $-CH_2-CH_2-$ ,  $-CF_2-CF_2-$ ,  $-CF_2-CH_2-$ ,  $-CH_2-CF_2-$ ,  $-CH=CH-$ ,  $-CF=CF-$ ,  $-CF=CH-$ ,  $-CH=CF-$ ,  $-(CH_2)_3O-$ ,  $-O(CH_2)_3-$ ,  $-C\equiv C-$ ,  $-O-$ ,  $-CH_2-$ ,  $-(CH_2)_3-$ ,  $-CF_2-$ ,

25 wherein  $Z^1$  and  $Q$  or respectively  $Z^4$  and  $Q$  do not simultaneously denote a group selected from  $-CF_2O-$  and  $-OCF_2-$ ,

30  $A^1$ ,  $A^2$ ,  $A^3$ ,  $A^4$  each, independently of one another, denote a diradical group selected from the following groups:


35 a) the group consisting of trans-1,4-cyclohexylene, 1,4-cyclohexenylene and 1,4'-bicyclohexylene, in addition, one or more non-adjacent  $CH_2$  groups may be

- 16 -


replaced by -O- and/or -S- and in which, in addition, one or more H atoms may be replaced by F,

- 5 b) the group consisting of 1,4-phenylene and 1,3-phenylene, in which, in addition, one or two CH groups may be replaced by N and in which, in addition, one or more H atoms may be replaced by L,
- 10 c) the group consisting of tetrahydropyran-2,5-diyl, 1,3-dioxane-2,5-diyl, tetrahydrofuran-2,5-diyl, cyclobutane-1,3-diyl, piperidine-1,4-diyl, thiophene-2,5-diyl and selenophene-2,5-diyl, each of which may also be mono- or polysubstituted by L,
- 15 d) the group consisting of saturated, partially unsaturated or fully unsaturated, and optionally substituted, polycyclic radicals having 5 to 20 cyclic C atoms, one or more of which, in addition, may be replaced by heteroatoms, preferably selected from the group consisting of
- 20 bicyclo[1.1.1]pentane-1,3-diyl, bicyclo[2.2.2]octane-1,4-diyl, spiro[3.3]heptane-2,6-diyl,


25




30

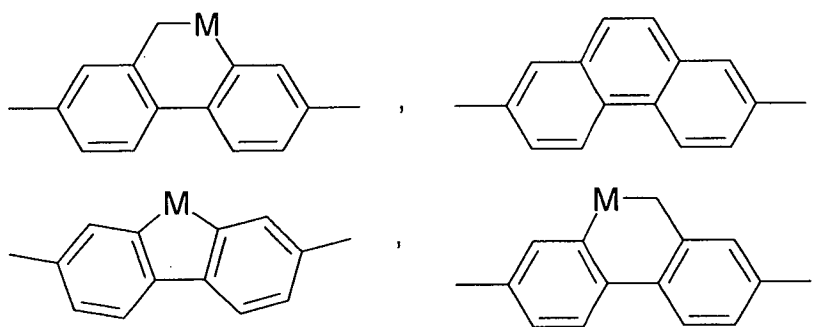

35



5

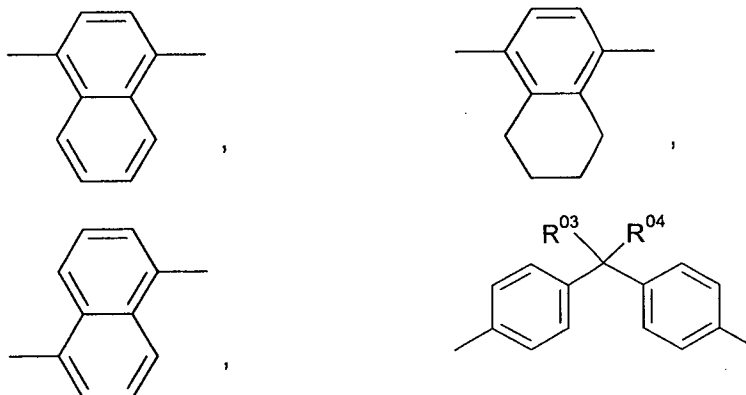

10

wherein, in addition, one or more H atoms in these radicals may be replaced by L, and/or one or more double bonds may be replaced by single bonds, and/or one or more CH groups may be replaced by N,

15

or A<sup>3</sup> alternatively may be a single bond,

20

L on each occurrence, identically or differently, denotes F, Cl, CN, SCN, SF<sub>5</sub> or straight-chain or branched, in each case optionally fluorinated, alkyl, alkoxy, alkylcarbonyl, alkoxy carbonyl, alkylcarbonyloxy or alkoxy carbonyloxy having 1 to 12 C atoms,

25

R<sup>03</sup>, R<sup>04</sup> each, independently of one another, denote H, F or straight-chain or branched alkyl having 1 to 12 C atoms, in which, in addition, one or more H atoms may be replaced by F,

30








M denotes -O-, -S-, -CH<sub>2</sub>-, -CHY<sup>1</sup>- or -CY<sup>1</sup>Y<sup>2</sup>-, and


35


Y<sup>1</sup> and Y<sup>2</sup> each, independently of one another, have one of the meanings indicated above for R<sup>03</sup>, or denote Cl or CN, and one of the groups Y<sup>1</sup> and Y<sup>2</sup> alternatively denotes -OCF<sub>3</sub>, preferably H, F, Cl, CN or CF<sub>3</sub>.


Optionally a polymerisation initiator is further comprised, wherein preferably one or more polymerisation initiators are present in the LC media.


5 Polymerisable compounds of formula P preferably used according to the present invention are selected from the group consisting of the following formulae:

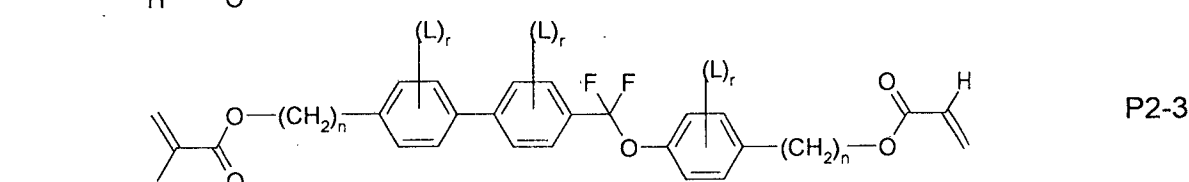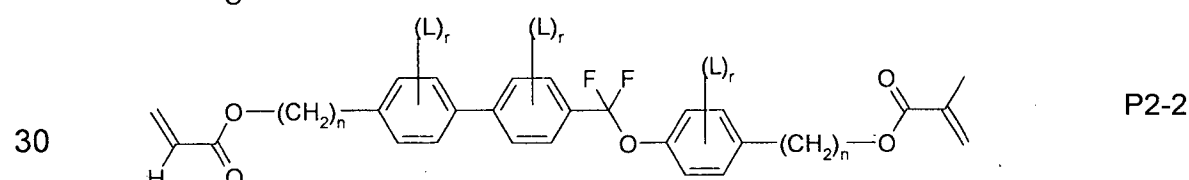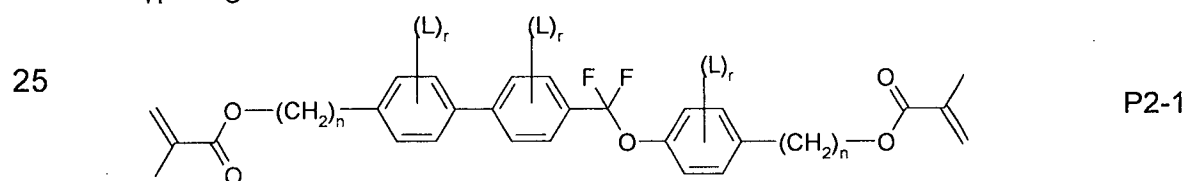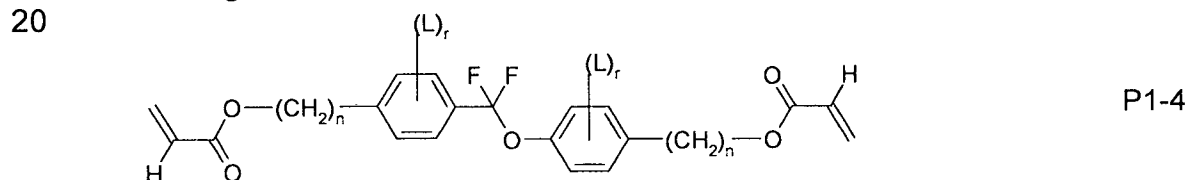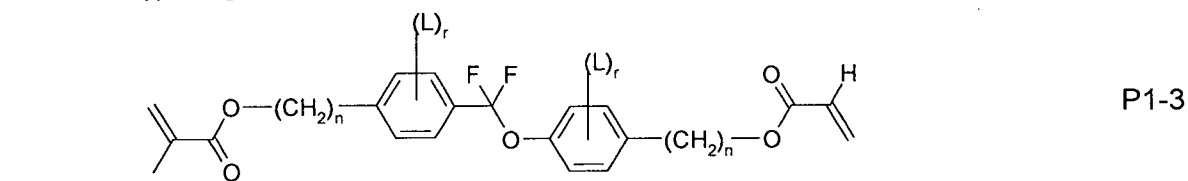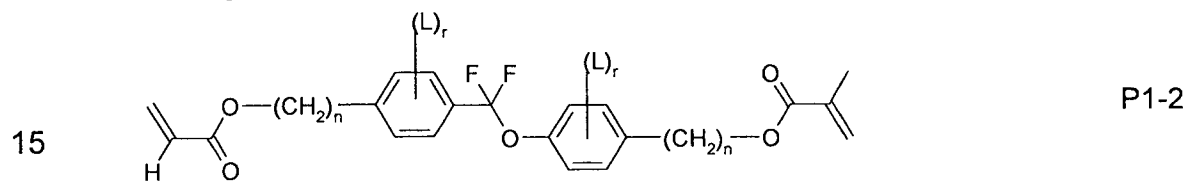
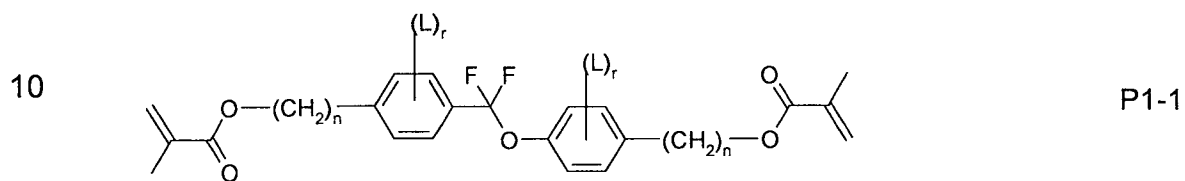


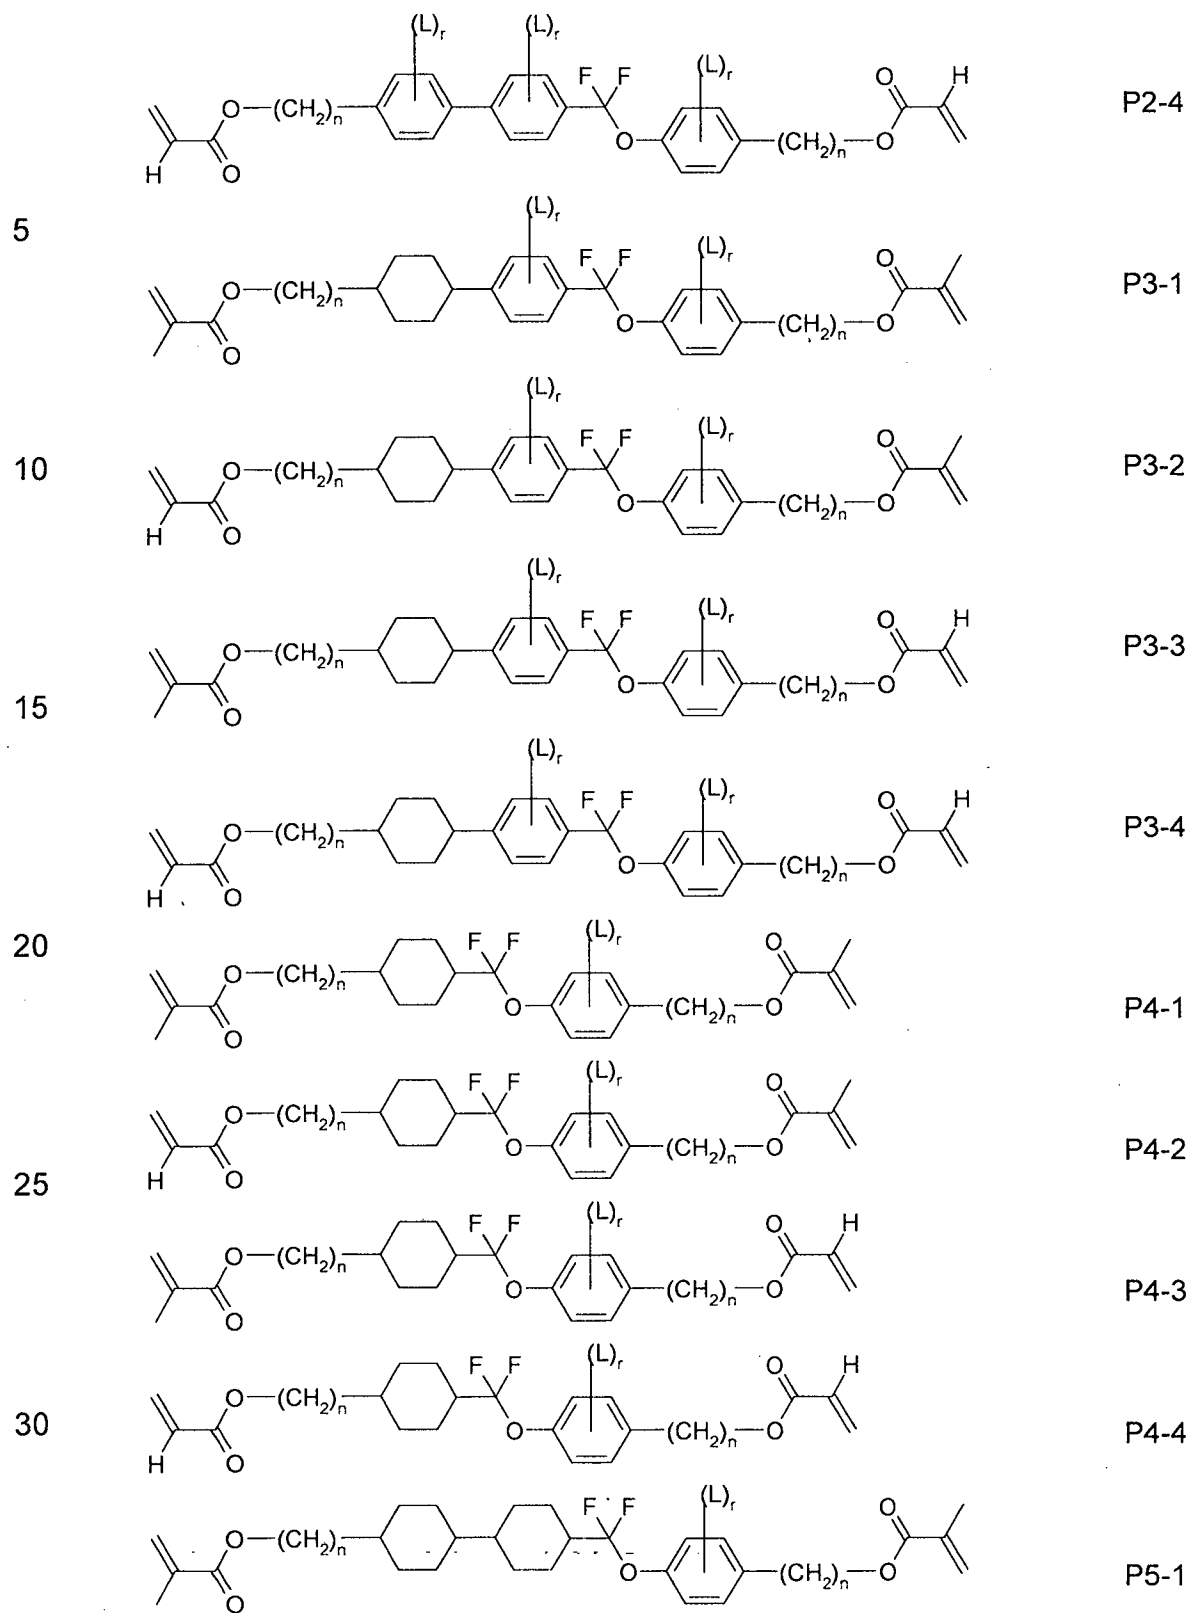

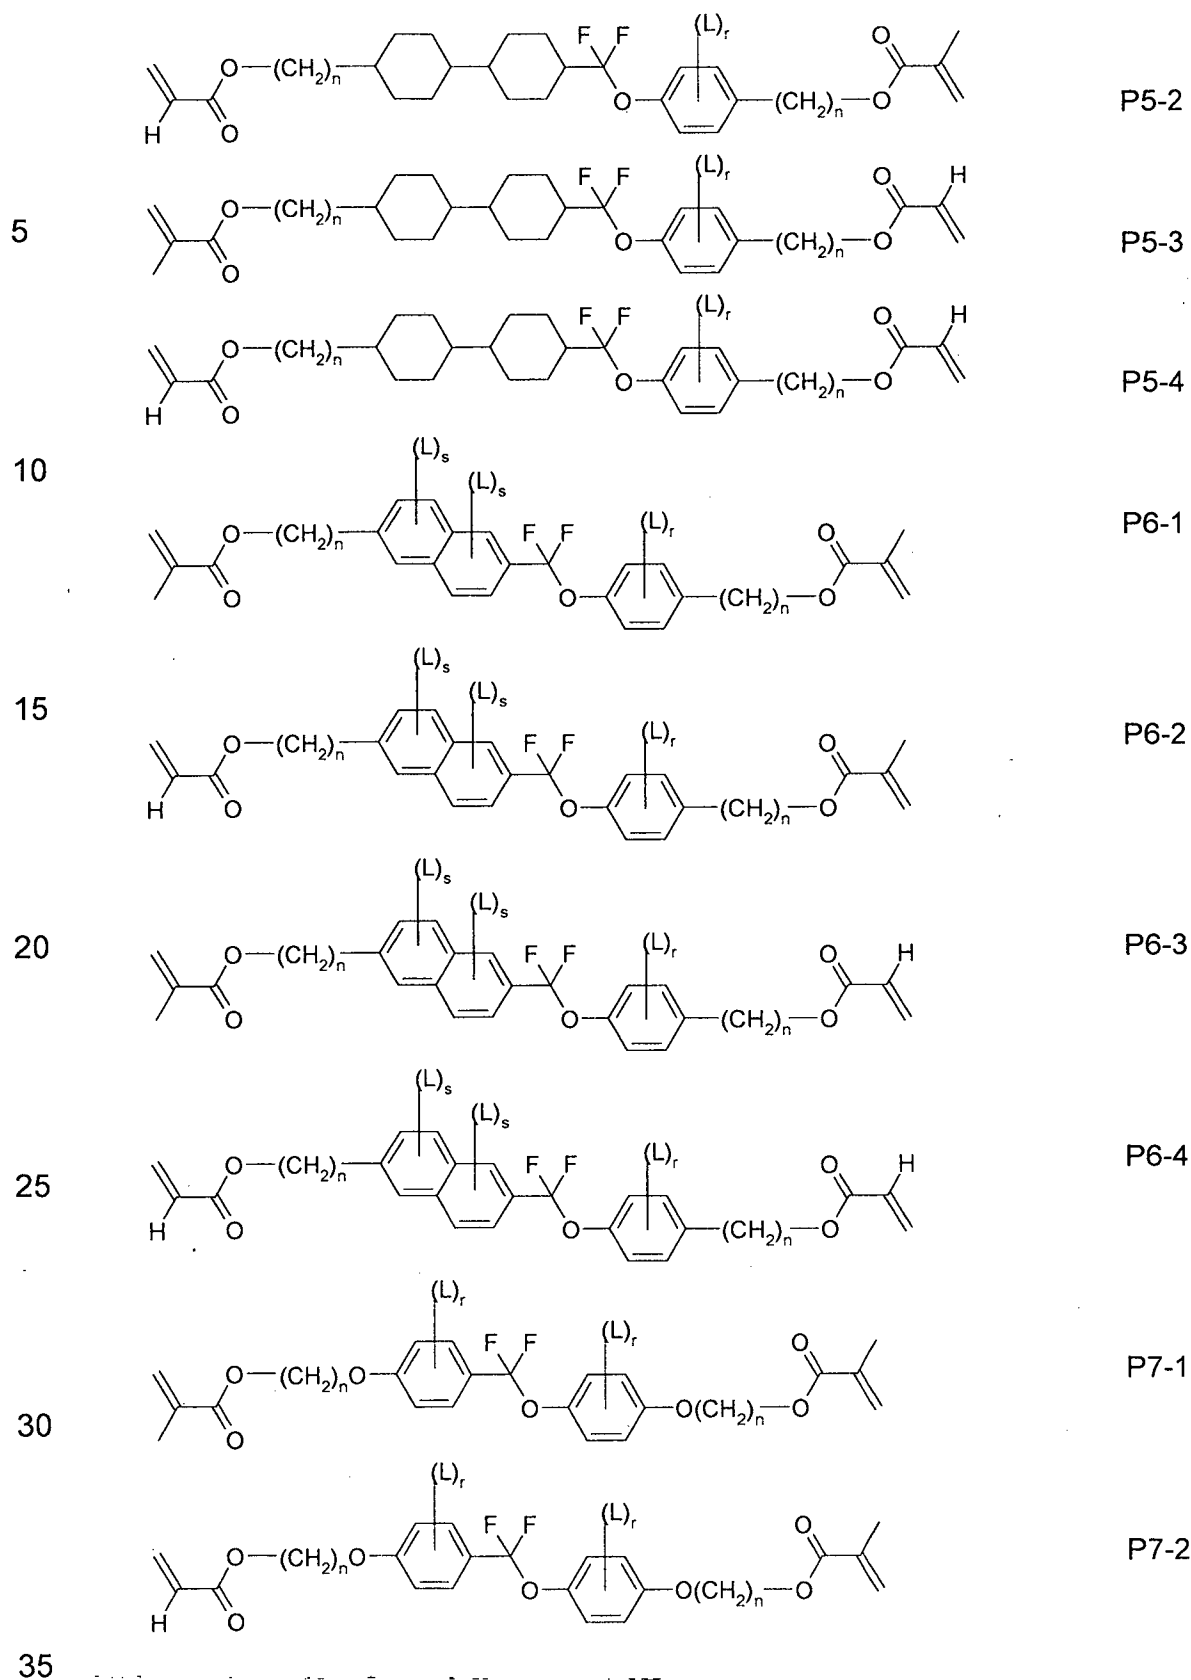


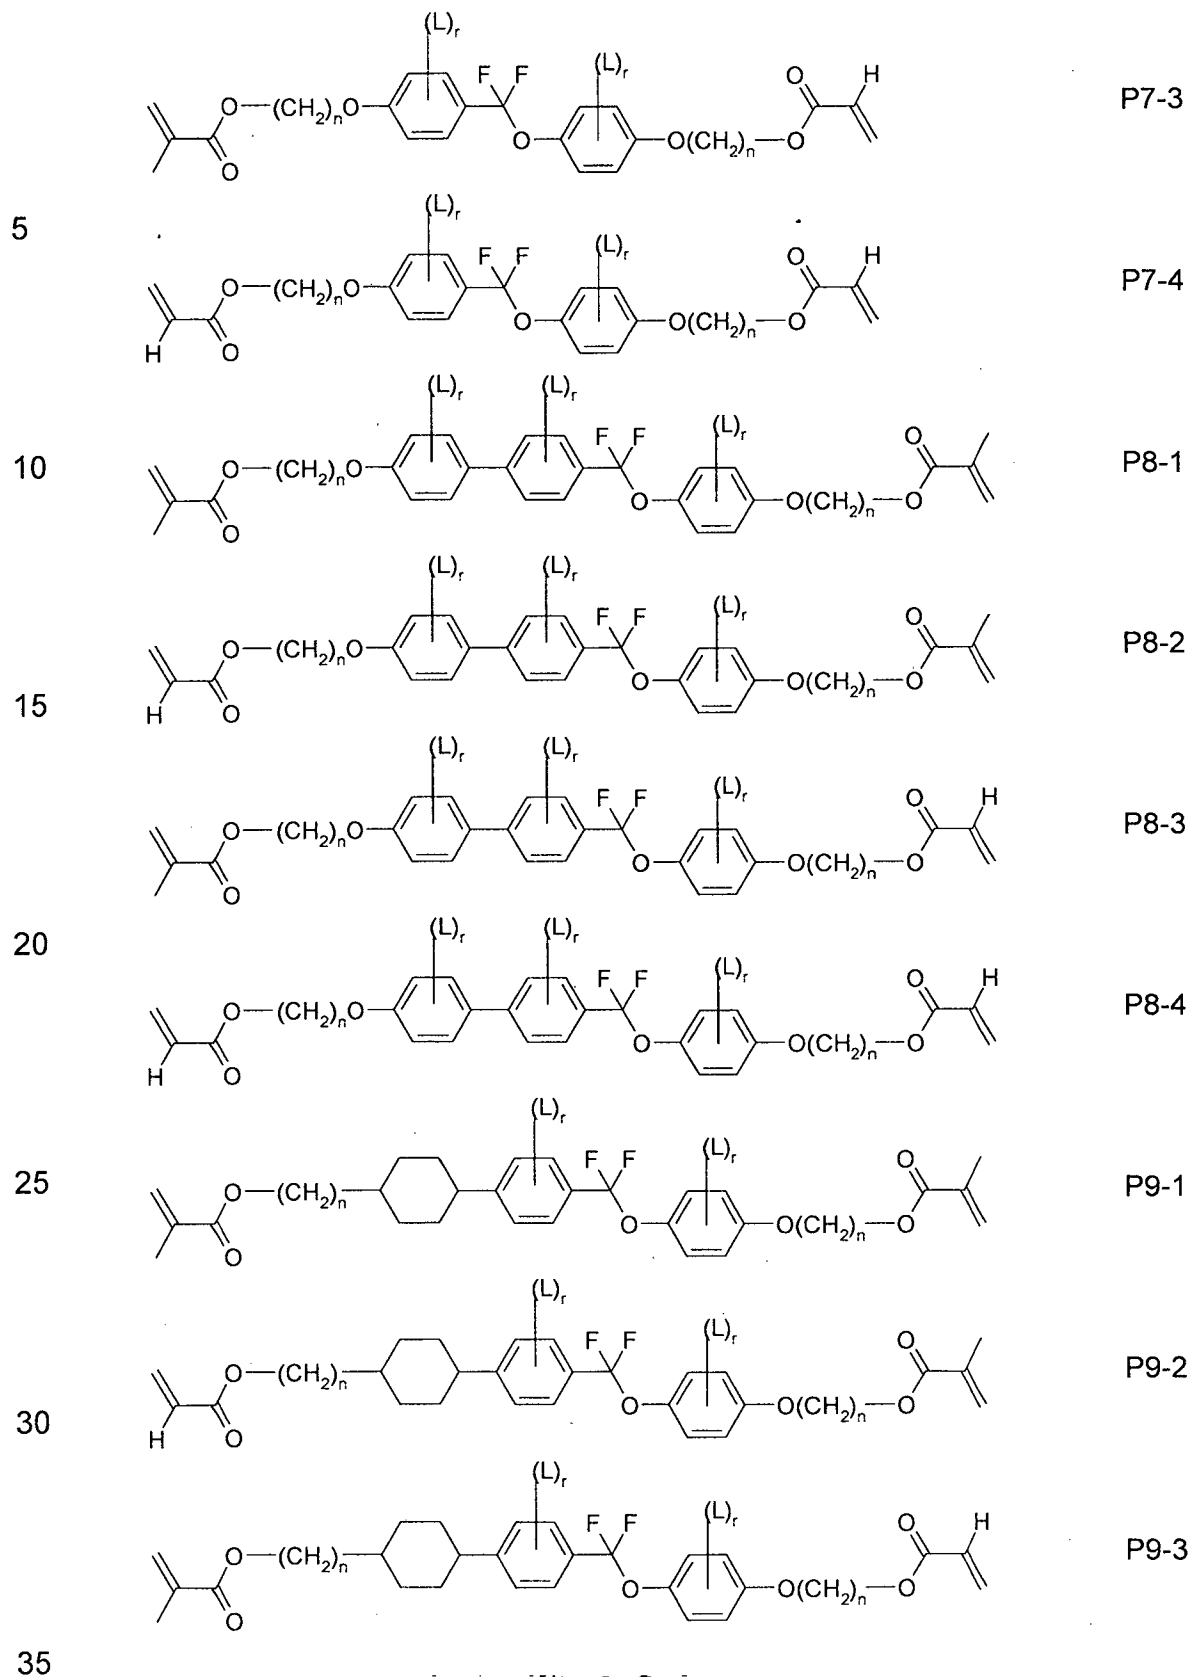


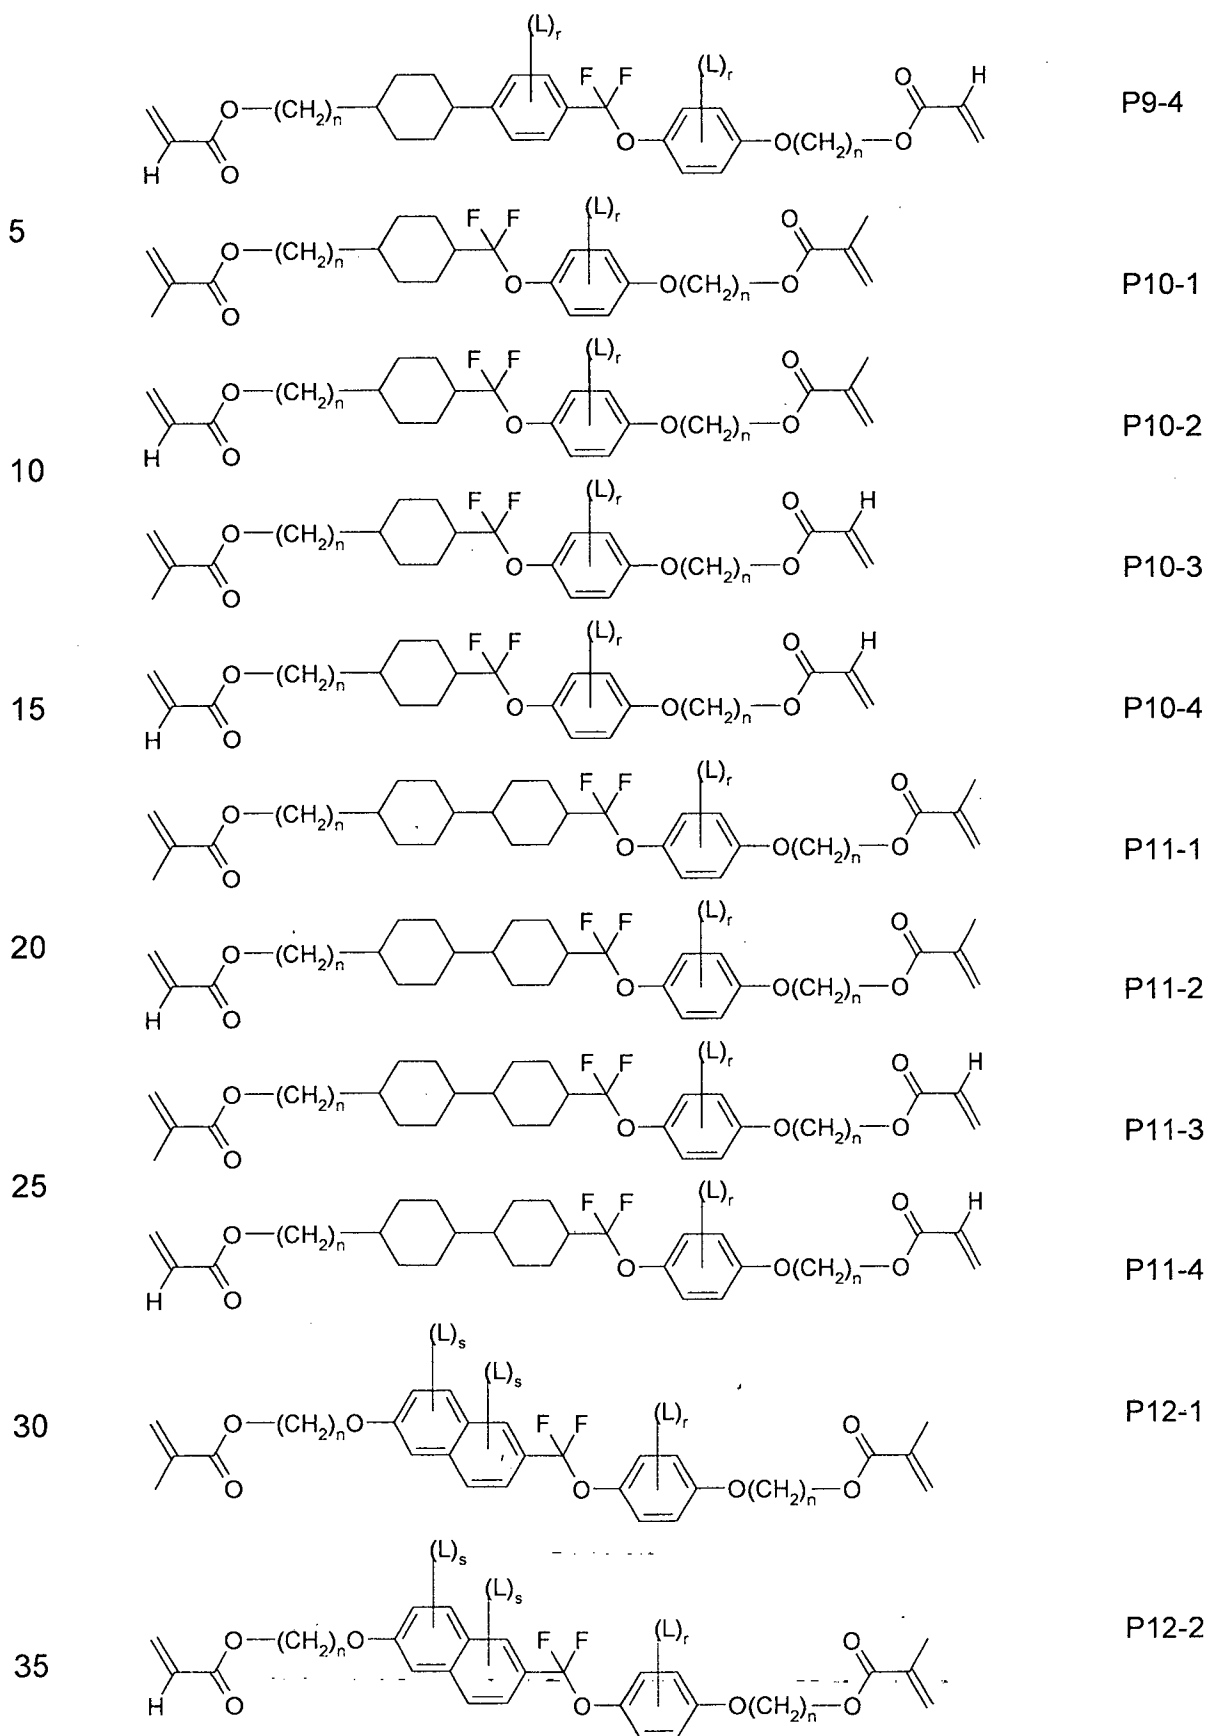

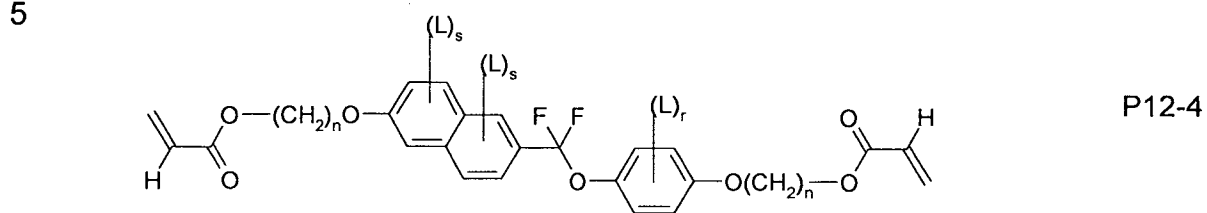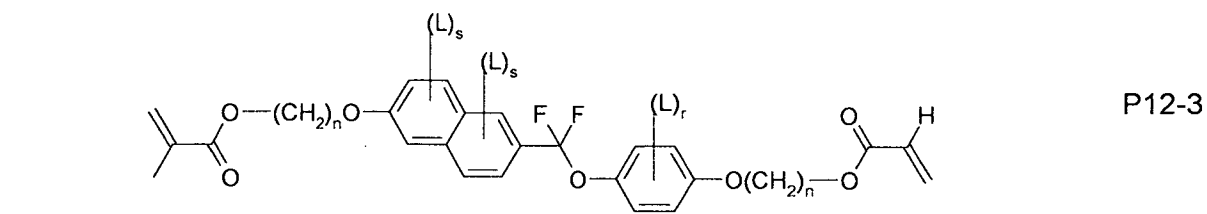


15 wherein L in each occurrence, identically or differently, has one of the meanings indicated above and below, r denotes 0, 1, 2, 3 or 4, s denotes 0, 1, 2 or 3, and n denotes an integer between 1 and 24, preferably between 1 and 12, more preferably between 2 and 8, and in which in case a radical is not indicated at the end of a single or double bond it is a terminal CH<sub>3</sub> or CH<sub>2</sub> group.

20 In the formulae P1-1 to P12-4,  preferably denotes a group selected from the group consisting of the following formulae:

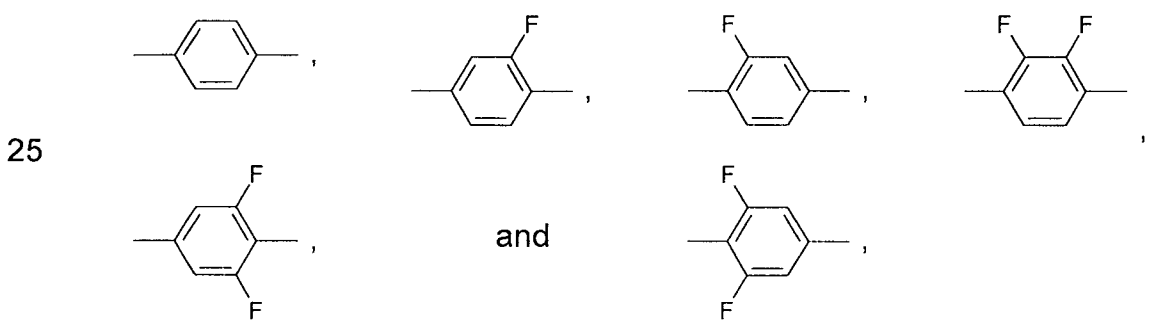


30 particularly preferably selected from

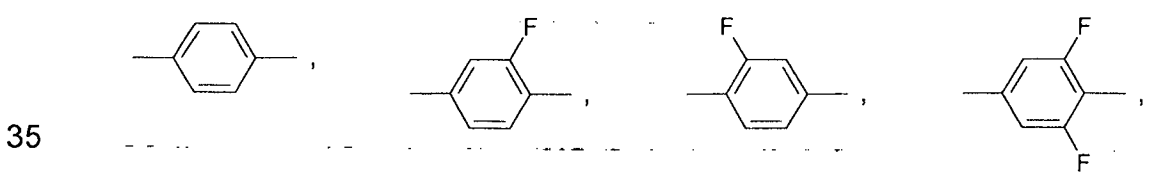


- 24 -

and



5

In formula P the moiety A<sup>2</sup>-Q-A<sup>3</sup> preferably denotes a group of the formula

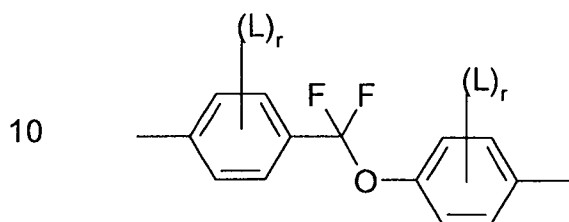

10

in which at least one of the rings is substituted by at least one group with L being F, and wherein r is in each case independently 0, 1, 2, 3 or 4, preferably 0, 1 or 2.

15

P<sup>a</sup> and P<sup>b</sup> in the compounds of formula P and the sub-formulae thereof preferably denote respectively and independently acrylate or methacrylate, furthermore fluoroacrylate.

20

Sp<sup>a</sup> and Sp<sup>b</sup> in the compounds of formula P and the sub-formulae thereof preferably denote a radical selected from the group consisting of -(CH<sub>2</sub>)<sub>p1</sub>-, -(CH<sub>2</sub>)<sub>p1</sub>-O-, -(CH<sub>2</sub>)<sub>p1</sub>-O-CO- and -(CH<sub>2</sub>)<sub>p1</sub>-O-CO-O- and mirror images thereof, in which p1 denotes an integer from 1 to 12, preferably from 1 to 6, particularly preferably 1, 2 or 3, wherein these groups are linked to P<sup>a</sup> or P<sup>b</sup> in such a way that O atoms are not directly adjacent.

25

Compounds of formula P are particularly preferred in which the radicals P<sup>a</sup> and P<sup>b</sup> are selected from the group consisting of vinyloxy, acrylate, methacrylate, fluoroacrylate, chloroacrylate, oxetane and epoxide groups, preferably are acrylate or methacrylate groups, and/or


30


in which the radicals Sp<sup>a</sup> and Sp<sup>b</sup> are selected from the group consisting of -(CH<sub>2</sub>)<sub>p1</sub>-, -(CH<sub>2</sub>)<sub>p1</sub>-O-, -(CH<sub>2</sub>)<sub>p1</sub>-O-CO- and -(CH<sub>2</sub>)<sub>p1</sub>-O-CO-O- and mirror images thereof, in which p1 denotes an integer from 1 to 12, preferably


35

from 1 to 6, particularly preferably 1, 2 or 3, and wherein these radicals are linked to P<sup>a</sup> or P<sup>b</sup> in such a way that O atoms are not directly adjacent.

Compounds of formula P used according to a preferred embodiment of the present invention are those comprising exactly two rings, i.e. wherein n<sub>1</sub> = n<sub>2</sub> = 0, which more preferably are 6-membered rings. Particularly preferred are compounds selected from the group of compounds of the following formulae:

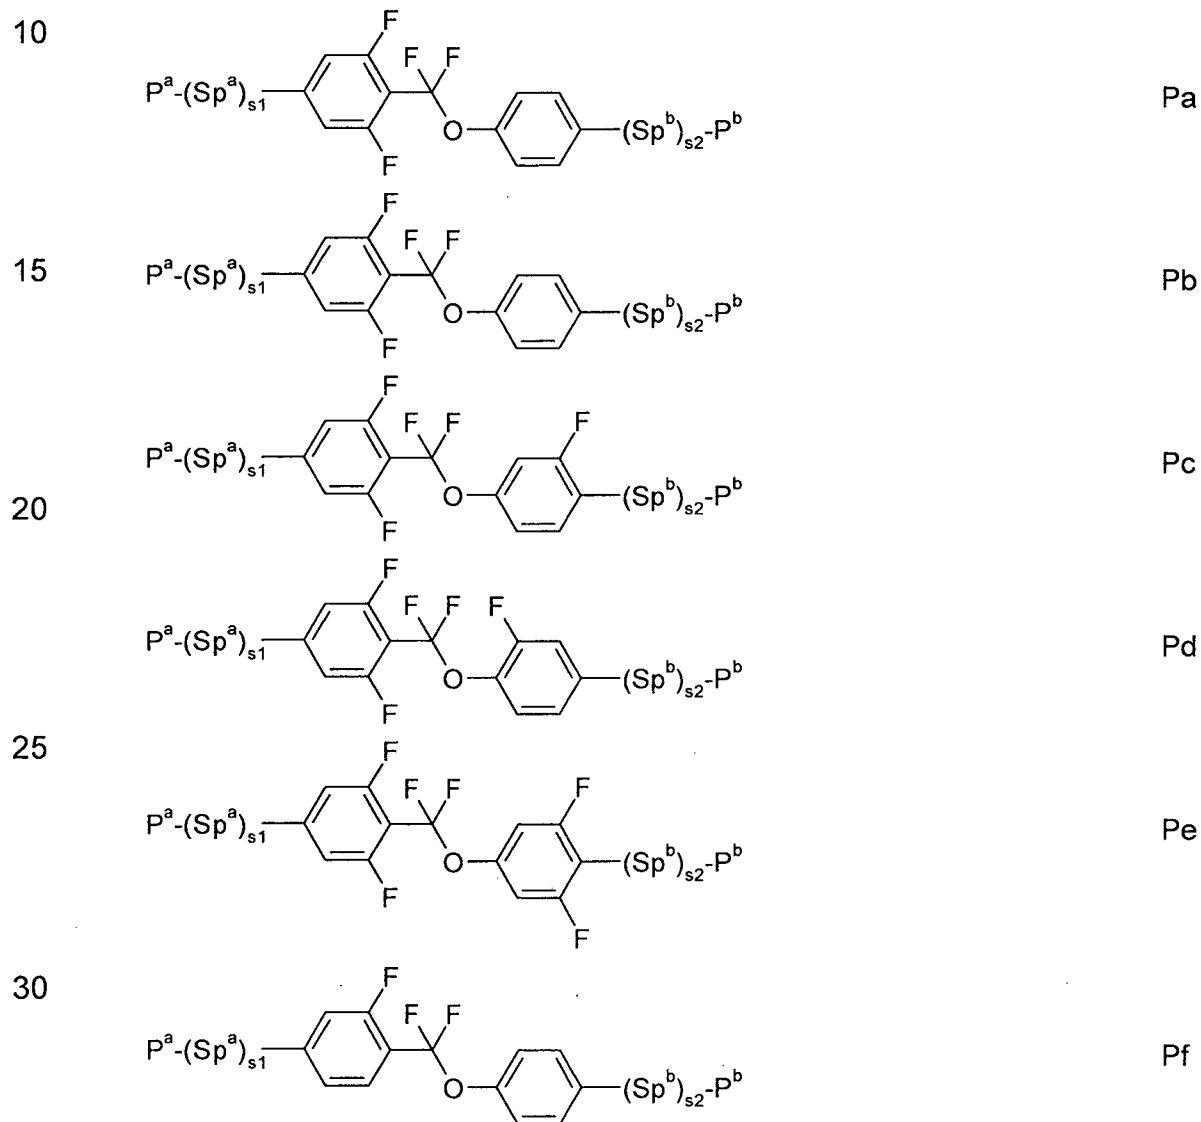

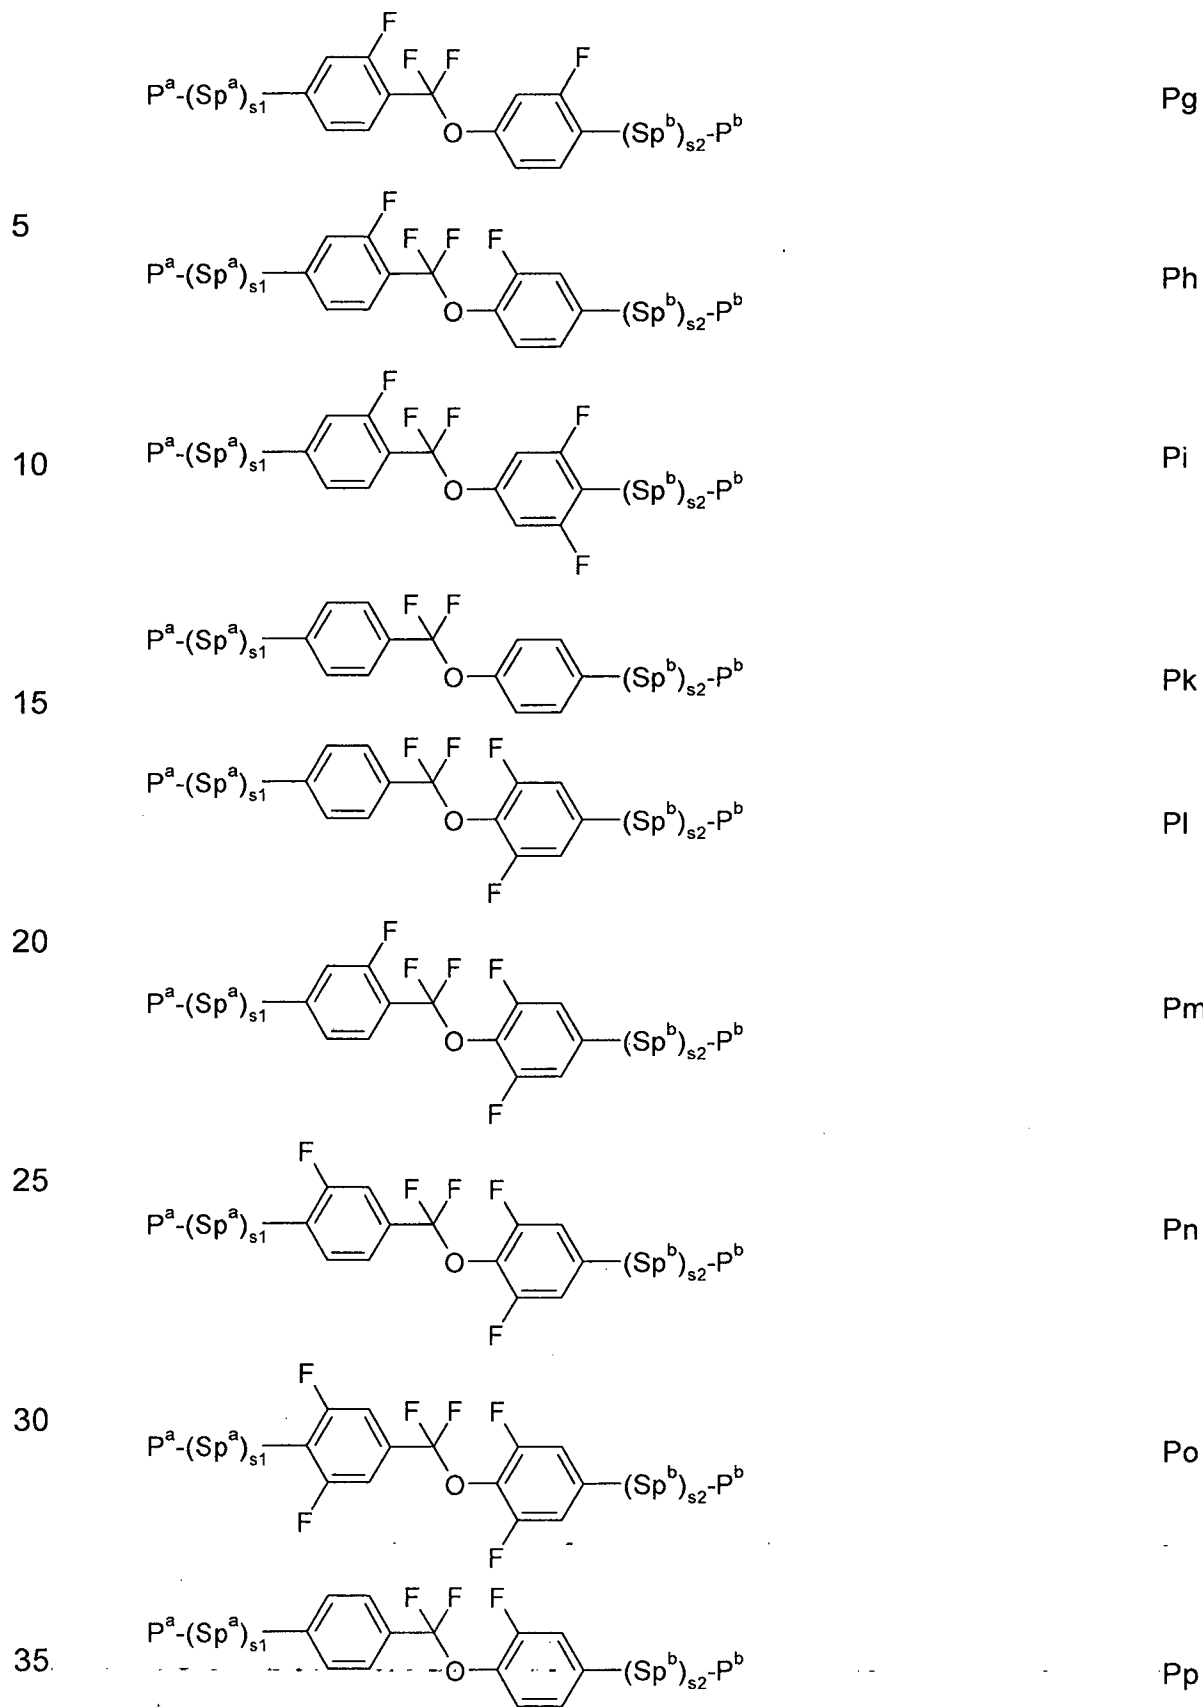

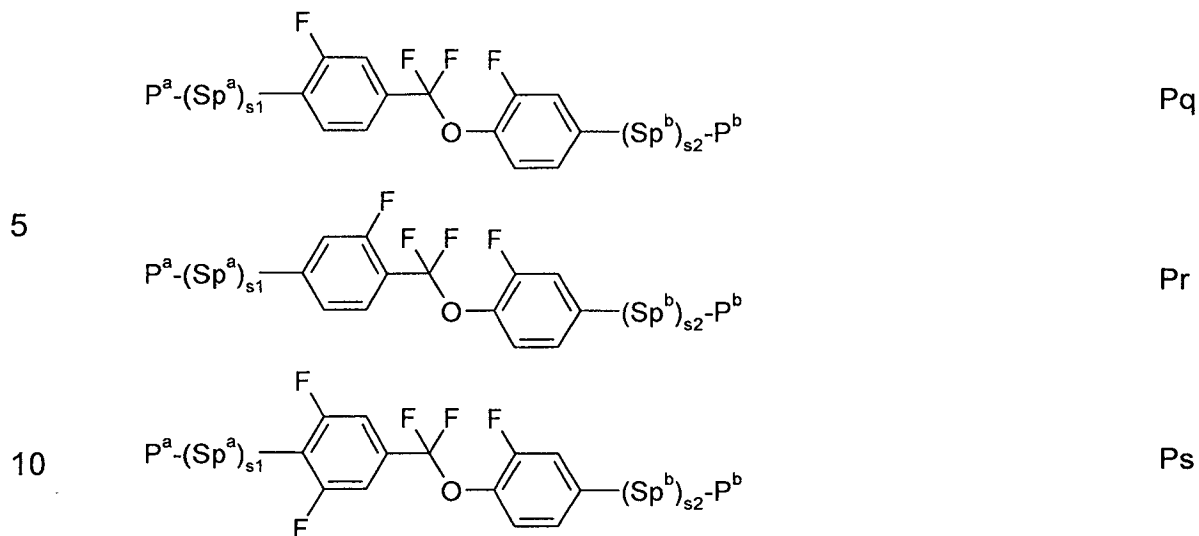



15

20









wherein P<sup>a</sup>, P<sup>b</sup>, Sp<sup>a</sup>, Sp<sup>b</sup>, s<sub>1</sub> and s<sub>2</sub> are as defined under formula P above, and preferably Sp<sup>a</sup> and Sp<sup>b</sup> respectively and independently are alkylene -(CH<sub>2</sub>)<sub>n</sub>-, wherein n preferably is 3, 4, 5, 6 or 7, and P<sup>a</sup> and P<sup>b</sup> in the above formulae respectively and independently preferably are a methacrylate or acrylate moiety. Particularly preferred is the use of compounds selected from the group of formulae Pa, Pb, Pc, Pd, Pe, Pf, Pg, Ph and Pi, and in particular the compounds of formula Pa.









25









Suitable and preferred co-monomers for use in polymer precursors for polymer stabilised devices according to the present invention are selected, for example, from the following formulae:

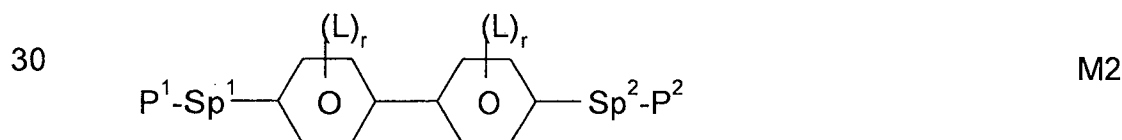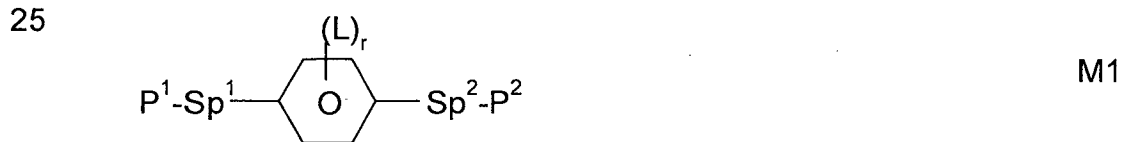


35

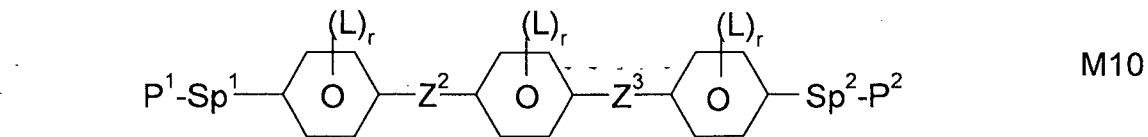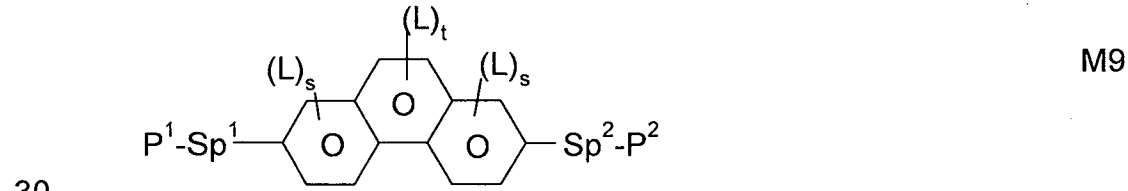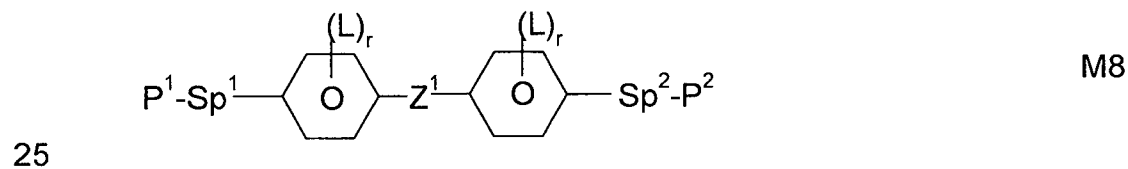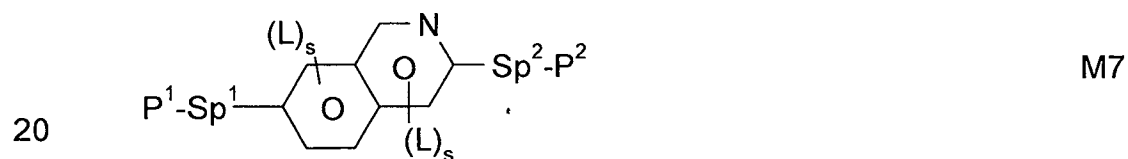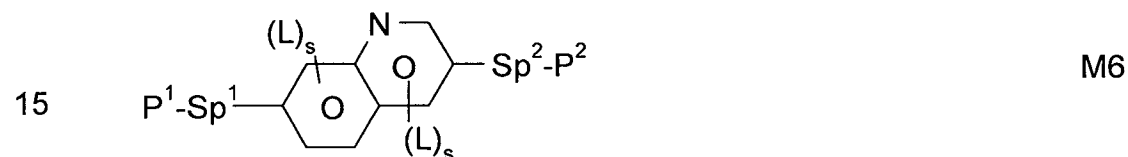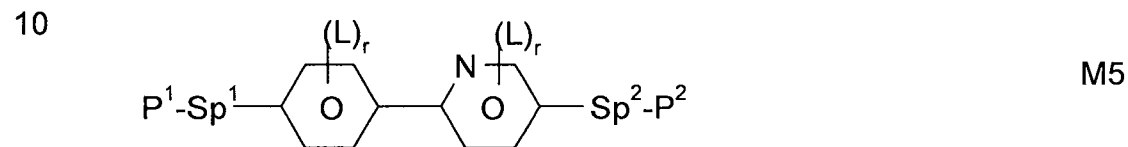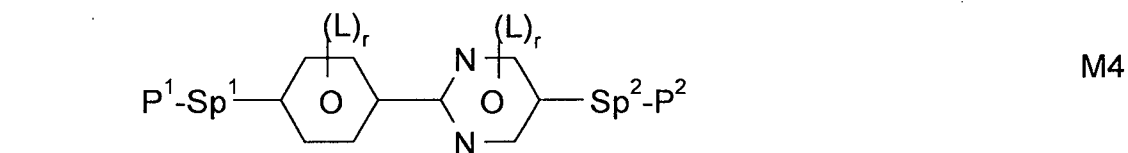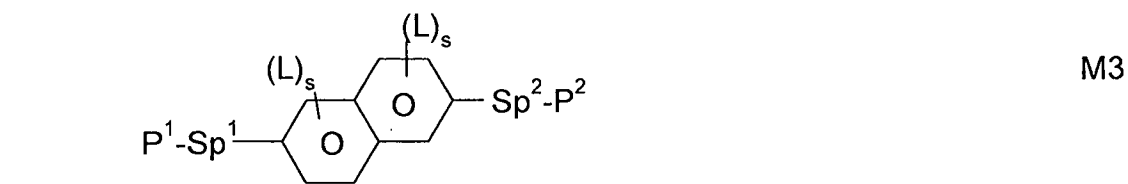

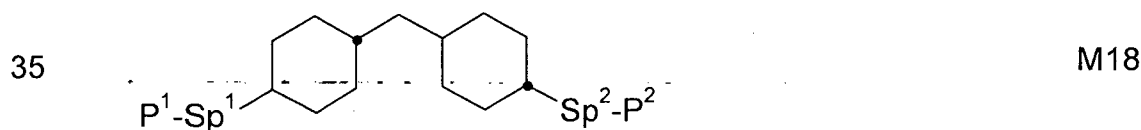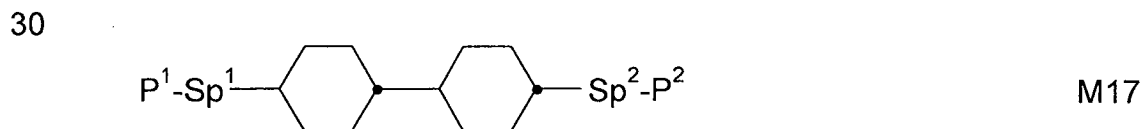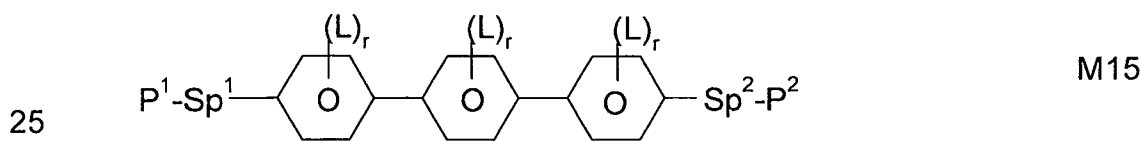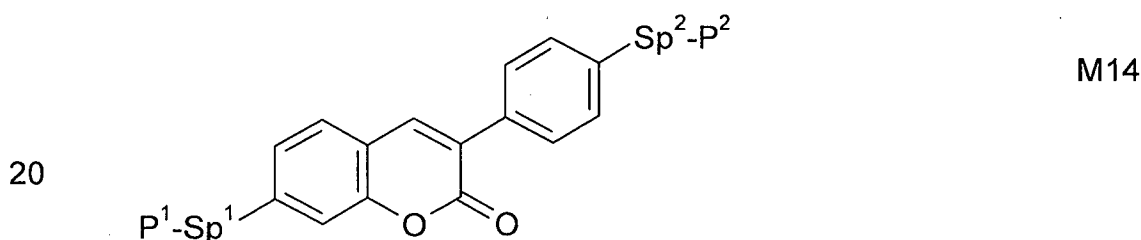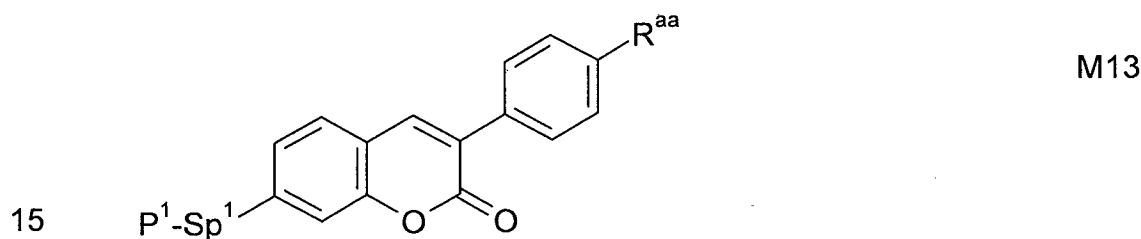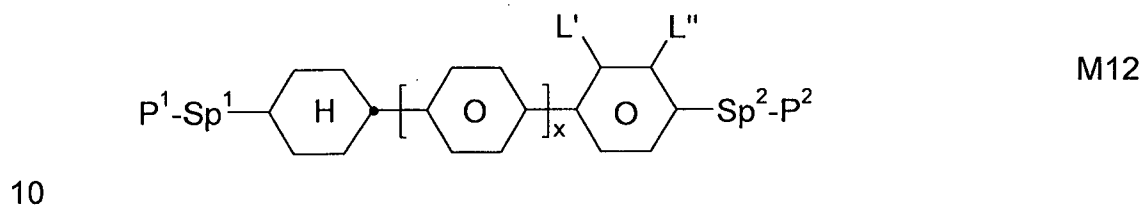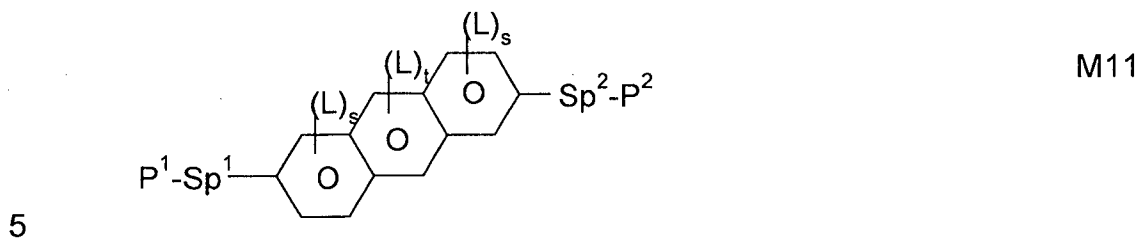


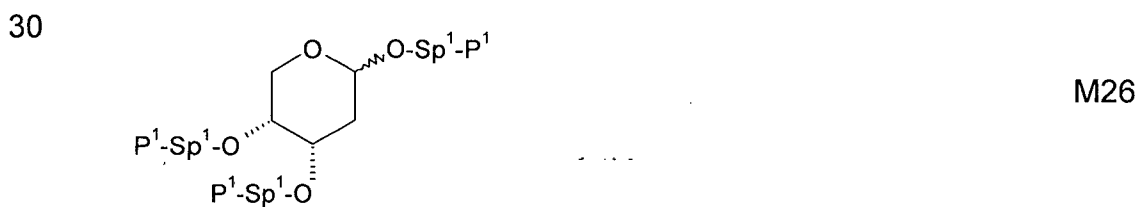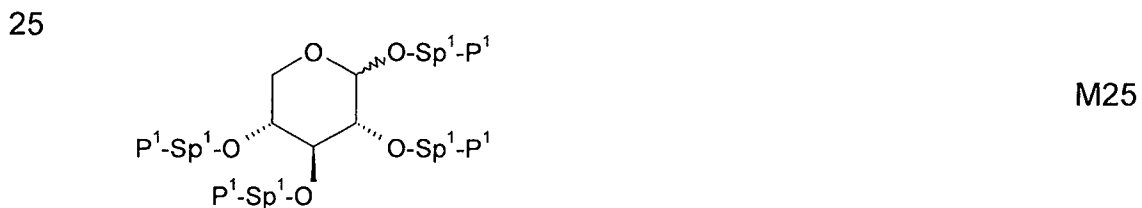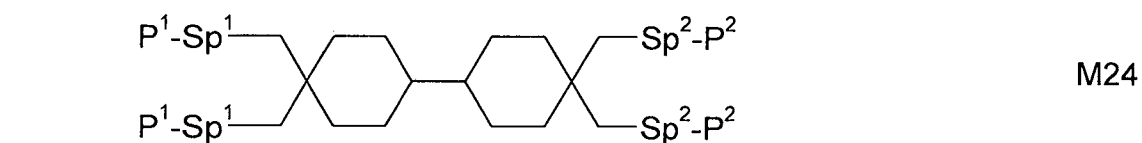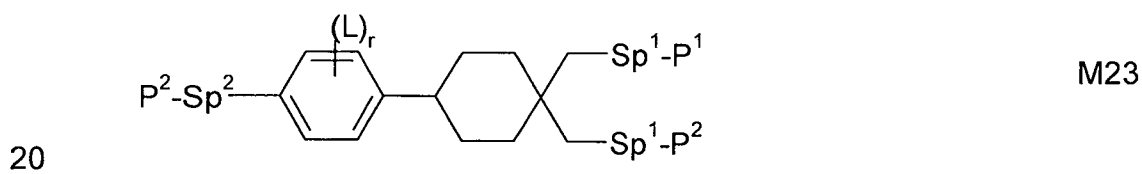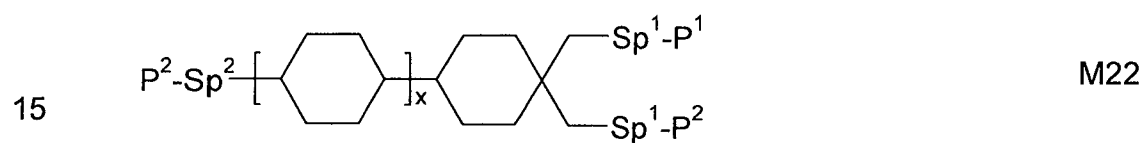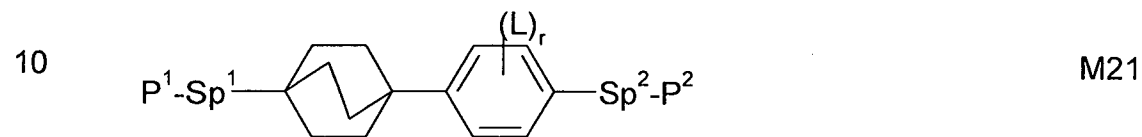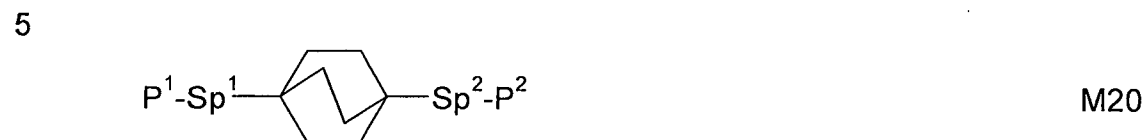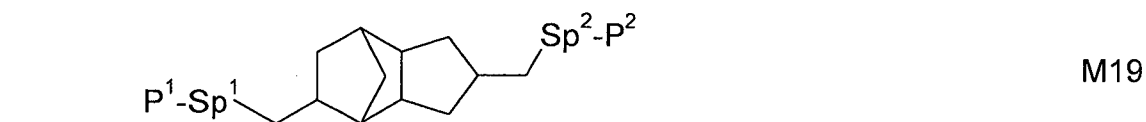




M27

5



M28

10



M29

15

wherein the respective groups have the following meanings:

$P^1$  and  $P^2$  each, independently of one another, denotes a polymerisable group, preferably having one of the meanings given above or below for  $P^a$ , particularly preferably an acrylate, methacrylate, fluoroacrylate, oxetane, vinyloxy or epoxy group,

20

$Sp^1$  and  $Sp^2$  each, independently of one another, denotes a single bond or a spacer group, preferably having one of the meanings given above or below for  $Sp^a$ , particularly preferably  $-(CH_2)_{p1}-$ ,  $-(CH_2)_{p1}-O-$ ,  $-(CH_2)_{p1}-CO-O-$ ,  $-(CH_2)_{p1}-O-CO-$  or  $-(CH_2)_{p1}-O-CO-O-$ , wherein  $p1$  is an integer from 1 to 12, and wherein the groups mentioned last are linked to the adjacent ring via the O-atom,

25

and, wherein alternatively also one or more of  $P^1-Sp^1-$  and  $P^2-Sp^2-$  may be  $R^{aa}$ , provided that at least one of  $P^1-Sp^1-$  and  $P^2-Sp^2-$  present in the compound is not  $R^{aa}$ ,

30


$R^{aa}$  denotes H, F, Cl, CN or linear or branched alkyl having 1 to 25 C atoms, wherein one or more non-adjacent  $-CH_2-$  groups, independently of each other, may be replaced by  $-C(R^0)=C(R^{00})-$ ,  $-C\equiv C-$ ,  $-N(R^0)-$ ,  $-O-$ ,  $-S-$ ,  $-CO-$ ,  $-CO-O-$ ,  $-O-CO-$ ,  $-O-CO-O-$  in such a way that neither O nor S atoms are

35

- 5 directly linked to one another, and wherein also one or more H atoms may be replaced by F, Cl, CN or P<sup>1</sup>-Sp<sup>1</sup>-, particularly preferably linear or branched, optionally single- or polyfluorinated, alkyl, alkoxy, alkenyl, alkinyl, alkylcarbonyl, alkoxy carbonyl, or alkylcarbonyloxy having 1 to 12 C atoms, wherein the alkenyl and alkinyl groups have at least two and the branched groups have at least three C atoms,
- 10 R<sup>0</sup>, R<sup>00</sup> each, at each occurrence independently of one another, denotes H or alkyl having 1 to 12 C atoms,
- Z<sup>1</sup> denotes -O-, -CO-, -C(R<sup>y</sup>R<sup>z</sup>)-, or -CF<sub>2</sub>CF<sub>2</sub>-,
- Z<sup>2</sup> and Z<sup>3</sup> each, independently of one another, denotes -CO-O-, -O-CO-, -CH<sub>2</sub>O-, -OCH<sub>2</sub>-, -CF<sub>2</sub>O-, -OCF<sub>2</sub>-, or -(CH<sub>2</sub>)<sub>n</sub>-, wherein n is 2, 3 or 4,
- 15 R<sup>y</sup> and R<sup>z</sup> each, independently of one another, denotes H, F, CH<sub>3</sub> or CF<sub>3</sub>,
- L at each occurrence independently of one another, denotes F, Cl, CN, SCN, SF<sub>5</sub> or linear or branched, optionally mono- or poly- fluorinated, alkyl, alkoxy, alkenyl, alkinyl, alkylcarbonyl, alkoxy carbonyl, alkylcarbonyloxy or alkoxy carbonyloxy having up to 12 C-atoms, preferably F,
- 20 L' and L'' each, independently of one another, denote H, F or Cl,
- r denotes 0, 1, 2, 3 or 4,
- 25 s denotes 0, 1, 2 or 3,
- t denotes 0, 1 or 2, and
- x denotes 0 or 1.
- 30 Suitable and preferred co-monomers for use in devices according to the present application are for example selected from the group of mono-reactive compounds, which are present in the precursor of the polymer stabilised systems in a concentration in the range from 1 to
- 35 9 wt.-%, particularly preferred from 4 to 7 wt.-%. Preferred mono-reactive compounds are the compounds of formulae M1 to M29, wherein one or


more of P<sup>1</sup>-Sp<sup>1</sup>- and P<sup>2</sup>-Sp<sup>2</sup>- are R<sup>aa</sup>, such that the compounds have a single reactive group only.

5 Particularly preferred mono-reactive compounds are the compounds of the following formulae



wherein P<sup>1</sup>, Sp<sup>1</sup> and R<sup>aa</sup> have the respective meanings given above, and P<sup>1</sup> preferably is acrylate (CH<sub>2</sub>=CH-CO-O-) or methacrylate (CH<sub>2</sub>=C(CH<sub>3</sub>)-CO-O-).

Amongst these compounds, the compounds of formula

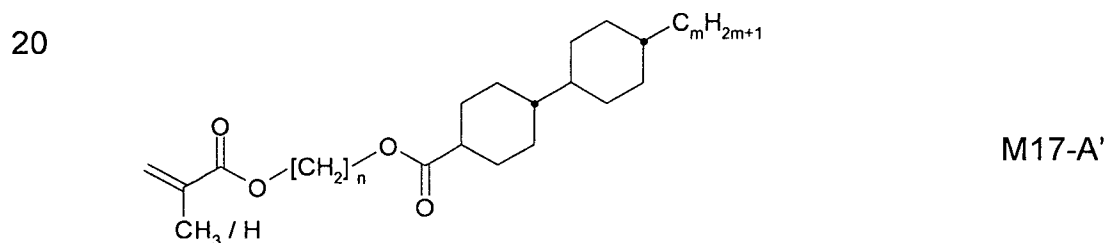


25 wherein

n is an integer, preferably an even integer, in the range from 1 to 16, preferably from 2 to 8,

30 m is an integer in the range from 1 to 15, preferably from 2 to 7, are particularly preferred.

Particular preference is given to an LC medium, an LC device, preferably for high-frequency technology, in particular for a phase shifter or a microwave antenna, e.g. a leaky antenna, a process or the use as

described above and below, in which the LC medium or the polymerisable or polymerised component present therein comprises one or more compounds of the following formula:

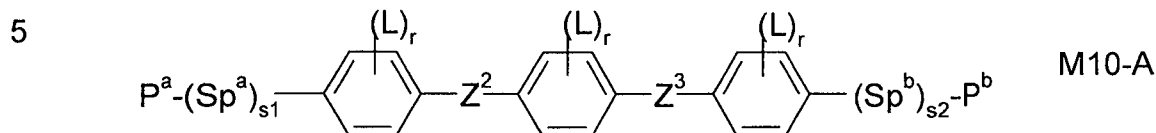

10 in which P<sup>a</sup>, P<sup>b</sup>, Sp<sup>a</sup>, Sp<sup>b</sup>, s<sub>1</sub>, s<sub>2</sub> and L have the meanings indicated above and below, r denotes 0, 1, 2, 3 or 4, and Z<sup>2</sup> and Z<sup>3</sup> each, independently of one another, denote -CF<sub>2</sub>-O- or -O-CF<sub>2</sub>-, preferably Z<sup>2</sup> is -CF<sub>2</sub>-O- and Z<sup>3</sup> is -O-CF<sub>2</sub>- or vice versa or Z<sup>2</sup> is -CO-O- and Z<sup>3</sup> is -O-CO- or vice versa, and most preferably Z<sup>2</sup> is -CF<sub>2</sub>-O- and Z<sup>3</sup> is -O-CF<sub>2</sub>- or Z<sup>2</sup> is -CO-O- and Z<sup>3</sup> is -O-CO-.

15

In an embodiment it is preferable to use reactive mesogens having a cyclohexylene core instead of a core comprising one or more 1,4-phenylenes. This can be advantageous in terms of stability against UV irradiation in general and in particular against UV irradiation used during polymerisation. The resultant polymer stabilised phase, i.e. the composite system, can have an improved or a suitably high voltage holding ratio (VHR).

20

25 Furthermore, it has been found that by using cyclohexylene reactive mesogens in combination with a liquid liquid crystalline host comprising fluorophenyl liquid crystalline compounds, this host can be effectively stabilised by the reactive mesogens to give a high VHR, which is particularly beneficial for the use in advanced devices.

30

In an embodiment the liquid-crystalline medium according to the invention comprises one or more compounds of formula I as set forth above. In another embodiment the liquid-crystalline medium according to the invention comprises one or more compounds of formula II as set forth above. In a further embodiment the liquid-crystalline medium according to

35 the invention comprises one or more compounds of formula III as set forth above.

More preferably however the liquid-crystalline media according to the present invention comprise

- 5 - one or more compounds of formula I and  
 - one or more compounds of formula II

or

- 10 - one or more compounds of formula I and  
 - one or more compounds of formula III


or

- 15 - one or more compounds of formula II and  
 - one or more compounds of formula III

or, most preferably,

- 20 - one or more compounds of formula I and  
 - one or more compounds of formula II and  
 - one or more compounds of formula III.


Additionally the liquid-crystalline media used according to the present invention in a particular embodiment preferably comprise one or more  
 25 compounds of formula IV,





IV

in which

30




denotes




35

5


preferably

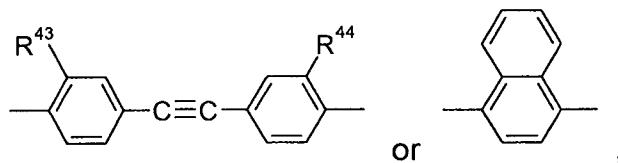


10

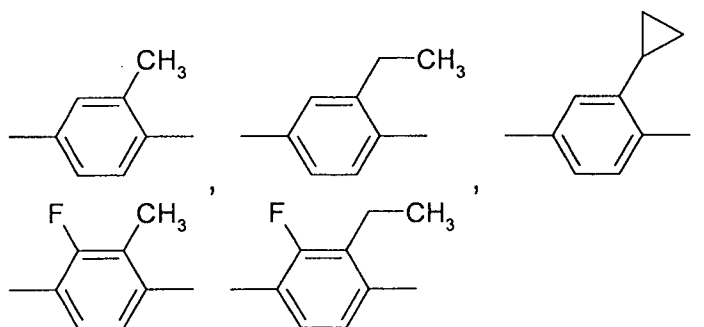

15

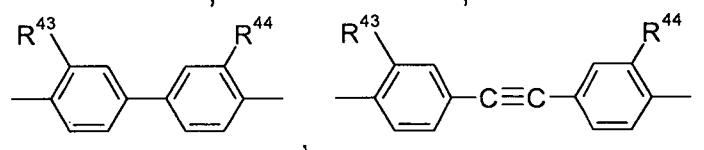


20




particularly preferably

25

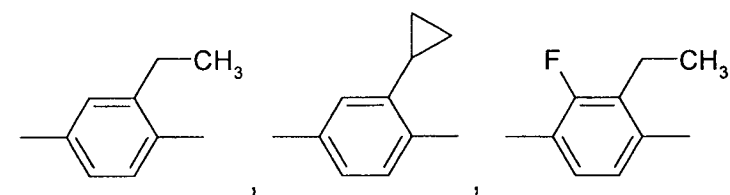

30

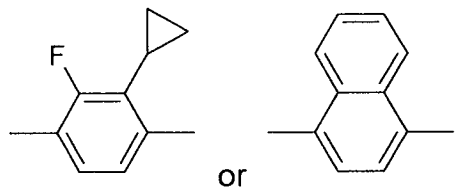

35

L<sup>4</sup>

denotes alkyl having 1 to 6 C atoms, cycloalkyl having 3 to 6 C atoms or cycloalkenyl having 4 to 6 C atoms, preferably CH<sub>3</sub>, C<sub>2</sub>H<sub>5</sub>, *n*-C<sub>3</sub>H<sub>7</sub> (-(CH<sub>2</sub>)<sub>2</sub>CH<sub>3</sub>), *i*-C<sub>3</sub>H<sub>7</sub>

(-CH(CH<sub>3</sub>)<sub>2</sub>), cyclopropyl, cyclobutyl, cyclohexyl, cyclopent-1-enyl or cyclohex-1-enyl, and particularly preferably CH<sub>3</sub>, C<sub>2</sub>H<sub>5</sub>, cyclopropyl or cyclobutyl,

- 5        X<sup>4</sup>                denotes H, alkyl having 1 to 3 C atoms or halogen, preferably H, F or Cl, and more preferably H or F and most preferably F,
- 10        R<sup>41</sup> to R<sup>44</sup>            independently of one another denote unfluorinated alkyl or unfluorinated alkoxy, each having 1 to 15 C atoms, unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl, each having 2 to 15 C atoms, or cycloalkyl, alkylcycloalkyl, cycloalkenyl, alkylcycloalkenyl, alkylcycloalkylalkyl or alkylcycloalkenylalkyl, each having up to 15 C atoms, and alternatively one of R<sup>43</sup> and R<sup>44</sup> or both also denote H,
- 15        preferably
- 20        R<sup>41</sup> and R<sup>42</sup>            independently of one another denote unfluorinated alkyl or unfluorinated alkoxy, each having 1 to 7 C atoms, or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl, each having 2 to 7 C atoms,
- 25        particularly preferably
- 30        R<sup>41</sup>                denotes unfluorinated alkyl having 1 to 7 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl, each having 2 to 7 C atoms, and
- 35        particularly preferably
- 40        R<sup>42</sup>                denotes unfluorinated alkyl or unfluorinated alkoxy, each having 1 to 7 C atoms, and
- 45        preferably
- 50        R<sup>43</sup> and R<sup>44</sup>            denote H, unfluorinated alkyl having 1 to 5 C atoms, unfluorinated cycloalkyl or cycloalkenyl having 3 to 7 C

atoms, unfluorinated alkylcyclohexyl or unfluorinated cyclohexylalkyl, each having 4 to 12 C atoms, or unfluorinated alkylcyclohexylalkyl having 5 to 15 C atoms, more preferably cyclopropyl, cyclobutyl or cyclohexyl, and even more preferably at least one of R<sup>43</sup> and R<sup>44</sup> denotes *n*-alkyl, particularly preferably methyl, ethyl or *n*-propyl, and the other denotes H or *n*-alkyl, particularly preferably H, methyl, ethyl or *n*-propyl.

5

10

15

Preferably, the liquid crystal media contain one or more chiral dopants, preferably having an absolute value of the helical twisting power (HTP) of 20  $\mu\text{m}^{-1}$  or more, more preferably of 40  $\mu\text{m}^{-1}$  or more, even more preferably in the range of 60  $\mu\text{m}^{-1}$  or more, and most preferably in the range of 80  $\mu\text{m}^{-1}$  or more to 260  $\mu\text{m}^{-1}$  or less.

20

25

30

Therefore, in a preferred embodiment a chiral component consisting of one or more chiral compounds may additionally be present in the mesogenic media according to the present invention. The chiral compounds of this chiral component used, in case present, preferably have a high absolute value of the HTP. They are also referred to as chiral dopants since they are generally added in relatively low concentrations to mesogenic base mixtures. They preferably have good solubility in the achiral component. They do not impair the mesogenic or liquid-crystalline properties of the mesogenic medium, or only do so to a small extent, so long as the cholesteric pitch has small values which are much smaller than the wavelength of the light. If the cholesteric pitch is in the order of the wavelength of the light, however, they induce a blue phase having a completely different structure to that of the cholesteric phase. If two or more chiral compounds are employed, they may have the same or opposite direction of rotation and the same or opposite temperature dependence of the twist.

35

Particular preference is given to chiral compounds having an HTP of 20  $\mu\text{m}^{-1}$  or more, in particular of 40  $\mu\text{m}^{-1}$  or more, particularly preferably of

70  $\mu\text{m}^{-1}$  or more, in the commercial liquid-crystal mixture MLC-6828 from Merck KGaA.

5 In a preferred embodiment of the present invention, the chiral component consists of two or more chiral compounds which all have the same sign of the HTP.

10 The temperature dependence of the HTP of the individual compounds may be high or low. The temperature dependence of the pitch of the medium can be compensated by mixing compounds having different temperature dependence of the HTP in corresponding ratios.

15 For the optically active component, a multiplicity of chiral dopants, some of which are commercially available, is available to the person skilled in the art, such as, for example, cholesteryl nonanoate, R/S-811, R/S-1011, R/S-2011, R/S-3011, R/S-4011, B(OC)<sub>2</sub>C\*H-C-3 or CB15 (all Merck KGaA, Darmstadt).

20 Particularly suitable chiral dopants are compounds which contain one or more chiral radicals and one or more mesogenic groups, or one or more aromatic or alicyclic groups which form a mesogenic group with the chiral radical.

25 Suitable chiral radicals are, for example, chiral branched hydrocarbon radicals, chiral ethanediols, binaphthols or dioxolanes, furthermore mono- or polyvalent chiral radicals selected from the group consisting of sugar derivatives, sugar alcohols, sugar acids, lactic acids, chiral substituted glycols, steroid derivatives, terpene derivatives, amino acids or sequences of a few, preferably 1-5, amino acids.

30 Preferred chiral radicals are sugar derivatives, such as glucose, mannose, galactose, fructose, arabinose and dextrose; sugar alcohols, such as, for example, sorbitol, mannitol, iditol, galactitol or anhydro derivatives thereof, in particular dianhydrohexitols, such as dianhydrosorbide (1,4:3,6-  
35 dianhydro-D-sorbide, isosorbide), dianhydromannitol (isosorbitol) or dianhydroiditol (isoiditol); sugar acids, such as, for example, gluconic acid,

gulonic acid and ketogulonic acid; chiral substituted glycol radicals, such as, for example, mono- or oligoethylene or propylene glycols, wherein one or more CH<sub>2</sub> groups are substituted by alkyl or alkoxy; amino acids, such as, for example, alanine, valine, phenylglycine or phenylalanine, or sequences of from 1 to 5 of these amino acids; steroid derivatives, such as, for example, cholesteryl or cholic acid radicals; terpene derivatives, such as, for example, menthyl, neomenthyl, campheyl, pineyl, terpineyl, isolongifolyl, fenchyl, carreyl, myrthenyl, nopyl, geraniyl, linaloyl, neryl, citronellyl or dihydrocitronellyl.

5


Suitable chiral radicals and mesogenic chiral compounds are described, for example, in DE 34 25 503, DE 35 34 777, DE 35 34 778, DE 35 34 779 and DE 35 34 780, DE 43 42 280, EP 01 038 941 and DE 195 41 820.

15


Chiral compounds preferably used according to the present invention are selected from the group consisting of the formulae shown below.

Particular preference is given to dopants selected from the group consisting of compounds of the following formulae A-I to A-III:


20



25

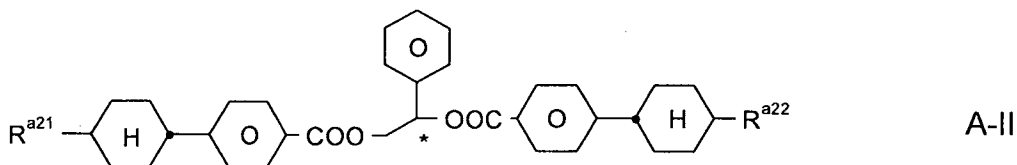

30

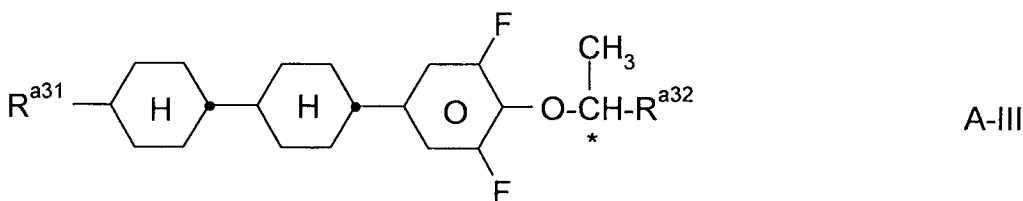

35

in which

R<sup>a11</sup> and R<sup>a12</sup>, independently of one another, are alkyl, oxaalkyl or alkenyl having from 2 to 9 C atoms, preferably up to 7 C atoms, and R<sup>a11</sup> is alternatively methyl or alkoxy having from 1 to 9 C atoms, preferably both are alkyl, preferably n-alkyl,

5




R<sup>a21</sup> and R<sup>a22</sup>, independently of one another, are alkyl or alkoxy having from 1 to 9 C atoms, preferably up to 7 C atoms, oxaalkyl, alkenyl or alkenyloxy having from 2 to 9 C atoms, preferably up to 7 C atoms, preferably both are alkyl, preferably n-alkyl,

10

R<sup>a31</sup> and R<sup>a32</sup>, independently of one another, are alkyl, oxaalkyl or alkenyl having from 2 to 9 C atoms, preferably up to 7 C atoms, and R<sup>a11</sup> is alternatively methyl or alkoxy having from 1 to 9 C atoms, preferably both are alkyl, preferably n-alkyl.






15

Particular preference is given to dopants selected from the group consisting of the compounds of the following formulae:

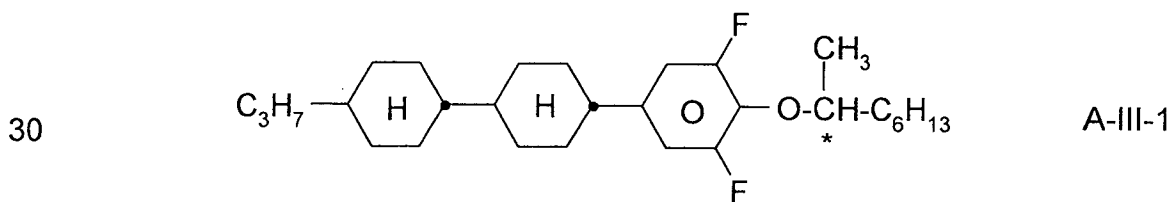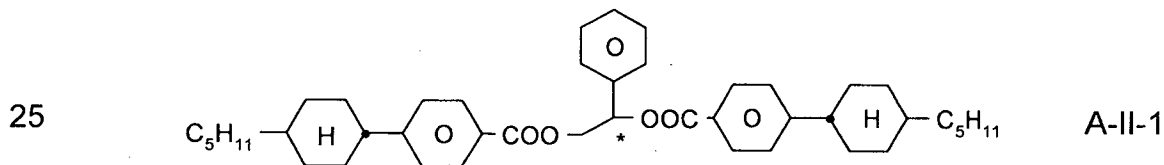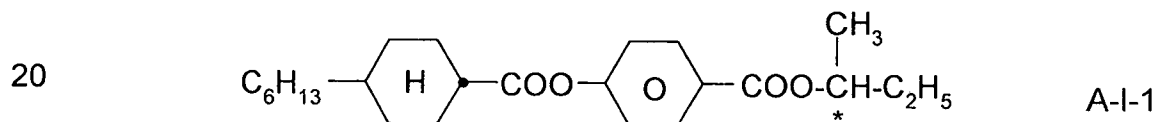


Further preferred dopants are derivatives of the isosorbide, isomannitol or isoiditol of the following formula A-IV:

35

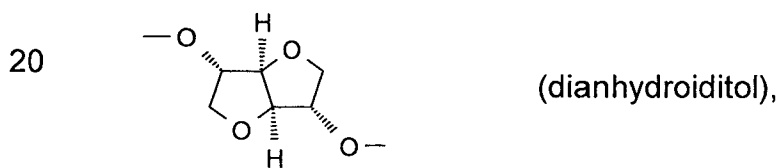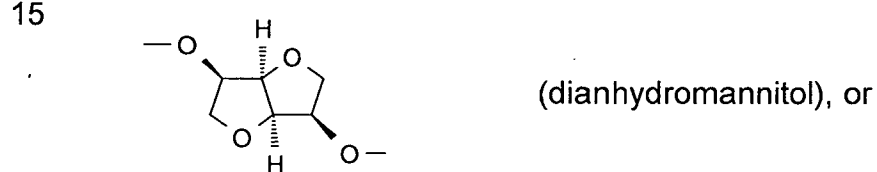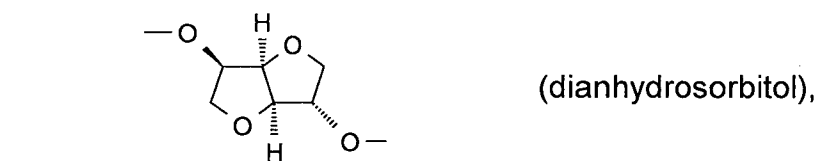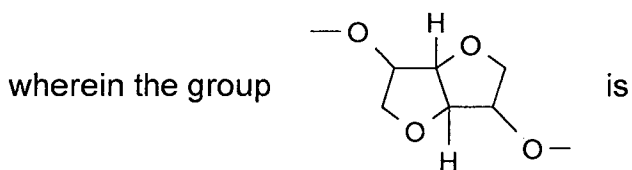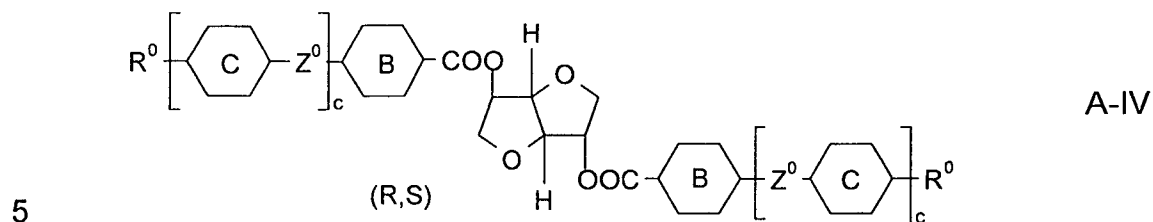

preferably dianhydrosorbitol,


and chiral ethanediols, such as, for example, diphenylethanediol (hydrobenzoin), in particular mesogenic hydrobenzoin derivatives of the following formula A-V:

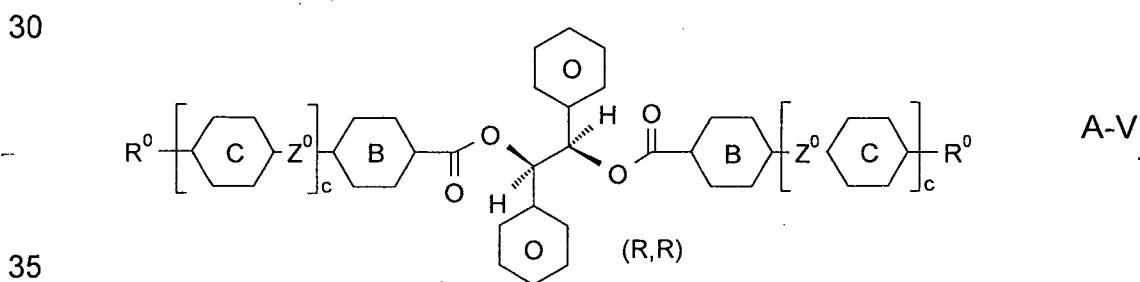

including the (R,S), (S,R), (R,R) and (S,S) enantiomers, which are not shown,

wherein

5



and

10



are each, independently of one another, 1,4-phenylene, which may also be mono-, di- or trisubstituted by L, or 1,4-cyclohexylene,

15

L is H, F, Cl, CN or optionally halogenated alkyl, alkoxy, alkylcarbonyl, alkoxy carbonyl or alkoxy carbonyloxy having 1-7 C atoms,

c is 0 or 1,

20

Z<sup>0</sup> is -COO-, -OCO-, -CH<sub>2</sub>CH<sub>2</sub>- or a single bond, and

R<sup>0</sup> is alkyl, alkoxy, alkylcarbonyl, alkoxy carbonyl or alkylcarbonyloxy having 1-12 C atoms.

25


The compounds of the formula A-IV are described in WO 98/00428. The compounds of the formula A-V are described in GB-A-2,328,207.

30

Very particularly preferred dopants are chiral binaphthyl derivatives, as described in WO 02/94805, chiral binaphthol acetal derivatives, as described in WO 02/34739, chiral TADDOL derivatives, as described in WO 02/06265, and chiral dopants having at least one fluorinated bridging group and a terminal or central chiral group, as described in WO 02/06196 and WO 02/06195.

35

Particular preference is given to chiral compounds of the formula A-VI

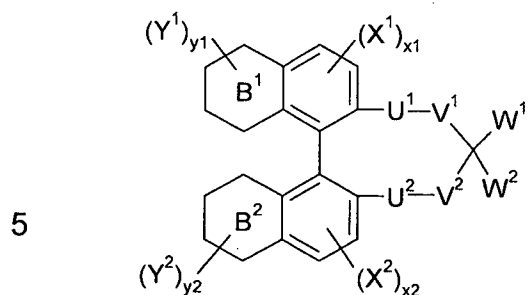

wherein

10  $X^1$ ,  $X^2$ ,  $Y^1$  and  $Y^2$  are each, independently of one another, F, Cl, Br, I, CN, SCN, SF<sub>5</sub>, straight-chain or branched alkyl having from 1 to 25 C atoms, which may be monosubstituted or polysubstituted by F, Cl, Br, I or CN and in which, in addition, one or more non-adjacent CH<sub>2</sub> groups may each, independently of one another,  
 15 be replaced by -O-, -S-, -NH-, NR<sup>0</sup>-, -CO-, -COO-, -OCO-, -OCOO-, -S-CO-, -CO-S-, -CH=CH- or -C≡C- in such a way that O and/or S atoms are not bonded directly to one another, a polymerisable group or cycloalkyl or aryl having up to 20 C atoms, which may optionally be monosubstituted or  
 20 polysubstituted by halogen, preferably F, or by a polymerisable group,


$x^1$  and  $x^2$  are each, independently of one another, 0, 1 or 2,

25  $y^1$  and  $y^2$  are each, independently of one another, 0, 1, 2, 3 or 4,

$B^1$  and  $B^2$  are each, independently of one another, an aromatic or partially or fully saturated aliphatic six-membered ring in which one or more CH groups may be replaced by N atoms and one or more non-adjacent CH<sub>2</sub> groups may be replaced by O and/or S,  
 30

$W^1$  and  $W^2$  are each, independently of one another, -Z<sup>1</sup>-A<sup>1</sup>-(Z<sup>2</sup>-A<sup>2</sup>)<sub>m</sub>-R, and one of the two is alternatively R<sup>1</sup> or A<sup>3</sup>, wherein both are not simultaneously H, or  
 35

- 45 -

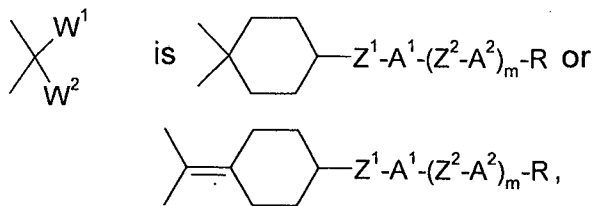


5

$U^1$  and  $U^2$  are each, independently of one another,  $CH_2$ , O, S, CO or CS,

$V^1$  and  $V^2$  are each, independently of one another,  $(CH_2)_n$ , in which from one to four non-adjacent  $CH_2$  groups may be replaced by O and/or S, and one of  $V^1$  and  $V^2$  and, in the case where

10



15

$Z^1$  and  $Z^2$  are each, independently of one another, -O-, -S-, -CO-, -COO-, -OCO-, -O-COO-, -CO-NR<sup>0</sup>-, -NR<sup>0</sup>-CO-, -O-CH<sub>2</sub>-, -CH<sub>2</sub>-O-, -S-CH<sub>2</sub>-, -CH<sub>2</sub>-S-, -CF<sub>2</sub>-O-, -O-CF<sub>2</sub>-, -CF<sub>2</sub>-S-, -S-CF<sub>2</sub>-, -CH<sub>2</sub>-CH<sub>2</sub>-, -CF<sub>2</sub>-CH<sub>2</sub>-, -CH<sub>2</sub>-CF<sub>2</sub>-, -CF<sub>2</sub>-CF<sub>2</sub>-, -CH=N-, -N=CH-, -N=N-, -CH=CH-, -CF=CH-, -CH=CF-, -CF=CF-, -C≡C-, a combination of two of these groups, where no two O and/or S and/or N atoms are bonded directly to one another, preferably -CH=CH-COO-, or -COO-CH=CH-, or a single bond,

20

$A^1$ ,  $A^2$  and  $A^3$  are each, independently of one another, 1,4-phenylene, in which one or two non-adjacent CH groups may be replaced by N, 1,4-cyclohexylene, in which one or two non-adjacent  $CH_2$  groups may be replaced by O and/or S, 1,3-dioxolane-4,5-diyl, 1,4-cyclohexenylylene, 1,4-bicyclo[2.2.2]octylylene, piperidine-1,4-diyl, naphthalene-2,6-diyl, decahydronaphthalene-2,6-diyl or 1,2,3,4-tetrahydronaphthalene-2,6-diyl, where each of these groups may be monosubstituted or polysubstituted by L, and in addition  $A^1$  is a single bond,

25

30

L is a halogen atom, preferably F, CN, NO<sub>2</sub>, alkyl, alkoxy, alkylcarbonyl, alkoxy carbonyl or alkoxy carbonyloxy having 1-7

35

- 46 -

carbon atoms, in which one or more H atoms may be replaced by F or Cl,

m is in each case, independently, 0, 1, 2 or 3, and

5


R and R<sup>1</sup> are each, independently of one another, H, F, Cl, Br, I, CN, SCN, SF<sub>5</sub>, straight-chain or branched alkyl having from 1 or 3 to 25 C atoms respectively, which may optionally be mono-substituted or polysubstituted by F, Cl, Br, I or CN, and in which one or more non-adjacent CH<sub>2</sub> groups may be replaced by -O-, -S-, -NH-, -NR<sup>0</sup>-, -CO-, -COO-, -OCO-, -O-COO-, -S-CO-, -CO-S-, -CH=CH- or -C≡C-, where no two O and/or S atoms are bonded directly to one another, or a polymerisable group.

10

15

Particular preference is given to chiral binaphthyl derivatives of the formula A-VI-1

20

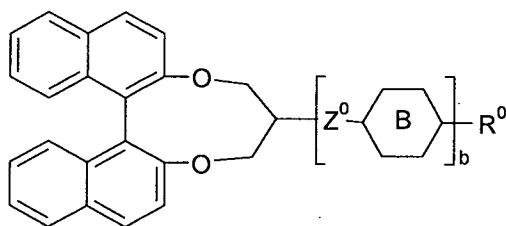


A-VI-1

25



in particular those selected from the following formulae A-VI-1a to A-VI-1c:

30



A-VI-1a

35

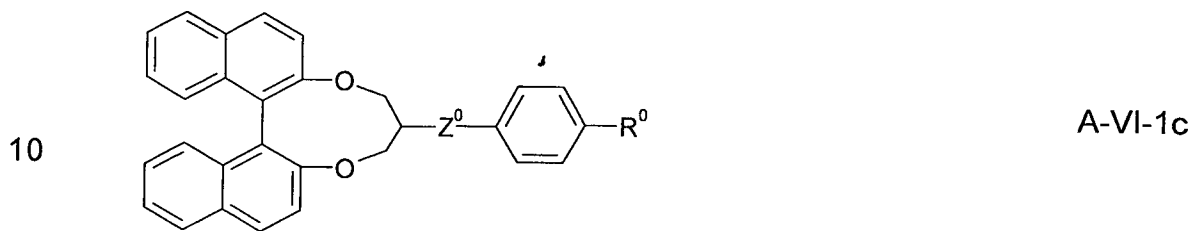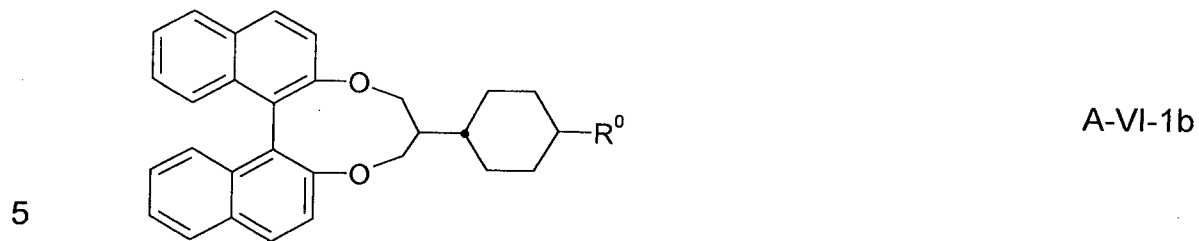


15 in which ring B and Z<sup>0</sup> are as defined for the formula A-IV, and

R<sup>0</sup> is as defined for formula A-IV or H or alkyl having from 1 to 4 C atoms, and






b is 0, 1 or 2,

20 and Z<sup>0</sup> is, in particular, -OCO- or a single bond.

Particular p reference is furthermore given to chiral binaphthyl derivatives of the formula A-VI-2

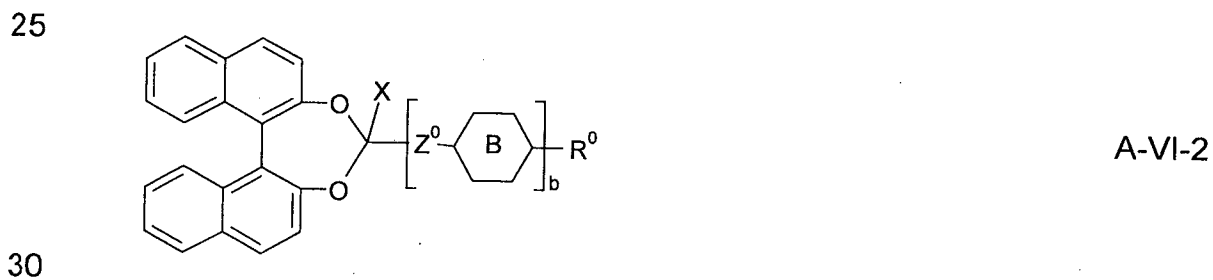

in particular those selected from the following formulae A-VI-2a to A-VI-2f:

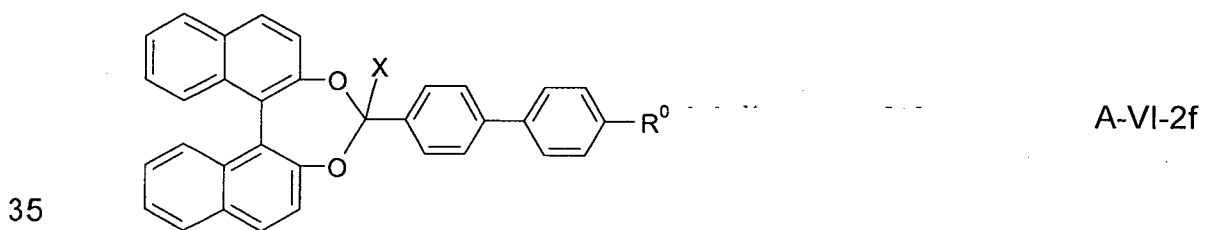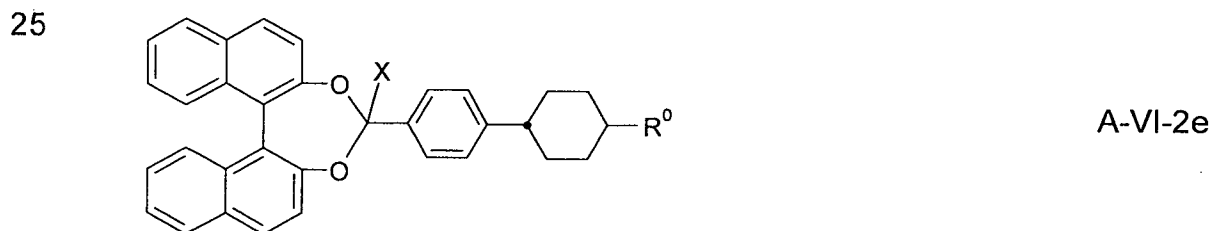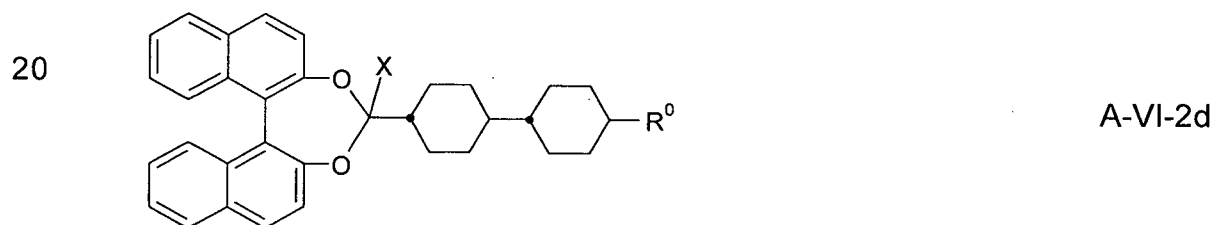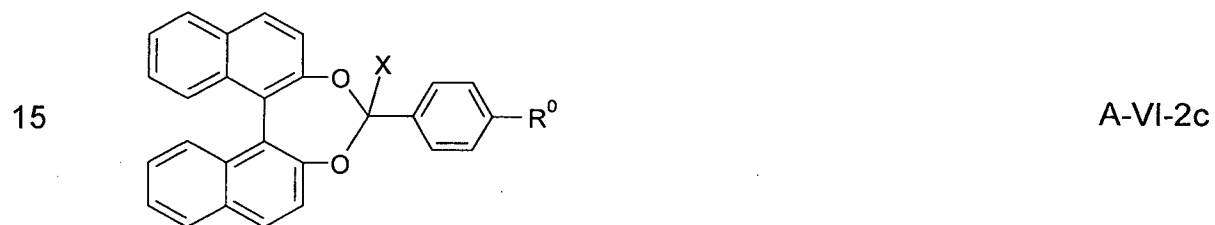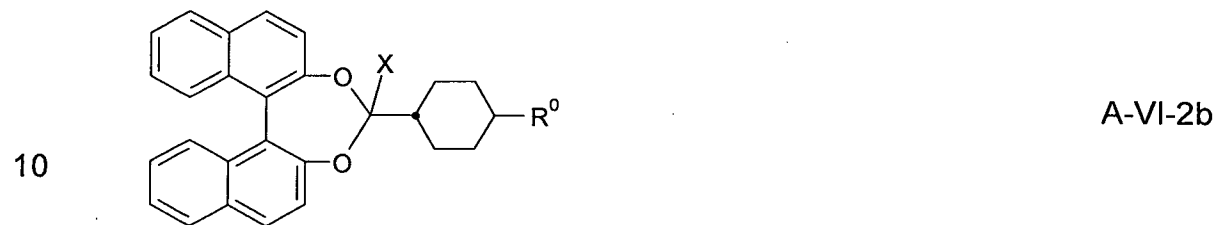

wherein  $R^0$  is as defined for the formula A-VI, and X is H, F, Cl, CN or  $R^0$ , preferably F.

5 The concentration of the chiral dopant, respectively the total concentration of the chiral dopants in the LC medium are preferably in the range from 0.05 % or more to 5 % or less, more preferably from 0.1 % or more to 1 % or less, and most preferably from 0.2 % or more to 0.8 % or less. These preferred concentration ranges apply in particular to the chiral dopant S-2011, respectively to its enantiomeric form R-2011 (both from Merck  
10 KGaA) and for chiral dopants having the same or a similar HTP. For Chiral dopants having either a higher or a lower absolute value of the HTP compared to S-2011 these preferred concentrations can be decreased, respectively increased proportionally according to the ratio of their HTP values relatively to that of S-2011.

15 The liquid-crystalline media in accordance with the present application preferably comprise in total 5 % to 70 %, more preferably 5 % to 60 % and particularly preferably 30 % to 50 % of compounds of formula I.

20 The liquid-crystalline media in accordance with the present application preferably comprise in total 20 % to 80 %, more preferably 30 % to 70 % and particularly preferably 35 % to 65 % of compounds of formula II.

25 The liquid-crystalline media in accordance with the present application preferably comprise in total 5 % to 45 %, more preferably 10 % to 40 % and particularly preferably 15 % to 35 % of compounds of formula III.

30 In a preferred embodiment of the present invention, in which the liquid-crystalline media comprise in each case one or more compounds of formulae I, II and III, the concentration of the compounds of formula I is preferably 45 % to 100 %, preferably 50 % to 100 % and particularly preferably 55 % to 100 %.

35 The concentration of the compounds of formula II is preferably 1 % to 20 %, more preferably 2 % to 15 % and particularly preferably 3 % to 10 %, and the concentration of the compounds of formula III is preferably

1 % to 30 %, more preferably 5 % to 25 % and particularly preferably 5 % to 20 %.

5 In a further preferred embodiment of the present invention, in which the liquid-crystalline media comprise in each case one or more compounds of the formulae I, II and III, the concentration of the compounds of formula I is preferably 15 % to 40 %, more preferably 20 % to 35 % and particularly preferably 25 % to 30 %, the concentration of the compounds of formula II is preferably 10 % to 35 %, more preferably 15 % to 30 % and particularly  
10 preferably 20 % to 25 %, and the concentration of the compounds of formula III is preferably 25 % to 50 %, more preferably 30 % to 45 % and particularly preferably 35 % to 40 %.

15 In a preferred embodiment of the present invention, in which the liquid-crystalline media comprise in each case one or more compounds of the formulae I and II, but at most 5 % and preferably no compounds of formula III, the concentration of the compounds of formula I is preferably 10 % to 50 %, more preferably 20 % to 40 % and particularly preferably 25 % to 35 %, the concentration of the compounds of formula II is preferably 40 %  
20 to 70 %, more preferably 50 % to 65 % and particularly preferably 55 % to 60 %, and the concentration of the compounds of formula III is preferably 1 % to 4 %, more preferably 1 % to 3 % and particularly preferably 0 %.




25 The liquid-crystalline media in accordance with the present application particularly preferably comprise in total 50 % to 80 %, more preferably 55 % to 75 % and particularly preferably 57 % to 70 % of compounds of formula I-1 as defined below and/or in total 5 % to 70 %, preferably 6 % to 50 % and particularly preferably 8 % to 20 % of compounds selected from the group of the compounds of the formulae I-2 and I-3 as defined below,  
30 most preferably compounds of both formula I-2 and formula I-3.

The liquid-crystalline media in accordance with the present application likewise preferably comprise in total 5 % to 60 %, preferably 10 % to 50 % and particularly preferably 7 % to 20 % of compounds of formula II.

In the case of the use of a single homologous compound, these limits correspond to the concentration of this homologue, which is preferably 2 % to 20 %, particularly preferably 1 % to 15 %. In the case of the use of two or more homologues, the concentration of the individual homologues is likewise particularly preferably in each case 1 % to 15 %.

The compounds of the formulae I to III in each case include dielectrically positive compounds having a dielectric anisotropy of greater than 3, dielectrically neutral compounds having a dielectric anisotropy of less than 3 and greater than -1.5, and dielectrically negative compounds having a dielectric anisotropy of -1.5 or less.

In a preferred embodiment of the present invention the liquid-crystalline medium comprises one or more compounds of formula I selected from the group of the compounds of the formulae I-1 and I-2 as set forth below, preferably simultaneously one or more compounds of formula I-1 and one or more compounds of formula I-2. Optionally, and preferably according to an embodiment, one or more compounds of formula I-3 as set forth below are further comprised. In a particularly preferred embodiment, the compounds of formula I predominantly consist, more preferably essentially consist and most preferably completely consist of one or more compounds selected from the compounds of the formulae I-1, I-2 and I-3:

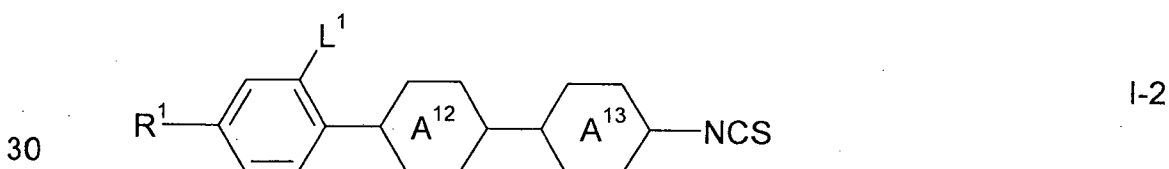


in which

L<sup>1</sup> is H or F, preferably H

5 and the other groups have the respective meanings indicated above for formula I and preferably


R<sup>1</sup> denotes unfluorinated alkyl having 1 to 7 C atoms or unfluorinated alkenyl having 2 to 7 C atoms.

10 The media according to the invention preferably comprise one or more compounds of formula I-1, which are more preferably selected from the group of the compounds of the formulae I-1a to I-1c, even more preferably of formula I-1c, wherein more preferably the compounds of formula I-1  
 15 predominantly consist, even more preferably essentially consist and particularly preferably completely consist thereof:




I-1a

20



I-1b

25

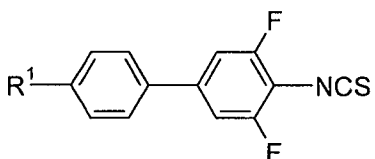





I-1c

30 in which the groups have the respective meanings indicated above for formula I-1 and in which preferably

R<sup>1</sup> denotes unfluorinated alkyl or unfluorinated alkenyl.

35 The media preferably comprise one or more compounds of formula I-2, which are more preferably selected from the group of the compounds of the formulae I-2a to I-2d, even more preferably of formula I-2d, wherein


preferably the compounds of formula I-2 predominantly consist, even more preferably essentially consist and particularly preferably completely consist thereof:

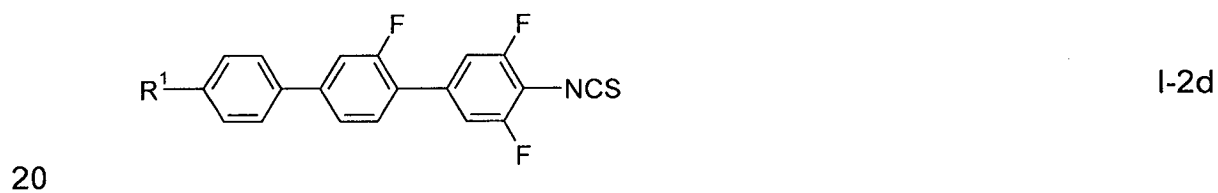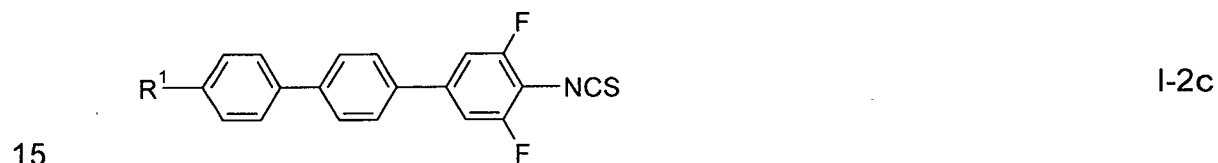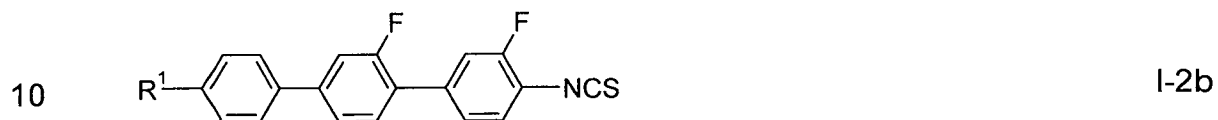
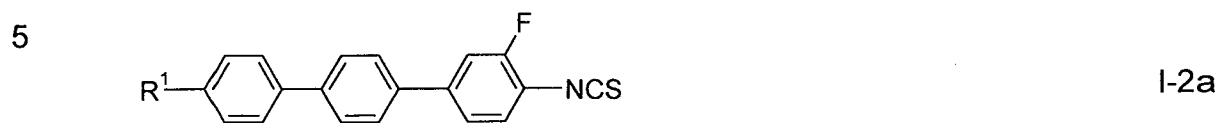


in which the groups have the respective meanings indicated above for formula I-2 and in which preferably

25  $R^1$  denotes unfluorinated alkyl or unfluorinated alkenyl.

The media preferably comprise one or more compounds of formula I-3, which are more preferably selected from the group of the compounds of the formulae I-3a to I-3d, even more preferably of formula I-3c, wherein preferably the compounds of formula I-3 predominantly consist, even more preferably essentially consist and particularly preferably completely consist thereof:



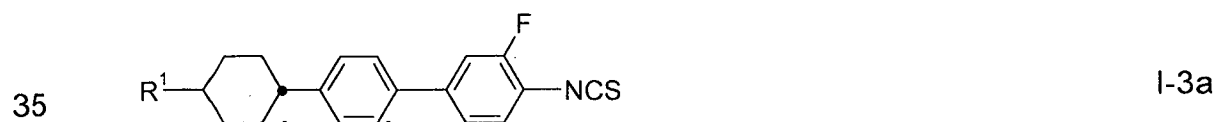


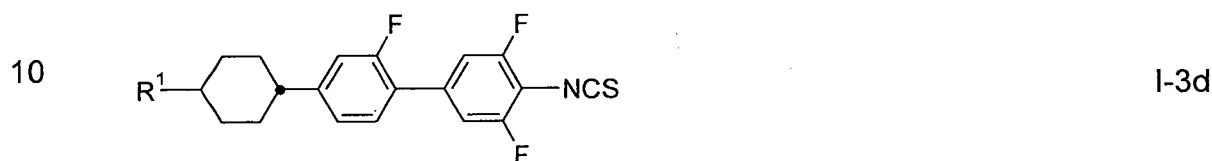

in which the groups have the respective meanings indicated above for  
formula I-3 and in which preferably

R<sup>1</sup> denotes unfluorinated alkyl or unfluorinated alkenyl.


The media according to the invention preferably comprise one or more  
compounds of formula II, which are more preferably selected from the  
group of the compounds of the formulae II-1 to II-3, even more preferably  
selected from the group of the compounds of the formulae II-1 and II-2,  
wherein preferably the compounds of formula II predominantly consist,  
even more preferably essentially consist and particularly preferably  
completely consist thereof:

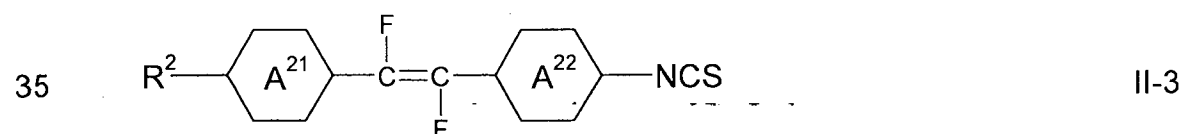


in which the groups have the meanings given under formula II above and preferably

5  $R^2$  denotes H, unfluorinated alkyl or alkoxy having 1 to 7 C atoms or unfluorinated alkenyl having 2 to 7 C atoms,

and one of




and




denotes

15

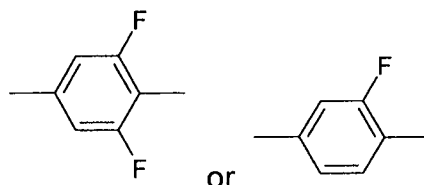


and the other, independently denotes


20

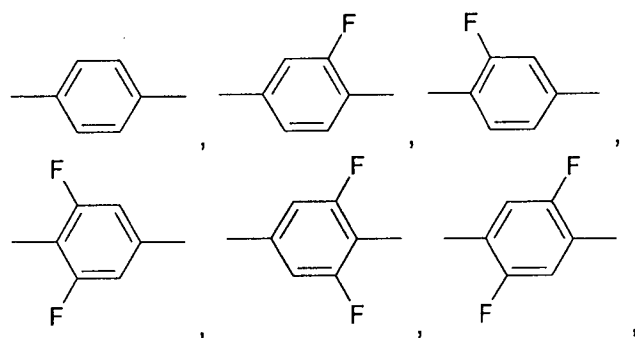

25

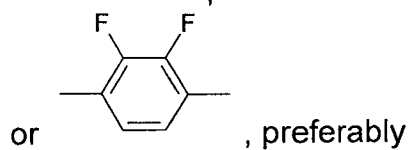


30



most preferably

35

- 56 -



, and preferably


5  $R^2$  denotes  $C_nH_{2n+1}$  or  $CH_2=CH-(CH_2)_z$ ,

$n$  denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and

10  $z$  denotes 0, 1, 2, 3 or 4, preferably 0 or 2.


The media preferably comprise one or more compounds of formula II-1, which are more preferably selected from the group of the compounds of the formulae II-1a to II-1e, even more preferably selected from the group of the compounds of the formulae II-1a and II-1b, particularly preferably of formula II-1b, wherein preferably the compounds of formula II-1 predominantly consist, even more preferably essentially consist and particularly preferably completely consist thereof:

20

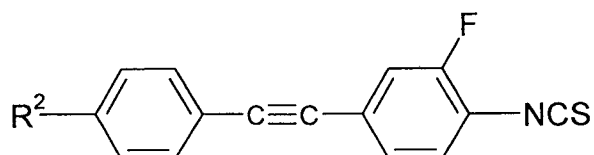


II-1a

25

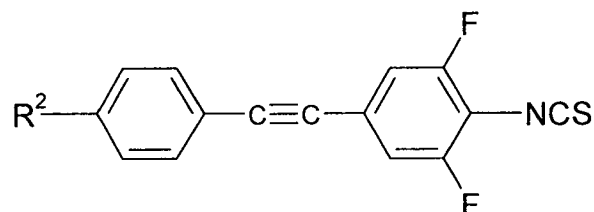



II-1b

30

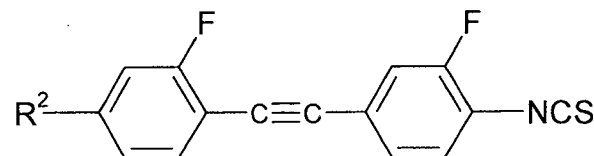

II-1c

35

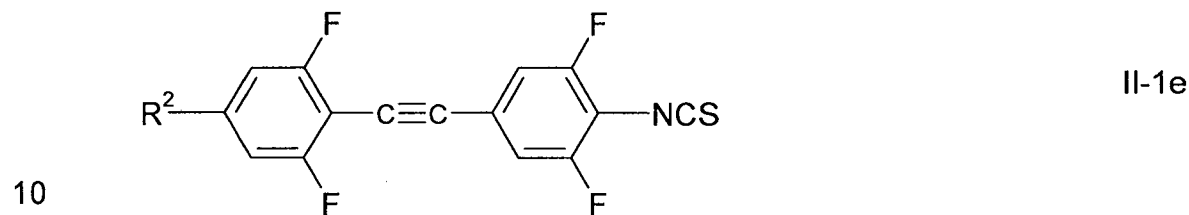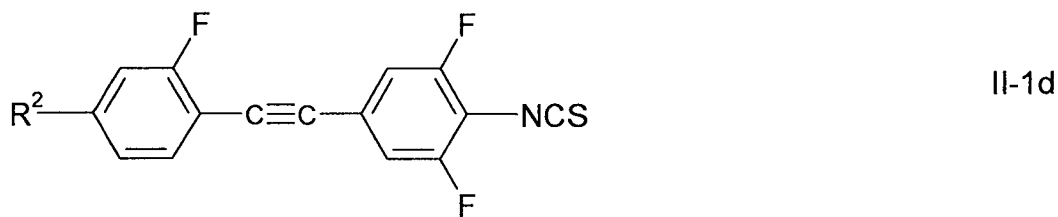


in which


15  $R^2$  has the meaning indicated above, and preferably denotes  $C_nH_{2n+1}$  or  $CH_2=CH-(CH_2)_z$ ,

20  $n$  independently of one another, denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and

25  $z$  denotes 0, 1, 2, 3 or 4, preferably 0 or 2.

30 The media preferably comprise one or more compounds of formula II-2, which are more preferably selected from the group of the compounds of the formulae II-2a and II-2b, even more preferably simultaneously one or more compounds of formula II-2a and one or more compounds of formula II-2b, wherein preferably these compounds of formula II-2 predominantly consist, even more preferably essentially consist and particularly preferably completely consist thereof:

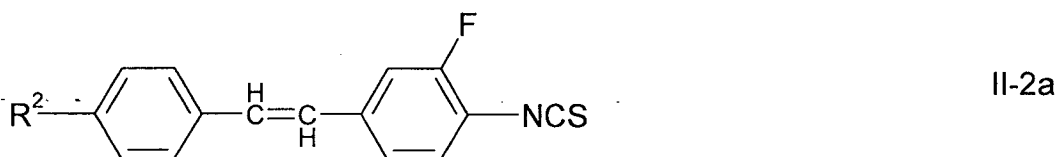


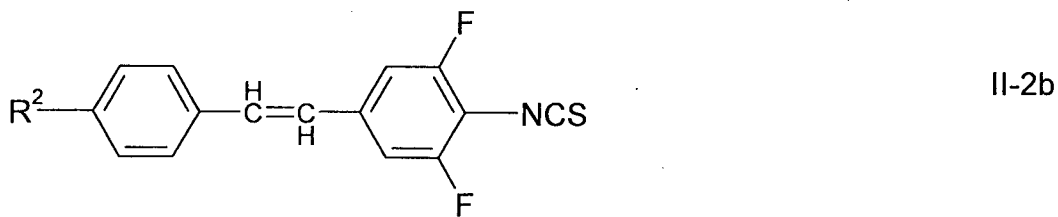



in which

- 10  $R^2$  has the meaning indicated above, and preferably denotes  $C_nH_{2n+1}$  or  $CH_2=CH-(CH_2)_z$ ,
- 15  $n$  denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and
- $z$  denotes 0, 1, 2, 3 or 4, preferably 0 or 2.

20 The media preferably comprise one or more compounds of formula II-3, which are more preferably selected from the group of the compounds of formulae II-3a to II-3c, even more preferably selected from the group of the compounds of formulae II-3a and II-3b, particularly preferably

25 simultaneously one or more compounds of formula II-3a and one or more compounds of formula II-3b, wherein preferably the compounds of formula II-3 predominantly consist, even more preferably essentially consist and very particularly preferably completely consist thereof:

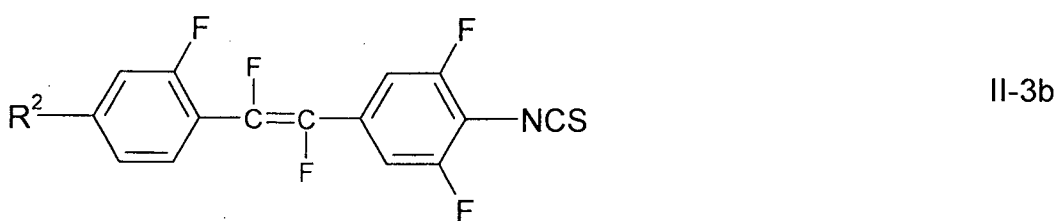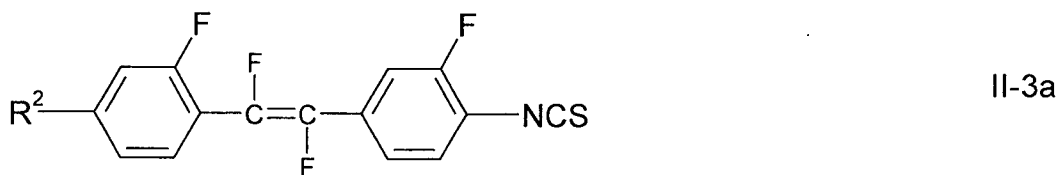

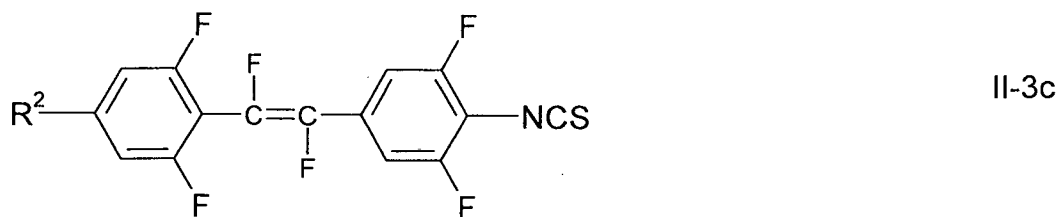

in which




10  $R^2$  has the meaning indicated above, and preferably denotes  $C_nH_{2n+1}$  or  $CH_2=CH-(CH_2)_z$ ,




$n$  denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and

15  $z$  denotes 0, 1, 2, 3 or 4, preferably 0 or 2.

20 The media preferably comprise one or more compounds of formula III, which are more preferably selected from the group of the compounds of the formulae III-1 to III-6, wherein even more preferably the compounds are selected from the group of the compounds of the formulae III-1, III-2, III-3 and III-4, particularly preferably of formula III-1, wherein preferably the compounds of formula III predominantly consist, even more preferably essentially consist and very particularly preferably completely consist

25 thereof:



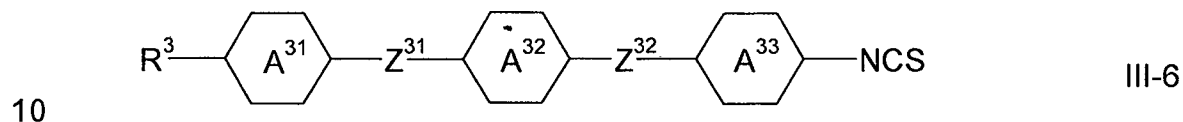





in which

15  $Z^{31}$  and  $Z^{32}$  independently of one another denote *trans*-CH=CH- or *trans*-CF=CF-, preferably *trans*-CH=CH-, wherein in formula III-6 alternatively one of  $Z^{31}$  and  $Z^{32}$  may denote -C≡C- and the other groups have the meaning given above under formula III, and preferably

20  $R^3$  denotes H, unfluorinated alkyl or alkoxy having 1 to 7 C atoms or unfluorinated alkenyl having 2 to 7 C atoms,


and one of

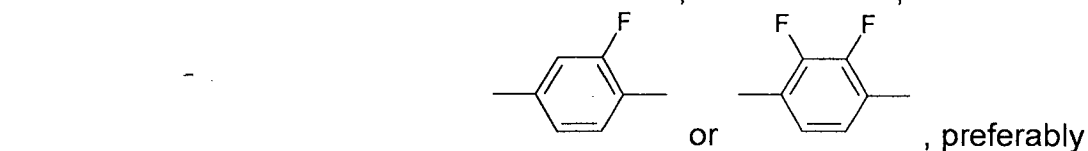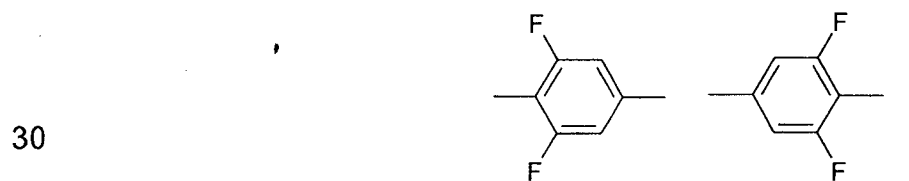

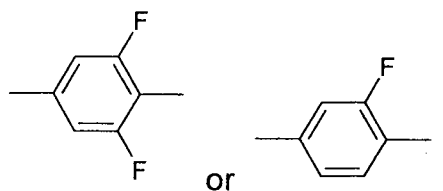


5


and the others, independently of one another, denote

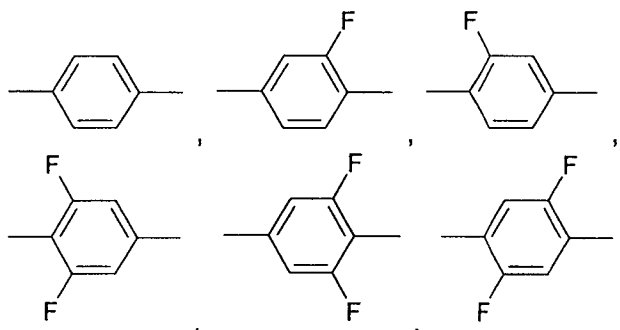


10

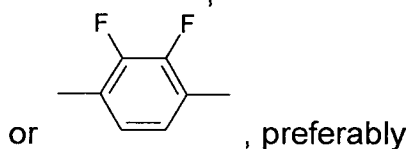


15



20



25



$R^3$  denotes  $C_nH_{2n+1}$  or  $CH_2=CH-(CH_2)_z$ ,


30  $n$  denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and

$z$  denotes 0, 1, 2, 3 or 4, preferably 0 or 2.


35 The media preferably comprise one or more compounds of formula III-1, which are more preferably selected from the group of the compounds of

the formulae III-1a to III-1d, even more preferably selected from the group of the compounds of the formulae III-1a and III-1b, particularly preferably of formula III-1b, wherein preferably the compounds of formula III-1 predominantly consist, even more preferably essentially consist and particularly preferably completely consist thereof:


5




10

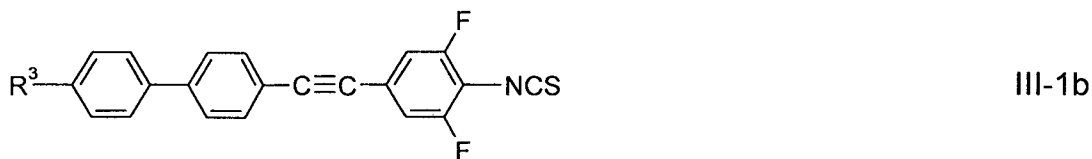

15

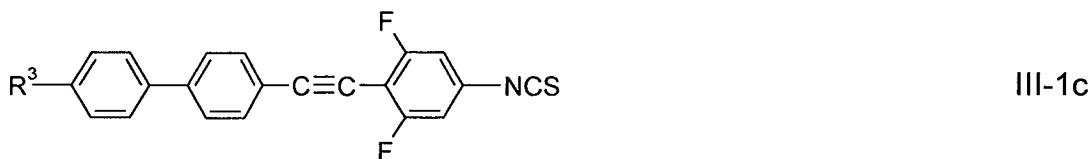

20



in which

25

$R^3$  has the meaning indicated above, and preferably denotes  $C_nH_{2n+1}$  or  $CH_2=CH-(CH_2)_z$ ,

30


$n$  denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and

$z$

denotes 0, 1, 2, 3 or 4, preferably 0 or 2.

35

The media preferably comprise one or more compounds of formula III-2, which are more preferably compounds of formula III-2a:



III-2a

5

in which

R<sup>3</sup> has the meaning indicated above, and preferably denotes C<sub>n</sub>H<sub>2n+1</sub> or CH<sub>2</sub>=CH-(CH<sub>2</sub>)<sub>z</sub>,

10

n denotes an integer in the range from 0 to 15, preferably in the range from 1 to 7, and particularly preferably 1 to 5, and


15

z denotes 0, 1, 2, 3 or 4, preferably 0 or 2.

The media preferably comprise one or more compounds of formula III-3 and/or one or more compounds of formula III-4.

20

The media preferably comprise one or more compounds of formula III-5, which are more preferably compounds of formula III-5a:

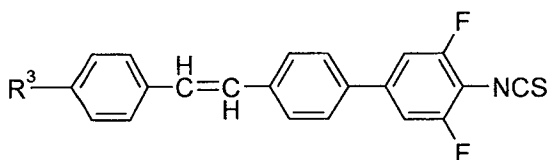

III-5a

25

wherein


R<sup>3</sup> has the meaning indicated above for formula III-5, and preferably denotes C<sub>n</sub>H<sub>2n+1</sub>, in which

30


n denotes an integer in the range from 0 to 7, preferably in the range from 1 to 5.

35

Further preferred compounds of formula III are the compounds of the following formulae:



5



10

in which

$n$  denotes an integer in the range from 0 to 7, preferably in the range from 1 to 5.

15

In a further aspect according to the invention there is provided a composite system comprising a liquid-crystalline medium which comprises one or more pleochroic compounds and one or more compounds selected from the group of compounds of formulae I, II and III as set forth above, and in addition a polymer obtained or obtainable from the polymerisation of the polymerisable compound(s) as set forth above.

20

25

Suitable and preferred polymerisation methods are, for example, thermally induced polymerisation or photo polymerisation, preferably photopolymerisation, in particular UV photopolymerisation. One or more initiators can optionally also be added. Suitable conditions for the polymerisation and suitable types and amounts of initiators are known to the person skilled in the art and are described in the literature. Suitable for free-radical polymerisation are, for example, and preferably, the commercially available photoinitiators Irgacure®184, Irgacure®369, Irgacure®651, in particular Irgacure®784, in particular Irgacure®819, Irgacure®907 or Irgacure®1300 (all from BASF) or Darocure®1173 (from Ciba AG). In case an initiator is employed, its proportion is preferably 0.001 % to 5 % by weight, more preferably 0.001 % to 1 % by weight.

30

35

The polymerisable compounds according to the invention are also suitable for polymerisation without an initiator, which can be accompanied by considerable advantages, such as, for example, lower material costs and

5 in particular less contamination of the LC medium by possible residual amounts of the initiator or degradation products thereof. The polymerisation can thus also be carried out without the addition of an initiator. In a preferred embodiment, the LC medium thus comprises no polymerisation initiator.

10 The polymerisable component or the LC medium may also comprise one or more stabilisers in order to prevent undesired spontaneous polymerisation of the reactive mesogens (RMs), for example during storage or transport. Suitable types and amounts of stabilisers are known to the person skilled in the art and are described in the literature. Particularly suitable are, for example, the commercially available stabilisers from the Irganox® series (from Ciba AG), such as, for example, Irganox® 1076. In case stabilisers are employed, their proportion, based on the total amount of the mixture of LCs including the RMs or the polymerisable component, is preferably in the range from 10 ppm to 15 10,000 ppm, more preferably in the range from 50 ppm to 2,000 ppm, most preferably 0.2 % or about 0.2 %.

20 Preferably, the mixtures are characterised as described below before the polymerisation. The reactive components are then polymerised by irradiation once, e.g. 180 s, and the resultant media are re-characterised.

25 The polymerisation of the media preferably is carried out by irradiation with a UV lamp, e.g. Dymax, Bluewave 200, 365 nm interference filter, having an effective power of about 3.0 mW/cm<sup>2</sup> for 180 seconds. The polymerisation is carried out directly in the test cell/antenna device. To minimize UV induced host degradation a suitable long pass filter is beneficially applied, for example Schott GG395 or GG410.

30 The polymerisation is preferably carried out at room temperature.

35 The entire irradiation time which results in maximum stabilisation is typically 180 s at the irradiation power indicated. Further polymerisations can be carried out in accordance with an optimised irradiation/temperature programme.

The total concentration of the polymerisable compounds in the medium prior to polymerisation preferably is in the range from 1 % to 20 %, more preferably from 2 % to 15 % and, most preferably from 2 % to 10 %.

5

In a preferred embodiment of the present invention, the medium comprises one or more dielectrically positive compounds of formula I-1 having a dielectric anisotropy of greater than 3.

10

The medium preferably comprises one or more dielectrically neutral compounds of formula I-2 having a dielectric anisotropy in the range from more than -1.5 to 3.

15

In a preferred embodiment of the present invention, the medium comprises one or more compounds of formula II.

In a further preferred embodiment of the present invention, the medium comprises one or more compounds of formula III.

20

The liquid-crystalline media, preferably the nematic component of the liquid crystalline media used in accordance with the present invention preferably comprise 10 % or less, preferably 5 % or less, more preferably 2 % or less, even more preferably 1 % or less, and in particular absolutely no compound having only two or fewer five- and/or six-membered rings.

25

The definitions of the abbreviations (acronyms) are likewise indicated below in Table D or are evident from Tables A to C.

30

The liquid-crystalline media in accordance with the present invention preferably comprise, more preferably predominantly consist of, even more preferably essentially consist of and particularly preferably completely consist of compounds selected from the group of the compounds of the formulae I to III.

35

In a preferred embodiment of the present invention the liquid-crystalline media predominantly consist of, more preferably essentially consist of, and

most preferably completely consist of isothiocyanate compounds, preferably selected from the group of the compounds of the formulae I to III.

5 The liquid-crystalline medium of the invention can be prepared by mixing or blending one or more polymerisable compounds with one or more pleochroic compounds and one or more compounds selected from the group of the compounds of the formulae I, II and III as set forth above, and optionally with one or more further compounds and/or with one or more  
10 additives.

The liquid-crystalline medium or the composite system according to the invention can beneficially be used in a component for high-frequency technology.

15 Another aspect of the invention thus relates to a component for high-frequency technology, which comprises the liquid-crystalline medium or the composite system according to the invention. The component is preferably suitable for operation in the microwave range, and more  
20 preferably is a phase shifter or a LC based antenna element operable in the microwave region.

In a further aspect there is provided a microwave antenna array which comprises one or more components according to the invention.

25 In these components and devices the liquid-crystalline media of the invention comprising one or more pleochroic compounds can be favourably used, in particular by favourably or suitably influencing tunability, in particular microwave tunability, and/or loss parameter, while  
30 suitably maintaining or improving the VHR.

In this application, the term "comprise(s)" in connection with compositions means that the entity in question, i.e. the medium or the component, comprises the component or components or compound or compounds  
35 indicated, preferably in a total concentration of 10 % or more and more preferably 20 % or more.

5 In this connection, the term "predominantly consist(s) of" means that the entity in question comprises 55 % or more, preferably 60 % or more, and particularly preferably 70 % or more of the component or components or compound or compounds indicated.

10 In this connection, "essentially consist(s) of" means that the entity in question comprises 80 % or more, preferably 90 % or more and very preferably 95 % or more of the component or components or compound or compounds indicated.

15 In this connection, "completely consist(s) of" means that the entity in question comprises 98 % or more, preferably 99 % or more, and particularly preferably 100.0 % of the component or components or compound or compounds indicated.

20 Other mesogenic compounds which are not explicitly mentioned above can optionally and advantageously also be used in the media in accordance with the present invention. Such compounds are known to the person skilled in the art.

25 Preferably, the total concentration of the compounds of formulae I to III in the medium is in the range from 80 % or more to 100 %, more preferably in the range from 90 % or more to 100 %, and most preferably in the range from 95 % or more to 100 %.

30 Preferably, the total concentration of the compounds of formula I-3, more preferably of the formula I-3c, in the media is in the range from 10 % to 45 % or less, more preferably from 15 % or more to 35 % or less, even more preferably from 20 % or more to 33 % or less and, most preferably from 25 % or more to 30 % or less.

35 The liquid-crystalline media in accordance with the present invention preferably have a clearing point of 90°C or more, more preferably 100°C or more, even more preferably 120°C or more, still more preferably 150°C or more, and particularly preferably 170°C or more.

The nematic phase of the media in accordance with the invention preferably extends at least from 20°C or less to 90°C or more. It is more preferred that the phase extends up to 100°C or more, more preferably from at least from 0°C or less to 120°C or more or even more preferably from at least from -10°C or less to 140°C or more, in particular from at least from -20°C or less to 150°C or more.

The  $\Delta\epsilon$  of the liquid-crystalline medium in accordance with the invention, at 1 kHz and 20°C, is preferably 1 or more, more preferably 2 or more and particularly preferably 3 or more.

The  $\Delta n$  of the liquid-crystalline media in accordance with the present invention, at 589 nm ( $\text{Na}^{\text{D}}$ ) and 20°C, is preferably in the range from 0.200 or more to 0.90 or less, more preferably in the range from 0.250 or more to 0.90 or less, even more preferably in the range from 0.300 or more to 0.85 or less, and particularly preferably in the range from 0.350 or more to 0.800 or less.

In a preferred embodiment of the present invention, the  $\Delta n$  of the liquid-crystalline media in accordance with the present invention is preferably 0.50 or more, more preferably 0.55 or more.

In accordance with the present invention, the individual compounds of formula I are preferably used in a total concentration of 10 % to 70 %, more preferably 20 % to 60 %, even more preferably 30 % to 50 % and particularly preferably 25 % to 45 % of the mixture as a whole.

The compounds of formula II are preferably used in a total concentration of 1 % to 20 %, more preferably 1 % to 15 %, even more preferably 2 % to 15 %, and particularly preferably 3 % to 10 % of the mixture as a whole.

The compounds of formula III are preferably used in a total concentration of 1 % to 60 %, more preferably 5 % to 50 %, even more preferably 10 % to 45 %, and particularly preferably 15 % to 40 % of the mixture as a whole.

The liquid-crystalline media preferably comprise, more preferably predominantly consist of, and particularly preferably completely consist of in total 50 % to 100 %, more preferably 70 % to 100 % and particularly preferably 80 % to 100 %, and in particular 90 % to 100 % of the compounds of the formulae I, II and III.

In the present application, the expression dielectrically positive describes compounds or components where  $\Delta\epsilon > 3.0$ , dielectrically neutral describes those where  $-1.5 \leq \Delta\epsilon \leq 3.0$  and dielectrically negative describes those where  $\Delta\epsilon < -1.5$ .  $\Delta\epsilon$  is determined at a frequency of 1 kHz and at 20°C. The dielectric anisotropy of the respective compound is determined from the results of a solution of 10% of the respective individual compound in a nematic host mixture. If the solubility of the respective compound in the host mixture is less than 10%, the concentration is reduced to 5%. The capacitances of the test mixtures are determined both in a cell having homeotropic alignment and in a cell having homogeneous alignment. The cell thickness of both types of cells is approximately 20  $\mu\text{m}$ . The voltage applied is a rectangular wave having a frequency of 1 kHz and an effective value of typically 0.5 V to 1.0 V, but it is always selected to be below the capacitive threshold of the respective test mixture.

$\Delta\epsilon$  is defined as  $(\epsilon_{||} - \epsilon_{\perp})$ , while  $\epsilon_{\text{ave}}$  is  $(\epsilon_{||} + 2 \epsilon_{\perp}) / 3$ .

The host mixture used for dielectrically positive compounds is mixture ZLI-4792 and that used for dielectrically neutral and dielectrically negative compounds is mixture ZLI-3086, both from Merck KGaA, Germany. The absolute values of the dielectric constants of the compounds are determined from the change in the respective values of the host mixture on addition of the compounds of interest. The values are extrapolated to a concentration of the compounds of interest of 100%.

Components having a nematic phase at the measurement temperature of 20°C are measured as such, all others are treated like compounds.

35

5 The expression threshold voltage in the present application refers to the optical threshold and is quoted for 10% relative contrast ( $V_{10}$ ), and the expression saturation voltage refers to the optical saturation and is quoted for 90% relative contrast ( $V_{90}$ ), in both cases unless expressly stated otherwise. The capacitive threshold voltage ( $V_0$ ), also called the Fredericks threshold ( $V_{Fr}$ ), is only used if expressly mentioned.

10 The parameter ranges indicated in this application all include the limit values, unless expressly stated otherwise.

The different upper and lower limit values indicated for various ranges of properties in combination with one another give rise to additional preferred ranges.

15 Throughout this application, the following conditions and definitions apply, unless expressly stated otherwise. All concentrations are quoted in per cent by weight and relate to the respective mixture as a whole, all temperatures are quoted in degrees Celsius and all temperature differences are quoted in differential degrees. All physical properties are  
20 determined in accordance with "Merck Liquid Crystals, Physical Properties of Liquid Crystals", Status Nov. 1997, Merck KGaA, Germany, and are quoted for a temperature of 20°C, unless expressly stated otherwise. The optical anisotropy ( $\Delta n$ ) is determined at a wavelength of 589.3 nm. The dielectric anisotropy ( $\Delta \epsilon$ ) is determined at a frequency of 1 kHz. The  
25 threshold voltages, as well as all other electro-optical properties, are determined using test cells produced at Merck KGaA, Germany. The test cells for the determination of  $\Delta \epsilon$  have a cell thickness of approximately 20  $\mu\text{m}$ . The electrode is a circular ITO electrode having an area of 1.13  $\text{cm}^2$  and a guard ring. The orientation layers are SE-1211 from Nissan  
30 Chemicals, Japan, for homeotropic orientation ( $\epsilon_{||}$ ) and polyimide AL-1054 from Japan Synthetic Rubber, Japan, for homogeneous orientation ( $\epsilon_{\perp}$ ). The capacitances are determined using a Solatron 1260 frequency response analyser using a sine wave with a voltage of 0.3  $V_{\text{rms}}$ . The light used in the electro-optical measurements is white light. A set-up using a  
35 commercially available DMS instrument from Autronic-Melchers, Germany, is used. The characteristic voltages have been determined under

perpendicular observation. The threshold ( $V_{10}$ ), mid-grey ( $V_{50}$ ) and saturation ( $V_{90}$ ) voltages have been determined for 10%, 50% and 90% relative contrast, respectively.

5 The liquid-crystalline media are investigated with respect to their properties in the microwave frequency range as described in A. Penirschke, S. Müller, P. Scheele, C. Weil, M. Wittek, C. Hock and R. Jakoby: "Cavity Perturbation Method for Characterization of Liquid Crystals up to 35GHz", 34<sup>th</sup> European Microwave Conference –  
10 Amsterdam, pp. 545-548.

Compare in this respect also A. Gaebler, F. Gölden, S. Müller, A. Penirschke and R. Jakoby "Direct Simulation of Material Permittivities ...", 12MTC 2009 – International Instrumentation and Measurement Technology Conference, Singapore, 2009 (IEEE), pp. 463-467, and  
15 DE 10 2004 029 429 A, in which a measurement method is likewise described in detail.

The liquid crystal is introduced into a polytetrafluoroethylene (PTFE)  
20 capillary. The capillary has an internal radius of 180  $\mu\text{m}$  and an external radius of 350  $\mu\text{m}$ . The effective length is 2.0 cm. The filled capillary is introduced into the centre of the cavity with a resonance frequency of 30 GHz. This cavity has a length of 6.6 mm, a width of 7.1 mm and a height of 3.6 mm. The input signal (source) is then applied, and the result  
25 of the output signal is recorded using a commercial vector network analyser.

The change in the resonance frequency and the Q factor between the measurement with the capillary filled with the liquid crystal and the  
30 measurement without the capillary filled with the liquid crystal is used to determine the dielectric constant and the loss angle at the corresponding target frequency by means of equations 10 and 11 in A. Penirschke, S. Müller, P. Scheele, C. Weil, M. Wittek, C. Hock and R. Jakoby: "Cavity Perturbation Method for Characterization of Liquid Crystals up to 35GHz",  
35 34<sup>th</sup> European Microwave Conference – Amsterdam, pp. 545-548, as described therein.

The values for the components of the properties perpendicular and parallel to the director of the liquid crystal are obtained by alignment of the liquid crystal in a magnetic field. To this end, the magnetic field of a permanent magnet is used. The strength of the magnetic field is 0.35 tesla. The alignment of the magnets is set correspondingly and then rotated correspondingly through 90°.

Preferred components are phase shifters, varactors, wireless and radio wave antenna arrays, matching circuit adaptive filters and others.

In the present application, the term compounds is taken to mean both one compound and a plurality of compounds, unless expressly stated otherwise.

The liquid-crystalline media according to the invention preferably have nematic phases in preferred ranges given above. The expression have a nematic phase here means on the one hand that no smectic phase and no crystallisation are observed at low temperatures at the corresponding temperature and on the other hand that no clearing occurs on heating from the nematic phase. The investigation at low temperatures is carried out in a flow viscometer at the corresponding temperature and checked by storage in test cells having a layer thickness of 5  $\mu\text{m}$  for at least 100 hours. At high temperatures, the clearing point is measured in capillaries by conventional methods.

Furthermore, the liquid-crystalline media according to the invention are preferably characterised by high optical anisotropy values in the visible range, especially at a wavelength of 589.0 nm (i.e. at the Na<sup>”D”</sup> line). The birefringence at 589 nm is preferably 0.20 or more, more preferably 0.25 or more, even more preferably 0.30 or more, still more preferably 0.40 or more, and particularly preferably 0.45 or more. In addition, the birefringence is preferably 0.80 or less.

35

The liquid crystals employed preferably have a positive dielectric anisotropy. This is preferably 2 or more, more preferably 4 or more, even more preferably 6 or more, and particularly preferably 10 or more.

5 Furthermore, the liquid-crystalline media according to the invention are preferably characterised by high anisotropy values in the microwave range. The birefringence at about 8.3 GHz is, for example, preferably 0.14 or more, more preferably 0.15 or more, even more preferably 0.20 or more, still more preferably 0.25 or more, and particularly preferably 0.30 or more.  
10 In addition, the birefringence is preferably 0.80 or less.

The dielectric anisotropy in the microwave range is defined as

$$\Delta\epsilon_r \equiv (\epsilon_{r,\parallel} - \epsilon_{r,\perp}) .$$

15

The tuneability ( $\tau$ ) is defined as

$$\tau \equiv (\Delta\epsilon_r / \epsilon_{r,\parallel}) .$$

20 The material quality ( $\eta$ ) is defined as

$$\eta \equiv (\tau / \tan \delta_{\epsilon_{r,\max}}), \text{ where}$$

the maximum dielectric loss is

25  $\tan \delta_{\epsilon_{r,\max}} \equiv \max. \{ \tan \delta_{\epsilon_{r,\perp}}; \tan \delta_{\epsilon_{r,\parallel}} \} .$

The material quality ( $\eta$ ) of the preferred liquid-crystal materials is 6 or more, preferably 8 or more, more preferably 10 or more.

30 In the corresponding components, the preferred liquid-crystal materials have phase shifter qualities of 15°/dB or more, preferably 20°/dB or more, more preferably 30°/dB or more, even more preferably 40°/dB or more, even more preferably 50°/dB or more, still more particularly preferably 80°/dB or more, and particularly preferably 100°/dB or more.

35

In some embodiments, however, liquid crystals having a negative value of the dielectric anisotropy can also advantageously be used.

5 The liquid crystals employed are either individual substances or mixtures. They preferably have a nematic phase.

10 The term "alkyl" preferably encompasses straight-chain and branched alkyl groups having 1 to 15 carbon atoms, in particular the straight-chain groups methyl, ethyl, propyl, butyl, pentyl, hexyl and heptyl. Groups having 2 to 10 carbon atoms are generally preferred.

15 The term "alkenyl" preferably encompasses straight-chain and branched alkenyl groups having 2 to 15 carbon atoms, in particular the straight-chain groups. Particularly preferred alkenyl groups are C<sub>2</sub>- to C<sub>7</sub>-1E-alkenyl, C<sub>4</sub>- to C<sub>7</sub>-3E-alkenyl, C<sub>5</sub>- to C<sub>7</sub>-4-alkenyl, C<sub>6</sub>- to C<sub>7</sub>-5-alkenyl and C<sub>7</sub>-6-alkenyl, in particular C<sub>2</sub>- to C<sub>7</sub>-1E-alkenyl, C<sub>4</sub>- to C<sub>7</sub>-3E-alkenyl and C<sub>5</sub>- to C<sub>7</sub>-4-alkenyl. Examples of further preferred alkenyl groups are vinyl, 1E-propenyl, 1E-butenyl, 1E-pentenyl, 1E-hexenyl, 1E-heptenyl, 3-butenyl, 3E-pentenyl, 3E-hexenyl, 3E-heptenyl, 4-pentenyl, 4Z-hexenyl, 4E-hexenyl, 20 4Z-heptenyl, 5-hexenyl, 6-heptenyl and the like. Groups having up to 5 carbon atoms are generally preferred.

25 The term "fluoroalkyl" preferably encompasses straight-chain groups having a terminal fluorine, i.e. fluoromethyl, 2-fluoroethyl, 3-fluoropropyl, 4-fluorobutyl, 5-fluoropentyl, 6-fluorohexyl and 7-fluoroheptyl. However, other positions of the fluorine are not excluded.

30 The term "oxaalkyl" or "alkoxyalkyl" preferably encompasses straight-chain radicals of the formula C<sub>n</sub>H<sub>2n+1</sub>-O-(CH<sub>2</sub>)<sub>m</sub>, in which n and m each, independently of one another, denote 1 to 10. Preferably, n is 1 and m is 1 to 6.

35 Compounds containing a vinyl end group and compounds containing a methyl end group typically have low rotational viscosity.

In the present application, both high-frequency technology and hyper-frequency technology denote applications having frequencies in the range from 1 MHz to 1 THz, preferably from 1 GHz to 500 GHz, more preferably 2 GHz to 300 GHz, particularly preferably from about 5 GHz to 150 GHz.

5

The liquid-crystalline media in accordance with the present invention may comprise further additives and chiral dopants in the usual concentrations. The total concentration of these further constituents is in the range from 0 % to 10 %, preferably 0.1 % to 6 %, based on the mixture as a whole.

10

The concentrations of the individual compounds used are each preferably in the range from 0.1 % to 3 %. The concentration of these and similar additives is not taken into consideration when quoting the values and concentration ranges of the liquid-crystal components and liquid-crystal compounds of the liquid-crystal media in this application.

15

Preferably the media according to the present invention comprise one or more chiral compounds as chiral dopants in order to adjust their cholesteric pitch. Their total concentration in the media according to the instant invention is preferably in the range 0.05 % to 15 %, more preferably from 1 % to 10 % and most preferably from 2 % to 6 %.

20

Optionally the media according to the present invention may comprise further liquid crystal compounds in order to adjust the physical properties. Such compounds are known to the expert. Their concentration in the media according to the instant invention is preferably 0 % to 30 %, more preferably 0.1 % to 20 % and most preferably 1 % to 15 %.

25

The response times are given as rise time ( $\tau_{on}$ ) for the time for the change of the relative tuning, respectively of the relative contrast for the electro-optical response, from 0 % to 90 % ( $t_{90} - t_0$ ), i.e. including the delay time ( $t_{10} - t_0$ ), as decay time ( $\tau_{off}$ ) for the time for the change of the relative tuning, respectively of the relative contrast for the electro-optical response, from 100 % back to 10 % ( $t_{100} - t_{10}$ ) and as the total response time ( $\tau_{total} = \tau_{on} + \tau_{off}$ ), respectively.

35

The liquid-crystalline media according to the invention consist of a plurality of compounds, preferably 3 to 30, more preferably 4 to 20 and very preferably 4 to 16 compounds. These compounds are mixed in a conventional manner. In general, the desired amount of the compound used in the smaller amount is dissolved in the compound used in the larger amount. If the temperature is above the clearing point of the compound used in the higher concentration, it is particularly easy to observe completion of the dissolution process. It is, however, also possible to prepare the media in other conventional ways, for example using so-called pre-mixes, which can be, for example, homologous or eutectic mixtures of compounds, or using so-called "multibottle" systems, the constituents of which are themselves ready-to-use mixtures.


All temperatures, such as, for example, the melting point  $T(C,N)$  or  $T(C,S)$ , the transition from the smectic (S) to the nematic (N) phase  $T(S,N)$  and the clearing point  $T(N,I)$  of the liquid crystals, are quoted in degrees Celsius. All temperature differences are quoted in differential degrees.


In the present invention and especially in the following examples, the structures of the mesogenic compounds are indicated by means of abbreviations, also referred to as acronyms. In these acronyms, the chemical formulae are abbreviated as follows using Tables A to C below. All groups  $C_nH_{2n+1}$ ,  $C_mH_{2m+1}$  and  $C_lH_{2l+1}$  or  $C_nH_{2n-1}$ ,  $C_mH_{2m-1}$  and  $C_lH_{2l-1}$  denote straight-chain alkyl or alkenyl, preferably 1-*E*-alkenyl, respectively, in each case having  $n$ ,  $m$  or  $l$  C atoms. Table A lists the codes used for the ring elements of the core structures of the compounds, while Table B shows the linking groups. Table C gives the meanings of the codes for the left-hand or right-hand end groups. Table D shows illustrative structures of compounds with their respective abbreviations.


**Table A: Ring elements**


35


C



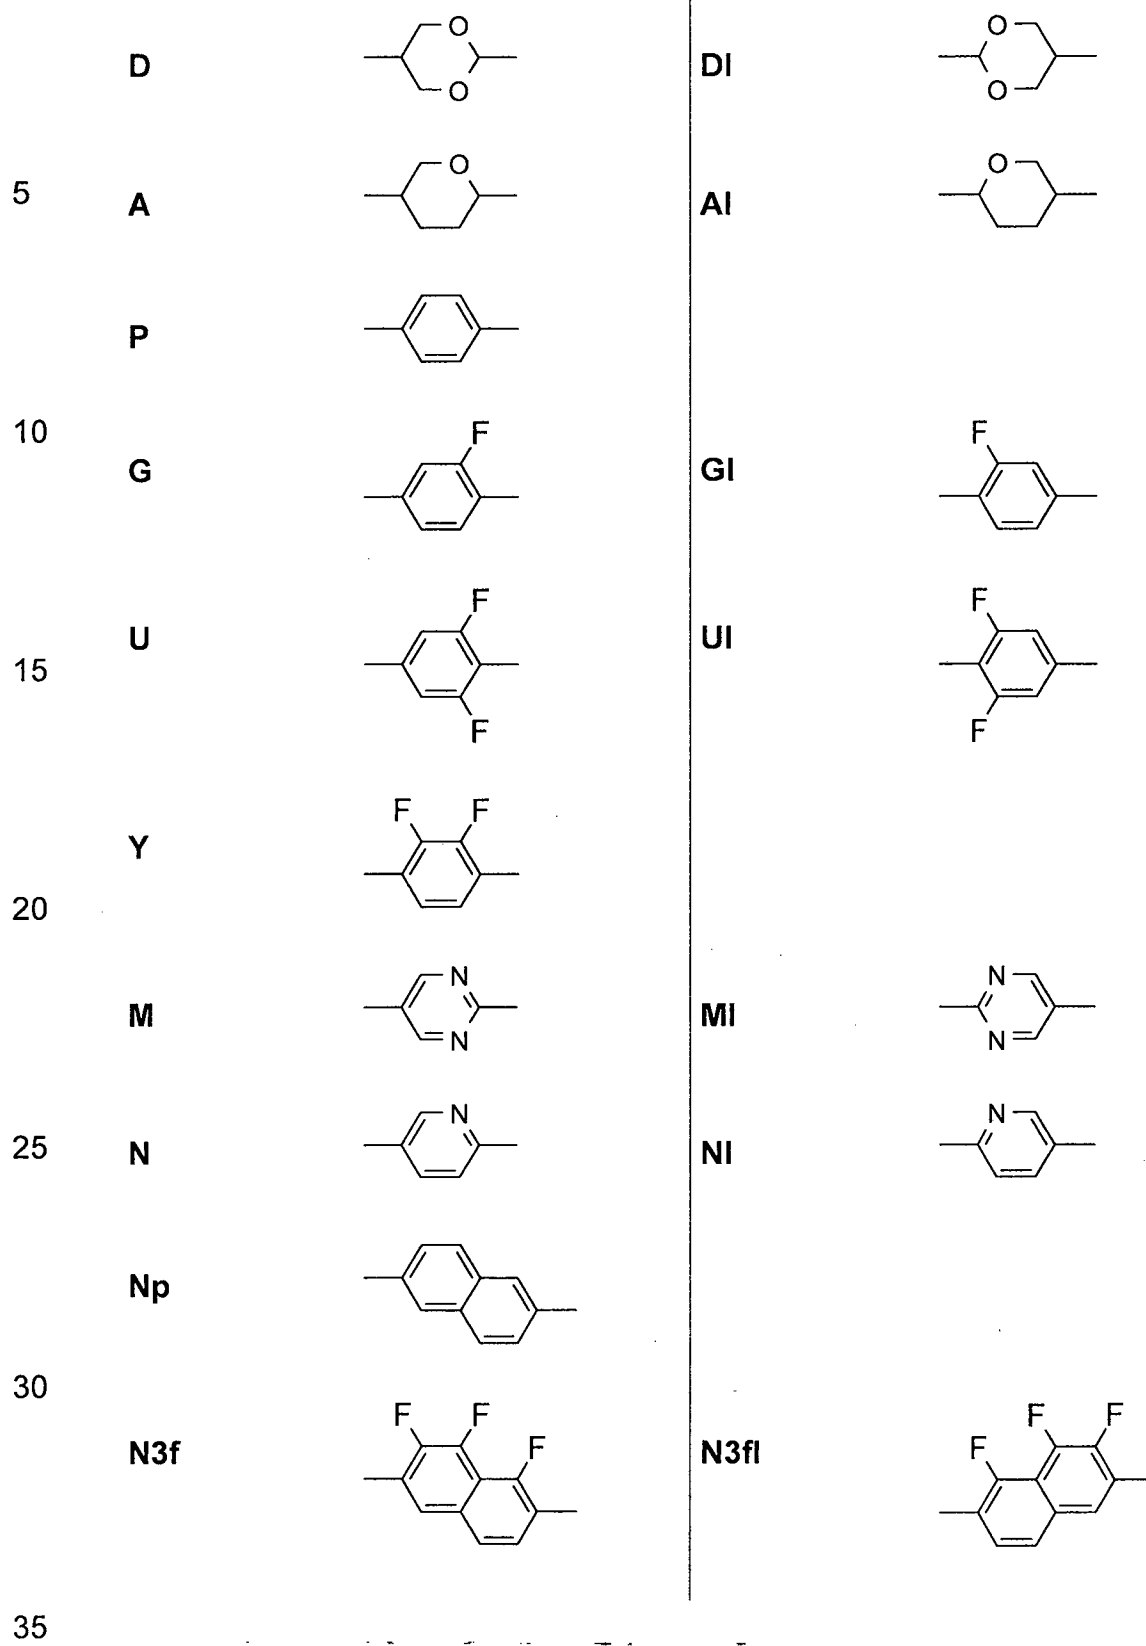

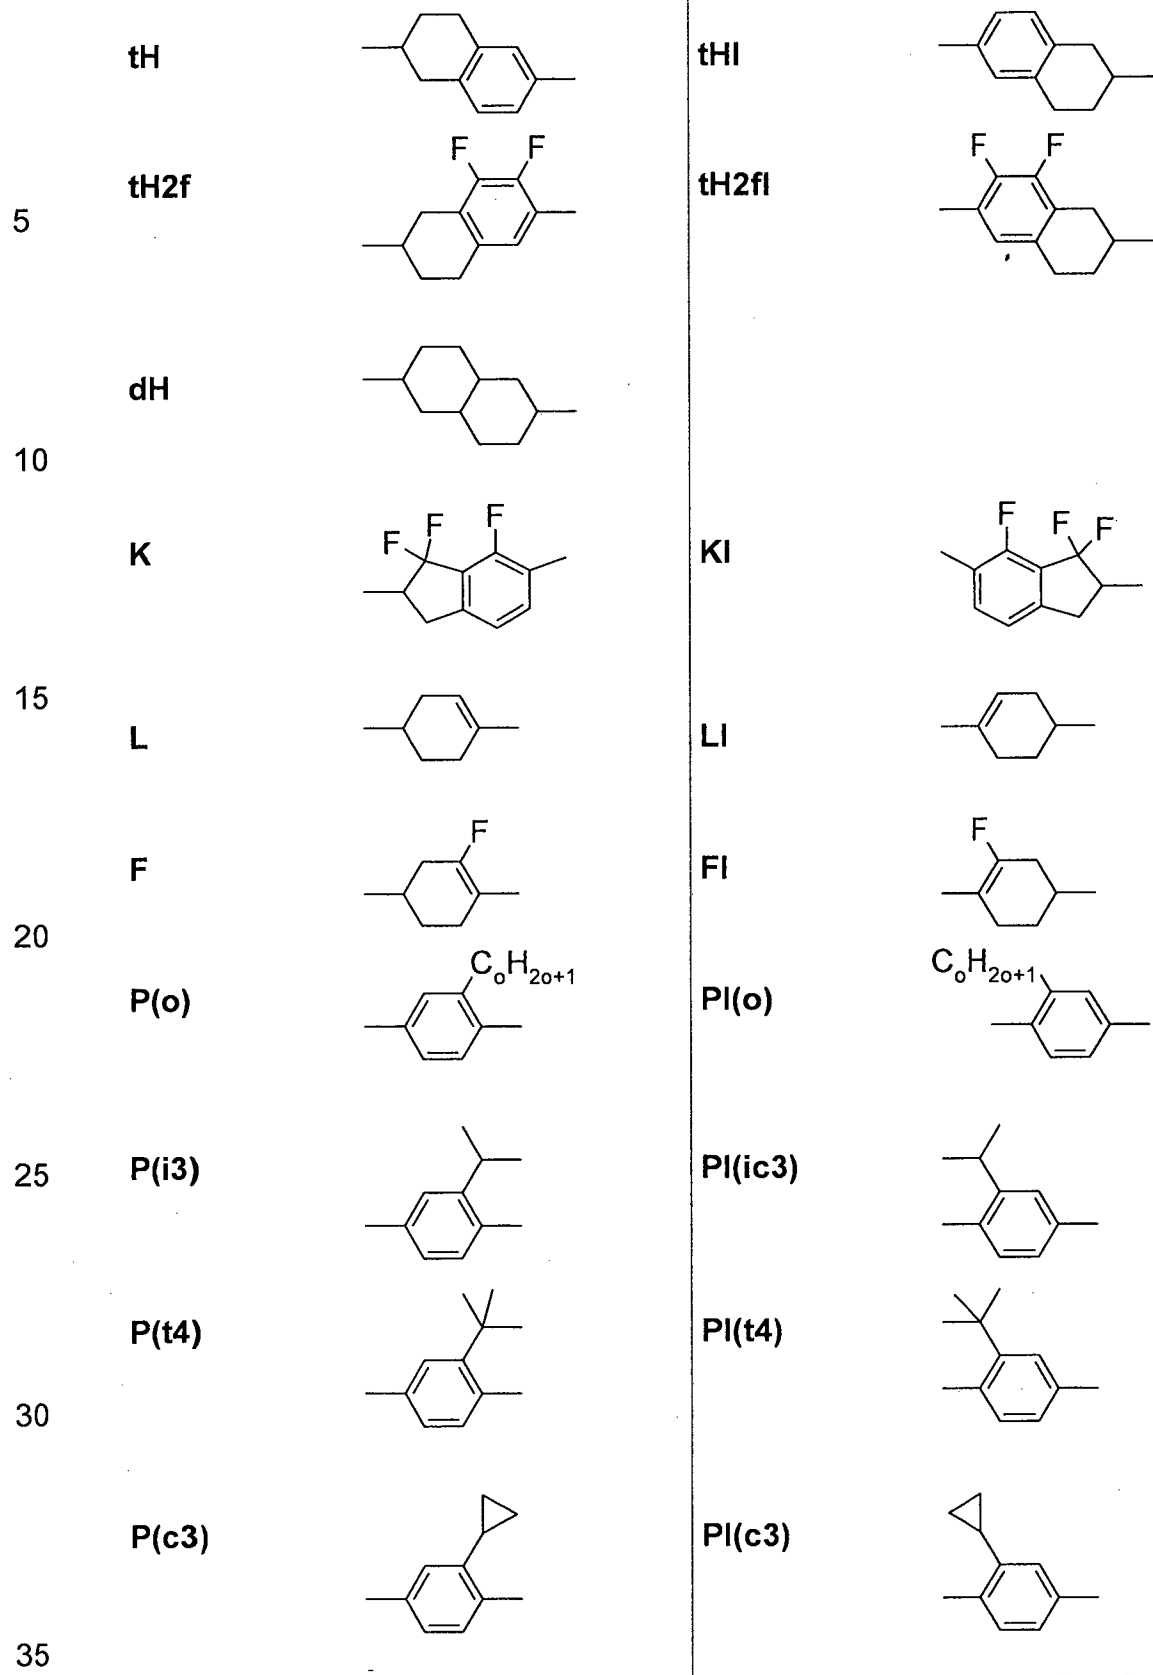

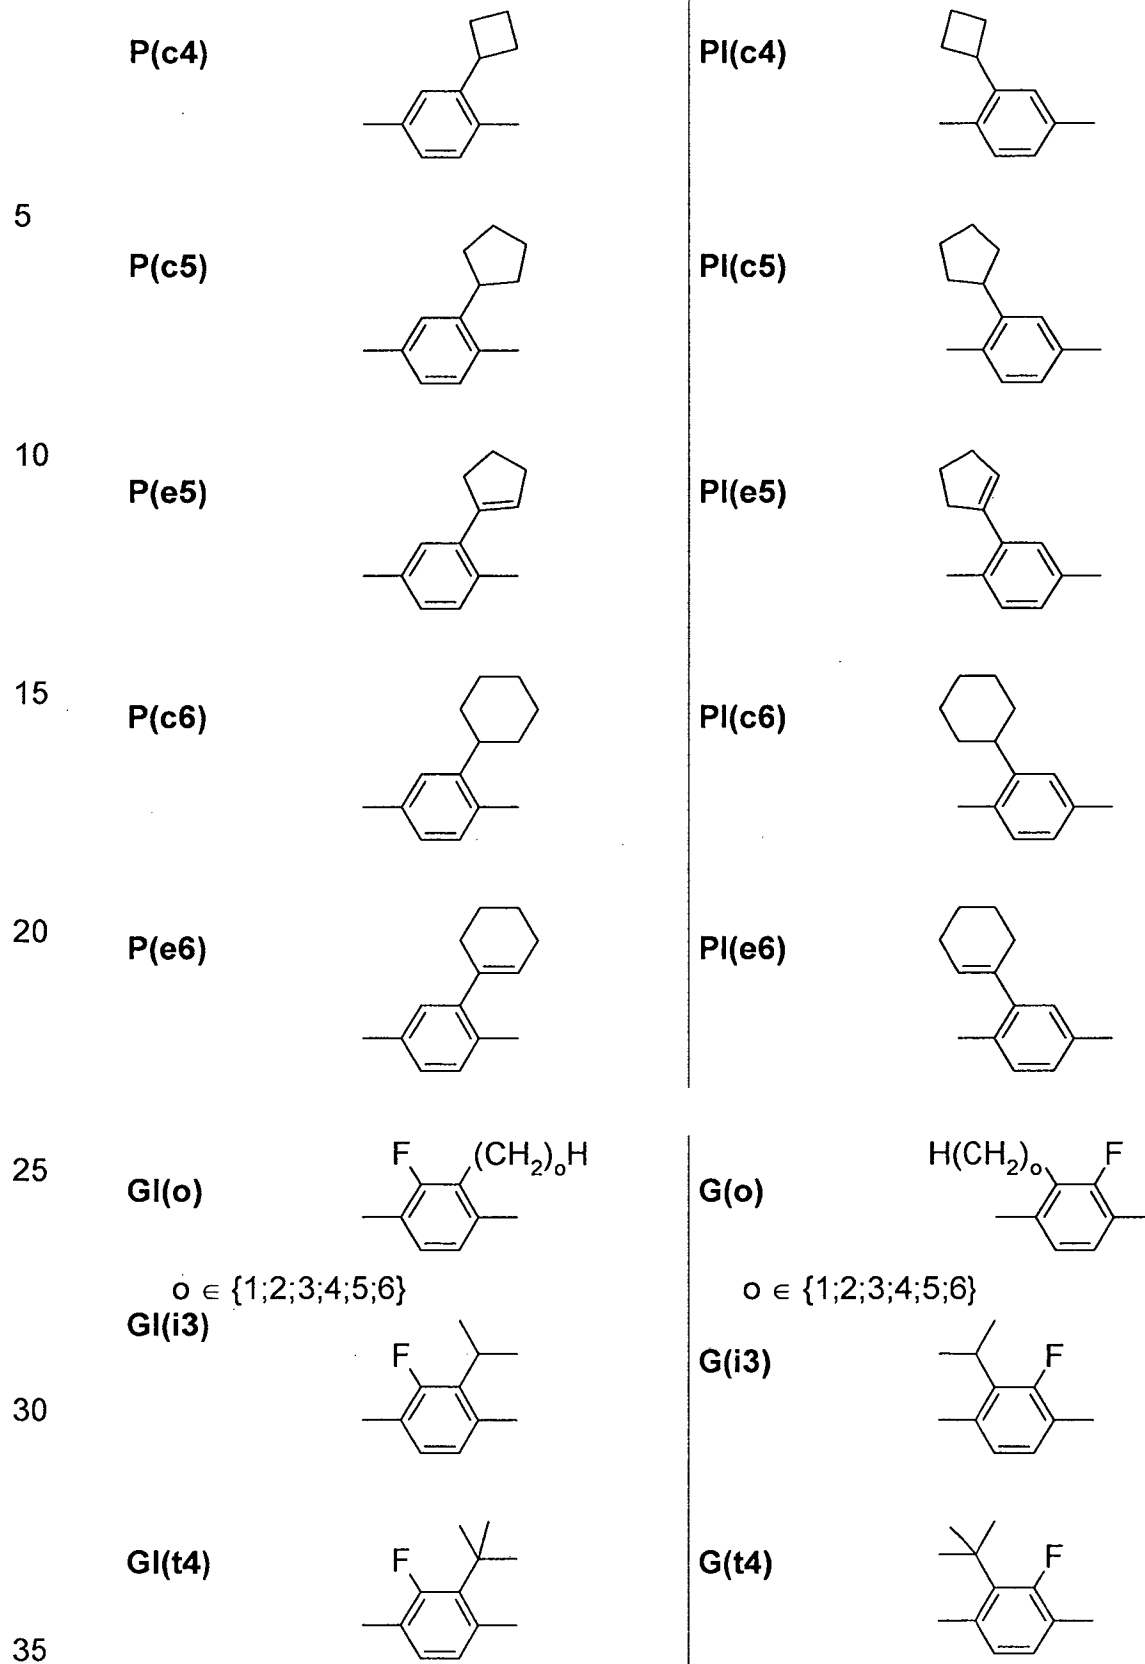

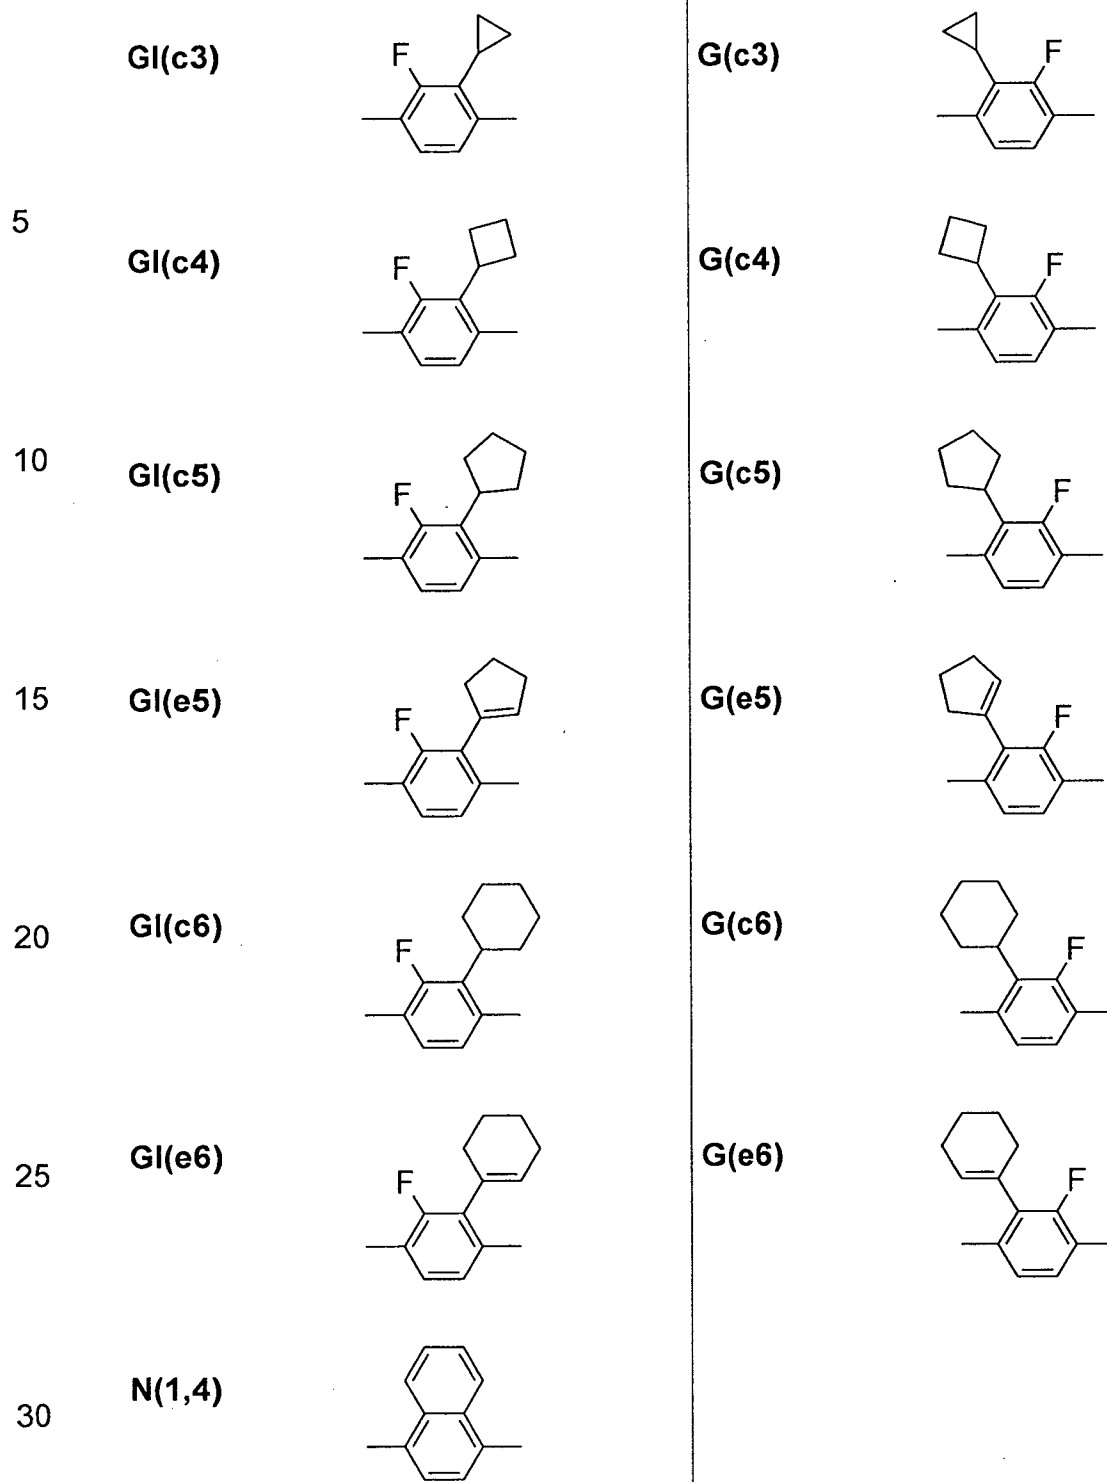

**Table B: Linking groups**

35	<b>E</b>	-CH <sub>2</sub> CH <sub>2</sub> -	<b>Z</b>	-CO-O-
	<b>V</b>	-CH=CH-	<b>ZI</b>	-O-CO-

<b>X</b>	-CF=CH-	<b>O</b>	-CH <sub>2</sub> -O-
<b>XI</b>	-CH=CF-	<b>OI</b>	-O-CH <sub>2</sub> -
<b>B</b>	-CF=CF-	<b>Q</b>	-CF <sub>2</sub> -O-
<b>T</b>	-C≡C-	<b>QI</b>	-O-CF <sub>2</sub> -
<b>W</b>	-CF <sub>2</sub> CF <sub>2</sub> -		

5

**Table C: End groups**

Left-hand side		Right-hand side		
		Used alone		
10	-n-	C <sub>n</sub> H <sub>2n+1</sub> -	-n	-C <sub>n</sub> H <sub>2n+1</sub>
	-nO-	C <sub>n</sub> H <sub>2n+1</sub> -O-	-nO	-O-C <sub>n</sub> H <sub>2n+1</sub>
	-V-	CH <sub>2</sub> =CH-	-V	-CH=CH <sub>2</sub>
	-nV-	C <sub>n</sub> H <sub>2n+1</sub> -CH=CH-	-nV	-C <sub>n</sub> H <sub>2n</sub> -CH=CH <sub>2</sub>
	-Vn-	CH <sub>2</sub> =CH-C <sub>n</sub> H <sub>2n+1</sub> -	-Vn	-CH=CH-C <sub>n</sub> H <sub>2n+1</sub>
	-nVm-	C <sub>n</sub> H <sub>2n+1</sub> -CH=CH-C <sub>m</sub> H <sub>2m</sub> -	-nVm	-C <sub>n</sub> H <sub>2n</sub> -CH=CH-C <sub>m</sub> H <sub>2m+1</sub>
	-N-	N≡C-	-N	-C≡N
15	-S-	S=C=N-	-S	-N=C=S
	-F-	F-	-F	-F
	-CL-	Cl-	-CL	-Cl
	-M-	CFH <sub>2</sub> -	-M	-CFH <sub>2</sub>
	-D-	CF <sub>2</sub> H-	-D	-CF <sub>2</sub> H
	-T-	CF <sub>3</sub> -	-T	-CF <sub>3</sub>
	-MO-	CFH <sub>2</sub> O-	-OM	-OCFH <sub>2</sub>
20	-DO-	CF <sub>2</sub> HO-	-OD	-OCF <sub>2</sub> H
	-TO-	CF <sub>3</sub> O-	-OT	-OCF <sub>3</sub>
	-FXO-	CF <sub>2</sub> =CH-O-	-OXF	-O-CH=CF <sub>2</sub>
	-A-	H-C≡C-	-A	-C≡C-H
	-nA-	C <sub>n</sub> H <sub>2n+1</sub> -C≡C-	-An	-C≡C-C <sub>n</sub> H <sub>2n+1</sub>
	-NA-	N≡C-C≡C-	-AN	-C≡C-C≡N
25		<b>Used in combination with others</b>		
	-...A...-	-C≡C-	-...A...	-C≡C-
	-...V...-	-CH=CH-	-...V...	-CH=CH-
	-...Z...-	-CO-O-	-...Z...	-CO-O-
	-...ZI...-	-O-CO-	-...ZI...	-O-CO-
	-...K...-	-CO-	-...K...	-CO-
30	-...W...-	-CF=CF-	-...W...	-CF=CF-

in which n and m each denote integers, and the three dots “...” are placeholders for other abbreviations from this table.

35

The following table shows illustrative structures together with their respective abbreviations. These are shown in order to illustrate the


meaning of the rules for the abbreviations. They furthermore represent compounds which are preferably used.

**Table D: Illustrative structures**


5

The following illustrative structures are compounds, which are particularly preferably employed, having a terminal –NCS group:


10

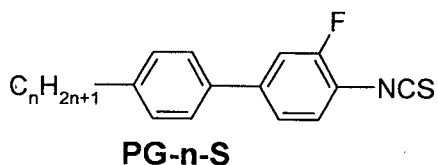


15

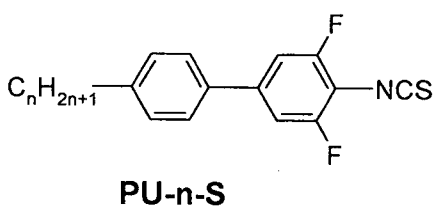


20

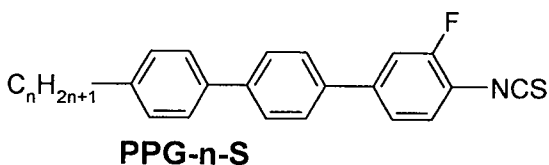


25

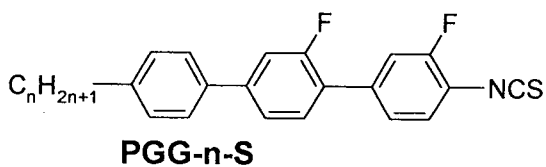


30

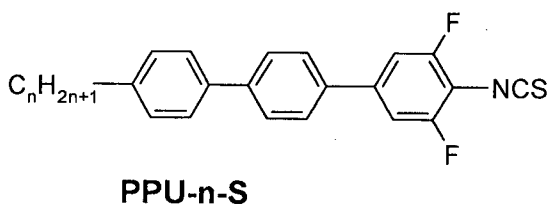

35

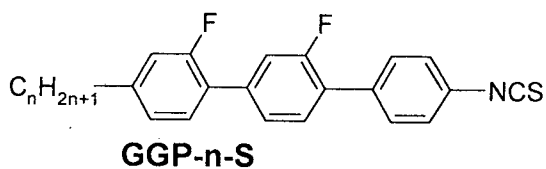


5

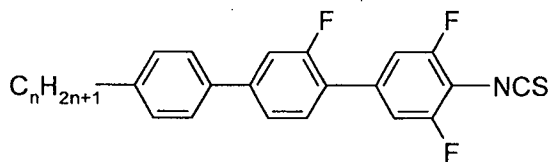


**PGU-n-S**

10




**CPG-n-S**

15




**CGG-n-S**

20

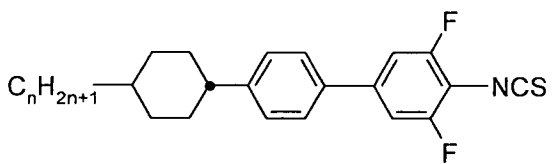


**CPU-n-S**

25

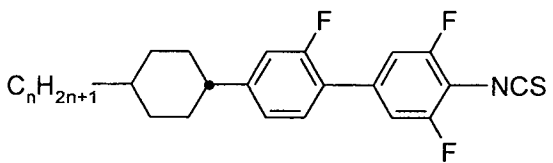


**CGU-n-S**

30




**PVG-n-S**

35

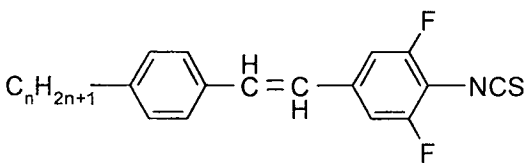


**PVU-n-S**


5

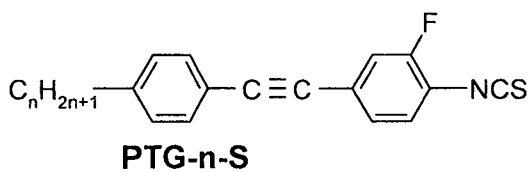


10

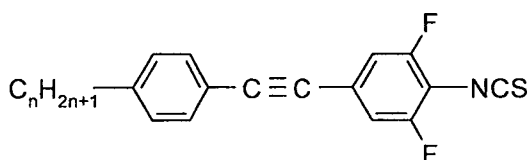


15

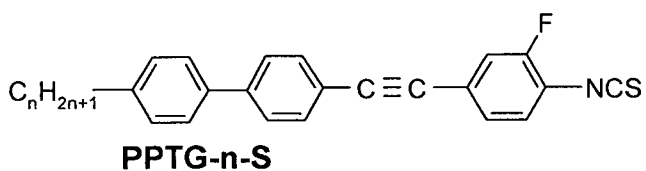

20

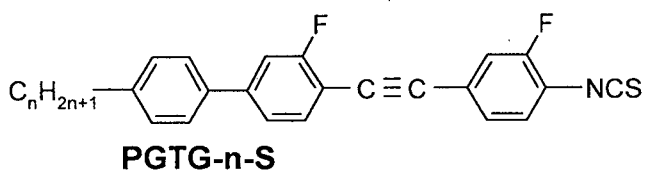


25

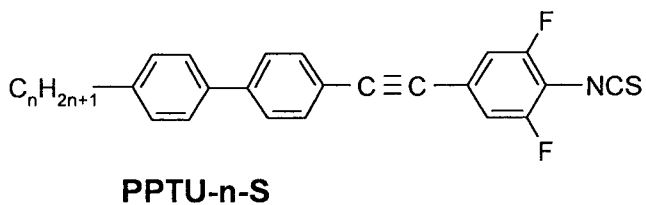


The following illustrative structures are compounds, which are preferably additionally used in the media:


30

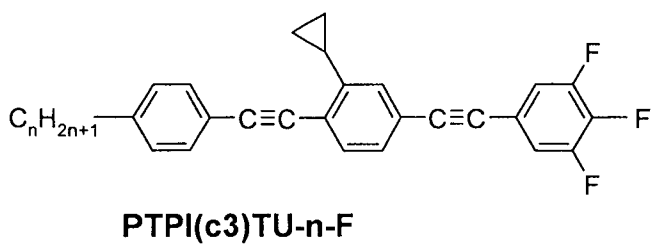


35

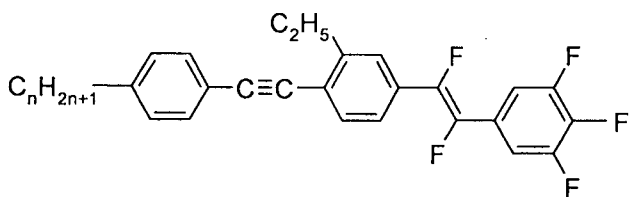


5 **PTPI(2)WU-n-F**

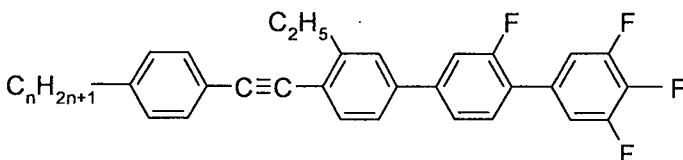

10 **PTPI(2)GU-n-F**

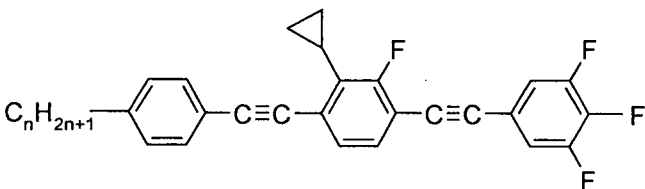


15 **PTG(c3)TU-n-F**

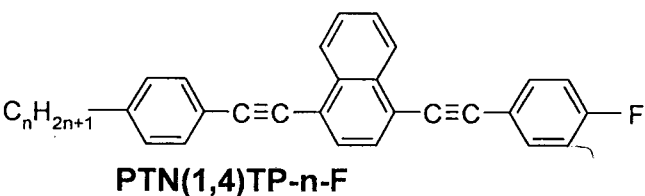


20 **PTN(1,4)TP-n-F**


25 The following illustrative structures are auxiliary compounds, which are optionally employed, having three 6-membered rings:

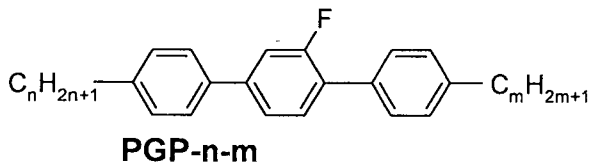


30 **PGP-n-m**

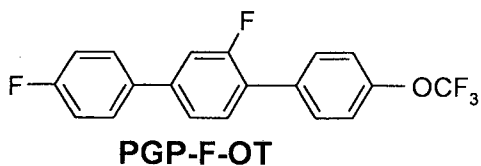


35 **PGP-F-OT**

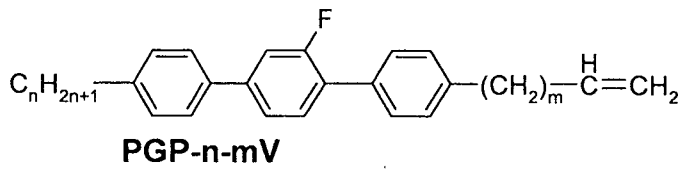


5

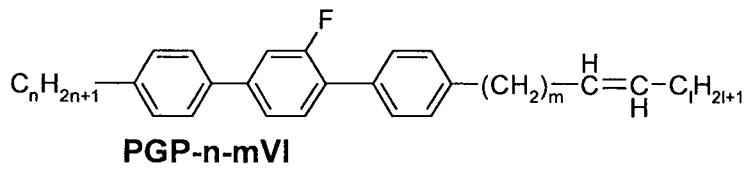


10

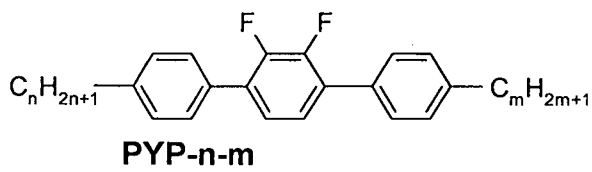


15

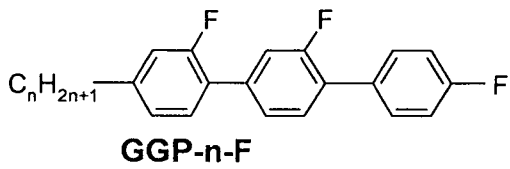


20

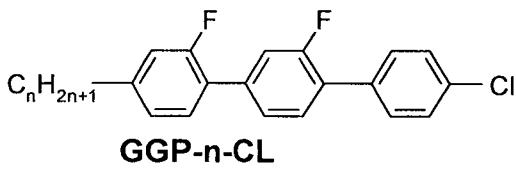


25

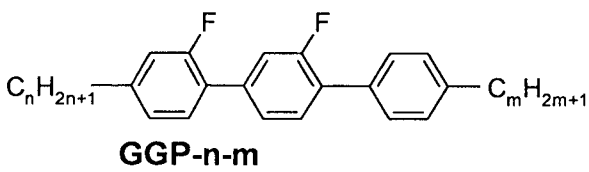


30

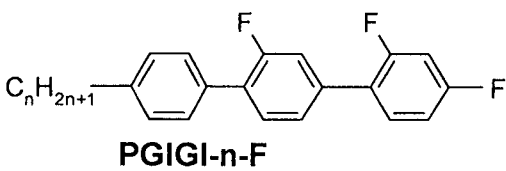


35

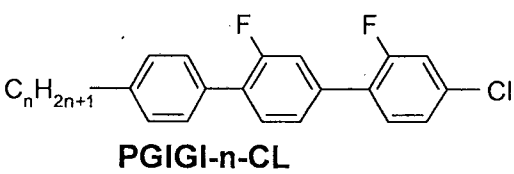

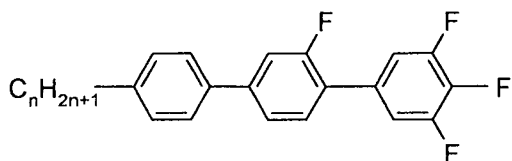


**PGU-n-F**

5

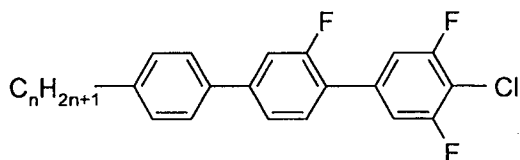


**PGU-n-CL**

10

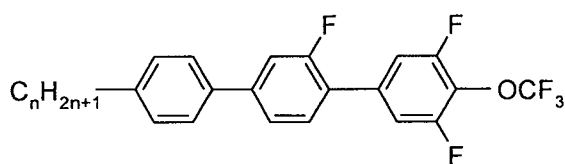


**PGU-n-OT**

15

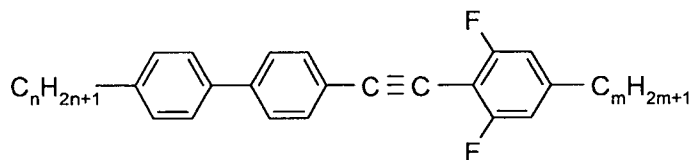

**PPTUI-n-m**

20




**PPTY-n-m**

25








The following illustrative structures are auxiliary compounds, which are optionally employed, having four 6-membered rings:

30




**PGGP-n-m**

35

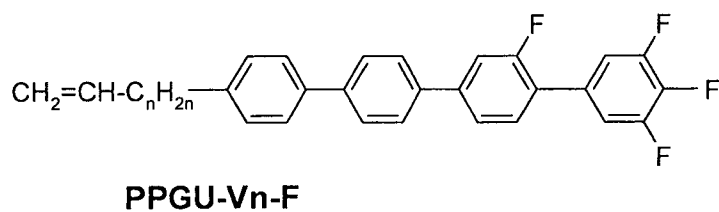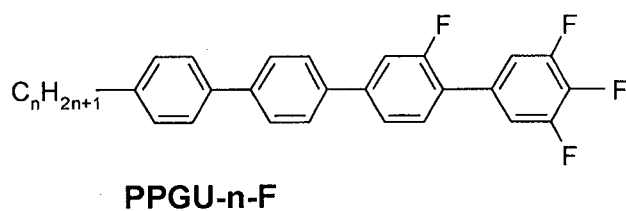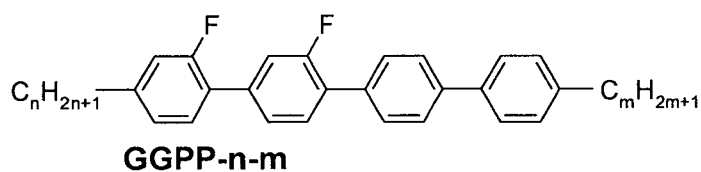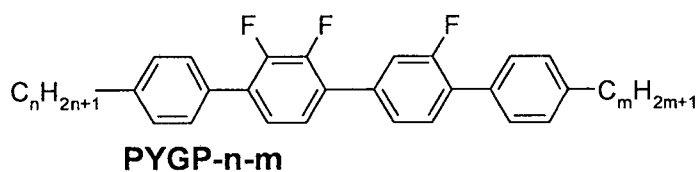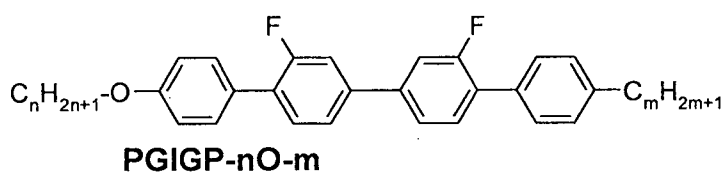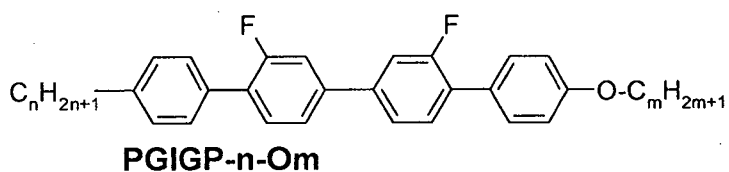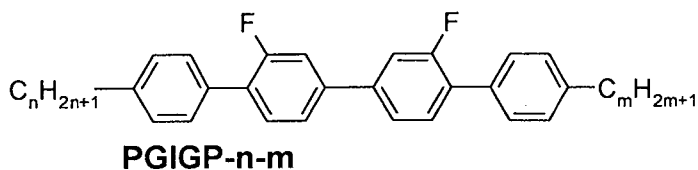


Illustrative structures of dielectrically neutral compounds which may additionally be employed:




**CPTP-n-m**

5




**CPPC-n-m**

10




**CGPC-n-m**

15




**CCZPC-n-m**

20




**CPGP-n-m**

25



**CPGP-n-mV**

30




**CPGP-n-mVI**

Illustrative structures of further compounds which may additionally be employed:


35

5

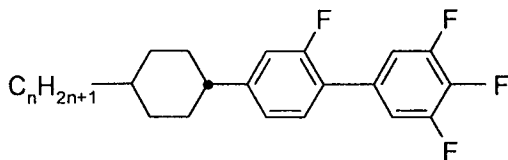


**CGU-n-F**

10

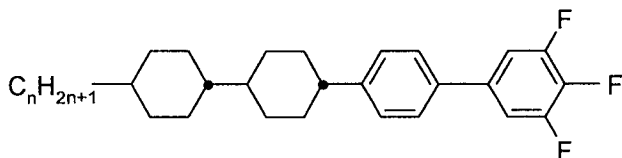


**CCPU-n-F**

15




**CCGU-n-F**

20




**CPGU-n-F**

25

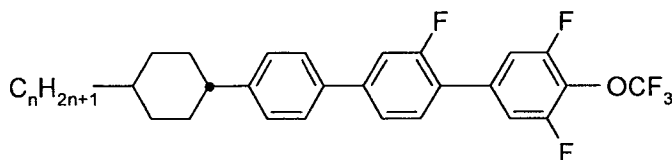


**CPGU-n-OT**

30






**PUQU-n-F**

35


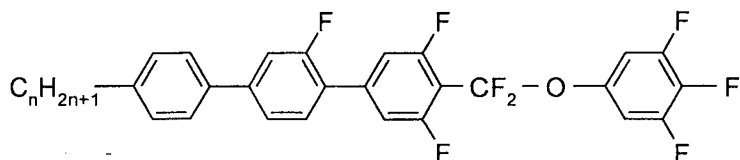



**PGUQU-n-F**

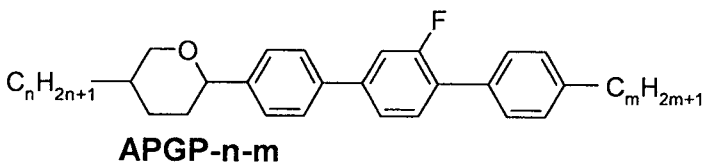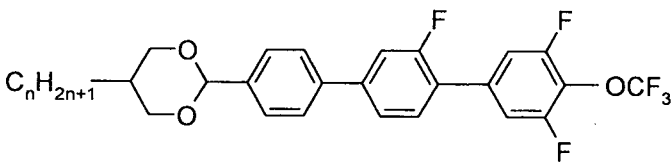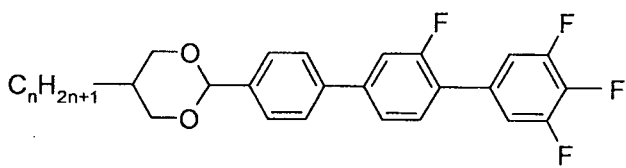

20 The following table, Table E, shows illustrative compounds, which can be and preferably are used as dichroic dyes in the mesogenic media in accordance with the present invention.


**Table E**

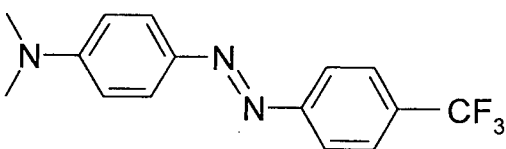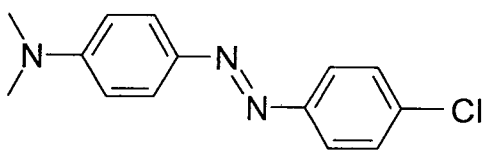




**AZO-3**

5




**AZO-4**

10

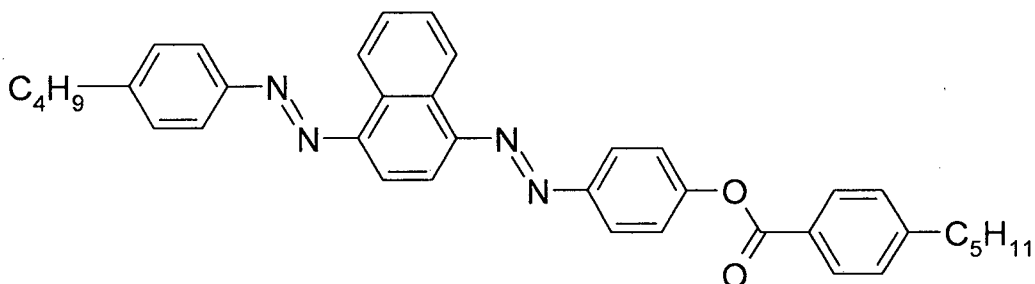


**DAZO-1**

15

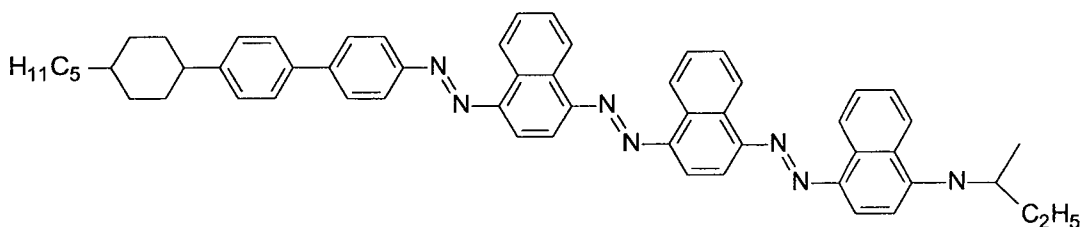

**TAZO-1**

20

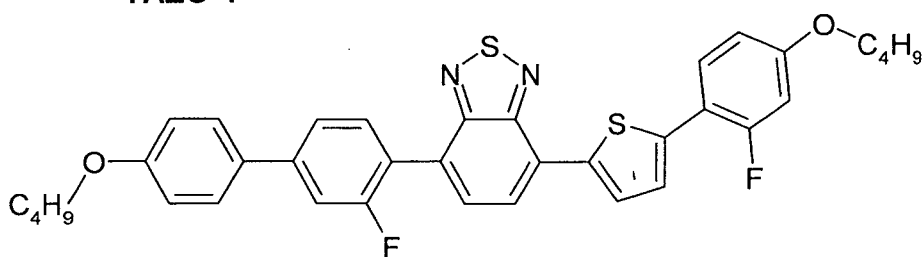

**THIO-1**

25

30

35

The mesogenic media in accordance with the present invention preferably comprise one, more preferably two, even more preferably three or more, compounds selected from the group consisting of the compounds from

Table E. The one or more dichroic dyes are preferably used in a concentration in the range from 0.1 % or more to 15 % or less, more preferably from 0.5 % or more to 10 % or less, and most preferably from 1.0 % or more to 8 % or less.



5

The following table, Table F, shows illustrative compounds which can be used as stabiliser in the mesogenic media in accordance with the present invention. The total concentration of these and similar compounds in the media is preferably 5% or less.



10

**Table F**



15

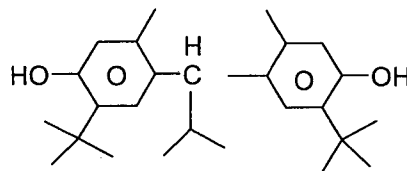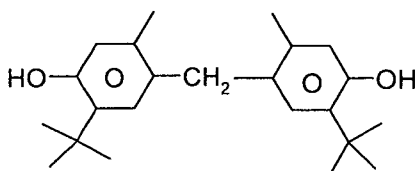



20

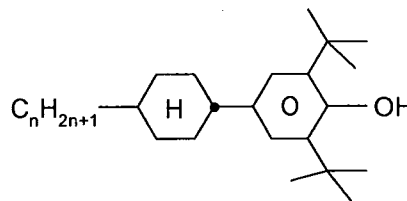

25





30


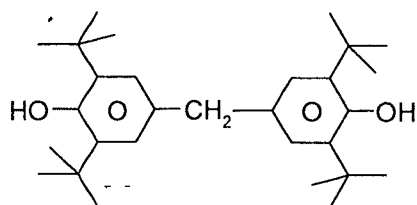


35



5

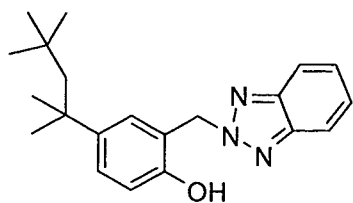


10



15

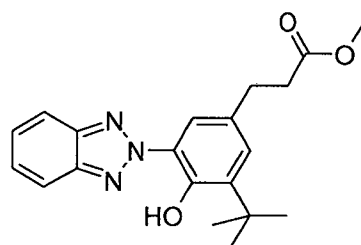

20


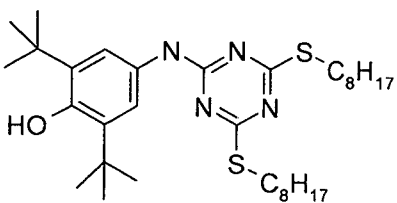


25

30



35

5

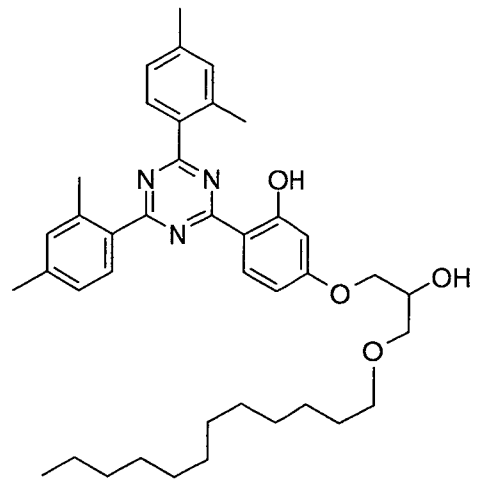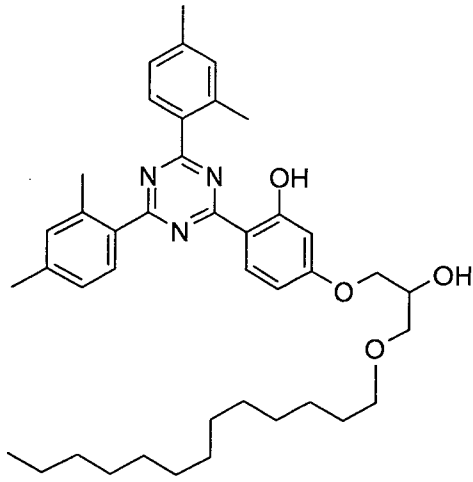



10

15

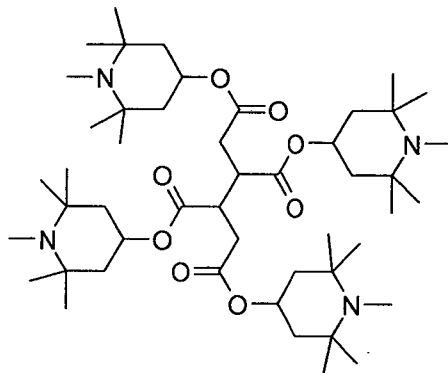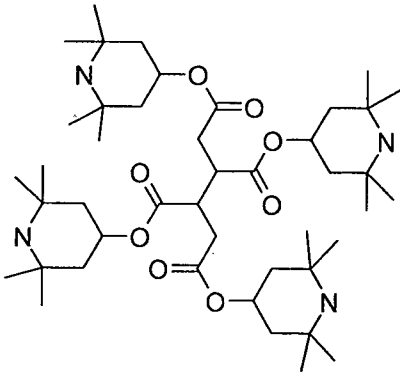



20

25

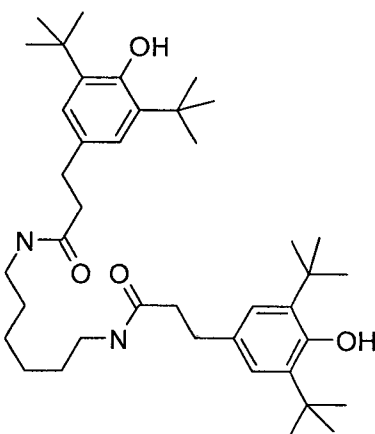
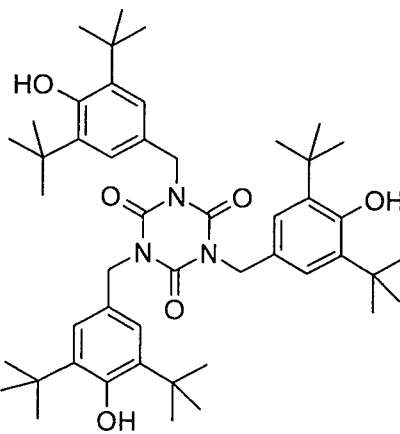


30

35

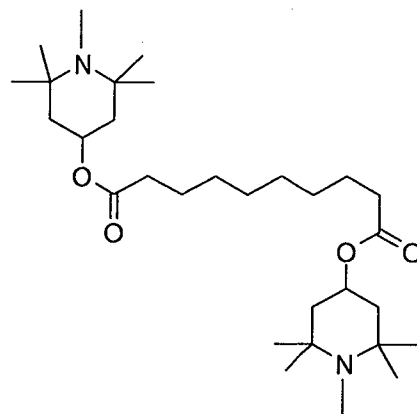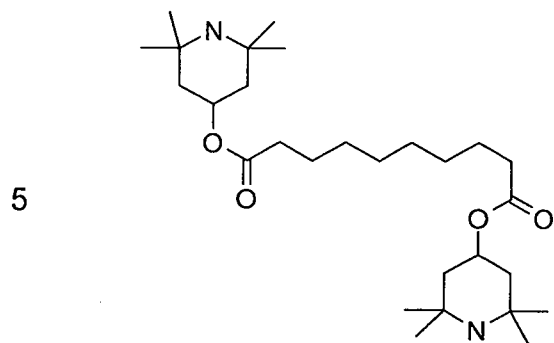

10

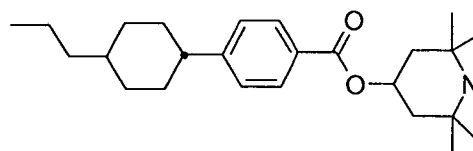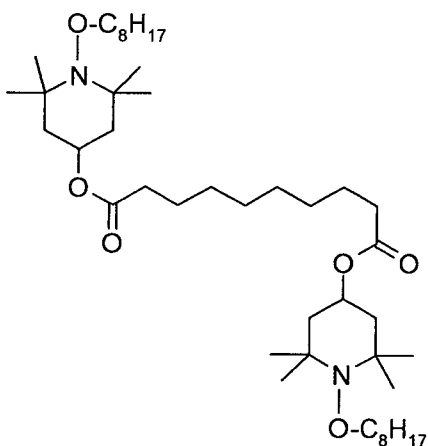


In a preferred embodiment of the present invention, the mesogenic media comprise one or more compounds selected from the group of the compounds from Table F.


The following table, Table G, shows illustrative compounds which can preferably be used as chiral dopants in the mesogenic media in accordance with the present invention.

30

**Table G**




**C 15**

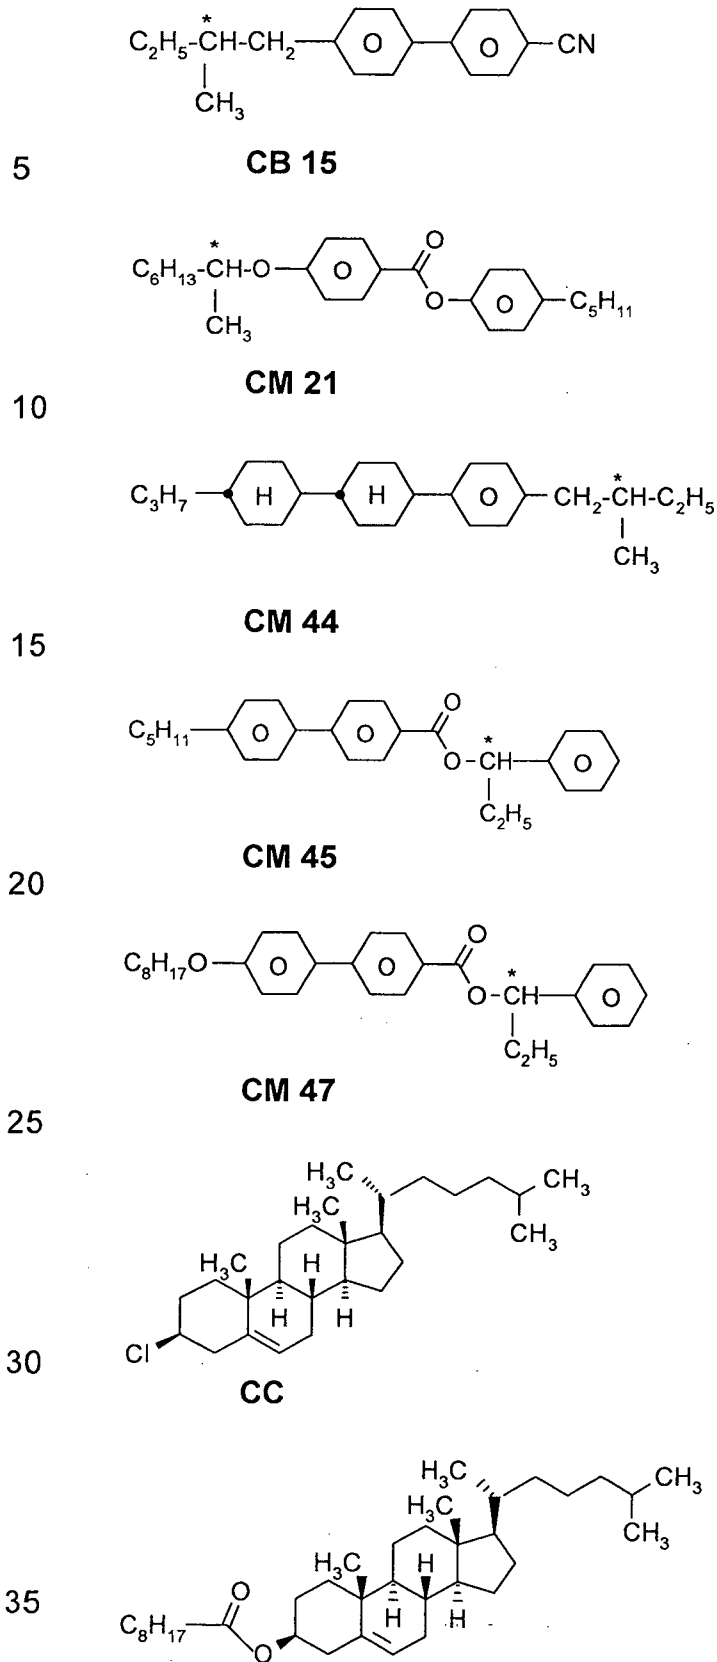


**CN**

5

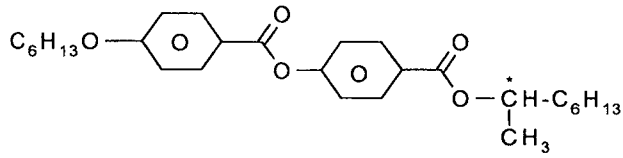


**R/S-811**

10

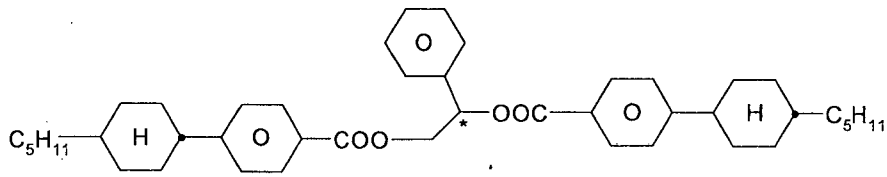


**R/S-1011**

15

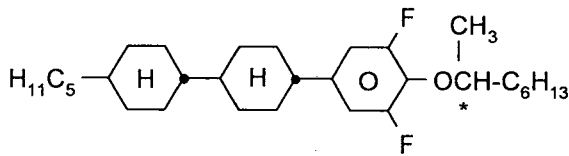


**R/S-2011**

20

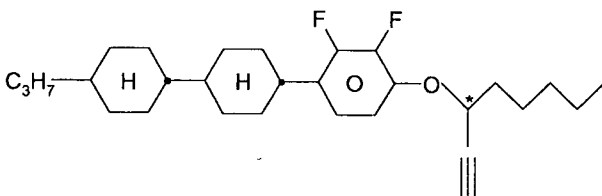


**R/S-3011**

25

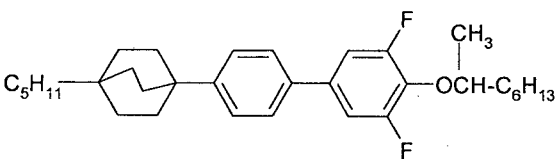

**R/S-4011**

30

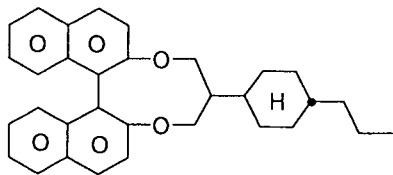

**R/S-5011**

35

In a preferred embodiment of the present invention, the mesogenic media comprise one or more compounds selected from the group of the compounds from Table G.

5 The mesogenic media in accordance with the present application preferably comprise two or more, preferably four or more, compounds selected from the group consisting of the compounds from the above tables.

10 The liquid-crystalline media in accordance with the present invention preferably comprise seven or more, preferably eight or more, compounds, preferably compounds having three or more, preferably four or more, different formulae, selected from the group of the compounds from Table D.

15

The following examples are merely illustrative of the present invention and they should not be considered as limiting the scope of the invention in any way. The examples and modifications or other equivalents thereof will  
20 become apparent to those skilled in the art in the light of the present disclosure.

### Examples

25 Example 1

#### Base Mixture

30 A liquid-crystal mixture B-1 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

35

Composition			Physical Properties	
Compound No.	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 93
5	1	18.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2	13.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	3	13.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.7
	4	8.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 5.0
	5	8.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 225
	6	20.0	$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0148
10	7	10.0	$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0082
	8	10.0	$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.326
	$\Sigma$	100.0	$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 22.0

Remark: t.b.d.: to be determined.

15  $k_{11} = 15.0 \text{ pN}; k_{33} = 15.4 \text{ V}; V_{10} = 0.86 \text{ V}$

This mixture is suitable for applications in the microwave range, in particular for phase shifters or LC based antenna elements in the microwave (MW) region, and suitable response times.

20

#### Examples 1.1 to 1.3

The mixture B-1 is divided into three parts. To each one of these three parts a certain concentration of the dichroic dye TAZO-1, as shown in table E above, is added to obtain the mixtures M-1.1, M-1.2 and M-1.3.

25

To these three parts alternatively 1.0 %, 3.0 % and 5.0 %, respectively, of TAZO-1 are added.

30 Table 1: Compositions of investigated mixtures

35

Material	B-1	TAZO-1
Example	Mixture Composition	
Number	Concentration / mass-%	
B-1	100.0	0.0
M-1.1	99.0	1.0
M-1.2	97.0	3.0
M-1.3	95.0	5.0

5

10

The three resultant mixtures M-1.1 to M-1.3 each are filled into test cells with antiparallel rubbed glass substrates covered by PI Al3046. The test cells have a cell gap of 50  $\mu\text{m}$ . The mixtures are investigated with respect to their general physical properties and to their performance in the microwave regime.

15

#### Example 2

To the mixture B-1 is added the dichroic dye AZO-1, as shown in table E above, in a concentration of 3.0%.

20

The resultant mixture M-2 is investigated with respect to its performance in microwave applications.

#### Example 3

25

To the mixture B-1 is added the dichroic dye AZO-2, as shown in table E above, in a concentration of 3.0%.

The resultant mixture M-3 is investigated with respect to its performance in microwave applications.

30

#### Example 4

To the mixture B-1 is added the dichroic dye AZO-3, as shown in table E above, in a concentration of 3.0%.

35

The resultant mixture M-4 is investigated with respect to its performance in microwave applications.

#### Example 5

5

To the mixture B-1 is added the dichroic dye THIO-1 (Merck KGaA, Darmstadt, Germany), as shown in table E above, in a concentration of 3.0%.

10

The resultant mixture M-5 is investigated with respect to its performance in microwave applications.

15

The following table shows a comparison for the microwave characteristics for mixtures B-1 and M-1.2, M-2, M-3, M-4 and M-5, wherein the latter mixtures each contain 3% of the respective dye as described above.

Table 2: Comparison of the microwave characteristics measure at 19 GHz

20

Mixture	$\tau$ (20°C, 19 GHz)	$\tan \delta_{\epsilon_{r,\perp}}$ (20°C, 19 GHz)	$\eta$ (20°C, 19 GHz)
B-1	0.326	0.0148	22.0
M-1.2	0.335	0.0138	24.3
M-2	0.331	0.0149	22.2
M-3	0.331	0.0150	22.1
M-4	0.325	0.0149	21.8
M-5	0.327	0.0145	22.6

25

30

Surprisingly, it is found that the provision of the respective dichroic dyes can provide benefits in terms of increased tunability. At the same time the dielectric loss is kept at least at a comparable level or is even improved, such that the figure of merit  $\eta$  is at least comparable or even significantly improved. An increasing amount of dichroic dye can further improve the advantageous effects.

35

For comparison and as reference, the well known compound 4'-pentyl-4-cyanobiphenyl (also called 5CB or K15, Merck KGaA) gives  $\tan \delta_{\varepsilon_{r,\perp}} = 0.026$  and  $\eta = 4.3$  at 20°C.

5

The following mixtures are also suitable for applications in the microwave range, in particular for phase shifters or LC based antenna elements in the MW region.

10

### Example 6

#### Base Mixture

15

A liquid-crystal mixture B-6 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

20

25

30

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, I) / °C	= 112
1	PVG-3-S	6.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= 1.5454
2	PVG-4-S	16.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PVG-5-S	6.0	$\varepsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 25.7
4	PTG-3-S	10.0	$\varepsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.4
5	PTG-5-S	14.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 270
6	PTU-3-S	8.0		
7	PGU-3-S	8.0	$\tan \delta_{\varepsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0143
8	PPTU-4-S	16.0	$\tan \delta_{\varepsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0038
9	PPTU-5-S	16.0	$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.252
$\Sigma$		100.0	$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 17.6

Remark: t.b.d.: to be determined.

35

The mixture B-6 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is

added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

5 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

### Example 7

#### 10 Base Mixture

A liquid-crystal mixture B-7 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, l) / °C	= 100
20	1	PU-3-S 16.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2	PVG-4-S 13.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	3	PVG-5-S 13.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 28.2
	4	PTU-3-S 7.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 5.0
	5	PTU-5-S 7.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 245
25	6	PGU-3-S 24.0	$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
	7	PPTU-4-S 10.0	$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
	8	PPTU-5-S 10.0	$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
	$\Sigma$	100.0	$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.

Remark: t.b.d.: to be determined.

30

$$k_{11} = 15.8 \text{ pN}; k_{33} = 15.1 \text{ V}; V_{10} = 0.87 \text{ V}$$

The mixture B-7 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is

35

added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

5 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

### Example 8

10 A liquid-crystal mixture B-8 having the composition and properties as indicated in the following table is prepared.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N,I) / °C	= 98
15			$n_e$ (20°C, 589.3 nm)	= t.b.d.
	1	GGP-3-S 8.0	$\Delta n$ (20°C, 589.3 nm)	= t.b.d.
	2	PGG-3-S 12.0	$\epsilon_{  }$ (20°C, 1 kHz)	= 26.7
	3	PGU-3-S 12.0	$\epsilon_{\perp}$ (20°C, 1 kHz)	= 5.1
	4	PVG-3-S 6.0	$k_{11}$ (20°C) / pN	17.7
20	5	PVG-4-S 18.0	$k_{33}$ (20°C) / pN	15.7
	6	PTG-3-S 10.0	$V_0$ (20°C) / V	0.96
	7	PTG-5-S 18.0	$\gamma_1$ (20°C) / mPa · s	= 698
	8	PTU-3-S 10.0	$\tan \delta_{\epsilon r, \max}$ (20°C, 19GHz)	= 0.0189
	9	PPTU-4-S 6.0	$\tau$ (20°C, 19 GHz)	= 0.336
25	$\Sigma$	100.0	$\eta$ (20°C, 19 GHz)	= 17.9

Remark: t.b.d.: to be determined.

30 The mixture B-8 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

35 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

Examples 9 to 13

## Base Mixtures

5

To the liquid crystalline medium B-8 of Example 8 alternatively a certain concentration of a further single compound, one each, is added and the resultant base mixtures (B-9 to B-13) are investigated for their general physical properties and for their performance in the microwave regime.

10

Composition				
Example No.	Mixture No.	Compound Abbreviation	c(Comp.)	c(M-4)
			/ %	
8	B-8	None	0.0	100.0
9	B-9	PTPI(c3)TU-4-F	5.0	95.0
10	B-10	PTPI(2)WU-6-F	10.0	90.0
11	B-11	PTPI(2)GU-4-F	10.0	90.0
12	B-12	PTG(c3)TU-4-F	5.0	95.0
13	B-13	PTN(1,4)TP-3-F	5.0	95.0

20

Physical Properties I, General I (20°C except T(N.I) )					
Example No.	Mixture No.	T(N,I) /°C	$\Delta n$	$\epsilon_{11}$	$\Delta\epsilon$
8	B-8	98	t.b.d.	26.7	21.5
9	B-9	98	t.b.d.	26.1	20.9
10	B-10	90	t.b.d.	26.0	21.0
11	B-11	102	t.b.d.	27.0	21.9
12	B-12	93.9	t.b.d.	27.0	21.8
13	B-13	99.5	t.b.d.	25.9	20.9

30

Remark: t.b.d.: to be determined.

35

5

10

Physical Properties II, General II (20°C)					
Example No.	Mixture No.	$\gamma_1$	$k_{11}$ / pN	$k_{33}$ / pN	$V_0 / V$
8	B-8	241	17.7	15.7	0.96
9	B-9	254	15.1	14.6	0.90
10	B-10	272	15.8	15.8	0.91
11	B-11	319	16.0	16.9	0.90
12	B-12	257	15.8	15.0	0.90
13	B-13	273	18.2	15.9	0.99

15

20

Physical Properties III, Microwave I (20°C, 19 GHz)					
Example No.	Mixture No.	$\epsilon_{r,\perp}$	$\epsilon_{r,\parallel}$	$\tan \delta_{\epsilon_{r,\parallel}}$	$\tan \delta_{\epsilon_{r,\perp}}$
8	B-8	3.74	2.49	0.0189	0.0091
9	B-9	3.68	2.48	0.0177	0.0088
10	B-10	3.67	2.49	0.0174	0.0084
11	B-11	3.68	2.48	0.0170	0.0082
12	B-12	3.70	2.49	0.0180	0.0088
13	B-13	3.73	2.49	0.0175	0.0085

25

30

Physical Properties IV, Microwave II (20°C, 19 GHz)					
Example No.	Mixture No.	$\tan \delta_{\epsilon_{r,\perp}}$	$\tau_{\epsilon_r}$	$\eta$	
8	B-8	0.0189	0.336	17.8	
9	B-9	0.0177	0.326	18.4	
10	B-10	0.0174	0.323	18.6	
11	B-11	0.0170	0.327	19.3	
12	B-12	0.0180	0.327	18.1	
13	B-13	0.0175	0.332	19.0	

35

The mixtures B-9 to B-13 are respectively divided into seven parts. Respectively, to three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively,

AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

5 The resultant mixtures comprising the respective dichroic compounds in the respective concentrations show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

#### 10 Example 14

#### Base Mixture

15 A liquid-crystal mixture B-14 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, I) / °C	= 126.5
1	PU-3-S	10.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PTU-3-S	10.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PTU-5-S	10.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.1
4	CGU-2-S	10.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.5
5	CGU-3-S	10.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 299
6	CGU-4-S	10.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 14.8
7	CGU-5-S	10.0	$k_3 / k_1(20^\circ\text{C})$	= 1.43
8	PGU-3-S	16.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.86
9	PPTU-4-S	7.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.36
10	PPTU-5-S	7.0	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.44
$\Sigma$		100.0	$\tan \delta_{\epsilon r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0116
			$\tan \delta_{\epsilon r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0064
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.315
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 27.2

35 Remark: t.b.d.: to be determined.

The mixture B-14 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

### Example 15

#### Base Mixture

A liquid-crystal mixture B-15 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
No	Compound Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 123
	1 PU-3-S	10.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2 PTU-3-S	10.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
25	3 PTU-5-S	10.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 26.9
	4 CGU-2-S	20.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.7
	5 CGU-4-S	20.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 287
	6 PGU-3-S	16.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 14.0
	7 PPTU-4-S	7.0	$k_3 / k_1(20^\circ\text{C})$	= 1.39
30	8 PPTU-5-S	7.0	$V_o(20^\circ\text{C}) / \text{V}$	= 0.84
	$\Sigma$	<u>100.0</u>	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.36
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.42
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0116
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0066
35			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.310
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 26.7

Remark: t.b.d.: to be determined.

The mixture B-15 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

Example 16

A liquid-crystal Base Mixture B-16 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, I) / °C	= t.b.d.
1	PU-3-S	14.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PTU-3-S	14.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	CGU-2-S	20.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= t.b.d.
4	CGU-4-S	20.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= t.b.d.
5	PGU-3-S	18.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= t.b.d.
6	PPTU-4-S	7.0	$k_1(20^\circ\text{C}) / \text{pN}$	= t.b.d.
7	PPTU-5-S	7.0	$k_3 / k_1(20^\circ\text{C})$	= t.b.d.
$\Sigma$		100.0	$V_o(20^\circ\text{C}) / \text{V}$	= t.b.d.
			$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.

Remark: t.b.d.: to be determined.

5 The mixture B-16 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

10 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

#### Example 17

15 Base Mixture

20 A liquid-crystal mixture B-17 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

25

30

35

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, l) / ^\circ\text{C}$	= 121.5
5	1 PU-3-S	8.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2 PVG-4-S	8.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	3 PVG-5-S	8.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 26.2
	4 PTU-3-S	8.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
	5 PTU-5-S	8.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 298
	6 CGU-3-S	10.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 16.0
10	7 CGU-4-S	10.0	$k_3 / k_1(20^\circ\text{C})$	= 1.31
	8 CGU-5-S	10.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.91
	9 PGU-3-S	16.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.36
	9 PPTU-4-S	7.0	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.48
	11 PPTU-5-S	<u>7.0</u>	$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0121
15	$\Sigma$	<u>100.0</u>	$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0067
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.321
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 26.5

Remark: t.b.d.: to be determined.

20 The mixture B-17 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

25 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

### 30 Example 18

#### Base Mixture

35 A liquid-crystal mixture B-18 having the composition and properties as indicated in the following table is prepared and characterized with respect

to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
5	Compound	Conc.		
	No	Abbreviation / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 124
	1	PU-3-S 8.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2	PVG-4-S 8.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	3	PVG-5-S 8.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 26.2
10	4	PTU-3-S 8.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
	5	PTU-5-S 8.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 311
	6	CGU-4-S 15.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 16.2
	7	CGU-5-S 15.0	$k_3 / k_1(20^\circ\text{C})$	= 1.28
	8	PGU-3-S 16.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.91
15	9	PPTU-4-S 7.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.37
	10	PPTU-5-S 7.0	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.48
	$\Sigma$	<u>100.0</u>	$\tan \delta_{\epsilon r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0120
			$\tan \delta_{\epsilon r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0066
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.318
20			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 26.2

Remark: t.b.d.: to be determined.

The mixture B-18 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

#### Example 19

35 Base Mixture

A liquid-crystal mixture B-19 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

5

10

15

20

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 126.5
1	PU-3-S	10.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PTU-3-S	10.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PTU-5-S	10.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.4
4	CGU-2-S	14.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
5	CGU-3-S	13.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 297
6	CGU-4-S	13.0	$k_1(20^\circ\text{C}) /$	= 14.5
7	PGU-3-S	16.0	$k_3 / k_1(20^\circ\text{C})$	= 1.45
8	PPTU-4-S	7.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.84
9	PPTU-5-S	<u>7.0</u>	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.36
$\Sigma$		<u>100.0</u>	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.44
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0115
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0065
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.313
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 27.2

Remark: t.b.d.: to be determined.

25

The mixture B-19 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

30

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

35

Example 20

## Base Mixture

A liquid-crystal mixture B-20 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, I) / °C	= 115.5
1	PVG-4-S	16.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PVG-5-S	16.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PTU-3-S	14.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.0
4	PTU-5-S	10.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.5
5	PTG-5-S	14.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 304
6	PGU-3-S	14.0	$k_1(20^\circ\text{C}) / \text{pN/}$	= t.b.d.
7	PPTU-4-S	15.0	$k_3 / k_1(20^\circ\text{C})$	= t.b.d.
8	PPTU-5-S	15.0	$V_0(20^\circ\text{C}) / \text{V}$	= 1.07
$\Sigma$		<u>100.0</u>	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.

Remark: t.b.d.: to be determined.

The mixture B-20 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

Example 21

## Base Mixture

5 A liquid-crystal mixture B-21 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 116.5
1	PU-3-S	20.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PVG-4-S	16.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PVG-5-S	16.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.7
4	PGU-3-S	16.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
5	PPTU-4-S	16.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 292
6	PPTU-5-S	16.0	$k_1(20^\circ\text{C}) / \text{pN}$	= t.b.d.
$\Sigma$		100.0	$k_3 / k_1(20^\circ\text{C})$	= t.b.d.
			$V_0(20^\circ\text{C}) / \text{V}$	= 1.05
			$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.

Remark: t.b.d.: to be determined.

30 The mixture B-21 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

5 Example 22

Base Mixture

10 A liquid-crystal mixture B-22 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 95
1	PU-3-S	16.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PVG-4-S	14.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PVG-5-S	14.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.4
4	PTU-3-S	8.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 5.0
5	PTU-5-S	8.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 234
6	PGU-3-S	14.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 15.6
7	PPTU-4-S	10.0	$k_3 / k_1(20^\circ\text{C})$	= 1.00
8	PPTU-5-S	10.0	$V_o(20^\circ\text{C}) / \text{V}$	= 0.88
$\Sigma$		100.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.56
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.68
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0075
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0136
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.306
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 22.5

Remark: t.b.d.: to be determined.

35 The mixture B-22 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is

added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

5 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

### Example 23

10 A liquid-crystal mixture B-23 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 96
1	PU-3-S	20.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PVG-4-S	15.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PVG-5-S	15.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.8
4	PTU-3-S	10.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 5.0
5	PGU-3-S	14.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 230
6	PPTU-4-S	10.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 15.6
7	PPTU-5-S	10.0	$k_3 / k_1(20^\circ\text{C})$	= 1.00
$\Sigma$		100.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.88
			$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.48
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.67
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0083
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0152
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.324
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 21.0

Remark: t.b.d.: to be determined.

35 The mixture B-23 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is

added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

5 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

#### Example 24

#### 10 Base Mixture

A liquid-crystal mixture B-24 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave  
15 components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, I) / °C	= 125
20	1	PU-3-S 10.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2	PTU-3-S 10.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	3	PTU-5-S 10.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.2
	4	CPU-2-S 20.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
	5	CPU-5-S 20.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 310
25	6	PGU-3-S 16.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 14.1
	7	PPTU-4-S 7.0	$k_3 / k_1(20^\circ\text{C})$	= 1.44
	8	PPTU-5-S 7.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.85
	$\Sigma$	<u>100.0</u>	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
30			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.

Remark: t.b.d.: to be determined.

The mixture B-24 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

### Example 25

#### Base Mixture

A liquid-crystal mixture B-25 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			T(N, I) / °C	= 124
1	PU-3-S	10.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PTU-3-S	10.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PTU-5-S	10.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.8
4	CPU-2-S	20.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
5	CPU-3-S	20.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 301
6	PGU-3-S	16.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 14.1
7	PPTU-4-S	7.0	$k_3 / k_1(20^\circ\text{C})$	= 1.44
8	PPTU-5-S	7.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.85
$\Sigma$		<u>100.0</u>	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= t.b.d.

Remark: t.b.d.: to be determined.

The mixture B-25 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

#### Example 26

A liquid-crystal Base Mixture B-26 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 127
1	PU-3-S	10.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PTU-3-S	10.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PTU-5-S	10.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 27.1
4	PGU-3-S	16.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.5
5	PPTU-4-S	7.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 299
6	PPTU-5-S	7.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 14.8
7	CPU-2-S	10.0	$k_3 / k_1(20^\circ\text{C})$	= 1.43
8	CPU-3-S	10.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.86
9	CPU-4-S	10.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.35
10	CPU-5-S	<u>10.0</u>	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.44
$\Sigma$		<u>100.0</u>	$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0116
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.064
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.315
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 27.2

Remark: t.b.d.: to be determined.

5 The mixture B-26 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

10 The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

#### Example 27

15 Base Mixture

20 A liquid-crystal mixture B-27 having the composition and properties as indicated in the following table is prepared and characterized with respect to its general physical properties and its applicability in microwave components at 19 GHz.

25

30

35

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, I) / ^\circ\text{C}$	= 122
5	1 PU-3-S	8.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	2 PVG-4-S	8.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
	3 PVG-5-S	8.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 26.2
	4 PTU-3-S	8.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
	5 PTU-5-S	8.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 298
	6 PGU-3-S	16.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 16.0
10	7 PPTU-4-S	7.0	$k_3 / k_1(20^\circ\text{C})$	= 1.31
	8 PPTU-5-S	7.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.91
	9 CPU-3-S	10.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.36
	10 CPU-4-S	10.0	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.48
	11 CPU-5-S	<u>10.0</u>	$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0121
15	$\Sigma$	<u>100.0</u>	$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0067
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.321
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 26.5

Remark: t.b.d.: to be determined.

20 The mixture B-27 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

25

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

30

### Example 28

#### Base Mixture

35

A liquid-crystal mixture B-28 having the composition and properties as indicated in the following table is prepared and characterized with respect

to its general physical properties and its applicability in microwave components at 19 GHz.

Composition			Physical Properties	
Compound No	Abbreviation	Conc. / mass-%		
			$T(N, l) / ^\circ\text{C}$	= 124
1	PU-3-S	8.0	$n_o(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
2	PVG-4-S	8.0	$\Delta n(20^\circ\text{C}, 589.3 \text{ nm})$	= t.b.d.
3	PVG-5-S	8.0	$\epsilon_{  }(20^\circ\text{C}, 1 \text{ kHz})$	= 26.2
4	PTU-3-S	8.0	$\epsilon_{\perp}(20^\circ\text{C}, 1 \text{ kHz})$	= 4.6
5	PTU-5-S	8.0	$\gamma_1(20^\circ\text{C}) / \text{mPa} \cdot \text{s}$	= 311
6	PGU-3-S	16.0	$k_1(20^\circ\text{C}) / \text{pN}$	= 16.2
7	PPTU-4-S	7.0	$k_3 / k_1(20^\circ\text{C})$	= 1.28
8	PPTU-5-S	7.0	$V_0(20^\circ\text{C}) / \text{V}$	= 0.91
9	CPU-4-S	15.0	$\epsilon_{r,\perp}(20^\circ\text{C}, 19 \text{ GHz})$	= 2.37
10	CPU-5-S	<u>15.0</u>	$\epsilon_{r,  }(20^\circ\text{C}, 19 \text{ GHz})$	= 3.48
$\Sigma$		<u>100.0</u>	$\tan \delta_{\epsilon_{r,\perp}}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0120
			$\tan \delta_{\epsilon_{r,  }}(20^\circ\text{C}, 19 \text{ GHz})$	= 0.0066
			$\tau(20^\circ\text{C}, 19 \text{ GHz})$	= 0.318
			$\eta(20^\circ\text{C}, 19 \text{ GHz})$	= 26.5

Remark: t.b.d.: to be determined.

The mixture B-28 is divided into seven parts. To three of these seven parts is added respectively the dichroic dye TAZO-1, as shown in table E above, in a concentration of 1.0 %, 3.0 % and 5.0 %. To the other four parts is added respectively AZO-1, AZO-2, AZO-3 or THIO-1, as shown in table E above, respectively in a concentration of 3.0%.

The resultant mixtures show similarly improved properties as Examples 1.1-1.3 and Examples 2-5, in particular with regard to tunability and figure of merit.

Alternatively to the dichroic dyes used in the Examples described above, fluorescent dichroic dyes may be used. These allow easy detection of any

leakage of modulation medium from the respective microwave components.

5

In addition to providing one or more pleochroic compounds, to the above mixtures one or more chiral compounds can be added in order to achieve an improved performance for most applications.

10

15

20

25


30

35

**Claims**

1. A liquid-crystalline medium, comprising


- 5           – one or more pleochroic compounds,
- one or more compounds selected from the group of compounds of formulae I, II and III





in which

15           R<sup>1</sup>       denotes H, unfluorinated alkyl or unfluorinated alkoxy having 1 to 17 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl having 2 to 15 C atoms,

20           n       denotes 0 or 1, and


25            to ,  
              independently of one another, denote

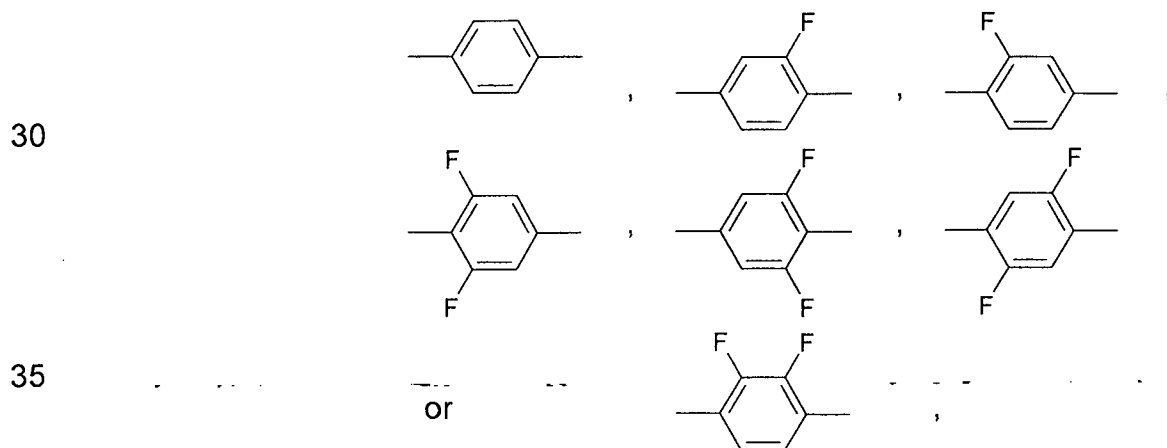




alternatively denotes

5



10



15


in which

$R^2$  denotes H, unfluorinated alkyl or unfluorinated alkoxy having 1 to 17 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl having 2 to 15 C atoms,

20


$Z^{21}$  denotes *trans*-CH=CH-, *trans*-CF=CF- or -C≡C-, and

25




independently of one another, denote

30

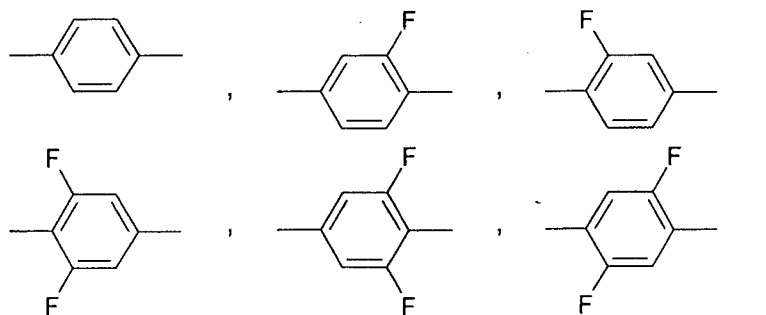


35

or



5



10


in which

$R^3$  denotes H, unfluorinated alkyl or unfluorinated alkoxy having 1 to 17 C atoms or unfluorinated alkenyl, unfluorinated alkenyloxy or unfluorinated alkoxyalkyl having 2 to 15 C atoms,

15

one of  $Z^{31}$  and  $Z^{32}$  denotes *trans*-CH=CH-, *trans*-CF=CF- or -C≡C-, and the other one denotes *trans*-CH=CH-, *trans*-CF=CF- or a single bond, and


20



to


independently of one another, denote

25

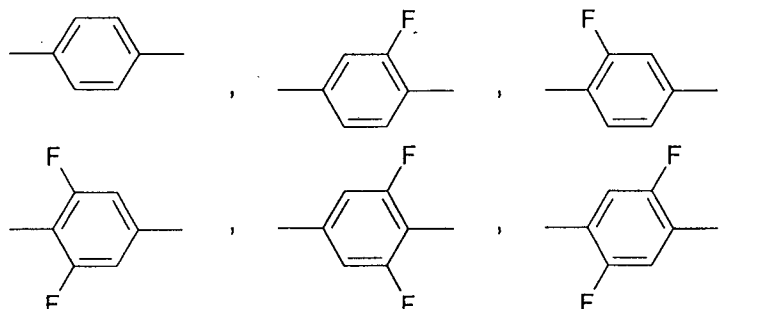


30


or



35



alternatively denotes




and optionally

10 – one or more polymerisable mesogenic compounds.

2. The liquid-crystalline medium according to claim 1, which comprises one or more pleochroic dyes selected from the group of azo dyes and thiadiazol dyes.

15

3. The liquid-crystalline medium according to claim 1 or 2, which comprises one or more compounds of formula P



wherein

$P^a$ ,  $P^b$  each, independently of one another, are a polymerisable group,

25  $Sp^a$ ,  $Sp^b$  each, independently of one another, denote a spacer group,

$s1$ ,  $s2$  each, independently of one another, denote 0 or 1,

30  $n1$ ,  $n2$  each, independently of one another, denote 0 or 1,

35  $Q$  denotes a single bond,  $-CF_2O-$ ,  $-OCF_2-$ ,  $-CH_2O-$ ,  $-OCH_2-$ ,  $-(CO)O-$ ,  $-O(CO)-$ ,  $-(CH_2)_4-$ ,  $-CH_2-CH_2-$ ,  $-CF_2-CF_2-$ ,  $-CF_2-CH_2-$ ,  $-CH_2-CF_2-$ ,  $-CH=CH-$ ,  $-CF=CF-$ ,  $-CF=CH-$ ,  $-CH=CF-$ ,  $-(CH_2)_3O-$ ,  $-O(CH_2)_3-$ ,  $-C\equiv C-$ ,  $-O-$ ,  $-CH_2-$ ,  $-(CH_2)_3-$ ,  $-CF_2-$ , preferably  $-CF_2O-$ ,


$Z^1, Z^4$  denote, independently of one another, a single bond,  $-CF_2O-$ ,  
 $-OCF_2-$ ,  $-CH_2O-$ ,  $-OCH_2-$ ,  $-(CO)O-$ ,  $-O(CO)-$ ,  $-(CH_2)_4-$ ,  
 $-CH_2-CH_2-$ ,  $-CF_2-CF_2-$ ,  $-CF_2-CH_2-$ ,  $-CH_2-CF_2-$ ,  $-CH=CH-$ ,  
 $-CF=CF-$ ,  $-CF=CH-$ ,  $-CH=CF-$ ,  $-(CH_2)_3O-$ ,  $-O(CH_2)_3-$ ,  $-C\equiv C-$ ,  $-O-$ ,  
 $-CH_2-$ ,  $-(CH_2)_3-$ ,  $-CF_2-$ ,  
 wherein  $Z^1$  and Q or respectively  $Z^4$  and Q do not  
 simultaneously denote a group selected from  $-CF_2O-$  and  
 $-OCF_2-$ ,

$A^1, A^2, A^3, A^4$  each, independently of one another, denote a diradical  
 group selected from the following groups:


- a) the group consisting of trans-1,4-cyclohexylene,  
 1,4-cyclohexenylene and 1,4'-bicyclohexylene, in which, in  
 addition, one or more non-adjacent  $CH_2$  groups may be  
 replaced by  $-O-$  and/or  $-S-$  and in which, in addition, one or  
 more H atoms may be replaced by F,
- b) the group consisting of 1,4-phenylene and 1,3-phenylene,  
 in which, in addition, one or two CH groups may be  
 replaced by N and in which, in addition, one or more H  
 atoms may be replaced by L,
- c) the group consisting of tetrahydropyran-2,5-diyl,  
 1,3-dioxane-2,5-diyl, tetrahydrofuran-2,5-diyl,  
 cyclobutane-1,3-diyl, piperidine-1,4-diyl, thiophene-2,5-diyl  
 and selenophene-2,5-diyl, each of which may also be  
 mono- or polysubstituted by L,
- d) the group consisting of saturated, partially unsaturated or  
 fully unsaturated, and optionally substituted, polycyclic  
 radicals having 5 to 20 cyclic C atoms, one or more of  
 which, in addition, may be replaced by heteroatoms,  
 preferably selected from the group consisting of

bicyclo[1.1.1]pentane-1,3-diyl, bicyclo[2.2.2]octane-1,4-diyl, spiro[3.3]heptane-2,6-diyl,

5




10

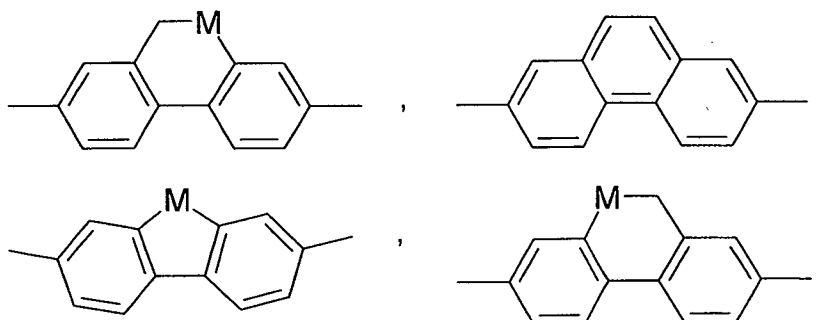


15



20

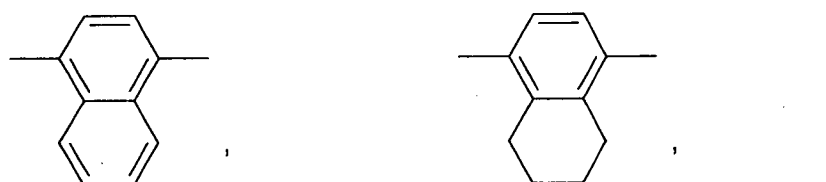

25

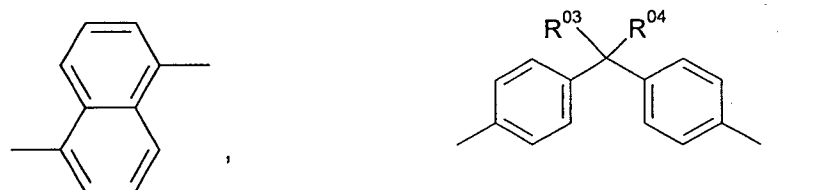

wherein, in addition, one or more H atoms in these radicals may be replaced by L, and/or one or more double bonds may be replaced by single bonds, and/or one or more CH groups may be replaced by N,

30

or A<sup>3</sup> alternatively may be a single bond,

35

L on each occurrence, identically or differently, denotes F, Cl, CN, SCN, SF<sub>5</sub> or straight-chain or branched, in each case

- 133 -

optionally fluorinated, alkyl, alkoxy, alkylcarbonyl, alkoxycarbonyl, alkylcarbonyloxy or alkoxycarbonyloxy having 1 to 12 C atoms,

5             $R^{03}$ ,  $R^{04}$  each, independently of one another, denote H, F or straight-chain or branched alkyl having 1 to 12 C atoms, in which, in addition, one or more H atoms may be replaced by F,

10            $M$  denotes -O-, -S-, -CH<sub>2</sub>-, -CHY<sup>1</sup>- or -CY<sup>1</sup>Y<sup>2</sup>-, and

$Y^1$  and  $Y^2$  each, independently of one another, have one of the meanings indicated above for  $R^{03}$ , or denote Cl or CN, and one of the groups  $Y^1$  and  $Y^2$  alternatively denotes -OCF<sub>3</sub>, preferably  
15           H, F, Cl, CN or CF<sub>3</sub>,


and which optionally further comprises a polymerisation initiator.


20           4. The liquid-crystalline medium according to one or more of claims 1 to 3, which comprises one or more compounds of formula I as set forth in claim 1.

25           5. The liquid-crystalline medium according to one or more of claims 1 to 4, which comprises one or more compounds of formula II as set forth in claim 1.

30           6. The liquid-crystalline medium according to one or more of claims 1 to 5, which comprises one or more compounds of formulae III as set forth in claim 1.

35           7. The liquid-crystalline medium according to one or more of claims 1 to 6, which comprises one or more compounds selected from the group of compounds of formulae I-1, I-2, II-1 to II-3 and III-1 to III-6

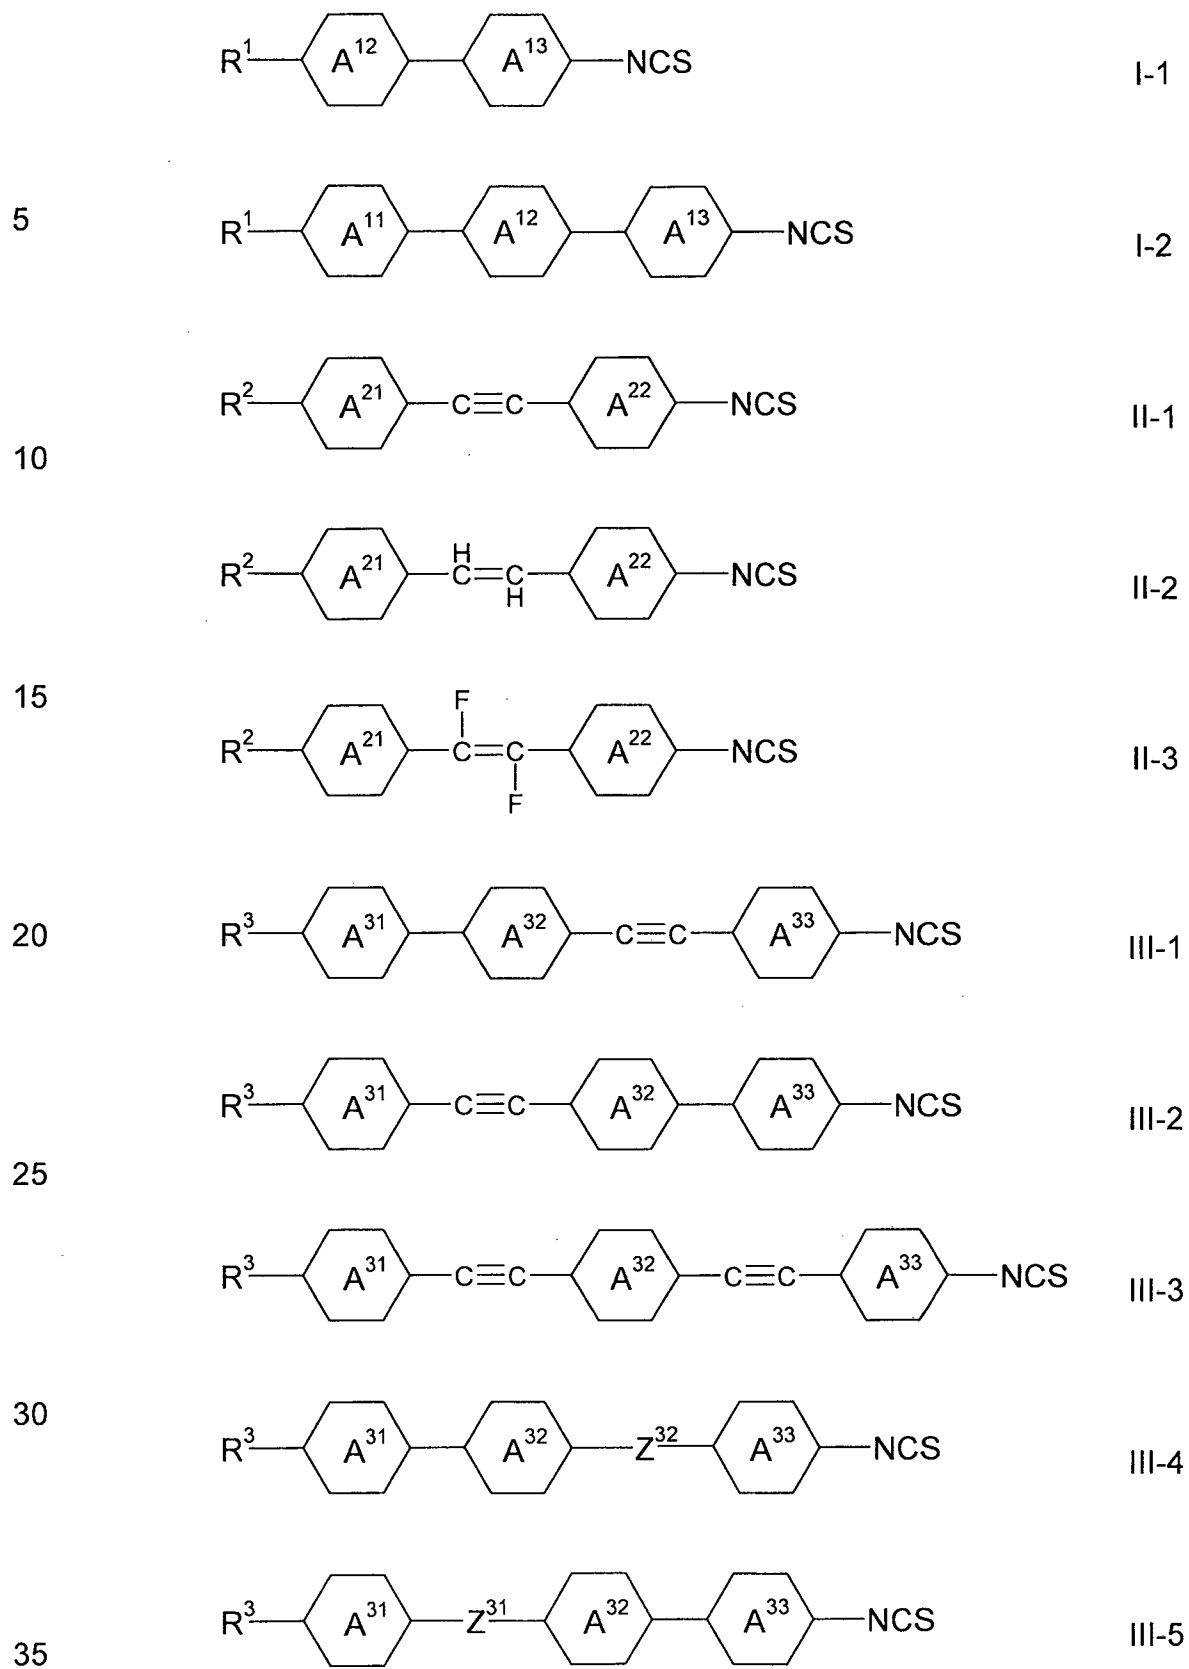



- 5 wherein R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup>, A<sup>11</sup>, A<sup>12</sup>, A<sup>13</sup>, A<sup>21</sup>, A<sup>22</sup>, A<sup>31</sup>, A<sup>32</sup>, A<sup>33</sup>, Z<sup>31</sup> and Z<sup>32</sup> each have the respective meanings as set forth in claim 1.
8. The liquid-crystalline medium according to one or more of claims 1 to 7, which further comprises one or more chiral compounds.
- 10 9. A composite system, comprising  
a liquid-crystalline medium which comprises one or more pleochroic  
compounds and one or more compounds selected from the group of  
compounds of formulae I, II and III as set forth in claim 1, and  
15 a polymer obtained or obtainable from the polymerisation of the  
polymerisable compound(s) according to claim 1 or 3.
10. A component for high-frequency technology, which comprises the  
liquid-crystalline medium according to one or more of claims 1 to 8 or  
20 the composite system according to claim 9.
11. The component according to claim 10, which is a component suitable  
for operation in the microwave range, preferably is a phase shifter or  
a LC based antenna element operable in the microwave range.
- 25 12. Use of the liquid-crystalline medium according to one or more of  
claims 1 to 8 or the composite system according to claim 9 in a  
component for high-frequency technology.
- 30 13. A process for the preparation of a liquid-crystalline medium, wherein  
one or more polymerisable compounds are mixed with one or more  
pleochroic compounds and one or more compounds selected from  
the group of the compounds of the formulae I, II and III as set forth in  
claim 1, and optionally with one or more further compounds and/or  
35 with one or more additives.

14. Use of one or more pleochroic compounds for improving the tunability of a liquid-crystalline medium comprising one or more compounds selected from the group of compounds of formulae I, II and III as set forth in claim 1.
- 5
15. A microwave antenna array, comprising one or more components according to claim 10 or 11.
- 10
- 15
- 20
- 25
- 30
- 35

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2017/000069

A. CLASSIFICATION OF SUBJECT MATTER  
 INV. C09K19/60 C09K19/12 C09K19/16 C09K19/18 C09K19/30  
 C09K19/04  
 ADD.  
 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED  
 Minimum documentation searched (classification system followed by classification symbols)  
 C09K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 92/16519 A2 (QINETIQ LTD) 1 October 1992 (1992-10-01) pages 4-6; compounds 1.1, 1.5-1.7 and 1.1, 1.5, 1.6, 1.8 page 8, line 16; claims; examples 1, 6-8 -----	1-4,7-9, 13,14 10-12,15
A	DE 10 2004 029429 A1 (MERCK PATENT GMBH [DE]) 3 February 2005 (2005-02-03) cited in the application claims; examples -----	1-15
A	WO 2013/034227 A1 (MERCK PATENT GMBH [DE]; MANABE ATSUTAKA [DE]; KLASS DAGMAR [DE]) 14 March 2013 (2013-03-14) cited in the application claims; examples -----	1-15
	-/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search  11 July 2017	Date of mailing of the international search report  19/07/2017
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Schoenhentz, Jérôme
--	---

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2017/000069

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007/029521 A1 (HSIEH PAO J [TW] ET AL) 8 February 2007 (2007-02-08) claims; examples -----	1-15
A	US 2006/202165 A1 (BAN BYEONG-SEOB [KR]) 14 September 2006 (2006-09-14) claims; examples -----	1-15
A	EP 1 126 006 A2 (MERCK PATENT GMBH [DE]) 22 August 2001 (2001-08-22) claims; examples -----	1-15
A	WO 2009/086911 A1 (MERCK PATENT GMBH [DE]; PARRI OWAIN LLYR [GB]; GRAHAM DONALD GORDON [G] 16 July 2009 (2009-07-16) claims; examples; compound (A2) -----	1-15
A	EP 1 054 001 A1 (MERCK PATENT GMBH [DE]; AGENCY IND SCIENCE TECHN [JP]; NEW ENERGY AND) 22 November 2000 (2000-11-22) claims; example 1; compound (1) -----	1-15
A,P	WO 2016/096084 A1 (MERCK PATENT GMBH [DE]) 23 June 2016 (2016-06-23) claims; examples; table G -----	1-15
A,P	WO 2016/188622 A1 (MERCK PATENT GMBH [DE]) 1 December 2016 (2016-12-01) claims; examples -----	1-15
A,P	EP 2 982 730 A1 (MERCK PATENT GMBH [DE]) 10 February 2016 (2016-02-10) claims; examples -----	1-15

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/EP2017/000069

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:  
  
1-15(partially)
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-4, 7-15(all partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formula I, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array comprising such a liquid-crystalline medium.

---

2. claims: 1-3, 5, 7-15(all partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formula II, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array comprising such a liquid-crystalline medium.

---

3. claims: 1-3, 6-15(all partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formula III, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array comprising such a liquid-crystalline medium.

---

4. claims: 1-5, 7-15(all partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formulae I and II, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array comprising such a liquid-crystalline medium.

---

5. claims: 1-4, 6-15(all partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formulae I and III, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

comprising such a liquid-crystalline medium.

---

6. claims: 1-3, 5-15(all partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formulae II and III, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array comprising such a liquid-crystalline medium.

---

7. claims: 1-15(partially)

A liquid-crystalline medium comprising one or more pleochroic compounds and one or more compounds of formulae I, II and III, a composite system, a component for high-frequency, use in a component for high-frequency, a process for the preparation, use of one or more pleochroic compound for improving the tunability and a microwave antenna array comprising such a liquid-crystalline medium.

---

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/000069

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9216519	A2	01-10-1992	CA 2082800 A1 14-09-1992 DE 69232583 D1 06-06-2002 DE 69232583 T2 24-10-2002 EP 0530338 A1 10-03-1993 JP H05507725 A 04-11-1993 KR 100249071 B1 01-04-2000 KR 100254720 B1 15-04-2000 TW 353113 B 21-02-1999 WO 9216519 A2 01-10-1992
DE 102004029429	A1	03-02-2005	DE 102004029429 A1 03-02-2005 US 2005067605 A1 31-03-2005
WO 2013034227	A1	14-03-2013	CN 103764792 A 30-04-2014 EP 2753676 A1 16-07-2014 JP 6140160 B2 31-05-2017 JP 2014529658 A 13-11-2014 KR 20140058666 A 14-05-2014 TW 201313883 A 01-04-2013 US 2014217325 A1 07-08-2014 WO 2013034227 A1 14-03-2013
US 2007029521	A1	08-02-2007	TW I273129 B 11-02-2007 US 2007029521 A1 08-02-2007
US 2006202165	A1	14-09-2006	CN 1590505 A 09-03-2005 JP 5021154 B2 05-09-2012 JP 2005029798 A 03-02-2005 KR 20050006630 A 17-01-2005 TW I351429 B 01-11-2011 US 2005012074 A1 20-01-2005 US 2006202165 A1 14-09-2006
EP 1126006	A2	22-08-2001	NONE
WO 2009086911	A1	16-07-2009	EP 2227513 A1 15-09-2010 JP 5597141 B2 01-10-2014 JP 2011510915 A 07-04-2011 KR 20100130179 A 10-12-2010 TW 200938613 A 16-09-2009 US 2011178200 A1 21-07-2011 WO 2009086911 A1 16-07-2009
EP 1054001	A1	22-11-2000	DE 69909436 D1 14-08-2003 DE 69909436 T2 15-04-2004 EP 1054001 A1 22-11-2000 JP 4707042 B2 22-06-2011 JP 2000351762 A 19-12-2000
WO 2016096084	A1	23-06-2016	TW 201631137 A 01-09-2016 WO 2016096084 A1 23-06-2016
WO 2016188622	A1	01-12-2016	TW 201708522 A 01-03-2017 WO 2016188622 A1 01-12-2016
EP 2982730	A1	10-02-2016	CN 105368465 A 02-03-2016 EP 2982730 A1 10-02-2016 JP 2016037607 A 22-03-2016

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/000069

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 20160018409 A	17-02-2016
		TW 201619355 A	01-06-2016
		US 2016040066 A1	11-02-2016
		US 2017130129 A1	11-05-2017
<hr/>			