



(86) Date de dépôt PCT/PCT Filing Date: 2008/02/01
(87) Date publication PCT/PCT Publication Date: 2008/08/07
(85) Entrée phase nationale/National Entry: 2009/07/31
(86) N° demande PCT/PCT Application No.: US 2008/052774
(87) N° publication PCT/PCT Publication No.: 2008/095159
(30) Priorités/Priorities: 2007/02/01 (US60/887,788);
2008/01/31 (US12/023,725); 2008/01/31 (US12/023,556)

(51) Cl.Int./Int.Cl. *G01V 1/22* (2006.01)
(71) Demandeur/Applicant:
ION GEOPHYSICAL CORPORATION, US
(72) Inventeurs/Inventors:
ELDER, ALFRED KEITH, US;
KOOPER, STEVEN, US;
FESZTHAMMER, ANDRAS, US;
CLAYTON, DONALD E., US;
POLK, HENRY T., US
(74) Agent: CASSAN MACLEAN

(54) Titre : APPAREIL ET PROCEDE DE COMPRESSION DE DONNEES SISMIQUES

(54) Title: APPARATUS AND METHOD FOR COMPRESSING SEISMIC DATA

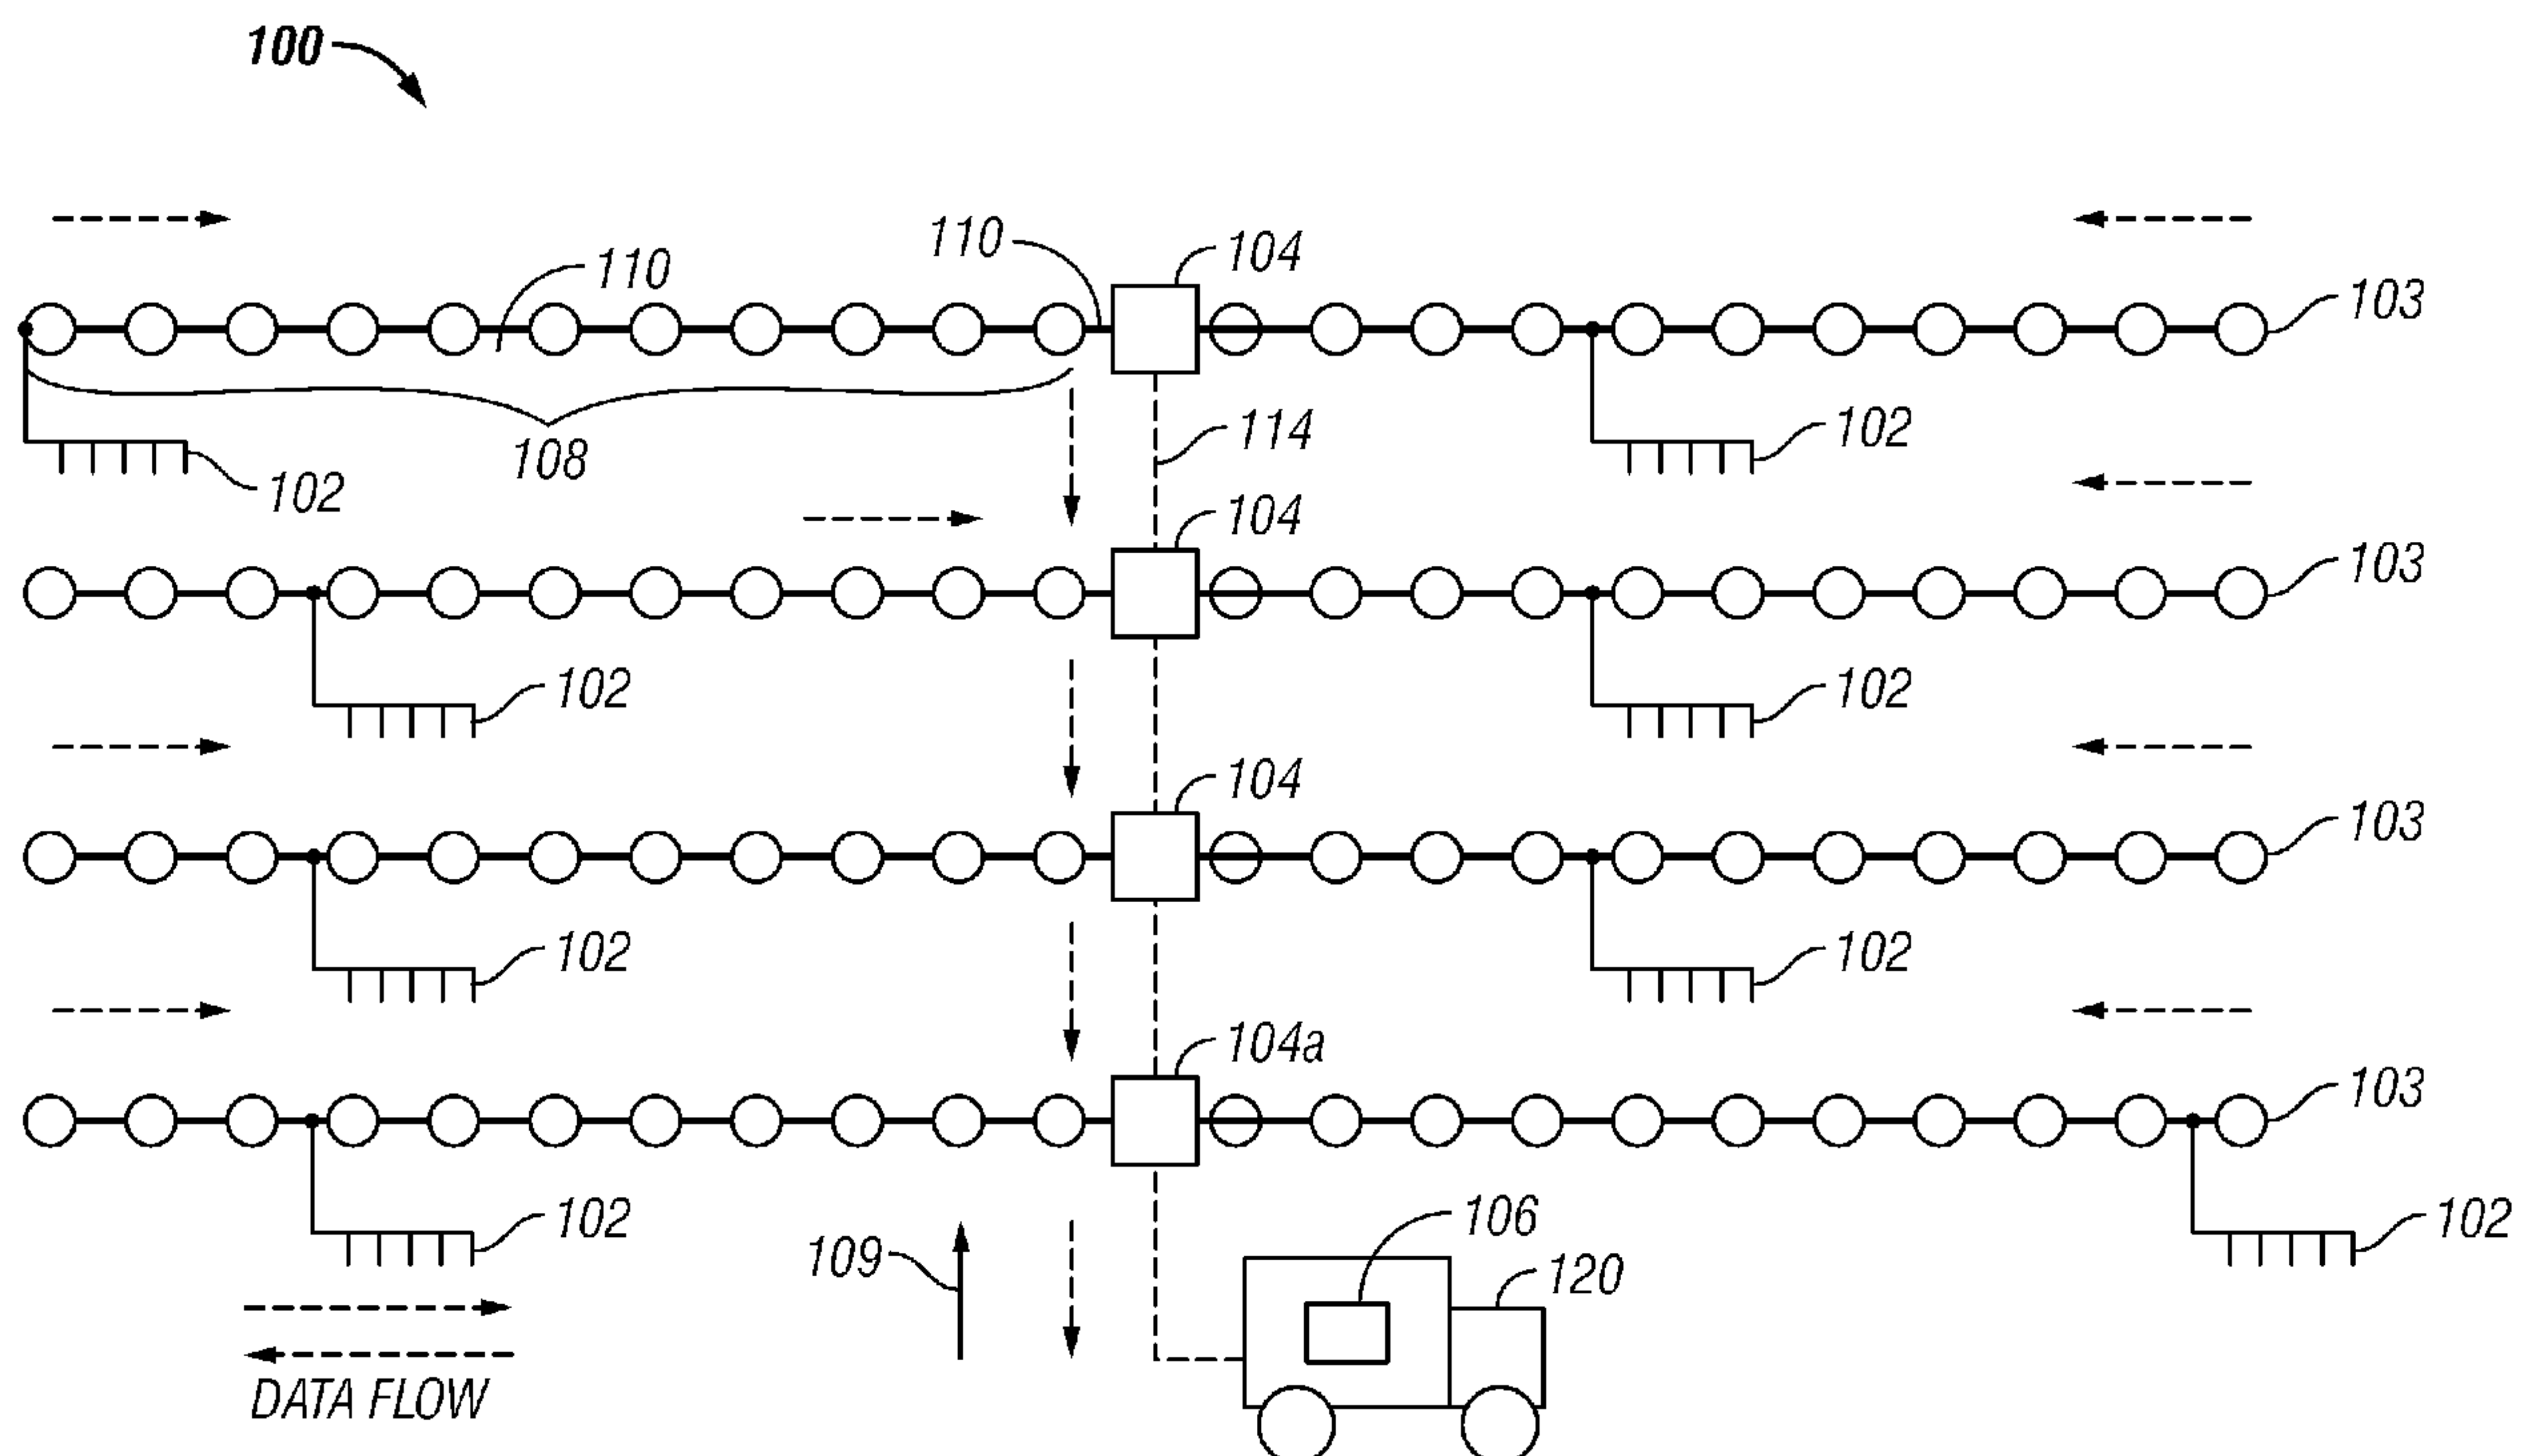


FIG. 1

(57) **Abrégé/Abstract:**

A seismic data acquisition method is provided that includes receiving seismic signals at a sensor; sampling the received seismic signals into a plurality of samples, each sample having a selected number of bits ("bit length"); arranging the samples in packets, wherein some of the packets include one or more compressed samples; and transmitting the packet to a remote unit.



WO 2008/095159 A2



NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

**TITLE: APPARATUS AND METHOD FOR
COMPRESSING SEISMIC DATA**

**INVENTORS: ALFRED KEITH ELDER; STEVEN KOOPER;
ANDRAS FESZTHAMMER; DONALD E. CLAYTON;
HENRY T. POLK**

BACKGROUND OF THE DISCLOSURE

Field of the Disclosure

[0001] This disclosure relates to the acquisition of seismic data using seismic spreads.

Background of the Art

[0002] Seismic surveys are conducted to map subsurface structures, which maps are used to locate and develop oil and gas reservoirs. On land, seismic surveys are conducted by deploying a large array of seismic sensors over selected geographical regions. Typically, these arrays can cover several square kilometers (for example 100 square kilometers) of a geographical area and may include in excess of 30,000 seismic sensors (also referred to as receivers) placed in the ground and arranged in the form of a grid. The receivers are typically geophones and/or accelerometers for land operations. Three-axis accelerometers are often used as receivers.

[0003] An energy source, such as an explosive charge (buried dynamite, for example) or a mobile vibratory source is typically used at selected locations in the array to generate acoustic waves or signals (also referred to as acoustic energy) that propagate through the subsurface structures of the earth. The generated acoustic waves reflect at subsurface formation discontinuities, such as boundaries associated with layers of different rock types, salt domes and oil and gas reservoirs. These reflections are sensed at the surface by the seismic sensors in the array. Sensors are typically grouped in small numbers and each group is connected to a separate data acquisition unit (also referred to as a recording unit, or a field service unit). Each data acquisition unit receives the signals from its associated sensors, samples the signals, digitizes the samples, stores the digitized samples, arranges the digitized

samples into packets and transmits such packets to a central control unit (also referred to as a central recording unit), either directly or via one or more intermediate units and/or repeaters.

[0004] The recorders may transmit the packets via cables or wirelessly to the central control unit, which may be on a mobile unit, such as a truck or at another remote location. The central control unit typically processes the data (at least partially) received from the data acquisition units, stores the processed data for later processing and may send the processed data to another remote unit for further processing of the data. A two or three-dimensional map (also referred to as a seismic image) of the subsurface structures is generated by processing of the data received from the central control unit.

[0005] Offshore seismic data acquisition systems typically utilize a compressed air source, such as an air-gun, as the seismic energy source, which is activated at selected locations a few meters (often 5-6 meters) below the water surface while being towed by a vessel. The receivers are deployed either in streamer cables that are towed by the vessel carrying the source or are deployed at the ocean bottom in the ocean-bottom cables. Hydrophones are typically used as the receivers for offshore applications.

[0006] In a seismic spread, each recorder transmits a large number of packets. Typically, each packet may contain an "epilog," a payload and a "prolog" that includes a large number samples or words (for example, about 500), each sample having a prescribed number of bits (for example, twelve bits or twenty-four bits, etc). Often, the useful portion of the word includes less than the total number of available bits. Therefore, some or many samples in a packet may occupy bit spaces that contain only leading sign bits. The leading sign bits are simply "ones" or "zeros." Accordingly, there is a need for an improved method and apparatus for preparing, storing and transmitting packets.

[0007] Also, it is known that the recorder units in seismic spreads experience coherent noise. Coherent noise is periodic in nature. It is typically undesirable seismic energy that shows a consistent phase from trace to trace, such as ground roll and multiples. Coherent

noise can occur due to several different factors, such as: the presence of a common mode induction at the receiver input due to data transmission; and electronic switching in the intrinsic circuits coupled into the receiver by various methods, such as telemetric transmitters radiating energy, limited power supply noise rejection, common circuit elements such as power supplies or ground planes, and high energy computation bursts such as those present during data transfer or intrinsic math functions. Therefore, there is a need for a method and an apparatus that may reduce the coherent noise in seismic data acquisition systems.

SUMMARY OF THE INVENTION

[0008] The disclosure herein in one aspect provides a method of acquiring seismic data that includes: receiving seismic signals at a sensor; sampling the received seismic signals from the sensor into a plurality of samples, each sample having a same number of bits (“bit length”); arranging the samples in a packet, wherein the total number of bits corresponding to the samples represented in the packet is less than the number of samples represented in the packet times the bit length; and transmitting the packet to a remote unit (also referred to as the central recording unit, controller or central control unit).

[0009] In another aspect, the method may further include: receiving the packet at the control units; decompressing the packet; and storing the information relating to the decompressed samples in a suitable recording medium.

[0010] In another aspect, the disclosure provides a method for acquiring seismic data that includes: receiving seismic signals at one or more sensors; sampling the received seismic signals into a plurality of samples, each sample having a selected bit length; arranging the samples in a plurality of packets; transmitting the plurality of packets, wherein time interval between transmissions of the packets varies.

[0011] In another aspect, the disclosure provides an apparatus that includes: a circuit for receiving seismic signals from a sensor; a circuit for sampling the received signals; a circuit for digitizing the samples, each digitized sample having a bit length; and a processor that arranges the digitized samples into packets, wherein at least some of the packets include one or more compressed samples. Alternatively or in addition to using compressed samples, the processor may vary the time interval between the transmissions of packets to reduce noise.

[0012] It should be understood that examples of the more important features of the apparatus and methods for acquiring and transmitting seismic data from the data acquisition units in a seismic spread have been summarized rather broadly in order that detailed description thereof that follows may be better understood and in order that the contributions to the art may be appreciated. There are, of course, additional features of such apparatus and methods that will be described hereinafter and will form the subject of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] The various features described herein will be best understood from the attached drawings, taken along with the following description, in which like numerals generally have been used to represent similar elements, and in which:

FIG. 1 shows a cable seismic data acquisition system wherein the data acquisition units may include a data compression and/or a time-slot variance manager;

FIG. 2 shows a wireless seismic data acquisition system wherein the data acquisition units may include data compression and/or a time-slot variance manager;

FIG. 3 shows a high level functional block diagram of the data acquisition units that may be utilized in the seismic data acquisition systems of **FIGS. 1** and **2**;

FIG. 4 shows a functional flow diagram for performing a data compression according to one exemplary embodiment;

FIG. 5 shows a functional flow diagram for time-slot variance management relating to the transmission of packets according to one exemplary embodiment;

FIG. 6 shows a functional flow diagram for data compression and time-slot variance management of packets according to one exemplary embodiment;

FIG. 7 shows an exemplary flow chart of a method for data compression and time-slot variance management of packets;

FIG. 8 shows an exemplary packet that includes an epilog, a payload and a prolog, wherein the number of bits for each sample in the payload is the same;

FIG. 9 shows an exemplary packet that includes an epilog, a payload and a prolog, wherein some of the samples in the payload are compressed while the other samples are not compressed; and

FIG. 10 shows another example of a packet that includes different sets of samples that are differently compressed.

DETAILED DESCRIPTION

[0014] The drawings shown and the descriptions provided herein correspond to certain specific embodiments for the purposes of explanation of the concepts contained in the disclosure herein with the understanding that the present disclosure is to be considered an exemplification of the concepts and principles described herein and is not intended to limit the scope of the claims relating to this disclosure.

[0015] **FIG. 1** depicts an exemplary land cable seismic data acquisition system **100**, wherein certain elements such as the data acquisition units may include some or all of the features described herein relating to the data compression and/or time slot variance management and perform the various functions described herein. The system **100** is shown to include an array of spaced-apart seismic sensors or receivers **102**, arranged along a number of lines or strings **108**. Each line contains a number of data acquisition units or devices **103**. Each data acquisition unit **103** in each line **108** is coupled to a cross-line unit **104**. Several cross-line units **104** and associated lines are usually coupled together by cabling, such as shown by the dotted line **114**, which is then coupled to central control unit or control unit, such as a unit **106**, which may be stationed on a mobile unit, such as a truck **120**.

[0016] The sensors **102** are usually spaced several meters apart (for example between 30-80 meters) and each line **108** may include several data acquisition units **103** connected by communication lines **110**. Each data acquisition unit **103** typically includes a preamplifier that amplifies the signals received from its corresponding sensors **102**, samples the amplified signals into a number of discrete digital representations ("samples") having a fixed number of bytes, each byte containing a fixed number of bits. The successive data acquisition units in a line act as repeaters of data received from their respective preceding data acquisition units. Each cross-line unit **104** may perform some signal processing and then store the processed signals as seismic information for later retrieval. The cross-line units **104** act as repeaters and are typically coupled, either in parallel or in series, with one of the units **104a** serving as an interface between the central control unit or control unit (CU) **106** and a number of cross-line units **104**. In the cable system of **FIG. 1**, data are usually relayed from one data acquisition unit to the next unit and through several cross-line units before such data reaches the central control unit **106**. The control unit is in bidirectional data communication with each data acquisition unit **103**, as shown by data flow arrows **109**. A source, controlled by the control unit is activated to induce seismic energy into the earth at selected locations in the seismic spread.

[0017] Referring to **FIG. 2** there is shown a representation of a wireless seismic data acquisition system **200** according to one embodiment wherein the various data acquisition units may include the data compression and/or time-slot variance features described herein. The system **200** includes a central controller **202** in data communication with each wireless data acquisition unit **208** forming an array (spread) **210** for seismic data acquisition. The data acquisition unit **208** and data acquisition unit **103** of **FIG. 1** may be configured to perform the same functions relating to the data compression and transmission of such data. The wireless communication between the central controller **202** with the data acquisition unit **208** may be direct bidirectional wireless communication or via an intermediate unit such as a repeater unit (RU). Each data acquisition unit **208** includes one or more sensors **212** for sensing seismic energy. The sensors **212** may be any suitable seismic sensors, including

geophones, and one or more component accelerometers. Direct communication, as used herein, refers to individualized data flow as depicted in **FIG. 2** by dashed arrows. The data flow is bidirectional between the central controller **202** and the wireless data acquisition unit **208**. The communication might be in the form of radio signals transmitted from and received by the data acquisition units **208** and central controller **202** via suitable antennas **203** and **204** respectively.

[0018] In one aspect, a seismic energy source **206**, such as an explosive source, a vibrator carried by a mobile unit, such as a truck **202**, or a compressed gas source, generates seismic energy of known characteristics, such as magnitude, frequency, etc., at known locations in the seismic spread to impart seismic energy into the subterranean formation. The source controller **274** can be programmed to receive and transmit information such as instructions to make the source **206i** ready for firing, fire the source **206i**, provide data indicative of the location of the mobile unit **270**, the arming status of the source **206i**, and data such as return shot attributes.

[0019] The functions described above in reference to **FIG. 2** that relate to the operation and control of the source and those of the control unit equally apply to the cable seismic spread of **FIG. 1**.

[0020] In another aspect, the seismic spread configuration shown in **FIG. 2** may be modified, wherein a number of neighboring data acquisition units **208** forming a "group" or "cell" communicate within the control unit **202** via an intermediate data acquisition unit (also referred to herein as an Alpha unit). An Alpha unit may also be configured to perform the functions of the data acquisition unit and further configured to performed a variety of other functions, such as establishing two-way communication between the Alpha unit and its associated data acquisition units. In this manner, the various data acquisition units may be grouped into several groups, each group including an Alpha unit. For example, the data acquisition **220** in the group **222** may be an Alpha unit for the group of data acquisition units

in the geographical area **222**. Other groups of data acquisition units in the seismic spread **210** may be similarly grouped.

[0021] Alternatively, one or more separate repeater units (RUs) may be placed at selected locations in the seismic spread **210**, such as shown by repeaters $R_1, R_2 \dots R_n$ etc. Often only one repeater is used in a seismic spread. Each repeater unit may be configured to establish a two-way radio or wireless communication between its associated data acquisition units and the control unit **220**. In the above-noted configurations, the individual data acquisition units communicate with their associated Alpha unit or the repeater unit as the case may be and the Alpha unit or the repeater unit communicates with the central controller **202**. The individual data acquisition units in a group wirelessly communicate with their associated Alpha unit or the repeater unit wirelessly. In certain situations, it may be desirable to connect the data acquisition units to its associated Alpha unit with electric or fiber optic.

[0022] **FIG. 3** shows a high level functional block diagram **300** of the data acquisition units that include circuitry and perform functions and methods according to the various aspects of the disclosure. Each data acquisition unit **302** is shown coupled to one or more seismic receivers **102** from which it receives signals generated by the receivers in response to the detection of seismic signals from the earth's subsurface. The detected signals may be in response to the activation of a seismic source as described above and/or the seismic signals produced in response to noise, such as generated by vehicles passing near the survey area, thunderstorms, rails, ships, etc. Each data acquisition unit **302** is shown to include a signal acquisition section **310** that contains circuitry for receiving signals from the sensor **102**, circuitry for conditioning the received signals and circuitry for sampling the received signals. Each signal acquisition section **310** may include a processor **320**, a memory **322** that may store data and computer programs **324**, which programs are executed by the processor **320** to perform the various operations and methods described herein and to perform other functions known in the art for such devices.

[0023] The signal acquisition section **310** samples the received signals in small time units. As an example, the control unit **350** may send a command signal to a particular data acquisition unit **302a** to start acquiring data. The command, for example, may be sent prior to the firing of the seismic source. The data acquisition unit **302a** then starts to receive the signals from its associated sensors **102**, conditions the signals and then samples the signals conditioned. As an example, the data acquisition unit **302a** may be configured to acquire data for a selected time, for example three seconds, with a selected sample time such as two milliseconds. In this example, the data acquisition unit **302a** will start sampling a particular signal from a receiver **102** at time t_0 every two milliseconds to provide 1500 samples. The data acquisition unit **302a** may include a digitizer **312** that digitizes each sample, wherein each sample has the same number of bytes. For example, each sample may have three bytes, each byte having eight bits. In this example, each digitized sample (also referred to herein as a “word”) will have twenty-four bits. The samples may contain any other suitable number of bits, for example 12, 16, 32 or more. The processor **320** in the data acquisition unit **302**, utilizing the programmed instructions **324**, stores the digitized samples in the memory **322**, which may be a buffer. In one aspect, the processor stores all the bits for the samples. In another aspect, the processor **320** may delete a selected number of leading sign bits from selected digitized samples and store such compressed samples in the memory. In such a case, the compressor may insert an indicator corresponding to the compressed samples which indicator will enable the processor to arrange the compressed samples into packets and also enable the decompression of the compressed samples at a later time, for example using the control unit. The indicator may correspond to any particular stored sample or a group (series) of samples. The stored digitized samples are then arranged in packets by the processor **320** as described below with respect to **FIGS. 7, 9 and 10**.

[0024] Still referring to **FIG. 3**, a data transmission and repeater section **360** transmits the packets via the communication link **330** to the next data acquisition unit, such as unit **302b**, which transmits the packets received from its preceding data acquisition units and the packets created by the unit **302b** itself to the next data acquisition unit or the data repeater, such as

the data repeater **370**, at the end of the line. Each repeater **370** may transmit the received packets to one or more media converters **380**. The media converters **380** may be serially coupled so that the last such media converter **380a** transmits the data received from other media converters and the repeaters from its corresponding line to the control unit **350** as well as to data archive **352** or decompressor **354**. Thus, in the configuration of **FIG. 3**, the data acquisition units **302** acquire, condition, sample, and digitize samples and transmit the digitized data to the control unit **350** in the form of packets. The communication links **330** in **FIG. 3** may be electric conductors, fiber optic links or wireless connections. Also, the data acquisition units **302** may transmit the packets directly to a common repeater associated with a group of data acquisition units, which in turn sends the packets to the control unit **350**.

[0025] In one aspect, the data acquisition units **302** may include a data compressor **314**. The data compressor may be a program or routine that may include any suitable data compression algorithm. The data compression program and algorithm are stored in the memory **322**, which program and algorithm are utilized by the processor **320** to compress the digitized sample data prior to incorporating such samples into a packet.

[0026] **FIG. 4** shows a configuration wherein an exemplary data acquisition unit **402** acquires seismic signals and digitizes the seismic signals in section **404**. A data compressor **406** compresses the digitized samples, and forms the packets, which are transmitted by the data telemetry and repeater section **408** to the control unit **350** (**FIG. 3**).

[0027] **FIGS. 8-10** show examples of data packets that may be made according to one aspect of the disclosure. **FIG. 8** shows a data packet **800** having an epilog **802**, a payload or seismic data section **804** and a prolog **808**. In one aspect, the epilog **802** may contain a fixed number of bytes that contain information relating to a destination address, source address and other information that enables the control unit **350** to appropriately decipher the received packets and relate the particular samples to particular sensors in the seismic spread. The prolog **808** may contain packet confirmation information or other desired information. The payload section typically may include bit spaces for "n" samples (designated as samples n_1

though n_n), each sample having the same number of bits "p." Thus, the payload may contain $n \times p$ total bits. In the example of **FIG. 8**, each sample occupies "p" bits, shown by the segment **810**. During seismic data acquisition, a sequence of samples may be such that the digitized words occupy most of the "p" bits, i.e., without a significant number of leading sign bits. Such are typically arranged in sample packets without data compression.

[0028] **FIG. 9** shows an example of a packet in which the sample has been compressed by removing a certain number of leading sign bits from a certain number of samples. In the example of **FIG. 9**, the payload section **904** is shown divided into two sections **910** and **912**, wherein the section **910** includes "n" samples (m_1 through m_n), each such sample having the full word length, i.e., "p bits," while the section **912** has "q" samples m_{n+1} through m_{n+q} , each such sample having "p-z" bits, where z is a whole number. Thus, if $p=12$ and $z=4$, the samples m_1 through m_n each will occupy 12 bit spaces while the remaining samples m_{n+1} through m_{n+q} , each will occupy 8 bit spaces. Such a method enables using the spaces vacated due to the removal of leading sign bits to pack additional samples in the same packet. For example, if the capacity of a packet is 500 samples of twenty-four bits, and 300 of the samples have four leading sign bits removed, this will open up $300 \times 4 = 1200$ bit spaces for packing additional samples in that packet. In order for the control unit to decompress the packet data, the data acquisition unit processor is programmed to encode the packet that contains the compressed data. In one aspect, the processor may insert an instruction word or a leading indicator that precedes the set or sequence of samples that will have the leading sign bits removed. In one aspect, the instruction word or the leading indicator simply may occupy a desired number of bits, such as shown by bit spaces **922**, containing the instructions that may indicate the number of compressed samples following the indicator and the nature of compression, i.e., the number of bits removed from each such compressed sample. Any suitable instruction may be used as the instruction word or the leading indicator. If the digitized samples are stored in a memory in compressed form, then the processor may arrange such compressed samples in a packet.

[0029] FIG. 10 shows another example of a packet wherein the first section **1010** of the payload section **1002** includes a first leading indicator **1012** that corresponds to a certain number of samples, each having "p-a" bits and a second section **1020** that includes a second leading indicator **1022** that corresponds to a certain number of samples, each having "p-b" bits. In each case, the leading indicator may include information that enables the control unit to determine the number of compressed samples and the number of bits present in each sample or the number of leading sign bits that have been removed from each such sample. The control unit receives the packets from the various data acquisition units, decompresses the packets and stores the samples. Each packet may include any combination of compressed and uncompressed samples, arranged in any desired order. The control unit may process the samples and may store the processed samples and/or transmit the processed data to a remote processing unit for further processing to obtain the subsurface maps. The packets may contain any number of combinations of uncompressed and compressed samples.

[0030] In another aspect, the data acquisition units may perform time variance relating to the transmissions of packets to reduce the coherent noise that is often associated in the seismic data recording units. In one aspect, the time variance may be performed after the packets have been prepared by the data acquisition unit, such as shown in FIG. 5. In one aspect, a time variance manager **510** associated with the data acquisition unit **500** may include a routine or algorithm that is used by the processor in the data acquisition unit to vary the time between the transmissions of successive packages. In one aspect, the time variance manager may utilize a suitable random number generator to determine the time between transmissions of successive packets. Varying the time between the transmissions of the packets makes the coherent noise to appear at non-periodic times, which the seismic data acquisition system can distinguish from the seismic signals and is thus able to remove such noise from the seismic signals. When the time between the transmissions of packets is constant, a periodic noise, such as a coherent noise, can appear to the system as a seismic signal, thereby providing erroneous measurements. The time variance manager also may

utilize time slots (bins) and a random time variance within each time slot to determine the time variance between the transmissions of the packets.

[0031] In another aspect, the data acquisition unit **600** may perform the time-slot variance after the data compression, as shown in **FIG. 6**. In the configuration of **FIG. 6**, the data compressor **604** compresses the data as described above or by any other suitable method and assembles the packets. The time slot variance manager **610** then varies the time between transmissions of successive packets. The data telemetry section **612** then transmits the packets to the central unit. Because seismic signals have an inherent signal variance from trace to trace, the number of compressed samples can be different, therefore the time it takes the data acquisition unit to prepare successive packets can vary, which can cause the time between transmissions of packets to vary, thereby reducing the coherent noise.

[0032] **FIG. 7** shows an exemplary flow diagram **700** of a method that may be utilized by the data acquisition units to prepare and transmit data packets. The data acquisition unit upon receiving a command from the central control unit starts the process of acquiring samples from its associated sensors, such as sample "x," as shown in box **712** and compresses the digitized sample "x" to form the sample "z" having a selected bit length and stores the digitized sample in the memory, as shown at box **714**. The processor then computes the packet efficiency "PE" (box **716**), which may be defined as the number of samples represented in the packet. The PE depends upon the number of total leading sign bits deleted from all the samples in a packet. The processor forms the packet with appropriate epilog, payload and prolog and appropriate leading indicators, such as **1012** and **1022** of **FIG. 10**. The processor then determines whether the packet is full as shown in the decision box **718**. A full packet means that all bit spaces in the payload section of the packet have been used or occupied. If "no," i.e., the packet is not full (decision line **721**), the processor waits for the next sample (box **742**) and acquires the next seismic sample "x" (box **712**) and continues the process of acquiring and compressing samples (when appropriate) to complete the packet. When the packet is full (decision line **719**), the processor may transmit the packet to the control unit. Alternatively, the processor may determine whether the PE is

less than a preset threshold (box **720**), which may be any suitable value provided to the processor, either as a stored value in an associated memory or via a command from the control unit.

[0033] In one aspect, when the PE is less than the threshold (as shown by decision line **722**), the processor transmits the packet to the control unit without applying any time variance technique, as shown in block **724**. When the PE is equal to or greater than the threshold, as shown by decision line **726**, the processor may be programmed to compute a variance time slot for the packet, as shown at box **728** and wait for the time slot (box **730**) and thereafter transmit the packet as shown at box **724**. Once a particular packet is transmitted, the processor determines if the record for a seismic signal has been completed (box **732**), i.e., all the packets corresponding to a particular record have been transmitted. If "yes" (decision line **738**), the process waits for the start of the next record, as shown in block **740**, sets the record criteria (box **741**) for the next record and starts the process of acquiring samples as provided above. If the record has not yet been completed (decision line **736**), the processor waits for next sample (box **742**) and continues to acquire seismic samples to form the next packet. The above-described flow chart shows one particular method. However, any flow scheme that provides for compressing the data in the manner described herein and/or uses a time variance technique may be utilized for the purposes of this disclosure. It should be noted that the methods and functions described herein equally apply to data acquisition units contained in marine seismic data acquisition systems.

[0034] Thus, the disclosure herein in one aspect provides a method of acquiring seismic data that includes: receiving seismic signals at a sensor; sampling the received seismic signals from the sensor into a plurality of samples, each sample having a same number of bits (bit length); arranging the samples in a packet, wherein the total number of bits corresponding to the samples represented in the packet is less than the number of samples represented in the packet times the bit length of the samples represented in the packet; and transmitting the packet to a remote unit. In one aspect, certain number of leading sign bits from at least some of the samples may be removed before arranging such samples in the

packet, thereby compressing the data corresponding to the samples represented in the packet. The leading sign bits may be the leading zeros or leading ones. The method may further include inserting an indicator in the packet that identifies the samples in the packet that have bits removed therefrom. The method may further include transmitting the packet to a control unit. The packet may be transmitted by any suitable manner, including via a land cable, wirelessly, an ocean-bottom cable, or a streamer cable that is in data communication with the control unit on a vessel, and electrical conductor or fiber optic links. In one aspect, the samples may be arranged such that each sample belonging to one set of samples in the packet occupies the number of bits that is equal to the bit length and each sample belonging to a second set occupies the number of bits less than the bit length. Any combination of compressed and uncompressed samples may be used in a particular packet.

[0035] In another aspect, the method may include receiving a packet at the remote unit; decompressing the packet; and storing the information relating to the samples in the packet in a suitable medium, such as solid state memory, hard disc, tape, etc. The received samples in one aspect may be in response to the transmission of a seismic signal into the earth and in another aspect generated by noise. In another aspect, a method is provided that includes: transmitting an acoustic signal into the earth; receiving seismic signals at a one or more sensors in signal communication with the earth; sampling the received seismic signals from the one or more sensors into a plurality of samples and digitizing each sample at a data acquisition unit in signal communication with the one or more sensors, each digitized sample having a predefined bit length; arranging the digitized samples into a plurality of packets, wherein at least some of the packets in the plurality of packets include digitized samples are compressed samples so that each compressed sample occupies less than a bit length; and transmitting the plurality of packets to a remote unit. The transmitting of the packets may include transmitting the plurality of packets with a varying time intervals between the transmissions of at least some of the packets. The time intervals may be computed using any technique that randomizes the time intervals, including a random number generator. The method may compute packet efficiency for each packet before computing the time intervals

between the transmissions of the packets and may transmit the packets without varying the time intervals when the packet efficiency is less than a certain threshold. The varying time may be computed using a time slot technique. The method provides for choosing a random time-slot for each packet across a portion or the entire seismic data acquisition system elements so that no transmission device is on the same time schedule. The method provides for inserting an indicator in the packets that includes compressed digitized samples, which indicator will enable the remote unit to decompress the compressed digitized samples. The control unit may receive the plurality of packets; decompress the compressed digitized samples; process the decompressed samples that may include such techniques as stacking, correlating, noise editing, etc.; and store the processed samples in a data storage medium. The processed samples may be used to obtain a map of the earth's subsurface.

[0036] In another aspect, the disclosure provides a method for acquiring seismic data that includes receiving seismic signals at one or more sensors; amplifying the received seismic signals into a plurality of samples, each sample having a fixed bit length; arranging the samples in a plurality of packets; transmitting the plurality of packets, wherein the time interval between the transmissions of successive packets varies. As noted earlier, the time interval between the transmissions of the successive packets may be computed using any technique that randomizes the time intervals, including a random number generator and/or using a time-slot technique.

[0037] In another aspect, the method may form packets having different payload sizes, wherein some packets may include compressed samples and may transmit such packets with or without varying the time intervals between the transmissions of such packets.

[0038] In another aspect, the disclosure provides a seismic data acquisition apparatus that includes: a circuit for receiving seismic signals from a sensor; a circuit for sampling the received signals; a circuit for digitizing the samples, each digitized sample having a fixed bit length; and a processor that arranges the digitized samples into packets, wherein at least some of the packets include at least some of the samples that occupy number of bits less than the fixed bit length. The data acquisition unit may further include a transmitter that transmits

the packets over a communication link, which may be: (i) an electrical conductor; (ii) a wireless link; (iii) a data communication link in a streamer cable; (iv) a data communication link in an ocean-bottom cable; or (v) a fiber optic link. The processor may compress the samples by removing certain leading sign bits from the samples. The processor may store the compressed bit in a memory and then utilize such stored samples to form packets. The processor further may insert an indicator corresponding to any particular compressed sample or a group of samples so as to enable the decompression of the compressed samples at a later time. A control unit placed remote from the sensors receives the transmitted packets; and decompresses the compressed packets. The processor also may vary the time interval between the transmissions of successive packets. A program associated with the processor enables the processor to vary the time based on: any suitable method including but not limited to: (i) using a random number generator; and (ii) using a time slot computation for the packets.

[0039] Both the method of compressing data by deleting bits in samples and varying time between transmissions of packets provide randomization. These methods may be utilized separately or concurrently.

[0040] The foregoing description is directed to particular embodiments for the purpose of illustration and explanation. It will be apparent, however, to one skilled in the art that many modifications and changes to the embodiments set forth above are possible without departing from the scope and the spirit of the disclosure. It is intended that the following claims be interpreted to embrace all such modifications and changes.

WHAT IS CLAIMED IS:

1. A method of acquiring seismic data, comprising:
receiving seismic signals at a sensor from an earth formation;
creating a plurality of samples from the received seismic signals, each created sample
having a same bit length;
arranging the plurality of samples in packets, wherein at least some of the packets
include one or more compressed samples; and
transmitting the packets to a remote unit.
2. The method of claim 1 further comprising removing one or more leading sign bits
from the samples to obtain the compressed samples.
3. The method of claim 2, wherein the leading sign bits correspond to one of leading
zeros or leading ones.
4. The method as in any of claims 1-3 further comprising inserting an indicator in the
packets that identifies the compressed samples in the packets.
5. The method as in any of claims 1-4, wherein transmitting the packets to a remote unit
comprises transmitting the packet via one of: a land cable; an ocean-bottom cable; a
streamer cable; a fiber optic link; and wirelessly.
6. The method as in any of claims 1-5, wherein arranging the selected samples in the
packets comprises arranging uncompressed samples in a first group and the
compressed samples in a second group.
7. The method as in any of claims 1-6 further comprising:
receiving the transmitted packets at the remote unit;

decompressing the compressed samples in the packets; and

processing the packets to obtain information about earth's substructure.

8. The method as in any of claims 1-7, wherein transmitting the packets comprises:
transmitting the packets from a plurality of units in the field to a repeater; and
transmitting the packets from the repeater to the remote unit.
9. A method of obtaining seismic data, comprising:
transmitting an acoustic signal into the earth;
receiving at an acquisition unit in the field seismic signals from one or more sensors
in signal communication with the earth;
sampling the received seismic signals at the field unit into a plurality of samples;
digitizing each sample at the data acquisition unit, each digitized samples having a
same bit length;
compressing digitized samples that meet a selected criterion;
arranging the digitized samples into a plurality of packets, wherein at least some of
the packets in the plurality of packets include compressed digitized samples;
and
transmitting the plurality of packets for further processing.
10. The method of claim 9, wherein the selected criterion is a number of leading sign bits
in a sample.
11. The method of claim 10, wherein the sign bits correspond to one of zeros and ones.
12. The method as in any of claims 9-11 further comprising randomizing time intervals
between the transmissions of the packets.

13. A seismic data acquisition apparatus, comprising:
 - a circuit configured to receive seismic signals from a sensor and to provide a plurality of samples representative of the seismic signals, each sample having a same bit length; and
 - a processor configured to:
 - compress at least some of the samples; and
 - arrange the plurality of samples into a plurality of packets so that at least some of the packets include one or more compressed samples.
14. The seismic data acquisition apparatus of claim 13, wherein the processor is further configured to compress the samples by removing certain leading sign bits from the samples.
15. The seismic data acquisition apparatus of claim 14, wherein the leading sign bits correspond to one of leading zeros and leading ones.
16. The seismic data acquisition apparatus as in any of claims 13-15, wherein the processor is further configured to insert indicators in the packets that identify the compressed signals in the packets.
17. The seismic data acquisition apparatus as in any of claims 13-16, wherein the processor is further configured to arrange the compressed samples in a first group and the uncompressed samples in a second group within a packet.

18. The seismic data acquisition apparatus as in any of claims 13-17, wherein the processor is further configured to transmit the packets to a remote unit, wherein the remote unit is configured to receive the transmitted packets and decompress the samples.
19. The seismic data acquisition apparatus as in any of claims 13-18 further comprising one or more repeaters configured to receive the transmitted packets and retransmit the received packet to a remote unit.
20. The seismic data acquisition apparatus as in any of claims 13-19, wherein the processor is further configured to vary time intervals between transmissions of the packets.
21. The seismic data acquisition apparatus of claim 20, wherein the time intervals are computed by at least one of: (i) a random number generator; and (ii) a time slot computation for the packets.

1/6

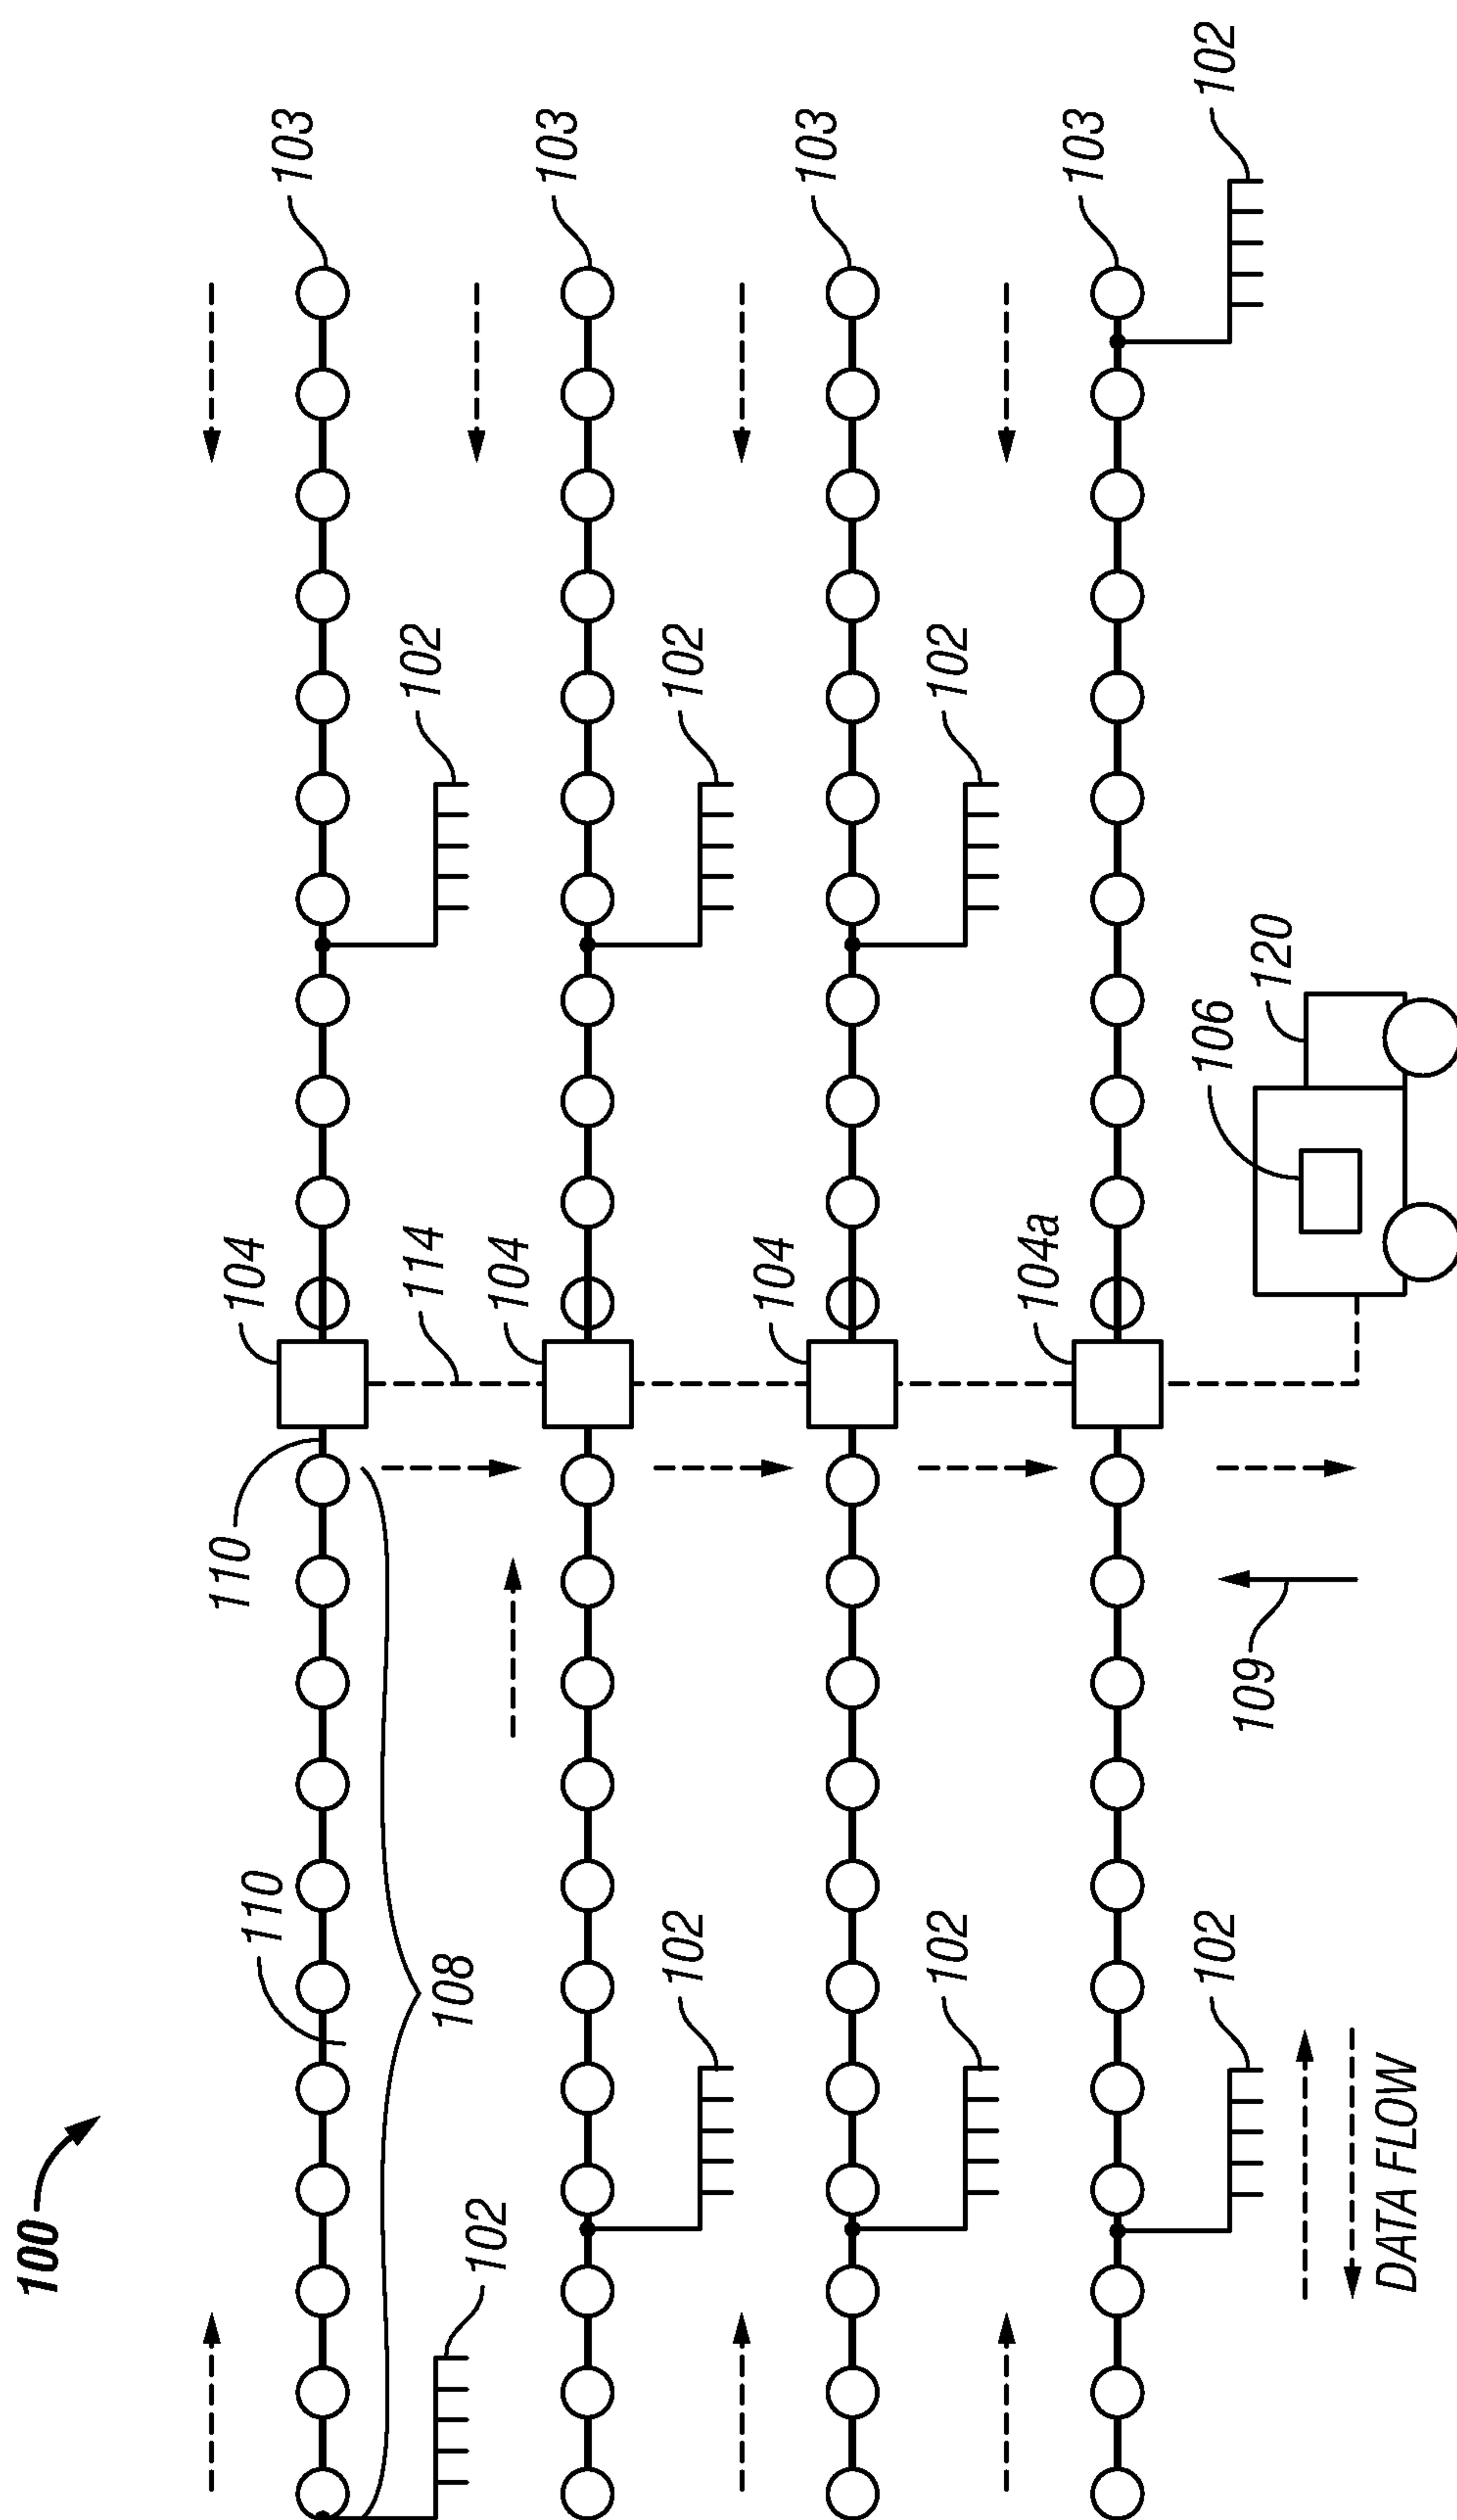


FIG. 1

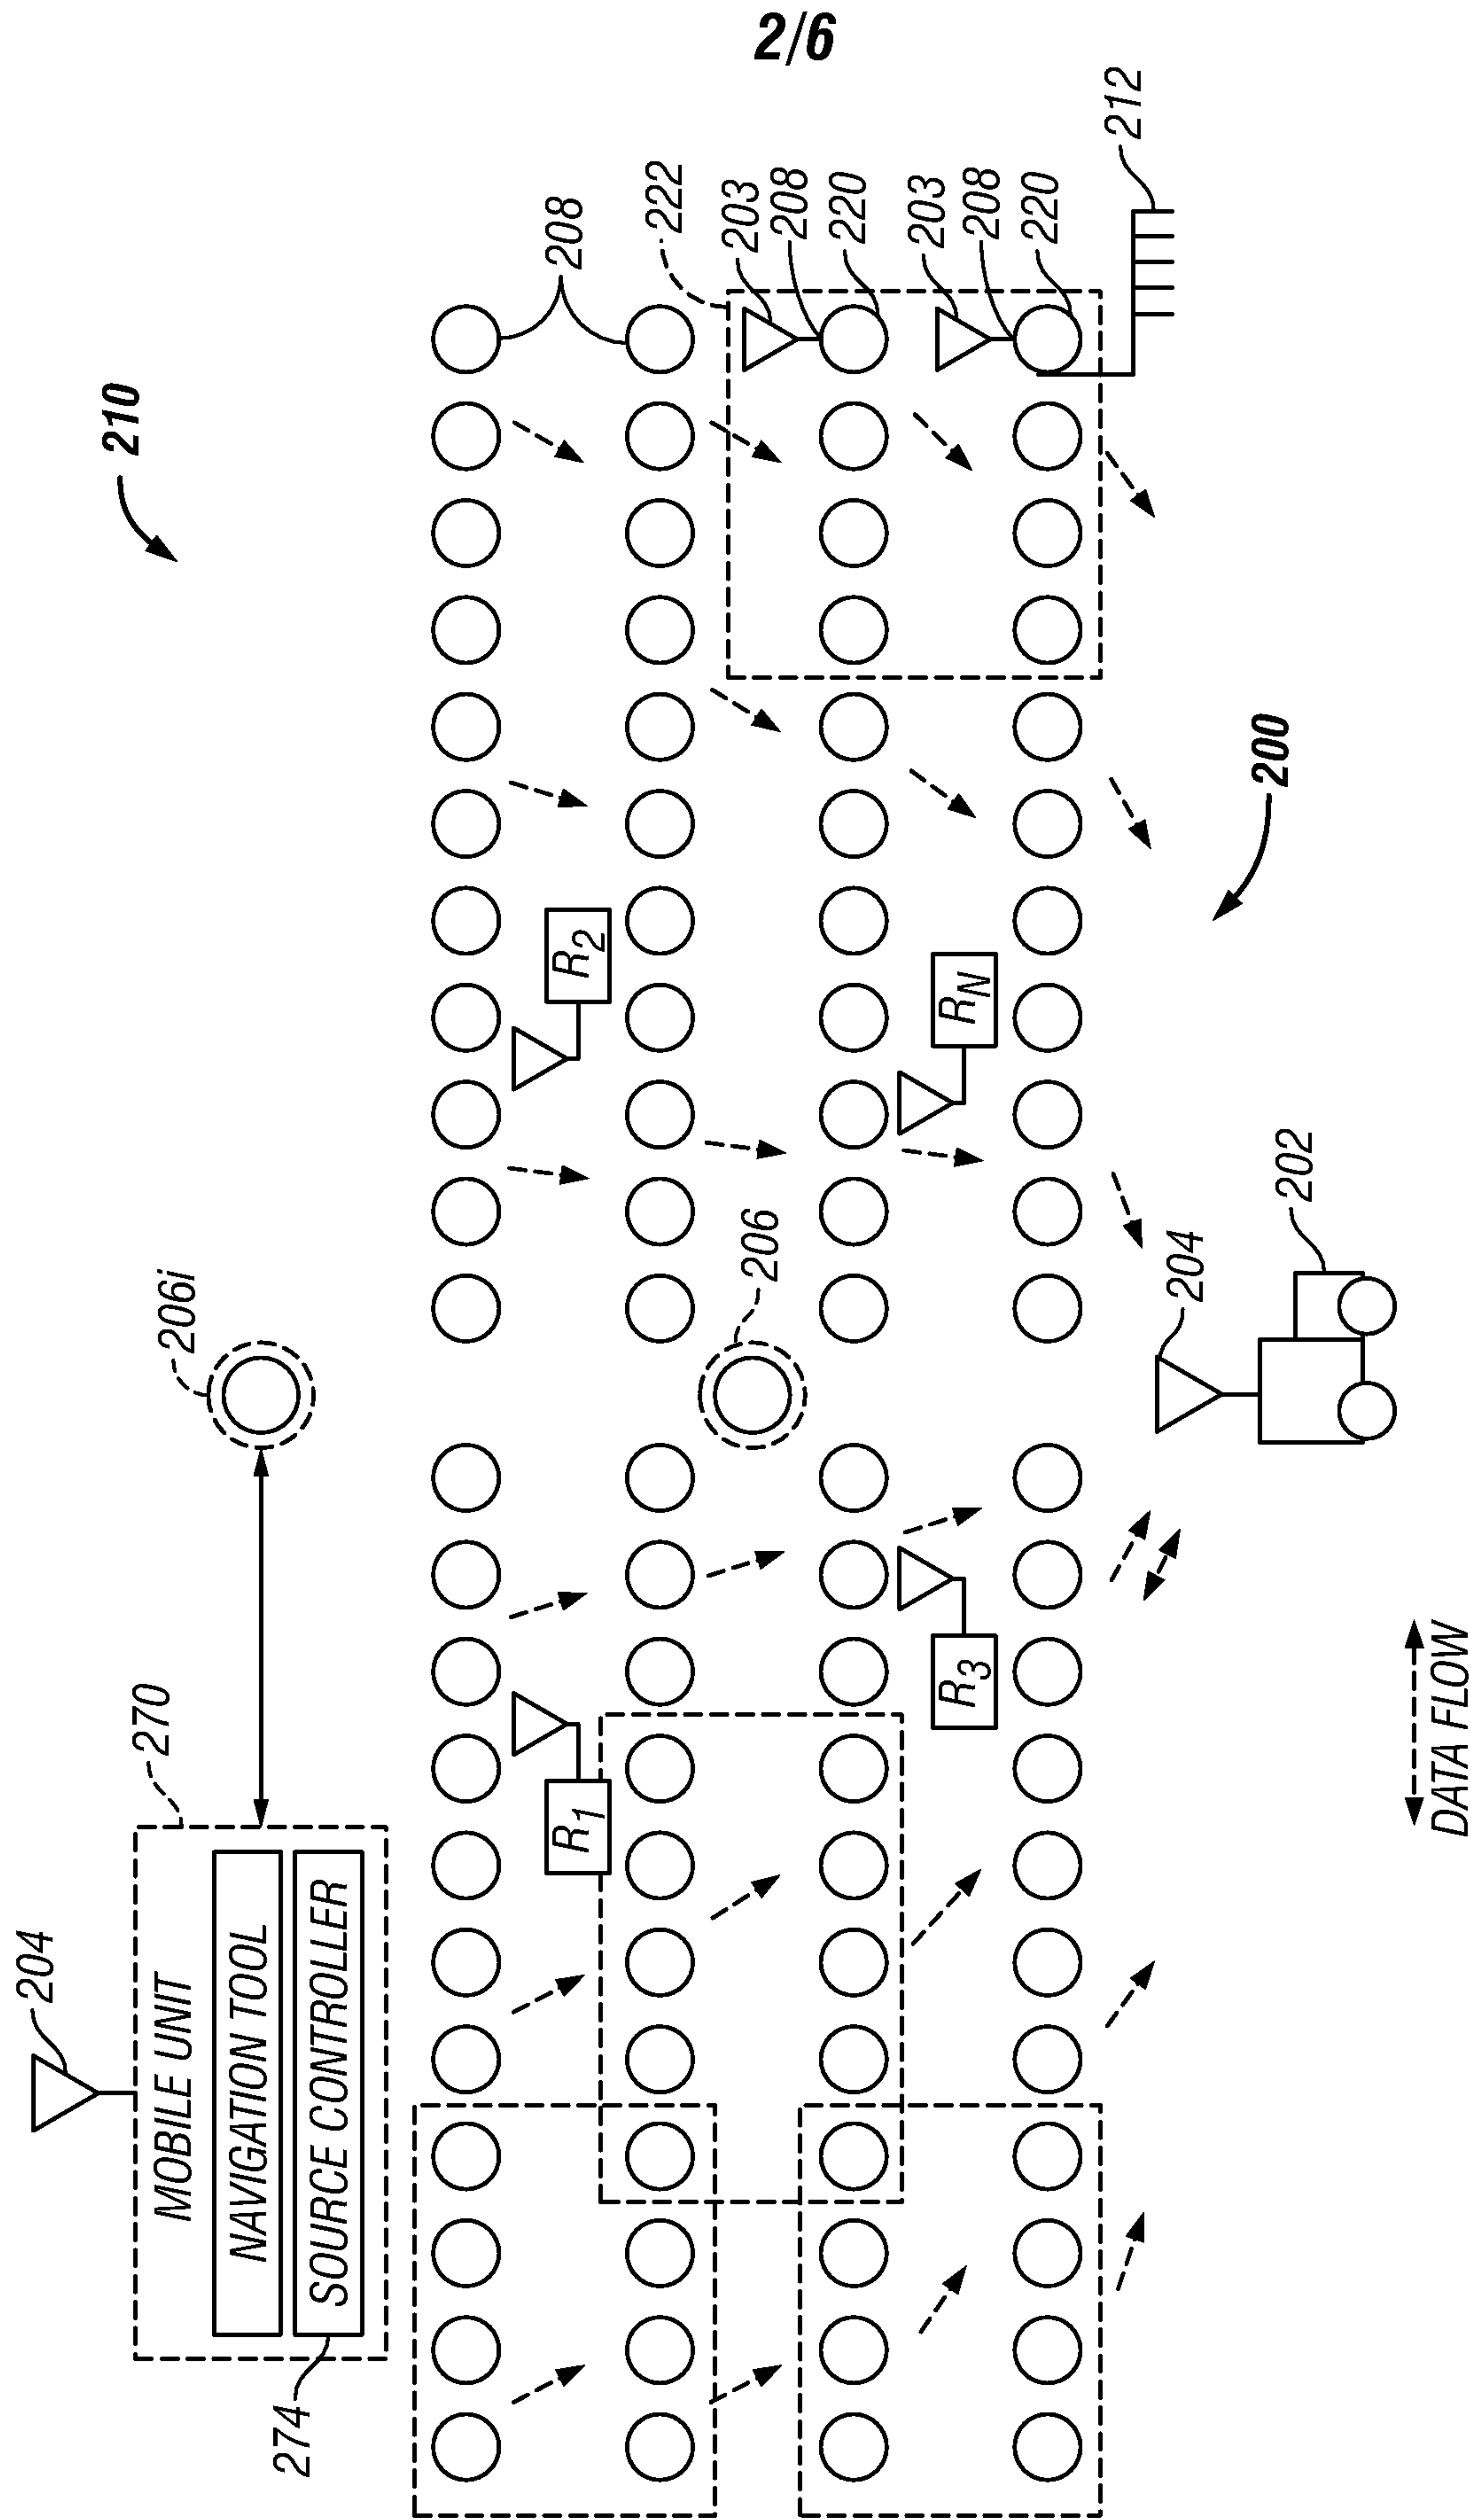


FIG. 2

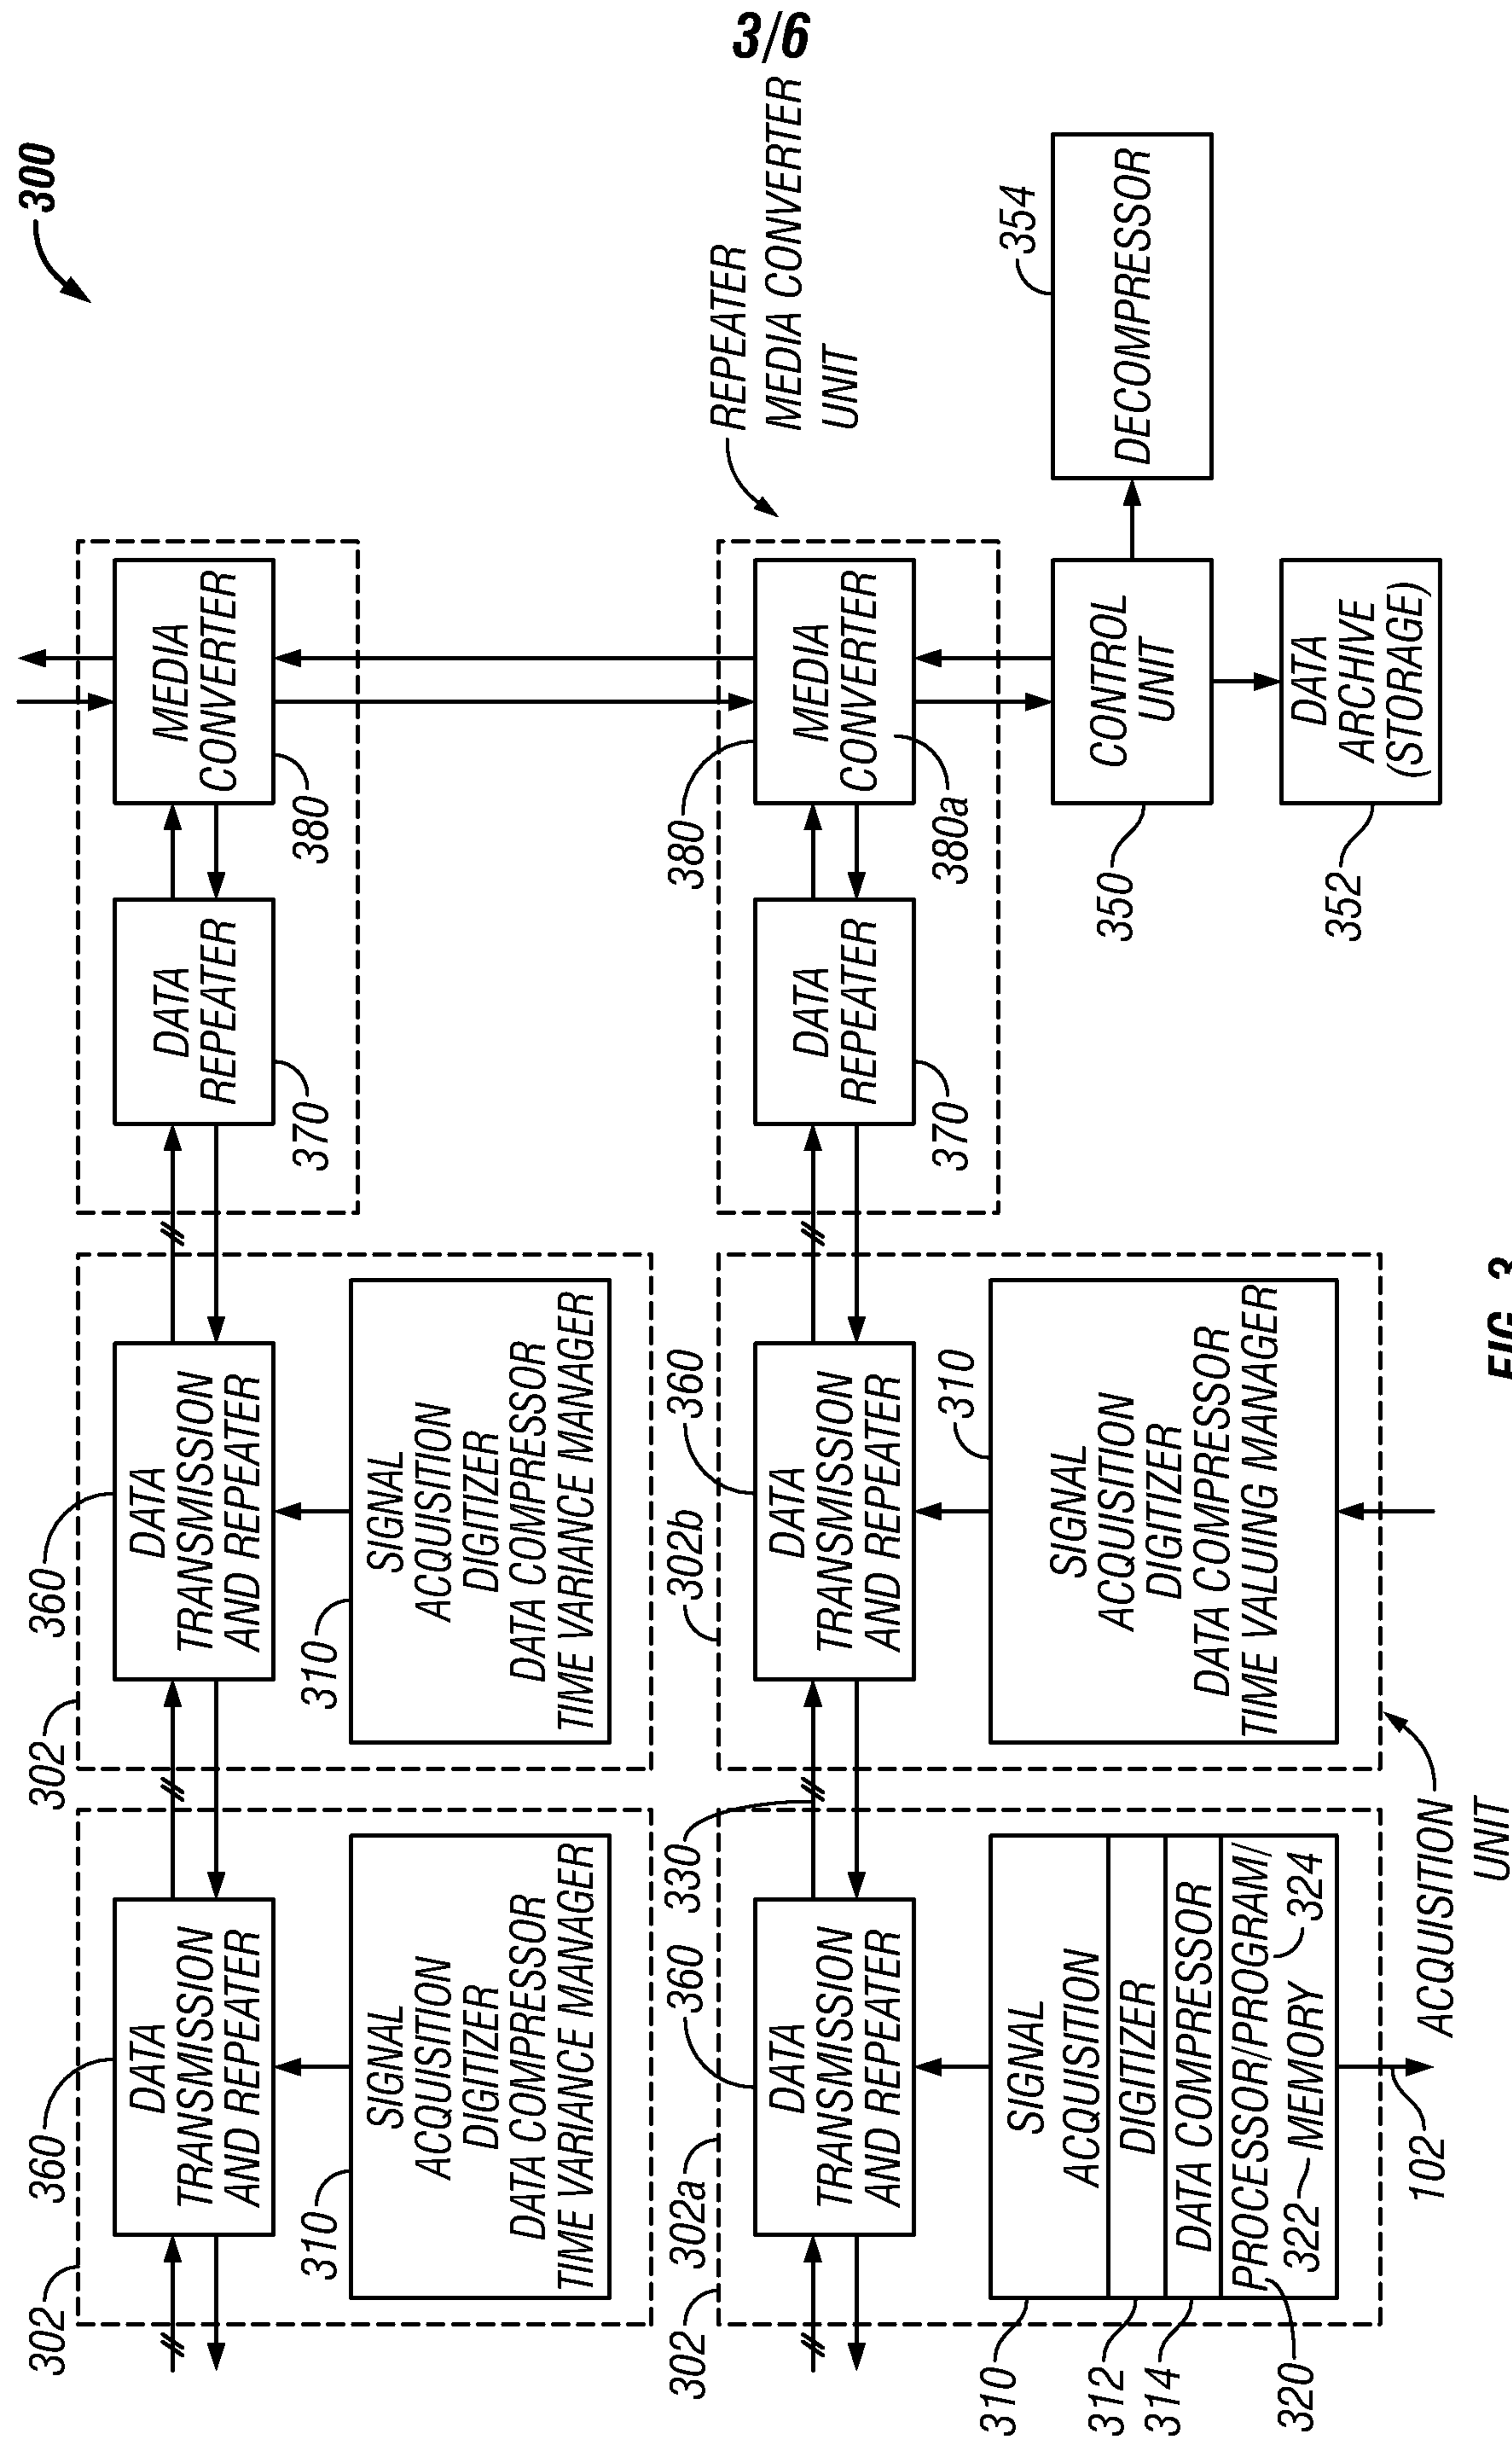


FIG. 3

4/6

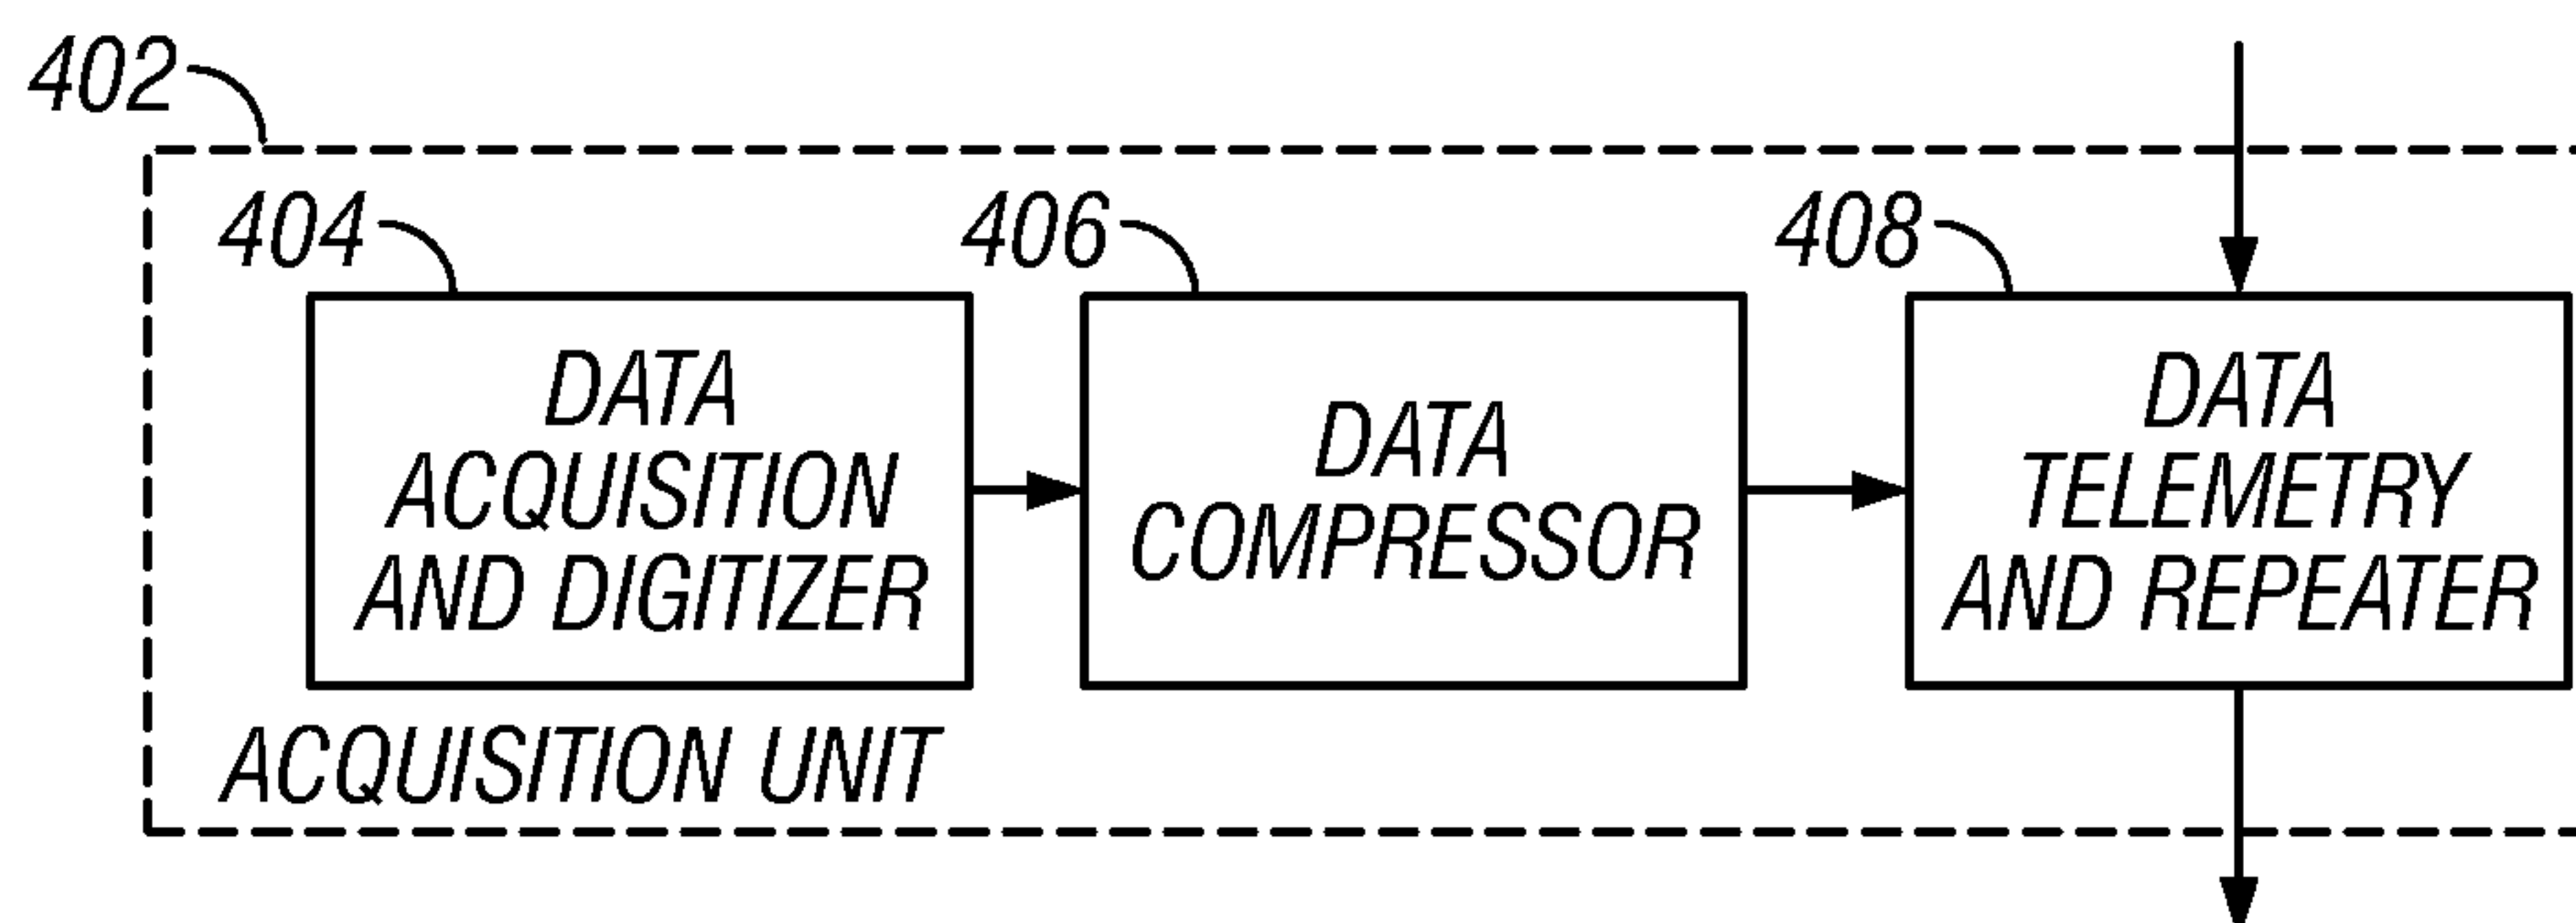


FIG. 4

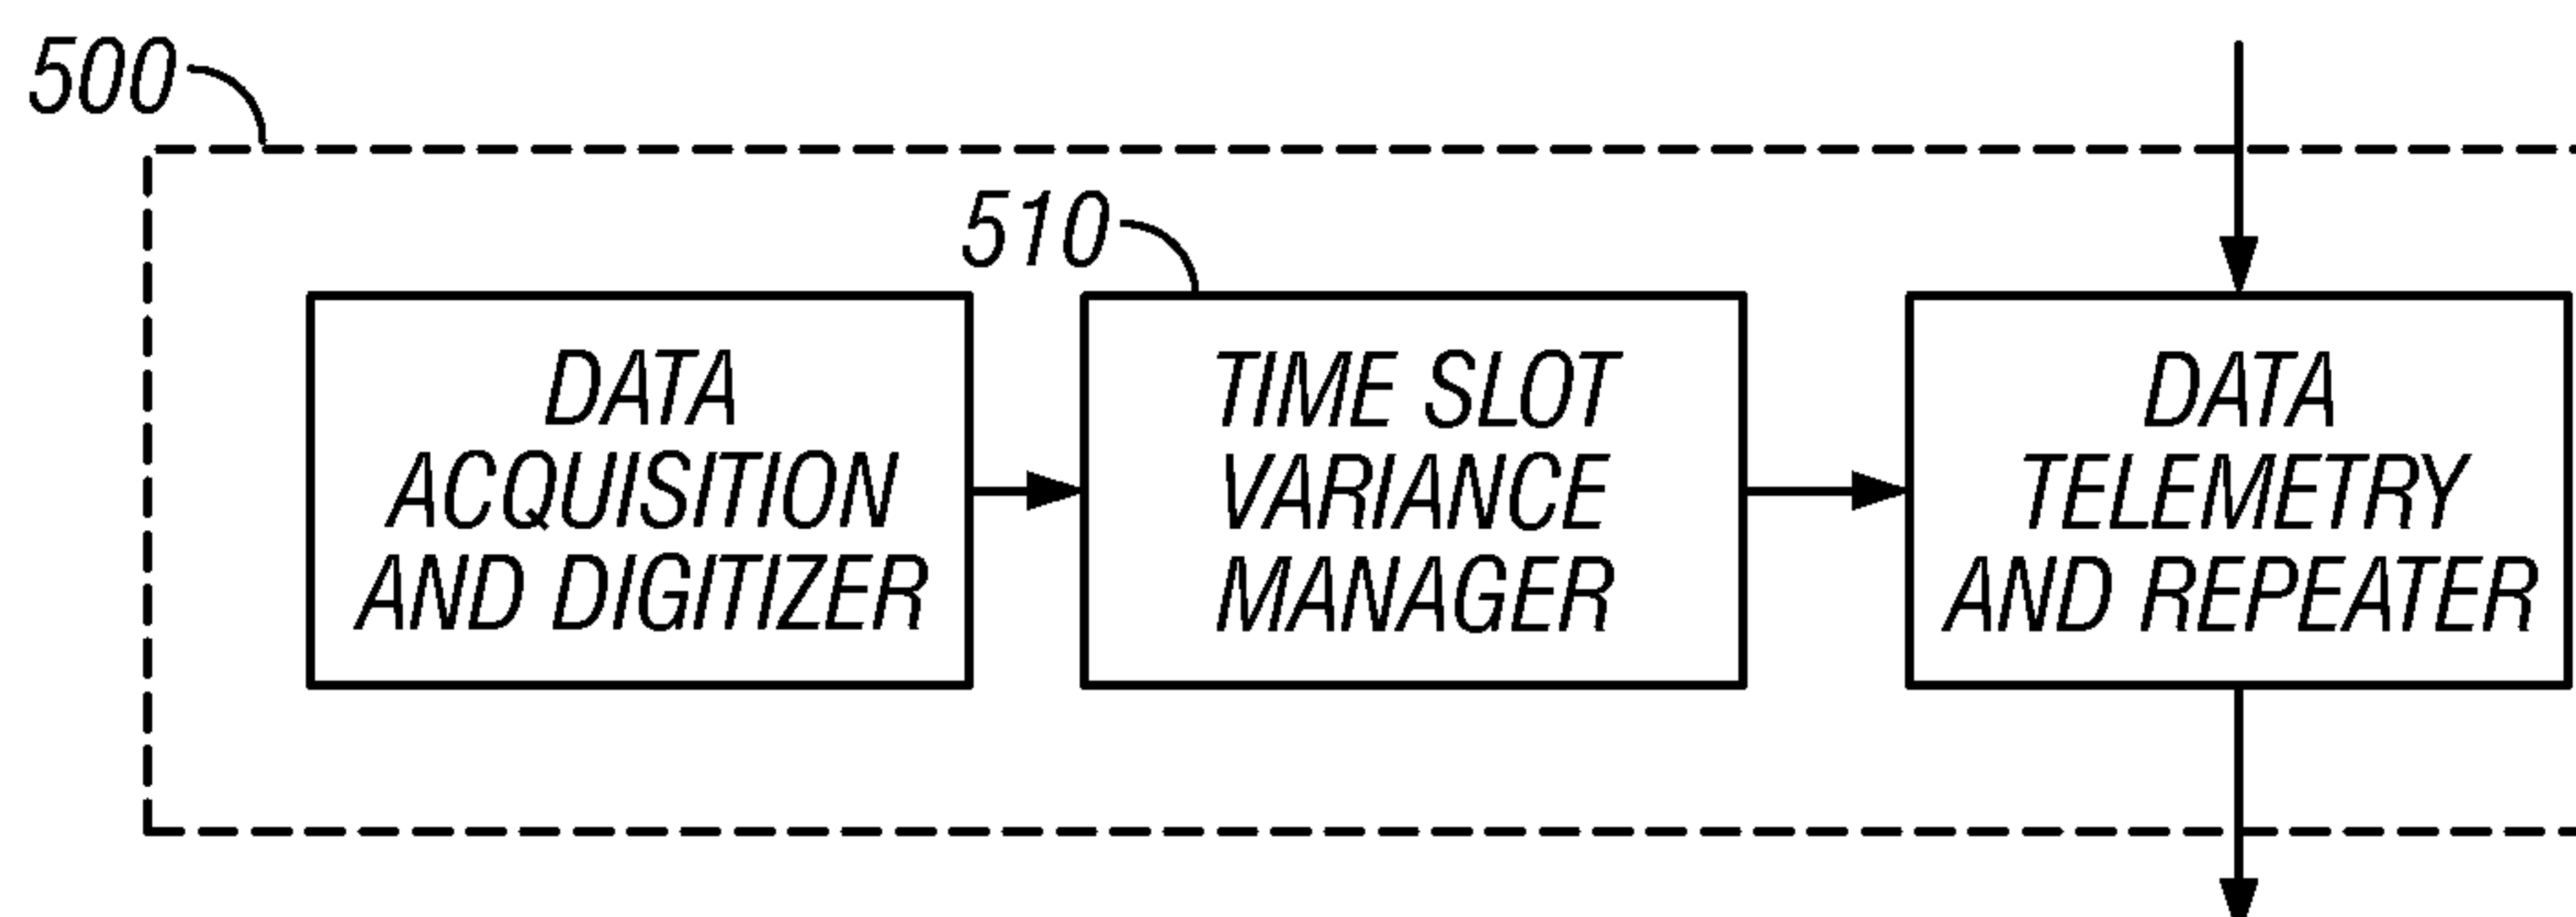


FIG. 5

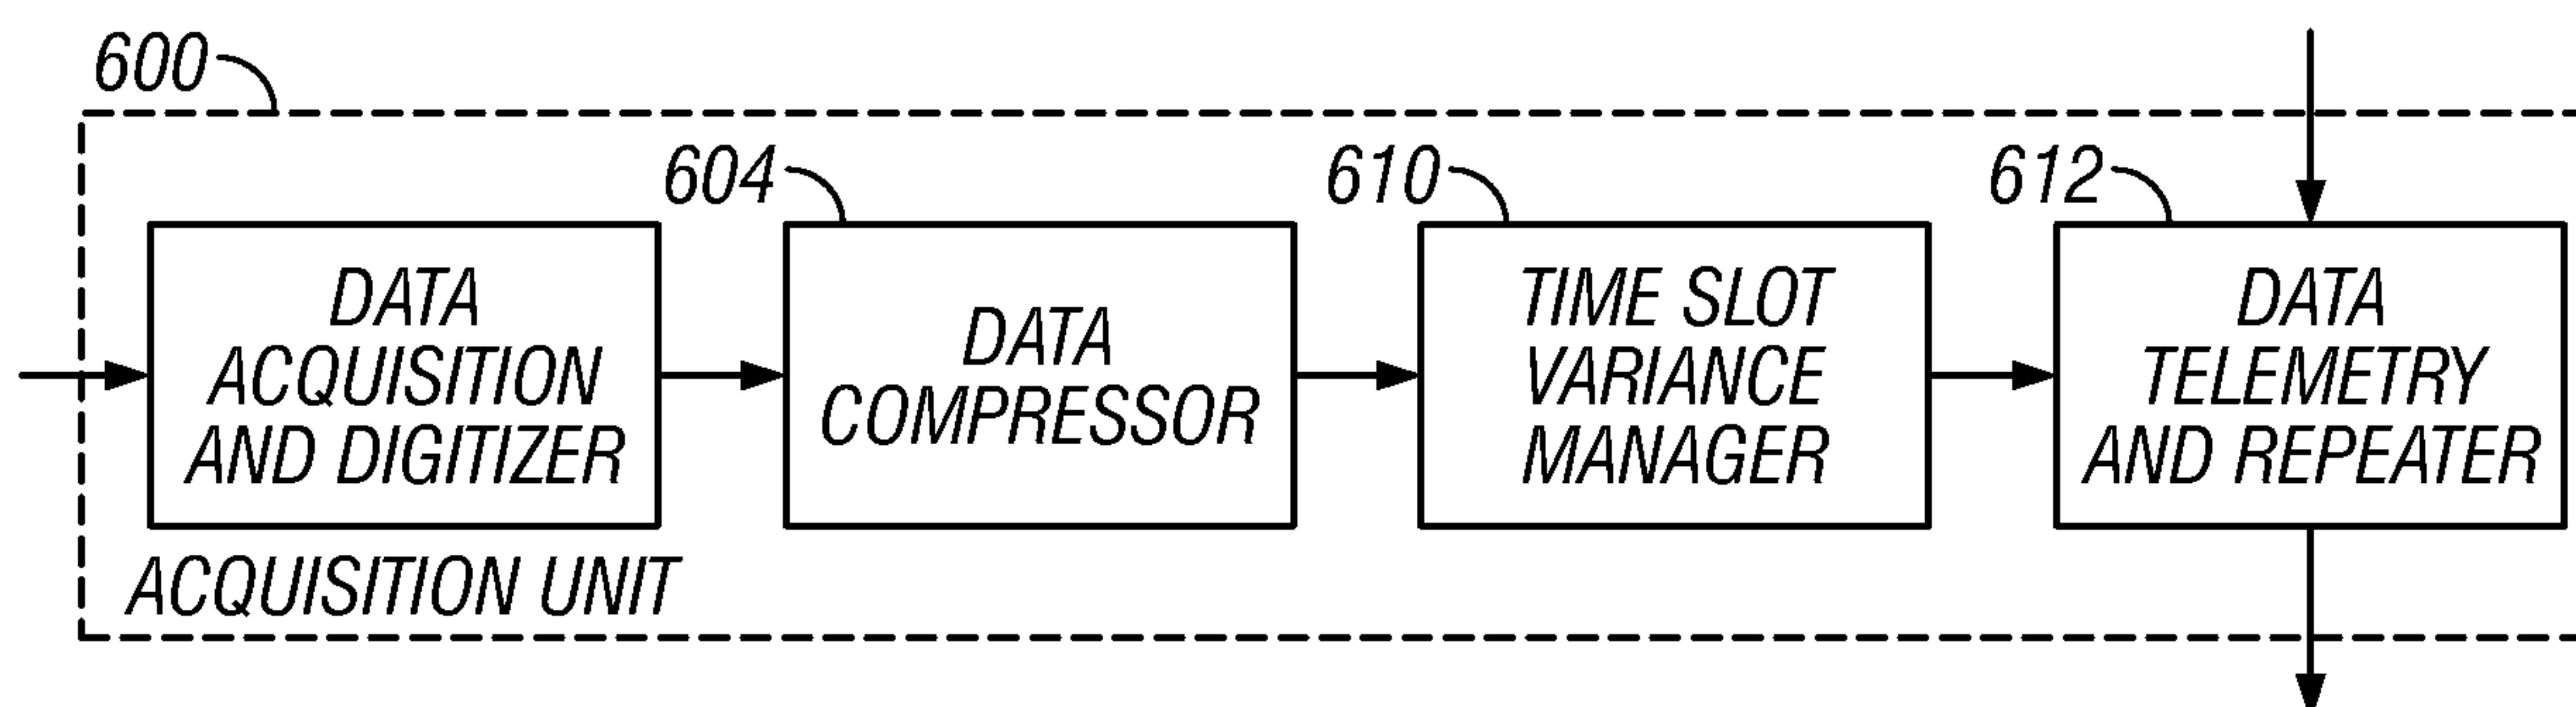


FIG. 6

5/6

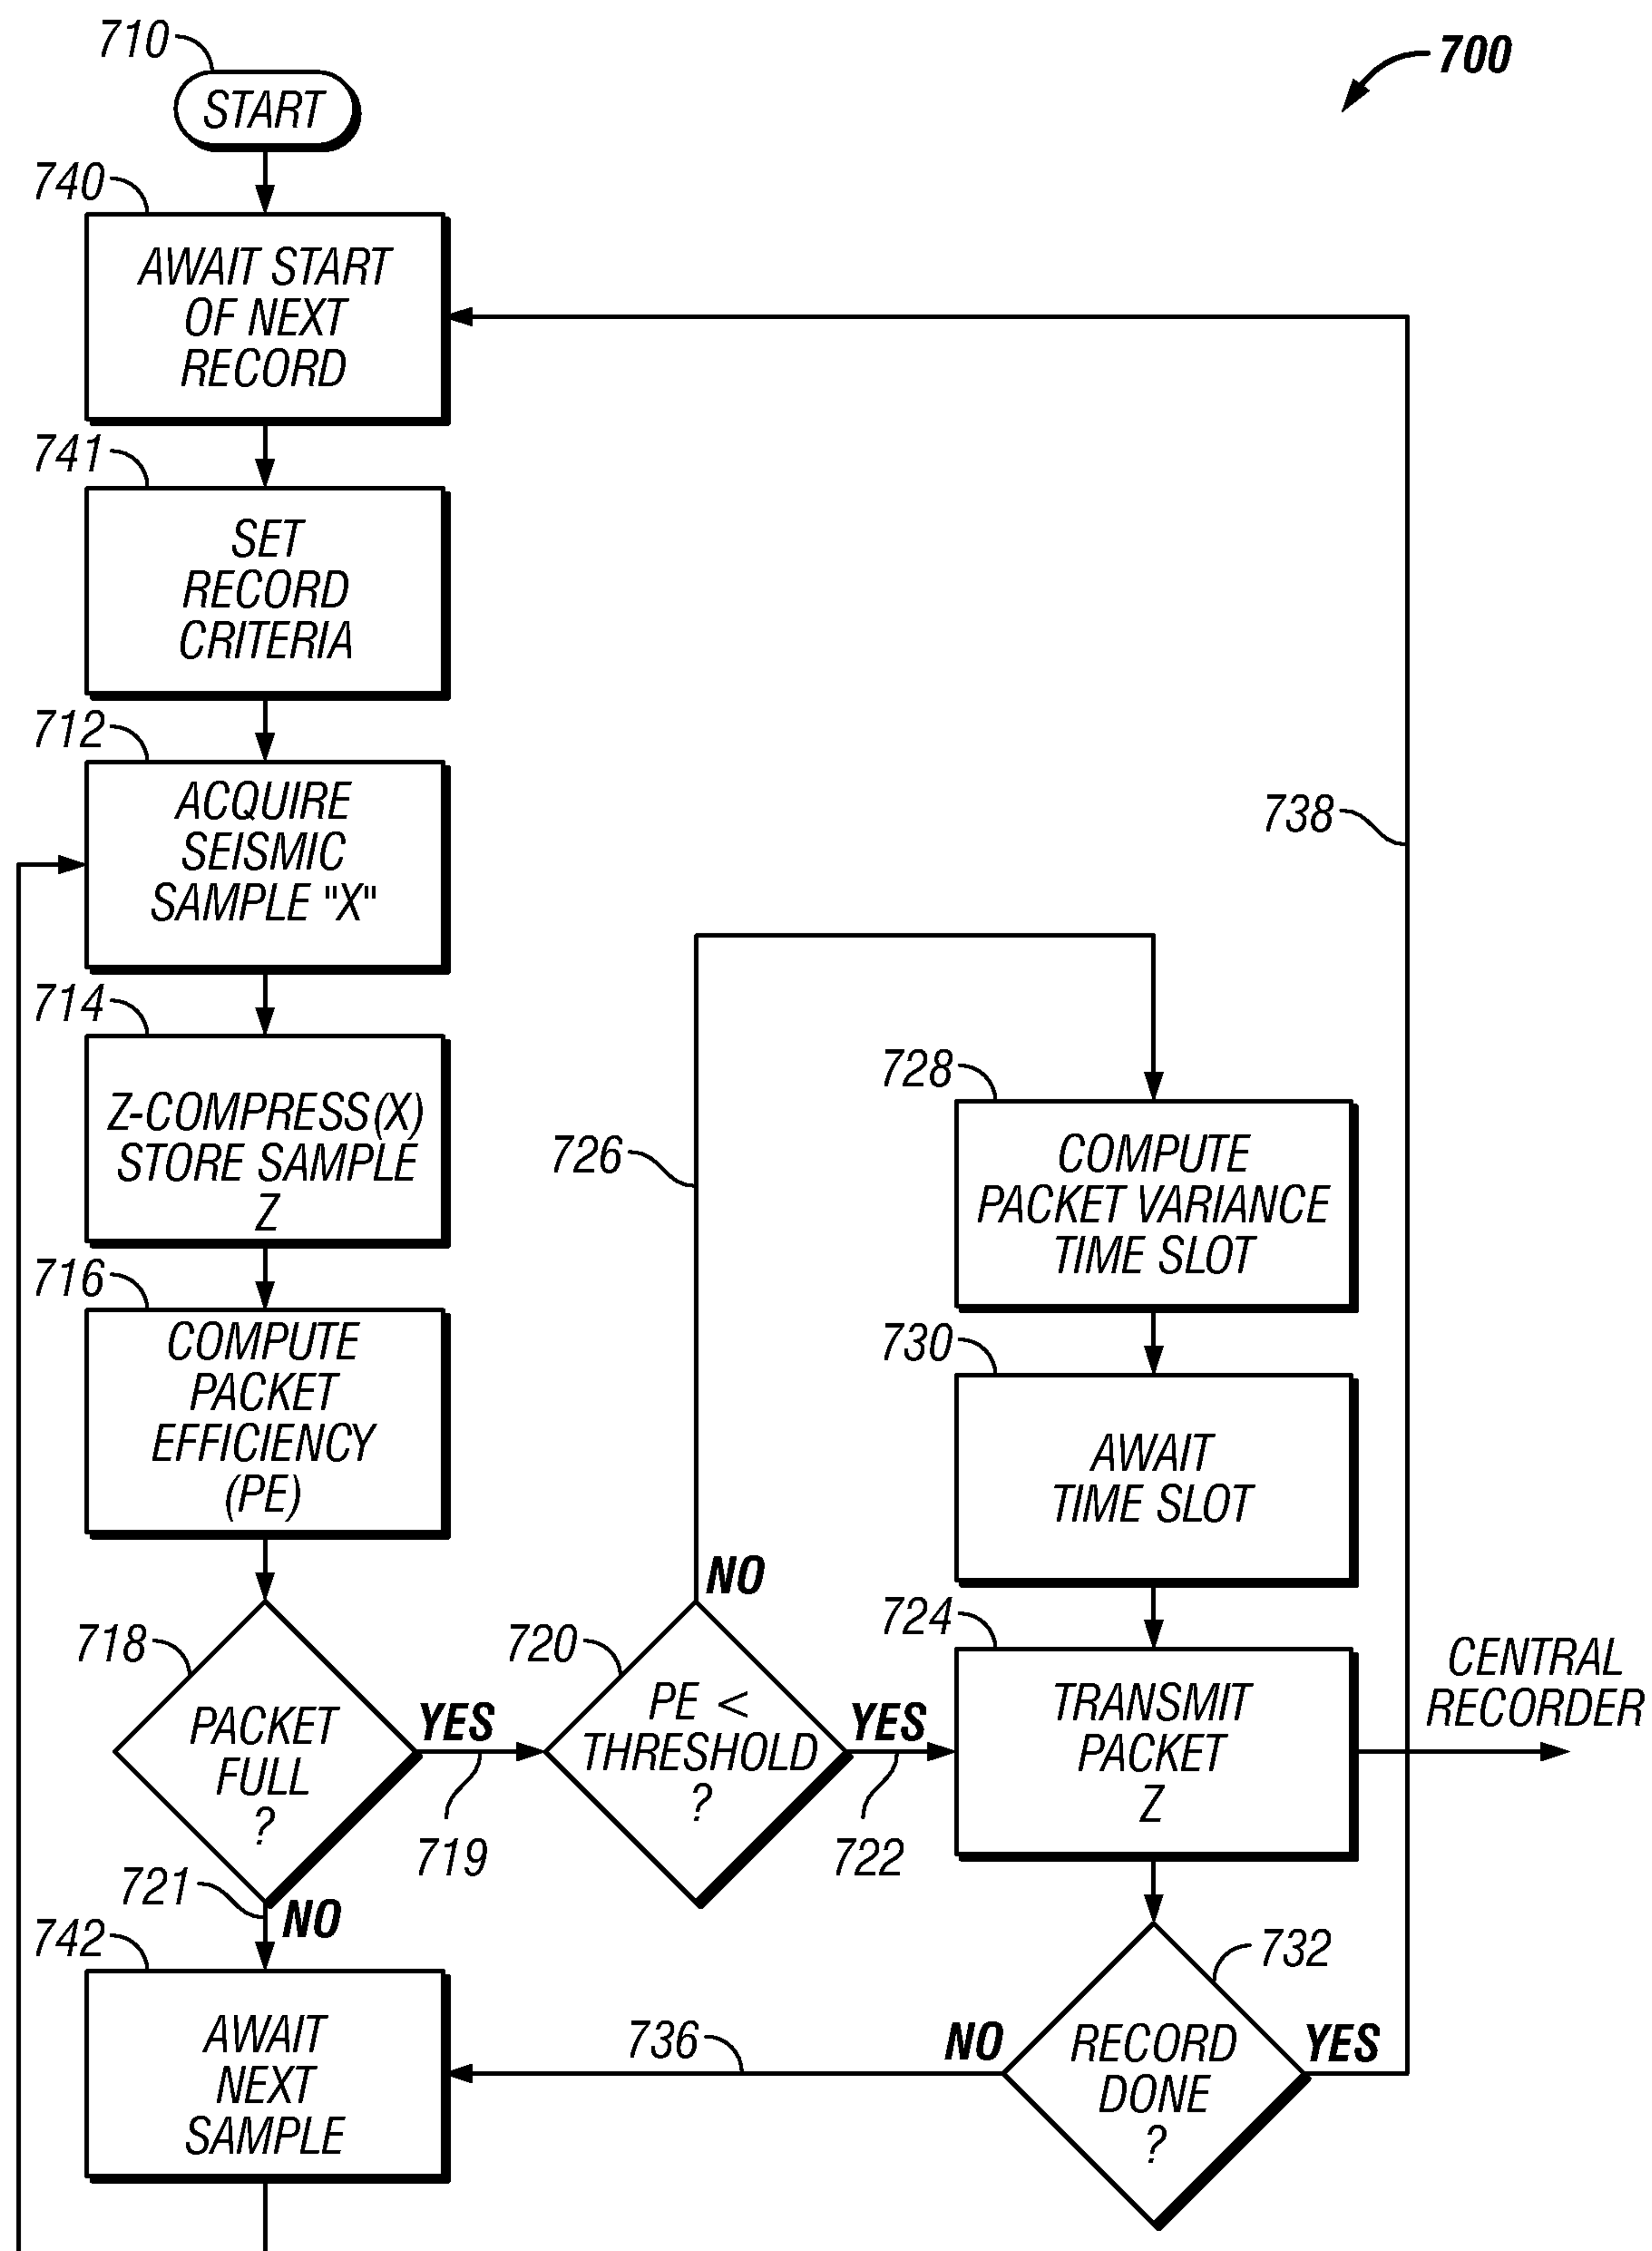


FIG. 7

6/6

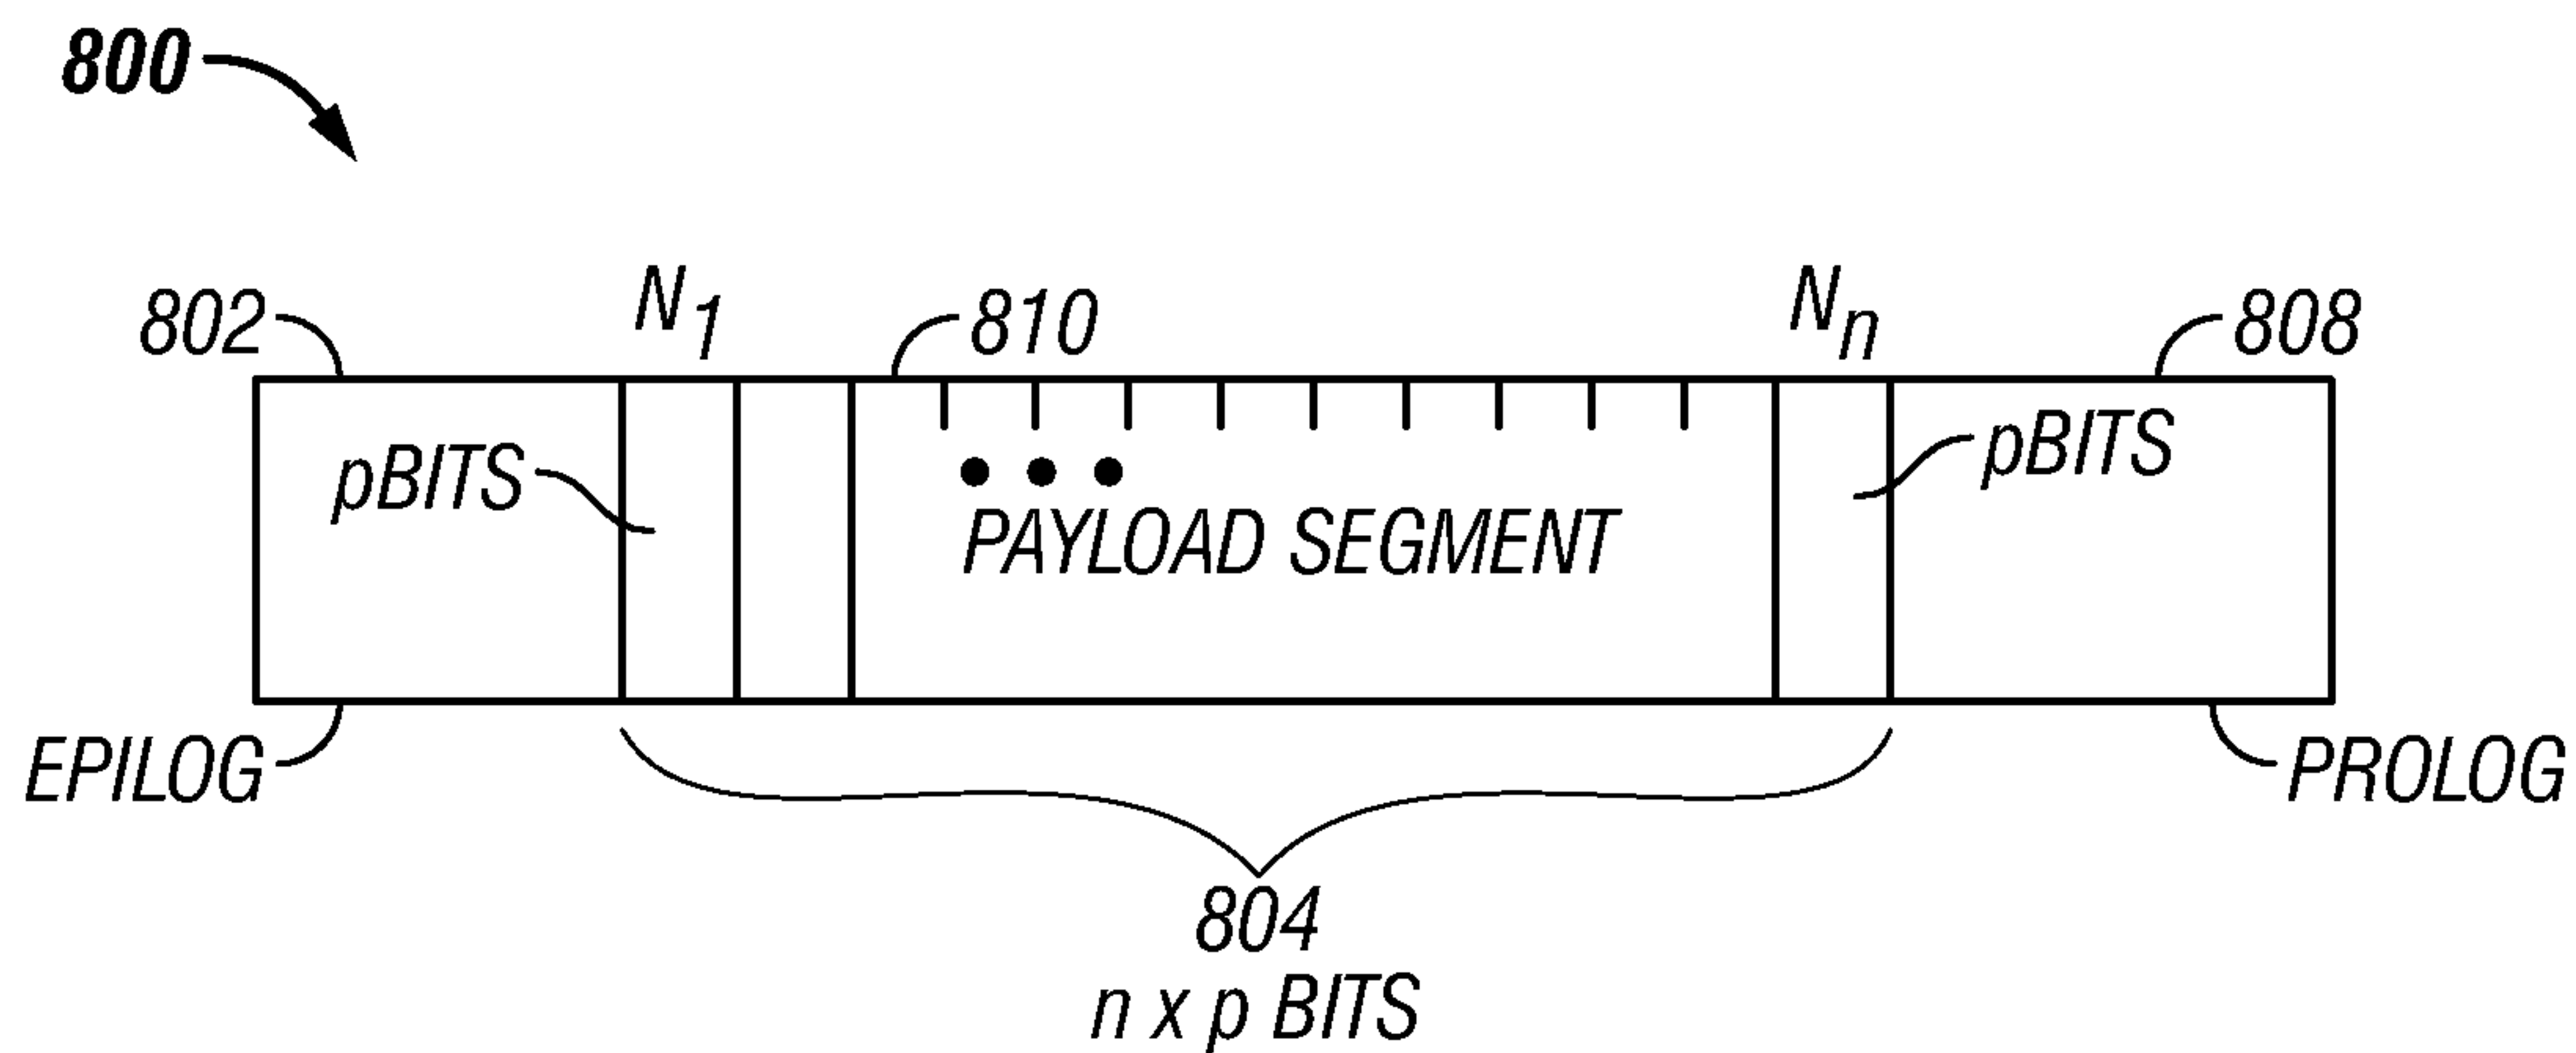


FIG. 8

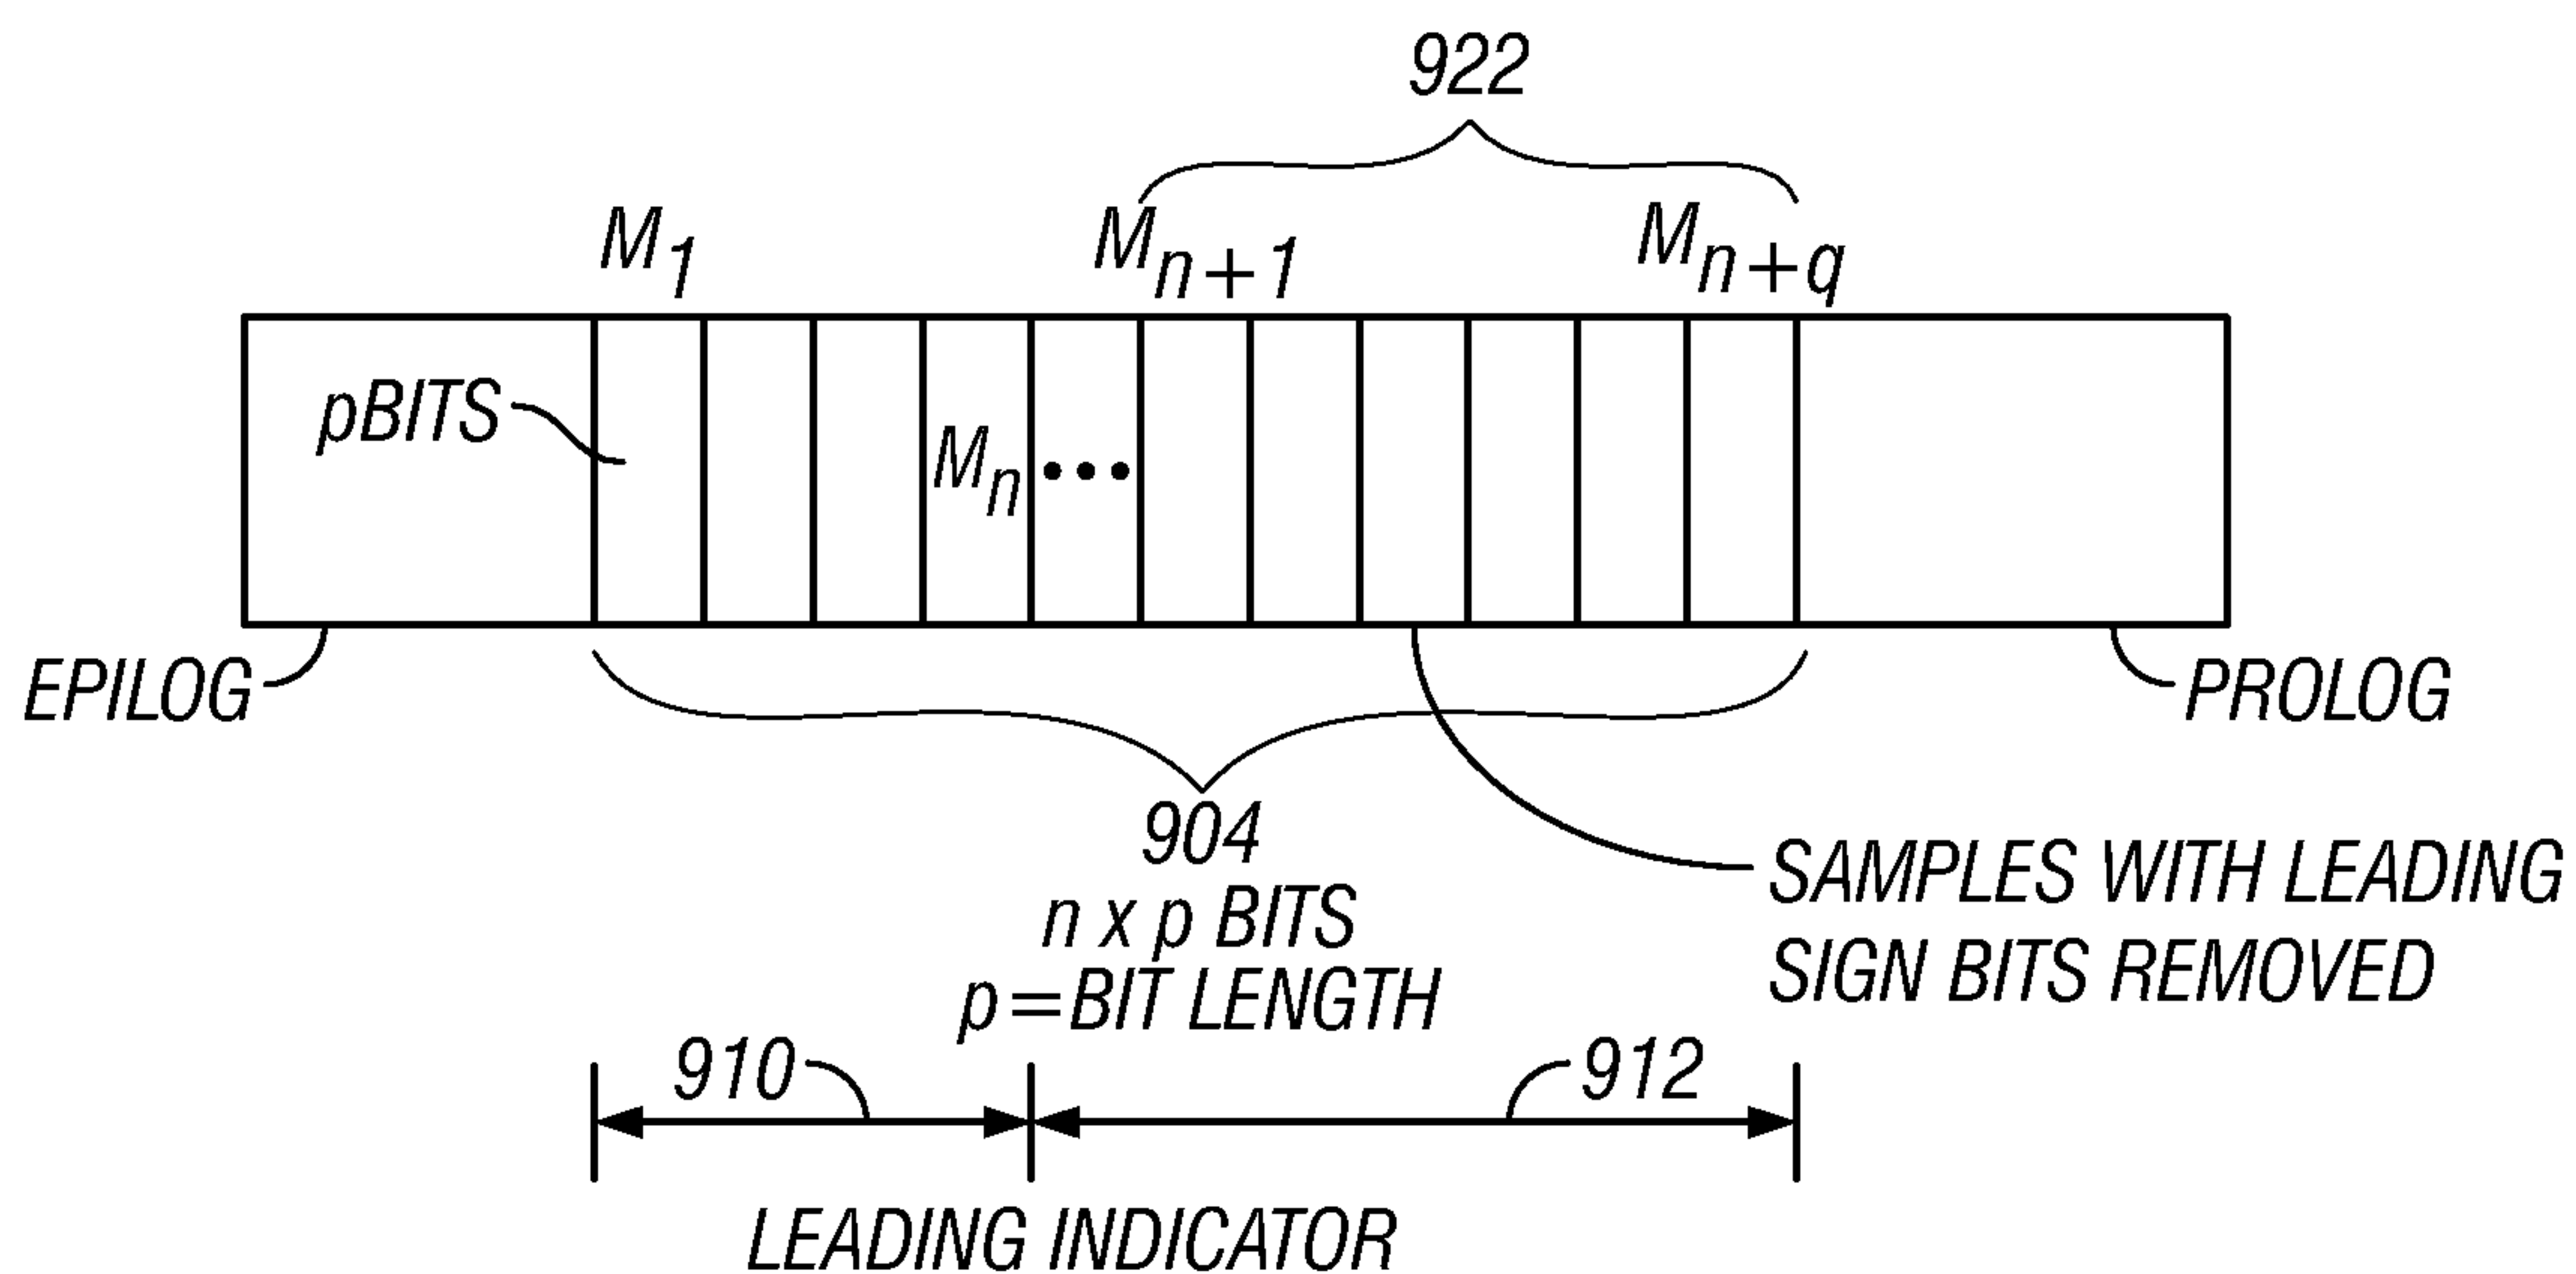


FIG. 9

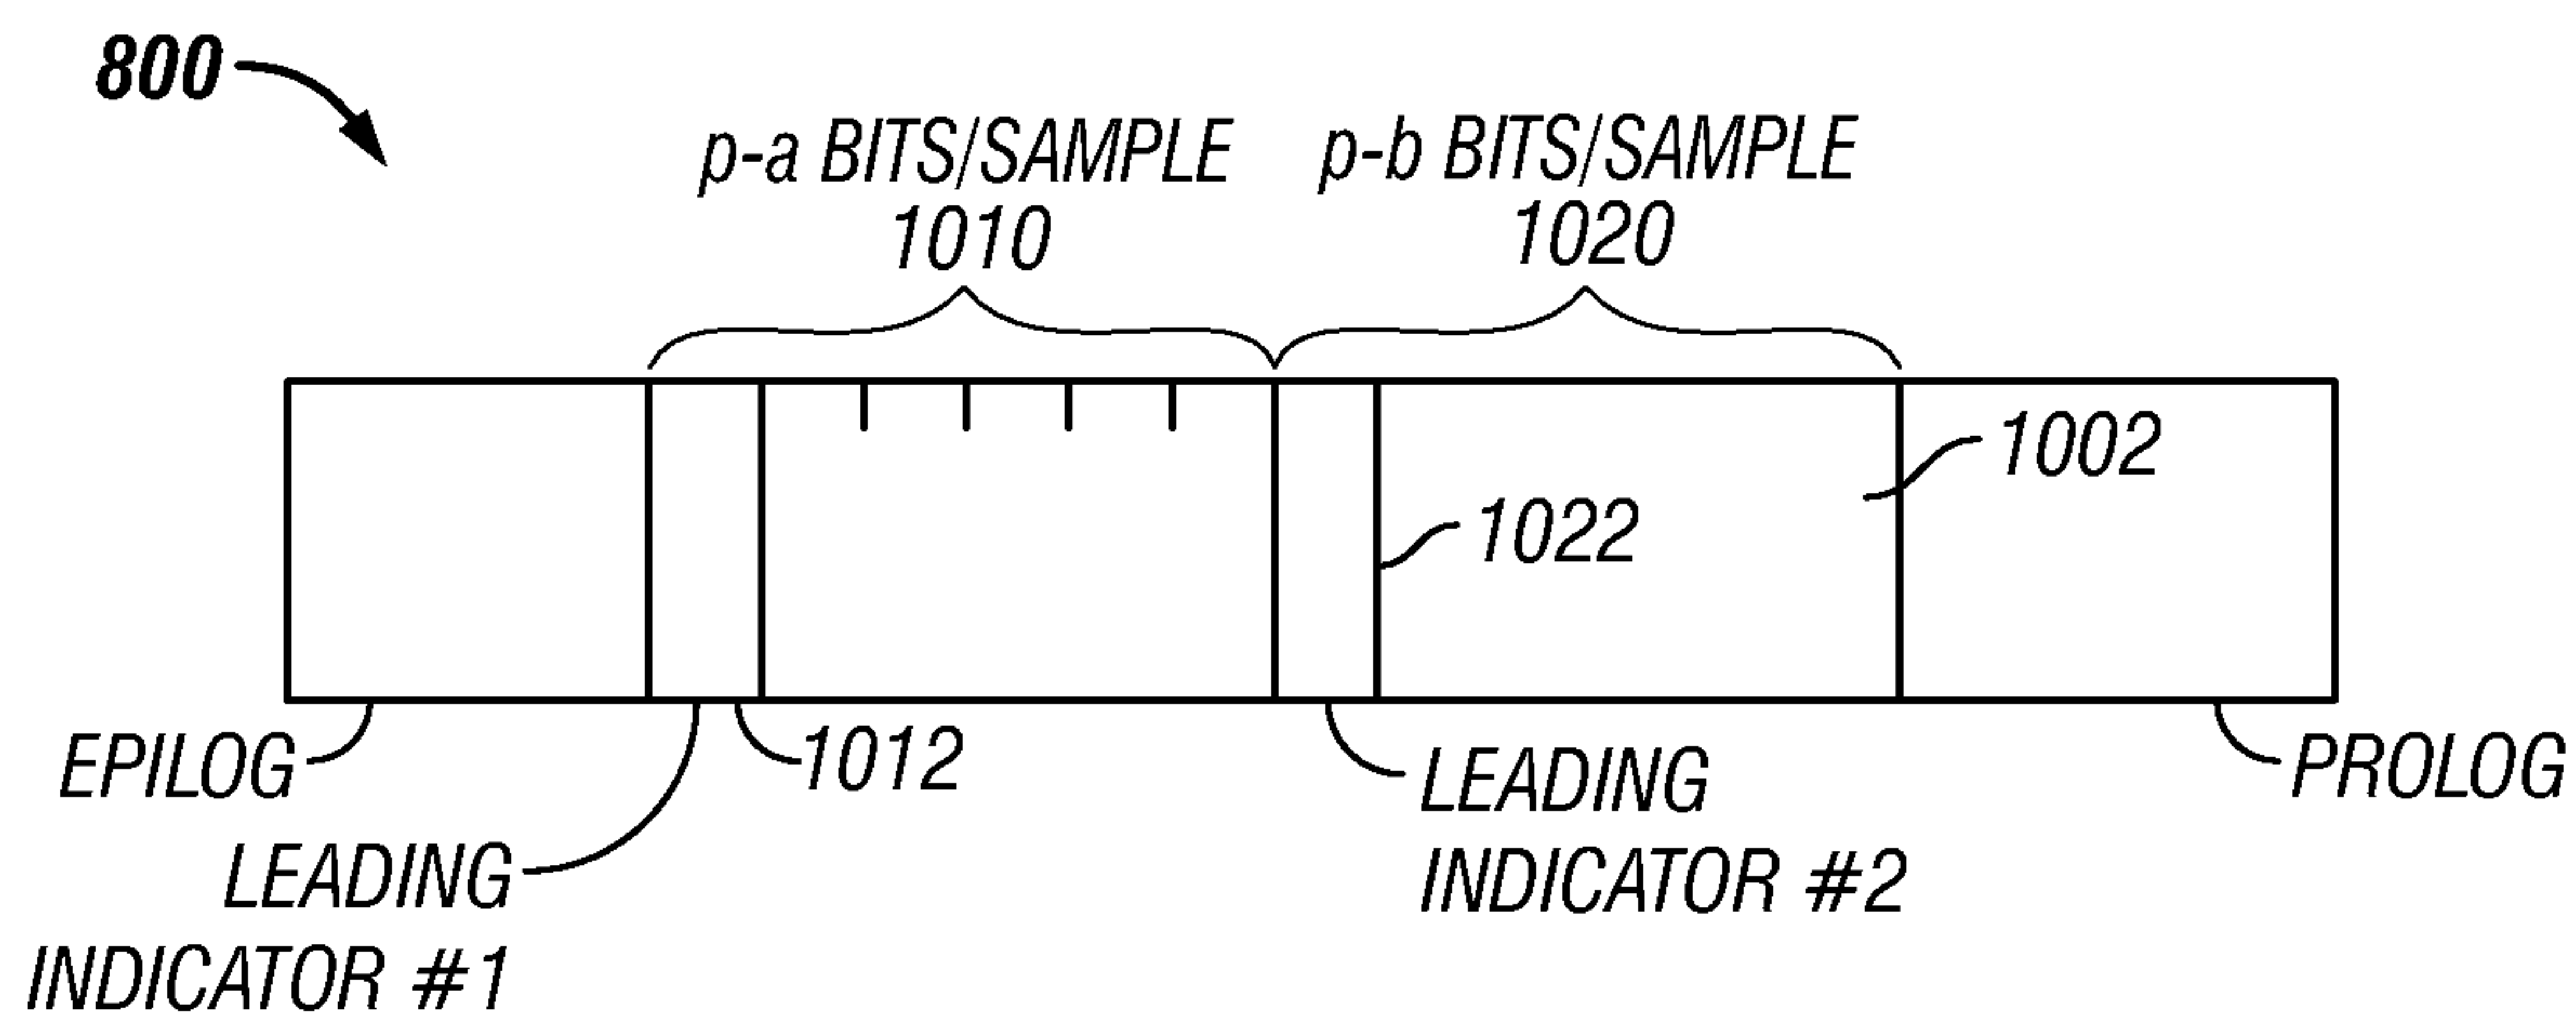


FIG. 10

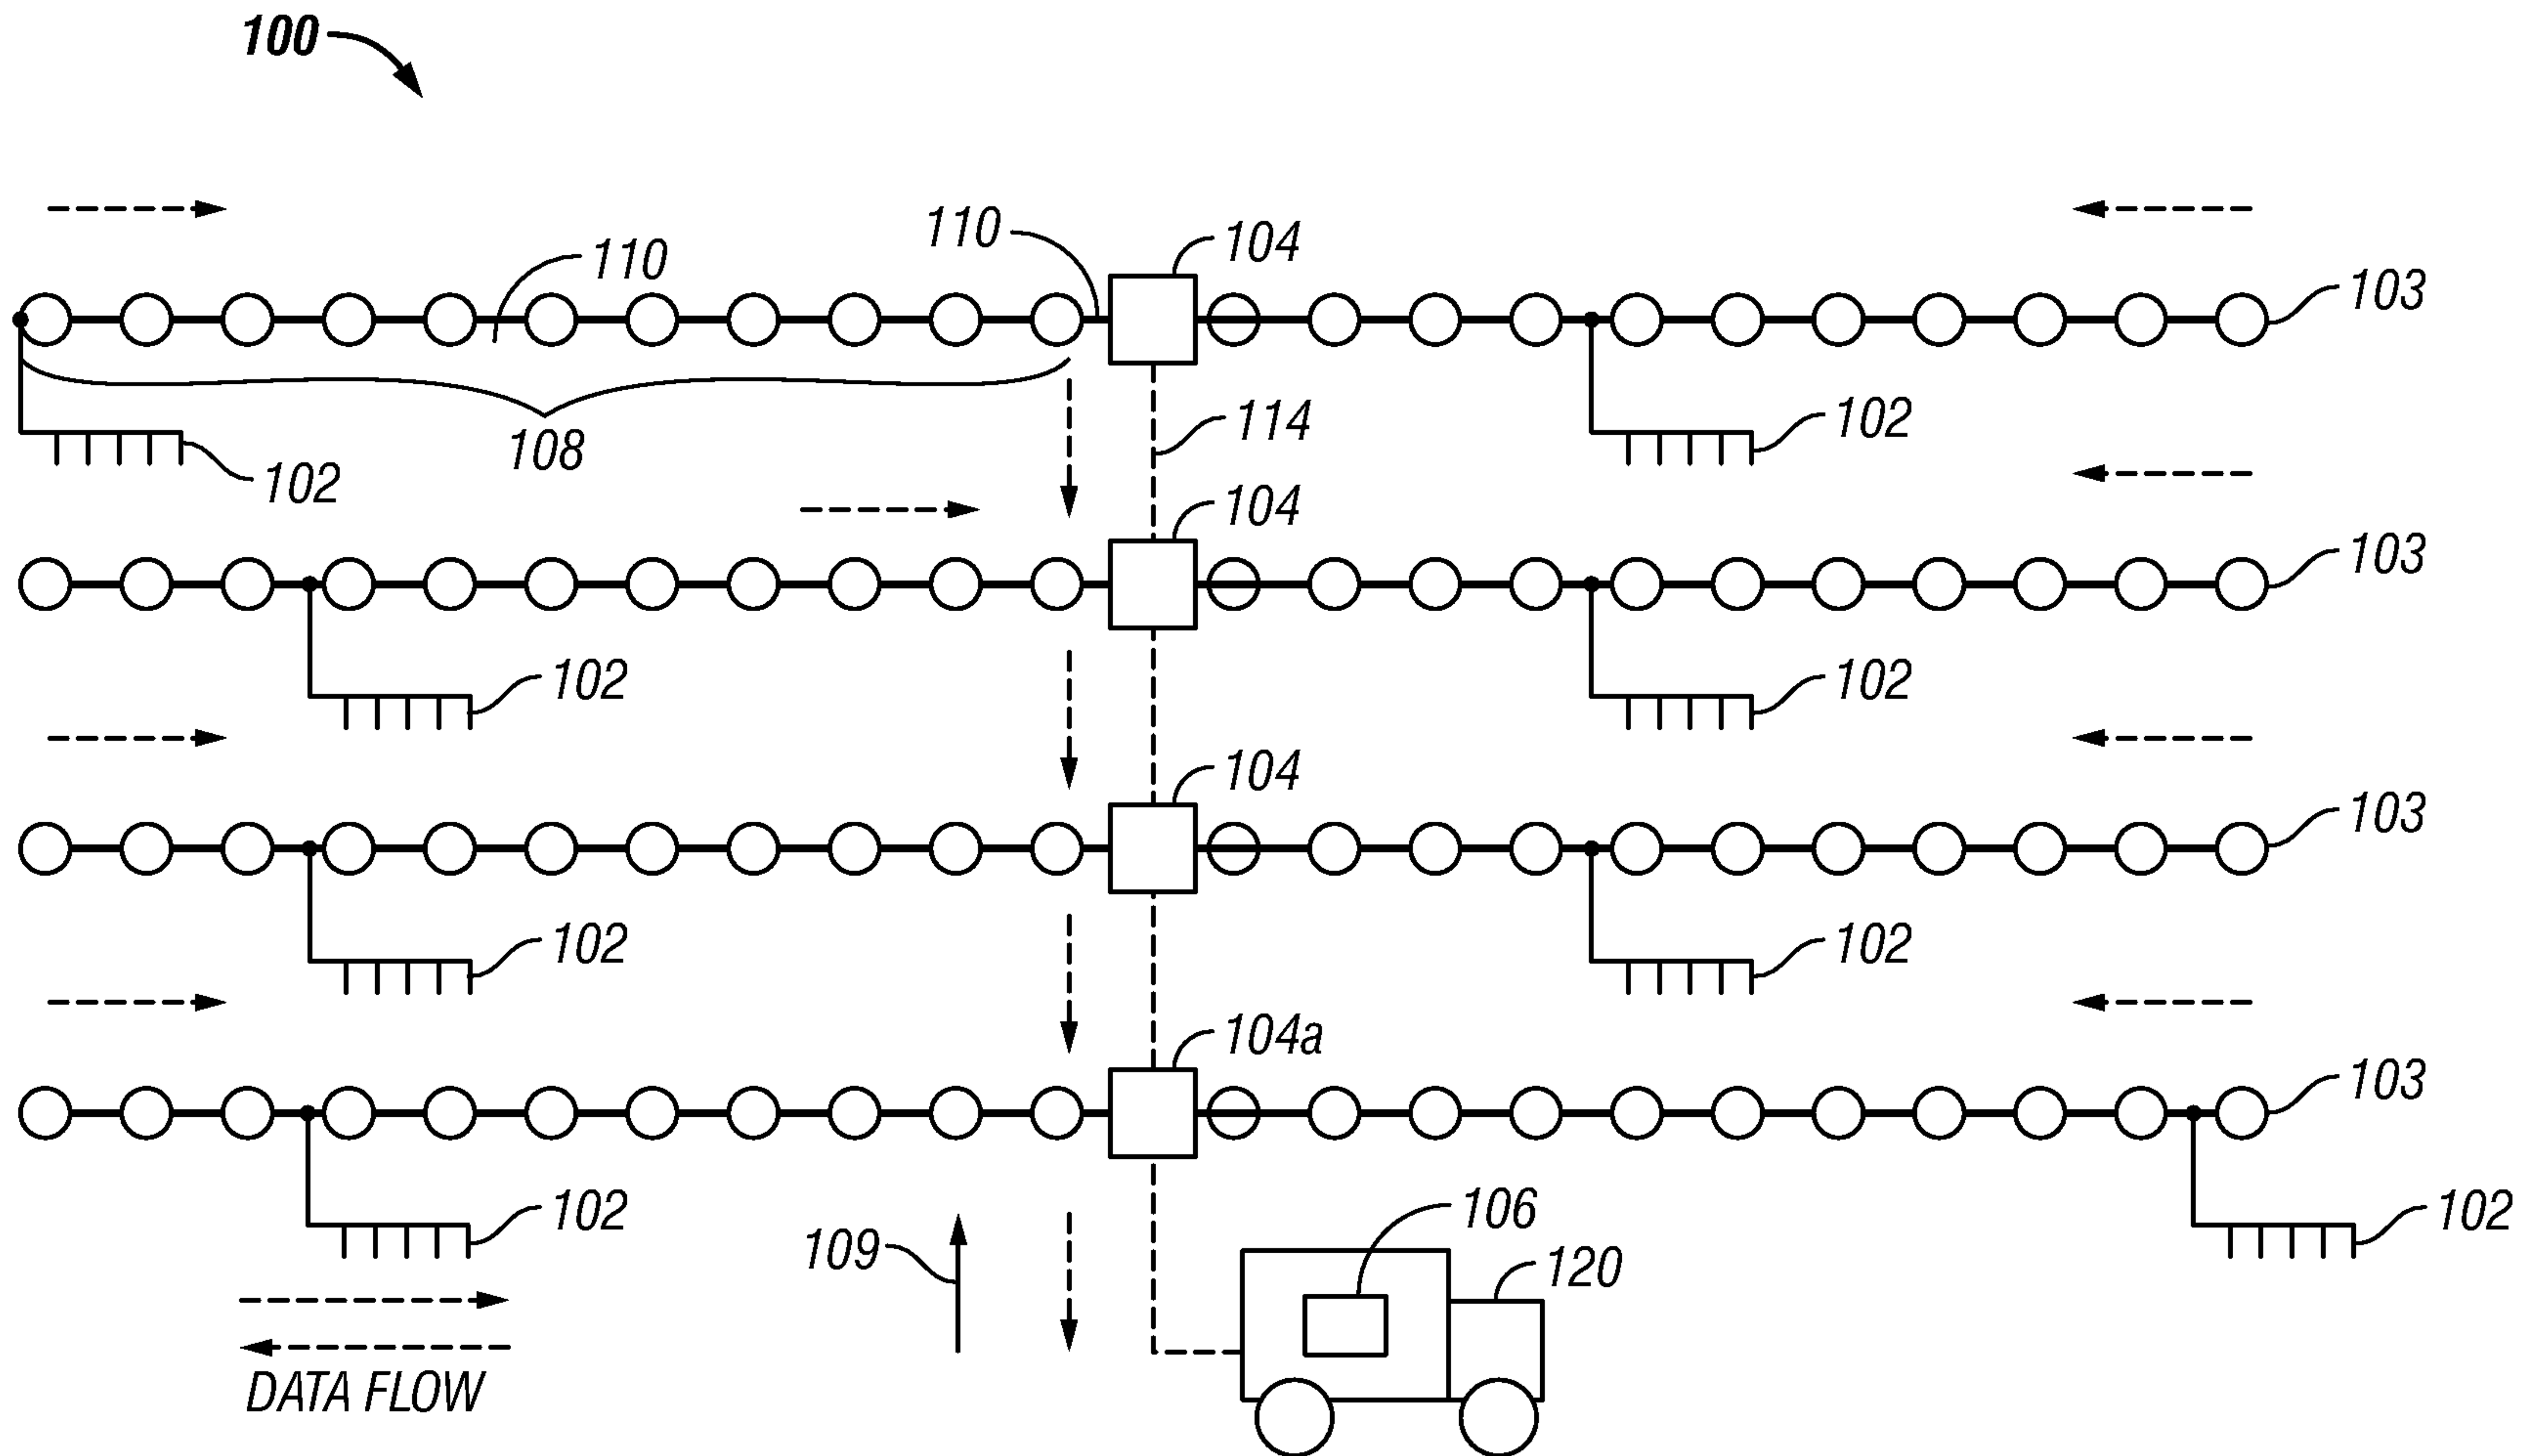


FIG. 1