PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G01J 1/04

A1

(11) International Publication Number: WO 98/29715

(43) International Publication Date: 9 July 1998 (09.07.98)

(21) International Application Number: PCT/PL97/00033

(22) International Filing Date: 29 December 1997 (29.12.97)

(30) Priority Data:
P.317746 30 December 1996 (30.12.96) PL

(71)(72) Applicant and Inventor: KUKLINSKI, Jan [PL/PL]; ul. Czarnieckiego 76 m.1, PL–01–541 Warszawa (PL).

(74) Agent: SZANIAWSKI, Jacek; Ratuszowa 11p. 640, PL–03–450 Warszawa (PL).

(81) Designated States: AU, BR, CA, CN, IL, JP, KR, MX, NO, NZ, RU, SG, TR, UA, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: OPTICAL ARRAY CONVERTING UV

(57) Abstract

An optical array containing a system of absorptive filters and a system of interference filters. For the sun light the spectral characteristics of transmission of the optical array is close to the world–wide accepted Diffey Standard. That standard models human skin sensitivity to UV burning. The invention allows making inexpensive, miniature UV sensors that can be applied in miniature devices measuring burning power of UV contained in the sun light.

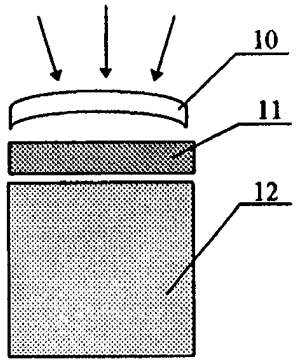

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania
AM	Armenia
AT	Austria
AU	Australia
AZ	Azerbaijan
BA	Bosnia and Herzegovina
BB	Barbados
BE	Belgium
BF	Burkina Faso
BG	Bulgaria
BJ	Benin
BR	Brazil
BY	Belarus
CA	Canada
CF	Central African Republic
CG	Congo
CH	Switzerland
CI	Côte d'Ivoire
CM	Cameroon
CN	China
CU	Cuba
CZ	Czech Republic
DE	Germany
DK	Denmark
EE	Estonia
ES	Spain
FI	Finland
FR	France
GA	Gabon
GB	United Kingdom
GE	Georgia
GH	Ghana
GN	Guinea
GR	Greece
HU	Hungary
IE	Ireland
IL	Israel
IS	Iceland
IT	Italy
JP	Japan
KE	Kenya
KG	Kyrgyzstan
KP	Democratic People's Republic of Korea
KR	Republic of Korea
KZ	Kazakstan
LC	Saint Lucia
LI	Liechtenstein
LK	Sri Lanka
LR	Liberia
LS	Lesotho
LT	Lithuania
LU	Luxembourg
LV	Latvia
MC	Monaco
MD	Republic of Moldova
MG	Madagascar
MK	The former Yugoslav Republic of Macedonia
ML	Mali
MN	Mongolia
MR	Mauritania
MW	Malawi
MX	Mexico
NE	Niger
NL	Netherlands
NO	Norway
NZ	New Zealand
PL	Poland
PT	Portugal
RO	Romania
RU	Russian Federation
SD	Sudan
SE	Sweden
SG	Singapore
SI	Slovenia
SK	Slovakia
SN	Senegal
SZ	Swaziland
TD	Chad
TG	Togo
TJ	Tajikistan
TM	Turkmenistan
TR	Turkey
TT	Trinidad and Tobago
UA	Ukraine
UG	Uganda
US	United States of America
UZ	Uzbekistan
VN	Viet Nam
YU	Yugoslavia
ZW	Zimbabwe

Optical array converting UV

This invention is an optical array converting UV radiation, especially contained in sunlight. The spectral characteristic of the transmission of the filter is similar to the sensitivity of human skin to sun burning. That sensitivity is described by the widely recognized Diffey Standard.

By now there are a few UV measuring devices based on an optical absorptive filter:

CASIO Computer Ltd. manufactures a device called "CASIO UC-120 UV", which has an optical array containing absorptive filter made of material similar to Schott UG-11 and a photodiode. The spectral characteristic of the device doesn't match the Diffey Standard. The device illuminated by sunlight is too sensitive to UV-A, that has low burning power.

US patent 5.196.705 describes a device measuring the intensity and dose of UV. The device has an optical array containing: an absorptive filter made of material similar to Schott UG-11, a photo-luminescentive material and a photodiode. The spectral characteristic of the device doesn't match the Diffey Standard. The device is too sensitive to UV-A comparing to its sensitivity to UV-B.

Description of the invention

The invention solves the problem of constructing a device equipped with an optical array converting UV, visible and IR. radiation that has the spectral characteristic of the transmission similar to the Diffey Standard.

Definition of the relative internal transmission of a set of filters:

$$T^{rel}_{int}(\lambda)=T_{int}(\lambda)/T_{int}(310) \qquad (1)$$

where:

λ	wavelength in nano-meters
$T^{rel}_{int}(\lambda)$	relative internal transmission for λ wavelength
$T_{int}(\lambda)$	internal transmission for λ wavelength
$T_{int}(310)$	internal transmission for 310nm wavelength

Note that the total internal transmission of the set of absorptive filters is equal to the product of internal transmissions of each consecutive filter.

Definition of the relative transmission of a set of filters:

$$T^{rel}(\lambda)=T(\lambda)/T(310) \qquad (2)$$

where:

λ	wavelength in nano-meters
$T^{rel}(\lambda)$	relative transmission for λ wavelength
$T(\lambda)$	transmission for λ wavelength
T(310)	transmission for 310nm wavelength

The Diffey spectral characteristics will be denoted as $D(\lambda)$ (3)

where:

λ	wavelength in nano-meters

In the first solution the array contains a system of absorptive filters to block visible and IR. radiation, a system of interference filters modifying transmission of UV and/or blocking visible and IR. radiation, scattering elements, elements forming the light beam. Interference filter/filters is/are made of layers of materials having high and low UV refractive indexes. According to the invention one of the system of interference filters has layers made of Hafnium oxide and/or Zirconium oxide. A collimator placed in the optical path forms the light beam. The collimator can have surfaces highly absorbing light. At the beginning of the optical path a scatterer is placed to achieve non-directional characteristic of the array. The scatterer can be made of PTFE.

In the second solution the array contains the first system of absorptive filters to partly block UV-A, the second system of absorptive filters to block visible and IR. radiation and may contain scattering elements and/or system/systems of interference filter/filters.

The first system of absorptive filters has internal relative transmission $T^{rel}_{int}(\lambda)$: between 0 and 0.2 for λ=290nm, between 0.34 and 0.7 for λ=300nm, between 0.5 and 0.8 for λ=320nm, between 0.04 and 0.36 for λ=330nm, between 10E-3 and 0.1 for λ=340nm, between 7*10E-6 and 0.02 for λ=350nm, between 2*10E-7 and 7*10E-3 for λ=360nm, between 2*10E-7 and 7*10E-3 for λ=370nm, between 2*10E-5 and 0.03 for λ=380nm,

between 2*10E-3 and 0.14 for λ=390nm. The total optical thickness of the first system of absorptive filters is between 0.5 and 2mm.

The second system of absorptive filters has internal relative transmission $T^{rel}_{int}(\lambda)$: between 0 and 0.3 for λ=290nm, between 0.7 and 0.8 for λ=300nm, between 1 and 1.3 for λ=320nm, between 1 and 1.4 for λ=330nm, between 1 and 1.3 for λ=340nm, between 1 and 1.12 for λ=350nm, between 0.6 and 0.8 for λ=360nm, between 0.14 and 0.3 for λ=370nm, between 10E-3 and 0.015 for λ=380nm, between 10E-10 and 10E-6 for λ=390nm. The total optical thickness of the first system of absorptive filters is between 0.5 and 10mm.

At the beginning of the optical path a scatterer is placed to achieve non-directional characteristic of the array. The scatterer can be made of PTFE. In the optical path additional system/systems of interference filters can be placed to block visible and IR. radiation and/or to modify transmission in UV range.

This invention allows producing a cheap and simple optical array with a spectral characteristics in the UV-A and UV-B range following the human skin sensitivity described by Diffey Standard. The scatterer ensures non-directional characteristics of the array. Other standards of skin sensitivity to UV-A and UV-B burning can also be easily followed.

The invention is presented on the block diagrams where Fig1 presents the construction of the version 1 of the optical array, Fig2 presents the construction of another variant of the invention presented on Fig1, Fig3 presents the construction of the version 2 of the optical array, Fig4 presents the construction of the of the version 3 of the optical array. Fig. 5 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ for optical array from Fig 2 in comparison with the Diffey Standard D(λ). Fig. 6 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ for optical array from Fig 3 in comparison with the Diffey Standard D(λ). Fig. 7 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ for optical array from Fig 4 in comparison with the Diffey Standard D(λ).

Description of the version 1.

The array contains: the layer 1 that scatters light, a collimator 2, an absorptive filter 3 that makes a system of absorptive filters, a set of interference filters 4 that makes a system of interference filters. The absorptive filter 3 is made of material transparent to UV and blocking visible and IR. radiation. That property has M1 material, with a characteristics presented in the table below.

In that example a scatterer 1 is made of PTFE, and the absorptive filter 3 is a plano-parallel plate, 8mm thick, made of M1 material Schott UG-11 like. The set of interference filters 4 that is placed on the absorptive filter's 3 surface consists of 38 layers of Hafnium oxide and/or Zirconium oxide and Silica oxide.

The scatterer 1 ensures non-directional characteristics of the array. The collimator 2 forms the light beam. To achieve desired spectral characteristics the light beam passes through the absorptive filter 3 and the interference filter 4.

In the other variant of the version 1, that is shown on the Fig 2, the array contains: the layer 5 that scatters light, a collimator 6, absorptive filter 7 that makes a system of absorptive filters and a first set of interference filters 8 and a second set of interference filters 9 that both make a system of interference filters. The absorptive filter 7 is made of material transparent to UV and blocking visible and IR. radiation. That property has M1 material, with a characteristics presented in the table below.

In that example a scatterer 5 is made of PTFE, and absorptive filter 7 is a plano-parallel plate, 8mm thick, made of M1 material, Schott UG-11 like. The first set of interference filters 8 and the second set of interference filters 9 are placed on the absorptive filter's 7 surfaces and together consists of 62 layers of Hafnium oxide and/or Zirconium oxide and Silica oxide.

The scatterer 5 ensures non-directional characteristics of the array. The collimator 6 forms the light beam. To achieve desired spectral characteristics the light beam passes through the first interference filter 8, the absorptive filter 7 and the second interference filter 9.

On the Fig 5 chart the $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ characteristics of the array is plotted as a broken line, the Diffey Standard is plotted as a solid line. On the chart these two curves are close to each other in the 310-325nm range.

Description of the version 2.

The array contains: the layer 10 that scatters light, a first absorptive filter 11 that makes a first system of absorptive filters, a second absorptive filter 12 that makes a second system of absorptive filters. The first absorptive filter 11 is made of material transparent to UV with decreasing transmission when the wavelength is changed from 320 to 350nm, the second absorptive filter 12 is made of material transparent to UV and blocking visible and IR. radiation. That property have materials M2 and M1 respectively, with characteristics presented in the table below.

In that example a scatterer 10 is made of PTFE, the first absorptive filter 11 is a plano-parallel plate, 1.5mm thick, made of M2 material, Schott GG-19 like, the second absorptive filter 12 is a plano-parallel plate, 8 mm thick, made of M1 material, Schott UG-11 like.

The scatterer 10 ensures non-directional characteristics of the array. To achieve desired spectral characteristics the light beam passes through the first absorptive filter 11 and the second absorptive filter 12.

On the Fig 6 chart $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ characteristics of the array is plotted as a broken line, the Diffey Standard is plotted as a solid line.

Description of the version 3.

The array contains: a first absorptive filter 13 that makes a first system of absorptive filters, a second absorptive filter 14 that makes a second system of absorptive filters and a first set of interference filters 15 and a second set of interference filters 16 that both make a system of interference filters. The first absorptive filter 13 is made of material transparent to UV with decreasing transmission when wavelength is changed from 320 to 350nm, the second absorptive filter 14 is made of material transparent to UV and blocking visible and IR. radiation. That property have materials M2 and M1 respectively, with characteristics presented in the table below. Interference filters are constructed to block visible and IR. radiation and/or to modify transmission characteristics in UV.

In that example the first absorptive filter 13 is a plano-parallel plate, 1.5mm thick, made of M2 material, Schott GG-19 like. The second absorptive filter 14 with interference filters 15, 16 placed on the filter 14 surfaces are made together by Schott as Schott DUG-11 filter.

To achieve desired spectral characteristics the light beam passes through the first absorptive filter 13, the first interference filter 15, the second absorptive filter 14 and the second interference filter 16.

On the Fig 7 chart $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ characteristics of the array is plotted as a broken line, the Diffey Standard is plotted as a solid line.

TABLE of relative internal transmission $T^{rel}_{int}(\lambda)$

λ [nm]		290	300	310	320	330	340	350
M1 glass, 8 mm thick	minimal value	0	0.7	1	1.0	1.0	1.0	1.0
	maximal value	0.3	0.8	1	1.3	1.4	1.3	1.12
M2 glass, 1.5 mm thick	minimal value	0	0.34	1	0.5	0.04	10E-3	7*10E-6
	maximal value	0.2	0.7	1	0.8	0.36	0.1	0.02

λ [nm]		360	370	380	390
M1 glass, 8 mm thick	minimal value	0.6	0.14	10E-3	10E-10
	maximal value	0.8	0.3	0.015	10E-6
M2 glass, 1.5 mm thick	minimal value	2*10E-7	2*10E-7	2*10E-5	2*10E-3
	maximal value	7*10E-3	7*10E-3	0.03	0.14

Data in tables above are $T^{rel}_{int}(\lambda)$ characteristics of plano-paralel plates made of M1, M2 with given thickness.

The exact values of $T^{rel}_{int}(\lambda)$ are described in the example constructions. These data are example values and it is obvious that the invention is not restricted to them.

The optical array in the example constructions has the spectral characteristics similar to human skin sensitivity to UV contained in sunlight. Fig. 5 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ chart for optical array from Fig 2 in comparison with the Diffey Standard $D(\lambda)$. Fig. 6 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ chart for optical array from Fig 3 in comparison with the Diffey Standard $D(\lambda)$. Fig. 7 presents $T^{rel}(\lambda)*D(310)/T^{rel}(310)$ chart for optical array from Fig 4 in comparison with the Diffey Standard $D(\lambda)$. The biggest discrepancies between the characteristics and the Diffey Standard are for UV-C that is absent in sunlight and UV-A that has a minimal burning power comparing with total burning power of sun UV.

Claims

What is claimed is:

1. The optical array converting UV, visible and IR. radiation, especially contained in sunlight, with a spectral characteristics following the Diffey Standard comprising a system of absorptive filters to block visible and IR. radiation, a system of interference filters to modify transmission characteristics in the UV range and/or to block visible and IR. radiation, scattering elements and elements to form light beam. The interference filter is made of layers of high and low refractive indexes for UV light and some interference layers in the systems of interference filters (4), (8), (9) are made of Hafnium oxide and/or Zirconium oxide.
2. The array in claim 1 with the system of absorptive filters (3), (7) which internal transmission for a given wavelength divided by the internal transmission of that second system for 310nm light are: between 0 and 0.3 for λ=290nm, between 0.7 and 0.8 for λ=300nm, between 1 and 1.3 for λ=320nm, between 1 and 1.4 for λ=330nm, between 1 and 1.3 for λ=340nm, between 1 and 1.12 for λ=350nm, between 0.6 and 0.8 for λ=360nm, between 0.14 and 0.3 for λ=370nm, between 10E-3 and 0.0015 for λ=380nm, between 10E-10 and 10E-6 for λ=390nm.
3. The array in claim 1 comprising a scatterer (1), (5) at the beginning of the optical path to achieve non-directional characteristics of the array.
4. The array in claim 3 comprising the scatterer made of PTFE.
5. The array in claim 1 comprising a collimator (2), (6) placed in the optical path to form the light beam passing through the array. The collimator surface could be highly absorptive to the light.
6. The optical array converting UV, visible and IR. radiation, especially contained in sunlight, with a spectral characteristics following the Diffey Standard comprising a first system of absorptive filters to partly block UV-A light, a second system of absorptive filters to block visible and IR. radiation and optionally scattering elements and/or system/systems of interference filters. The internal transmission of the first system of absorptive filters divided by the internal transmission of that first system for 310nm light are: between 0 and 0.2 for λ=290nm, between 0.34 and 0.7 for λ=300nm, between 0.5 and 0.8 for λ=320nm, between 0.04 and 0.36 for λ=330nm, between 10E-3 and 0.1 for λ=340nm, between 7*10E-6 and 0.02 for λ=350nm, between 2*10E-7 and 7*10E-3

for λ=360nm, between 2*10E-7 and 7*10E-3 for λ=370nm, between 2*10E-5 and 0.03 for λ=380nm, between 2*10E-3 and 0.14 for λ=390nm.

7. The array in claim 6 with total optical thickness of the first system of absorptive filters (11), (13) between 0.5 and 2mm.

8. The array in claim 6 with the second system of absorptive filters (12), (14) which internal transmission for a given wavelength divided by the internal transmission of that second system for 310nm light are: between 0 and 0.3 for λ=290nm, between 0.7 and 0.8 for λ=300nm, between 1 and 1.3 for λ=320nm, between 1 and 1.4 for λ=330nm, between 1 and 1.3 for λ=340nm, between 1 and 1.12 for λ=350nm, between 0.6 and 0.8 for λ=360nm, between 0.14 and 0.3 for λ=370nm, between 10E-3 and 0.015 for λ=380nm, between 10E-10 and 10E-6 for λ=390nm.

9. The array in claim 6 with total optical thickness of the second system of absorptive filters (12), (14) between 0.5 and 10mm.

10. The array in claim 6 comprising a scatterer at the beginning of the optical path to achieve non-directional characteristics of the array.

11. The array in claim 10 comprising the scatterer made of PTFE.

12. The array in claim 6 comprising additional interference filter/filters (15), (16) to block visible and IR. radiation and/or to modify a transmission characteristics in the UV range.

13. The array in claim 12 comprising layers made of Hafnium oxide and/or Zirconium oxide as elements of the set of interference filters (15), (16).



Fig. 1

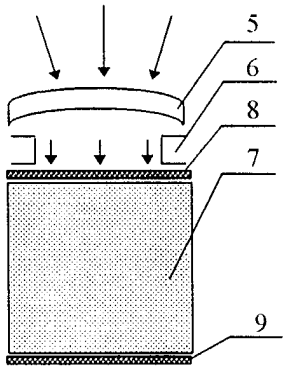

Fig. 2

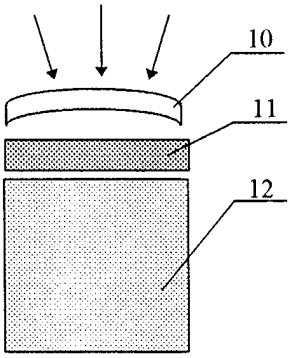

Fig. 3



Fig. 4

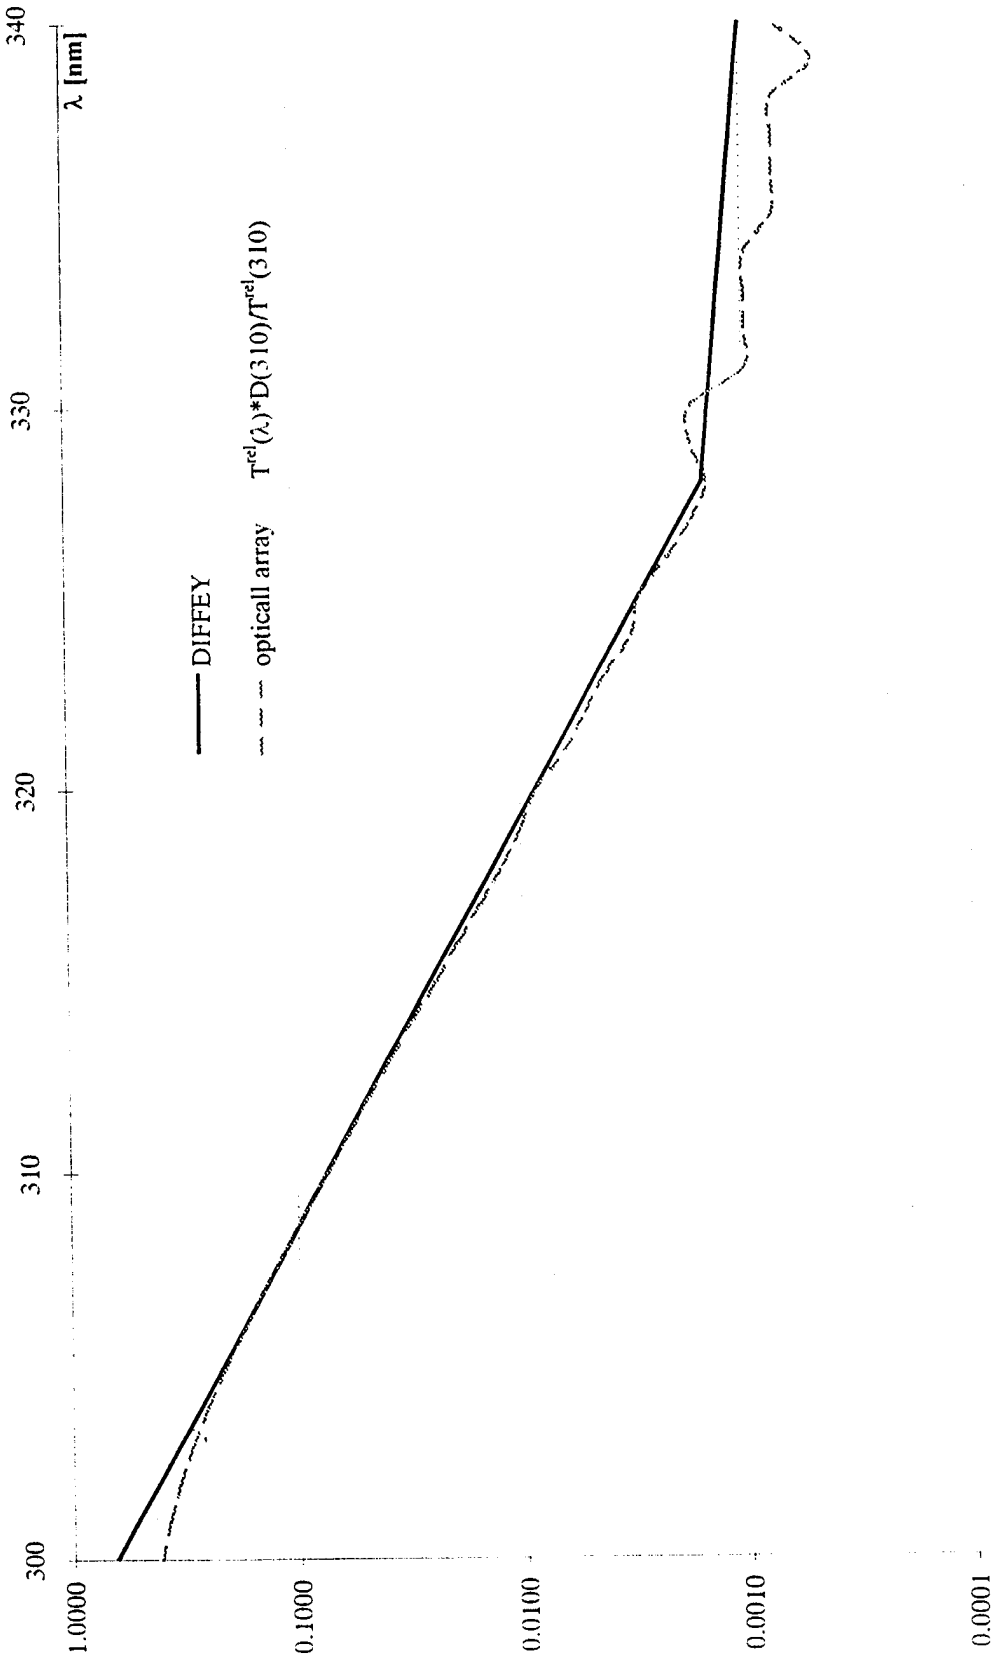
1.0000
0.1000
0.0100
0.0010
0.0001
300
310
320
330
340
λ [nm]
DIFFEY
opticall array
$T^{rel}(\lambda)*D(310)/T^{rel}(310)$

Fig. 5

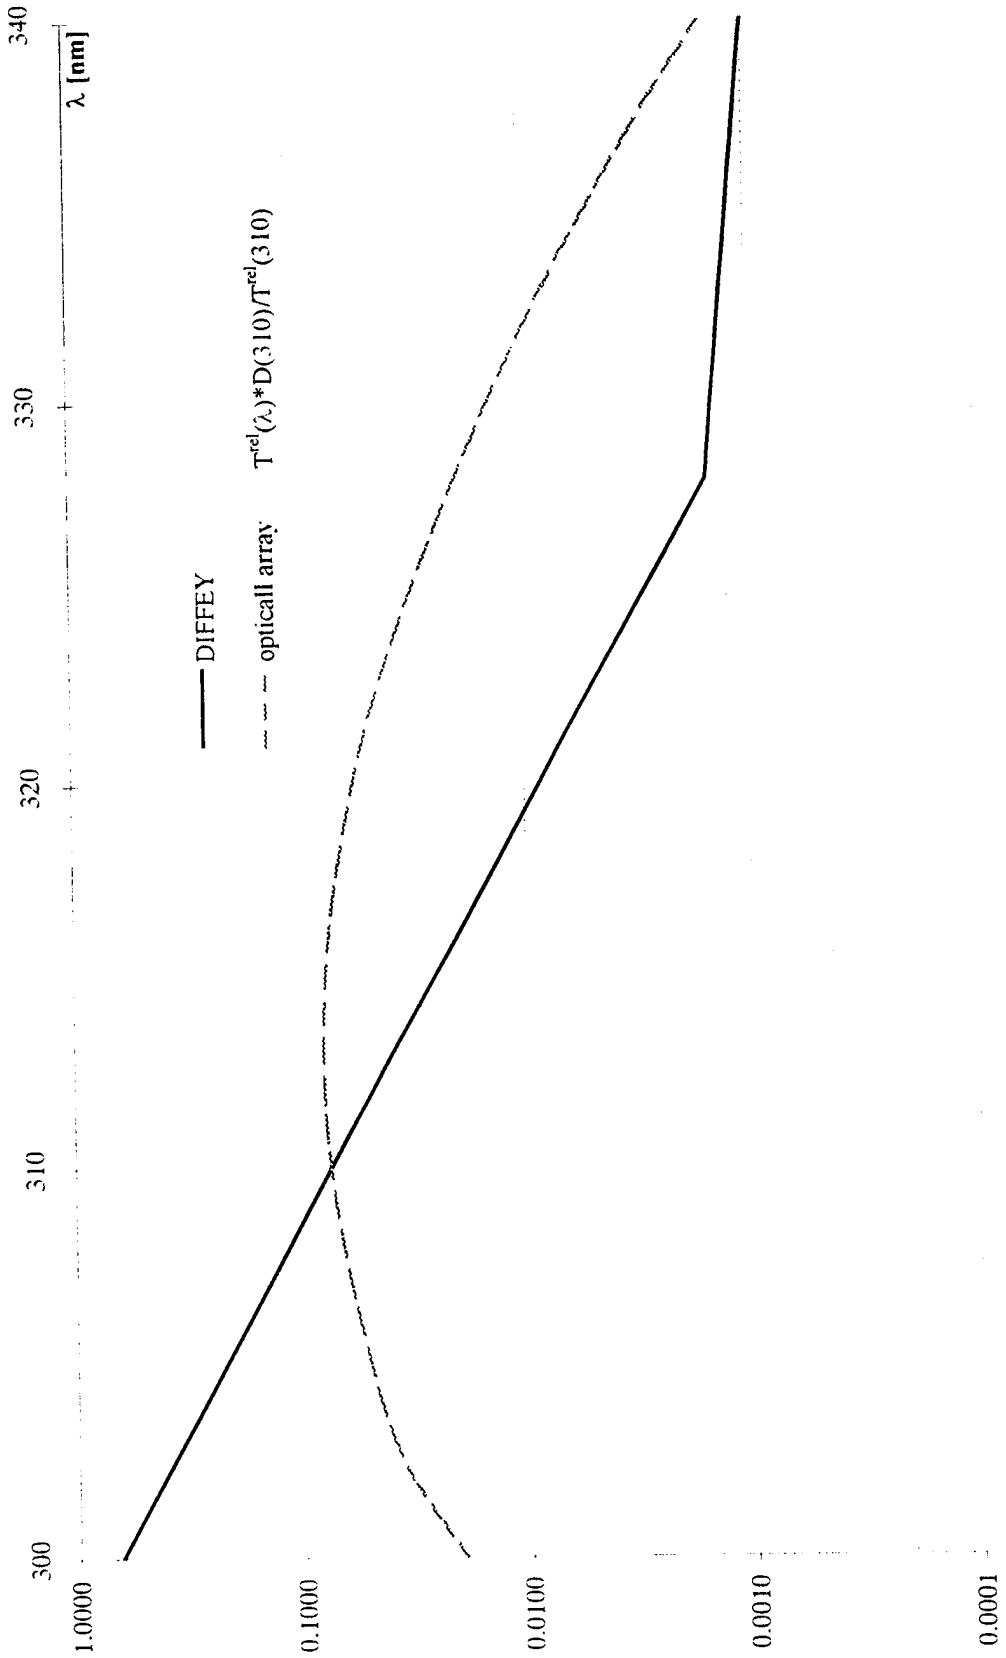
300
310
320
330
340
λ [nm]
1.0000
0.1000
0.0100
0.0010
0.0001
DIFFEY
optical array
$T^{rel}(\lambda)*D(310)/T^{rel}(310)$

Fig. 6

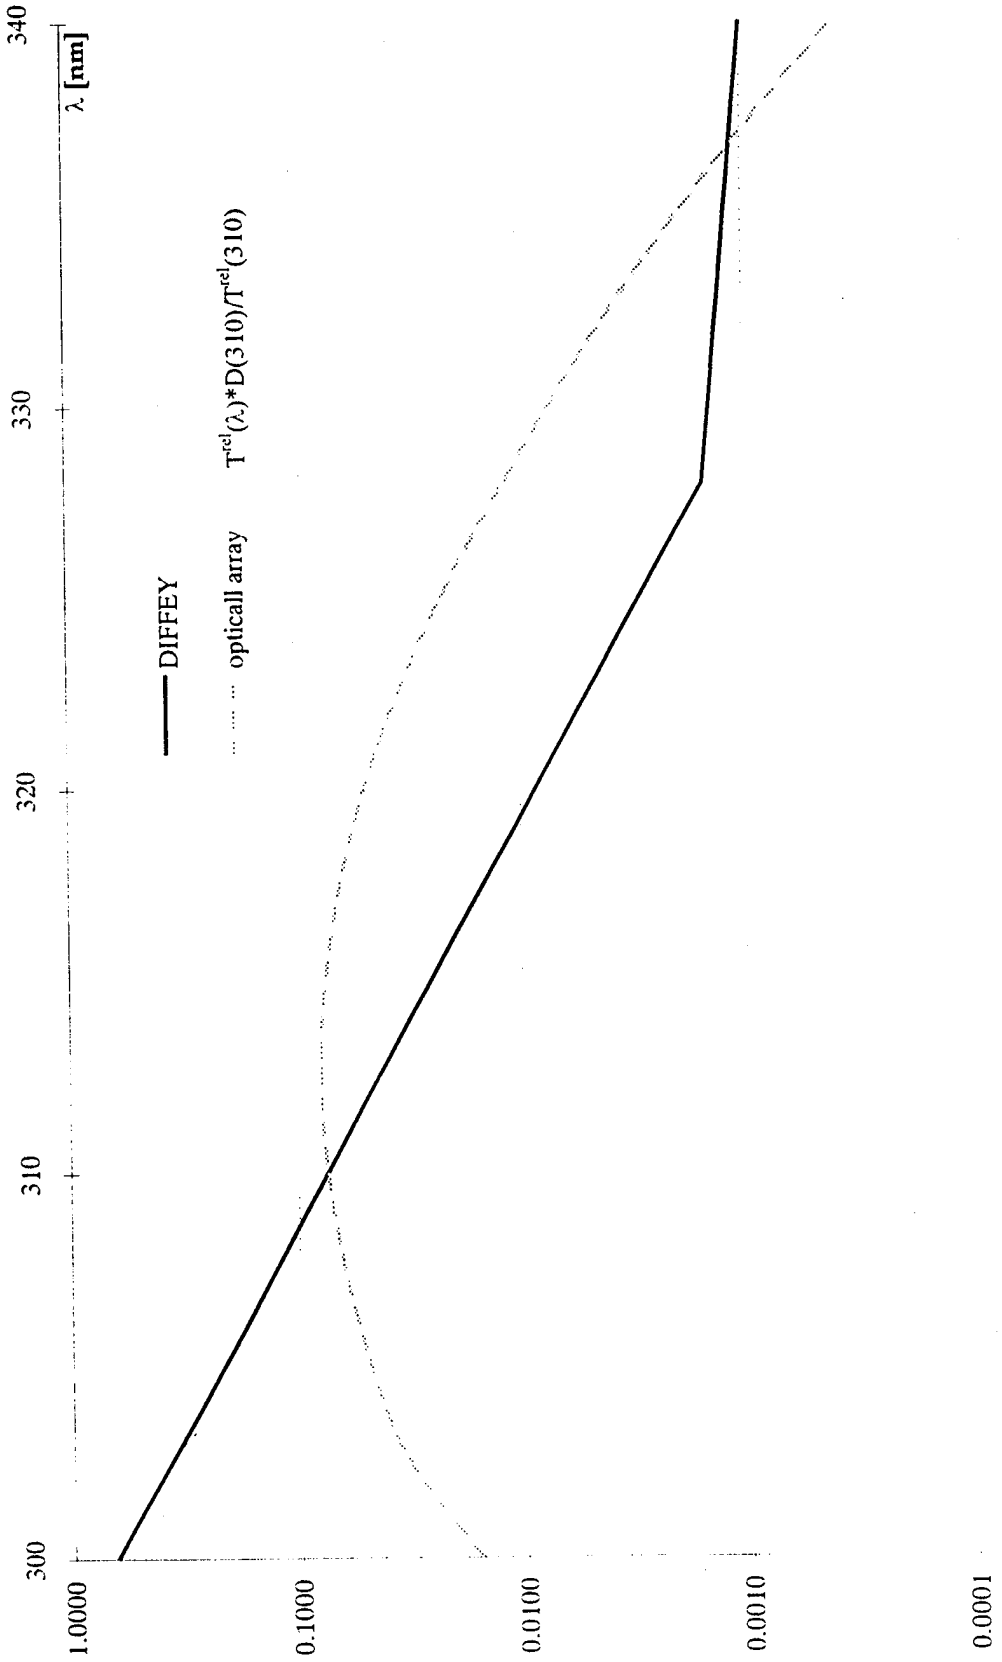
DIFFEY
opticall array
$T^{rel}(\lambda)*D(310)/T^{rel}(310)$
300
310
320
330
340
λ [nm]
1.0000
0.1000
0.0100
0.0010
0.0001

Fig. 7

INTERNATIONAL SEARCH REPORT

Inte onal Application No
PCT/PL 97/00033

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01J1/04

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 036 311 A (MORAN DAN ET AL) 30 July 1991 see column 2, line 8 - line 13 see column 4, line 37 - line 61 see claims 1-4; figures 1,2,7 ---	1-13
A	US 5 401 970 A (KINSEY JAMES H ET AL) 28 March 1995 see column 3, line 16 - line 35 see column 4, line 3 - line 7 see column 5, line 48 - column 6, line 9 see figures 1,7 ---	1-13
A	WO 90 10201 A (SAITEK LTD) 7 September 1990 cited in the application see page 8, line 23 - line 36 see claims 1-5; figure 1 -----	1-13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
14 May 1998	27/05/1998

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Klocke, S

1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/PL 97/00033

Patent document cited in search report		Publication date	Patent family member(s)			Publication date
US 5036311	A	30-07-1991	NONE			
US 5401970	A	28-03-1995	AU	7829194	A	03-04-1995
			WO	9508100	A	23-03-1995
WO 9010201	A	07-09-1990	AU	5151890	A	26-09-1990
			CA	2047734	A	25-08-1990
			EP	0460019	A	11-12-1991
			JP	4505363	T	17-09-1992
			US	5196705	A	23-03-1993