




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A47C 20/08	A1	(11) International Publication Number: WO 00/51469 (43) International Publication Date: 8 September 2000 (08.09.00)
(21) International Application Number: PCT/NO00/00071 (22) International Filing Date: 29 February 2000 (29.02.00) (30) Priority Data: 19990983 1 March 1999 (01.03.99) NO (71)(72) Applicant and Inventor: ALVESTAD, Kjartan [NO/NO]; N-6222 Ikornes (NO). (74) Agent: ONSAGERS AS; P.O. Box 265 Sentrum, N-0103 Oslo (NO).	(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report. In English translation (filed in Norwegian).	

(54) Title: ARRANGEMENT FOR BEDS AND OTHER RECLINING OR SEATING FURNITURE

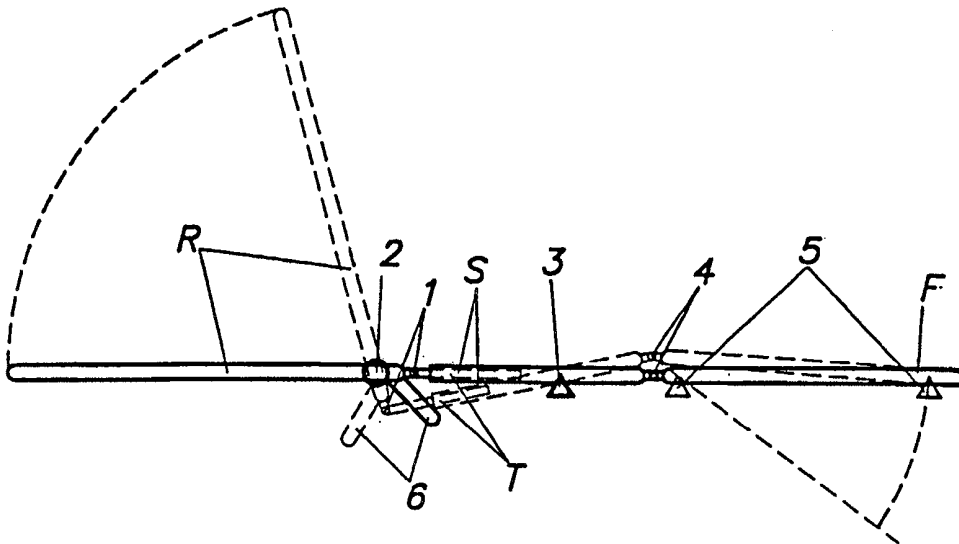

(57) Abstract

In an adjustable arrangement for reclining or seating furniture, where the furniture has two or more mutually adjustable articulated members (R, S, F), which together form an adjustable frame for support of a mattress, cushion, upholstery or the like, where the adjustable frame is mounted in a support member (A) by means of horizontal axles/dowels, stays/sliding elements or the like, which constitute fulcrums (2, 3, 5) for the mutually adjustable, articulated members (R, S, F), where the back member (R) has a fixed fulcrum (2) in relation to the support member (A), located at a distance from the linkage (1) to the seat member, and where the adjustment of the furniture's respective articulated members is performed by means of a spring mechanism (17) which is arranged between an arm (6) on the underside of the back member (R) and a point on the support member (A), the furniture's seat member (S) is designed with an extension member (T, 8, 12), preferably arranged between the seat member and the back member.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Arrangement for beds and other reclining or seating furniture

The invention concerns an adjustment arrangement for reclining or seating furniture, wherein the piece of furniture has two or more adjustable, articulated members, which together form an adjustable frame for support of a mattress, cushion, upholstery or the like, where the adjustable frame is mounted in a support member by means of horizontal axles/dowels/stays/sliding elements or the like, which constitute fulcrums for the mutually adjustable, articulated members, where the back member has a fixed fulcrum in relation to the support member, located at a distance from the linkage to the seat member, and where the adjustment of the furniture's respective articulated parts is performed by means of a spring mechanism which is provided between an arm on the bottom of the back member and a point on the support member.

The terms reclining or seating furniture describe all types of furniture where it may be appropriate to adjust the user position, e.g. a bed, chaise longue, divan, bench, sofa, chair, etc. The furniture frame, composed of articulated parts, which forms the support for the furniture's upholstery, arrangement of cushions, a mattress or the like, is mounted in a support member, which may be a side member, gable, frame or other fixed components. The terms furniture, frame, support member are used in the following and in the patent claims are based on these definitions. In this connection it should also be noted that the support for the mattress, cushions etc. will naturally also form the support for the user of the furniture.

There are previously known a great number of different designs of adjustable reclining or seating furniture. Examples of such articulated designs can be found in the applicant's international patent applications nos. WO97/37567, WO98/37792 and WO98/37791. Articulated furniture of this kind is widely used within the health sector, e.g. in connection with hospital beds, but is also employed to an ever-increasing extent as ordinary furniture. The adjustments of the furniture's parts to the various user positions may be performed by motor power, which may be electrically, hydraulically or pneumatically driven. Other possibilities are mechanical operation via adjusting levers, or by the user taking hold of a part of the furniture and moving it by hand.

The present invention concerns adjustable reclining or seating furniture in which it should be possible to perform the adjustment entirely without or with minimal help from external power sources, i.e. without any kind of motor power whatever, while at the same time it should be possible to perform the adjustment of the furniture with a minimal exercise of force, directly by the user while he is reclining/sitting on the piece of furniture. Thus it should be possible to perform a readjustment of the furniture, e.g. from a reclining position to a sitting position and back or to assume intermediate positions, essentially by the user simply performing a "natural movement", with the result that the furniture "follows" when the user readjusts from one position to the other.

In Norwegian patent application no. 970950 an example of this type is described, where a spring mechanism, e.g. a gas spring is adapted in such a manner that a user can alter the angular position between back member, seat member and possibly foot member merely by leaning forward or back against the back member. The furniture can be locked in the desired position by locking the spring mechanism.

When this furniture is used with a cover such as a mattress, in the area between the seat and the back a "compression" will be formed, where the mattress is shifted by a displacement of the seat member, thus producing a certain amount of additional resistance from the mattress, which also has to be overcome.

This can lead to a rather uneven resistance which has to be overcome with the result that the user has to use more force in certain positions.

The object of the present invention is to avoid this problem and provide an embodiment of a piece of furniture of the type mentioned in the introduction, which offers less mattress resistance and thereby a more uniform exercise of force for the user over the area of movement of the whole piece of furniture.

This is achieved with an arrangement of the type mentioned in the introduction, which is characterized by the features presented in the patent claims.

By simple means the invention offers the advantage that the seat member can also be rotated about a fixed axis point, possibly with only a small lateral

movement, with the result that the mattress's resistance to a change in shape does not affect the movement. In addition the user will also move to a minimal extent in the furniture's longitudinal direction during adjustment, thereby also reducing the requirement for adjustment force. During
5 adjustment the mattress's seat and foot members will thereby be able to remain almost at rest on the adjustment system's approximately immovable seat and foot members on account of, among other things, the user's weight and material friction. The seat member's extension enables the mattress's back portion to bend about the mattress's own almost stationary seat and foot
10 members, thereby only "inching" to a minimal extent in the furniture's longitudinal direction during adjustment.

It will hereby be possible to alter the angle between the back and seat members between 180° and up to approximately 90° while the angle between the seat and foot members may be altered between 180° and up to
15 approximately 220° .

The inventive concept is based on the fact that the seat member is equipped with an extension member which is particularly advantageously arranged between the seat member and the back member. In its simplest form this extension is designed as a rod extension, which is telescopically movable in a
20 tube member of the seat member's frame. The telescopic extension may in itself be a gas spring or an electrical actuator. However, the invention also includes other types of devices for achieving the desired extension, e.g. the extension member may be in the form of a scissors member or a rod which is movable in a guide track on an arm on the bottom of the back member. All
25 such embodiments are intended to fall within the term extension member.

The invention will now be explained in more detail by means of the embodiment which is illustrated in the drawing, in which:

fig. 1 is a schematic side view of the principles of the present invention in a first embodiment of a piece of reclining furniture,

30 figs. 2a-2b are an enlarged part view illustrating two positions of the embodiment in fig. 1,

fig. 3 is a view corresponding to fig. 1, also illustrating the balancing spring mechanism,

fig. 4 is a part view on an enlarged scale of fig. 3 illustrating various positions in connection with the invention,

figs. 5a-5b are a part view of an illustration of a second embodiment of the invention in two alternatives,

5 figs. 6a-6b are a corresponding view of a third embodiment of the invention.

The illustrations in the figures are based on an adjustable frame with articulated parts, based on the principles which are described in Norwegian patent application no. 961441 and equipped with a balancing mechanism of the type which is described in application 970950. Details regarding the
10 design of the adjustable piece of furniture and the balancing mechanism are found in the two above-mentioned patent applications.

The furniture's adjustable frame is composed of a back member R, a seat member S and a foot member F. It is also possible to employ the invention on a frame consisting of only two parts, e.g. R and S, or also a frame consisting
15 of more than three parts.

The fulcrums for the three frame members illustrated in the drawing are designated 2, 3 and 5 respectively, while the linkages between back member and seat member and between seat member and foot member respectively are designated 1 and 4. In figures 3 and 4 the frame's support member A is
20 indicated by a dash and dot line. In the area between the back member's fulcrum 2 and the linkage to the seat member S there is provided a downwardly projecting arm 6 which is securely connected with the back member R. This arm forms one of the mountings for the spring mechanism described in international patent application no. WO98/37791, which is
25 omitted in figures 1 and 2. In figs. 3 and 4 this spring mechanism in the form of a gas spring is illustrated, but is not described in more detail since the description from the said international patent application is included as a reference. According to a first embodiment of the present invention, in the seat member's frame structure there is inserted a telescopic extension tube,
30 which is designated by T in the drawing. This extension tube T extends from the articulation point 1 and is passed in a tubular element on the seat member S. As illustrated by a dot-dash line the back member R can be raised to a sitting position, thereby causing a rotation of the seat member about the fulcrum 3 which in the illustrated embodiment is a fixed fulcrum. By means

of this movement the telescopic rod T will be extended, causing an extension of the seat member. A mattress lying on this frame will thereby remain at rest and will only sink down according to the new frame position. Figs. 2a and 2b illustrate this design in an enlarged view.

5 Figs. 3 and 4 illustrate in a more complete way the principles for a piece of furniture designed with arrangements according to the invention. Also illustrated here is the position of the balancing cylinder 17 which is attached between a point 14 on the arm 6 and a point on the frame A, which is designated 15 from where an arm can extend to an attachment point 16. Here
10 the gas spring will balance the force which is required for adjustment between the extended position and the position illustrated by a broken line. The movements of the foot member are not described in more detail, since this movement and design do not form part of the present invention, but are described in one of the initially mentioned international patent applications
15 WO97/37567, WO98/37792 and WO98/37791.

Figs. 5a and 5b illustrate a variant of the first embodiment, where instead of using a telescopic extension member, an extension member is employed which works according to the scissors principle. In this embodiment an articulated mechanism 8 is used consisting of two arms, connected to back
20 member R at point 1 and to the seat member S at point 7. In order to stabilise the articulated arm mechanism 8, an elastic joint 10 is inserted between points 1 and 7 to control the movement. Fig. 5b illustrates the mode of operation for this embodiment.

Alternatives illustrated include a double scissors, where the articulated arm
25 mechanism 8 also has a symmetrical part 8' in the opposite direction, where the joints are connected with one another at point 9'. In this case the elastic joint 10 may be omitted. In a part view there is also illustrated a simplified design, where there is inserted between the back member R and the seat member S a rigid rod element 18 which is rotatable about points 1 and 7,
30 thereby constituting a similar movement arrangement to that in fig. 5a. This design, however, will provide larger angular movements and preferably also exploit a certain amount of horizontal movement of the fulcrum 3.

Figs. 6a and 6b illustrate a third embodiment, where rotatable articulated arms are also employed. In this case an arm is provided in the end portion of

the back member R and this arm is equipped with a guide track 20. The rotatable articulated arm 19 which leads from point 7 to point 1 will here lead to a controlled extension of the seat member S when the articulated arm's connection point 1 is moved in the track 20. It should be pointed out that this arm will be in addition to the previously mentioned arm 6 for the spring mechanism, the arm 6 advantageously being mounted in the central portion of the frame.

The invention may be designed in many different ways, as illustrated in the embodiments, and it will also be within the scope of the invention if the extension is not undertaken in the end portion of the seat member, but, e.g., in an area located within the end portion, possibly in the portion which is connected to the foot member. The latter variant will require the fulcrum 3 to have a certain amount of movement, while the fulcrum of the foot member can be fixed. In all the embodiments the proposed extension can be combined with a certain amount of horizontal movement of the fulcrum 3 in order to achieve a desired special pattern of rotation of the parts relative to one another.

In all the embodiments it will be possible to alter the angle between the back and seat members between 180° and up to approximately 90° while the angle between the seat and foot members may be altered between 180° and up to approximately 220° .

PATENT CLAIMS

1. An adjustable arrangement for reclining or seating furniture, wherein the piece of furniture has two or more mutually adjustable, articulated members (R, S, F), which together form an adjustable frame for support of a mattress, cushion, upholstery or the like, where the adjustable frame is mounted in a support member (A) by means of horizontal axles/dowels/stays/sliding elements or the like, which constitute fulcrums (2, 3, 5) for the mutually adjustable, articulated members (R, S, F), where the back member (R) has a fixed, immovable fulcrum (2) in relation to the support member (A), located at a distance from the linkage (1) to the seat member,
- characterized by the combination of the following features:
- a) that the seat member's fulcrum (3) or possibly the foot member's fulcrum (5) is immovable and securely attached to the support member's (A) suspension point (12 or 13),
- b) that the fulcrum (3 or 5) which is not immovable and securely attached to the support member (A) moves forwards and backwards in the furniture's longitudinal direction in sliding elements/sliding tracks (12 or 13) on the support member (A),
- c) that there is provided an extension member (T, 8, 18, 19) on the furniture between the seat member (S) and the back member (R) which permits the angle between the back and seat members (R, S) to be altered between 180° and up to approximately 90° while the angle between the seat and foot members (S, F) may be altered between 180° and up to approximately 220°, and
- d) that there is provided a spring mechanism, e.g. a gas spring or a motorised actuator (17) in a known per se manner between an arm (6) on the bottom of the back member (R) and a point on the support member (A) in order to neutralise and/or overcome the forces which at any time influence the adjustable frame's various connected levers when the user is seated in the piece of furniture, in order thereby to be able to move the adjustable frame from one position to another when the user is seated in the piece of furniture.
2. An arrangement according to claim 1,
- characterized in that the extension member is composed of at least one telescopic rod.

3. An arrangement according to claim 1,
characterized in that the extension member is composed of a single scissors
mechanism (8, 9, 10) on the bottom of the back/seat member and connected
to the ends of the back member (R) and the seat member (S) which are facing
each other.
4. An arrangement according to claim 1,
characterized in that at least one rod element (12) on the seat member (S) is
passed in a track (13) in an arm on the bottom of the back member (R).
5. An arrangement according to claim 1,
characterized in that the telescopic extension is provided in the area between
the end point of the back member and the fulcrum (3) of the seat member (S).
6. An arrangement according to claim 1,
characterized in that the seat member's fulcrum (3) or the foot member's
fulcrum (5) is securely attached to the support member.
7. An arrangement according to claim 1,
characterized in that the extension member is provided in the foot end of the
seat member, the seat member's fulcrum being movable, but the foot
member's fulcrum being fixed.
8. An arrangement according to claim 1,
characterized in that the telescopic extension member is composed of a gas
spring or electrical actuator.
9. An arrangement according to claim 1,
characterized in that the telescopic extension member is controlled by an
electrical actuator.

Fig. 1

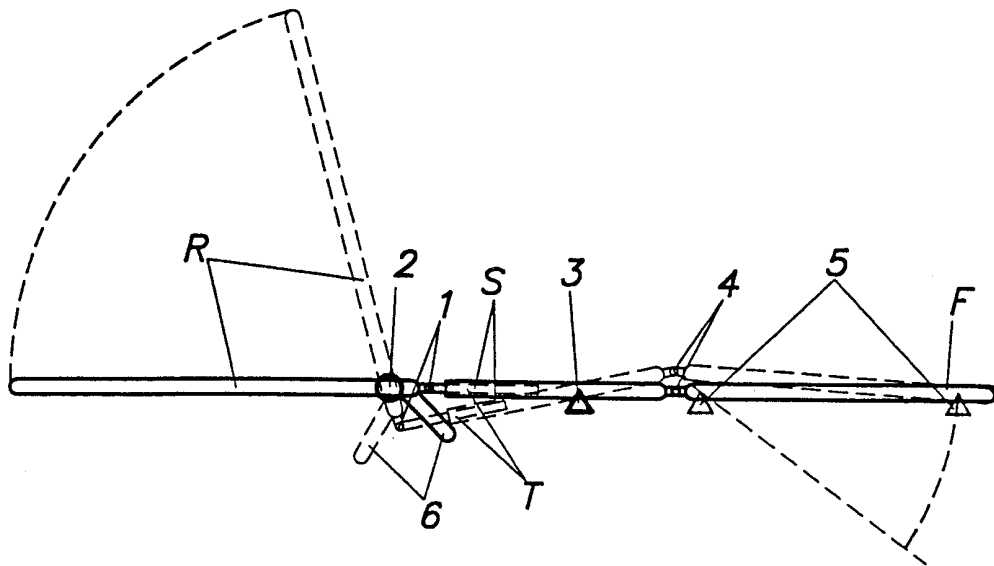


Fig.2A

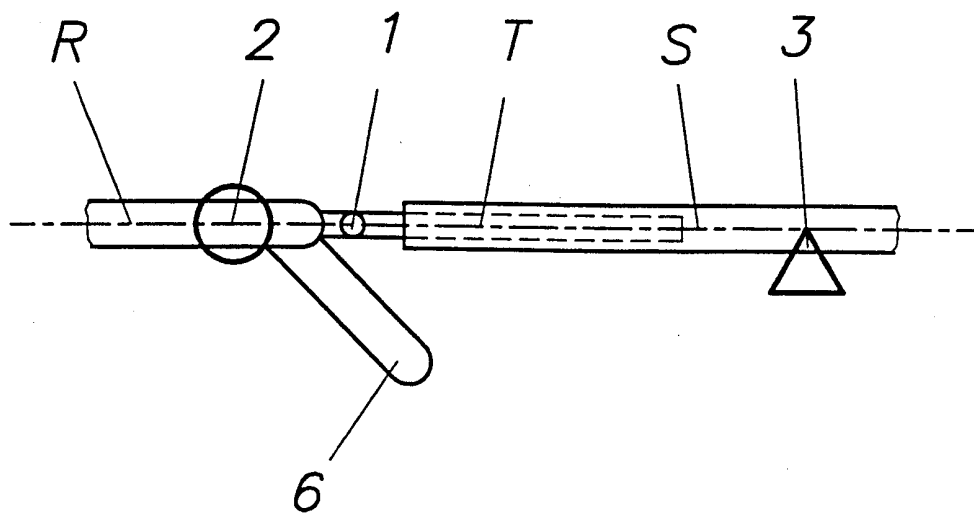


Fig.2B

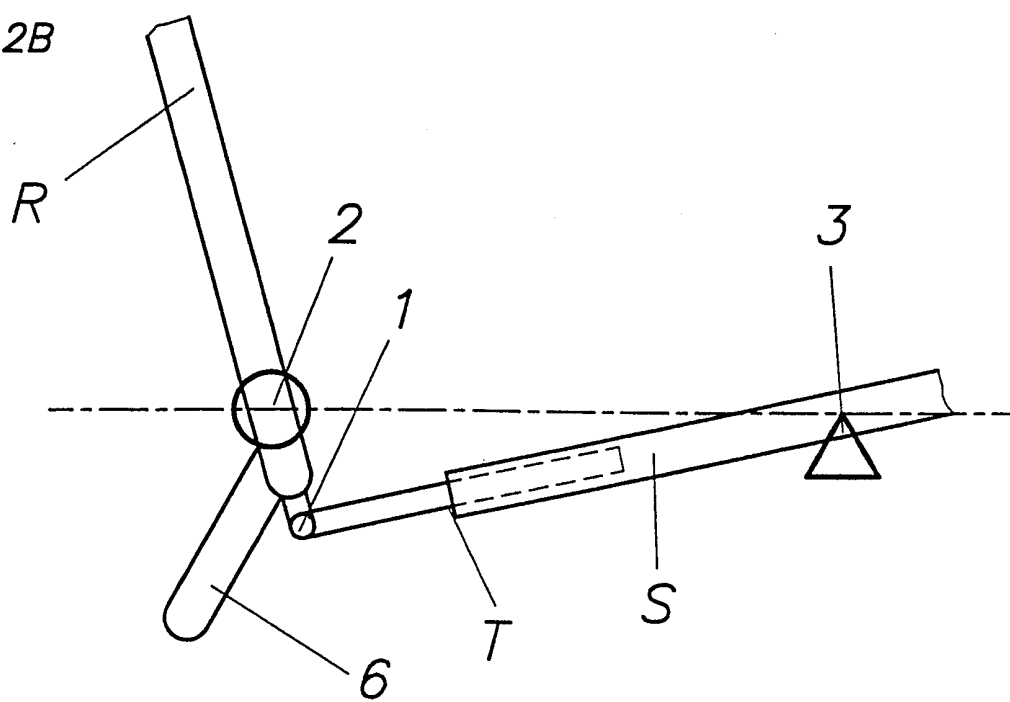


Fig. 3

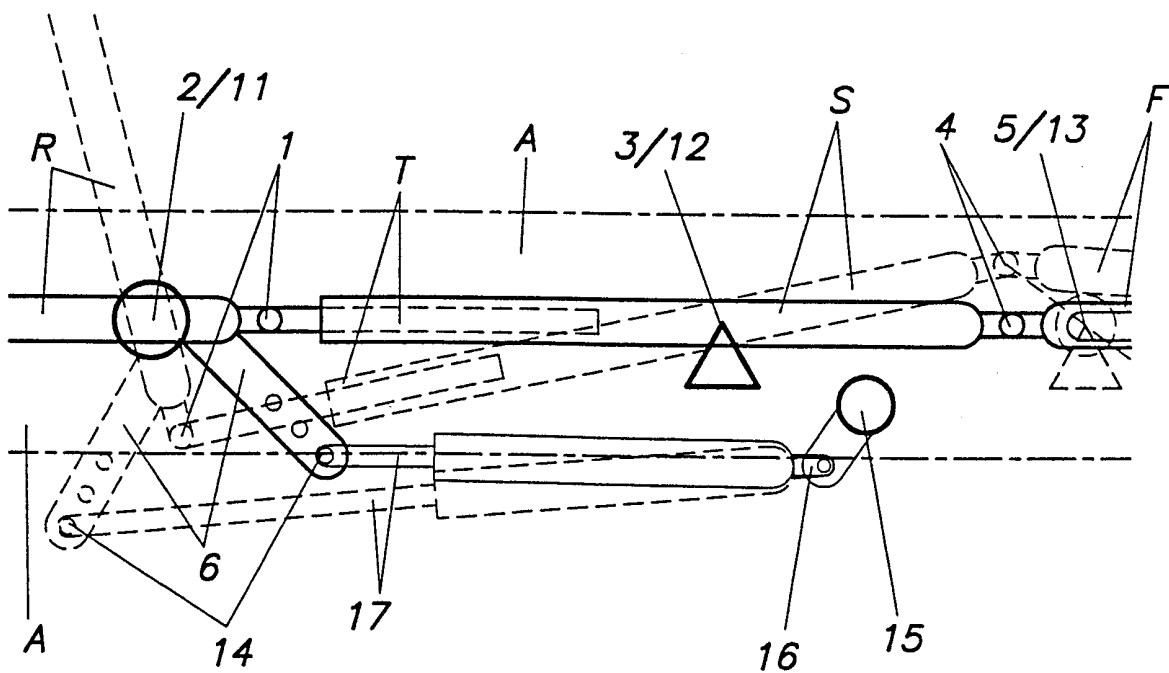
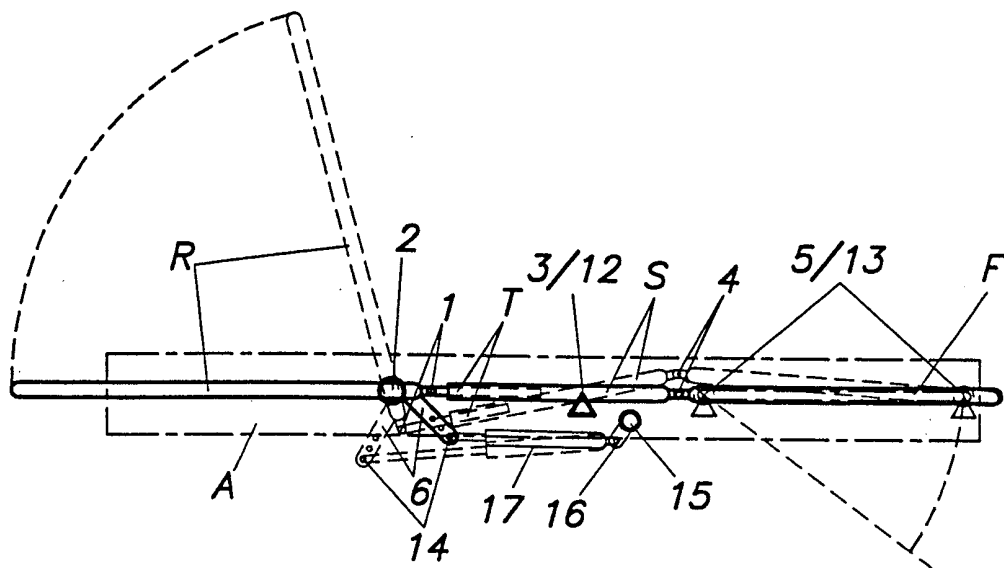


Fig. 4

4/5

Fig.5A




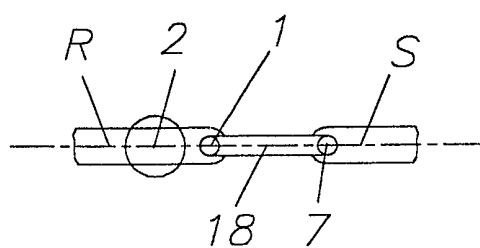


Fig.5B

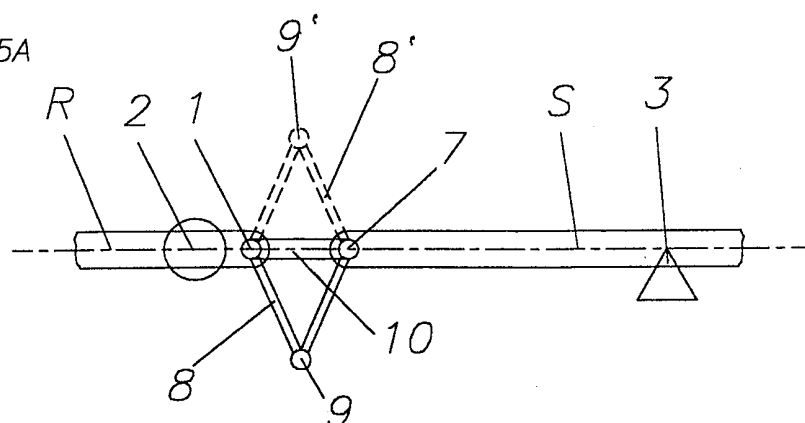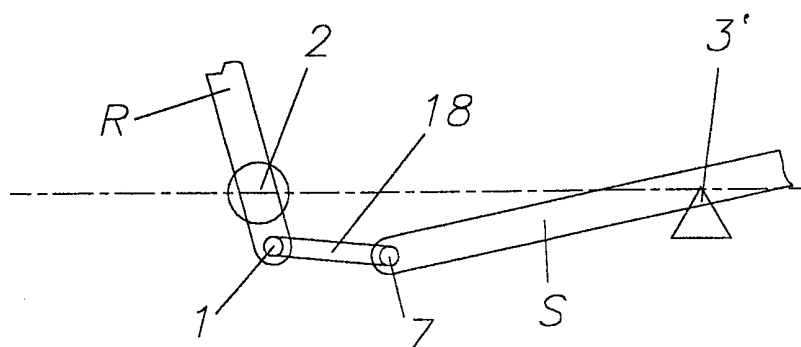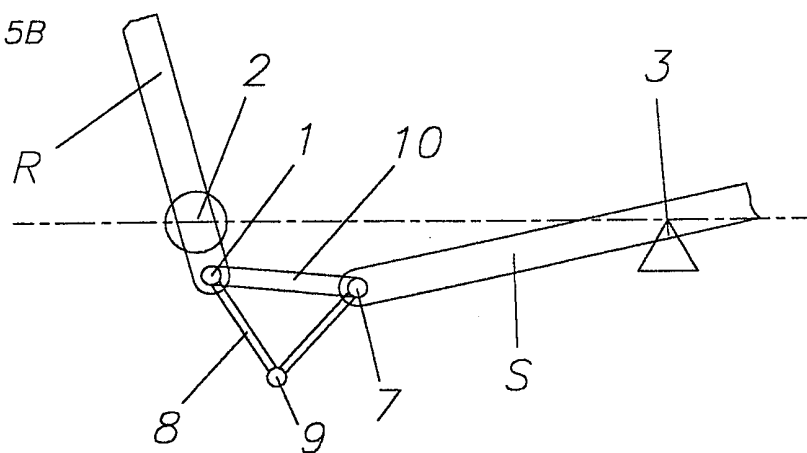

5/5

Fig.6A


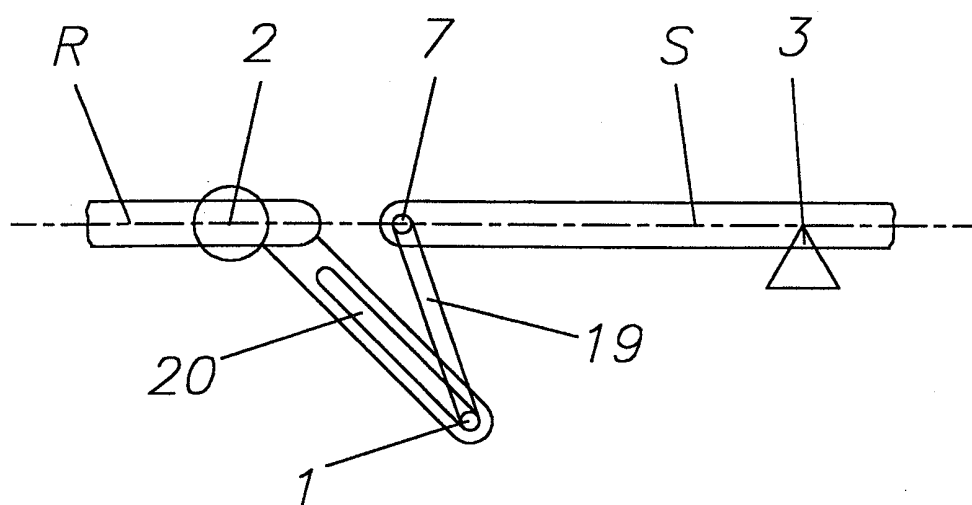


Fig.6B

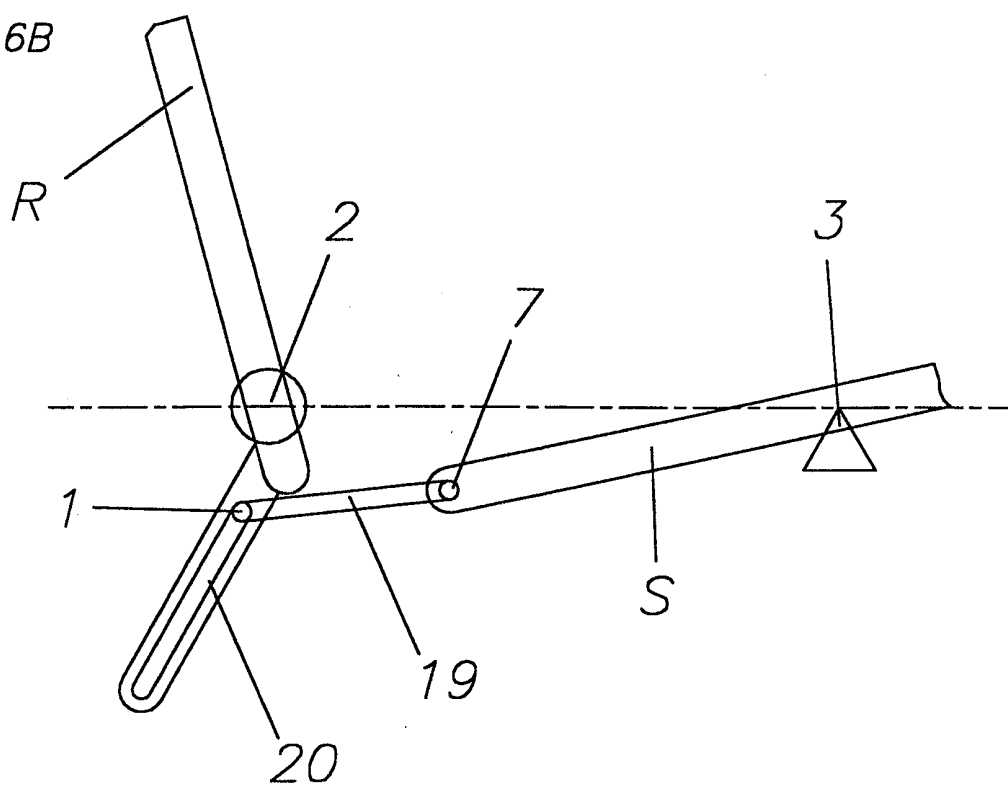

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 00/00071

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: A47C 20/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: A47C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98/37791 A1 (ALVESTAD, KJARTAN), 3 Sept 1998 (03.09.98), the whole document	1
A	--	2-9
X	DE 1779576 A (BASLER EISENMÖBELFABRIK AG), 17 February 1972 (17.02.72), the whole document	1
A	--	2-9
X	NO 43103 C1 (FABRIKANT HEINRICH JULIUS MÜLLER), 4 October 1926 (04.10.26), the whole document	1
A	--	2-9

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 June 2000

Date of mailing of the international search report

15 -06- 2000

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

SVEN-ERIK BERGDAHL

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 00/00071

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 2943546 C2 (L. & C. ARNOLD GMBH), 30 April 1981 (30.04.81), the whole document	1
A	-- -----	2-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/NO 00/00071

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 98/37791 A1	03/09/98	NONE	
DE 1779576 A	17/02/72	CH 482426 A	15/12/69
NO 43103 C1	04/10/26	NONE	
DE 2943546 C2	30/04/81	NONE	