(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) **EP 1 882 809 A1**

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
30.01.2008 Bulletin 2008/05

(51) Int Cl.:
E21B 47/00 *(2006.01)*

(21) Application number: **06291222.5**

(22) Date of filing: **24.07.2006**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI SK TR
Designated Extension States:
AL BA HR MK YU

(71) Applicants:
- **Services Pétroliers Schlumberger**
  75007 Paris (FR)
  Designated Contracting States:
  FR
- **Schlumberger Technology B.V.**
  2514 JG The Hague (NL)
  Designated Contracting States:
  BG CZ DE DK GR HU IE IT LT PL RO SI SK TR
- **Schlumberger Holdings Limited**
  Road Town, Tortola (VG)
  Designated Contracting States:
  GB NL
- **PRAD Research and Development N.V.**
  Willemstad, Curacao (AN)
  Designated Contracting States:
  AT BE CH CY EE ES FI IS LI LU LV MC PT SE

(72) Inventor: **Rezgui, Fadhel**
92320 Chatillon (FR)

(74) Representative: **White, Nicholas John et al**
Rouse Patents
1st Floor
228-240 Banbury Road
Oxford OX2 7BY (GB)

(54) Methods and apparatus for micro-imaging

(57) Apparatus for investigating underground formations surrounding a borehole, comprises: a drill bit (40); an optical probe (46) having substantially the same outer diameter as the drill bit; a drive mechanism, operable to cause the drill bit to drill a hole in the formation when the apparatus is in the borehole, and to advance the optical probe into the drilled hole; and an optical system, arranged such that when the optical probe is in the drilled hole, light from a light source is directed into the optical probe, light entering the probe from the source is directed at the formation (50) around the drilled hole, and light entering the probe from the formation around the drilled hole is directed to a detector. A method of investigating underground formations surrounding a borehole, comprises: drilling a hole in the formation to be investigated using a drill bit; inserting an optical probe having substantially the same outer diameter as the drill bit into the hole; directing light from a light source to the probe; directing light entering the optical probe to the formation around the drilled hole; directing light entering the optical probe from the formation to a detector; and analysing the light received at the detector.

EP 1 882 809 A1

Description

Technical field

[0001] This invention relates to methods and apparatus for imaging underground formations and fluids such as are commonly encountered in the drilling of wells such as oil and gas wells. In particular, the invention provides apparatus for use as a tool for making measurements in such wells.

Background art

[0002] There are a number of techniques that have been proposed for obtaining images of underground formations around boreholes. In some of these techniques, small-scale electrical, acoustic or nuclear properties are measured and an image reconstructed from these measurements. In all of these cases, the image is inferred: it does not correspond exactly to what a person would see if viewing it directly.

[0003] A number of optical techniques have also been proposed for viewing the formation surrounding a borehole. In one such technique, the borehole is filled with an optically clear fluid (water or oil), and a tool carrying a camera and light source is passed along the borehole. Conical or hemispherical mirrors or fish-eye lenses have been proposed to obtain full azimuthal coverage for a camera placed at or near the centre line of the borehole.

[0004] In another class of optical techniques an optical window is provided in the side of a tool or pad which is pressed against the borehole wall and measurements made.

[0005] All of these optical techniques suffer from problems. In all cases, the formation viewed is that left after the drilling operation has been performed. It is well known that drilling can cause significant changes in the formation around a borehole. For example, the drilling action can cause mechanical damage, and drilling fluids can enter the formations (invasion) or cause the formations to undergo changes such swelling. Consequently, viewing such a formation may not be a good way to understand the nature of the formation in its normal state. The typical imaging resolution is of the order of 1 cm.

[0006] Another problem is that borehole fluids, formation fluids or mudcake can coat the viewing window or get between the window and the formation and prevent an image being obtained.

[0007] This invention is aimed at solving the problem of investigating the formation in a regions that are less effected by the drilling process and in a manner that avoids problems with contaminant coming between the imaging tool and the formation preventing an image being obtained.

Disclosure of the invention

[0008] A first aspect of the invention provides an apparatus for investigating underground formations surrounding a borehole, comprising:

- a drill bit;
- an optical probe having substantially the same outer diameter as the drill bit;
- a drive mechanism, operable to cause the drill bit to drill a hole in the formation when the apparatus is in the borehole, and to advance the optical probe into the drilled hole; and
- an optical system, arranged such that when the optical probe is in the drilled hole, light from a light source is directed into the optical probe, light entering the probe from the source is directed at the formation around the drilled hole, and light entering the probe from the formation around the drilled hole is directed to a detector.

[0009] By providing an optical probe with substantially the same diameter as the drill bit, the optical surface of the probe can be held close enough to the formation in the drilled hole that the level of degradation due to material between the probe and the formation is sufficiently low as to allow effective investigation of the formation. Drilling into the formation means that the formation 'viewed' by the tool is less affected by the drilling process.

[0010] In one preferred embodiment, the drill bit and optical probe form a single, elongate probe unit. In this case, it is preferred that the drill bit is mounted on the end of the optical probe. The optical system can comprise a conical mirror located at the joint between the drill bit and optical probe.

[0011] Where the drill bit and optical probe are provided in one unit, the drive mechanism can be arranged to act on the optical probe to cause the drill bit to drill the hole.

[0012] In one preferred form of this embodiment, the drill bit is provided with a liquid pathway to direct any formation fluid entering the drilled hole back along the probe unit. The liquid path typically leads to a capillary trap in the probe unit at which the fluid can be analysed.

[0013] In another embodiment of the invention, the drill bit and optical probe are two discrete units. In this case, the optical system can comprise a conical mirror located in the optical probe.

[0014] In this embodiment, the drive mechanism preferably includes means for aligning the drill bit or the optical probe with the position of the drilled hole.

[0015] Apparatus according to the invention preferably further comprises a tool body in which are located the drive mechanism, a light source and a detector and at least part of the optical system. The body can also include arms which can be operated to bear against the borehole wall so as to urge the tool body against the part of the borehole wall into which the hole is to be drilled.

[0016] A second aspect of the invention provides a method of investigating underground formations surrounding a borehole, comprising:

- drilling a hole in the formation to be investigated using a drill bit;
- inserting an optical probe having substantially the same outer diameter as the drill bit into the hole;
- directing light from a light source to the probe;
- directing light entering the optical probe to the formation around the drilled hole;
- directing light entering the optical probe from the formation to a detector; and
- analysing the light received at the detector.

[0017] The optical probe can be used to turn the drill bit such that as the drill bit drills into the formation, the optical probe is inserted into the drilled hole.

[0018] By partially withdrawing the drill bit in the drilled hole, fluids can be drawn from the formation into the drilled hole. In this case, the method preferably further comprises drawing the fluids along the drill bit to the optical probe and analysing the fluids using the optical probe.

[0019] In another embodiment of the method according to the invention, after drilling the hole using the drill bit, the drill bit is withdrawn from the hole and the optical probe subsequently inserted.

[0020] The method according to the second aspect of the invention is preferably performed using an apparatus according to the first aspect of the invention.

Brief description of the drawings

[0021] Figures 1 and 2 show a tool according to a first embodiment of the invention;

Figure 3 shows a detailed view of the drill probe unit of the embodiment of Figures 1 and 2;

Figure 4 shows the drill probe of Figure 3 when used for fluid analysis;

Figures 5 and 6 show a tool according to a second embodiment of the invention; and

Figure 7 shows a detailed view of the optical probe of the embodiment of Figures 5 and 6.

Mode(s) for carrying out the invention

[0022] Figures 1 and 2 show a first embodiment of a tool according to the invention. The tool comprises a tool body 10 that can be suspended in a borehole 12 by means of a wireline cable (not shown) which provides power and data communication from the surface. A pair of backup arms 14 are mounted on the tool body and can be extended to contact one side of the borehole wall 16 so as to force the tool body 10 against the opposite side of the borehole wall 18 where it is supported on pads 20.

[0023] A drive mechanism 22 comprising a motor and gear arrangement is mounted in the body 10. The drive mechanism includes a drive head 24 in which is mounted a drill and probe unit 26. The unit 26 comprises at its outer end a drill bit 28 and at its inner end an optical probe 30 formed from a sapphire fibre having an outside diameter that is substantially the same as, but no larger than that of the drill bit. The drive mechanism 24, which is provide with power and control signals from the wireline cable, operates to rotate the drill unit 26 and provide an axial drive to either drill into the borehole wall 18 or withdraw the unit from a drilled hole.

[0024] The body 10 also contains an optical system comprising a CCD camera and light source 32 with associated control electronics 34. The optical system also includes a mirror 36 which provides a light path 38 to direct light from the light source into the fibre forming the optical probe 30, and to direct light exiting the optical probe to the CCD camera.

[0025] Figure 1 shows the configuration of the tool when it is positioned in the borehole 12 adjacent a formation of interest. Figure 2 shows the configuration of the tool once a hole has been drilled and the drill and probe unit 26 advanced into the drilled hole such that at least the lower part of the optical probe 30 is located in the hole.

[0026] Figure 3 shows further detail of the drill and probe unit 26. The drill bit 28 is metallic and has an end portion 40 for drilling ahead and a tail portion 42 which is shaped with grooves 44 to remove the drilled material, and to polish or hone the wall of the drilled hole to obtain a good surface for imaging. The sapphire fibre 46 forming the optical probe 30 is fixed to the end of the drill bit 28. The outer diameter of the fibre 46 is close to, but no greater than the largest outer diameter of any part of the drill bit 28 (for example 5-12mm) so as to be able to fit in the drilled hole but to leave as little possible space between the wall of the drilled hole and the side of the fibre 46. This has the effect of minimising the amount of material that can remain between the side of the fibre 46 and the wall of the drilled hole which could otherwise interfere with optical measurements. Grooves 44', corresponding to those in the drill bit 28 are formed in the outer surface of the fibre 46 to direct drilled material out of the hole and away from the wall to be imaged.

[0027] A conical mirror 48 is formed at the interface between the drill bit 28 and optical probe 30. Light entering the probe from the source 32 via the mirror 36 is reflected substantially equally around the azimuth of the fibre 46 onto an investigation zone 50 of the hole wall near the conical mirror 48. Light passing into the fibre from the investigation zone 50 is reflected by the conical mirror 48 back up the fibre 46 and via the mirror 36 to the CCD camera 32. Thus, light from the source 32 can be directed at the polished or honed surface of the drilled hole in the investigation zone 50 and an optical image of the wall (and hence the formation) returned to the camera 32. Such a probe can be used to obtain optical images on the order of 1 micron resolution.

[0028] As well as the optical image, the drill and probe unit 26 to analyse formation fluids as is shown in Figure 4. Because of the close fit between the outside of the probe unit 26 and the wall of the drilled hole, when the

probe unit 26 is withdrawn from the hole, a pressure drop is created at the end of the hole 52 by the swabbing effect such that fluids can flow in from the formation 18. The fluids can flow back along the groves 44 and 44' to the region of the fibre 46 near the mirror 48 where they can be trapped in a capillary chamber 54 and optically analysed in a similar fashion to that described above for the formation wall.

[0029] The steps of drilling, imaging and fluid analysis can be repeated several times, repositioning the tool in the borehole prior to each measurement.

[0030] Figures 5 and 6 show a second embodiment of a tool according to the invention. Parts corresponding to those in Figures 1 and 2 are given the same numbers in the 100 series.

[0031] This second embodiment differs from the first in that the drill probe unit is replaced by a separate drill bit 128 and optical probe 130. In this case, the drive head 124 has the bit 128 and probe 130 carried separately and the drive mechanism 122 includes a translation mechanism to align one or the other with the position of the drilled hole.

[0032] In the first stage or operation, as shown in Figure 5, the tool is positioned as before and the drive mechanism 122 operated to drill the hole with the drill bit 128. The mechanism 122 then withdraws the bit 128 from the hole and moves the drive head 124 until the optical probe 130 is aligned with the hole (Figure 6), at which point it is inserted into the hole and the optical measurement made. The probe 130 can then be withdrawn from the hole and the tool moved to another location for further measurements to be made.

[0033] In this embodiment, the optical probe can have a somewhat different construction as is shown in Figure 7, comprising a multi-part sapphire-sapphire assembly 60, 62 having a conical mirror 64 formed at the interface. Again, a probe diameter corresponding to that of the OD of the drill bit 128 is used, 5-12mm for example.

[0034] In both embodiments, the light returning to the CCD camera 32 can be processed in the tool electronics 34 to form images which can be either stored in the tool or transmitted to the surface via the wireline cable. Also, the raw optical signals can be stored or transmitted to the surface for later processing.

[0035] Other changes can be made while staying within the scope of the invention. For example, the tool can be self contained without the need to rely on the wireline cable for instructions and/or power. The tool can also be conveyed on coiled tubing. While the examples given above contemplate imaging in open (uncased) boreholes, the invention could also be used in cased boreholes but with the necessity of drilling through casing and any cement between the casing and formation before obtaining images. Plugging of holes drilled in casing may also be required.

[0036] In another embodiment, the optical probe is provided with a small internal hole that can be connected in the tool body to a pumping arrangement. This hole can be used for the withdrawal of liquid from the drilled hole in order to measure the formation pressure. The hole can also be used to inject a very small quantity of liquid (water for instance) in order to flush the probe in cases where the optical attenuation is high, for example in heavy mud. Since the amount of liquid surrounding the probe in the drilled hole (for the dimensions described above) is very small (about one cc) it can easily be replaced or diluted with a clean fluid ejected from the hole in the probe.

Claims

1. Apparatus for investigating underground formations surrounding a borehole, comprising:

- a drill bit;
- an optical probe having substantially the same outer diameter as the drill bit;
- a drive mechanism, operable to cause the drill bit to drill a hole in the formation when the apparatus is in the borehole, and to advance the optical probe into the drilled hole; and
- an optical system, arranged such that when the optical probe is in the drilled hole, light from a light source is directed into the optical probe, light entering the probe from the source is directed at the formation around the drilled hole, and light entering the probe from the formation around the drilled hole is directed to a detector.

2. Apparatus as claimed in claim 1, wherein the drill bit and optical probe form a single, elongate probe unit.

3. Apparatus as claimed in claim 2, wherein the drill bit is mounted on the end of the optical probe.

4. Apparatus as claimed in claim 3, wherein the optical system comprises a conical mirror located at the joint between the drill bit and optical probe.

5. Apparatus as claimed in any of claims 2-4, wherein the drive mechanism acts on the optical probe to cause the drill bit to drill the hole.

6. Apparatus as claimed in any of claims 2-5, wherein the drill bit is provided with a liquid pathway to direct any formation fluid entering the drilled hole back along the probe unit.

7. Apparatus as claimed in claim 6, wherein the liquid path leads to a capillary trap in the probe unit at which the fluid can be analysed.

8. Apparatus as claimed in claim 1, wherein the drill bit and optical probe are two discrete units.

9. Apparatus as claimed in claim 8, wherein the optical

system comprises a conical mirror located in the optical probe.

10. Apparatus as claimed in claim 8 or 9, wherein the drive mechanism includes means for aligning the drill bit or the optical probe with the position of the drilled hole.

11. Apparatus as claimed in any preceding claim, further comprising a tool body in which are located the drive mechanism, a light source and a detector and at least part of the optical system.

12. Apparatus as claimed in claim 11, wherein the body also includes arms which can be operated to bear against the borehole wall so as to urge the tool body against the part of the borehole wall into which the hole is to be drilled.

13. Apparatus as claimed in any preceding claim, wherein the optical probe further comprises a bore through which fluids can be withdrawn from or pumped into the drilled hole.

14. A method of investigating underground formations surrounding a borehole, comprising:

- drilling a hole in the formation to be investigated using a drill bit;
- inserting an optical probe having substantially the same outer diameter as the drill bit into the hole;
- directing light from a light source to the probe;
- directing light entering the optical probe to the formation around the drilled hole;
- directing light entering the optical probe from the formation to a detector; and
- analysing the light received at the detector.

15. A method as claimed in claim 14, comprising using the optical probe to turn the drill bit such that as the drill bit drills into the formation, the optical probe is inserted into the drilled hole.

16. A method as claimed in claim 15, further comprising at least partially withdrawing the drill bit in the drilled hole so as to draw fluids from the formation into the drilled hole.

17. A method as claimed in claim 16, further comprising drawing the fluids along the drill bit to the optical probe and analysing the fluids using the optical probe.

18. A method as claimed in claim 14, comprising, after drilling the hole using the drill bit, withdrawing the drill bit from the hole and subsequently inserting the optical probe.

19. A method as claimed in claim 14, when performed using an apparatus as claimed in any of claims 1-13.

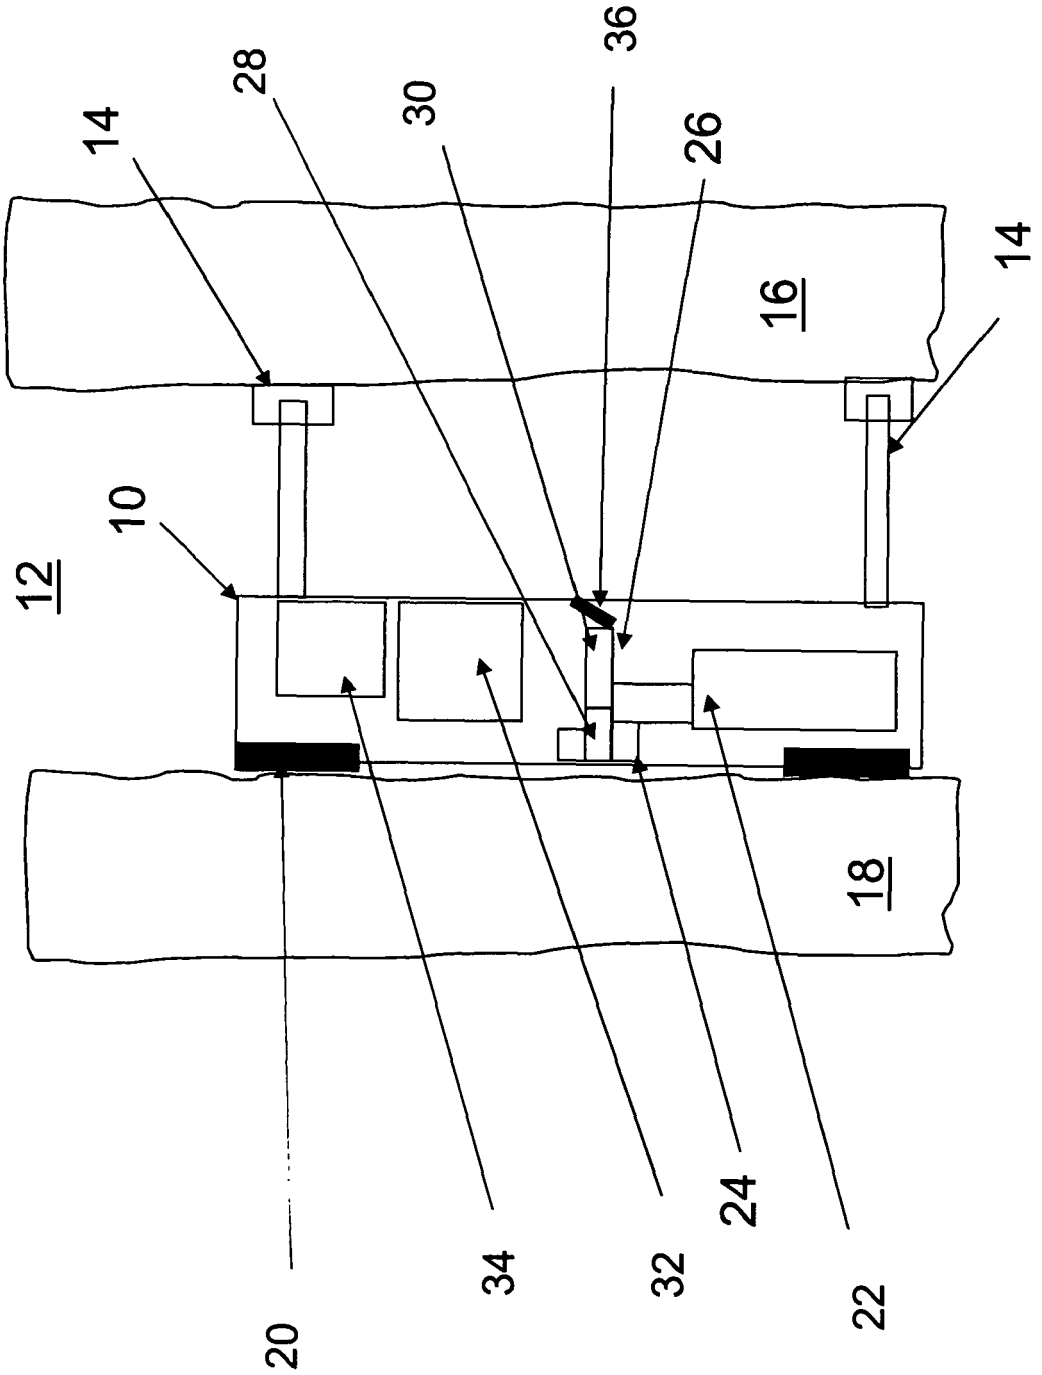


FIGURE 1

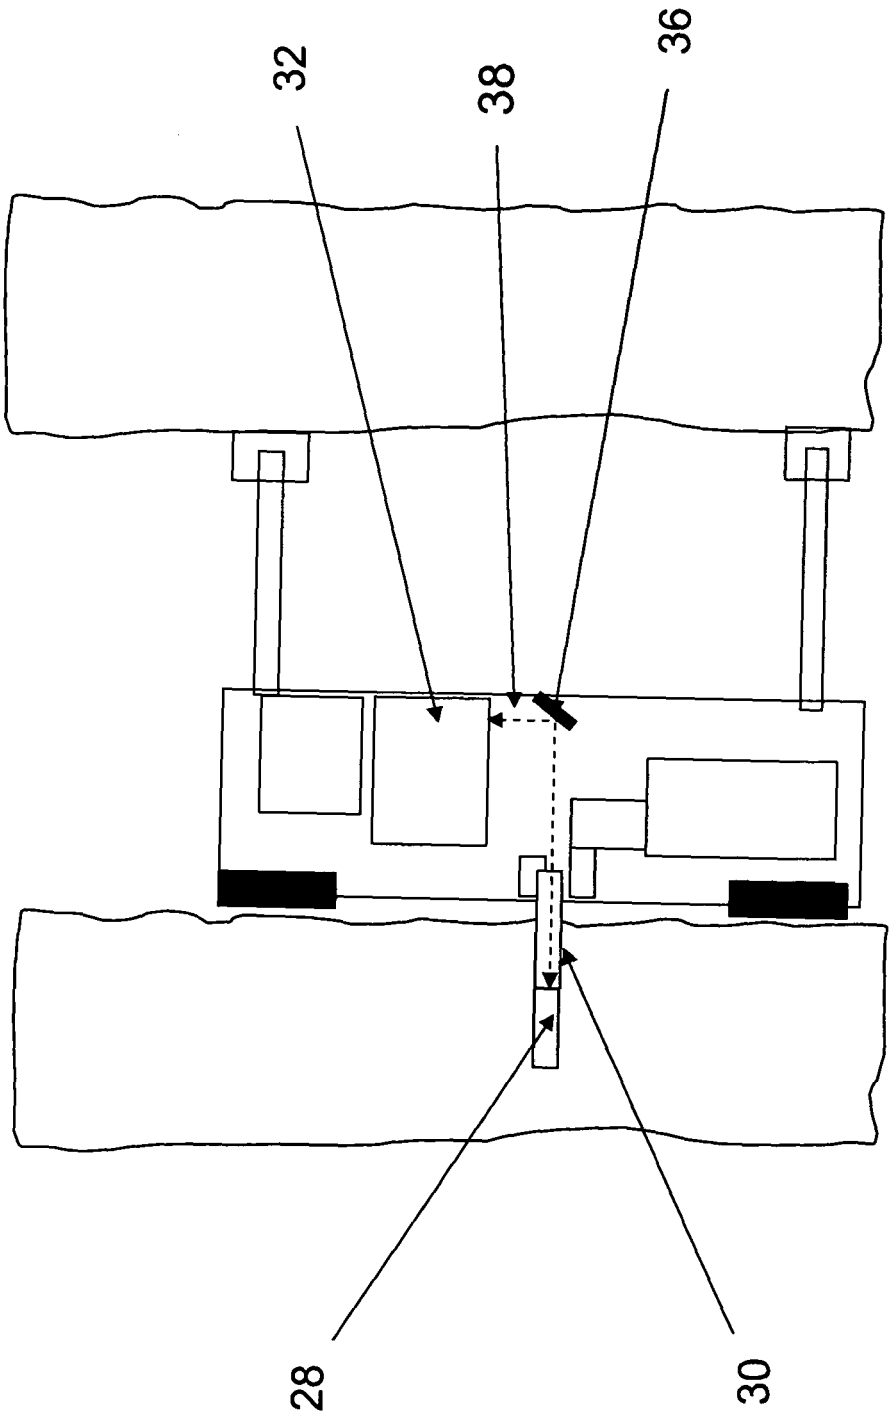


FIGURE 2

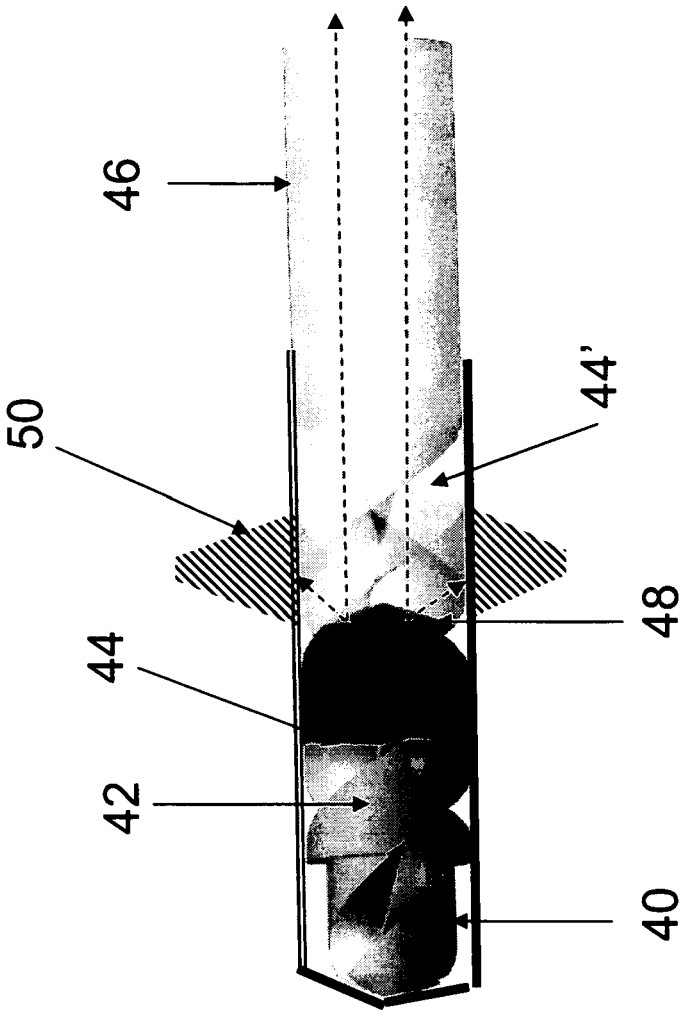


FIGURE 3

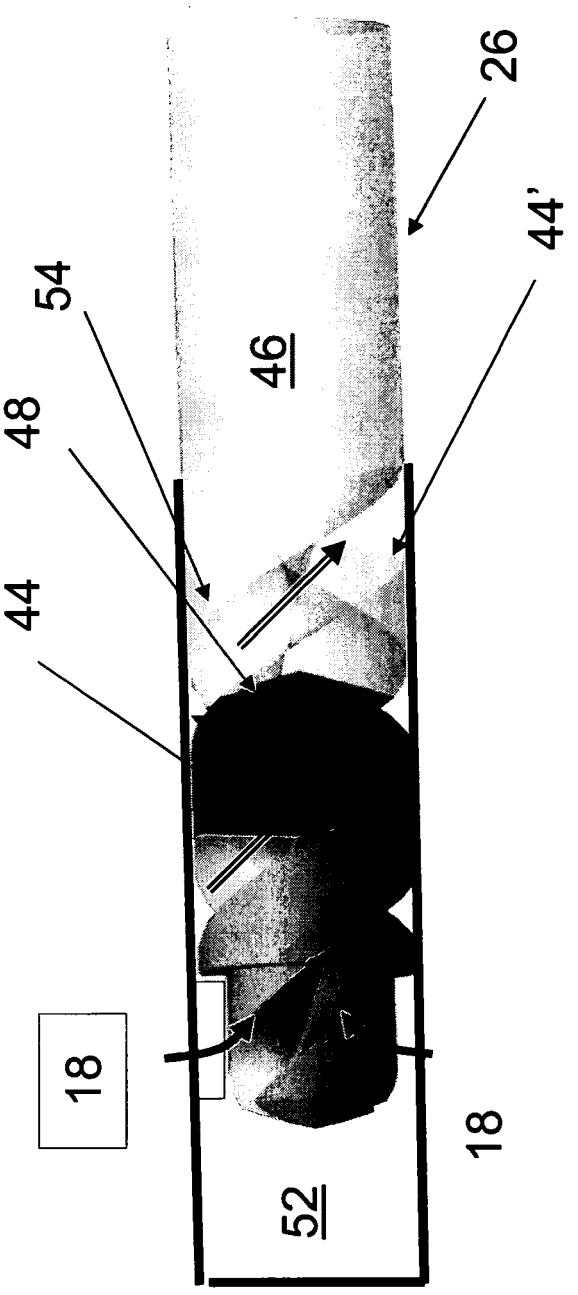


FIGURE 4

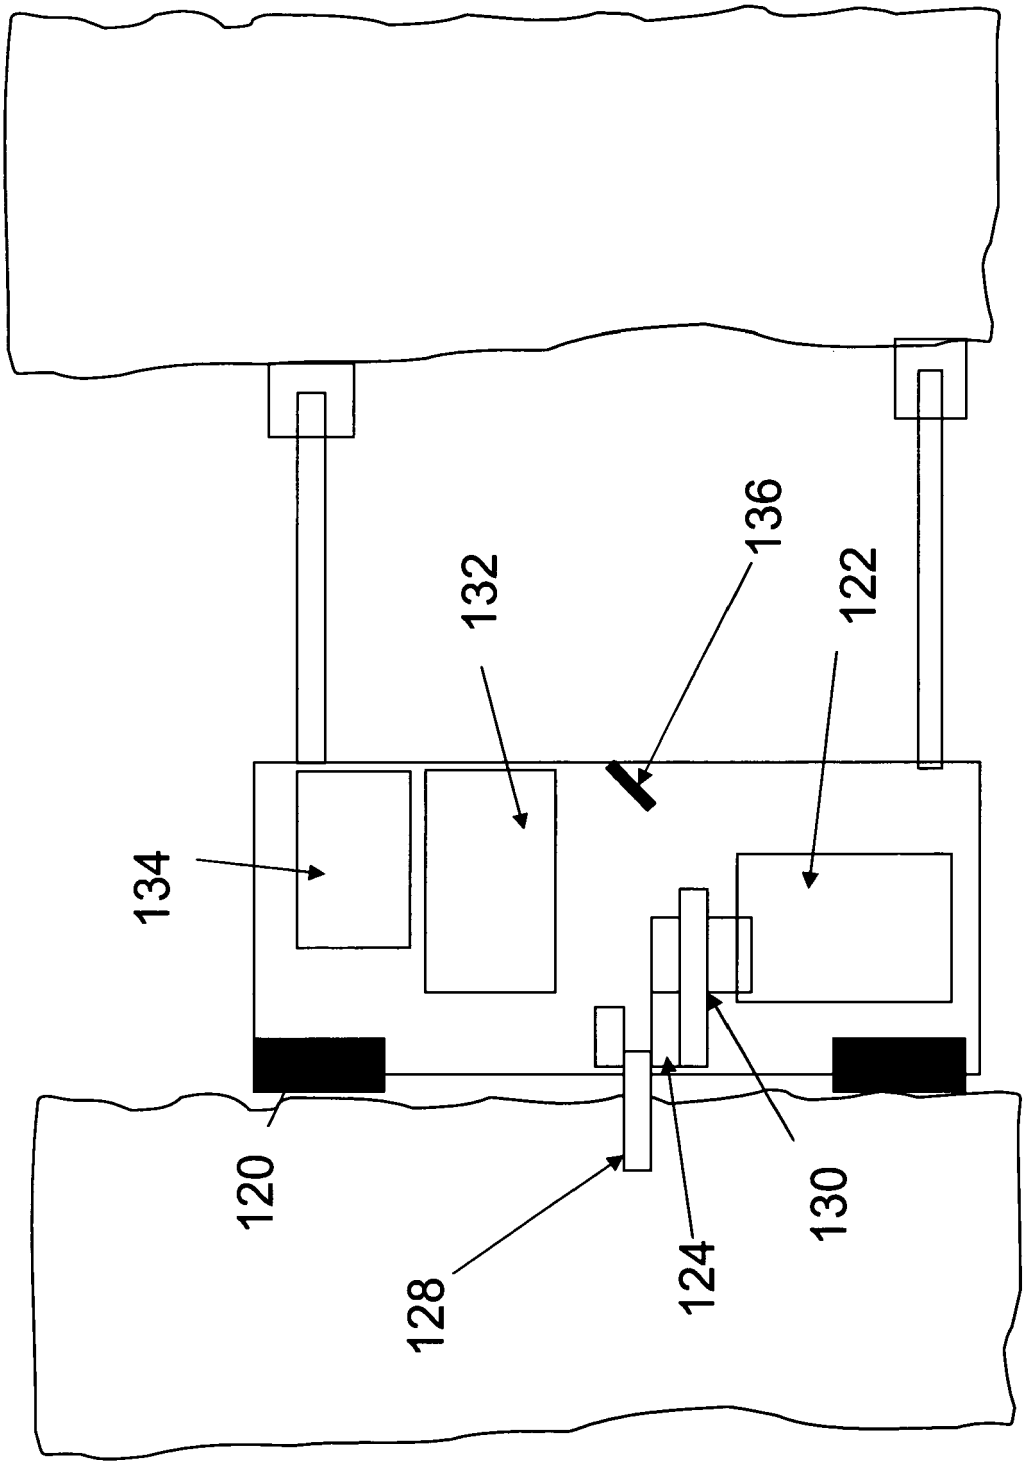


FIGURE 5

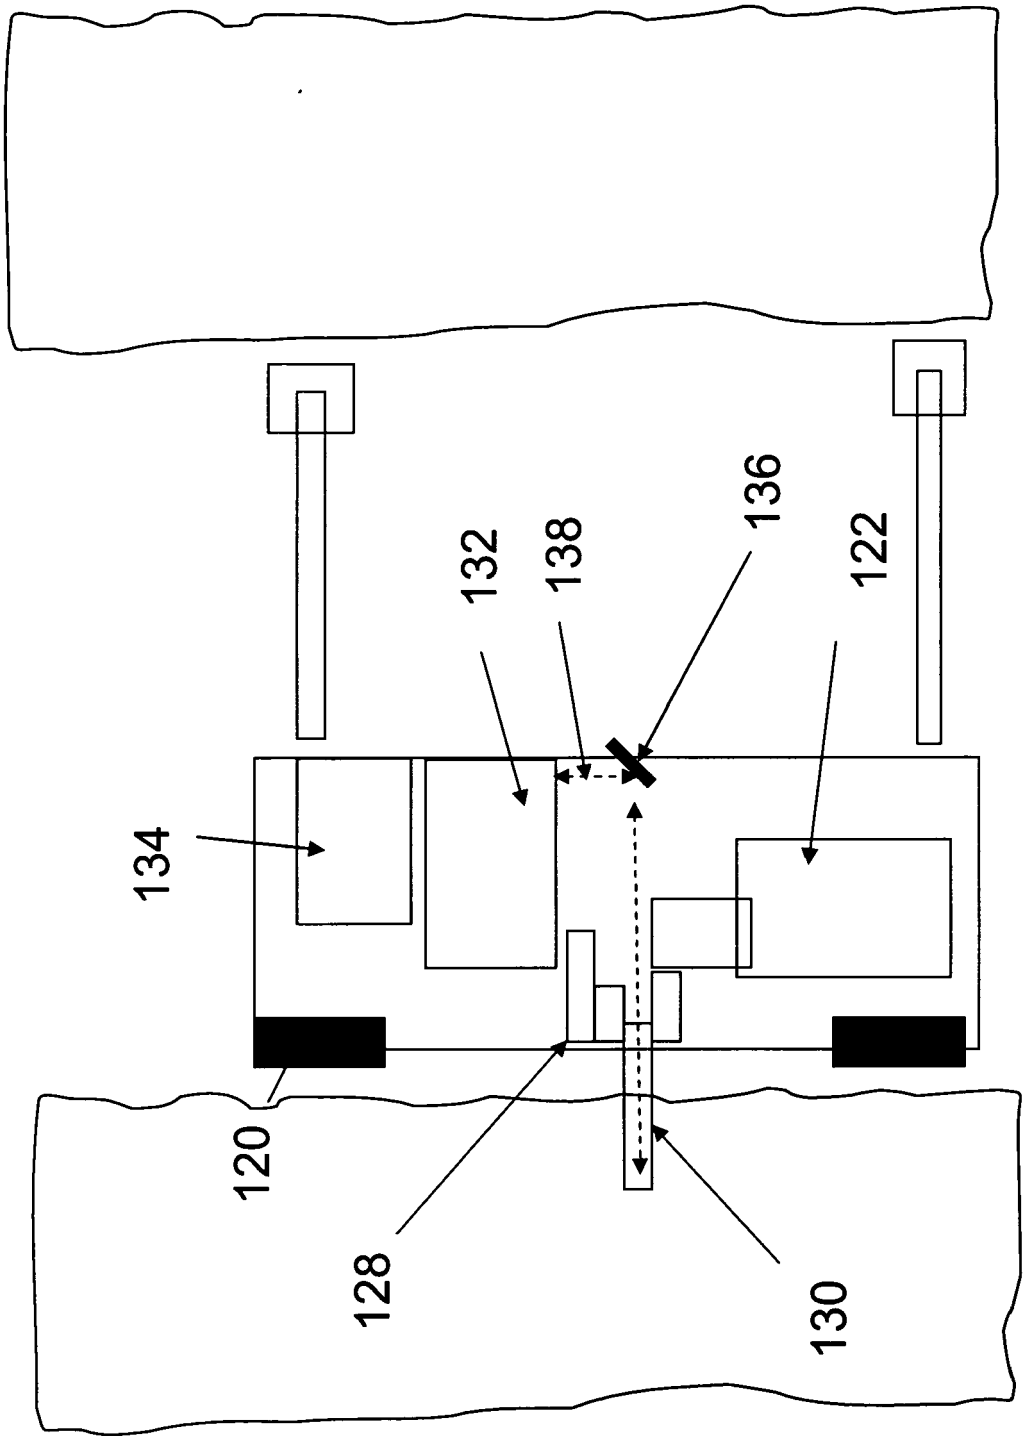


FIGURE 6

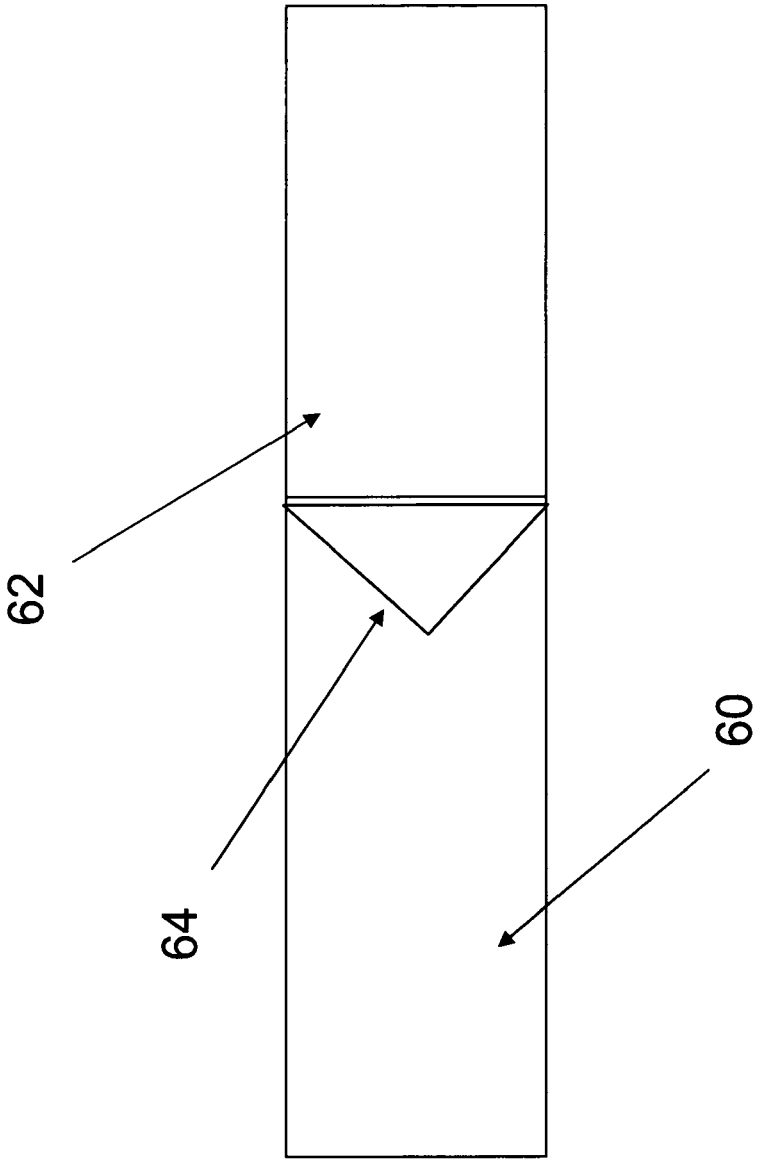


FIGURE 7

European Patent Office

EUROPEAN SEARCH REPORT

Application Number
EP 06 29 1222

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	GB 2 345 753 A (BAKER HUGHES) 19 July 2000 (2000-07-19) * page 13, line 11 - line 18 *	1,14	INV. E21B47/00
A	WO 2005/116401 A (DEUTSCHE MONTANTECHNOLOGIE GMBH) 8 December 2005 (2005-12-08) * page 6, paragraph 2 - page 7, paragraph 2 *	1,14	
A	EP 0 747 569 A (SCHLUMBERGER LTD. ET AL.) 11 December 1996 (1996-12-11) * column 4, line 47 - column 5, line 4 *	1,14	
A	US 3 992 095 A (JACOBY ET AL.) 16 November 1976 (1976-11-16) * column 10, line 18 - line 45 *	1,14	
A	WO 2004/003506 A (WELL-DOG INC.) 8 January 2004 (2004-01-08) * page 40, paragraph 2 *	1,14	TECHNICAL FIELDS SEARCHED (IPC)
A	DD 100 517 A (HEINZ ET A.) 20 September 1973 (1973-09-20) * the whole document *	1,14	E21B G01V G01N
A	EP 1 388 615 A (ABB IMMOBILIEN AG) 11 February 2004 (2004-02-11) * paragraphs [0018], [0025] *	1,14	

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
The Hague	13 November 2006	Rampelmann, Klaus

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document

EPO FORM 1503 03.82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO. EP 06 29 1222

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-11-2006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2345753 A	19-07-2000	GB 2362948 A	05-12-2001
		NO 20000150 A	13-07-2000
		WO 0042416 A1	20-07-2000
		US 6388251 B1	14-05-2002
WO 2005116401 A	08-12-2005	DE 102004026702 B3	09-02-2006
EP 0747569 A	11-12-1996	AU 697737 B2	15-10-1998
		AU 5236996 A	19-12-1996
		CA 2177021 A1	08-12-1996
		DE 69626568 D1	17-04-2003
		JP 9158663 A	17-06-1997
		NO 962392 A	09-12-1996
		US 5663559 A	02-09-1997
US 3992095 A	16-11-1976	NONE	
WO 2004003506 A	08-01-2004	AU 2003279837 A1	19-01-2004
		CA 2490784 A1	08-01-2004
		CN 1672032 A	21-09-2005
		EP 1558914 A2	03-08-2005
DD 100517 A	20-09-1973	NONE	
EP 1388615 A	11-02-2004	AU 2003246512 A1	23-02-2004
		WO 2004013415 A1	12-02-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82