July 9, 1929. A. STONE 1,720,013

DUSTPROOF BAG

Filed Dec. 30, 1927

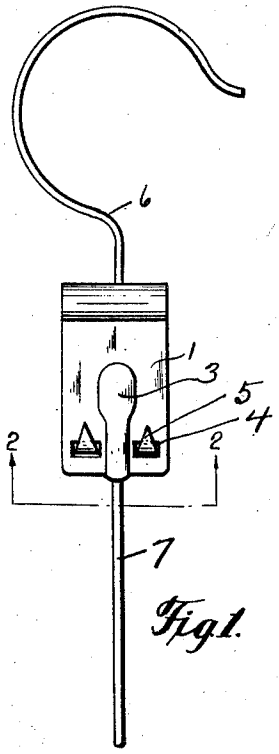


Fig. 1.




Fig. 2.

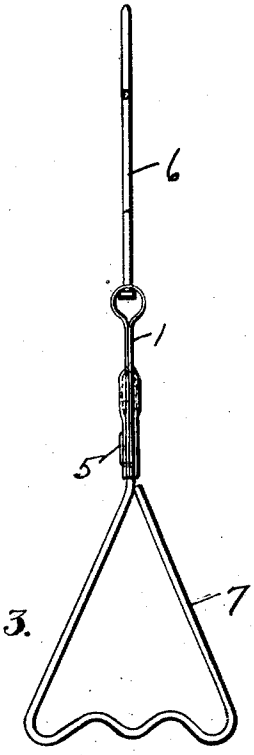


Fig. 3.



Fig. 4.

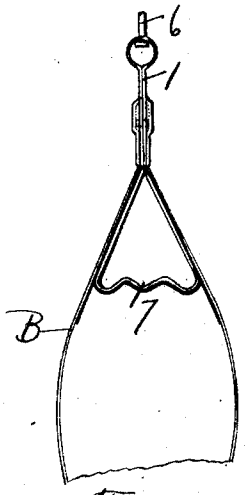


Fig. 5.

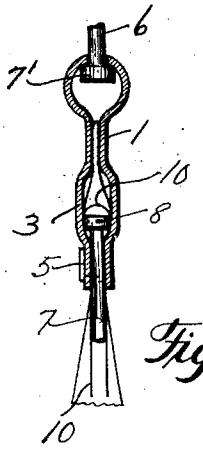


Fig. 6.

Abraham Stone INVENTOR.

BY Mock & Blum

ATTORNEYS.

Patented July 9, 1929. 1,720,013

UNITED STATES PATENT OFFICE.

ABRAHAM STONE, OF BROOKLYN, NEW YORK, ASSIGNOR, BY MESNE ASSIGNMENTS, TO ABRAHAM STONE AND MAX FROST, BOTH OF BROOKLYN, NEW YORK.

DUSTPROOF BAG.

Application filed December 30, 1927. Serial No. 243,523.

This invention relates to a new and improved form of a dust-proof bag.

One of the objects of the invention is to provide a dust-proof bag combined in a simple and efficient manner with a supporting hook and with a spreader located in the interior of the bag, this spreader being adapted to separate the side walls of the bag so as to permit the ready insertion of a garment.

Other objects of the invention will be set forth in the following description and drawings which illustrate a preferred embodiment thereof, it being understood that the above general statement of the objects of the invention is intended to generally explain the same and not to limit it in any manner.

Fig. 1 is a side view of the combination supporting member and spreader for the bag.

Fig. 2 is a view taken on the line 2—2 of Fig. 1.

Fig. 3 is a side view of the device shown in Fig. 1.

Fig. 4 is a detail view showing how the combination support and spreader is assembled with the bag.

Fig. 5 is a view similar to Fig. 4, showing the spreader in the operative position.

Fig. 6 is a detail sectional view partly in elevation.

The bag B which is made of paper or any other suitable material is preferably closed at the top thereof and it is provided with an opening at one side thereof to permit a garment to be inserted or removed.

The top of the bag is connected to a clip 1 made of any suitable metal. The said clip 1 has a general U-shaped contour and the top of the bag is held between the vertical legs thereof. These vertical legs of the clip 1 are provided with stamped out ribs 3.

One of the legs of the clip 1 is provided with slots 4, and the other leg is provided with tongues 5 struck out therefrom so that the tongues 5 can be forced through the sidewalls of the bag into the slots 4.

The tongues 5 can then be bent up as illustrated for example in Fig. 6 so as to firmly clamp the top of the bag to the clip 1. The top of the clip 1 is enlarged and a hook 6 which is provided with an enlarged head 7, is swivelled in the top of the clip 1 so that the said hook 6 can be freely turned and it can also have a certain freedom of lateral movement with respect to the clip 1.

The spreader 7 has an enlarged head 8 which is located between the ribs 3 so that while the spreader 7 can be freely turned, it is connected to the clip 1 without the need of any additional fastening means. The bag is provided with an interior flap 10 made of paper or the like, the top of which extends above the enlarged head 8, as clearly shown in Fig. 6, and this interior flap 10 serves to reinforce the bag at the point where it is connected to the clip 1.

When the spreader 7 is turned into the position shown in Fig. 5, the side walls of the bag are separated so that a garment placed upon an ordinary hanger can be readily inserted into the bag and the hook of the hanger can be mounted upon the bottom of the spreader 7, which is suitably shaped for this purpose.

It is obvious that the clip 1 and the hook 6 can be readily assembled to form a unit, and that it is very simple to assemble this unit with the bag B and the spreader 7.

As shown in Fig. 6, it is not necessary to perforate the top of the bag at all. Likewise, and as shown in Fig. 6, the top of the bag is firmly clamped between the legs of the clip 1, above the ribs 3.

A preferred embodiment of the invention has been described but it is clear that numerous changes and omissions can be made without departing from the spirit of my invention.

I claim:

1. In combination, a dust-proof bag having a clip connected to the top portion thereof, said clip having legs between which said top portion of the bag is clamped, and a garment support having the top thereof located within the top portion of said bag, the top portion of said garment support being located between said legs and above the bottoms thereof.

2. In combination, a dust-proof bag having a clip connected to the top portion thereof, said clip having legs extending below the top of the bag, said legs having enlarge-

ments which are substantially aligned, and a garment support located within said bag and held between said enlargements.

3. In combination, a dust-proof bag having a closed top and a clip having legs extending below the top of the said bag, the top of said clip having a hook connected thereto, said legs having aligned enlargements therein, and a garment support located within said bag and connected to the said legs between the enlargements thereof.

In testimony whereof I affix my signature.

ABRAHAM STONE.