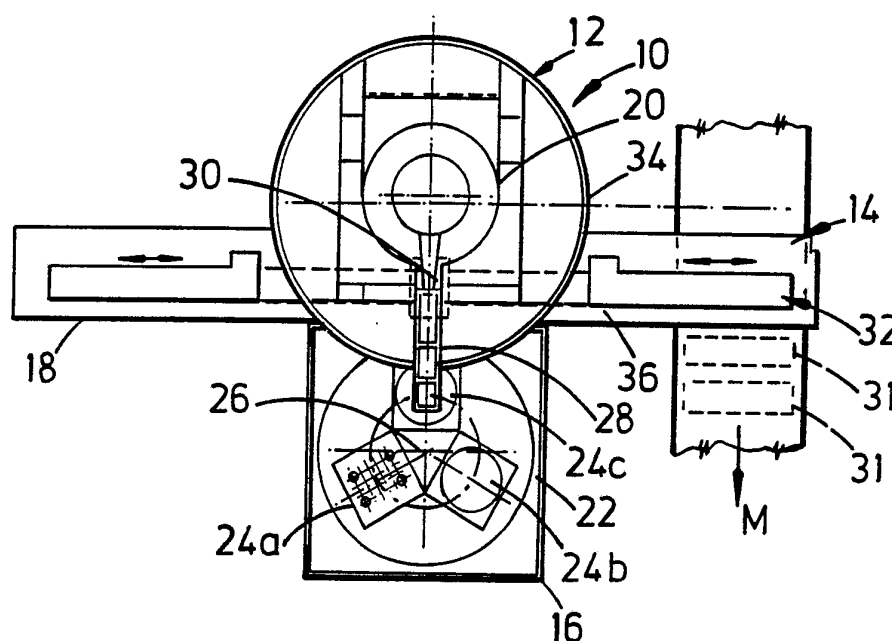




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B22D 41/00, F27D 3/14	A1	(11) International Publication Number: WO 90/13381 (43) International Publication Date: 15 November 1990 (15.11.90)
(21) International Application Number: PCT/GB90/00474 (22) International Filing Date: 30 March 1990 (30.03.90) (30) Priority data: 8910266.9 4 May 1989 (04.05.89) GB (71) Applicant (for all designated States except US): CONSARC ENGINEERING LIMITED [GB/GB]; 12 North Road, Bellshill, Lanarkshire ML4 1EN (GB). (72) Inventor; and (75) Inventor/Applicant (for US only) : WILSON, John, Glen-cross [GB/GB]; 60 East Thornlie Street, Wishaw ML2 8BB (GB). (74) Agents: McCALLUM, William, Potter et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).		(81) Designated States: AT (European patent), AU, BE (European patent), BG, BR, CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GB, GB (European patent), HU, IT (European patent), JP, KP, KR, LU (European patent), NL (European patent), NO, RO, SE (European patent), SU, US. Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: INDUCTION MELTING AND CASTING FURNACE



(57) Abstract

An induction melting and casting furnace (10) is described which includes casting stations (14, 16, 18) disposed around the melt chamber (12) of the furnace (10), each casting station (14, 16, 18) having a tundish (28, 32) for selectively transporting melt to the desired casting station (14, 16, 18). The furnace is modified so as to create apertures (34) in the walls of the melting chamber (12) to allow tundishes (28, 32) to enter the melt chamber (12) through fixed vacuum seals to receive molten metal from a tiltable melting unit (20) and to convey the melt through the vacuum gate valve to the desired casting station (14, 16, 18).

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Fasso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	SD	Sudan
CF	Central African Republic	KP	Democratic People's Republic of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SN	Senegal
CH	Switzerland	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
DE	Germany, Federal Republic of	LU	Luxembourg	TG	Togo
DK	Denmark			US	United States of America

-1 -

INDUCTION MELTING AND CASTING FURNACE

The present invention relates to a melting and casting furnace particularly, but not exclusively, of the induction vacuum type.

Vacuum induction melting and casting furnaces are well known in the art. In this type of furnace melting is carried out under conditions of reduced pressure and heating is achieved by means of an induction coil. There are many different types of design. The simplest design is a single chamber system with a turntable in which the melting unit within the chamber is movable to pour into removable moulds situated on a turntable. With such a design the chamber requires to be opened for loading and unloading after each melt. An improvement of the single chamber design is achieved with a 2-chamber system separated by vacuum gate valves in which tundishes move between the 2 chambers to direct the melt from the melting unit into the mould and the mould assembly/array can be rotated by a turntable. The advantage of this design is that the melting chamber can still be closed and maintained under reduced pressure for a complete melt cycle. In another system a large mould chamber is isolated by vacuum gate valves with movable mould cars so that again the melting chamber can be maintained under reduced pressure for a complete melt cycle. In another design the entire mould chamber and turntable can be moved and the two chambers are separated by a vacuum gate valve

- 2 -

so that one or more moulding chambers can be brought into position to receive the melt from the melting chamber.

In all of the aforementioned arrangements the melting chamber is fixed or else can move horizontally, but the melting unit is tiltable inside the melting chamber so that the melt can be poured either directly into the mould or more usually into a tundish which directs the melt to an assembly or array of moulds in turn. It will be understood that in the present specification, the term tundish is used to denote a collecting and pouring device of a type well known in the art and movable so as to convey and discharge molten metal, the term including any suitable device of this type, for example a launder of the like.

A different design of vacuum induction chamber is one in which the melt chamber and the melting unit are tilted together, the melt chamber is coupled to a mould chamber through a rotary vacuum seal and a movable launder which is usually resident in the mould chamber is fed through the rotary vacuum seal to receive the melt and direct the flow into the assembly or array of moulds. This system, although offering a degree of flexibility, results in a relatively complex furnace design and limits control over molten metal flow and filtration resulting in excessive turbulence with increased possibility of refractory inclusion. It is difficult to obtain satisfactory rotary vacuum seals, with the result that the problems can occur

- 3 -

in attaining acceptable purity in cast ingots for certain types of materials. In addition rotary seals are complex, difficult to fabricate and maintain.

Perhaps the main problem with all aforementioned designs is that each system is not flexible enough to cope with the various casting processes required. Thus, if more than one type of casting process is required during a specific melting cycle then the whole furnace has to stop production for a different mould chamber to be coupled to the furnace. This introduces long shut-downs and the possibility of atmospheric pollution which can result in the contamination of the melt and the resultant cast product.

There has been proposed a two chamber system separated by a vacuum gate valve consisting of a horizontal melting chamber and mould chamber. In this concept the furnace change is allowed by utilising of two furnace inserts each being mounted on a swivel door. This is alleged to improve casting continuity and the casting of different kinds of melt. However, this arrangement does not solve the basic problem of allowing different types of casting processes without interrupting the complete operation and cycling of the furnace.

It is an object of the present invention to provide an improved vacuum induction melting and casting furnace which obviates or mitigates at least one of the

- 4 -

aforementioned disadvantages.

This is achieved by disposing additional casting stations around the melt chamber and providing a tundish for each additional casting station for selectively
5 transporting melt to the desired casting station. This is conveniently achieved by modifying an existing design of vacuum induction melting and casting furnace to create apertures in the walls of the melting chamber to allow removable tundishes to enter the melt chamber through
10 fixed vacuum seals to receive molten metal from the tiltable melting unit and to convey this through the vacuum gate valve to the desired casting station adjacent to the melt chamber. Conveniently there are two additional casting stations disposed laterally of the melt
15 chamber.

According to one aspect of the present invention there is provided a vacuum induction melting and casting furnace comprising a melt chamber containing a melting unit for melting a material by induction under vacuum, a plurality
20 of casting stations coupled to the melt chamber by valve means, said casting stations being disposed around the periphery of the melt chamber and having respective tundish means associated therewith which are adapted to be moved through respective valves means into said melt
25 chamber so that, in use, a selected tundish means when disposed in said melt chamber receives melt from said melting unit and transfers said melt to its casting

- 5 -

station.

Preferably three casting stations are disposed around the periphery of the melt chamber. Conveniently two of the casting stations are disposed substantially
5 perpendicular to the direction of the tilt of the melting unit so that the melt is transferred at substantially right angles to the direction of pour into said tundish means and into the appropriate casting station. Only one mould chamber at a time may be operational to said melt
10 chamber. Although it is possible to cast from one melt into all three casting stations it is not intended to operate under such conditions unless under special conditions.

Conveniently one of the casting stations includes a
15 mould turntable for rotating a plurality of different moulds into a position for receiving melt from the tundish means coupled to the melt chamber. Additionally one of the other casting stations includes an uphill mould teeming assembly for receiving melt when its particular
20 tundish is connected to the melt station. One of the other casting stations may be coupled to a continuous casting furnace into which the molten metal is transferred and held before being cast into shapes and cropped into lengths.

25 In an alternative arrangement a powder atomising station may replace the uphill mould teeming assembly, the powder atomising station including a movable tundish means

- 6 -

for entering the melt chamber and for conveying melt to said powder atomising station.

These and other aspects of the invention will become apparent from the following description when taken in combination with the accompanying drawings in which:-

Fig. 1 is a diagrammatic plan view of an embodiment of a vacuum melting and induction furnace in accordance with the present invention depicting three casting stations disposed around a melt chamber at right angles.

Fig. 2 depicts a plan view of a proposed layout of a complete vacuum inducting and casting furnace incorporating the design shown in Fig. 1.

Fig. 3 is a side elevation of the vacuum induction and melting furnace shown in Fig. 2 taken in the direction of Arrow A;

Fig. 4 is an elevation of the furnace shown in Fig. 2 taken in the direction of Arrow B, and

Fig. 5 is a view similar to Fig. 3 with a powder atomising chamber replacing the uphill mould teeming assembly shown in Fig. 3.

Reference is first made to Fig, 1 of the drawings which depicts a plan view of a vacuum induction melting and casting furnace generally indicated by reference numeral 10. The furnace consists of a melting chamber 12 which is generally circular or rectangular in cross section and which has three tundish chambers 14, 16 and 18 disposed substantially at right angles to each other about

- 7 -

the circumference of the chamber 12 for selectively transferring the melt from the melt chamber to a selected casting station to be later described in detail.

The melt chamber 12 is generally cylindrical or
5 rectangular in shape and contains a generally cylindrical melting unit 20 which can be tilted to pour molted liquid from the melting unit into tundishes to transfer the molten material into a particular casting station as desired. The melt chamber and melting unit are standard
10 in the art. Casting station 16 contains a mould turntable 22 on which are mounted three different types of moulds 24a, b and c and the turntable rotatable about axis 26. Melt chamber 12 is coupled to casting station 16 through a vacuum gate valve (not shown in the interest of clarity)
15 which is openable to define an aperture so that a movable tundish 28 can be moved between the casting station 16 and the melt chamber 12. The tundish 28 is of a type standard in the art and is basically an elongated trough with weirs, baffles and filters, which, when moved into the
20 melt chamber 12, is disposed beneath spout 30 of the melting unit for guiding molten liquid poured into the tundish along the tundish into the casting station disposed at the opposite end of the tundish; in the diagram the casting station is shown as mould assembly
25 24c. It will be appreciated that once the mould assembly 24c is filled the turntable is rotated so that assemblies 24a and 24b can then also be filled.

- 8 -

In Fig. 1, tundish chambers 14 and 18 are shown to be identical and in the interest of clarity only chamber 14 will be described in detail, although it will be understood that the description also applies to tundish chamber 18.

Tundish chamber 14 for example can accommodate a continuous casting furnace chamber whereby cast bars or tubes are passed through the chamber in the direction of Arrow M. A tundish 32 is disposed in chamber 14 and is generally L shaped in plan. The tundish is movable through an aperture 34 so that the leading end 36 of the tundish lies beneath the spout 30 for transferring melt from the melting unit 20 to continuous casting furnace 31.

When the tundish is retracted into the tundish chamber 14, as shown in solid outline, the aperture 34 is sealed by a valve (not shown in the interest of clarity) and when required this valve is opened so that the tundish is moved into the chamber (as shown in broken outline) so that the leading end lies beneath the spout 30.

Reference is also made to Figs. 2, 3 and 4 of the drawings which are more detailed plan elevational end views of the vacuum induction melting and casting unit when incorporated in a complete furnace assembly. From the drawings it will be seen that the tundish chamber 18 is adapted to receive a set of uphill teeming moulds 38 which can be slid into the position shown. It will also be seen that the melt chamber 12 is coupled to a vacuum

-9 -

pumping and filter system generally indicated by reference numeral 40 for creating the necessary vacuum conditions inside a furnace to achieve the necessary quality of ingot. Also shown is an induction power supply generally indicated by reference numeral 42 which is coupled to the induction coil not shown in the interest of clarity, disposed around the melting unit as is standard in the art to permit the charge within the melting unit to be melted.

As best seen in Figs. 3 and 4 the cylindrical melt chamber 12 has a top roll-away lid 44 to permit a charge to be introduced to the melting unit via charging chamber 46. The casting station 16 is split as shown into two parts; a movable part 16a, containing the turntable and mould and a fixing part 16b, which is disposed beneath tundish chamber 29 which houses movable tundish 28. Similarly movable uphill mould teeming assembly 38 is movable into register with the tundish chamber 33 which houses movable tundish 32. This is also the case with continuous casting furnace 14 disposed in the opposite side of the melt chamber 12.

the arrangement is such that, in use, the roll-away lid is opened to allow servicing of the melting unit, as is standard in the art. The lid is then replaced and the melt chamber is evacuated and a charge from the charging chamber 46 to be deposited in the melting unit 44 is melted and refined in accordance with standard procedures. In order to pour some of the molten charge

-10-

into moulds a, b and c, the casting station 16a is brought into register with chamber 16b, evacuated and the vacuum valve is opened to allow the tundish 28 to move through the aperture so that its leading end is disposed to
5 receive melt poured from the melting unit 20. The molten material is conducted along the tundish and into the moulds 24a, b and c as appropriate. When the moulds are filled as desired the tundish 28 is retracted and the valve closed. When the next batch of molten charge is
10 ready to be dispensed to another of the casting stations, for example, the uphill mould teeming assembly 38, assembly 38 is brought into register with the tundish chamber 33 and the vacuum valve is opened to allow the tundish 32 to pass through the aperture 34 so that the
15 leading end is disposed beneath spout 30 for receiving molten material poured from the melting unit 20. This molten material is then conducted to the uphill mould teeming assembly 38 in accordance with standard techniques. Once the uphill mould teeming assembly has
20 received the required amount of molten liquid the tundish is retracted and the valve closed. This procedure can be repeated for the continuous casting furnace 14.

It will be appreciated that the casting stations can be selected as required in any order to receive the charge
25 from the melting unit 20.

Fig. 5 shows an alternative arrangement in which the uphill mould teeming assembly has been replaced by a

-11-

powder atomising chamber which is of greater depth because of the nature of the power atomising process and is disposed in a deeper excavation in the floor in accordance with standard technology. In this case like numerals 5 denote like parts and the powder atomising chamber 50 is disposed beneath the tundish 33 for receiving melt in the same way as uphill mould teeming assembly 38.

There is provided a control station generally indicated by reference numeral 52 which permits an 10 operator to control the sequence of pouring into the mould chambers selected as appropriate using the apparatus and procedure as described above.

Various modifications would be made to the vacuum induction melting and casting furnace hereinbefore 15 described without departing from the scope of the invention. For example, although three casting stations are shown coupled to the melting chamber it will be appreciated that only two such casting stations may be coupled, or alternatively more than three casting stations 20 may be coupled, although it will be understood that this may require longer tundishes and that the practical length of the tundishes may be determined by the temperature to be achieved in the metal being melted. The basic furnace can be modified so that any suitable type of casting 25 station such as turntable station, or continuous casting, an uphill mould teeming assembly or powder atomising furnace may be connected as described above or for example

-12-

a plurality of turntable moulding stations may be connected. The furnace is of course suitable for melting, treating and casting of super alloys and high grade steels under vacuum or in an inert gas atmosphere. Non-ferrous materials can also be used and furnace may have applications in degassing of special steels and non-ferrous materials for the foundry industry.

An advantage of the present invention is that the furnace can be set up so that a continuous casting station, mould filling station with rotary mould turntable or mould trolley, uphill teeming station, and other different modes of casting vacuum melting materials which may normally be required, can be incorporated without the need to interrupt the standard operation of a vacuum melting and casting furnace for long periods of time due to shut down.

In addition the basic furnace has straightforward control of valves and tundishes and is readily modified by the provision of additional casting processes for centrifugal casting and investment casting of large moulds. The invention is based on proven reliable technology, offers increased flexibility and removes the requirement for rotary vacuum seals. The invention further increases the reliability and flexibility, minimising the expense of the vacuum induction melting and casting furnaces.

With the increasing demand of materials requiring to

-13-

be vacuum melted the invention provides the flexibility to
have a number of casting stations situated around the one
vacuum melting chamber thereby minimising the expense and
requirement for multiple vacuum induction melting and
5 casting units.

-14-

CLAIMS

1. A vacuum induction melting and casting furnace comprising a melt chamber containing a melting unit for melting a material by induction under vacuum, a plurality of casting stations coupled to the melt chamber by valve means, said casting stations being disposed around the periphery of the melt chamber and having respective tundish means associated therewith which are adapted to be moved through respective valves means into said melt chamber so that, in use, a selected tundish means when disposed in said melt chamber receives melt from said melting unit and transfers said melt to its casting station.
2. A furnace as claimed in claim 1 wherein three casting stations are disposed around the periphery of the melt chamber.
3. A furnace as claimed in claims 1 or 2 wherein two of the casting stations are disposed substantially perpendicular to the direction of the tilt of the melting unit so that the melt is transferred at substantially right angles to the direction of pour into said tundish means and into the appropriate casting station.
4. A furnace as claimed in any preceding claim wherein one of the casting stations includes a mould turntable for rotating a plurality of different moulds into a position for receiving melt from the tundish means coupled to the

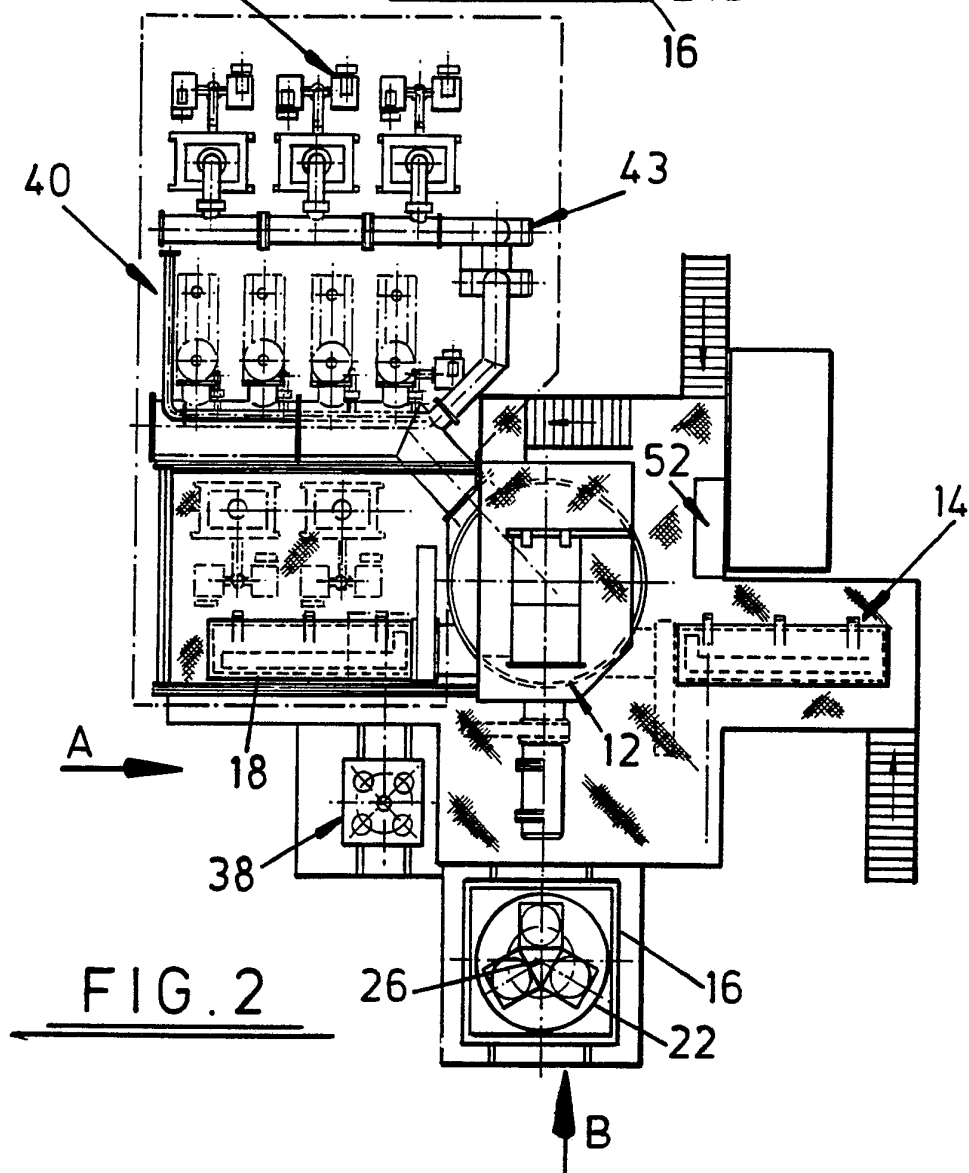
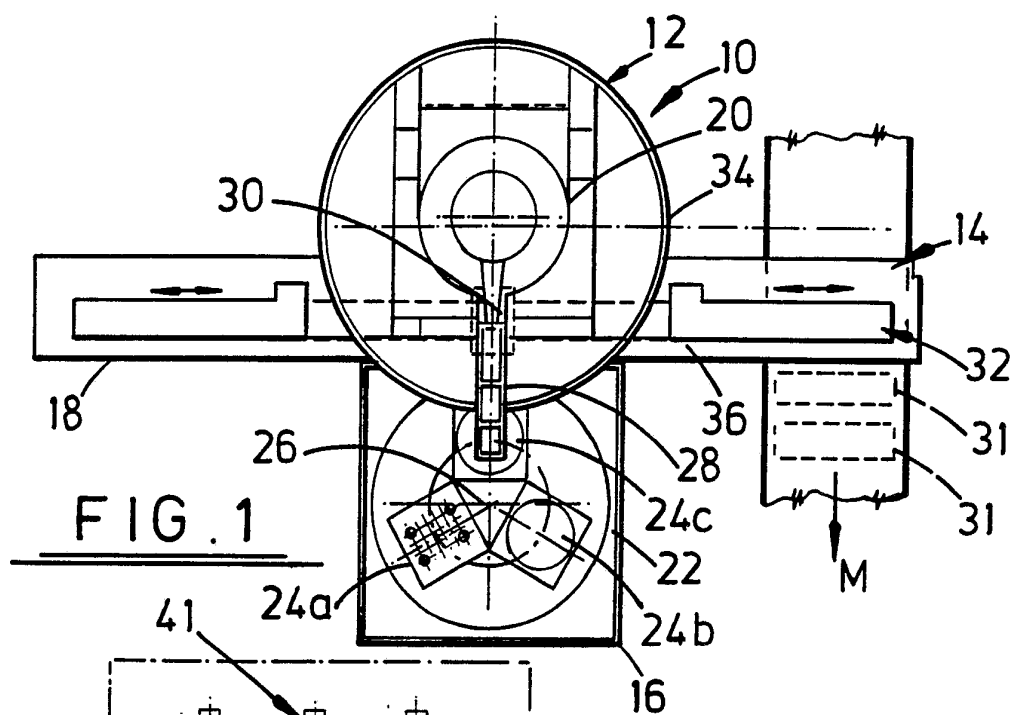
-15-

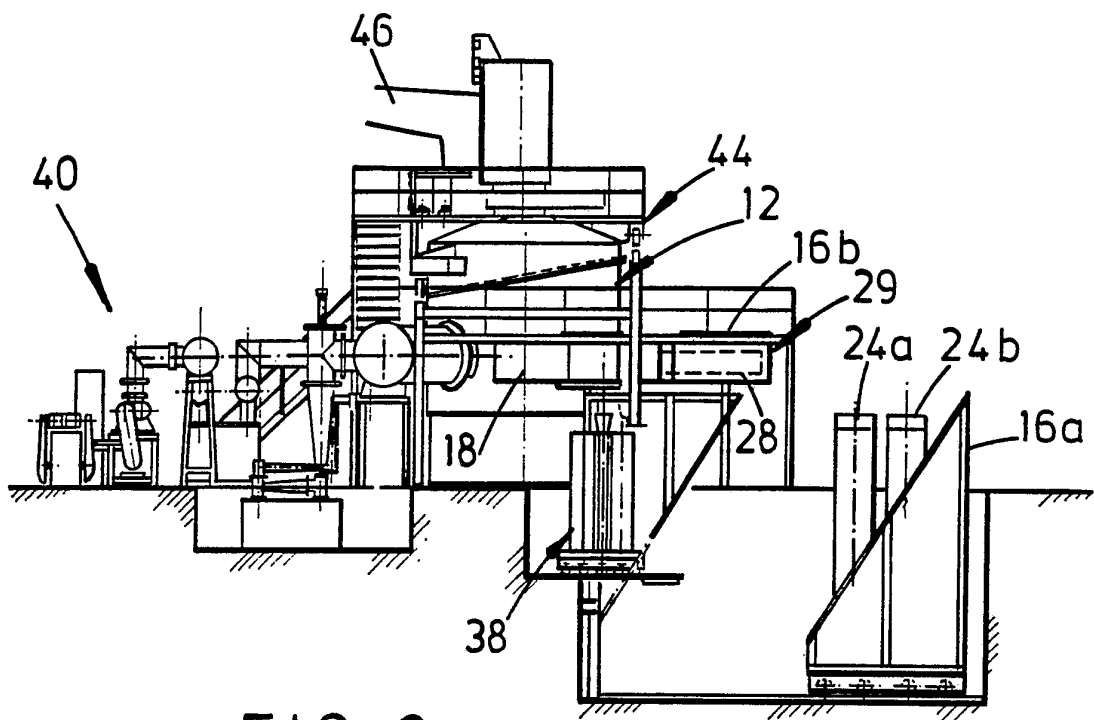
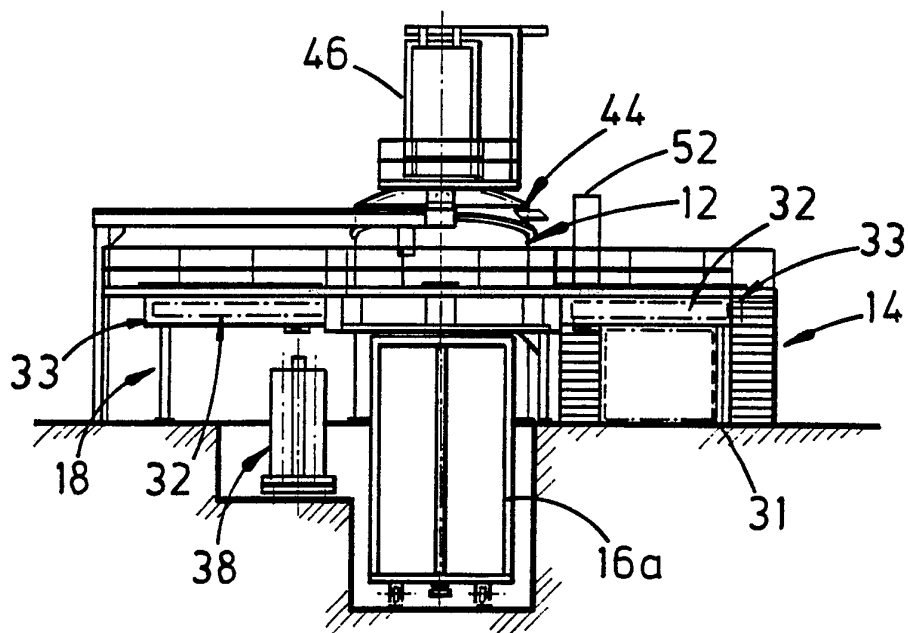
melt chamber.

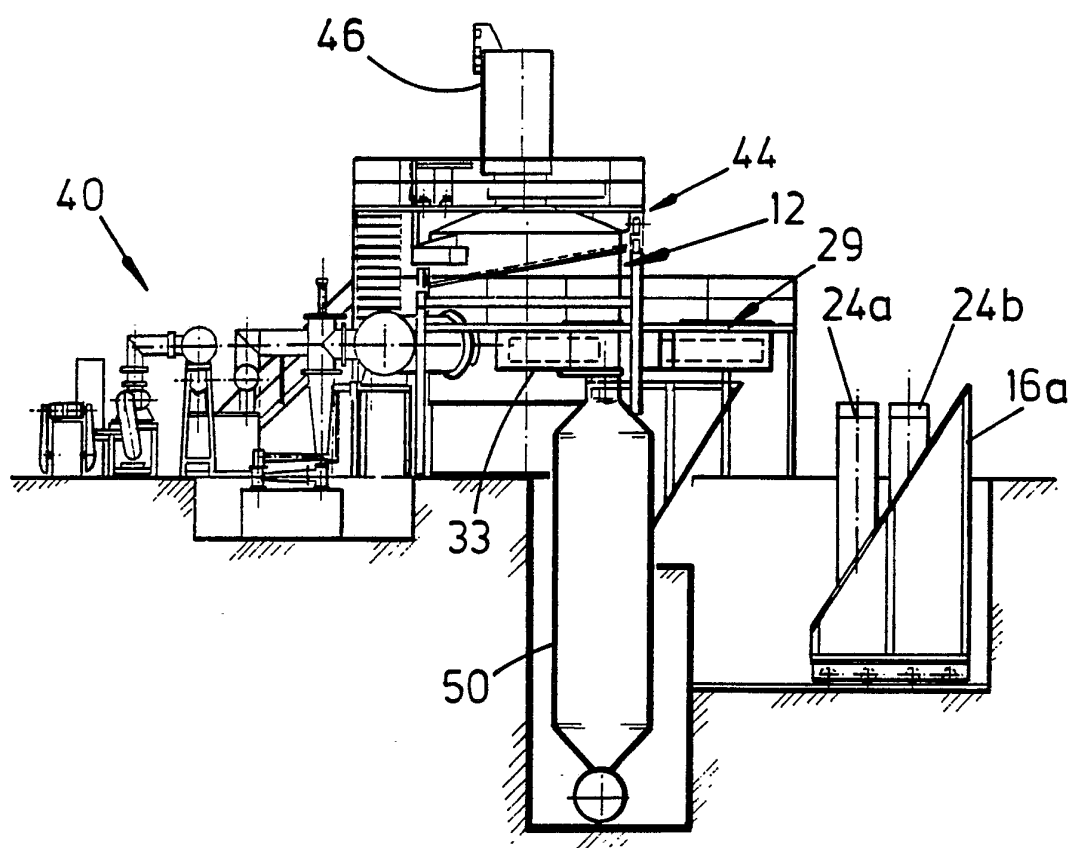
5. A furnace as claimed in any preceding claim wherein one of the other casting stations includes an uphill mould teeming assembly for receiving melt when its particular
5 tundish is connected to the melt station.

6. A furnace as claimed in any preceding claim wherein one of the other casting stations may be coupled to a continuous casting furnace into which the molten metal is transferred and held before being cast into shapes and
10 cropped into lengths.

7. A furnace as claimed in any one of claims 1 to 5 wherein a powder atomising station may replace the uphill mould teeming assembly, the powder atomising station including a movable tundish means for entering the melt
15 chamber and for conveying melt to said powder atomising station.




FIG. 3FIG. 4

FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 90/00474

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ⁵ : B 22 D 41/00, F 27 D 3/14		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC ⁵	B 22 D, F 27 B, F 27 D	
Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	US, A, 2225173 (H.B. HANSON) 17 December 1940 --	
A	DE, B, 1204695 (MAERZ OFENBAU AG) 11 November 1965 -----	
<p>¹⁰ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
3rd August 1990	11 SEP 1990	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	Mme N. KUIPER 	

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

GB 9000474
SA 35805

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 05/09/90
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 2225173		None	
DE-B- 1204695		None	