




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>5</sup> : <b>H04N 5/76</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 94/24817</b> (43) International Publication Date: 27 October 1994 (27.10.94)</p>
<p>(21) International Application Number: PCT/US94/04250 (22) International Filing Date: 18 April 1994 (18.04.94) (30) Priority Data: 08/048,645 16 April 1993 (16.04.93) US (71) Applicant: AVID TECHNOLOGY, INC. [US/US]; Metropolitan Technology Park, One Park West, Tewksbury, MA 01876 (US). (72) Inventors: PHILLIPS, Michael, E.; 21 Bartlett Crescent, Brookline, MA 02146 (US). O'CONNOR, Patrick; 8 Gilman Road, Billerica, MA 01821 (US). PETERS, Eric; 80 Carleton Road, Carlisle, MA 01741 (US). (74) Agent: MIRABITO, A., Jason; Wolf, Greenfield &amp; Sacks, 600 Atlantic Avenue, Boston, MA 02210 (US).</p>	<p>(81) Designated States: AU, CA, CN, GB, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: METHOD AND APPARATUS FOR SYNCHRONIZING A STREAM OF PICTURE DATA WITH A CORRESPONDING STREAM OF AUDIO DATA

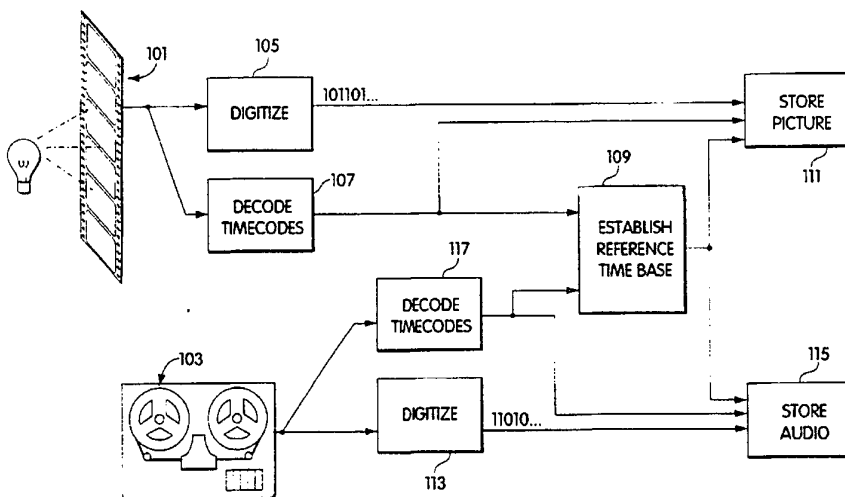

(57) Abstract

A method of synchronizing digitized audio information (113) and digitized picture information (105) establishes a reference time base (109) based on timecodes (107 & 117) included with the audio and picture information. The reference time base may be used to synchronize output between a digitized source and one which may be digitized or undigitized.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

-1-

## METHOD AND APPARATUS FOR SYNCHRONIZING A STREAM OF PICTURE DATA WITH A CORRESPONDING STREAM OF AUDIO DATA

### BACKGROUND

#### Field of the Invention

The present invention relates generally to fields of motion picture, television and other multi-media production. More particularly, the invention relates to methods for synchronizing the media comprising a motion picture, television or other multi media production so as to facilitate viewing and editing.

#### Prior Art

Synchronization of multiple media sources is a problem which has plagued the motion picture production industry since the days of the early talkie movies. The techniques by which images are recorded on movie film and the techniques by which sound is recorded on a suitable sound recording medium naturally differ. Therefore, it has been common, since those early days, for two independent pieces of equipment to be used to record image and sound.

In the early days, images were invariably recorded as a sequence of frames on a continuous strip of photographic film. In contrast, sound was recorded as a microscopic wavy groove in either a wax cylinder or a wax disk. Some audio was recorded on the set, but much audio was recorded while observing a screening of the film.

Synchronization of a projected picture with corresponding audio was quite crude. Picture and audio would be started at a reference point established at the program. The speed of one or the other would be manually adjusted when loss of synchronization was observed. However, such techniques provide very poor synchronization, are unsuitable for synchronizing long programs and are unsuitable for synchronizing multiple tracks of audio with picture.

-2-

In modern studios, picture may be recorded on film or video tape, in a variety of formats. Audio is likely to be recorded on magnetic recording tape, also in a variety of formats. Whenever multiple tracks of source material are used to create a final production or composition, synchronization of one or more pictures with one or more tracks of audio may be required.

The use of a customary slate at the beginning of each take of a scene helps facilitate synchronization of audio recorded on the set with picture recorded on the set. The slate produces a sharp and distinct sound on the audio recording, simultaneous with an identifiable visual event, such as a bar hitting the top of the board. Additionally, during recording, the camera and the audio recording equipment may be mechanically or electrically synchronized, so that corresponding lengths of film and audio media are used. Consequently, to synchronize these source media for editing or viewing requires only that the sound of the slate in the audio track be aligned with the image of the bar hitting the top of the board. Then the two media may be mechanically or electrically locked together for playback or editing.

For greater flexibility, including the use of multiple tracks recorded either on the set or off the set, timecodes have been developed for aiding in the establishment and maintenance of synchronization in the circumstances such as described above. One type of commonly used timecode is that developed by the Society for Motion Picture and Television Engineers (SMPTE), which may be imprinted in an unused margin of the film or audio media during filming so as to indicate an absolute time reference for each frame of film. The imprinting of the SMPTE timecodes may be human readable, e.g., as numbers in the margin of the film, or may be machine readable, e.g. as bar codes in the margin of the film. Another time reference used on film media is the Eastman Kodak KEYCODE number. Among other things, the KEYCODE number

-3-

acts as a roll and frame counter, by which any frame of a production may be absolutely identified. It is also recorded in the film margin, but KEYCODES are recorded on film stock at the time of manufacture.

Synchronization during playback may be achieved as follows. First, all the media are aligned manually to a starting point. During playback, timecodes are read off all of the media to be synchronized. The playback speeds of the media are then adjusted so as to cause the timecodes read off the media to coincide throughout the playback. Such systems employ standard feedback techniques to cause the playback speeds of all the media but one to follow the playback speed of the one.

However, the techniques discussed above are inadequate for modern electronic production and editing. As discussed above, current techniques still require physically aligning and synchronizing source media each time a source is to be played or edited. As noted above, this procedure requires manual alignment. It is therefore slow, labor-intensive and prone to error. Furthermore, at stages of production before a final editing sequence has been created, it is difficult to synchronize multi-track audio with cut film.

Systems are also available which can synchronously display digitized audio and video data. One such system is disclosed in Peters et al., U.S.P. 5,045,940. However, such systems assume synchronization between sources has previously been established. Another such system is commonly known as a lock box. A lock box performs crude synchronization between video and film. However, lock boxes do not accurately synchronize frame by frame, because they depend upon the frame rate of the source media, which differs between video and film.

Therefore, it is a general aim of the present invention to provide a method for synchronizing picture and audio in modern production and post production facilities. More

generally stated, it is an aim of the present invention to provide a method of synchronizing a multi-media presentation at all stages of production and post-production.

#### SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, there is provided a method for synchronizing a stream of digitized picture data with a stream of digitized audio data. The stream of digitized picture data includes a stream of picture timecodes and the stream of audio data includes a stream of audio timecodes. The method includes steps of: establishing a referenced time base synchronous with one of the stream of picture time codes and the stream audio timecodes; associating another of the stream of picture time codes and the stream of audio timecodes with the reference time base; and, storing as a track group synchronous over a range of time for which the picture data and the audio data coincide, the digitized stream of picture data including the picture timecodes, the digitizes stream of audio data including the audio timecodes and the referenced timebase.

According to another aspect of the present invention, the method may include steps of digitizing the stream of picture data, digitizing the stream of audio data, decoding the stream of picture timecodes and decoding the stream of audio timecodes.

In accordance with another aspect of the present invention, there is provided apparatus for synchronously displaying film dailies and corresponding audio. Such apparatus may include a film projector, means attached to the film projector for producing a stream of picture time codes, means for storing digitized audio data having a referenced time base, and means responsive to the stream of picture timecodes for reproducing the audio data synchronous with the picture timecodes.

-5-

In accordance with yet another aspect of the present invention, there is provided a negative cutter apparatus. The negative cutter may include a sync block having a means for determining a starting frame number, a shaft and coder for giving a continuous indication of the position of the media and a digital playback system for comparing current media position with cuts indicated on a digital workprint.

#### BRIEF DESCRIPTION OF THE DRAWING

In the drawing, wherein like reference numerals indicate like elements:

Fig. 1 is a block diagram illustrating digitization of multiple media sources and establishment of a reference timebase for the digitized sources;

Fig. 2 is a block diagram illustrating the elements of a system suitable for accomplishing the digitization and synchronization of Fig. 1;

Fig. 3 is a block diagram illustrating one system for synchronous playback of digitized source media in conjunction with the display nondigitized source media; and

Fig. 4 is a block diagram of a negative cutter system employing the synchronization techniques of the present invention.

#### DETAILED DESCRIPTION

The invention will be better understood by reading the following description of embodiments of the invention in conjunction with the drawing.

The present invention seeks to establish synchronization between multiple media sources which are being digitized for further production work. One context in which this may be desirable is that described in pending U.S. Patent Application Serial No. 07/920,260, filed July 27, 1992, of Michael Wissner for A METHOD AND APPARATUS FOR REPRESENTING

AND EDITING MULTI-MEDIA COMPOSITIONS, incorporated herein by reference. Of particular interest is the description of the data structures contained therein.

A method of achieving synchronization between multiple sources, in accordance with one aspect of the present invention is now described in connection with Fig. 1. Apparatus suitable for practicing this method will be described below in connection with Fig. 2.

This aspect of the present invention makes use of timecodes and timecode readers known in the art and manufactured by AATON and ARRIFLEX under their respective trademarks. Source material, such as film 101 and audio tape 103 may be recorded so as to include timecodes according to one of the common systems noted above. The timecodes are recorded periodically on the medium, so as to establish an exact time relationship between each element of the medium and some absolute reference time. For example, each frame of a film 101 has a timecode associated therewith and printed on the edge of the film adjacent to the frame. The recorded timecode represents the absolute time at which that frame was recorded. During the recording of audio tape 103, timecodes are incorporated which correspond to the timecodes representing the frames of film 101. Thus when audio 103 is recorded at the same time as film 101 is shot, each time a timecode is recorded on film 101 the same timecode is recorded on audio tape 103. However, the proper relationship may be established even when audio is recorded separately from film. In that case, the absolute time indicated by the recorded timecodes on audio tape 103 may differ from those of film 101. Furthermore, if different frame rates were used for picture and audio, then the time between timecodes recorded on audio tape 103 will differ from the time between the timecodes recorded on film 101. However, since timecodes represent absolute time, it is still possible to identify any point on audio tape 103 as corresponding with a frame on film 101 by use of the timecodes.



-7-

In a subsequent processing step, both picture and audio may be digitized for electronic storage. These operations may occur independently of each other, in series or simultaneously. Since the operations are independent, they will be described separately, assuming for the purposes of this example that film 101 is digitized first. However, there is no loss of generality and the same operations may be performed in any sequence noted above.

Film 101 is digitized 105 simultaneous with reading and decoding of timecodes 107, which have been previously recorded in the margin of the film, for example. Decoded timecodes from film 101 are then used to establish a reference timebase 109. The reference timebase is used to accomplish synchronization as discussed below.

Since the timecodes recorded on film 101 represent absolute time at which each frame was recorded, there will ordinarily be time gaps between the last timecode of one take and the first timecode of a subsequent take. The source material is divided into clips at each such discontinuity in the timecode. The reference timebase for each clip is essentially periodic timing information stored with the digitized clip and beginning at time 0 at the beginning of the clip. The information ultimately stored with each clip includes the digitized source, the decoded timecodes and the reference time base. The reference time base acts essentially as a frame or footage counter for locating a position within the clip. In the case of film 101, these three types of information are stored as picture information 111.

By a similar process, audio tape 103 is digitized 113 and stored 115. Like film 101, audio tape 103 also includes timecodes recorded therein. The timecodes are decoded 117 and used to establish a reference timebase 109 to be stored along with the digitized audio information 115.

-8-

The beginning of clip of picture information and the clip of audio information is identified by a common starting timecode, thus establishing time "0" of the reference time base. If film 101 and audio tape 103 were originally recorded simultaneously, corresponding stored pictures and stored audio are now synchronized by virtue of having common reference timebases.

Sometimes the picture timecodes and audio timecodes recorded with each source to be synchronized are not common. For example, if one timecode generator was used for picture, and another timecode generator whose clock was set differently was used for audio, then the recorded timecodes are not in common. If multiple sources do not have common timecodes, then an offset may be applied to bring them into alignment, if desired. That is, time "0" of the reference timebase for picture may be one timecode, while that for audio may be a different timecode. However, once the timecodes for time "0" of the reference time base have been established, the common reference time base maintains synchronization between the digitized sources.

A system suitable for performing synchronization as described above is now described in connection with Fig. 2. This system is given by way of example only, and the principles of the present invention may be embodied in other hardware implementations.

The embodiment now described is based on modern computer technology. For example, some elements of this system may be incorporated within a commonly available personal computer system.

The system is controlled by a central processing unit (CPU) 201. CPU 201 communicates with other elements of the system via address bus 203 and data bus 205 in a conventional manner. Information including software program steps and other data which facilitate performance of the control function by CPU 201 may be stored in read only memory (ROM) 207. The software program steps and data stored in ROM 207

are not readily alterable. Additional program steps and data may be stored in some form of mass storage device 209, for example a hard disk drive or tape drive. In order to use program steps or data stored in ROM 207 or mass storage device 209, CPU 201 may transfer such data to a random access memory (RAM) 211. Finally the system may be provided with one or more user I/O devices 213. These devices may include, but are not limited to keyboards, pointing devices, monitors and printers. Taken together, the above described elements of the system may constitute a personal computer system 215 including one or more add on user I/O devices 213.

To a system as described above, one or more media digitizers 217 and corresponding timecode decoders 219 are added. A digitizer appropriate to each type of media to be used with the system is required, as well as a timecode decoder appropriate for use with any included media digitizer and suitable for decoding any expected timecode format. Digitizers 217 which may be used in this embodiment include video cards manufactured by TRUEVISION and DIGIDESIGN. The Avid Film Composer employs such video cards, specially modified to provide additional functionality required by that product. Timecode decoders such as those manufactured by AATON or ARRIFLEX and commonly in use are suitable for application as timecode decoders 219.

Once synchronization of digitized sources has been achieved as described above in connection with Fig. 1, certain novel playback techniques may be used in accordance with another aspect of the present invention. A first such novel technique is now described in connection with Fig. 3.

When a director desires to periodically check the quality of work then being filmed, he may rely on viewing those rolls of film shot in the previous day, commonly known as "dailies." Dailies are quickly processed and do not include integral audio information. Thus, the audio

-10-

corresponding to a roll of dailies must be synchronized with the roll, while it is being viewed, so as to provide a useful display of the day's work.

In accordance with this aspect of the present invention, a personal computer 215, such as described above in connection with Fig. 2 is used. Mass storage device 209 holds the digitized audio information corresponding to the dailies to be shown, including the original timecodes and the information representing the reference timebase. The control function represented by certain computer program steps being executed by CPU (Fig. 2, 201) give computer 215 the function of dailies synchronizer 301. When the director views dailies, he views an image 303 projected using raw, uncut film 305. As noted above, film 305 does not include the audio tracks, which have been recorded separately. It is this audio which is held in mass storage device 209. The projector 307 by which film 305 is shown may be fitted with a timecode reader 309.

Timecodes read off film 305 are decoded and fed into dailies player 301. The decoded timecodes are then converted into the reference timebase and used to retrieve corresponding audio information from mass storage device 209. Such audio information may then be reproduced by audio reproduction equipment 311, synchronous with the image 303 projected by projector 307. Thus, the audio and picture synchronization which previously had to be performed by hand prior to projecting film 305 may be accomplished automatically.

In an alternate embodiment, timecode reader 309 may be replaced with a bi-phase generator and a bi-phase-to-timecode converter, such as that manufactured by LYNX. This alternate arrangement produces timecodes synchronous with the running projector and beginning with any arbitrary timecode an operator may set.

-11-

Another novel aspect of synchronization in accordance with the present invention is illustrated in connection with a negative cutter, as shown in Fig. 4.

Media 401, such as film or audio tape is threaded into sync block 403. Sync block 403 include a KEYCODE reader 405. KEYCODE readers are commonly available from such manufacturers as EVERTZ, CINEMA PRODUCTS, AATON, ARRIFLEX and SKOTEL. KEYCODES are a reference code indicating frame numbers on film media 401. However, KEYCODES are recorded on the film 401 only about once each 1/2 foot. Given an initial KEYCODE for a particular piece of film 401, which is currently threaded into sync block 403, a digital playback system 407 may be made to receive a continuous indication of the position of media 401 within sync block 403 by means of shaft encoder 408.

Another input to digital playback system 407 is a digital work print 409. Digital workprint 409 is preferably an optical disk containing the result of producing a composition using the method and apparatus described in the above-referenced patent application Serial No. 07/920,260 The data contained on the digital workprint 409 includes the digitized picture and audio information, the original time codes associated with each picture clip and audio clip, the reference time base information and various sequencing information as described in the above-referenced patent application with respect to a complete composition. By using the information described, digital playback system 407 can be used to indicate on a monitor 411, or by other means such as sounding a beep tone, when the media 401 threaded in sync block 403 is located at a position where a cut is to be made. This is possible because the start and end of each clip on digital workprint 409 are clearly indicated by the timecodes originally associated with that clip, and those timecodes may be readily converted to KEYCODES, knowing the time between frames and the first KEYCODE on a particular piece of media. Thus, the editor of a composition need not

-12-

produce a traditional paper cutlist, which may be prone to transcription errors. Rather, the digital work print serves the function of informing the negative cutter the precise location of cuts to be made.

The present invention has now been described in connection with specific embodiments thereof. The foregoing description should suggest to those skilled in the art modifications and extensions of those embodiments, which are contemplated as falling within the scope of the present invention. The present invention is not intended to be limited by the foregoing description, but is limited only by the scope of the appended claims.

What is claimed is:

-13-

CLAIMS

1. A method for synchronizing a stream of digitized picture data including a stream of picture timecodes with a stream of digitized audio data including a stream of audio timecodes, comprising the steps of:

establishing a reference time base signal as a counter synchronous with one of the stream of picture timecodes and the stream of audio timecodes;

fixing a relationship between another of the stream of picture timecodes and the stream of audio timecodes, and the reference time base signal; and

storing as a track group synchronous over the range of time of coincidence, the reference time base signal, the one and the another of the stream of picture timecodes and the stream of audio timecodes in relationships established and fixed with respect to the reference time base signal, the digitized stream of picture data corresponding to the stream of picture timecodes and the digitized stream of audio data corresponding to the stream of audio timecodes.

2. A method for synchronizing a stream of picture data including picture timecodes with a corresponding stream of audio data including audio timecodes, comprising the steps of:

digitizing the stream of picture data;

digitizing the stream of audio data;

decoding the stream of picture timecodes included with the picture data;

decoding the stream of audio timecodes included with the audio data;

establishing a reference time base signal as a counter synchronous with one of the decoded stream of picture timecodes and the decoded stream of audio timecodes;

fixing a relationship between another of the decoded stream of picture timecodes and the decoded stream of audio timecodes and the reference time base signal; and

-14-

storing as a track group synchronous over the range of time of coincidence, the reference time base signal, the one and the another of the stream of picture timecodes and the stream of audio timecodes in relationships established and fixed with respect to the reference time base signal, the digitized stream of picture data corresponding to the stream of picture timecodes and the digitized stream of audio data corresponding to the stream of audio timecodes.

3. The method of claim 2, wherein the step of establishing further comprises the step of:

establishing a beginning point of the reference time base signal to be coincident with a beginning timecode of the one of the stream of picture timecodes and the stream of audio timecodes.

4. The method of claim 3, wherein over the range of time of coincidence the picture timecodes differ from the audio timecodes and wherein the step of fixing further comprises the step of:

fixing the beginning point of the reference time base signal to be coincident with a beginning timecode of the another of the stream of picture timecodes and the stream of audio timecodes.

5. A method for synchronizing digitized audio signal including audio timecodes with a film source, comprising the steps of:

reading time information from the film source while being projected;

decoding the time information read, so as to produce a stream of picture timecodes;

establishing a reference time base signal as a counter synchronous with the picture timecodes;

fixing a relationship between the reference time base signal and a first audio timecode;



-15-

reproducing the digitized audio signals in synchronism with the reference time base signal, whereby audio is reproduced in synchronism with the film source.

6. The method of claim 5, wherein the time information includes machine readable timecodes on the film.

7. The method of claim 5, wherein the time information includes a bi-phase signal and the step of decoding further comprises the steps of:

determining as a beginning timecode an arbitrary timecode; and

converting the bi-phase signal into the stream of picture timecodes beginning with the arbitrary timecode.

8. The method of claim 5, wherein the step of reading further comprises the steps of:

reading a coded frame number from the film source; and  
reading a continuous position indication from a shaft encoder through which the film source is threaded.

9. Apparatus for synchronizing a plurality of streams of media data, comprising:

a plurality of media digitizers, each including a corresponding time information decoder; and each having an output including a stream of digitized media data and a stream of timecodes;

a memory for storing the streams of digitized media data and the stream of timecodes;

means for establishing a reference time base signal as a counter synchronous with one of the stream of picture timecodes and the stream of audio timecodes;

means for fixing a relationship between another of the stream of picture timecodes and the stream of audio timecodes, and the reference time base signal; and

-16-

means for storing as a track group synchronous over the range of time of coincidence, the reference time base signal, the one and the another of the stream of picture timecodes and the stream of audio timecodes, the digitized stream of picture data and the digitized stream of audio data.

10. The apparatus of claim 9, wherein at least one time information decoder includes:  
a bi-phase decoder.

11. The apparatus of claim 9, wherein at least one time information decoder includes:  
a frame number reader; and  
a shaft position encoder.

12. A method of synchronizing a plurality of streams of digitized audio/visual data including corresponding streams of absolute time indications with each other, comprising the steps of:

establishing a reference time base signal having a predetermined start time and defined to be synchronous with a first stream of absolute time indications;

second stream of fixing a relationship between the second stream of absolute time indicators and the reference time base signal such that the start time of the reference time base signal is coincident with the start time of the second stream of absolute time indicators; and

outputting the plurality of streams of digitized audio/visual data corresponding to the reference time base signal by reference to the definition established and to the relationship fixed.

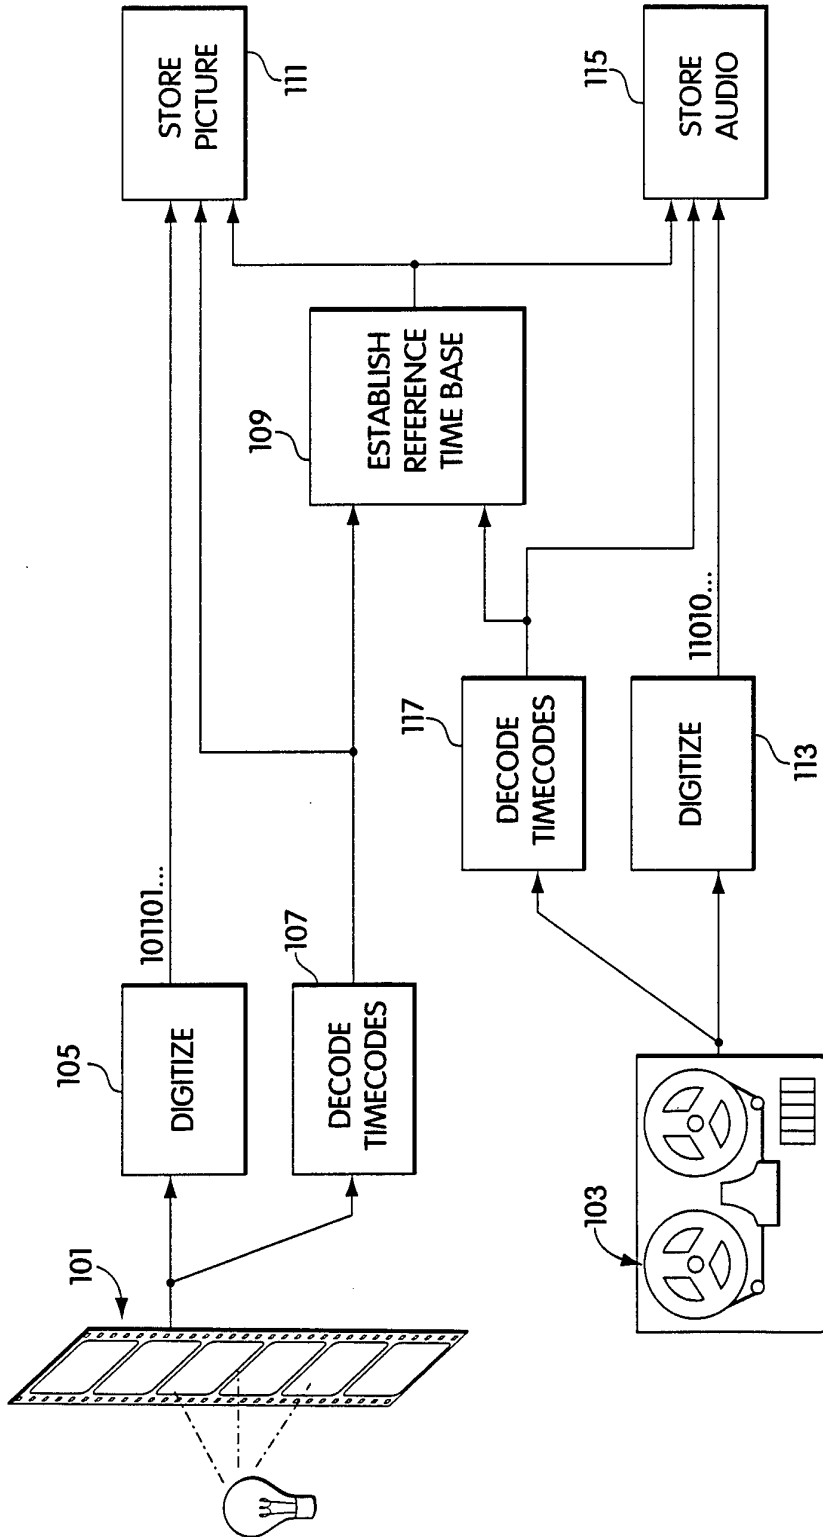


Fig. 1

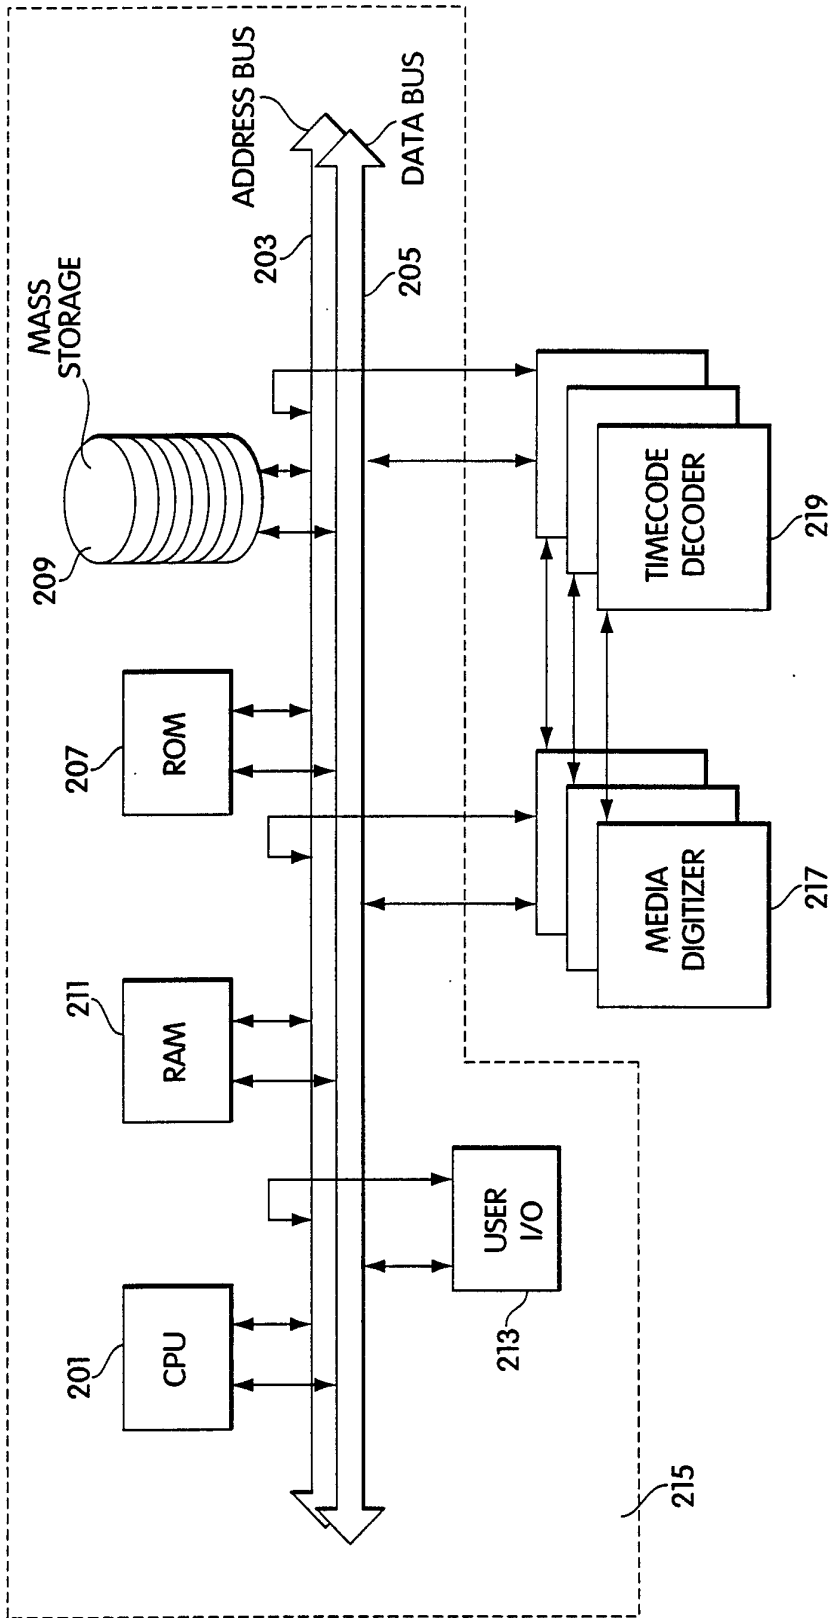


Fig. 2

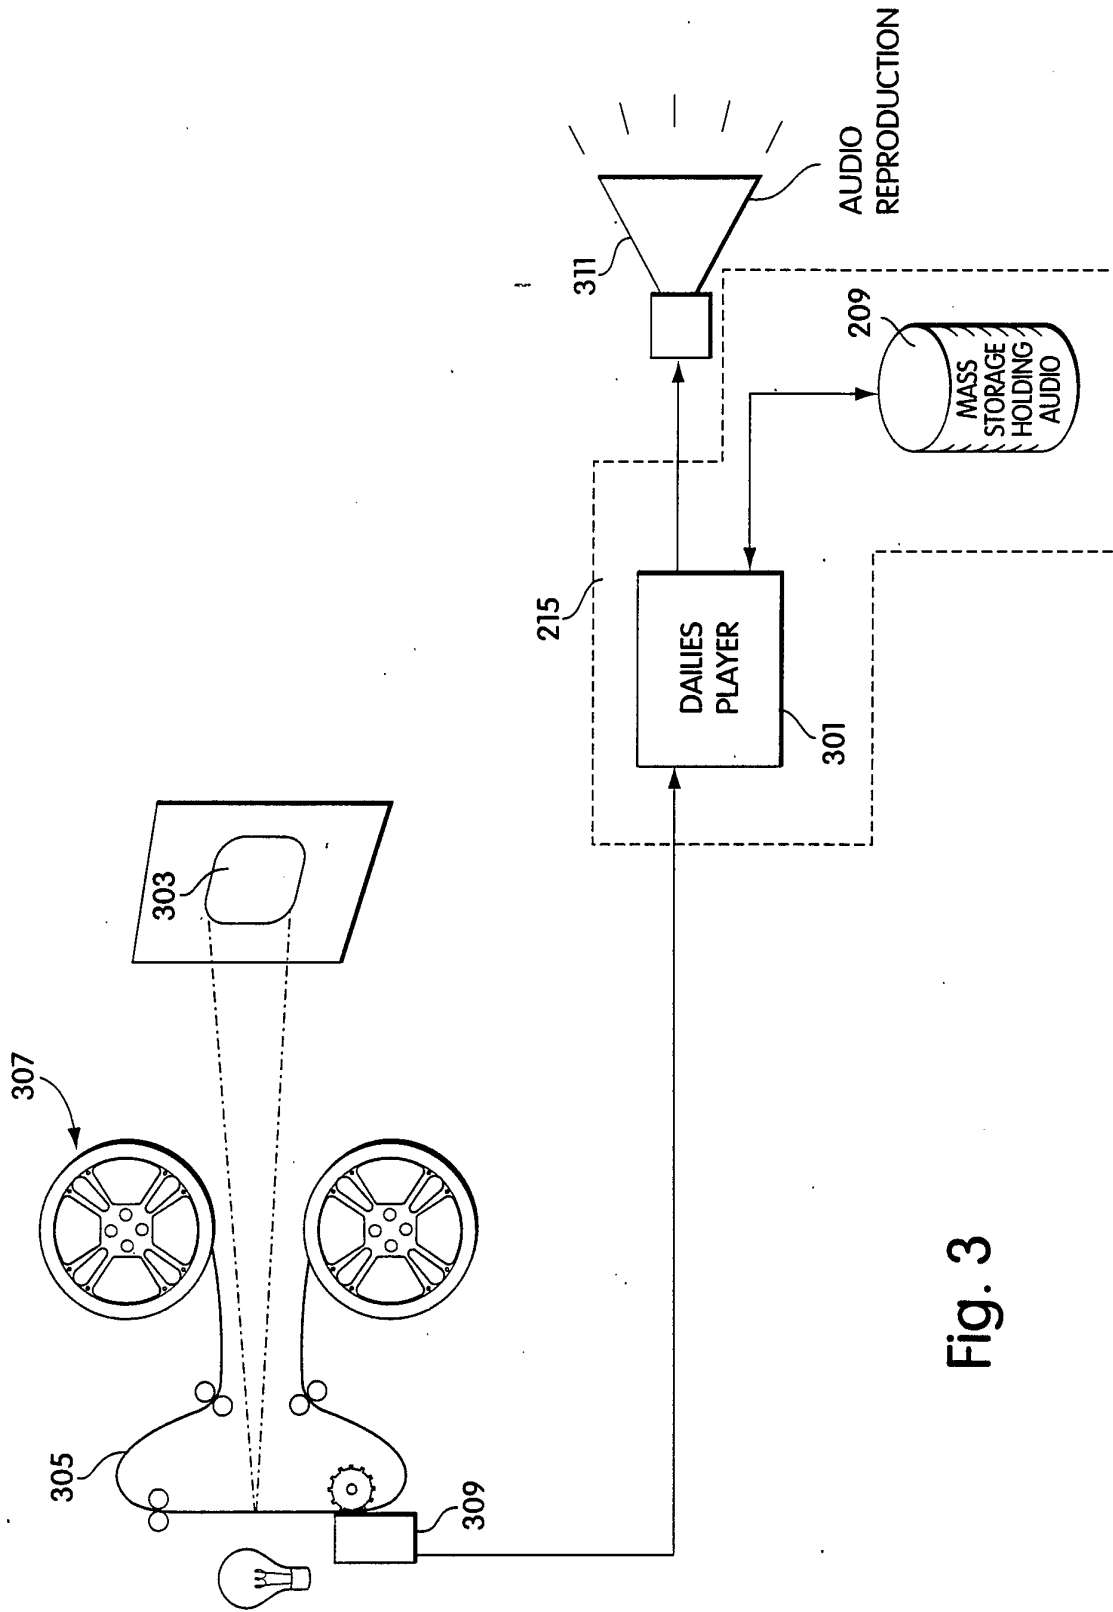


Fig. 3

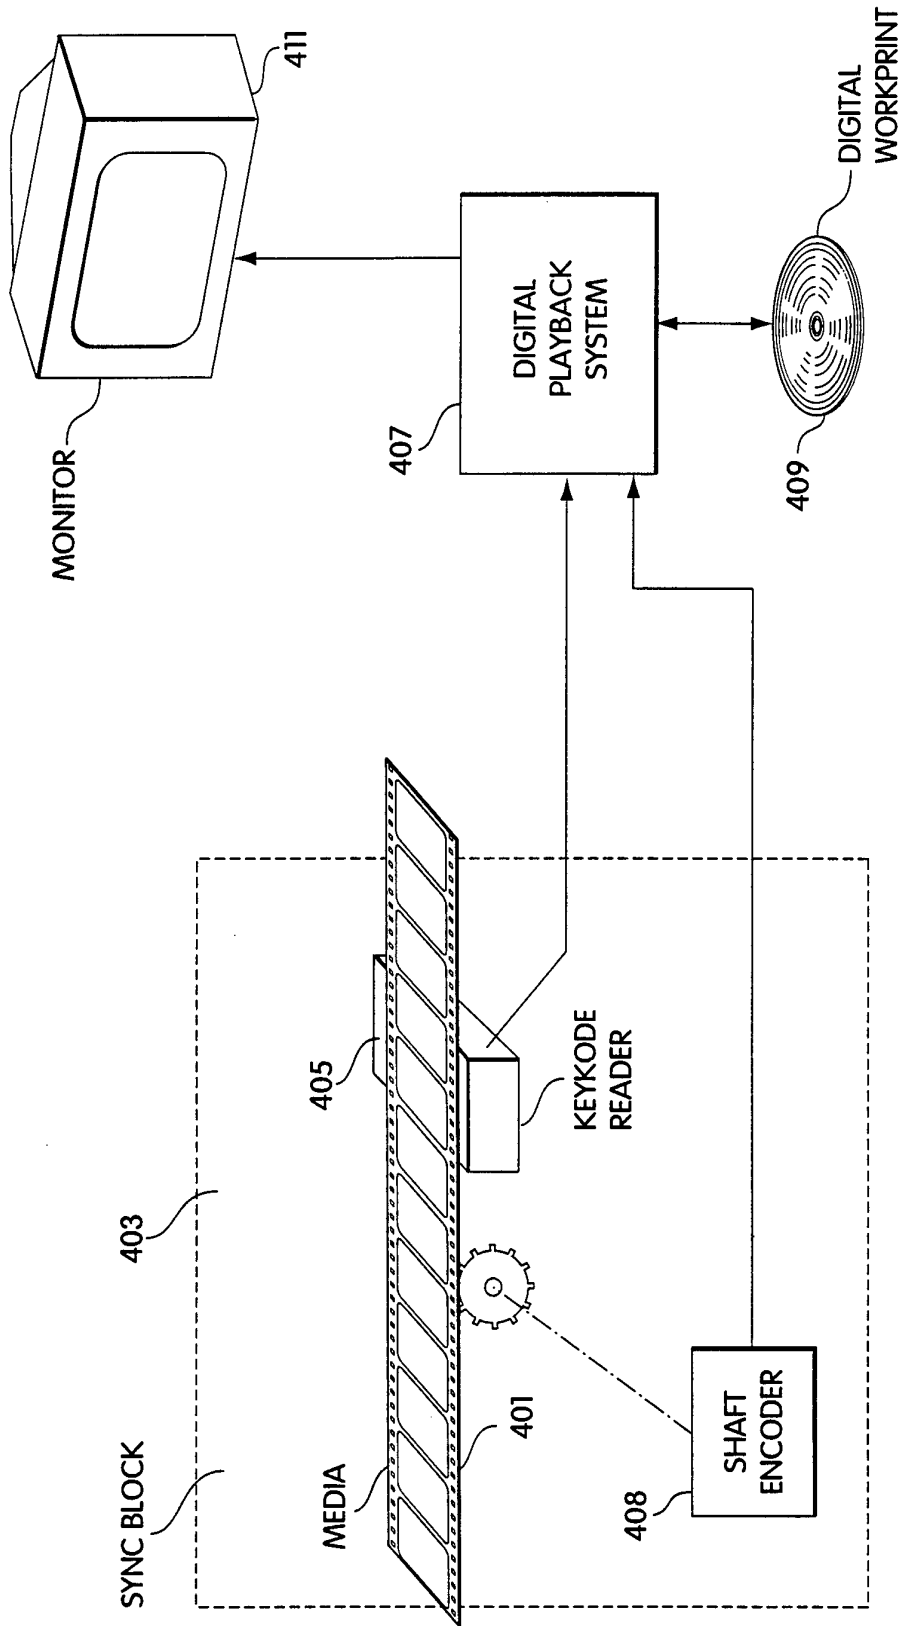


Fig. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US94/04250

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :HO4N 5/76

US CL :358/335

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,819,087 (TAKEUCHI ET AL) 04 APRIL 1989, FIGURE 2, COL. 2, LINE 39 TO COL. 7, LINE 44.	1-5, 9, 12
Y	US, A, 4,587,572 (DIGIULIO) 06 MAY 1986, FIGURE 1, COL. 2, LINE 14 TO COL. 4, LINE 8.	6, 8, 11
Y	US, A, 5,036,409 (KAADEN ET AL) 30 JULY 1991, COL. 4, LINES 1-4.	7, 10
A	US, A, 5,012,352 (YOSHIMURA ET AL) 30 APRIL 1991.	1-12
Y	US, A, 4,961,116 (KANAMARU ET AL) 02 OCTOBER 1990.	1-12

 Further documents are listed in the continuation of Box C.
  See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"G" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

20 JUNE 1994

Date of mailing of the international search report

SEP 02 1994

 Name and mailing address of the ISA/US  
 Commissioner of Patents and Trademarks  
 Box PCT  
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

KHOI TRUONG

Telephone No. (703) 305-4727

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US94/04250

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,914,527 (ASAI ET AL) 03 APRIL 1990.	1-12



**INTERNATIONAL SEARCH REPORT**

International application No.  
PCT/US94/04250

**B. FIELDS SEARCHED**

Minimum documentation searched

Classification System: U.S.

358/335, 311, 337, 339, 341, 343; 360/134, 14.1, 14.2, 14.3, 27, 32, 33.1

IPC (5) : H04N 5/76