

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 August 2006 (10.08.2006)

PCT

(10) International Publication Number
WO 2006/082445 A2

(51) International Patent Classification:
B41J 2/14 (2006.01) **B41J 2/16** (2006.01)
B41J 2/155 (2006.01)

(74) Agents: GARRATT, Peter, Douglas et al.; Mathys & Squire, 120 Holborn, London EC1N 2SQ (GB).

(21) International Application Number:
PCT/GB2006/000422

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 7 February 2006 (07.02.2006)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English


(26) Publication Language: English

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PRINTER ARRANGEMENT AND METHOD OF MANUFACTURE

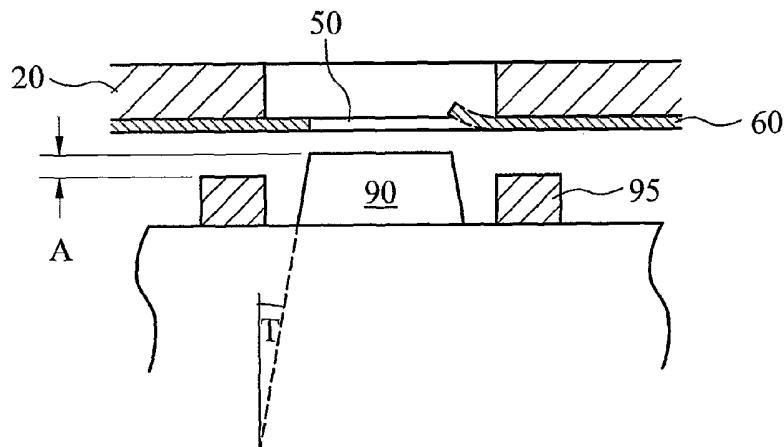

(57) **Abstract:** A mounting arrangement for mounting a printer component to a support, using a foil including a number of mounting apertures, into which pins are inserted to provide alignment. The engagement of the pins in the aperture causes local deformation of the foil, the resulting forces acting to align the pins to an accuracy which can be greater than that to which the foil is manufactured.

WO 2006/082445 A2

PRINTER ARRANGEMENT AND METHOD OF MANUFACTURE

The present invention relates to printing machines, and particularly but not exclusively to printing machines using multiple printheads, for example of the drop-on-demand, inkjet variety having an array of nozzles for droplet ejection.

5 It is frequently desirable in drop on demand printing to align a plurality of printer components, typically printheads, to provide contiguous print swaths. Such alignment must be performed very accurately to minimise visible errors on the printed substrate. WO 01/60627 for example describes a method of aligning printheads using tapered screw fittings. Prior art methods of alignment can however be time consuming and/or require parts manufactured to extremely high tolerances.

10

The present invention seeks to provide an improved mounting arrangement and method for a printer component.

15 According to a first aspect therefore, there is provided a mounting arrangement for mounting a printer component to a substantially rigid base component, said arrangement comprising a foil member attached to one of the printer component or the base component, said foil including one or more mounting apertures, one or more mounting pins attached to the other of the printer component or the base component, said pins adapted to engage said apertures, wherein engagement of said mounting pins with said mounting apertures causes local deformation of said foil, said deformation providing a locating force on said pins so as to urge said printer component into alignment with said base component in a plane substantially parallel to said foil.

20

25 The foil is preferably between 0.1mm and 0.5mm in thickness, more preferably 0.25mm in thickness. The foil can be of any material which gives the desired deformation properties, but is preferably metal, and preferably a beryllium copper alloy, or a bronze.

30 A second aspect of the invention provides a method for mounting a first printer component to a support, the method comprising, attaching to one of the printer component or the support a foil having one or more mounting apertures, arranging

on the other of the printer component or the support one or more mounting pins adapted to engage said mounting apertures, inserting said mounting pins into said mounting holes, so as to locally deform said foil, allowing said local deformation to locate said component in a plane perpendicular to the direction of insertion, and

5 rigidly securing said printer component to said support.

A second printer component can be mounted to the support in substantially the same way, to secure the first and second components in a fixed spatial relationship. In a preferred embodiment, a printer component can be removed from

10 said support, and the same, or more usefully a replacement component mounted in its place, the replacement component being aligned with respect to the original component, to a high degree of accuracy, preferably $+/- 5\mu\text{m}$, more preferably $+/- 2\mu\text{m}$, and more preferably still to an accuracy of $+/- 1\mu\text{m}$. In an embodiment where the components are printheads mounted on a printbar, printheads can be replaced

15 with sufficient accuracy to enable printing without further adjustment. This method allows printheads to be replaced quickly and easily, without complex alignment steps.

A third aspect of the invention provides a method for manufacturing a support for

20 supporting one or more printer components, the method comprising the steps of providing on the support one or more foil members, each foil member including one or more mounting apertures for engaging with at least one printer component, inserting into at least one mounting aperture on each said foil a mounting pin adapted to engage with said aperture, positioning said one or more foils so as to

25 align said pin or pins in a desired spatial configuration, and securing said foils to said support

The invention will now be described by way of example only with respect to the accompanying drawings in which

30

Figure 1 shows a printhead mounted to a print bar

Figure 2 is an exploded view of Figure 1

Figure 3 shows an alternative embodiment to the arrangement of Figure 2

Figure 4 is a detailed view of a mounting pin

Figure 5 illustrates deflection of a foil

Figure 6 illustrates foil apertures and configurations

Figure 7 is an alternative view of the arrangement of Figure 1

- 5 Referring to figure 1, a printhead 10 is attached to a mounting plate 20 which in turn forms part of a printer, not shown. Plate 20 may have multiple printhead mounts as shown at 30 and which are accurately spaced to ensure that the swaths printed by each head are correctly aligned.
- 10 It is desirable to be able to remove a printhead 10 from a mount 30 and replace it with another without having to undergo a separate procedure to re-align the replacement printhead with the other printheads in the mounting plate.

Figure 2 shows an exploded perspective view of one embodiment for achieving this.

- 15 Printhead 10 is provided with at least two pin assemblies 40 which engage with corresponding holes 50' formed in a foil 60. Similar holes 50" for engagement with pin assemblies of a second printhead are also formed in the foil, the two pairs of holes being accurately located relative to one another. The manufacture of such accurately located features is easier and cheaper in a foil, e.g. using an optical process, such as photolithographic etching, than it would be, say, in the mount plate. Pin assemblies 40 are drawn into position in the holes 50 e.g. by threaded bolts which pass through the centre of the pins and engage with threads formed in the mounting plate, advantageously as inserts as indicated at 80.
- 20
- 25 The elastic deflection of the foil, and the resulting locating forces provide alignment to a higher degree of accuracy than might be expected when considering the tolerances of the pins or the hole in the foil. This effect can be exploited in the arrangement shown in Figure 3.
- 30 In an alternative embodiment, shown in Figure 3, a mount plate is provided with two or more distinct foils 60a and 60b, rather than a single unitary foil. Each foil includes mounting holes for a single printhead. In order to ensure accurate location of the printheads relative to one another, pins are engaged in the mounting holes, and the

pins are then accurately aligned to the desired configuration before the foils are secured to the mount plate. The pins used for this alignment step may be part of a printhead, in which case the nozzles or even the printed swaths of the printheads could be used to determine alignment, or the pins may be part of an alignment tool.

- 5 The foils are then rigidly fixed to the mount plate by any suitable method, such as by adhesive.

It will be appreciated that a combination of the above embodiments could be employed, using two or more distinct foils, each foil adapted for mounting more than

- 10 one printhead.

Detail of the pin assembly is shown in figure 4. Tapered sleeve 90 engages with the hole 50 in the foil, thereby accurately locating the pin in the plane perpendicular to the pin axis 100, as will be explained in more detail below. As shown by dashed lines in figure 5, foil 60 is deformed by taper 90, resulting in forces which act substantially parallel to the plane of the foil to centre the pin in hole 50. These locating forces can be sufficient to crush dirt or dust that might otherwise cause misalignment. It can be seen from Figure 5, that the print bar 20 does not come into contact with the sleeve 90, and is sufficiently recessed to allow the foil to deform freely.

Lands 95 accurately located a distance A below the top of the sleeve ensure that the foil is not deformed past its elastic limit. The taper T of the sleeve 90 is typically 5 degrees, resulting in a typical deflection of 0.2 to 0.3mm of the foil. The print bar is typically 10mm in thickness.

It has been found that the engagement of pins in a flexible foil as described above can produce alignment to accuracies of plus or minus 2 μ m, and in some cases to accuracies of plus or minus 1 μ m, or less. Stated differently, a component mounted 30 to a base using such an engagement can be removed and repeatably re-mounted with a positional error of less than 2, or in some cases 1 μ m.

These accuracies can be achieved even if the foil and pins themselves are

manufactured to lower tolerances, provided that there is an interference fit sufficient to cause local deformation of the foil, resulting in turn in locating forces perpendicular to the direction of motion.

5 For example, if an aperture in a foil has a diameter of 5.80mm, +/-0.10mm, in order to ensure an interference, the diameter of the pin should be at least 5.90mm. The pin could therefore be specified to a diameter of 5.95 +/-0.05mm. Etching would be a suitable manufacturing process for such components, since it is relatively easy to provide etched parts to tolerances of +/-0.050mm. These exemplary dimensions and
10 tolerances have been found to provide alignment to an accuracy of approximately +/- 5µm, or +/-0.005mm. It can therefore be seen that the present invention provides a coupling arrangement which provides alignment between the printer component and the base component with an accuracy approximately ten times greater than the accuracy with which the separate components of that arrangement are formed.

15

Considering the shape and configuration of the mounting apertures, it can be seen from Figure 6, that although a substantially circular aperture 602 is preferred for providing lateral alignment in two dimensions (or degrees of freedom), other shapes, such as trefoil arrangement 604 are possible.

20

As also seen from Figure 6, a second aperture used for providing alignment in a single degree of freedom preferably takes the form of an elongate slot 606. This shape, used in conjunction with a circle or trefoil, allows the rotation of a component in the plane of the foil to be constrained without over constraining the lateral location,
25 already defined by the circular aperture, as shown at 610.

A further advantage of the present invention is that the pin and foil engagement arrangement does not constrain the component in the direction of insertion, that is, substantially perpendicular to the foil. This allows the remaining degrees of freedom
30 to be constrained by abutment of lands 95 with the foil, without over-constraint from the pins.

Two such pins 40 positioned, e.g. at either end of a printhead nozzle array 110 as

shown in figure 7, will therefore accurately locate a printhead in the plane perpendicular to both the pin axis 100 and the printhead nozzle axis, e.g. relative to other printhead mounts 30

5 Moreover, as long as the foil is not deformed past its plastic limit, such positioning will be repeatable so that a printhead can be removed and a replacement installed in the same position, with a very high degree of accuracy, as noted above. If all printheads are manufactured with identical nozzle positioning relative to the alignment pins, e.g. using the alignment mechanism of the present invention, then

10 the swath printed by the replacement printhead will also be accurately positioned relative to the swaths printed by the other printheads and image quality will be maintained.

15 It will be appreciated that the invention is not only applicable to the mounting of a printhead in a print bar 20, as described above, but may also be used in the mounting of multiple print bars in a printer and the like.

CLAIMS

1. A mounting arrangement for mounting a printer component to a substantially rigid base component, said arrangement comprising

a foil member attached to one of the printer component or the base component, said foil including one or more mounting apertures,

one or more mounting pins attached to the other of the printer component or the base component, said pins adapted to engage said apertures,

wherein engagement of said mounting pins with said mounting apertures causes local deformation of said foil, said deformation providing a locating force on said pins so as to urge said printer component into alignment with said base component in a plane substantially parallel to said foil.
2. An arrangement according to Claim 1, wherein said foil has a thickness of between 0.1 and 0.5mm.
3. An arrangement according to Claim 1 or Claim 2, wherein said foil is metal.
4. An arrangement according to any preceding claim, wherein said mounting apertures in said foil are formed by an optical process.
5. An arrangement according to any preceding claim, including at least two pins and two apertures.
6. An arrangement according to Claim 5, wherein a first pin provides, in combination with said support, alignment in two degrees of freedom.
7. An arrangement according to Claim 6, wherein said second pin provides, in combination with said support, alignment in a third degree of freedom.
8. An arrangement according to any preceding claim, wherein said pins are tapered.

9. An arrangement according to any preceding claim wherein the accuracy of the alignment between the printer component and the base component is at least ten times greater than the accuracy to which the mounting apertures are formed.
10. An arrangement according to any preceding claim wherein the accuracy of the alignment between the printer component and the base component is of the order of ten times greater than the accuracy to which the mounting pins are formed.
11. An arrangement according to any preceding claim which arrangement provides alignment between the printer component and the base component to an accuracy of plus or minus $2\mu\text{m}$.
12. An arrangement according to any preceding claim, wherein said printer component is a printhead.
13. An arrangement according to Claim 12, wherein a single mounting arrangement is adapted to mount two or more printheads in a fixed spatial relationship.
14. An arrangement according to Claim 12 or Claim 13, wherein said mounting arrangement aligns said printhead to an accuracy greater than or equal to the nozzle spacing of the printhead.
15. An arrangement according to any preceding claim, wherein said local deformation is elastic deformation.
16. A method for mounting a first printer component to a support, the method comprising
 - attaching to one of the printer component or the support a foil having one or more mounting apertures,

arranging on the other of the printer component or the support one or more mounting pins adapted to engage said mounting apertures,

inserting said mounting pins into said mounting holes, so as to locally deform said foil,

allowing said local deformation to locate said component in a plane perpendicular to the direction of insertion, and

rigidly securing said printer component to said support.


17. A method according to Claim 16, wherein said mounting apertures in said foil are formed by etching.
18. A method according to Claim 16 or Claim 17, wherein said method locates said printer component to an accuracy of plus or minus 2 μ m perpendicular to said direction of insertion.
19. A method according to any one of Claims 16 to 18, further comprising mounting a second printer component to said support, thereby securing said first and second printer components in a fixed spatial relationship.
20. A method according to any one of Claims 16 to 19, further comprising removing said printer component from said support, and repeating said method to insert and secure a replacement printhead component.
21. A method for manufacturing a support for supporting one or more printer components, the method comprising the steps of,
providing one or more foil members, each foil member including one or more mounting apertures for engaging with at least one printer component,
inserting into at least one mounting aperture on each said foil a mounting pin adapted to engage with said aperture,

positioning said one or more foils relative to the support so as to align said pin or pins in a desired spatial configuration, and

securing said one or more foils to said support.

22. A method according to Claim 21, wherein engagement of said mounting pins with said mounting apertures causes local deformation of said foil.
23. A method according to Claim 21 or Claim 22, wherein said foil is manufactured to an accuracy less than the required accuracy of alignment of said pin or pins.
24. A method according to any one of Claims 21 to 23, wherein said pins are aligned with an accuracy at least ten times greater than the accuracy to which the foil is manufactured.

Fig. 1

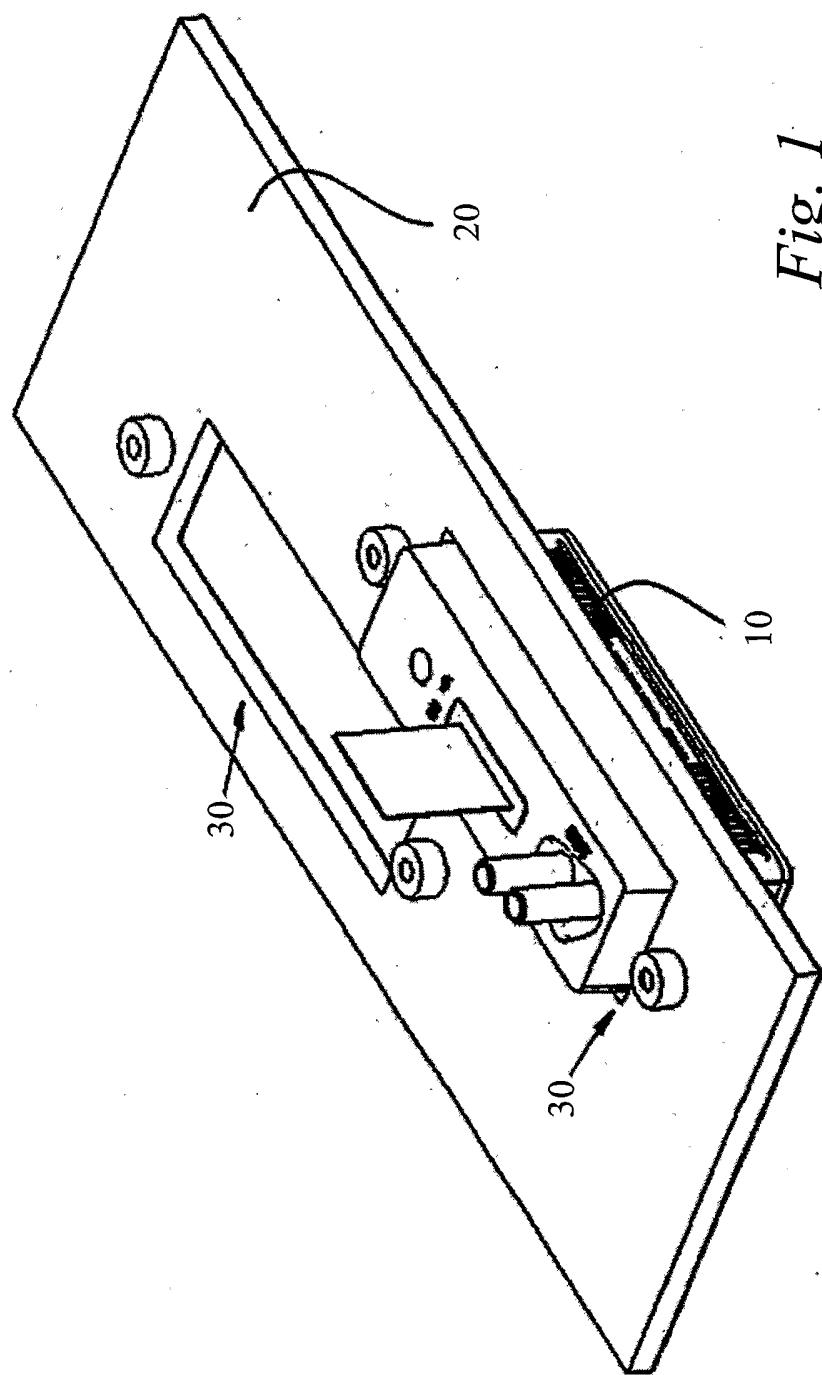

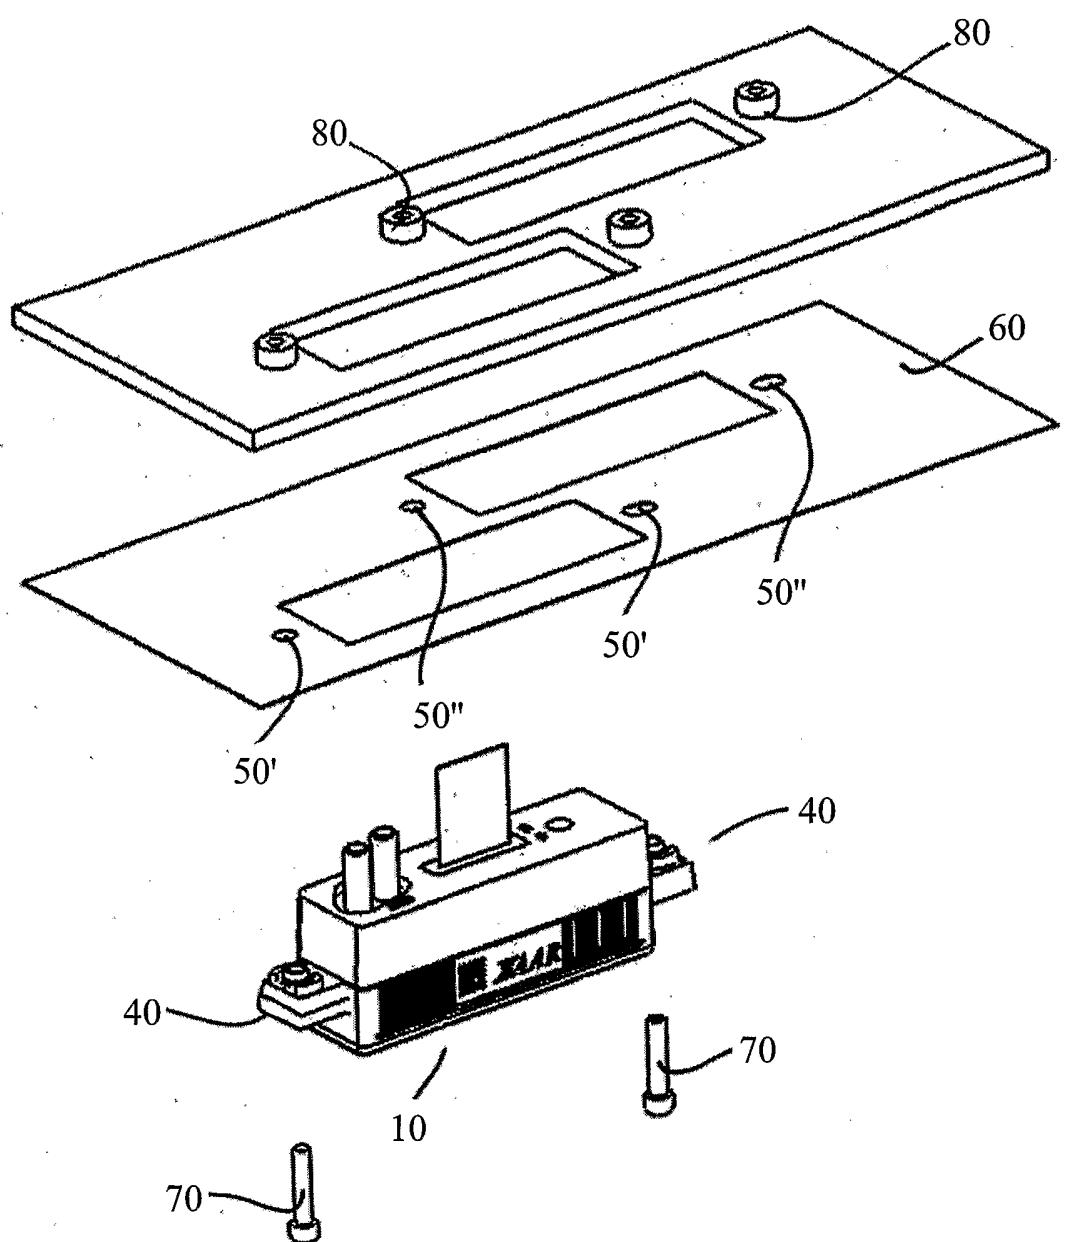


Fig. 2

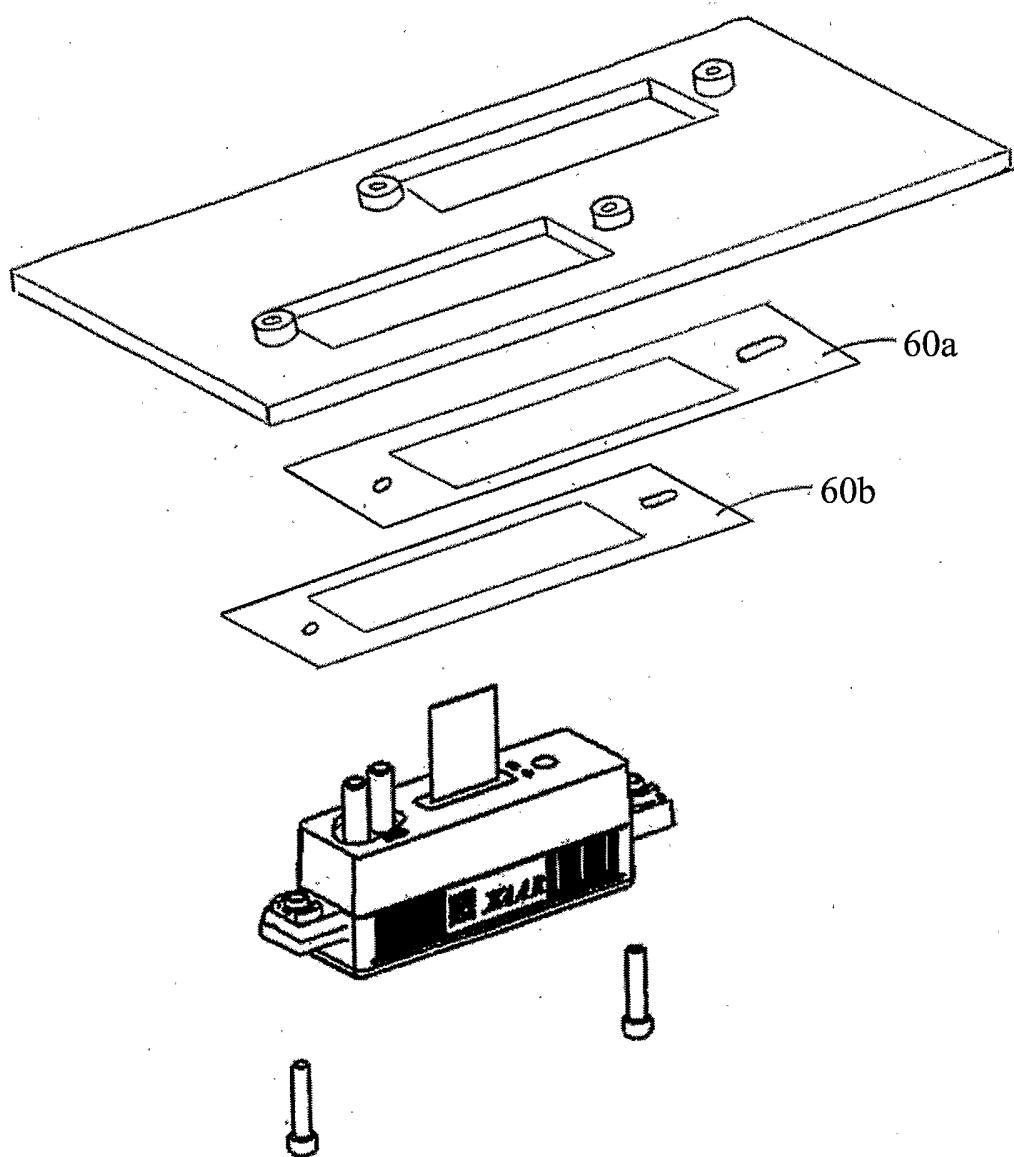
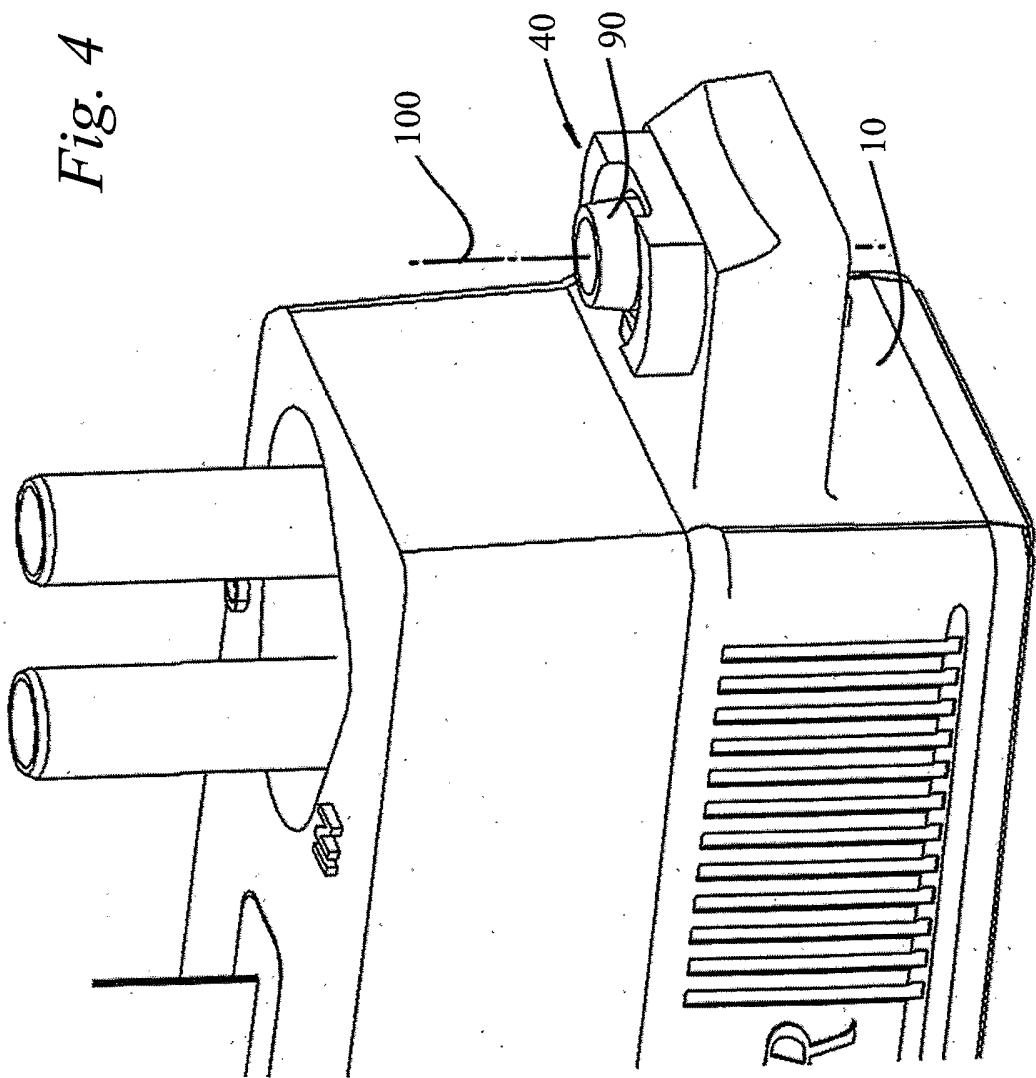


Fig. 3

Fig. 4



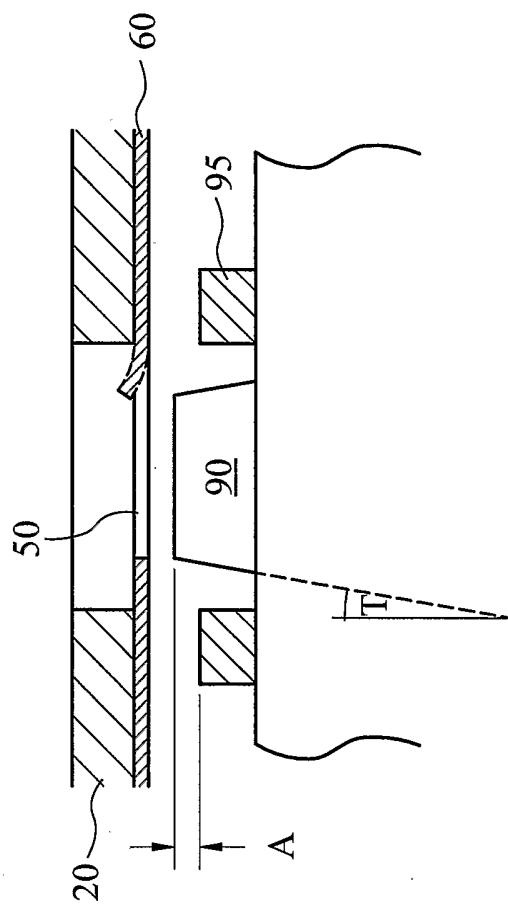


Fig. 5

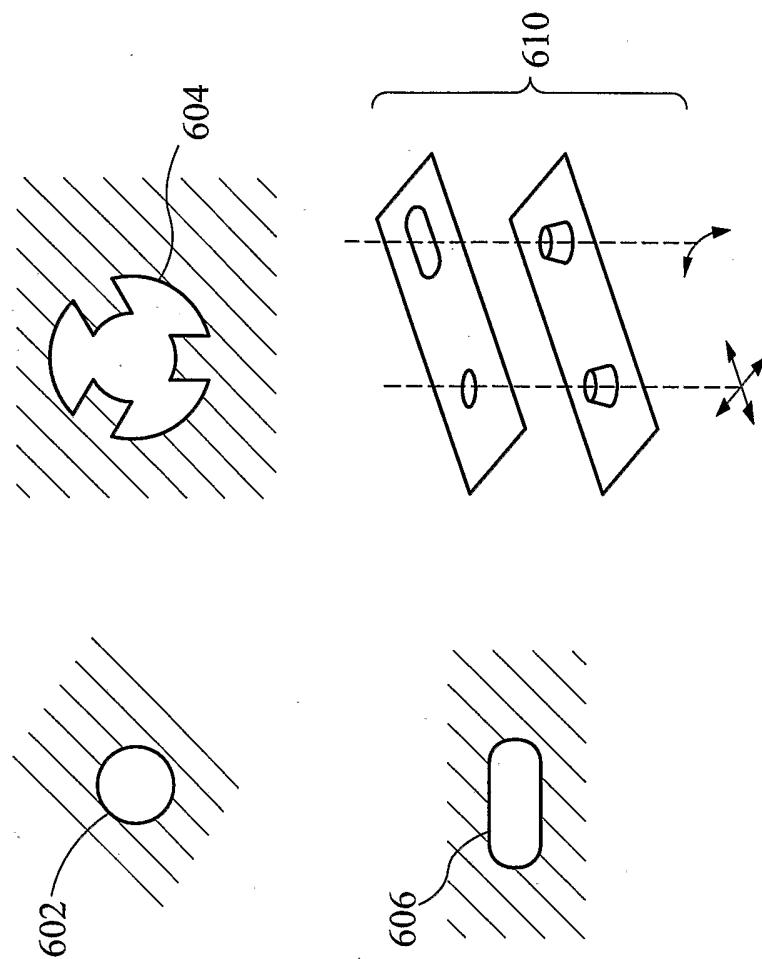


Fig. 6

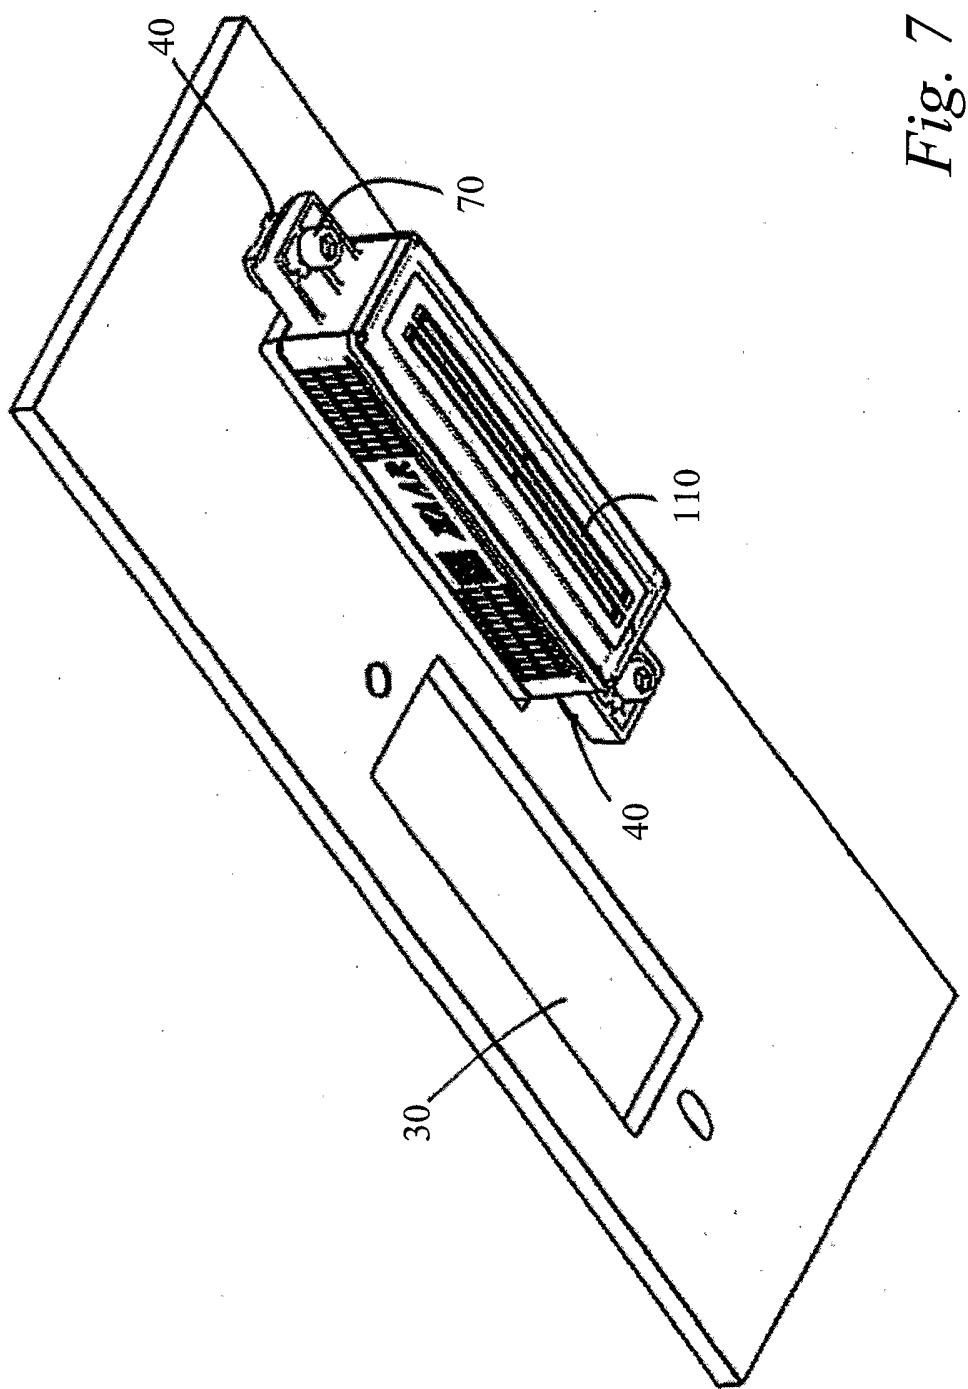


Fig. 7