



HU000032445T2

(19) **HU**(11) Lajstromszám: **E 032 445**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 12 720569**(51) Int. Cl.: **F16L 19/08** (2006.01)(22) A bejelentés napja: **2012. 03. 26.**

(86) A nemzetközi (PCT) bejelentési szám:

(96) Az európai bejelentés bejelentési száma:

PCT/IB 12/000597**EP 20120720569**

(87) A nemzetközi közzétételi szám:

(97) Az európai bejelentés közzétételi adatai:

WO 12140480**EP 2697550 A1** **2012. 10. 18.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2697550 B1 **2016. 09. 21.**

(30) Elsőbbségi adatok:

MI20110603 **2011. 04. 11.** **IT**

(73) Jogosult(ak):

Effebi S.p.A., 25073 Bovezzo BS (IT)

(72) Feltaláló(k):

TANGHETTI, Ermanno, I-25073 Bovezzo (BS) (IT)

(74) Képviselő:

**PINTZ ÉS TÁRSAI Szabadalmi, Védjegy és
Jogi Iroda Kft., Budapest**

(54)

Szerelvény csövekhez, és erre vonatkozó csőkapcsolási eljárás

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 2 697 550 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.09.2016 Bulletin 2016/38

(51) Int Cl.:

F16L 19/08 (2006.01)

(86) International application number:

PCT/IB2012/000597

(21) Application number: **12720569.8**

(22) Date of filing: **26.03.2012**

(87) International publication number:

WO 2012/140480 (18.10.2012 Gazette 2012/42)

(54) FITTING FOR PIPES AND RELEVANT PIPE CONNECTING METHOD

ANSCHLUSSSTÜCK FÜR ROHRE UND ZUGEHÖRIGES ANSCHLUSSVERFAHREN FÜR ROHRE

RACCORD POUR TUYAUX ET PROCÉDÉ RELATIF DE RACCORDEMENT DE TUYAU

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(72) Inventor: **TANGHETTI, Ermanno**

I-25073 Bovezzo (BS) (IT)

(30) Priority: **11.04.2011 IT MI20110603**

(74) Representative: **Marietti, Andrea**

Marietti, Gislon e Trupiano S.r.l.

Via Larga, 16

20122 Milano (IT)

(43) Date of publication of application:

19.02.2014 Bulletin 2014/08

(56) References cited:

CA-A- 579 377 DE-A1- 4 327 236

US-A- 3 140 107 US-A- 4 082 326

(73) Proprietor: **Effebi S.p.A.**

25073 Bovezzo BS (IT)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 697 550 B1

Description

FIELD OF THE INVENTION

[0001] The present invention refers to a fitting for pipes and to a method for relevant connection between at least one pipe and the above said fitting.

KNOWN PRIOR ART

[0002] Fittings for pipes are known, made of plastic or metal, comprising a main body, also being made of plastic or metal, which internally accommodates an outer pipe, in order to connect it to a fluidic circuit placed upstream or downstream of the fitting, and fastening means, also made of metal or plastic, able to be tightened to the main body.

[0003] Generally, these fastening means comprise a nut that can be screwed on a corresponding threaded region of the main body or, alternatively, a nut, or bush, constrained to the main body by tie rods, consisting of screws or connecting bolts, for example.

[0004] Further, the main body accommodates an annular sealing gasket, of truncated cone, cylindrical or toroidal shape, preferably made of rubber or deformable synthetic material, and a notched, or anyhow deformable, blocking ring nut (also termed "ogive"), also being truncated cone, cylindrical or toroidal, able to ensure, once the nut is tightened to the main body, both the sealing, and the blocking of the pipe to the fitting in stable position, respectively.

[0005] According to the prior art there exist fittings of the above mentioned type, wherein advantageously the annular sealing gasket and the blocking ring nut are realized in a single piece.

[0006] In all of the above fittings, the outer pipe blockage within the fitting body and the fluidic sealing of the fitting itself are usually ensured by the interference coupling of conical walls, usually those of the inner surface of the fitting body and/or the relevant fastening nut with the outer walls of the blocking ring nut and/or in case of the annular gasket, such that the tightening of the nut to the main body of the fitting determines the progressive engagement of the blocking ring nut, and possibly the gasket, with the inner walls of the fitting, which walls, due to different taper, cause the substantially radial crushing of such a blocking ring nut (ogive), and possibly the annular gasket, on the outer pipe placed within the fitting itself.

[0007] This type of fitting, although rather efficient, has the drawback of not being easily connectable to the outer pipe, not allowing in fact the insertion of the pipe within the fitting, when the nut is combined, or even only partially screwed to the main body.

[0008] In substance, before introducing the pipe within the main body of the fitting the fastening nut, the blocking ring nut (ogive) and the annular sealing gasket must be fitted (suited) onto the pipe and then, subsequently, when

the pipe is completely introduced within the main body of the fitting, progress to first combining, and then tightening, the nut to the same main body.

[0009] This is mainly due to the fact that the annular sealing gasket, truncated cone or of other shape, if fitted within the main body before the pipe insertion, would be subjected, during the pipe insertion to a hardly amendable deformation, with subsequent sensitive reduction of the sealing efficiency of the fitting. The shape of the blocking ogives, with inner diameter substantially like outer diameter of the pipe and usually not elastically deformable, especially in radial direction, also helps avoiding that the pipe can be put into the fitting, or possibly withdrawn, after this last one has been almost totally pre-assembled.

[0010] This problem is due to the strong friction and/or interference generated between the inner surface of the annular sealing gasket, made of rubber or synthetic material, and the outer surface of the pipe, made of metal or plastic, during the insertion of the pipe within the fitting, and also to the presence of a blocking ogive which, during the pipe insertion, urges the annular sealing gasket to deform or results of hard suitability or yet axially moves, hampering the possible pipe insertion.

[0011] Therefore these drawbacks are responsible of a highly complicated, slow and not always effective connection between pipe and fitting.

[0012] US 3.140.107, for example, illustrates such a fitting that, even provided with an abutment ring interposed between the sealing gasket and blocking ogive, provides, mainly due to the shape and properties of said blocking ogive, adopting the ring form with truncated cone development, that the pipe is preventively fitted into the tightening nut, and thus into said ogive and sealing gasket, with relevant abutment ring, before assembling the entire fitting. Another example of prior art fitting can be found in DE 43 272 36.

[0013] The object of the present invention is, therefore, achieving a fitting able to make faster and, anyhow, reliable, the connection between the fitting itself and an outer pipe, avoiding the above mentioned technical drawbacks.

[0014] Further object of the present invention is achieving a connection method between outer pipe and fitting which is simple, fast and effective.

SUMMARY OF THE INVENTION

[0015] These and other objects are achieved by the present fitting for at least one pipe, comprising a main body for internally accommodating such a pipe, fastening means which can be tightened to the main body, and wherein the main body internally accommodates at least a generally deformable annular sealing gasket, provided with at least an mouth section for the pipe, and at least a blocking ring nut (ogive) for firmly and sealingly locking such pipe within the fitting, at least when said fastening means are tightened to the main body, and wherein such

blocking ring nut is elastically deformable at least in radial direction. The fitting of the present invention also comprises, advantageously, means for retaining in a widened condition at least the mouth section of the afore said annular sealing gasket with inner diameter larger than the outer diameter of the external pipe.

[0016] Thus, due to the characteristic shape and properties of the blocking ring nut and to the presence of these retaining means, the annular sealing gasket, preferably truncated cone and made of rubber or other deformable material, at least at its mouth portion, does not modify its shape during the insertion of the pipe within the main body, thereby making the insertion of the pipe itself within the fitting and its possible withdrawal easy.

[0017] Next, once the pipe, made of a material selected from plastic, metal or plastic-metal composite, is inserted within the fitting, the same annular sealing gasket and the same blocking ring nut, due for example to the above mentioned interference of conical surfaces, are suitably compressed between the fastening means and the inside of the main body, such as to be able to respectively perform to ensure the seal of the pipe and retaining the pipe blocked within the fitting once these fastening means, preferably consisting of a nut, are tightened to the main body of the fitting. According to a preferred embodiment of the present invention, the afore said retaining means for example comprise stiffening means of the mouth section of the annular sealing gasket and preferably comprising, for example, at least an annular stiff element having an inner diameter larger than the outer diameter of the pipe. This way, the pipe, at least at the mouth portion of the annular sealing gasket, does not substantially come into contact with a mild rubbing, or interference, that, anyway, is such that it does not cause any deformation of the annular sealing gasket itself during the insertion of the pipe within the fitting.

[0018] The annular stiff element, made of a material selected from plastic and metal, can be removably combined within the seal gasket.

[0019] Such annular stiff element, for example, can be interference constrained to the seal gasket, realizing the annular stiff element with its own outer diameter slightly larger than the inner diameter of the mouth section of the sealing gasket, so as to interfere with the latter, causing its widening at such mouth section. The sealing gasket elasticity, then, causes the annular stiff element to be constrained to such a gasket. Alternatively, the annular stiff element can also be not removably, and thus irreversibly, constrained to the sealing gasket. Such annular stiff element, for example, once placed in interference with the sealing gasket, is glued and/or welded to the same gasket, or it can be molded atop by the material forming the gasket. According to a second embodiment of the invention, the annular stiff element comprises at least an upper edge radially jutting with respect to its outer surface, to space the sealing gasket and the blocking ring nut between each other. Such annular stiff element takes a L-shaped profile.

[0020] The spacing edge of the annular stiff element, during the tightening of the fastening means (a nut for example), lays between the sealing gasket and the blocking ring nut ensuring that, for extremely high tightening momenta, the sealing gasket holds its shape and functionality within the fitting.

[0021] Further, the presence of the jutting edge of the annular stiff element plays the important role of avoiding that the blocking ring nut pinches, or damages, the gasket during the tightening of the nut, thus causing a reduced efficiency of the gasket itself. At last, according to a further embodiment of invention, the blocking ring nut is provided with an ending portion adapted to engage with the fastening means, consisting for example in an appropriate nut. Specifically such a portion of the blocking ring nut end is concave such that it can accommodate an ending portion of the same fastening means.

[0022] The objects of the invention are also achieved by virtue of a method for connecting a pipe to a fitting according to one or more of the claims from 2 to 14, characterized by the fact of comprising the steps of: a) positioning said at least one annular sealing gasket and said at least one blocking ring nut between the main body and fastening means; b) combining the fastening means (preferably made of an appropriate nut) to the main body; c) inserting said at least one pipe within the fitting; d) tightening the fastening means to the main body. The method of the present invention is characterized by the fact that the afore said step a) is anticipated by the step of retaining in widened position, by the afore said retaining means, with inner diameter larger than outer diameter of the pipe, at least the mouth section of the annular sealing gasket.

[0023] Such solution allows, therefore, inserting/withdrawing the pipe within the fitting even when the nut is combined, or even only partly screwed, to the main body, since the pipe does not deform the sealing gasket during the insertion into the fitting. The gasket remains stiff, at least in its mouth section, due to the presence of said retaining means placed at the mouth section of the sealing gasket itself.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] A number of particular embodiments of the present invention will be now described, by way of example only and not of limitation, referring to the attached figures, wherein:

figure 1a is a sectional view of an annular sealing gasket and a corresponding annular stiff element according to a first embodiment of the invention;
figure 1b is a sectional view of a fitting according to the first embodiment of the invention represented in figure 1a;
figure 2a is a sectional view of an annular sealing gasket and a corresponding annular stiff element according to a second embodiment of the invention;

figure 2b is a sectional view of a fitting according to the second embodiment represented in figure 2a; figure 3 is a sectional view of a fitting according to a third embodiment of the invention; figure 4 is a side sectional view of a fitting according to a further embodiment of the invention; figure 5 is a perspective view of a blocking ring nut (ogive), according to a preferred aspect of the present invention; and figure 6 is a perspective view of an annular stiff element, acting as means for retaining in widened position the mouth section of an annular sealing gasket of a fitting according to a particular embodiment of the present invention.

DETAILED DESCRIPTION OF SOME EMBODIMENTS OF THE PRESENT INVENTION

[0025] Referring particularly to these figures a fitting according to the invention has been indicated by the numeral 1.

[0026] In figures 1a and 1b a fitting 1 according to a first embodiment of the invention is represented.

[0027] Such fitting 1 for a pipe 2, preferably made of polyethylene, comprises a main body 3, with substantially cylindrical geometry and made of metal, able to internally accommodate the pipe 2, and fastening means 4 that can be tightened to the main body 3. These fastening means 4, in particular, comprise a nut, also made of metal that can be screwed to an appropriate threaded end 3a of the main body 3.

[0028] It has to be observed that these fastening means 4 and the main body 3 can also be made of plastic, or other material, without thereby departing from the scope of protection of the present invention, as well as can alternatively be made of a nut (or bush) constrained to the main body 3 by appropriate tie rods.

[0029] It has to be observed also that, whereas the embodiment of the fitting 1 herein described is employed on plastic pipes, nevertheless fittings for the employment with pipes made of metal material, or plastic-metal composite material, still fall in the protection scope of the present invention, as well as fittings for general flexible and/or deformable pipes.

[0030] The fitting 1 further comprises an annular sealing gasket 20, preferably of truncated cone shape and made of rubber, or other (synthetic or natural) deformable material, and a blocking ring nut 5, substantially cylindrical in shape and made of plastic or metal. Such a blocking ring nut 5 is also termed "ogive" in the field.

[0031] Both the annular gasket 20, and the blocking ring nut 5 are shaped and placed within the main body 3 and the relevant nut 4, such that the pipe 2 can pass through them, or put into them, when it is inserted within the fitting 1.

[0032] In this regard, both the sealing gasket 20 and the blocking ring nut 5, are internally accommodated in the main body 3 of the fitting 1 at inner regions of the

latter that allow, when the nut 4 is tightened on the main body 3, the firmly and sealingly coupling of such gasket 20 and blocking ring nut 5 on the pipe 2. Then, the gasket 20, and the ring nut 5, both substantially annular, have thus a mouth section and an outlet section for the pipe 2.

[0033] In more detail, in the embodiment of the fitting 1 here shown and specifically referring to figure 5, the blocking ring nut 5 is made by a substantially cylindrical and/or truncated cone body, preferably made of plastic or metallic material, which is provided with at least an axial notch 21, not necessarily extended along the whole side surface of the ring nut 5, that allows it, sometimes also in combination with the elasticity of the material composing such ring nut 5, to be at least radially, and sometimes axially also, deformed (closed or open), and having some circular sealing ribs 22 on its inner surface. Such a blocking ring nut 5 is also designated to being accommodated, at least partially, within a region of the nut 4, having an inner truncated cone surface, having smaller diameter than that of the ring nut 5, when the latter has its own notch open, in case upon its coupling with a pipe 2.

[0034] In other words, the blocking ring nut 5, or ogive can have a notch extended along the whole extension of its side surface, and thus have a "C" shaped cross section, susceptible to radial deformation by notch closing/opening, or have, as in the here shown embodiment, one or more notches 21 that, extended from one end to an annular portion 23 forming the other end of the ogive 5, define two or more axially extended teeth, that can be radially moved closer/farther to each other for allowing the blocking of the pipe.

[0035] It has to be observed that such particular arrangement of the ogive 5 gives substantial elasticity to the ogive itself, even when the material forming the ogive 5 itself does not have excellent elastic properties, allowing it to elastically deform at least in radial direction.

[0036] As already described, in alternative embodiments not shown here, the ring nut 5 can be free from radial notches and anyway have shape and physical properties that allow it of being elastically deformed at least in radial direction so that the pipe 2 fitted within it can be blocked, when tightening the nut 4 on the body 3 of the fitting 1, and as to allow to easily withdraw the pipe 2 itself, when the nut 4 is partially untightened from the body 3.

[0037] Also observe that the blocking ring nut 5 can be made with such sizes and shape that, in unstressed condition, it shows an inner diameter larger than the outer diameter of the pipe 2, or it can be made with a inner diameter smaller than the outer diameter of the pipe 2, but with the ability of being radially extended (due for example to the afore said notch) when inserting the pipe 2 itself.

[0038] As known in the art, referring back to the particular embodiment of the ring nut 5 shown here, before the tightening of the nut 4 on the main body 3, the blocking ring nut 5 is contained within the fitting 1 with its notch open, in case due to the insertion within it of the pipe 2,

that is shaped in such a way that it has maximum diameter, while when the nut 4 is tightened on the main body 3, such a ring nut 5 is urged, by the interference with the gasket 20, or with possible frames inside the main body 3 of the fitting 1, within the region with truncated cone inner surface of the nut 4, so as to narrow itself, by closing the notch and taking a shape with minimum diameter for internally blocking the pipe 2.

[0039] Substantially, when the nut 4 is completely tightened to the main body 3, the blocking ring nut 5 is moved from its starting position towards a conical region that, interfering with such a ring nut 5, determines its smooth crushing on the pipe 2. Advantageously, according to the present invention, the fitting 1 comprises means 7 for retaining in widened position the mouth section 20a of the annular sealing gasket 20 such that the inner diameter of such mouth section 20a is larger than the external diameter (De) of the pipe 2, so as to make the entry of the pipe 2 itself within the fitting 1 easy.

[0040] According to a preferred aspect of the present invention, these retaining means 7 comprise means able to stiffen the mouth portion 20a of the annular sealing gasket 20, so as to ensure that the external diameter (De) of the pipe 2 is always smaller than the inner diameter of the mouth section 20a of the gasket 20 and thus ensure the easy sliding of the pipe 2 within such a mouth section 20a, and thus within the sealing gasket 20.

[0041] This way, due to the presence of such retaining means 7, the annular sealing gasket 20, at least at its mouth section 20a, does not come substantially into contact by friction, or interference, with the pipe 2 during the insertion of the latter within the main body 3, thus making the insertion within the fitting 1 easy, even when the latter is at least partially mounted.

[0042] That is, as long as the blocking ring nut 5 is not urged in its minimum diameter position within the nut 4, that is as long as the latter has not been closely tightened on the main body 3, the pipe 2 can be inserted within the fitting 1, the latter being assembled, but with the nut 4 only partially screwed, without this causing a harmful interference of the inlet end of the pipe 2 on the sealing gasket 20.

[0043] In effect, when the pipe 2 enters within the fitting 1, through the inlet section of the nut 4, the relevant inlet end in the fitting 1 meets the blocking ring nut 5 first, in its arrangement with maximum diameter larger than the outer diameter of the pipe 2, or in an alternative arrangement thereof with diameter able to be widened due to the insertion of the pipe 2 itself, and then the mouth section 20a, suitably stiffened, or at least retained in a widened condition, by the gasket 20, which has an inner diameter larger than the outer diameter De of the pipe 2, so as to favor the sliding of the pipe 2 within the whole sealing gasket 20, without causing interferences between the latter and the pipe 2 itself, and instead allowing the perfect insertion of the latter within the gasket 20.

[0044] Next, once the pipe 2 is inserted within the fitting 1, the sealing gasket 20 and the blocking ring nut 5 itself

are suitably compressed between the nut 4 and the inside of the main body 3, such as to be able to serve to respectively ensure the seal of the pipe 2 and retain the pipe 2 blocked within the fitting 1, once the fastening means 4 (nut) are tightened to the main body 3 of the fitting 1.

[0045] According to a further aspect of the present invention, the retaining means 7 can preferably comprise an annular stiff element having an inner diameter Di larger than the outer diameter De of the pipe 2, on which the annular sealing gasket 20 is externally put on, at its mouth section 20a. This way, the pipe 2, at least at the mouth portion 20a of the sealing gasket 20, never enters into contact with the gasket 20 itself and thus the latter is prevented from crushing on itself during the pipe 2 insertion within the fitting 1 and the tightening of the fastening means (nut) 4 to the main body 3.

[0046] Such annular stiff element 7, made of a material selected from plastic and metal, but specifically metal (brass for example), can be removably interference combined within the annular sealing gasket 20. Practically, the outer diameter of this annular stiff element 7, which is larger than the inner diameter of the mouth section 20a of the sealing gasket 20, interferes with the latter causing at least the widening of the mouth section 20a of the sealing gasket, made of deformable material. The elasticity of the sealing gasket 20, then, causes the annular element 7 to remain constrained to the gasket 20 itself.

[0047] According to a particular embodiment of the invention herein not shown, the annular stiff element 7 can be irremovably, thus firmly constrained, to the sealing gasket 20. For example, such annular element 7, once placed in interference with the sealing gasket 20, can be glued and/or welded to the annular sealing gasket 20 itself such that it can be no more unconstrained from the latter, or it can be substantially realized in a single piece with the sealing gasket 20, for example by molding atop the material forming the gasket 20 on the annular stiff element (preferably made of metal). According to a second embodiment of the invention (figures 2a and 2b), the annular element 7 comprises a radially jutting edge 7b with respect to its outer surface 7a, to substantially space the sealing gasket 20 from the blocking ring nut 5. Such annular stiff element 7 takes therefore a "L"-shaped profile.

[0048] This "L"-shaped profile, therefore, not only makes the insertion of the annular element 7 within the sealing ring easy, by widening it, but also allows to aid a homogeneous distribution of the thrust strength exerted by the blocking ring nut 5 on the sealing gasket 20, when the fastening means (nut) 4 are tightened to the main body 3.

[0049] In fact, during the tightening of the fastening means 4, the jutting edge 7b remains arranged between the annular sealing gasket 20 and the blocking ring nut 5, thereby ensuring that, for high tightening momenta, the sealing gasket 20 yet preserves its shape and functionality within the fitting 1.

[0050] Further, the presence of the jutting edge 7b has

the important function of avoiding that the blocking ring nut 5 pinches, or damages, the gasket 20, during the tightening of the nut 4, thus causing a reduced efficiency of the sealing gasket 20 itself. Moreover, such jutting edge 7b also provides a not deformable stop abutment for the gasket 20, when the annular stiff element 7 is combined to the latter.

[0051] As shown in figure 4 and figure 6, illustrating a further embodiment of the present invention and wherein like reference numbers for like parts in the preceding figures have been used, alternatively, or in conjunction to the above "L" shape, the annular element 7' can also show a further radially jutting step 7'c, or other equivalent radially jutting coupling element, that can be, for example, arranged in an ending portion of the annular element 7' opposite with respect to that from which the edge 7b projects and which is intended to engage, by geometrical juxtaposition, with a relevant and complementary seat, or recess, internally obtained within the sealing gasket 20, or can simply elastically deform the inner wall of the sealing gasket 20, substantially catching hold of it.

[0052] Such radially jutting element 7'c (step) of the annular element 7' serves to anchor such annular element 7' to the sealing gasket 20, by - at least - simple elastic deformation of the latter, by making the assembling of the annular stiff element 7' with the gasket 20 highly simplified.

[0053] In case the annular element 7' results provided with both the jutting edge 7b, intended to be arranged over the gasket 20 end, and the jutting frame 7'c, intended to engage within the relevant inner seat of the gasket 20 itself, such annular element takes therefore a substantially "U"-shaped profile.

[0054] Finally, according to a further embodiment of the invention (see figure 3), the blocking ring nut 5 can be provided with an ending portion 60 able to be engaged with the fastening means 4, that is the nut 4, since, according to a particular aspect of this invention, the ending portion 60 on the ring nut 5 is concave, such that it can accommodate a corresponding ending portion 80 of the nut 4.

[0055] As the skilled in the art could have appreciated from the above disclosure, the combination of the ring nut 5, with an inner diameter larger than the outer diameter (De) of the pipe 2, or with an outer diameter able to be widened when the pipe 2 engages it, and mainly elastically deformable at least in radial direction, advantageously due to the notches or notch provided on it, and to the above mentioned means 7 or 7' for retaining in widened position at least the mouth section 20a of the annular sealing gasket 20, allow the pre-assembling of the fitting 1 in all of its parts, including the fastening means (nut) 4, yet untightened, and only subsequently inserting the pipe 2 within the pre-assembled fitting 1, without this insertion in the pipe 2 being hampered by undesired deformations of the gasket 20 and/or by offsets of the ring nut 5.

[0056] It has to be observed that the particular shape

and elastic deformability properties of the ring nut 5 and the presence of said means 7 or 7' for retaining in widened position at least the mouth section 20a of the annular sealing gasket 20, allow to easily withdraw the pipe 2 from the fitting 1, when the fastening means (nut) 4 are partially untightened.

[0057] Therefore, according to the invention, it is also provided a method for connecting a pipe 2 to a fitting 1 of the above disclosed type. Such a method comprises the steps of: a) positioning the annular sealing gasket 20 and the blocking ring nut 5, at least radially deformable and with an inner diameter larger than outer diameter of the pipe 2, between the main body 3 and the fastening means (the nut 4 for example); b) combining the fastening means 4 to the main body 3, without tightening them; c) inserting the pipe 2 within the fitting 1 (through the mouth section of the fastening means 4); and d) tightening the fastening means 4 to the main body 3. Advantageously the afore said step a) of the method is preceded by the step of retaining in widened position, by means of suitable retaining means 7 or 7', the mouth section 20a of the annular sealing gasket 20 such that the inner diameter results larger than the outer diameter of the pipe 2.

[0058] By doing so, it has to be observed that the steps a) and b) of the above disclosed method can be realized by only the manufacturer of the herein claimed fitting 1, while the next steps c) and d), that is the insertion of the pipe 2 and complete tightening of the fastening means 4, are referred to the final user.

[0059] It has to be observed that, partially untightening the fastening means 4, with the fitting 1 still mounted, the pipe 2 can be easily withdrawn from the fitting 1 itself, without the need of totally disassembling the latter, due to the elastic deformability, at least in radial direction, of the ogive 5 and the stiffness of the end of the sealing gasket 20, given it by the retaining means 7 or 7'.

[0060] Such a repartition of the steps of the method for connecting a pipe 2 to a fitting 1 subject of this invention, shows to be particularly efficient, since, differently from the known art, it makes the mounting of the fitting 1 by the final user unnecessary, also making the insertion, but also withdrawal operations of the pipe 2 within the fitting 1 itself, easy.

[0061] As it is evident from the above provided disclosure of the fitting 1, such solution allows, therefore, to insert/disconnect the pipe 2 within the fitting 1 even when the nut 4 is combined or even only partially screwed, to the main body 3, since it does not deform the annular sealing gasket 20 during its introduction/withdrawal in the fitting 1, nor provides a deformation of the ogive 5 preventing the ogive elastic coming back to such an arrangement that allows the internally sliding of the pipe 2. The gasket 20 can thus remain substantially stiff due to the presence of the afore said retaining means 7 or 7', at least at the mouth section 20a of the sealing gasket 20 itself and the ogive 5 does not prevent the insertion/disconnection of the pipe 2.

Claims

1. Method for connecting at least one pipe to a fitting of the type comprising a main body (3) for internally accommodating said at least one pipe (2), fastening means (4) able to be tightened to said main body (3), said main body (3) accommodating at least one deformable annular sealing gasket (20), provided with at least one mouth section for said at least one pipe (2), and at least one blocking ring nut (5) for firmly and sealingly locking said pipe (2), at least when said fastening means (4) are tightened to said main body (3), said blocking ring nut (5) being elastically deformable at least in radial direction, said fitting comprising as well means (7) for retaining in widened position at least the mouth section (20a) of said at least one annular sealing gasket (20) with an inner diameter larger than the outer diameter (De) of said at least one pipe (2), the method being **characterized by** comprising the steps of:
 - a) positioning said at least one annular sealing gasket (20) and said at least one blocking ring nut (5) between said main body (3) and said fastening means (4);
 - b) joining said fastening means (4) to said main body (3);
 - c) inserting said at least one pipe (2) inside said fitting (1);
 - d) tightening said fastening means (4) to said main body (3);

wherein the step b) of the method is performed before said steps c) and d),
and wherein the step a) of the method is preceded by the step of retaining in a widened position, by said retaining means (7), at least the mouth section (20a) of said at least one annular gasket (20) with an inner diameter greater than the outer diameter (De) of said at least one pipe (2).
2. Fitting (1) for at least one pipe (2) for implementing the method according to claim 1, comprising a main body (3) for internally accommodating said at least one pipe (2), fastening means (4) able to be tightened to said main body (3), said main body (3) accommodating at least one deformable annular sealing gasket (20) that is provided with at least one mouth section for said at least one pipe (2), and at least one blocking ring nut (5) for firmly and sealingly locking said pipe (2) at least when said fastening means (4) are tightened to said main body (3), said blocking ring nut (5) being elastically deformable at least in radial direction, said fitting comprising as well means (7) for retaining in widened position at least the mouth section (20a) of said at least one annular sealing gasket (20) with an inner diameter larger than the outer diameter (De) of said at least one pipe (2).
3. Fitting (1) according to claim 2, **characterized in that** said means (7) for retaining in widened position at least the mouth section (20a) of said at least one annular sealing gasket (20) comprise means for stiffening at least said mouth section (20a).
4. Fitting (1) according to the claim 2 or 3, **characterized in that** said means (7) for retaining in widened position at least the mouth section (20a) of said at least one annular sealing gasket (20) comprise at least one annular stiff element having an inner diameter (Di) larger than the outer diameter (De) of said at least one pipe.
5. Fitting according to the claim 4, wherein said at least one annular stiff element comprises a coupling element (7'c), radially jutting, for the engagement with part of the inner surface of said sealing gasket (20).
6. Fitting (1) according to claim 4 or 5, **characterized in that** said at least one annular stiff element (7) can be removably combined to said at least one gasket (20).
7. Fitting (1) according to claim 4, **characterized in that** said at least one annular stiff element (7) is immovably fastened to said at least one gasket (20).
8. Fitting (1) according to claim 7, **characterized in that** said at least one annular stiff element (7) is welded and/or glued to said at least one sealing gasket (20), or said at least one sealing gasket (20) is molded atop to said at least one annular stiff element (7).
9. Fitting (1) according to one or more of the claims 2 to 8, **characterized in that** said at least one annular stiff element (7) comprises at least one radially jutting edge (7b) with respect to its outer surface (7a) to space said at least one sealing gasket (20) and said at least one blocking ring nut from each other, at least when said fastening means (4) are tightened to said main body (3).
10. Fitting (1) according to any one of the claims 2 to 9, **characterized in that** said at least one blocking ring nut (5) comprises at least one axial notch.
11. Fitting (1) according to one or more of the claims 2 to 10, **characterized in that** said at least one sealing gasket (20) is made of rubber or other synthetic or natural deformable material.
12. Fitting (1) according to one or more of the claims 2 to 11, **characterized in that** said at least one annular stiff element (7) is made of a material selected from plastic and/or metal.
13. Fitting (1) according to one or more of the claims 2

to 12, **characterized in that** said at least one locking ring nut (5) is provided with an ending portion (60) that could be engaged to said fastening means (4).

14. Fitting (1) according to claim 13, **characterized in that** said at least one ending portion (60) is concave to accommodate at least one ending portion (80) of said fastening means (4).
15. Fitting (1) according to one or more of the claims 2 to 14, **characterized in that** said at least one pipe (2) is made of a material selected from plastic, metal or a plastic - metal composite.
16. Fitting (1) according to any one of the claims 2 to 15, **characterized in that** said annular gasket (20) has a substantially truncated cone, or cylindrical or toroidal development.

Patentansprüche

1. Verfahren zum Verbinden zumindest eines Rohrs an ein Anschlussstück der Bauart enthaltend einen Hauptkörper (3) zur Aufnahme des mindestens einen Rohrs (2) in diesem, Befestigungsmittel (4), die geeignet sind an den Hauptkörper (3) angezogen zu werden, wobei der Hauptkörper (3) mindestens eine verformbare, ringförmige Dichtung (20) aufnimmt, die mit mindestens einem Mündungsabschnitt für das mindestens eine Rohr (2) versehen ist, und mindestens eine Sperrringmutter (5) zum festen und abdichtenden Verriegeln des Rohrs (2), zumindest wenn die Befestigungsmittel (4) an dem Hauptkörper (3) angezogen werden, wobei die Sperrringmutter (5) zumindest in radialer Richtung elastisch verformbar ist, wobei das Anschlussstück weiterhin Mittel (7) umfasst, um zumindest den Mündungsabschnitt (20a) der mindestens einen ringförmigen Dichtung (20) in aufgeweiteter Stellung bei einem Innendurchmesser größer als der Außendurchmesser (De) des mindestens einen Rohrs (2) zu halten, wobei das Verfahren **gekennzeichnet ist durch** das Vorhandensein der Schritte:

- a) Positionieren der mindestens einen ringförmigen Dichtung (20) und der mindestens einen Sperrringmutter (5) zwischen dem Hauptkörper (3) und den Befestigungsmitteln (4);
- b) Verbinden der Befestigungsmittel (4) an den Hauptkörper (3);
- c) Einführen des mindestens einen Rohrs (2) innerhalb des Anschlussstückes (1);
- d) Festziehen der Befestigungsmittel (4) an dem Hauptkörper (3);

wobei der Schritt b) des Verfahrens vor Schritt c) und d) durchgeführt wird,

und wobei dem Schritt a) des Verfahrens der Schritt vorangestellt ist, wobei mittels der Rückhaltemittel (7) zumindest der Mündungsabschnitt (20a) der mindestens einen ringförmigen Dichtung (20) in aufgeweiteter Stellung bei einem Innendurchmesser größer als der Außendurchmesser (De) des mindestens einen Rohrs (2) gehalten wird.

2. Anschlussstück (1) für mindestens ein Rohr (2) zur Durchführung des Verfahrens gemäß Anspruch 1, umfassend einen Hauptkörper (3) zur Aufnahme innerhalb desselben des mindestens einen Rohrs (2), Befestigungsmittel (4), die geeignet sind an den Hauptkörper (3) angezogen zu werden, wobei der Hauptkörper (3) mindestens eine verformbare, ringförmige Dichtung (20) aufnimmt, die mit mindestens einem Mündungsabschnitt für das mindestens eine Rohr (2) versehen ist, und mindestens eine Sperrringmutter (5) zum festen und abdichtenden Verriegeln des Rohrs (2), zumindest wenn die Befestigungsmittel (4) an dem Hauptkörper (3) angezogen werden, wobei die Sperrringmutter (5) zumindest in radialer Richtung elastisch verformbar ist, wobei das Anschlussstück weiterhin Mittel (7) umfasst, um zumindest den Mündungsabschnitt (20a) der mindestens einen ringförmigen Dichtung (20) in aufgeweiteter Stellung bei einem Innendurchmesser größer als der Außendurchmesser (De) des mindestens einen Rohrs (2) zu halten.
3. Anschlussstück (1) gemäß Anspruch 2, **dadurch gekennzeichnet, dass** die Mittel (7) zum Halten zumindest des Mündungsabschnittes (20a) der mindestens einen ringförmigen Dichtung (20) in aufgeweiteter Stellung Mittel zur Versteifung zumindest des Mündungsabschnittes (20a) aufweisen.
4. Anschlussstück (1) gemäß Anspruch 2 oder 3, **dadurch gekennzeichnet, dass** die Mittel (7) zum Halten zumindest des Mündungsabschnittes (20a) der zumindest einen ringförmigen Dichtung (20) in aufgeweiteter Stellung mindestens ein ringförmiges steifes Element aufweist mit einem Innendurchmesser (Di), der größer ist als der Außendurchmesser (De) des mindestens einen Rohrs.
5. Anschlussstück gemäß Anspruch 4, wobei das mindestens eine ringförmige steife Element ein Kuppelungselement (7'c) aufweist, das radial vorspringt für den Eingriff mit einem Teil der Innenfläche der Dichtung (20).
6. Anschlussstück (1) gemäß Anspruch 4 oder 5, **dadurch gekennzeichnet, dass** das mindestens eine ringförmige steife Element (7) lösbar an die mindestens eine Dichtung (20) gekoppelt werden kann.
7. Anschlussstück (1) gemäß Anspruch 4, **dadurch**

gekennzeichnet, dass das mindestens eine ringförmige steife Element (7) unverrückbar an der mindestens einen Dichtung (20) befestigt ist.

8. Anschlussstück (1) gemäß Anspruch 7, **dadurch gekennzeichnet, dass** da mindestens eine ringförmige steife Element (7) an die mindestens eine Dichtung (20) geschweißt und/oder geklebt ist, oder die mindestens eine Dichtung (20) oben auf das mindestens eine ringförmige steife Element (7) angeformt ist. 5
9. Anschlussstück (1) gemäß einem oder mehreren der Ansprüche 2 bis 8, **dadurch gekennzeichnet, dass** das mindestens eine ringförmige steife Element (7) mindestens eine radiale vorspringende Kante (7b) bezüglich seiner Außenfläche (7a) aufweist, um die mindestens eine Dichtung (20) und die mindestens eine Sperrringmutter voneinander zu beabstanden, zumindest wenn die Befestigungsmittel (4) an dem Hauptkörper angezogen sind (3). 10
10. Anschlussstück (1) gemäß irgendeinem der Ansprüche 2 bis 9, **dadurch gekennzeichnet, dass** die mindestens eine Sperrringmutter (5) zumindest eine axiale Einkerbung aufweist. 15
11. Anschlussstück (1) gemäß einem oder mehreren der Ansprüche 2 bis 10, **dadurch gekennzeichnet, dass** die mindestens eine Dichtung (20) aus Gummi oder anderen synthetischen oder natürlichen verformbaren Materialien hergestellt ist. 20
12. Anschlussstück (1) gemäß einem oder mehreren der Ansprüche 2 bis 11, **dadurch gekennzeichnet, dass** das mindestens eine ringförmige steife Element (7) aus einem Material gefertigt ist ausgewählt aus Kunststoff und/oder Metall. 25
13. Anschlussstück (1) gemäß einem oder mehreren der Ansprüche 2 bis 12, **dadurch gekennzeichnet, dass** die mindestens eine Sperrringmutter (5) mit einem Endteil (60) versehen ist, das an die Befestigungsmittel (4) in Eingriff gebracht werden kann. 30
14. Anschlussstück (1) gemäß Anspruch 13, **dadurch gekennzeichnet, dass** das mindestens eine Endteil (60) konkav ist, um mindestens ein Endteil (80) der Befestigungsmittel (4) aufzunehmen. 35
15. Anschlussstück (1) gemäß einem oder mehreren der Ansprüche 2 bis 14, **dadurch gekennzeichnet, dass** das mindestens ein Rohr (2) aus einem Material gefertigt ist ausgewählt aus Kunststoff, Metall oder einem Kunststoff-Metall-Verbund. 40
16. Anschlussstück (1) gemäß irgendeinem der Ansprüche 2 bis 15, **dadurch gekennzeichnet, dass** die 45

ringförmige Dichtung (20) eine im Wesentlichen kegelförmige oder zylindrische oder torusförmige Gestalt aufweist.

Revendications



1. Procédé pour relier au moins un tuyau à un raccord du type comprenant un corps principal (3) pour loger en interne ledit au moins un tuyau (2), des moyens de fixation (4) capables d'être serrés audit corps principal (3), ledit corps principal (3) logeant au moins un joint étanche annulaire déformable (20), doté d'au moins une section de bouche pour ledit au moins un tuyau (2), et au moins un écrou annulaire de blocage (5) pour bloquer fermement et de manière étanche ledit tuyau (2), au moins lorsque lesdits moyens de fixation (4) sont serrés audit corps principal (3), ledit écrou annulaire de blocage (5) étant élastiquement déformable au moins dans la direction radiale, ledit raccord comprenant aussi des moyens (7) pour retenir en position élargie au moins la section de bouche (20a) dudit au moins un joint étanche annulaire (20) avec un diamètre intérieur plus grand que le diamètre extérieur (De) dudit au moins un tuyau (2), le procédé étant **caractérisé en ce qu'il** comprend les étapes de : 50


- a) positionnement dudit au moins un joint étanche annulaire (20) et dudit au moins un écrou annulaire de blocage (5) entre ledit corps principal (3) et lesdits moyens de fixation (4) ;
- b) jonction desdits moyens de fixation (4) audit corps principal (3) ;
- c) insertion dudit au moins un tuyau (2) dans ledit raccord (1) ;
- d) serrage desdits moyens de fixation (4) audit corps principal (3) ;

dans lequel l'étape b) du procédé est réalisé avant lesdites étapes c) et d),
et dans lequel l'étape a) du procédé est précédée par l'étape de retenue dans une position élargie, par lesdits moyens de retenue (7), au moins de la section de bouche (20a) dudit au moins un joint annulaire (20) avec un diamètre intérieur plus grand que le diamètre extérieur (De) dudit au moins un tuyau (2).

2. Raccord (1) pour au moins un tuyau (2) pour la mise en oeuvre du procédé selon la revendication 1, comprenant un corps principal (3) pour loger en interne ledit au moins un tuyau (2), des moyens de fixation (4) capables d'être serrés audit corps principal (3), ledit corps principal (3) logeant au moins un joint étanche annulaire déformable (20) qui est doté d'au moins une section de bouche pour ledit au moins un tuyau (2) et au moins un écrou annulaire de blocage (5) pour bloquer fermement et de manière étanche 55

- ledit tuyau (2) au moins lorsque lesdits moyens de fixation (4) sont serrés audit corps principal (3), ledit écrou annulaire de blocage (5) étant déformable élastiquement au moins dans la direction radiale, ledit raccord comprenant aussi des moyens (7) pour retenir en position élargie au moins la section de bouche (20a) dudit au moins un joint étanche annulaire (20) avec un diamètre intérieur plus grand que le diamètre extérieur (De) dudit au moins un tuyau (2).
- 5
- 10
3. Raccord (1) selon la revendication 2, **caractérisé en ce que** lesdits moyens (7) pour la retenue en position élargie d'au moins la section de bouche (20a) dudit au moins un joint étanche annulaire (20) comprennent des moyens pour rigidifier au moins ladite section de bouche (20a).
- 15
4. Raccord (1) selon la revendication 2 ou 3, **caractérisé en ce que** lesdits moyens (7) pour la retenue en position élargie au moins de la section de bouche (20a) dudit au moins un joint étanche annulaire (20) comprennent au moins un élément rigide annulaire présentant un diamètre intérieur (Di) plus grand que le diamètre extérieur (De) dudit au moins un tuyau.
- 20
- 25
5. Raccord selon la revendication 4, dans lequel ledit au moins un élément rigide annulaire comprend un élément de couplage (7c) surplombant radialement pour l'engagement avec une partie de la surface intérieure dudit joint étanche (20).
- 30
6. Raccord (1) selon la revendication 4 ou 5, **caractérisé en ce que** ledit au moins élément rigide annulaire (7) peut être combiné de manière détachable audit au moins un joint (20).
- 35
7. Raccord (1) selon la revendication 4, **caractérisé en ce que** ledit au moins un élément rigide annulaire (7) est fixé de manière immobile audit au moins un joint (20).
- 40
8. Raccord (1) selon la revendication 7, **caractérisé en ce que** ledit au moins un élément rigide annulaire (7) est soudé et/ou collé audit au moins un joint étanche (20) ou ledit au moins un joint étanche (20) est moulé en haut audit au moins élément rigide annulaire (7).
- 45
9. Raccord (1) selon l'une ou plusieurs quelconques des revendications 2 à 8, **caractérisé en ce que** ledit au moins un élément rigide annulaire (7) comprend au moins une arête surplombant radialement (7b) par rapport à sa surface extérieure (7a) pour espacer ledit au moins un joint étanche (20) et ledit au moins un écrou annulaire de blocage l'un de l'autre, au moins lorsque lesdits moyens de fixation (4) sont serrés audit corps principal (3).
- 50
- 55
10. Raccord (1) selon l'une quelconque des revendications 2 à 9, **caractérisé en ce que** ledit au moins un écrou annulaire de blocage (5) comprend au moins une encoche axiale.
11. Raccord (1) selon l'une ou plusieurs quelconques des revendications 2 à 10, **caractérisé en ce que** ledit au moins un joint étanche (20) est constitué de caoutchouc ou autre matériau déformable synthétique ou naturel.
12. Raccord (1) selon l'une ou plusieurs quelconques des revendications 2 à 11, **caractérisé en ce que** ledit au moins un élément rigide annulaire (7) est constitué d'un matériau sélectionné parmi le plastique et/ou le métal.
13. Raccord (1) selon l'une ou plusieurs quelconques des revendications 2 à 12, **caractérisé en ce que** ledit au moins au moins un écrou annulaire de blocage (5) est doté d'une partie finale (60) qui pourrait être engagée sur lesdits moyens de fixation (4).
14. Raccord (1) selon la revendication 13, **caractérisé en ce que** ladite au moins une partie finale (60) est concave pour loger au moins une partie finale (80) desdits moyens de fixation (4).
15. Raccord (1) selon l'une ou plusieurs quelconques des revendications 2 à 14, **caractérisé en ce que** ledit au moins un tuyau (2) est constitué d'un matériau sélectionné parmi le plastique, le métal ou un composite plastique-métal.
16. Raccord (1) selon l'une ou plusieurs quelconques des revendications 2 à 15, **caractérisé en ce que** ledit joint annulaire (20) a un cône sensiblement tronqué ou développement cylindrique ou toroïdal.

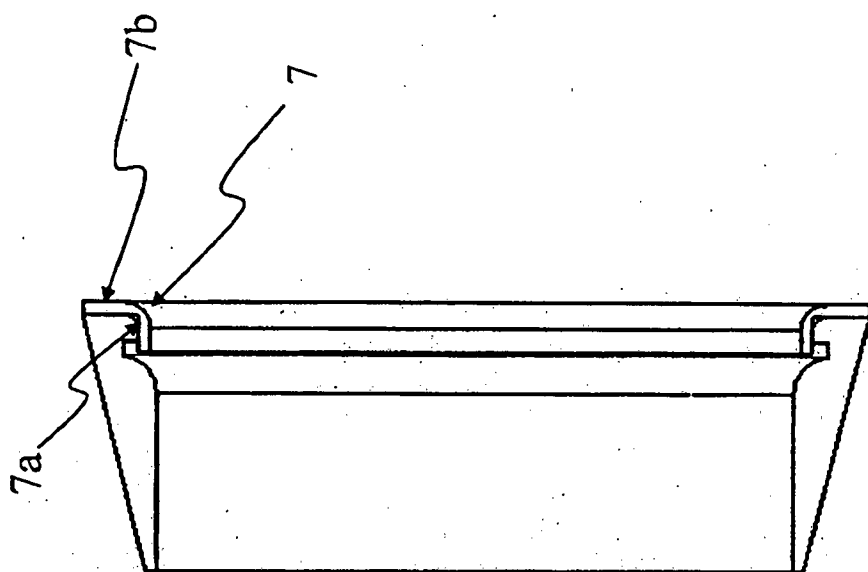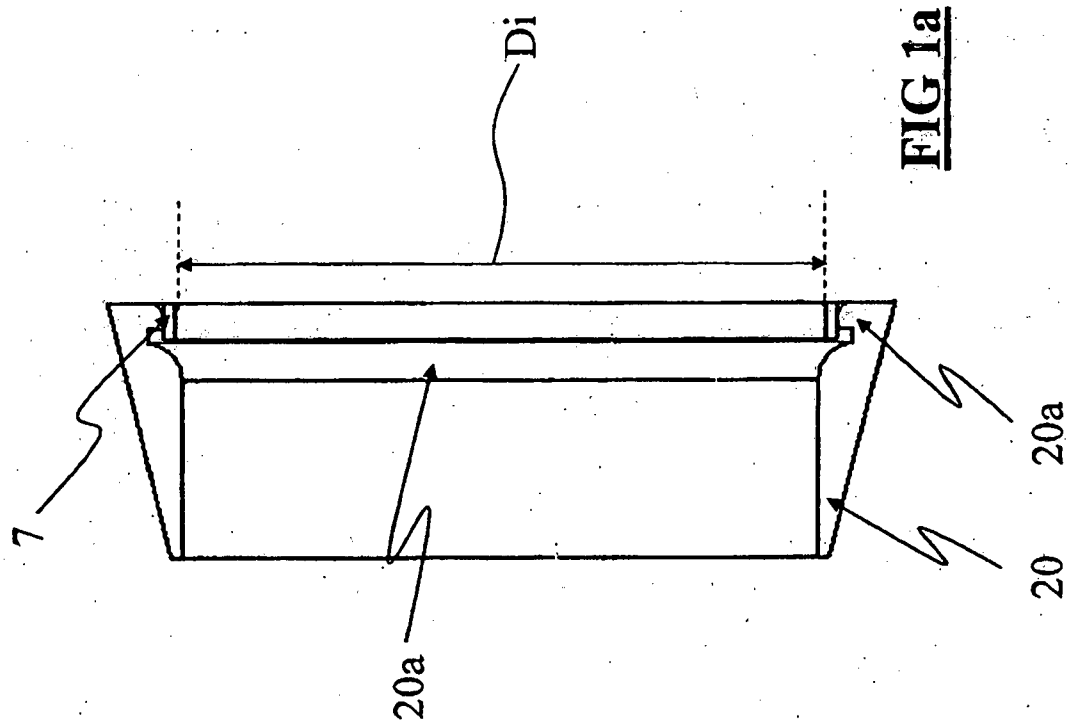

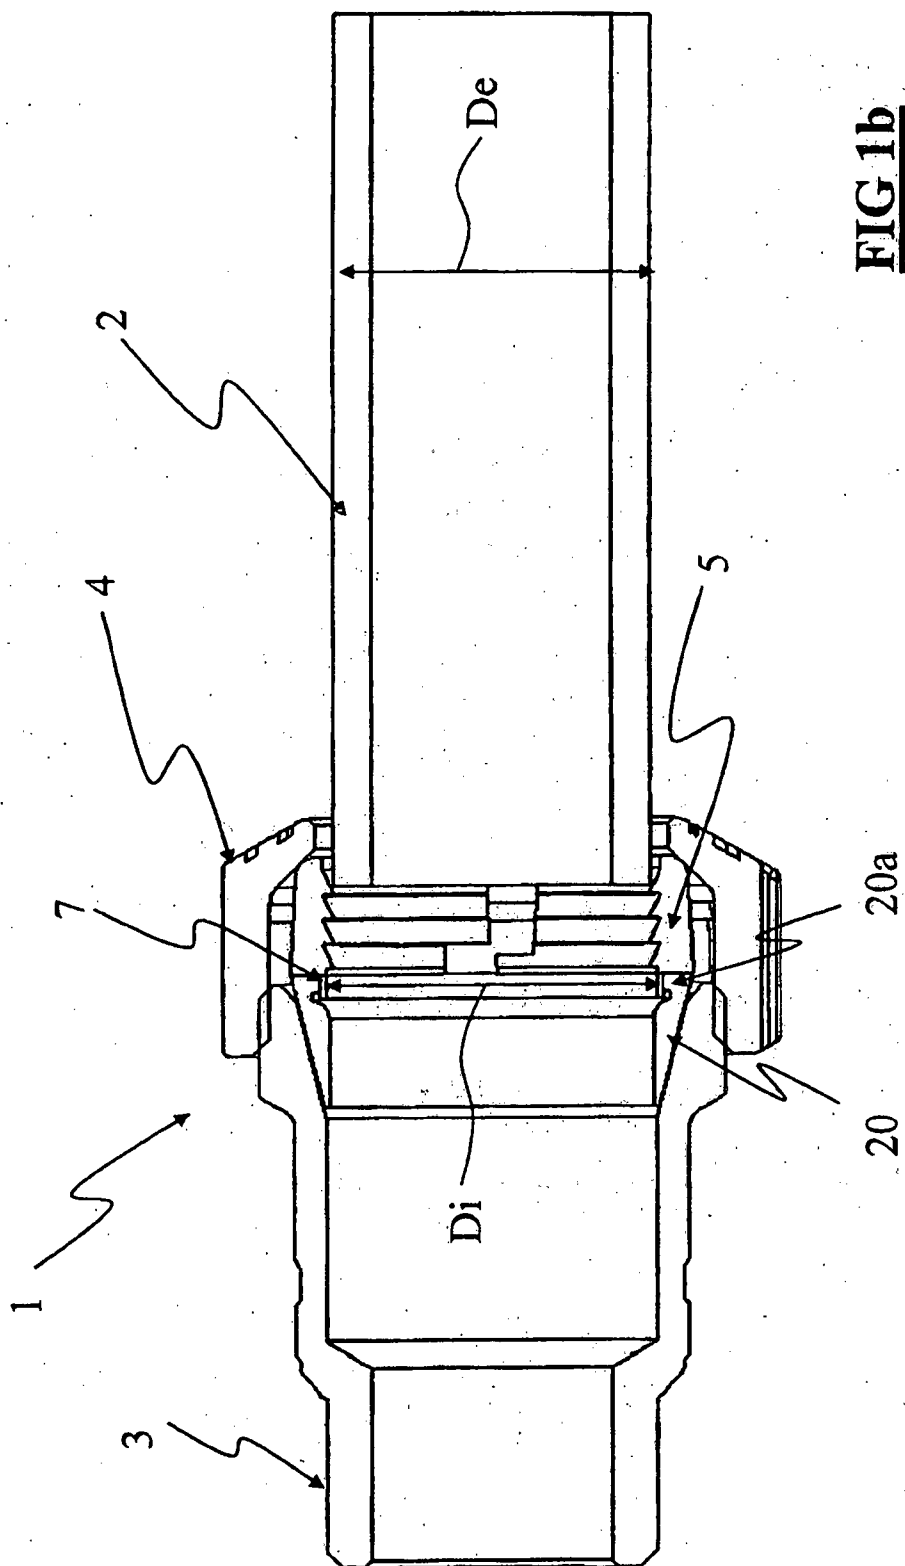

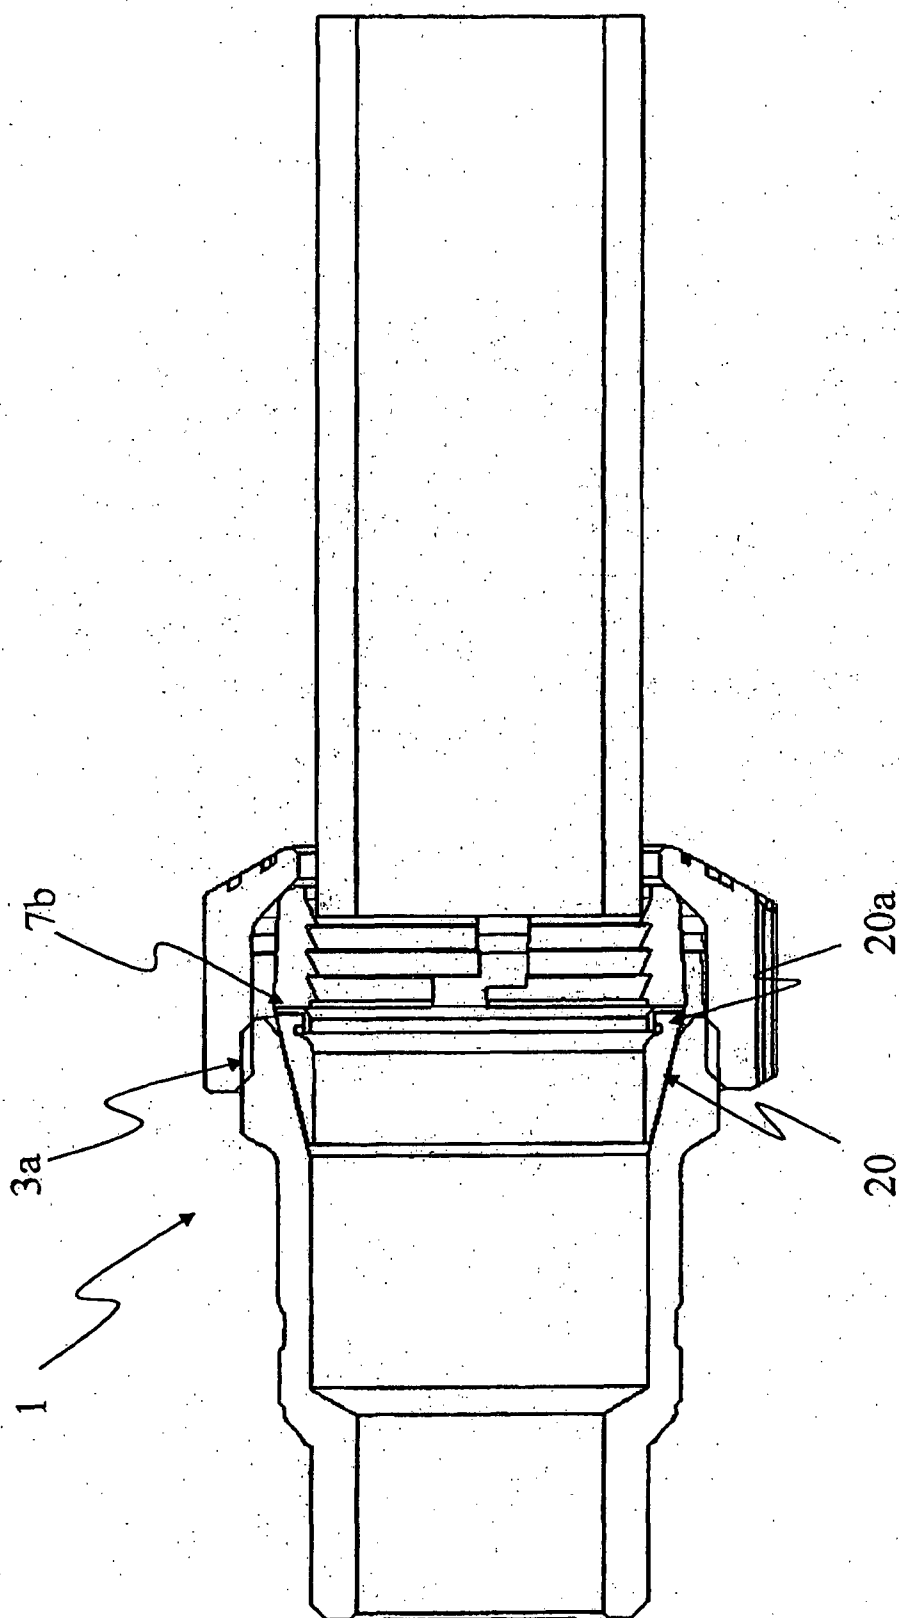
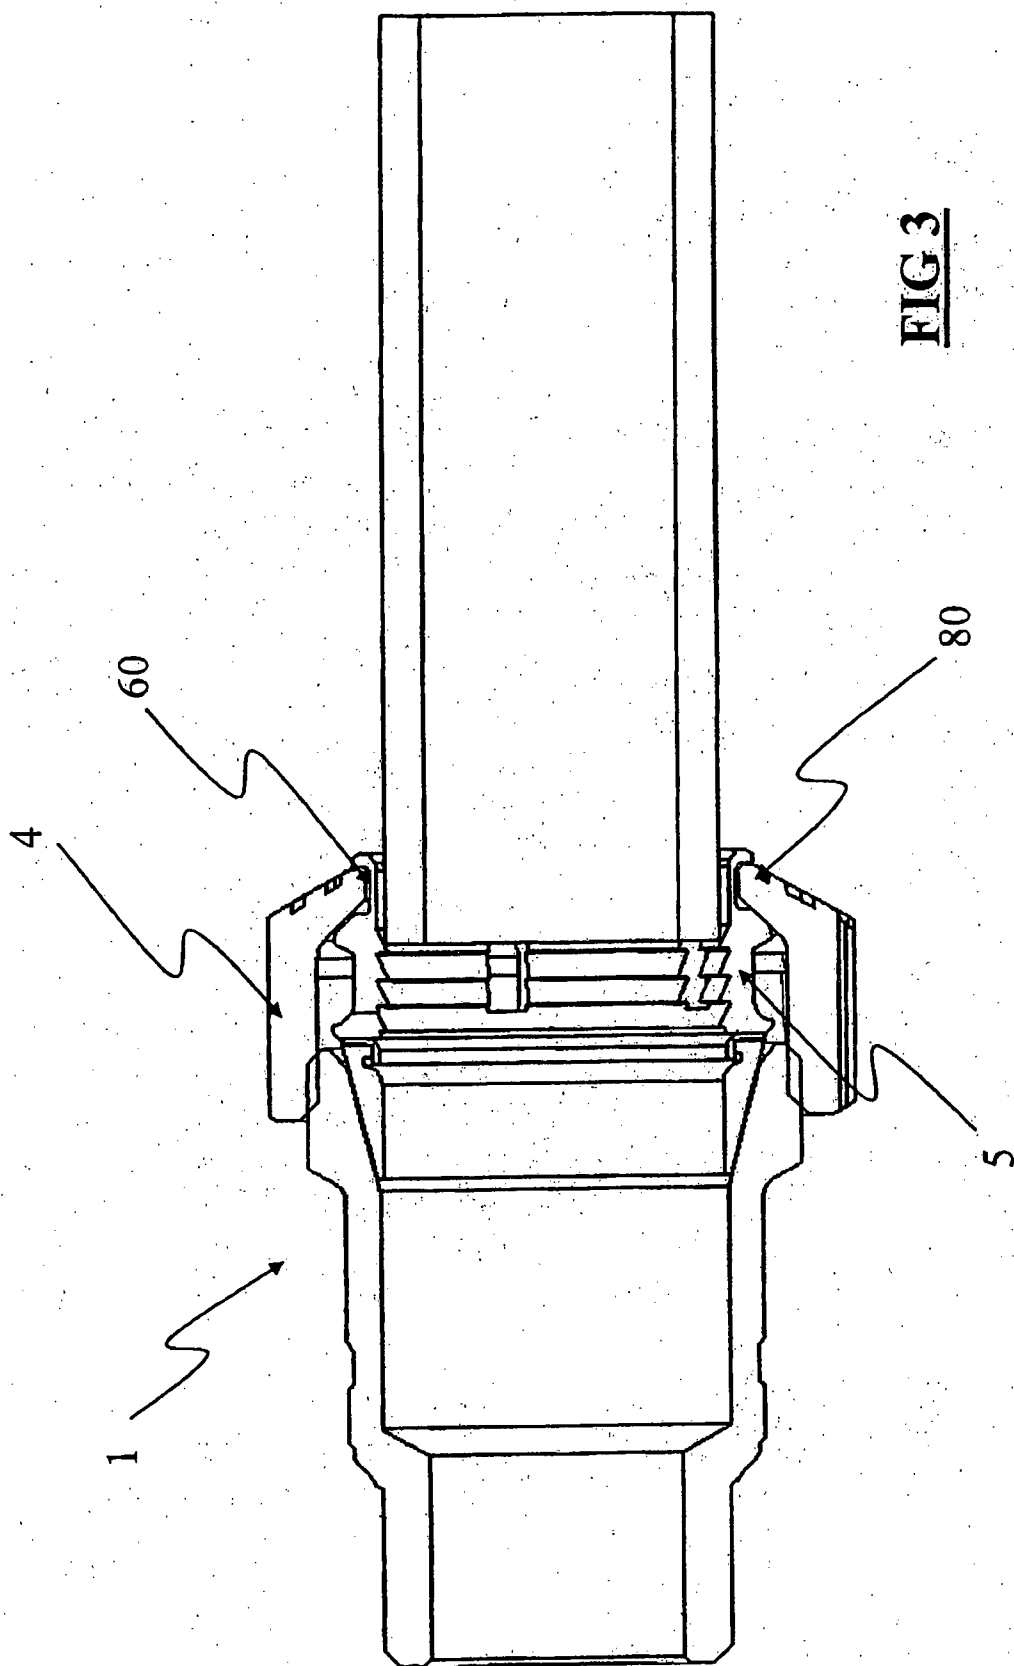


FIG 2b



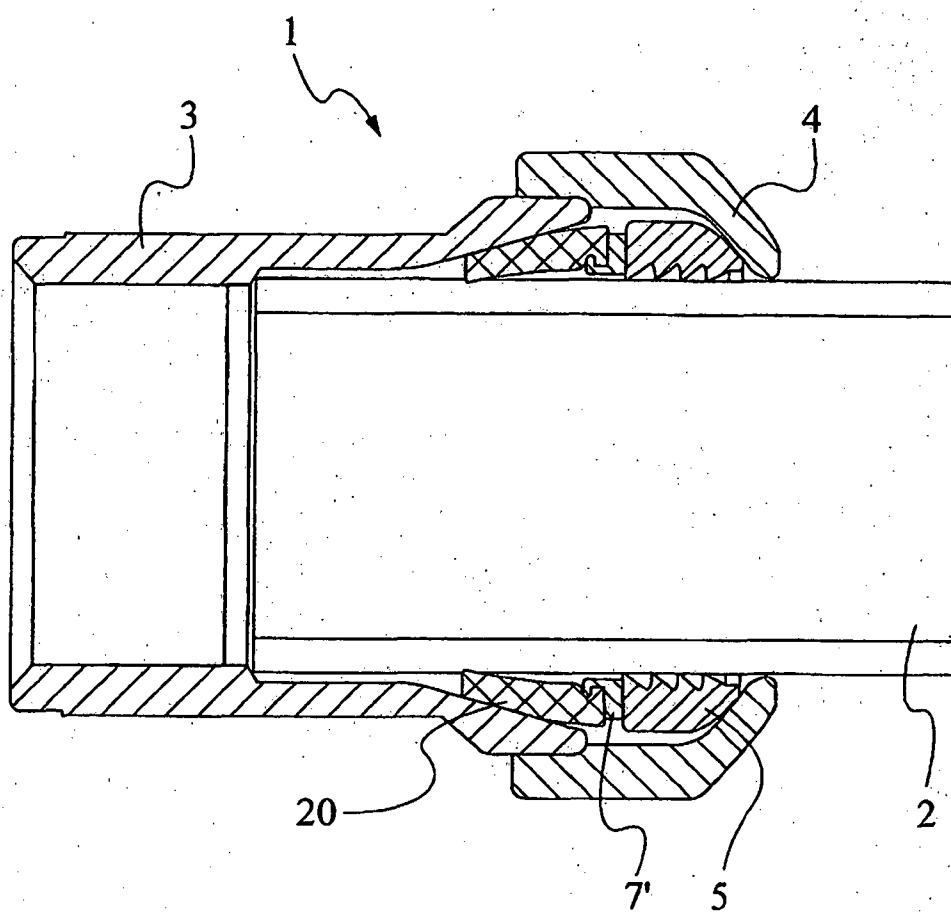


FIG 4

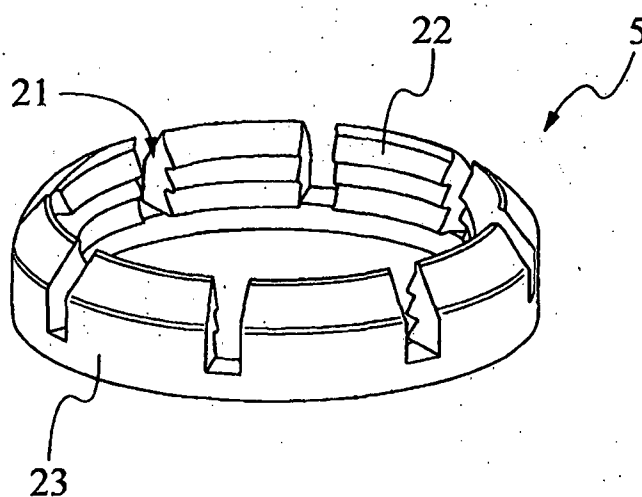


FIG 5

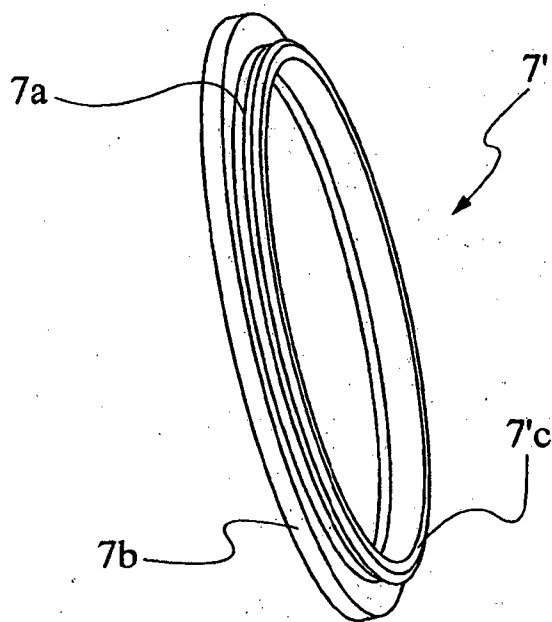



FIG 6

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3140107 A [0012]
- DE 4327236 [0012]



SZTNH-100024189

EP2697550

SZERELVÉNY CSŐVEKHEZ, ÉS ERRE VONATKOZÓ CSŐKAPCSOLÁSI ELJÁRÁS
SZABADALMI IGENYPONTOK

1. Eljárás legalább egy cső (pipe) hozzákapcsolására olyan típusú szerelvényhez (fitting), amely tartalmaz egy fő testet (main body) (3) az említett legalább egy cső (2) belső elhelyezéséhez (accomodating), rögzítő (fastening) eszközöket (4), amelyek képesek szorosan rögződni (tighten) az említett fő testhez (3), ahol az említett fő test (3), amelyben elhelyezkedik (accomodate) legalább egy deformálható gyűrű lezáró tömítőgyűrű (annular sealing gasket) (20), el van látva legalább egy szájnnyílás (mouth) szekcióval az említett legalább egy csőhöz (2), és legalább egy blokkoló gyűrűs anyával (blocking ring nut) (5) az említett cső (2) szoros és lezáró (firm and sealing) zárásához, legalább akkor, amikor az említett rögzítő eszköz (4) szorosan hozzá van rögzítve (tighten) az említett fő testhez (3), ahol az említett blokkoló gyűrűs anya (5) rugalmasan deformálható legalább sugárirányban; az említett szerelvény tartalmaz továbbá eszközöket (7) a megtartáshoz (retaining) kiszélesített (widened) pozícióban az említett legalább egy gyűrű lezáró tömítőgyűrűnek (20) legalább a szájnnyílásánál (20a), olyan belső átmérővel, amely nagyobb, mint az említett legalább egy cső (2) külső átmérője (De); az eljárást **az jellemzi, hogy** a következő lépéseket tartalmazza:

- a) elhelyezzük (positioning) az említett legalább egy gyűrű lezáró tömítőgyűrűt (20) és az említett legalább egy blokkoló gyűrűs anyát (5) az említett fő test (3) és az említett rögzítő eszköz (4) közé,
- b) hozzácsatoljuk (join) az említett rögzítő eszközt (4) az említett fő testhez (3);
- c) beiktatjuk (insert) az említett legalább egy csövet (2) az említett szerelvény (1) belsejébe;
- d) szorosan rögzítjük (tighten) az említett rögzítő eszközt (4) az említett fő testhez (3);

ahol az eljárás b) lépését az említett c) és d) lépés előtt hajtjuk végre,

és ahol az eljárás a) lépését megelőzi a megtartás (retaining) lépése egy kiszélesített pozícióban az említett megtartó eszközök (7) révén az említett legalább egy gyűrű alakú tömítőgyűrűnek (20) legalább a szájnnyílásánál (20a) olyan belső átmérővel, amely nagyobb, mint az említett legalább egy cső (2) külső átmérője (De).

2. Szerelvény (1) legalább egy csőhöz (2) az 1. igénypont szerinti eljárás kivitelezéséhez (implementing), amely szerelvény tartalmaz egy fő testet (main body) (3) az említett legalább egy cső (2) belső elhelyezéséhez (accomodating), rögzítő (fastening) eszközöket (4), amelyek képesek szorosan rögződni (tighten) az említett fő testhez (3), ahol az említett fő test (3), amelyben elhelyezkedik (accomodate) egy deformálható gyűrű lezáró tömítőgyűrű (annular sealing gasket) (20), el van látva legalább egy szájnnyílás (mouth) szekcióval az említett legalább egy csőhöz (2), és legalább egy blokkoló gyűrűs anyával (blocking ring nut) (5) az említett cső (2) szoros és lezáró (firm and sealing) zárásához, legalább akkor, amikor az említett rögzítő eszköz (4) szorosan hozzá van rögzítve (tighten) az említett fő testhez (3), ahol az említett blokkoló gyűrűs anya (5) rugalmasan deformálható legalább sugárirányban; az említett szerelvény tartalmaz továbbá eszközöket (7) a megtartáshoz (retaining) kiszélesített (widened) pozícióban az említett legalább egy gyűrű lezáró tömítőgyűrűnek (20) legalább a szájnnyílásánál (20a), olyan belső átmérővel, amely nagyobb, mint az említett legalább egy cső külső átmérője (De).

3. A 2. igénypont szerinti szerelvény (1), **azzal jellemezve, hogy** az említett eszköz (7) a megtartáshoz kiszélesített pozícióban az említett legalább egy gyűrű lezáró tömítőgyűrűnek (20) legalább a szájnnyílás (20a) szekciójában tartalmaz eszközöket legalább az említett szájnnyílás szekció (20a) merevítéséhez (stiffening).

4. A 2. vagy 3. igénypont szerinti szerelvény (1), **azzal jellemezve, hogy** az említett eszköz (7) a megtartáshoz kiszélesített pozícióban az említett legalább egy gyűrű lezáró tömítőgyűrűnek (20) legalább a szájnnyílás (20a) szekciójában tartalmaz legalább egy gyűrű alakú merev (annular stiff) elemet, ahol ez olyan belső átmérővel (Di) bír, amely nagyobb, mint az említett legalább egy cső külső átmérője (De).

5. A 4. igénypont szerinti szerelvény (1), ahol az említett legalább egy gyűrű alakú merev elem tartalmaz egy kapcsoló (coupling) elemet (7c) sugárirányban kiugorva (jutting) a kapcsolódáshoz (engagement) az említett lezáró tömítőgyűrű (20) belső felületének

egy részével.

6. A 4. vagy 5. igénypont szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy gyűrű alakú merev elem (7) eltávolíthatóan lehet kombinálva az említett legalább egy tömítőgyűrűvel (20).
7. A 4. igénypont szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy gyűrű alakú merev elem (7) mozdíthatatlanul van rögzítve az említett legalább egy tömítőgyűrűhöz (20).
8. A 7. igénypont szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy gyűrű alakú merev elem (7) hegesztve van vagy ragasztva van az említett legalább egy lezáró tömítőgyűrűhöz (20), vagy az említett legalább egy lezáró tömítőgyűrű rá van öntve (moulded) az említett legalább egy gyűrű alakú merev elem (7) tetejére (atop).
9. A 2-8. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy gyűrű alakú merev elem (7) tartalmaz legalább egy sugárirányban kiugró élet (jutting edge) (7b) tekintettel külső felületére (7a), hogy térben elválassza (space) egymástól az említett legalább egy lezáró tömítőgyűrűt (20) és az említett legalább egy blokkoló gyűrűs anyát, legalább amikor az említett rögzítő eszközök (4) szorosan hozzá vannak rögzítve (tighten) az említett fő testhez (3).
10. A 2-9. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy blokkoló gyűrűs anya (5) tartalmaz legalább egy lengéyirányú hornyot (axial notch).
11. A 2-10. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy lezáró tömítőgyűrű (20) gumiból vagy más szintetikus vagy természetes deformálható anyagból készül.
12. A 2-11. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy gyűrű alakú merev elem (7) olyan anyagból készül, amely a következők közül választható ki: műanyag és/vagy fém.
13. A 2-12. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy blokkoló gyűrűs anya (5) el van látva egy végzáró résszel (ending portion) (60), amely hozzákapcsolódhat (engage) az említett rögzítő eszközökhöz (4).
14. A 13. igénypont szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy végzáró rész (60) homorú, hogy befogadja (accomodate) az említett rögzítő eszközök (4) legalább egy végzáró részét (60).
15. A 2-14. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett legalább egy cső (2) olyan anyagból van készítve, amely a következők közül választható ki: műanyag, fém és műanyag-fém kompozit.
16. A 2-15. igénypontok bármelyike szerinti szerelvény (1), **azzal jellemezve, hogy** az említett gyűrűt lezáró tömítőgyűrű (20) lényegében csónkakúp vagy henger vagy gyűrű (toroid) alakra van kifejlesztve.