




US 20120002796A1

(19) **United States**(12) **Patent Application Publication**
Wang et al.(10) **Pub. No.: US 2012/0002796 A1**(43) **Pub. Date: Jan. 5, 2012**(54) **METHOD AND SYSTEM FOR CALLED
PARTY TO PROVIDE INDICATION
INFORMATION TO CALLING PARTY****Publication Classification**(51) **Int. Cl.****H04M 1/56** (2006.01)**H04M 3/42** (2006.01)(52) **U.S. Cl. 379/142.04; 379/201.01**(57) **ABSTRACT**

The present invention discloses a method for a called party to provide indication information for a calling party. The method includes the steps of: presetting the indication information to be provided to the calling party at the called party; before the called party answers the call in the connection procedure between the calling party and the called party, the network side obtaining the preset indication information from the called party and sending the indication information to the calling party. Accordingly, the present invention discloses a system for a called party to provide the indication information to a calling party. The present invention makes it possible that the called party flexibly selects the indication information to be provided to the calling party and the problem that only the indication information in the indication information database can be provided is avoided.

(75) **Inventors:** **Jun Wang**, Shenzhen (CN); **Yan Li**,
Shenzhen (CN); **Yi Zhang**,
Shenzhen (CN); **Jianfeng Liu**,
Shenzhen (CN)(73) **Assignee:** **Huawei Technologies Co., Ltd.**,
Shenzhen (CN)(21) **Appl. No.:** **13/176,677**(22) **Filed:** **Jul. 5, 2011****Related U.S. Application Data**(63) Continuation of application No. 11/505,108, filed on
Aug. 15, 2006, now Pat. No. 7,974,403.(30) **Foreign Application Priority Data**

Aug. 15, 2005 (CN) 200510092433.5

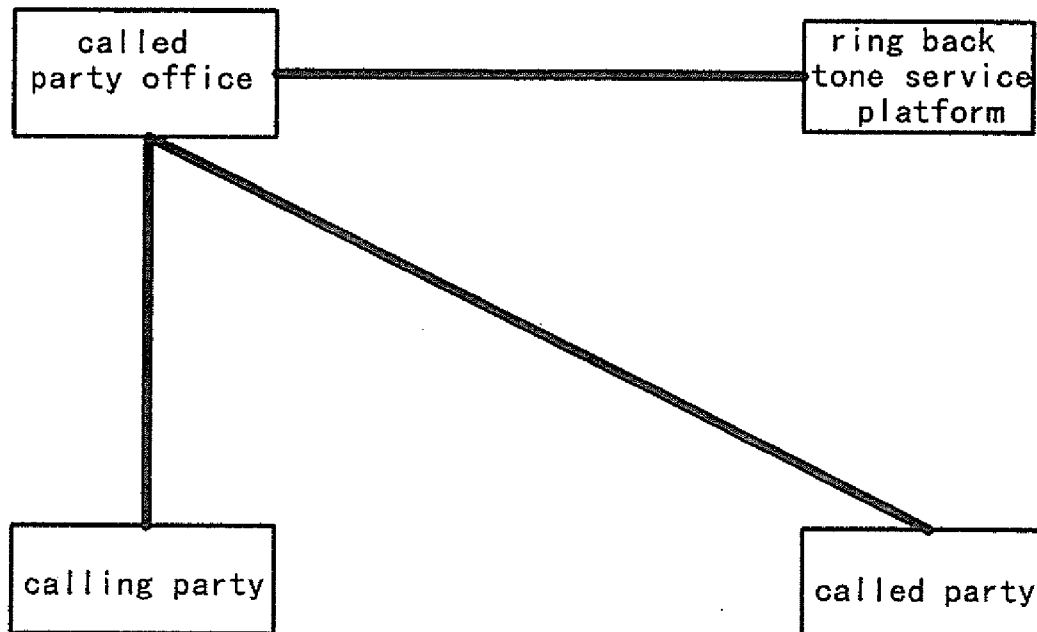

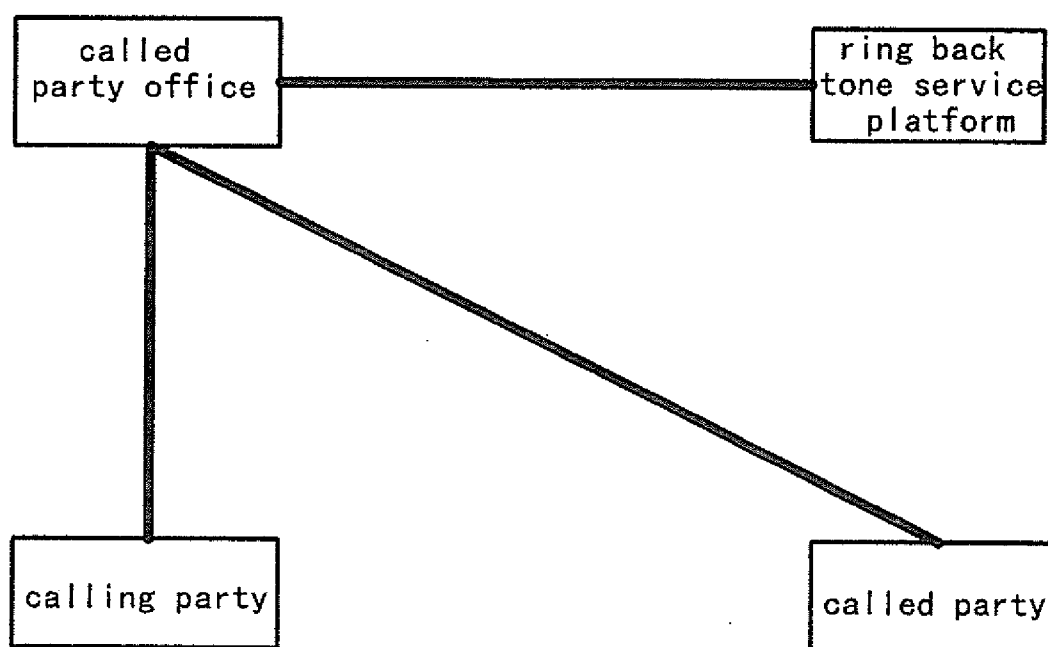


Fig. 1

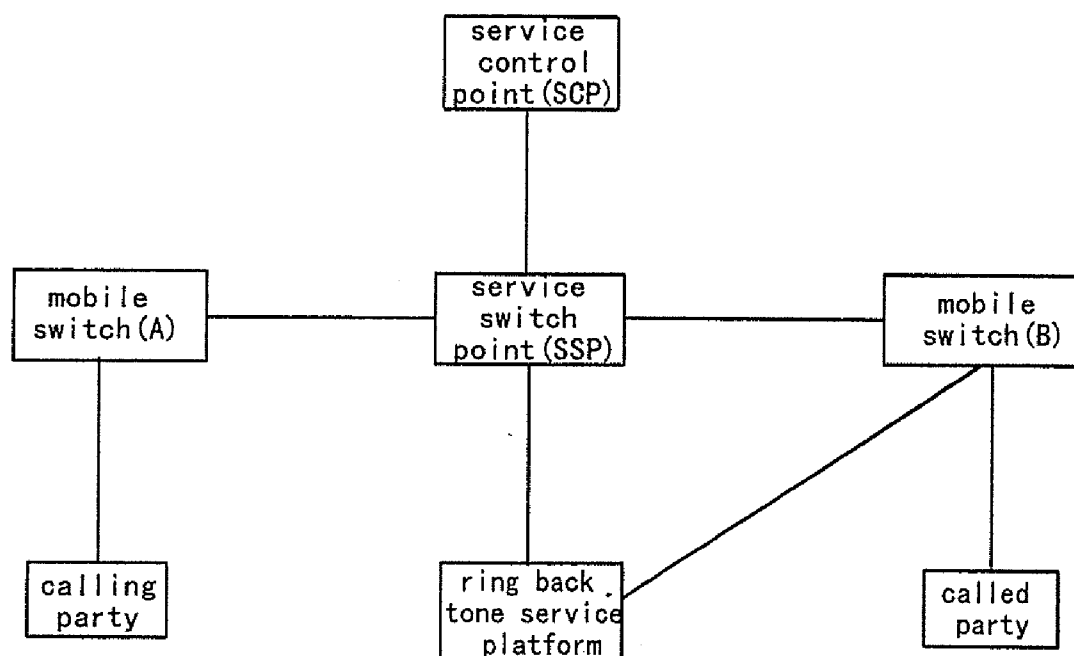


Fig. 2

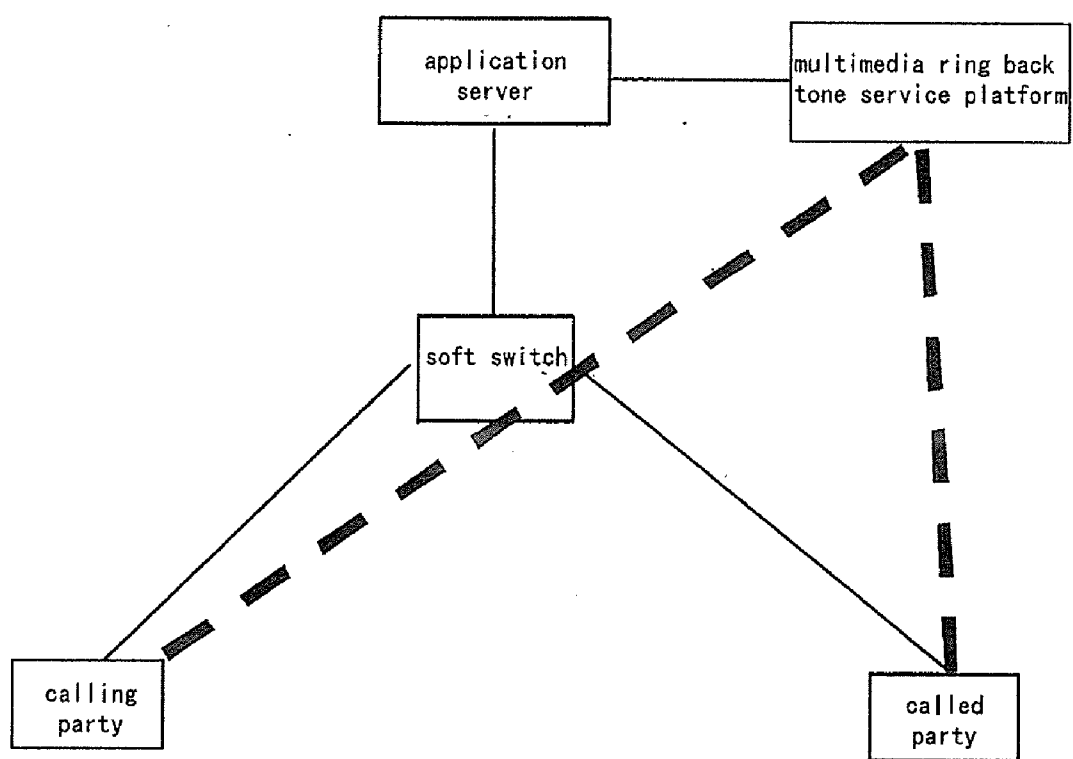


Fig. 3

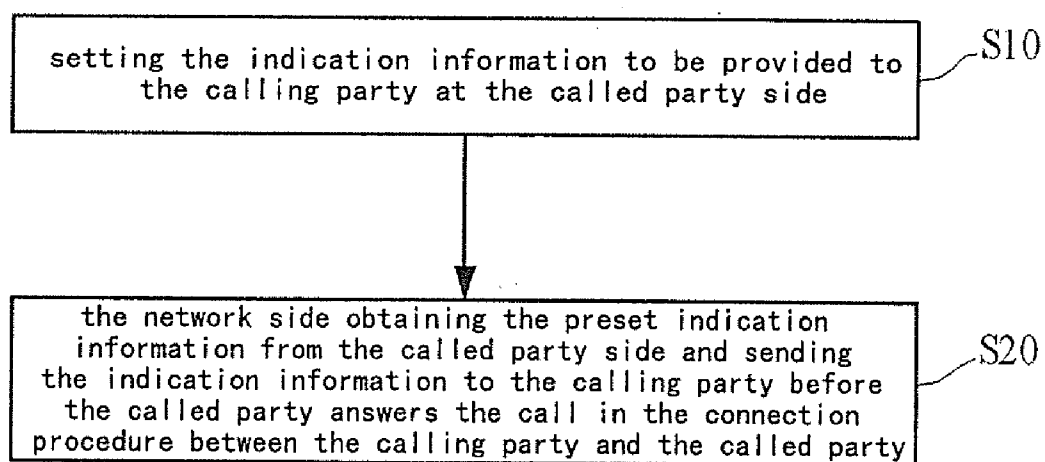


Fig. 4

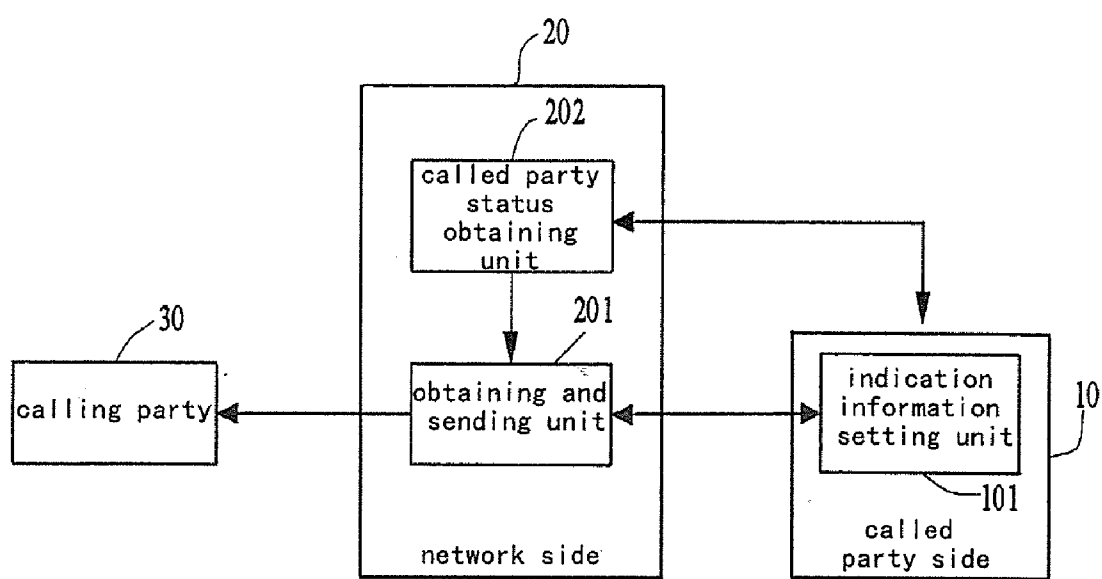


Fig. 5

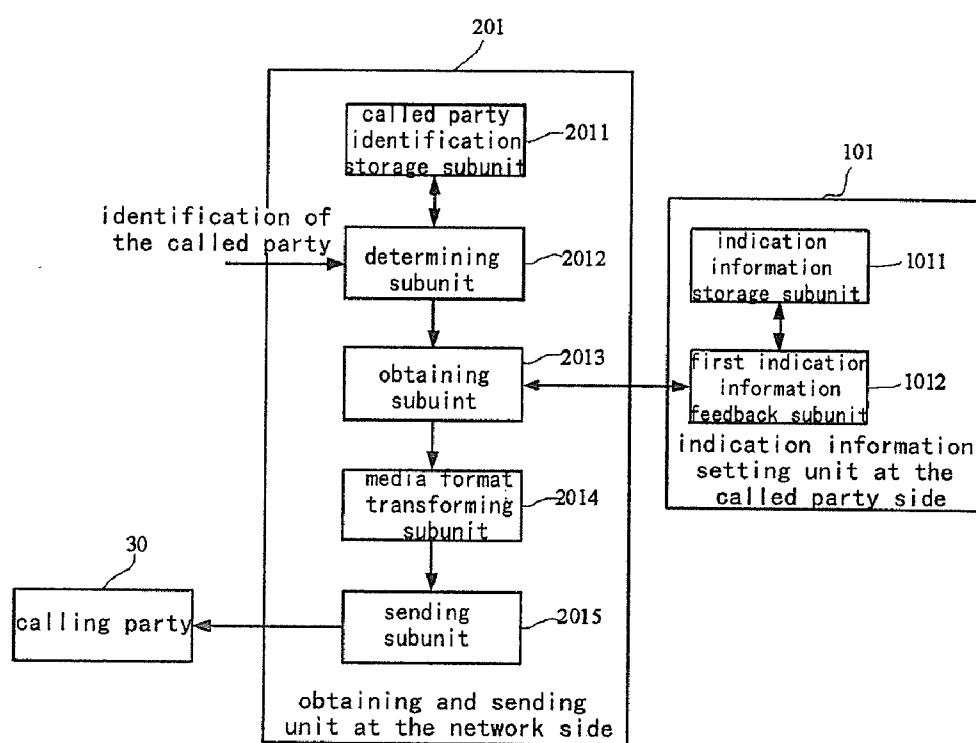


Fig. 6

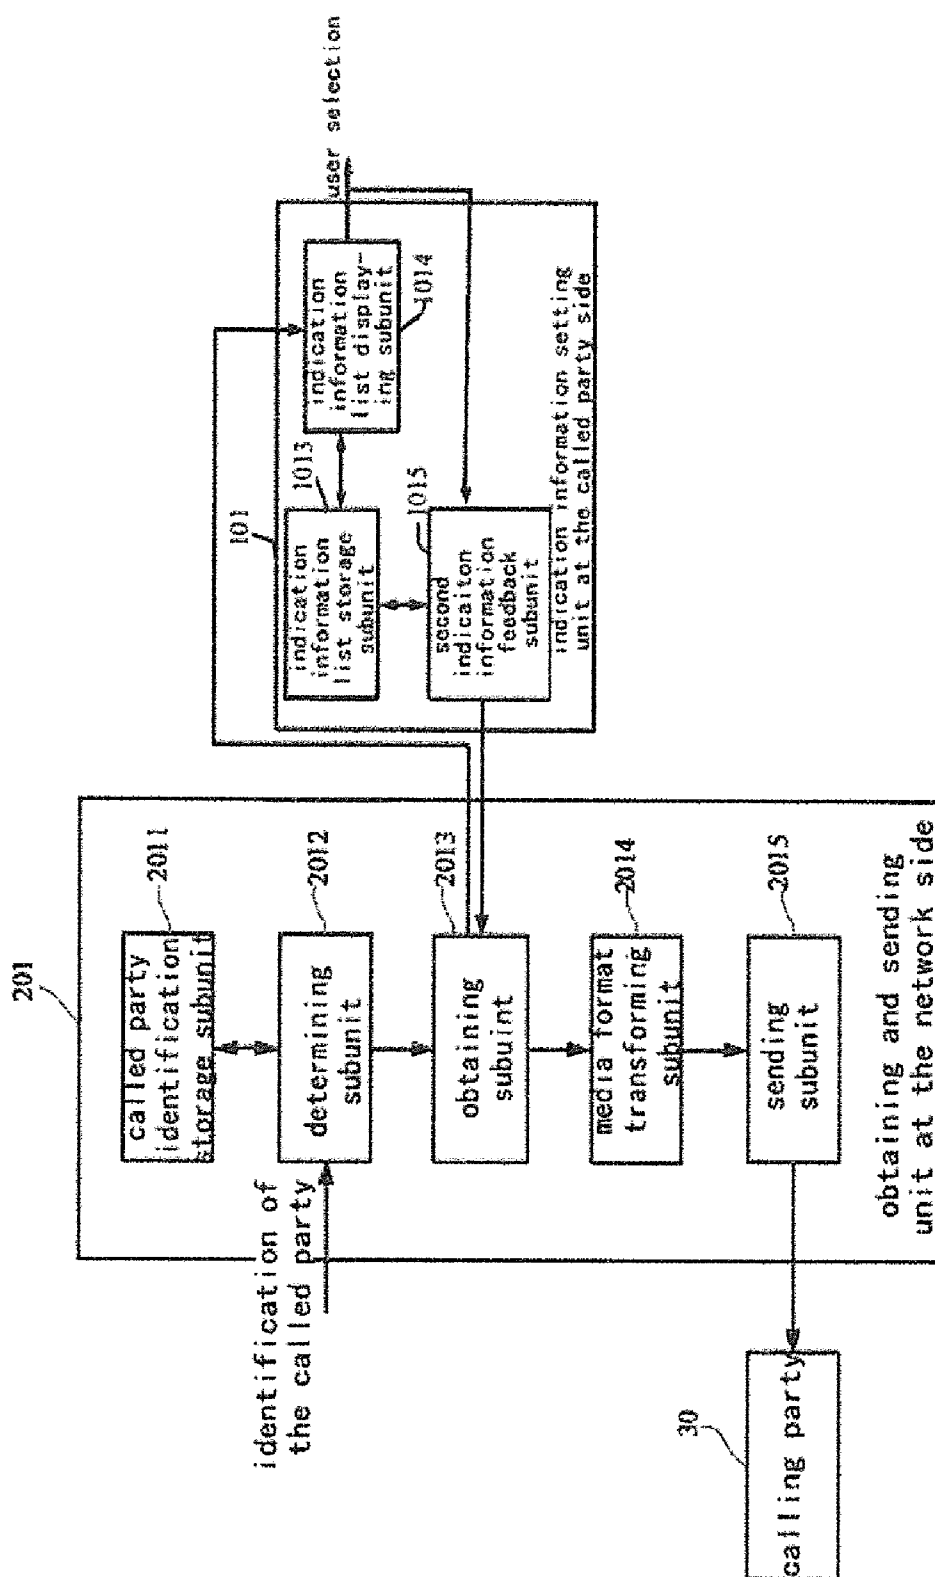


Fig. 7

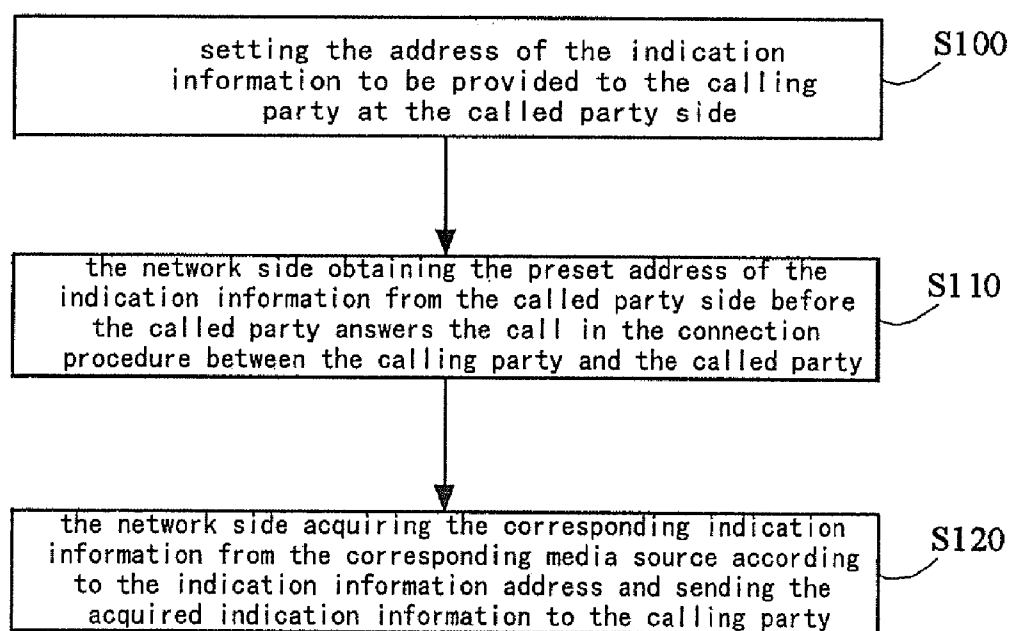


Fig. 8

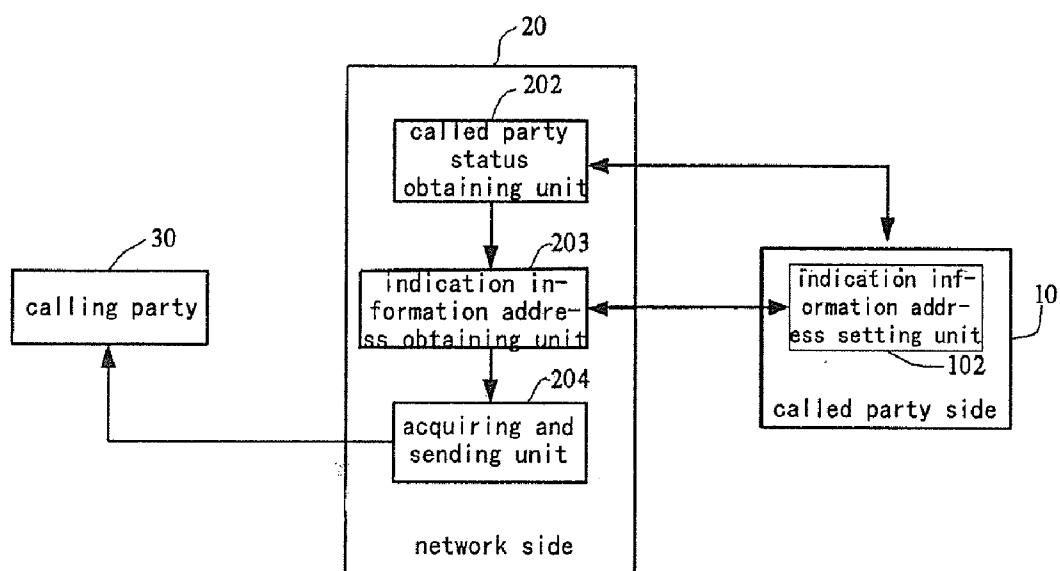


Fig. 9

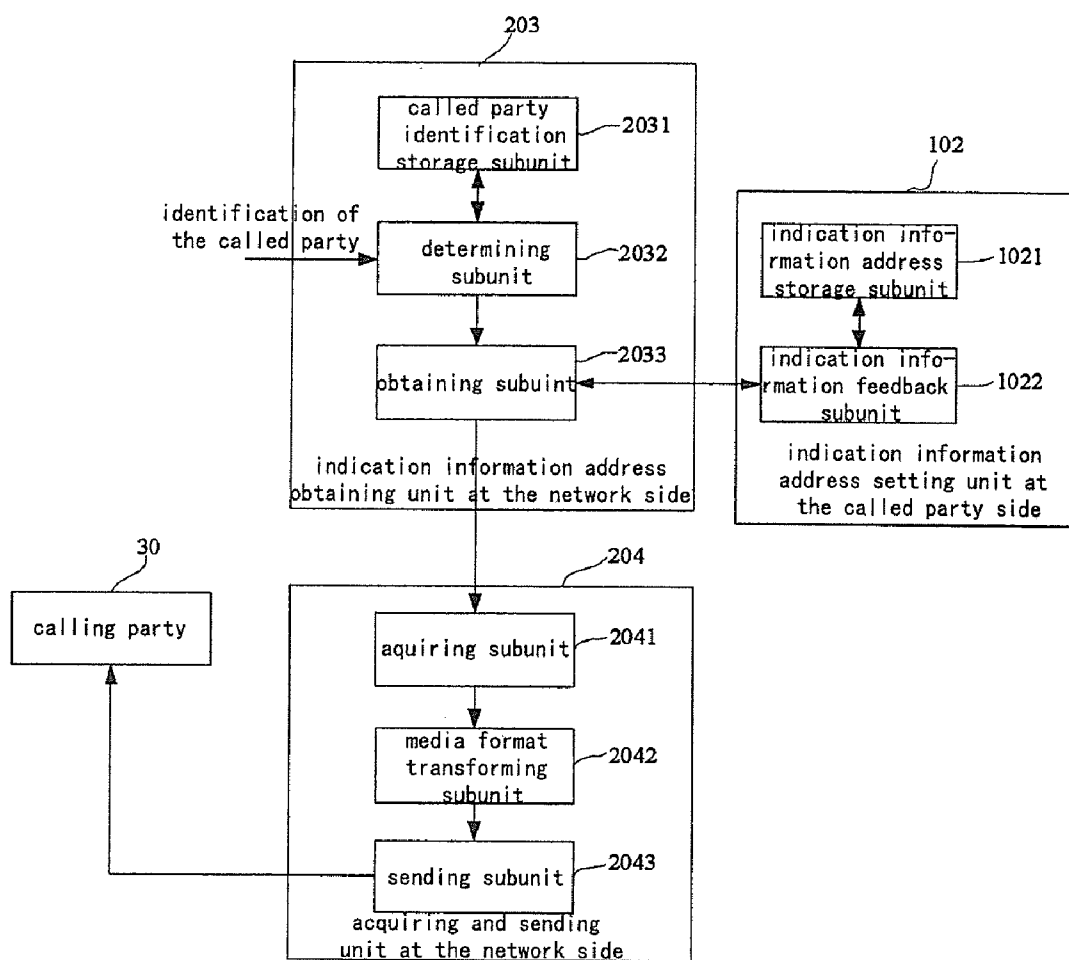


Fig. 10

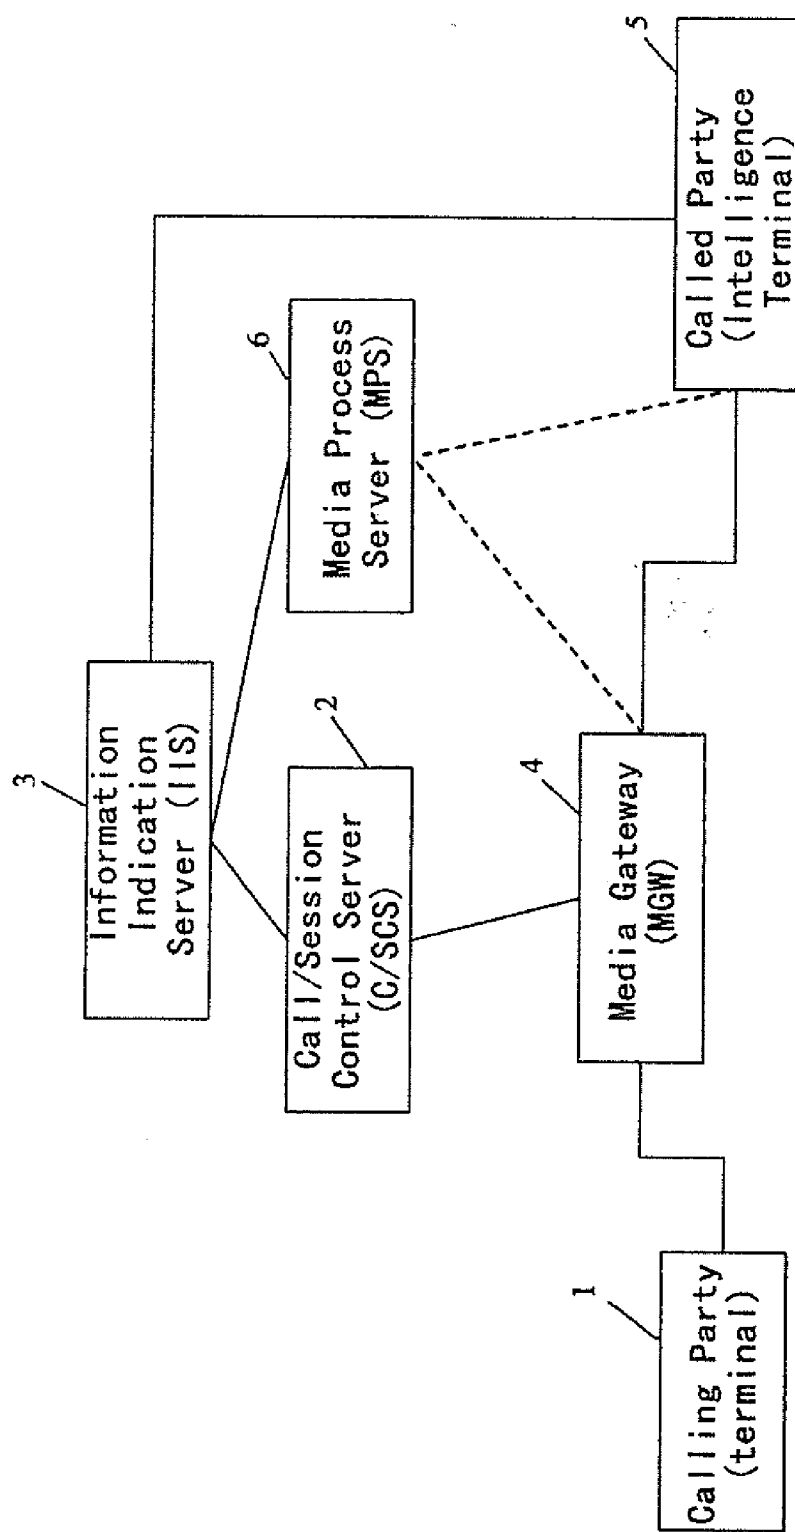


Fig. 11

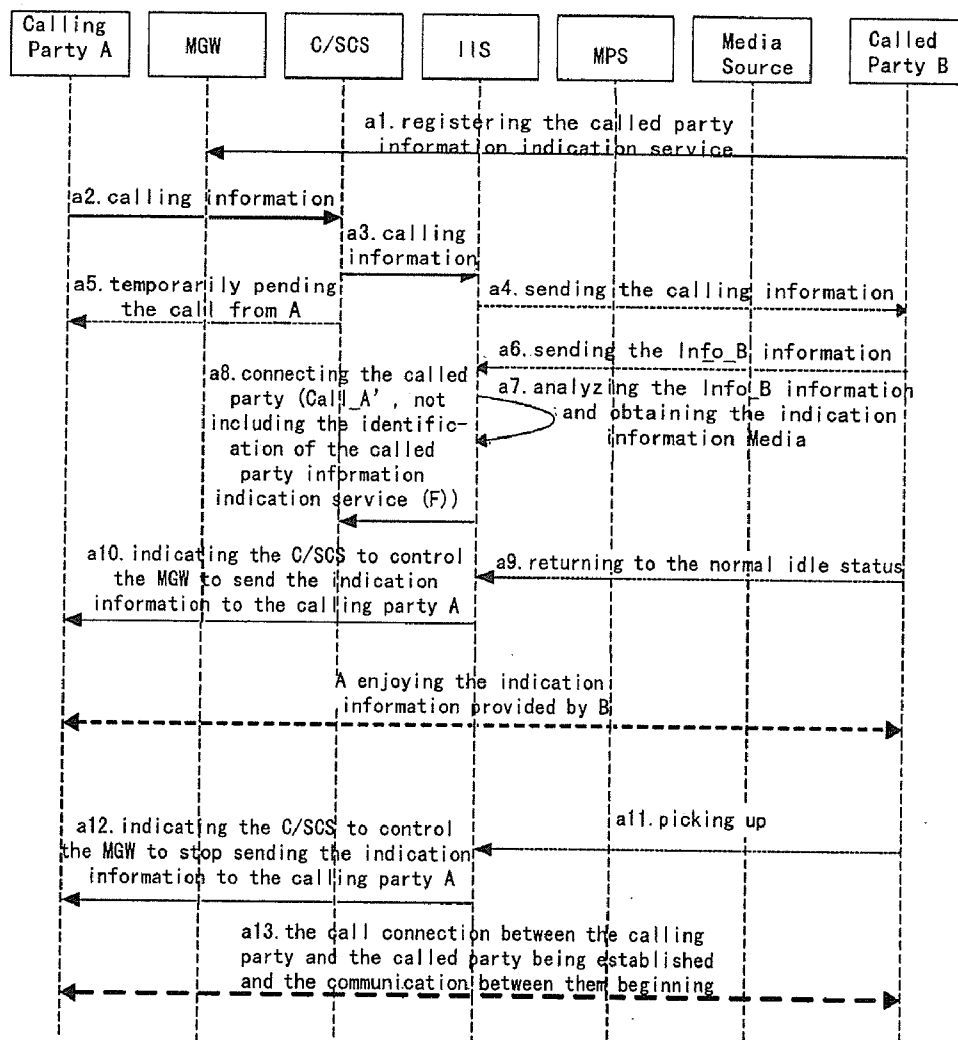


Fig. 12

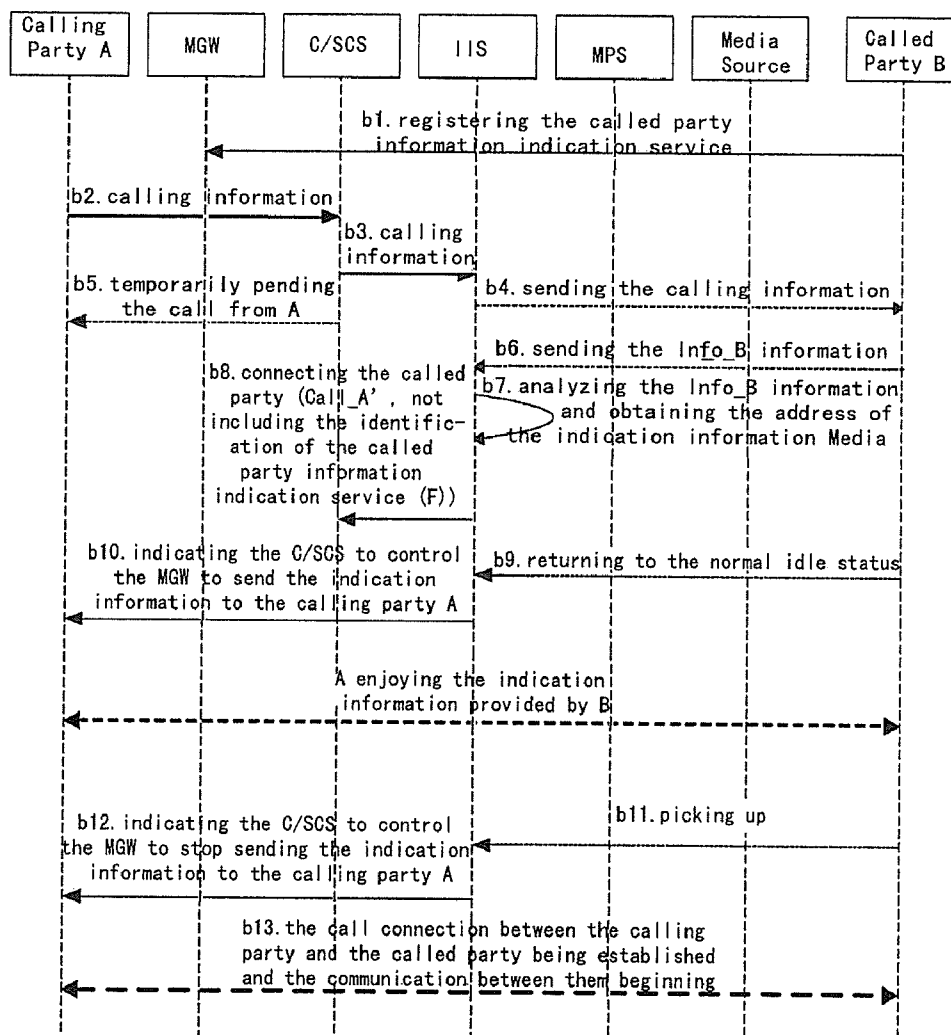


Fig. 13

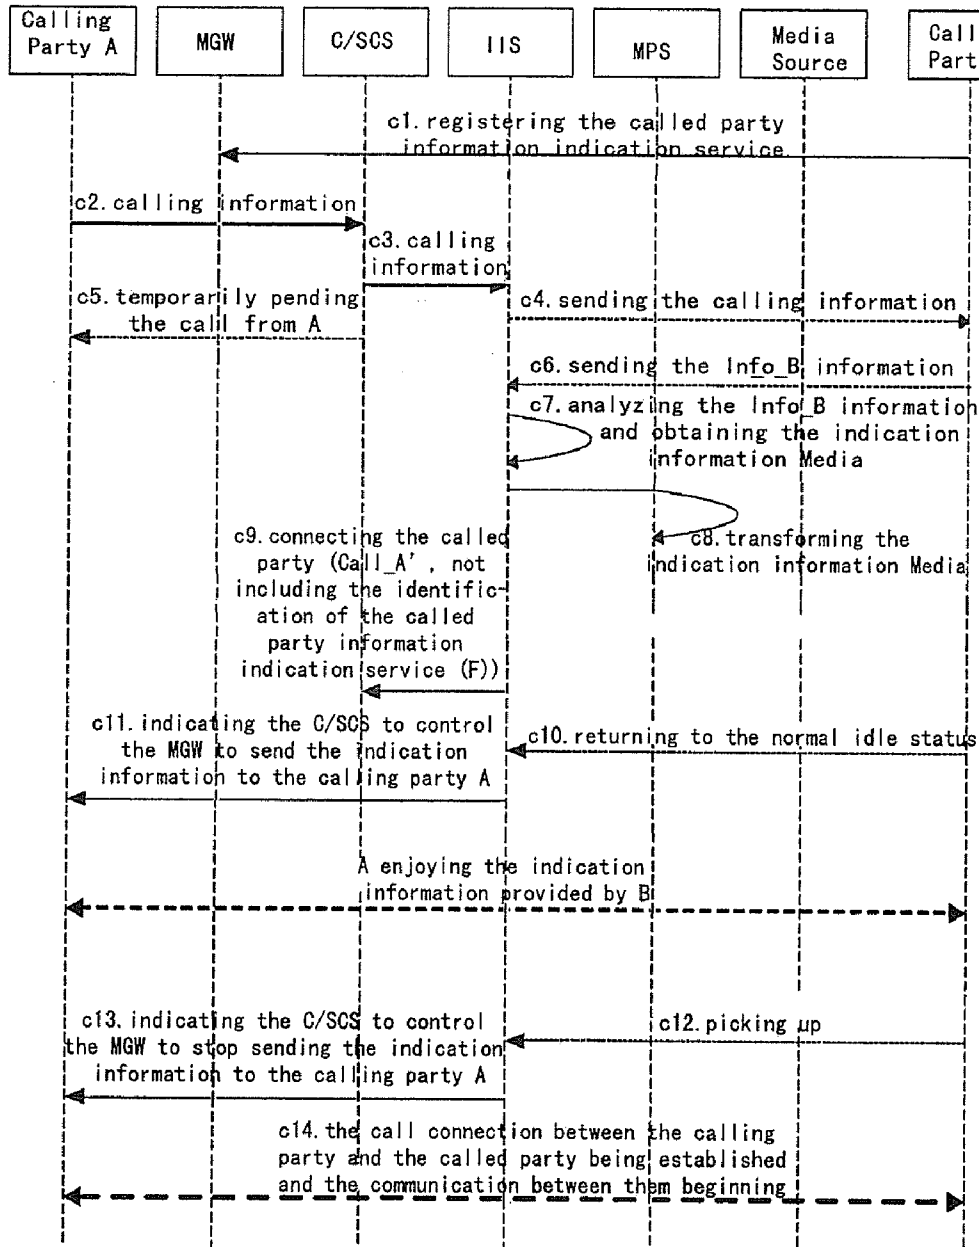


Fig. 14

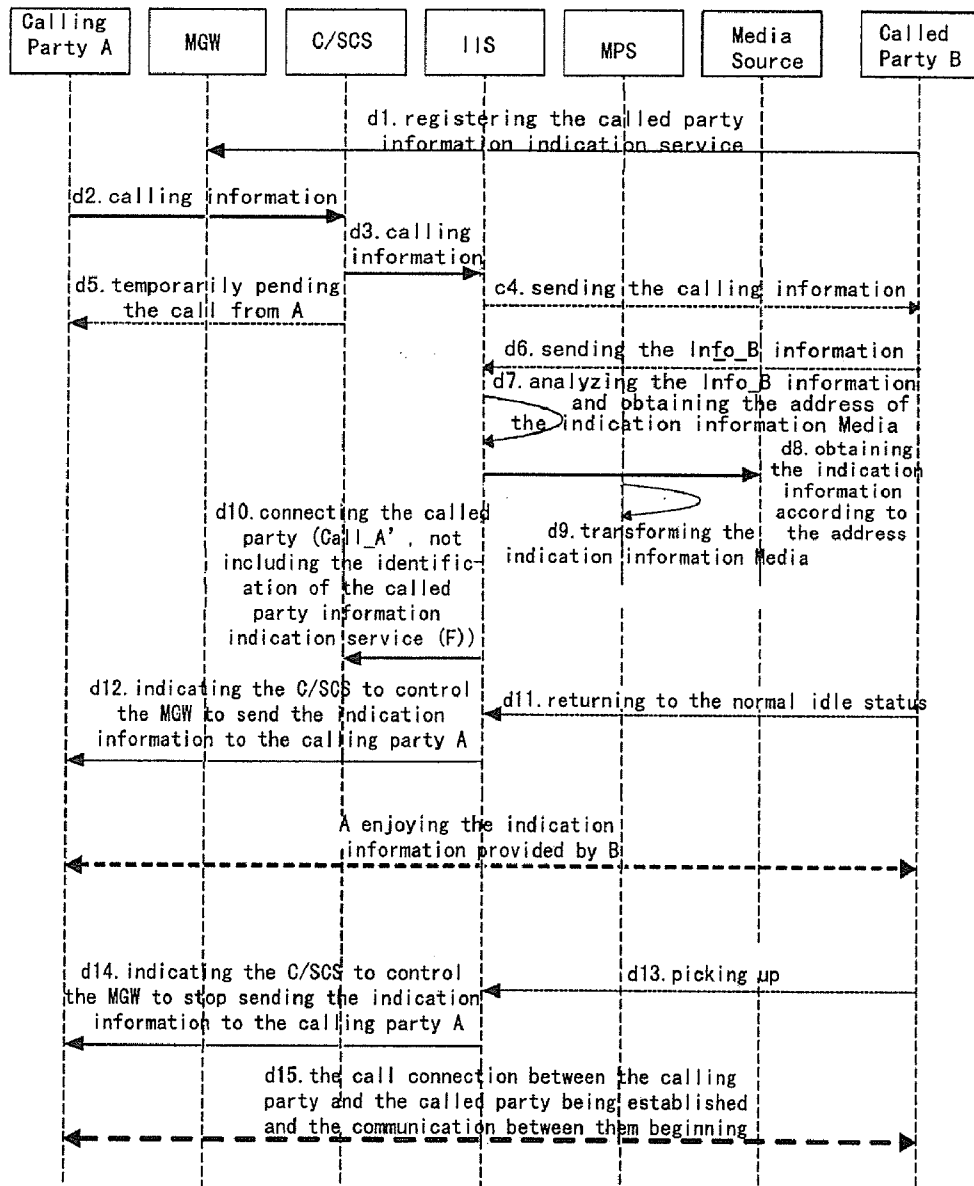


Fig. 15

METHOD AND SYSTEM FOR CALLED PARTY TO PROVIDE INDICATION INFORMATION TO CALLING PARTY

FIELD OF THE INVENTION

[0001] The present invention relates to the communication field, and more particularly, to a method and system for a called party to provide the indication information to a calling party.

BACKGROUND

[0002] With the ring back tone service, the user can subscribe the ring back tone for himself, i.e. when the calling party dials the called party, after the ringing and before the called party picks up the phone, the calling party will hear the ring back tone subscribed by the calling party, the called party or the group user. If the ring back tone is subscribed by the calling party, it is the calling party ring back tone; if the ring back tone is subscribed by the called party, it is the called party ring back tone; and if the ring back tone is subscribed by the group user, it is the group user ring back tone. The ring back tone service makes the network ability of the operator available to the end user and provides service support for the user to show his individuality. This service meets the strong requirement of the modern people to show individualities and therefore has obtained a good market feedback.

[0003] As one of the voice indications, the ring back tone can only provide the user with the preset indication, which is stored in the operator's server. In addition, no matter the ring back tone in the form of the audio or in the form of the video, they are both transmitted in the call media channel; however, if the calling party uses a multi-path terminal such as a phone supporting the SMS or an intelligent phone supporting the GPRS or the Wi-Fi or an intelligent terminal or a set-top box connected with the broadband network, these terminals can support the information indication in the non-call media channel.

[0004] Currently, the ring back tone service is mainly realized in the following ways:

[0005] 1. Fixed network ring back tone realization solution based on the PSTN

[0006] Generally, the PSTN network can use the called party office to trigger the ring back tone service. The principle is that the called party office records the ring back tone registration information of the user and determines the ring back tone registration information when a call arrives so that when the called party has registered for the ring back tone and the status allows, the call is routed to the ring back tone service platform to be processed and the called party office has the ability to prevent the ring back tone service from being triggered twice. The realization of the fixed network ring back tone based on the PSTN is shown in FIG. 1.

[0007] 2. Mobile network ring back tone realization solution based on the GSM

[0008] The GSM network also uses the called party office to trigger the ring back tone service. The principle is that the called party office records the ring back tone registration information of the user and determines the ring back tone registration information when a call arrives so that when the called party has registered for the ring back tone and the status allows, the call is routed to the ring back tone service platform to be processed.

[0009] Generally the mode without channel alternate is adopted, i.e. the ring back tone service platform plays the subscribed ring back tone according to the call information and the called party bridges the calling party, called party and the ring back tone service platform so that when the called party rings the calling party will hear the ring back tone; after the called party answers the phone, the calling party and the called party begin to communicate and the ring back tone path will be released. The realization of the mobile network ring back tone based on the GSM is shown in FIG. 2.

[0010] The characteristics of the GSM mobile network can solve the problem when the user of the ring back tone service roams.

[0011] 3. Packet network multimedia ring back tone realization solution based on the NGN/3G

[0012] Generally, the NGN/3G network uses the soft switch office to trigger the ring back tone service. The principle is: the called party office records the ring back tone registration information of the user and determines the ring back tone registration information when a call arrives, so that when the called party has registered for the ring back tone and the status allows, the call is routed to the multimedia ring back tone service platform to be processed. Generally the application server is responsible for the connection and disconnection between the calling party, the called party and the multimedia ring back tone service platform. The realization of the packet network multimedia ring back tone based on the NGN/3G is shown in FIG. 3.

SUMMARY OF THE INVENTION

[0013] The embodiment of the present invention discloses a method for providing the indication information from the called party to the calling party, includes:

[0014] presetting the indication information to be provided to the calling party at the called party;

[0015] before the called party answers the call in the connection procedure between the calling party and the called party, the network side obtaining the preset indication information from the called party and sending the indication information to the calling party.

[0016] The embodiment of the present invention further discloses a system for providing the indication information from the called party to a calling party, by which the called party provides the indication information to the calling party through the network side, wherein:

[0017] the called party includes an indication information setting unit for setting the indication information to be provided to the calling party;

[0018] the network side includes an obtaining and sending unit for obtaining the set indication information from the indication information setting unit at the called party before the called party answers the call in the connection procedure between the calling party and the called party, and for sending the indication information to the calling party.

[0019] The embodiment of the present invention further discloses a method for a called party to provide the indication information to a calling party, including:

[0020] setting the address of the indication information to be provided to the calling party at the called party;

[0021] before the called party answers the call in the connection procedure between the calling party and the called party, the network side obtaining the address of the preset indication information from the called party; and

[0022] acquiring the corresponding indication information from the corresponding media source according to the obtained address of the indication information and sending the indication information to the calling party.

[0023] The embodiment of the present invention further discloses a system for providing the indication information to a calling party, by which the called party provides the indication information to the calling party through the network side, wherein the called party includes:

[0024] an indication information address setting unit for setting the address of the indication information to be provided to the calling party;

[0025] the network side includes:

[0026] an indication information address obtaining unit for obtaining the address of the preset indication information from the indication information address unit at the called party before the called party answers the call in the connection procedure between the calling party and the called party;

[0027] an acquiring and sending unit for acquiring the corresponding indication information from the corresponding media source according to the address of the indication information obtained by the indication information address obtaining unit and sending the indication information to the calling party.

[0028] The embodiment of the present invention further discloses a communication device for providing indication information, which includes:

[0029] an indication information setting unit configures to set indication information to be provided to a user terminal calling the communication device, wherein

[0030] the communication device provides the indication information set in the indication information setting unit to the user terminal before the communication device answers the call in the connection procedure between the communication device and the user terminal when receiving the request for obtaining the indication information.

[0031] The embodiment of the present invention further discloses a communication device for providing indication information, which includes:

[0032] a setting unit configures to set information for obtaining indication information to be provided to a user terminal calling the communication device, wherein

[0033] the communication device provides the information for obtaining indication information set in the setting unit to an obtaining device before the communication device answers the call in the connection procedure between the communication device and the user terminal when receiving the request for obtaining the indication information, the obtaining device obtains the indication information according to the request for obtaining indication information received from the communication device and send the obtained indication information to the user terminal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0034] The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate the invention and together with the description, serve to explain the principles of the invention.

[0035] In the drawings,

[0036] FIG. 1 is a schematic diagram showing the realization of the fixed network ring back tone based on the PSTN.

[0037] FIG. 2 is a schematic diagram showing the realization of the mobile network ring back tone based on the GSM.

[0038] FIG. 3 is a schematic diagram showing the realization of the packet network multimedia ring back tone based on the NGN/3G.

[0039] FIG. 4 is a flow chart showing the realization principle of the method for providing the indication information from the called party to the calling party according to a preferred embodiment of the present invention;

[0040] FIG. 5 is a block diagram showing the main architecture of the first system for providing the indication information from the called party to the calling party according to a preferred embodiment of the present invention;

[0041] FIG. 6 is a block diagram showing the architectures of the indication information setting unit and the obtaining and sending unit in the first system according to a preferred embodiment of the present invention;

[0042] FIG. 7 is a block diagram showing the architectures of the indication information setting unit and the obtaining and sending unit in the first system according to a preferred embodiment of the present invention;

[0043] FIG. 8 is a flow chart showing the realization principle of the second method for providing the indication information from the called party to the calling party according to an embodiment of the present invention;

[0044] FIG. 9 is a block diagram showing the main architecture of the second system for providing the indication information from the called party to the calling party according to an embodiment of the present invention;

[0045] FIG. 10 is a block diagram showing the architectures of the indication information address setting unit, the indication information address obtaining unit and the acquiring and sending unit in the second system according to an embodiment of the present invention;

[0046] FIG. 11 is a block diagram of an embodiment showing the relations of function entities in the NGN network when the present solution is applied in the NGN network;

[0047] FIG. 12 is a scheme diagram showing the processing procedure of the first embodiment of the present invention;

[0048] FIG. 13 is a scheme diagram showing the processing procedure of the second embodiment of the present invention;

[0049] FIG. 14 is a scheme diagram showing the processing procedure of the third embodiment of the present invention;

[0050] FIG. 15 is a scheme diagram showing the processing procedure of the fourth embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0051] FIG. 4 is a flow chart showing the realization principle of the first method for providing the indication information from the called party to the calling party according to an embodiment of the present invention, the main realization procedure is as follows:

[0052] step S10: the indication information to be provided to the calling party is set at the called party. Preferably, the indication information is prestored in the user terminal which can be provided to the calling party when the calling party dials the called party and before the called party picks up the phone. The indication information to be provided to the calling party at the called party may be audio information (such as the ring back tone information) or video information (such as a piece of video information played to the calling party) or audio and video information or text information (such as a piece of greeting information sent to the calling party).

[0053] Step S20: the network side obtains the preset indication information from the called party and sends the indication information to the calling party before the called party

answers the call in the connection procedure between the calling party and the called party.

[0054] Wherein, the network side obtains the current status information of the called party (including the idle status, in communication status and unable to be connected status, etc.) in the connection procedure between the calling party and the called party, and then obtains the preset indication information from the called party and sends the indication information to the calling party when the called party is idle.

[0055] The procedure of obtaining the preset indication information from the called party by the network side in step S20 specifically includes:

[0056] 1). The network side prestores the identification of each called party which provides the indication information, wherein the identification of the called party includes but is not limited to the International Mobile Subscriber Identity (IMSI) of the called party;

[0057] 2). During the calling party calls the called party, the network side sends the request for obtaining the indication information to the corresponding called party according to the called party identification when determines the called party identification is among the called party identifications stored in step 1);

[0058] 3). The called party sends the corresponding preset indication information to the network side, responding to the received request for obtaining the indication information.

[0059] The called party may provide different kinds of indication information for the calling party, for example providing a piece of music to the calling party A while providing a piece of video cartoon to the calling party B, which requires the called party to provide different kinds of indication information to different calling party and the specific realization process is as follows:

[0060] 11) Different kinds of indication information may be preset for different calling party at the called party, and the mapping relation may be established between different kinds of indication information for different calling parties and the corresponding calling party identification respectively, wherein the identification of the calling party includes but is not limited to the International Mobile Subscriber Identity of the calling party;

[0061] 12) the request for obtaining the indication information may be sent from the network side to the called party, and the request includes the calling party identification information;

[0062] 13) the called party indexes the corresponding indication information according to the calling party identification in the received request for obtaining the indication information and the mapping relation between the indication information and the calling party identification, and then sends the indication information to the network side, so that it is realized that the called party provides different kinds of indication information to different calling parties.

[0063] Alternatively, when the called party receives a call from the calling party, it may select one piece of indication information from the indication information database in the terminal and send it to the network side. The specific processing procedure is as follows:

[0064] The called party presets an indication information list including at least one piece of the indication information to be provided to the calling party (wherein the content in the indication information list may be the name and property etc. of different indication information);

[0065] each, time the called party receives the request for obtaining the indication information from the network side, it analyzes and displays the preset indication information list to the called party;

[0066] The called party selects a piece of indication information wish to be sent from the displayed indication information list;

[0067] the called party sends the indication information selected by the called party to the network side.

[0068] After the network side obtains the corresponding indication information from the called party, the terminal of the calling party may not support the indication information, so its media format should be transformed to the one that can be supported by the terminal of the calling party and then network side sends the transformed indication information to the calling party.

[0069] After step S20, if the network side finds the called party picks up the phone, it will stop sending the obtained indication information to the calling party and the calling party and the called party enters the normal communication process.

[0070] Corresponding to the first method of an embodiment of the present invention, the present invention provides a system for a called party to provide the indication information to a calling party. FIG. 5 is a block diagram showing the main architecture of the first system for providing the indication information from the called party to the calling party according to an embodiment of the present invention and the main architecture includes: an indication information setting unit 101 at the called party 10, an obtaining and sending unit 201 at the network side 20, wherein:

[0071] the indication information setting unit 101 may be for setting the indication information to be provided to the calling party;

[0072] the obtaining and sending unit 201 may be for obtaining the set indication information from the indication information setting unit 101 at the called party 10 before the called party answers the call in the connection procedure between the calling party and the called party, and sending the indication information to the calling party 30;

[0073] wherein preferably the network side 20 further includes a called party status obtaining unit 202 for obtaining the status information of the called party 10 in the connection procedure between the calling party and the called party; the obtaining and sending unit 201 performs the obtaining of the indication information and the sending of the indication information to the calling party 10 when the called party status obtaining unit 202 obtains that the called party 10 is currently idle.

[0074] FIG. 6 is a block diagram showing the architectures of the indication information setting unit and the obtaining and sending unit in the first system according to the first embodiment of the present invention. Refer to FIG. 6, the obtaining and sending unit 201 specifically includes a called party identification storage subunit 2011, a determining subunit 2012, an obtaining subunit 2013, a media format transforming subunit 2014 and a sending subunit 2015; the indication information setting unit 101 specifically includes an indication information storage subunit 1011 and a first indication information feedback subunit 1012. The function of each subunit is as follows:

[0075] the indication information storage subunit 1011 may be for storing the indication information to be provided to the calling party 30 in advance;

[0076] the called party identification storage subunit **2011** may be for storing the identification of each called party which provides the indication information in advance;

[0077] the determining subunit **2012** may be for determining whether the called party identification is among the called party identifications stored in the called party identification storage subunit **2011**;

[0078] the obtaining subunit **2014** may be for sending the request for obtaining the indication information to the corresponding called party according to the called party identification when the determining subunit **2012** determines the called party identification is among the called party identifications;

[0079] the first indication information feedback subunit **1012** may be for feeding back the indication information stored in the indication information storage subunit **1011** to the obtaining subunit **2013** when receives the request for obtaining the indication information from the obtaining subunit **2013**;

[0080] the media format transforming subunit **2014** may be for transforming the media format of the indication information obtained by the obtaining subunit **2013** from the called party (wherein this unit is optional and when the media format of the indication information provided by the called party needn't be transformed, it is not necessary to set this unit);

[0081] the sending subunit **2015** may be for sending the indication information obtained by the obtaining subunit **2013** from the called party (or the indication information transformed by the media format transforming subunit **2014**) to the calling party **30**.

[0082] FIG. 7 is a block diagram showing the architectures of the indication information setting unit and the obtaining and sending unit in the first system according to the second embodiment of the present invention. Refer to FIG. 7, the obtaining and sending unit **201** specifically includes a called party identification storage subunit **2011**, a determining subunit **2012**, an obtaining subunit **2013**, a media format transforming subunit **2014** and a sending subunit **2015**; the indication information setting unit **101** specifically includes an indication information list storage subunit **1013**, an indication information list displaying subunit **1014** and a second indication information feedback subunit **1015**. the function of each subunit is as follows:

[0083] the indication information list storage subunit **1013** may be for storing in advance an indication information list including at least one piece of the indication information to be provided to the calling party **30**;

[0084] the called party identification storage subunit **2011** may be for storing the identification of each called party which provides the indication information in advance;

[0085] the determining subunit **2012** may be for determining whether the called party identification is among the called party identifications stored in the called party identification storage subunit **2011**;

[0086] the obtaining subunit **2014** may be for sending the request for obtaining the indication information to the corresponding called party according to the called party identification when the determining subunit **2012** determines the called party identification is among the called party identifications;

[0087] the indication information list displaying subunit **1014** may be for displaying the indication information list stored in the indication information list storage subunit to the

called party when receives the request for obtaining the indication information from the obtaining subunit **2013**;

[0088] the second indication information feedback subunit **1015** may be for feeding back the indication information selected by the called party in the indication information list to the obtaining subunit **2013**;

[0089] the media format transforming subunit **2014** may be for transforming the media format of the indication information obtained by the obtaining subunit **2013** from the called party (wherein this unit is optional and when the media format of the indication information provided by the called party needn't be transformed, it is not necessary to set this unit);

[0090] the sending subunit **2015** may be for sending the indication information obtained by the obtaining subunit **2013** from the called party (or the indication information transformed by the media format transforming subunit **2014**) to the calling party **30**.

[0091] FIG. 8 is a flow chart showing the realization principle of the second method for providing the indication information from the called party to the calling party according to the present invention and the main realization procedure is as follows:

[0092] step S100: the address of the indication information to be provided to the calling party is set at the called party;

[0093] step S110: the network side obtains the preset address of the indication information from the called party before the called party answers the call in the connection procedure between the calling party and the called party.

[0094] step S120: the network side acquires the corresponding indication information from the corresponding media source according to the indication information address and sends the acquired indication information to the calling party, wherein the indication information is the audio information or video information, or audio and video information, or text information etc.

[0095] Wherein the network side obtains the current status information of the called party (including the idle status, in communication status and unable to be connected status, etc.) in the connection procedure between the calling party and the called party, and then performs the obtaining of the preset indication information in step S110 from the called party when the called party is idle.

[0096] Wherein the procedure of obtaining the preset address of the indication information from the called party by the network side in step S110 specifically includes:

[0097] 1.1). the network side prestores the identification of each called party which provides the indication information, wherein the identification of the called party includes but is not limited to the International Mobile Subscriber Identity of the called party;

[0098] 1.2). during the process when the calling party calls the called party, the network side sends the request for obtaining the address of the indication information to the corresponding called party according to the called party identification when determines the called party identification is among the called party identifications stored in step 1.1);

[0099] 1.3). the called party sends the corresponding preset indication information to the network side responding to the received request for obtaining the address of the indication information.

[0100] wherein the called party can provide different kinds of indication information address for the calling party, for example providing the address of a piece of music to the calling party A while providing the address of a piece of video

cartoon to the calling party B, which requires the called party to provide different kinds of indication information address to different calling party, and the specific realization process is as follows:

[0101] 1.11) different kinds of indication information address for different calling party are preset at the called party; the mapping relation is established between different kinds of indication information address for different calling party and the corresponding calling party identification, wherein the identification of the calling party includes but is not limited to the International Mobile Subscriber Identity of the calling party;

[0102] 1.12) the request for obtaining the address of the indication information sent from the network side to the called party includes the calling party identification information;

[0103] 1.13) the called party indexes the corresponding the indication information address according to the calling party identification in the received request for obtaining the address of the indication information and the mapping relation between the indication information address and the calling party identification, and then sends the indication information address to the network side, so that the called party can provide different kinds of indication information address to different calling party.

[0104] wherein when the called party receives the call from the calling party, it selects one indication information address from the indication information address database in the terminal and sends it to the network side; the specific processing procedure is as follows:

[0105] it is preset an indication information address list including at least one indication information address to be provided to the calling party at the called party,

[0106] every time the called party receives the request for obtaining the address of the indication information from the network side, it analyzes and displays the preset indication information address list to the called party;

[0107] the called party selects one preferred indication information address from the displayed indication information address list;

[0108] and, the called party sends the indication information address selected by the called party to the network side.

[0109] Wherein after the network side obtains the corresponding indication information address from the called party and acquires the corresponding indication information, the terminal of the calling party may not support the indication information so its media format should be transformed to the one that may be supported by the terminal of the calling party and then network side sends the transformed indication information to the calling party.

[0110] After step S120, if the network side finds the called party picks up the phone, it will stop sending the acquired indication information from the media source to the calling party, and the calling party and the called party enter the normal communication process.

[0111] Corresponding to the second method of the present invention, the present invention provides a system for a called party to provide the indication information to a calling party. FIG. 9 is a block diagram showing the main architecture of the second system for providing the indication information from the called party to the calling party according to an embodiment of the present invention and the main architecture includes: an indication information address setting unit 102 at

the called party 10, an indication information address obtaining unit 203 and an acquiring and sending unit 201 at the network side 20, wherein:

[0112] the indication information address setting unit 102 may be for setting the address of the indication information to be provided to the calling party;

[0113] the indication information address obtaining unit 203 may be for obtaining the address of the preset indication information from the indication information address unit 102 at the called party 10 before the called party answers the call in the connection procedure between the calling party and the called party;

[0114] the acquiring and sending unit 204 may be for acquiring the corresponding indication information from the corresponding media source according to the address of the indication information obtained by the indication information address obtaining unit 203 and sending the indication information to the calling party 30.

[0115] Preferably, the network side 20 further includes a called party status obtaining unit 202 for obtaining the called party status information in the connection procedure between the calling party and the called party; the indication information address obtaining unit 203 performs the obtaining of the address of the indication information when the called party status obtaining unit 202 obtains that the called party 10 is currently idle.

[0116] FIG. 10 is a block diagram showing the architectures of the indication information address setting unit, the indication information address obtaining unit and the acquiring and sending unit in the second system according to an embodiment of the present invention, wherein the the indication information setting unit 102 specifically includes an indication information address storage subunit 1021, an indication information feedback subunit 1022; the indication information address obtaining unit 203 specifically includes a called party identification storage subunit 2031, a determining subunit 2032 and an obtaining subunit 2033; the acquiring and sending unit 204 specifically includes an acquiring subunit 2041, a media format transforming subunit 2042 and a sending subunit 2043; wherein the function of each subunit is as follows:

[0117] the indication information address storage subunit 1021 may be for storing the address of the indication information to be provided to the calling party 30 in advance;

[0118] the called party identification storage subunit 2031 may be for storing the identification of each called party which provides the address of the indication information in advance;

[0119] the determining subunit 2032 may be for determining whether the called party identification is among the called party identifications stored in the called party identification storage subunit 2031;

[0120] the obtaining subunit 2033 may be for sending the request for obtaining the address of the indication information to the corresponding called party according to the called party identification when the determining subunit 2032 determines the called party identification is among the called party identifications;

[0121] the indication information feedback subunit 1022 may be for feeding back the address of the indication information stored in the indication information address storage subunit 1021 to the obtaining subunit 2033 when receives the request for obtaining the address of the indication information from the obtaining subunit 2033;

[0122] the acquiring subunit **2041** may be for acquiring the corresponding indication information from the corresponding media source according to the address of the indication information obtained by the indication information address obtaining unit **2033**;

[0123] the media format transforming subunit **2042** may be for transforming the media format of the indication information acquired by the obtaining subunit **2041** from the media source (wherein this unit is optional and when the media format of the indication information provided by the called party needn't be transformed, it is not necessary to set this unit);

[0124] the sending subunit **2043** may be for sending the indication information acquired by the obtaining subunit **2041** from the media source (or the indication information transformed by the media format transforming subunit **2042**) to the calling party **30**.

[0125] Wherein in the practical application of the present invention, before the user may use the service of selecting the indication information to be provided to the calling party, he or she should subscribe the service from the operator, i.e. notify the network side that he or she will provide the calling party with the indication information selected when being called. This new service in the present invention is named "called party information indication service".

[0126] FIG. **11** is a block diagram showing the relations of function entities in the NGN network when the present solution is applied in the NGN network. Although only the implementation of the present invention in the NGN network is described here, it may be the same in the mobile soft switch network, 3G network, Internet or GPRS network. The relations of function entities in the NGN network are as follows:

[0127] an Information Indication Server (IIS) **3** may be for processing the called party information indication service;

[0128] a Media Process Server (MPS) **6** may be for processing the indication information to be media transformed which may be sent from the called party;

[0129] an Called Party Intelligence Terminal **5** may be for sending the indication information to be sent from the called party to the calling party through the network, wherein the calling party may be a normal terminal and an intelligent terminal;

[0130] a Call/Session Control Server (C/SCS) **2** may be for establishing the connection procedure between the calling party and the called party, for triggering the called party information indication service according to the called party information indication service triggering standard and for sending the indication information to the IIS **3** to be processed;

[0131] a Media Gateway (MGW) **4** may be for transforming the core network information into the general information acceptable to the calling party or the called party according to the type of the access network.

[0132] In some cases, the MGW **4** and the MPS **6** may be the same function entity.

[0133] The obtaining and sending unit in the system according to the present invention by which the called party provides the indication information to the calling party may be in the MPS and the MGW, the called party status obtaining unit may be in the C/SCS, and the indication information address obtaining unit may be in the IIS. The implementation of the present invention has the following four cases:

[0134] 1. calling party terminal T->called party terminal IT, wherein the called party provides the indication information content whose media format doesn't need to be transformed;

[0135] 2. calling party terminal T->called party terminal IT, wherein the called party provides the address of the stored indication information and the media format of the indication information doesn't need to be transformed;

[0136] 3. calling party terminal T->called party terminal IT, wherein the called party provides the indication information content whose media format needs to be transformed;

[0137] 4. calling party terminal T->called party terminal IT, wherein the called party provides the address of the stored indication information and the media format of the indication information needs to be transformed;

[0138] The implementation processing procedures for the above four cases will be described in detail:

[0139] The Application Scene of the Embodiment 1:

[0140] Supposing the calling party is A and the called party is B; the called party terminal provides the indication information content whose media format doesn't need to be transformed and directly sends the indication information to the calling party A through the network; supposing the calling party A and the called party B belong to the same network for the purpose of simplicity.

[0141] FIG. **12** is a scheme diagram showing the processing procedure of the first embodiment of the present invention, and the main processing procedure is as follows:

[0142] a1: the called party B registers the called party information indication service at the network side in advance, so that the network side knows the called party B will provide the corresponding indication information to the calling party for all the calls destined to the called party B;

[0143] a2: when the calling party A calls the called party B, the calling information is transmitted to the C/SCS **2** through the MGW **4**;

[0144] a3: the C/SCS **2** sends the calling information to the corresponding IIS **3**, and indicates in the calling information that the call is the one with the called party information indication service;

[0145] a4: when the IIS **3** inquires the database according to the received calling information and finds the called party B has subscribed the called party information indication service, it transfers the calling information to the called party B, wherein the calling information includes the information of the calling party A (Call ID_A) such as the number of the calling party etc. and the identification of the called party information indication service (F); wherein the IIS **3** may interact with the called party B in the following two manners:

[0146] 1). the IIS **3** sends the calling information to the called party B through the normal call connection signaling, i.e. the IIS **3** accesses the called party B through controlling the C/SCS **2** so as to send the calling information to the called party B through the C/SCS **2**;

[0147] 2). the IIS **3** sends the calling information to the called party B through the self-defined interface between itself and the called party B;

[0148] a5: the IIS **3** controls the C/SCS **2** to temporarily pending the call from the calling party A; or intercepts the default called party indication information in the network through directly intercepting the signaling;

[0149] a6: the terminal of the called party B determines whether to send the corresponding preset indication property information (Info_B) to the calling party A according to the

identification of the called party information indication service (F) in the received calling information;

[0150] wherein terminal of the called party B may determine the corresponding preset indication property information (Info_B) according to the information (Call ID_A) of the calling party A included in the received calling information; or

[0151] when the called party receives the calling information, it will show each piece of the indication property information to the called party in its indication property information database and the called party selects the corresponding preset indication property information (Info_B);

[0152] wherein the called party B sends the determined indication property information (Info_B) to the IIS 3; wherein the called party B may interact with the IIS 3 in the following two manners:

[0153] 1) the called party B sends the determined indication property information (Info_B) to the IIS 3 through the normal call connection signaling, i.e. the called party B sends the determined indication property information (Info_B) to the IIS 3 through the C/SCS 2;

[0154] 2). the called party B sends the determined indication property information (Info_B) to the IIS 3 through the self-defined interface between itself and the called party B;

[0155] wherein, in order to improve the connecting efficiency, the obtaining of the corresponding indication information of the called party in the subsequent processing procedures may be performed after the status of the called party is known; for example, the corresponding indication information may be obtained when the called party is actually connected and the called party office returns the status of the called party is idle;

[0156] a7: when the IIS 3 receives the indication property information (Info_B) sent from the called party, it analyzes the indication property information (Info_B) and obtains the media description information (Media_B) of the actual indication information, wherein Media_B indicates the actual media content source information: the indication information provided by the called party B or the address of the indication information provided by the called party B; in the present embodiment, the IIS3 determines whether Media_B is the indication information provided by the called party B;

[0157] a8: the IIS 3 controls the C/SCS 2 to send the calling information to the called party B, wherein this calling information only carries the information of the calling party A (Call ID_A), but not the identification of the called party information indication service (F);

[0158] a9: when the status of the called party B is idle, the called party B feeds back that it is in the idle status to the IIS 3;

[0159] a10: when the IIS 3 obtains the called party B is in the idle status, it indicates the C/SCS 2 to control the MGW 4 to send the indication information provided by the called party B to the calling party A (i.e. during the connection procedure between the calling party and the called party and before the called party B answers the call, the MGW 4 will send the indication information obtained from the called party B to the calling party A);

[0160] a11: the called party B picks up the phone and the called party office sends the picking up signal to the IIS 3;

[0161] a12: after the IIS 3 receives the picking up signal, it indicates the C/SCS 2 to control the MGW 4 to stop sending the indication information provided by the called party B to the calling party A;

[0162] a13: the call connection between the calling party and the called party is established and the communication between them begins.

[0163] The Application Scene of the Embodiment 2:

[0164] Supposing the calling party is A and the called party is B; the called party terminal provides the address of the indication information, wherein the media format of the indication information doesn't need to be transformed, and directly sends the indication information to the calling party A through the network; supposing the calling party A and the called party B belong to the same network for the purpose of simplicity.

[0165] FIG. 13 is a scheme diagram showing the processing procedure of the second embodiment of the present invention, and the main processing procedure is as follows:

[0166] Step b1~b6 are the same with a1~a6 in the above first embodiment;

[0167] b7: after the IIS 3 receives the indication property information (Info_B) sent from the called party, it analyzes the indication property information (Info_B) and obtains the media description information (Media_B) of the actual indication information, wherein Media_B indicates the actual media content source information: the indication information provided by the called party B or the address of the indication information provided by the called party B; in the present embodiment, the IIS3 determines whether Media_B is the address of the indication information provided by the called party B;

[0168] Step b8~b9 are the same with a8~a9 in the above first embodiment;

[0169] b10: when the IIS 3 obtains the called party B is in the idle status, it indicates the C/SCS 2 to control the MGW 4 to send the address of the indication information provided by the called party B to the calling party A and to obtain the corresponding indication information from the corresponding media source and to send the obtained indication information to the calling party A (i.e. during the connection procedure between the calling party and the called party and before the called party B answers the call, the MGW 4 will send the indication information obtained from the corresponding media source according to the address of the indication information provided by the called party B to the calling party A);

[0170] Step b11~b13 are the same with a11~a13 in the above first embodiment.

[0171] The Application Scene of the Embodiment 3:

[0172] Supposing the calling party is A and the called party is B; the called party terminal provides the indication information content, wherein the media format of the indication information needs to be transformed, and directly sends the indication information to the calling party A through the network; supposing the calling party A and the called party B belong to the same network for the purpose of simplicity.

[0173] FIG. 14 is a scheme diagram showing the processing procedure of the third embodiment of the present invention, and the main processing procedure is as follows:

[0174] Step c1~c7 are the same with a1~a7 in the above first embodiment;

[0175] c8: the IIS 3 sends the obtained media description information (Media_B) of the indication information to the

MPS 6 and the MPS 6 transforms the media description information (Media_B) of the obtained indication information;

[0176] Step c9~c10 are the same with a8~a9 in the above first embodiment;

[0177] c11: when the IIS 3 obtains the called party B is in the idle status, it indicates the C/SCS 2 to control the MGW 4 to send the indication information transformed by the MPS 6 to the calling party A (i.e. during the connection procedure between the calling party and the called party and before the called party B answers the call, the MGW 4 will send the indication information transformed by the MPS 6 to the calling party A);

[0178] Step c12~c14 are the same with a11~a13 in the above first embodiment.

[0179] The Application Scene of the Embodiment 4:

[0180] Suppose the calling party is A and the called party is B; the called party terminal provides the address of the indication information, wherein the media format of the indication information needs to be transformed, and directly sends the indication information to the calling party A through the network; supposing the calling party A and the called party B belong to the same network for the purpose of simplicity.

[0181] FIG. 15 is a scheme diagram showing the processing procedure of the fourth embodiment of the present invention, and the main processing procedure is as follows:

[0182] Step d1~d6 are the same with a1~a6 in the above first embodiment;

[0183] d7: after the IIS 3 receives the indication property information (Info_B) sent from the called party, it analyzes the indication property information (Info_B) and obtains the media description information (Media_B) of the actual indication information, wherein Media_B indicates the actual media content source information: the indication information provided by the called party B or the address of the indication information provided by the called party B; in the present embodiment, the IIS3 determines whether Media_B is the address of the indication information provided by the called party B;

[0184] d8: the IIS3 indicates the MPS 6 to obtain the corresponding indication information from the corresponding media source according to the obtained address of the indication information provided by the called party B;

[0185] d9: the MPS 6 transforms the media format of the obtained indication information;

[0186] Step d10~cd11 are the same with a8~a9 in the above first embodiment;

[0187] d12: when the IIS 3 obtains the called party B is in the idle status, it indicates the C/SCS 2 to control the MGW 4 to send the indication information transformed by the MPS 6 to the calling party A (i.e. during the connection procedure between the calling party and the called party and before the called party B answers the call, the MGW 4 will send the indication information transformed by the MPS 6 to the calling party A);

[0188] Step d13~d15 are the same with a11~a13 in the above first embodiment.

[0189] The present invention makes it possible that the called party can flexibly set the indication information and doesn't need to set the needed indication information at the network side, which allows the user to freely select the indication information in some extent and allows the operator to maintain the control function on the service.

[0190] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

1. A method for a called party terminal providing indication information for a calling party, comprising:

setting an indication property information to be provided to the calling party at the called party terminal;

obtaining the indication property information by an Information Indication Server (IIS) from the called party terminal, analyzing the obtained indication property information and obtaining media description information of the indication information, wherein the media description information indicates actual media content source information which is the indication information provided by the called party terminal; and

sending the obtained indication information to the calling party, before the called party answering the call in the connection procedure between the calling party and the called party.

2. The method according to claim 1, further comprising: obtaining, by the IIS, the current status information of the called party in the connection procedure between the calling party and the called party before obtaining the indication information; and

obtaining the indication information, and if the called party is idle, sending the indication information to the calling party.

3. The method according to claim 1, wherein obtaining the indication property information comprises:

storing in advance, by the IIS, an identification of called party which provides indication information;

sending, by the IIS, a request for obtaining the indication information to the corresponding called party according to the called party identification when determining the called party identification is among the stored called party identifications; and

responding to the received request for obtaining the indication information and sending the indication property information to the IIS by the called party terminal.

4. The method according to claim 1, wherein different kinds of indication information for different calling parties are preset at the called party terminal, and the mapping relation is established between the indication information of calling party and the calling party identification.

5. The method according to claim 4, wherein the request for obtaining the indication information sent to the called party terminal comprises the calling party identification information;

the called party terminal indexes the corresponding indication information according to the calling party identification in the received request and sends the indication information to the IIS.

6. The method according to claim 3, wherein setting an indication property information further comprises setting an indication property information list, which comprising at least one piece of indication property information provided to the calling party;

responding to the received request for obtaining the indication information and sending the indication property information to the IIS further comprises:

selecting, by the called party, a piece of indication property information from the indication property information list when receives the request for obtaining the indication information from the IIS, and sending the selected property indication information selected to the IIS.

7. The method according to claim 1, the method further comprises:

before sending the obtained indication information, a Media Process Server transforming the media format of the obtained indication information.

8. The method according to claim 1, wherein the indication information is:

audio information, video information, audio and video information, or text information.

9. A system for a called party terminal providing indication information for a calling party, comprising:

a called party terminal and an Information Indication Server (IIS); wherein:

the called party terminal, configured to set indication property information to be provided to the calling party;

the IIS configured to obtain the set indication property information from the called party terminal and analyze the obtained indication property information and obtain a media description information of the indication information, wherein the media description information indicates the media content source information which is the indication information provided by the called party terminal; and send the indication information to the calling party before the called party answers the call in the connection procedure between the calling party and the called party.

10. The system according to claim 9, wherein the IIS is configured to obtain the called party status information in the connection procedure between the calling party and the called party; and if the called party is currently idle, send the indication information to the calling party.

11. The system according to claim 9, wherein the IIS is further configured to store the identification of called party which provides indication information;

and send a request for obtaining the indication information to the called party according to the called party identification when the called party identification is stored among the called party identifications;

and send the indication information obtained from the called party terminal to the calling party.

12. The system according to claim 9, wherein the called party terminal is further configured to store the indication property information to be provided to the calling party; and feed back the indication property information stored in the called party terminal to the IIS when receiving the request for obtaining the indication information from the IIS.

13. A method for a called party terminal providing indication information for a calling party, comprising:

presetting indication property information to be provided to the calling party at the called party;

obtaining, by an Information Indication Server (IIS), the indication property information from the called party terminal, and analyzing the obtained indication property information and obtaining media description information of the indication information, wherein the media description information indicates actual media content source information which is an address of the preset indication information from the called party terminal,

before the called party answering the call in the connection procedure between the calling party and the called party; and

acquiring the indication information from a corresponding media source according to the obtained address, and sending the indication information to the calling party.

14. The method according to claim 13, further comprising: obtaining, by the IIS, a current status information of the called party in the connection procedure between the calling party and the called party;

and obtaining the address of the preset indication information from the called party terminal if the called party is idle.

15. The method according to claim 13, wherein obtaining the address of the indication information comprises:

storing, by the IIS, the identification of called party which provides the address of the indication information;

sending, by the IIS, a request for obtaining the address of the indication information to the corresponding called party terminal according to the called party identification when determining the called party identification is among the stored called party identifications; and

sending, by the called party terminal, the address of the indication information to the IIS according to the received request for obtaining the address of the indication information.

16. The method according to claim 13, wherein before the IIS sends the indication information to the calling party, the method further comprises: transforming the media format of the indication information by a Media Process Server.

17. A system for a called party providing indication information to a calling party, comprising:

a called party terminal and an Information Indication Server (IIS); wherein

the called party terminal, configured to preset indication property information to be provided to the calling party;

the IIS, configured to obtain the indication property information from the called party terminal, and analyzing the obtained indication property information and obtaining a media description information of the indication information, wherein the media description information indicates the actual media content source information which is an address of the indication information from the called party terminal before the called party answers the call in the connection procedure between the calling party and the called party;

and obtain the indication information from a corresponding media source according to the address of the indication information obtained and send the indication information to the calling party.

18. The system according to claim 17, wherein the IIS is further configured to obtain the called party status information in the connection procedure between the calling party and the called party; and obtain the address of the indication information if the called party is idle.

19. The system according to claim 17, wherein the IIS is further configured to

store the identification of called party which provides the address of the indication information; and

send a request for obtaining the address of the indication information to the corresponding called party terminal according to the called party identification and send the indication property information obtained at the called

party terminal to the calling party if the called party identification is stored in IIS.

20. The system according to claim **19**, wherein the called party terminal is further configured to store the indication property information to be provided to the calling party;

and feed back the indication property information stored in the indication information address storage subunit to the obtaining subunit when receiving the request for obtaining the address of the indication information from the obtaining subunit.

21. The system according to claim **17**, wherein the IIS is further:

configured to acquire the corresponding indication information from the corresponding media source according to the address of the indication information obtained; and

send the indication information acquired to the calling party.

22. The system according to claim **21**, wherein the network side is further configured to transform the media format of the obtained indication information, and send the transformed indication information processed to the calling party.

23. A communication device for providing indication information, comprising:

an indication information setting unit, configured to set indication property information to be provided to a user terminal which calls the communication device, wherein the indication information setting unit comprises an indication information storage subunit and a first indication information feedback subunit:

the indication information storage subunit, configured to store the indication property information in advance;

the first indication information feedback subunit, configured to feed back the indication property information stored in the indication information storage subunit to an Information Indication Server (IIS) when receiving a request for obtaining the indication property information from the IIS before the communication device answers the call in the connection procedure between the communication device and the user terminal.

24. The communication device according to claim **23**, wherein, the indication information setting unit further comprises:

an indication information list storage subunit, configured to store in advance an indication property information list including at least one piece of indication information to be provided to the user terminal;

an indication information list displaying subunit, configured to display the indication property information list stored in the indication information list storage subunit to a user of the communication device when receiving the request for obtaining the indication property information;

the communication device feeds back the indication property information selected by the user of the communication device in the indication information list to the user terminal calling the communication device.

25.-26. (canceled)

* * * * *