

(19)



(11)

**EP 4 356 983 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:

**20.11.2024 Bulletin 2024/47**

(51) International Patent Classification (IPC):

**A63B 21/055** <sup>(2006.01)</sup>      **A63B 21/062** <sup>(2006.01)</sup>  
**A63B 21/00** <sup>(2006.01)</sup>      **A63B 71/12** <sup>(2006.01)</sup>  
**A63B 23/04** <sup>(2006.01)</sup>

(21) Application number: **22203011.6**

(52) Cooperative Patent Classification (CPC):

**A63B 21/0552; A63B 21/062; A63B 21/154;**  
**A63B 21/4019; A63B 21/4029; A63B 71/1225;**  
A63B 21/00076; A63B 21/4013; A63B 21/4015;  
A63B 21/4045; A63B 23/0482; A63B 2210/50

(22) Date of filing: **21.10.2022**

(54) **FITNESS EXERCISE APPARATUS**

FITNESSÜBUNGSGERÄT

APPAREIL D'EXERCICE PHYSIQUE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB**  
**GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL**  
**NO PL PT RO RS SE SI SK SM TR**

(72) Inventor: **YANG, Yen-Shuo**  
**404 Taichung City (TW)**

(43) Date of publication of application:

**24.04.2024 Bulletin 2024/17**

(74) Representative: **Zimmermann, Tankred Klaus et al**  
**Schoppe, Zimmermann, Stöckeler**  
**Zinkler, Schenk & Partner mbB**  
**Patentanwälte**  
**Radtkoferstrasse 2**  
**81373 München (DE)**

(73) Proprietor: **Yangzhou Jiuyi Hardware & Machinery Co., Ltd.**

**Yangzhou, Jiangsu 225008 (CN)**

(56) References cited:

**EP-A1- 3 915 654      US-A- 6 142 919**  
**US-A1- 2006 189 457**

**EP 4 356 983 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The disclosure relates to an exercise machine, and more particularly to a fitness exercise apparatus.

**[0002]** A conventional exercise machine such as the one disclosed in US Patent Application Publication No. US 2002/0077229 A1 includes a frame assembly, a user support assembly connected to the frame assembly, two bungee cord units mounted on the frame assembly, and two cable units respectively connected to the two bungee cord units. When the conventional exercise machine is used, a user sits on the user support assembly and pulls the cable units which pulls the bungee cord units, and elastic deformation of the bungee cords provides resistance for the user to train against.

**[0003]** However, the bungee cords in the conventional exercise machine are wrapped over a pulley and the contact between the bungee cords and the pulley generates friction that greatly reduces the service life of the bungee cords. Additionally, the user will have a comparatively more limited range of movement when performing exercises on the conventional exercise machine since the length of travel for the bungee cords and the cables are fixed.

**[0004]** Moreover, the conventional exercise machine has complicated cable connections underneath a seat unit of the user support assembly, this design complicates procedures for detaching the seat unit from the conventional exercise machine.

**[0005]** Therefore, an object of the disclosure is to provide a fitness exercise apparatus that can alleviate at least one of the drawbacks of the prior art.

**[0006]** According to the disclosure, the fitness exercise apparatus includes a main frame, a seat unit, a first elastic unit, two second elastic units, a transmission unit, and an operating unit. The main frame includes a base seat and a support unit that is connected to the base seat. The seat unit is mounted detachably on the base seat. The first elastic unit is mounted on the main frame and includes a plurality of first elastic members. The two second elastic units are mounted on the main frame, and each of the second elastic units includes a plurality of second elastic members. The transmission unit includes a first fixed pulley set, a second fixed pulley set, a main movable pulley set, two third fixed pulley sets, two side movable pulley sets, a first cable, a second cable, and two third cables. The first fixed pulley set, the second fixed pulley set, and the two third fixed pulley sets are mounted on the support unit. The two side movable pulley sets are connected respectively to the second elastic units. The first cable wraps around the first fixed pulley set and the main movable pulley set. The second cable wraps around the second fixed pulley set and the main movable pulley set, and is connected to the first elastic unit. Each of the two third cables wraps around a respective one of the third fixed pulley sets and a respective one of the side movable pulley sets. The operating unit includes at least one operating member that is connected

to one of the first, second and two third cables. Pulling of the first cable drives the main movable pulley set to move upwardly, thereby resulting in, via the second cable, deformation of the first elastic unit against an elastic force of the first elastic unit. Pulling of each of the third cables drives the respective one of the side movable pulley sets to move upwardly, thereby resulting in deformation of the respective one of the second elastic units against an elastic force of the second elastic unit.

**[0007]** Other features and advantages of the disclosure will become apparent in the following detailed description of the embodiment(s) with reference to the accompanying drawings. It is noted that various features may not be drawn to scale.

Figure 1 is a perspective view illustrating an embodiment of a fitness exercise apparatus according to the present disclosure.

Figure 2 is a fragmentary perspective view illustrating a seat unit of the embodiment.

Figure 3 is a fragmentary partially exploded perspective view illustrating the seat unit.

Figure 4 is a schematic perspective view showing a transmission unit of the embodiment.

Figure 5 is a perspective view showing the seat unit detached from the embodiment.

Figure 6 is a fragmentary partially sectional view illustrating the seat unit.

Figure 7 is a schematic side view showing a user performing a wide grip lat pulldown exercise on the embodiment.

Figure 8 is a schematic side view showing the user performing a chest pull exercise on the embodiment.

Figure 9 is a schematic side view illustrating the user performing a seated cable row on the embodiment.

Figure 10 is a schematic side view illustrating the user performing a triceps pushdown exercise on the embodiment.

Figure 11 is a schematic perspective view showing the user performing a standing low pulley bicep curl exercise on the embodiment.

Figure 12 is a schematic perspective view showing the user performing an alternating straight arm pulldown exercise on the embodiment.

Figure 13 is a schematic perspective view illustrating the user performing a reverse standing low pulley bicep curl exercise on the embodiment.

Figure 14 is a schematic perspective view showing the user performing a cross body bicep curl exercise on the embodiment.

Figure 15 is a schematic perspective view showing the user performing standing high and low cable crossover exercise on the embodiment.

Figure 16 is a schematic perspective view illustrating the user performing an alternating leg drop exercise on the embodiment.

Figure 17 is a force distance graph of 101b test results from exercises performed with the embodi-

ment.

Figure 18 is a force distance graph of 20lb test results from exercises performed with the embodiment.

Figure 19 is a schematic side view illustrating the user using the embodiment at an inclined angle.

Figure 20 is a schematic side view showing the user using the embodiment at a declined angle.

Figure 21 is a schematic side view illustrating the user performing a cable glute kickback exercise on the embodiment.

**[0008]** Before the disclosure is described in greater detail, it should be noted that where considered appropriate, reference numerals or terminal portions of reference numerals have been repeated among the figures to indicate corresponding or analogous elements, which may optionally have similar characteristics.

**[0009]** It should be noted herein that for clarity of description, spatially relative terms such as "top," "bottom," "upper," "lower," "on," "above," "over," "downwardly," "upwardly" and the like may be used throughout the disclosure while making reference to the features as illustrated in the drawings. The features may be oriented differently (e.g., rotated 90 degrees or at other orientations) and the spatially relative terms used herein may be interpreted accordingly.

**[0010]** Referring to Figures 1, 2 and 5, an embodiment of the fitness exercise apparatus according to the disclosure includes a main frame 10, a seat unit 20, a first elastic unit 30, two second elastic units 40, a transmission unit 50, an operating unit 60, two weight units 70, and two resistance units 80.

**[0011]** The main frame 10 includes a base seat 11, a support unit 12 that is connected to the base seat 11, a first hanger-board 13 that corresponds in position with the support unit 12, two second hanger-boards 14 that are mounted to the base seat 11, and two third hanger-boards 15 mounted to the support unit 12.

**[0012]** The base seat 11 includes two spaced-apart legs 111, a plurality of connecting rods 112 that are connected between the legs 111, and two retaining members 113. Each of the legs 111 of the base seat 11 has a base segment 114 and an inclined segment 115 that is transverse to the base segment 114, that has an inner end 116 connected to the base segment 114, and an outer end 117 opposite to the inner end 116. A distance between the inclined segments 115 of the legs 111 gradually increases from the inner ends 116 of the inclined segments 115 towards the outer ends 117 of the inclined segments 115. The retaining members 113 are half-round gutter shaped, are respectively connected fixedly to the base segments 114 of the legs 111, and are respectively proximate to the inclined segments 115 of that legs 111. The second hanger-boards 14 are mounted on one of the connecting rods 112.

**[0013]** The support unit 12 of the main frame 10 includes a rear support member 121, a front support member 122, a hanging member 123, two lower mounting

rods 124, an upper mounting rod 125, a support handle 126, two horizontal rods 127, and two guide rods 128. The rear support member 121 is inverted L-shaped and mounted to one of the connecting rods 112. The front support member 122 is connected between the rear support member 121 and another one of the connecting rods 112 of the base seat 11, and is also inverted L-shaped. The hanging member 123 is mounted on top of the rear support member 121. The two lower mounting rods 124 are connected respectively to opposite lateral sides of the rear support member 121. The upper mounting rod 125 is mounted on the hanging member 123. The support handle 126 is mounted to the rear support member 121. The two horizontal rods 127 are connected respectively to the opposite lateral sides of the rear support member 121. Each of the two guide rods 128 has one end that is connected to a respective one of the horizontal rods 127. The two third hanger-boards 15 of the main frame 10 are mounted respectively to the opposite lateral sides of the rear support member 121.

**[0014]** The seat unit 20 is mounted detachably on the base seat 11, and includes an inner leg member 21, an outer leg member 22, a guide rail 23, a seat member 24, two foot rests 25, and a latch unit 26. The inner leg member 21 is coupled removably to the retaining members 113. The guide rail 23 is connected between the inner leg member 21 and the outer leg member 22. The seat member 24 is mounted on the guide rail 23, the foot rests 25 are secured to the inner leg member 21, and the latch unit 26 is mounted to the seat member 24. The inner leg member 21 includes a stationary tube 211, an inner leg rod 212, and an adjusting component 213. The stationary tube 211 is connected transversely to the guide rail 23. The inner leg rod 212 is inverted T-shaped, and has two arms coupled removably and respectively to the retaining members 113 of the base seat 11. Moreover, the inner leg rod 212 is connected telescopically to the stationary tube 211 and is formed with a plurality of adjusting holes 214. The adjusting component 213 is inserted transversely into the stationary tube 211 and engages a selected one of the adjusting holes 214. Referring to Figures 3 and 6, the seat member 24 is capable of sliding relative to the guide rail 23 or capable of being securely affixed to the guide rail 23 via the latch unit 26. More specifically, the guide rail 23 has a plurality of securing holes 231 arranged lengthwise. The latch unit 26 has a latch pin 262, an outer sleeve 261 that is sleeved over the latch pin 262 and that has a groove 266, and a spring 263 that is sleeved on the latch pin 262 and that is disposed between the latch pin 262 and the outer sleeve 261. The latch pin 262 has a latch end 264 that can engage a selected one of the securing holes 231 of the guide rail 23 to securely fix the seat member 24 to the guide rail 23. The latch unit 26 further has a pull knob 265 opposite to the latch end 264 of the latch pin 262. The spring 263 biases the latch end 264 of the latch pin 262 against the guide rail 23, so that the latch pin 262 can remain securely

engaged to the selected one of the securing holes 231 of the guide rail 23 when the latch end 264 of the latch pin 262 engages that securing hole 231. The pull knob 265 is connected fixedly to the latch pin 262, and has an index portion 267 that is registered with the groove 266 of the latch pin 262. When the seat member 24 is securely fixed to the guide rail 23 via the latch unit 26, and the index portion 267 of the pull knob 265 engages the groove 266 of the latch pin 262. The pull knob 265 can then be pulled to disengage the index portion 267 from the groove 266, and the pulling back of the pull knob 265 disengages the latch end 264 of the latch pin 262 from the securing hole 231 of the guide rail 23. At this moment, the pull knob 265 can be rotated 90 degrees so that the latch end 264 remains disengaged from the securing hole 231 by preventing the index portion 267 from engaging the groove 266 of the latch pin 262, thereby facilitating sliding movement of the seat member 24 relative to the guide rail 23.

**[0015]** The first elastic unit 30 is mounted on the main frame 10 and includes a plurality of first elastic members 31. Each of the first elastic members 31 has an end hooked on the first hanger board 13, and an opposite end connected to the transmission unit 50.

**[0016]** The two second elastic units 40 are mounted on the main frame 10. Each of the second elastic units 40 is connected between a respective one of the second hanger-boards 14 and a respective one of the transmission units 50, and includes a plurality of second elastic members 41 (bungees). For each of the second elastic units 40, each of the second elastic members 41 has an end that is hooked on the respective one of the second hanger boards 14, and an opposite end that is connected removably to the respective one of the transmission units 50. When a second elastic member 41 is not in use it may be stored away by having the opposite end hooked on a respective one of the third hanger boards 15.

**[0017]** Referring to Figures 1 and 4, the transmission unit 50 includes a first fixed pulley set 51, a second fixed pulley set 52, a main movable pulley set 53, two third fixed pulley sets 54, two side movable pulley sets 55, a first cable 56, a second cable 57, and two third cables 58. The first fixed pulley set 51 and the second fixed pulley set 52 are mounted on the support unit 12. The two third pulley sets 54 are also mounted on the support unit 12. The two side movable pulley sets 55 are connected respectively to the second elastic units 40. The first cable 56 wraps around the first fixed pulley set 51 and the main movable pulley set 53. The second cable 57 wraps around the second fixed pulley set 52 and the main movable pulley set 53, and is connected to the first elastic unit 30. The two third cables 58 each wrap around a respective one of the third fixed pulley sets 54 and a respective one of the side movable pulley sets 55.

**[0018]** The first fixed pulley set 51 includes a plurality of first fixed pulleys 511 that are mounted to the rear support member 121, the front support member 122, and the hanging member 123. The second fixed pulley set

52 includes a plurality of second fixed pulleys 521 that are mounted respectively to the rear support member 121 and the base seat 11. The main movable pulley set 53 includes a main block 531, and a main movable pulley 532 fixed on the main block 531. The first cable 56 wraps around the main movable pulley 532, and the second cable 57 is connected to the main block 531. The third fixed pulley set 54 includes a plurality of third fixed pulleys 541 mounted on the upper mounting rod 125 and the lower mounting rods 124. Each of the side movable pulley sets 55 of the transmission unit 50 includes a side block 551 and a side movable pulley 552 that is fixed on the side block 551. For each of the second elastic units 40, all the second elastic members 41 are connected detachably to the side block 551 of the respective one of the side movable pulley sets 55.

**[0019]** The operating unit 60 includes at least one operating member that is connected to one of the first, second and two third cables 56, 57, 58. In this embodiment, the operating unit 60 includes a plurality of operating members that are configured as two hand grips 61, a long handlebar 62 or a short handlebar 63. In practical terms, the two hand grips 61 may be respectively detachably connected to opposite first and second ends of the third cables 58. In this embodiment, the long handlebar 62 is detachably connected to a first end of the first cable 56, and the short handlebar 63 is detachably connected to a second end of the first cable 56. It should be noted that the operating members are not limited to the above examples, and they may be any device the user may use to operate the fitness exercise apparatus, for example, ankle straps, lat pulldown attachment, triceps rope, rotating bar, V-shaped bar etc.

**[0020]** The offset weight units 70 each include a shaft 71 that is secured to the base segment 114 of a respective one of the two space-apart legs 111 of the base seat 11, and a plurality of weight plates 72 that are sleeved removably on the shaft 71.

**[0021]** Each of the resistance units 80 includes a fourth fixed pulley set 81 that is mounted on the main frame 10, a weight block 82 that is mounted on the main frame 10 by being sleeved on a corresponding guide rod 128, and a connecting cable 83. For each resistance unit 80, the fourth fixed pulley set 81 includes two fourth fixed pulleys 811 mounted respectively on a respective one of the horizontal rods 127 and the base seat 11, and the connecting cable 83 wraps around the fourth fixed pulleys 811 and is interconnecting the side block 551 of a respective one of the side movable pulley sets 55 and the weight block 82. Specifically, the connecting cable 83 has one end connected to the side block 551 of the respective one of the side movable pulley sets 55, and an opposite end connected detachably to the weight block 82.

**[0022]** Referring to Figure 1, when a user wishes to begin using the fitness exercise apparatus the inner leg member 21 is first coupled to the retaining members 113, and the seat member 24 may be selected, according to the type of training the user wishes to perform, to either

slide against or be securely affixed to the guide rail 23 via the latch unit 26 in this embodiment. The number of the first and second elastic members 31, 41 may be selected according to the type of training the user wishes to conduct. The surplus first and second elastic members 31, 41 that are not in use may be stored. Surplus first elastic members 31 may be stored by having one end connected to the first hanger-board 13 and the other end connected to a nearest third hanger-board 15. Surplus second elastic members 41 may be stored by having one end connected to the respective second hanger-board 14 and the other end connected to a nearest third hanger-board 15.

**[0023]** Referring to Figure 7, when the seat member 24 is securely affixed relative to the guide rail 23 and the user is seated on the seat member 24, the user may pull the long handlebar 62 downwards, and the pulling of the first cable 56 drives the main movable pulley set 53 to move upwardly, thereby resulting in, via the second cable 57, deformation of the first elastic unit 30 against an elastic force of the first elastic unit 30. The above setup allows the user to perform a wide grip lat pulldown exercise as shown in Figure 7, where the user is shown seated facing the fitness exercise apparatus. The same setup also allows the user to perform a wide grip rear pulldown exercise (not shown in the Figures) by sitting in a reverse position with their back facing the fitness exercise apparatus.

**[0024]** Referring to Figures 8, the user is shown performing a chest pull exercise on the fitness exercise apparatus. In this case, referring further to Figures 1 and 4, the fitness exercise apparatus is set up by connecting the two hand grips 61 respectively to the first ends of the third cables 58. The second ends of the third cables 58 are fixed at this time, so that when the user pulls the two hand grips 61, the pulling of each of the third cables 58 drives the respective one of the side movable pulley sets 55 to move upwardly, thereby resulting in movement of the weight block 82 of the respective one of the resistance units 80. In the meantime, the pulling of each of the third cables 58 results in deformation of the respective one of the second elastic units 40 against an elastic force of the second elastic unit 40. It should be noted, that a seated straight arm pulldown exercise may be performed from the same setup of the fitness exercise apparatus.

**[0025]** Referring to Figure 9, a seated cable row exercise may be performed on the fitness exercise apparatus. In this case, the fitness exercise apparatus is set up by operating the latch unit 26 so that the seat member 24 is capable of sliding relative to the guide rail 23. The user is seated on the seat member 24 and has both feet planted on the foot rests 25. In this exercise, the user pulls the short handle bar 63 while seated on the seat member 24 and sliding relative to the guide rail 23. The first end of the first cable 56 is fixed to prevent movement, so that resistance against the user's pull from the first elastic member 31 can be transferred via the first cable 56. The seated cable row exercise allows the user to effectively

train the latissimus dorsi muscles and the trapezius muscles.

**[0026]** Referring to Figure 10, the seat unit 20 may be detached from the main frame 10 to allow the user to perform a triceps push down exercise. In this case, the user is standing and uses the long handlebar 62 to pull down against the resistance of the resistance unit 30. The setup is similar to the wide grip lat pulldown exercise shown in Figure 7 and further details are omitted for the sake of brevity.

**[0027]** Referring to Figure 11, where the user is shown performing a standing low pulley bicep curl. In this case, the seat unit 20 is detached from the main frame 10 and the user stands in the middle of the spaced-apart legs 111 of the base seat 11. The two hand grips 61 are respectively connected to the second ends of the two third cables 58, with the first ends of the third cables 58 being fixed. The user exerts a pulling motion that pulls the two third cables 58. The pulling of each of the third cables 58 will drive the side movable pulley sets 55 to move upwardly, thereby resulting in deformation of the second elastic units 40 against an elastic force of the second elastic units 40.

**[0028]** Referring to Figure 12, where the user is shown performing an alternating straight arm pulldown exercise. For this exercise the fitness exercise apparatus is set up by detaching the seat unit 24 from the main frame 10, and then respectively connecting the two hand grips 61 to the first ends of the two third cables 58, with the second ends of the third cables 58 being fixed. The user performs a pulling motion with the two hand grips 61 thereby pulling the two third cables 58. The pulling of each of the third cables 58 drives the respective one of the side movable pulley sets 55 to move upwardly, thereby resulting in deformation of the respective one of the second elastic units 40 against an elastic force of the second elastic units 40. Additionally, it should be noted that a standing straight arm pulldown exercise may be performed from the same setup of the fitness exercise apparatus.

**[0029]** Referring to Figure 13, in this setup the user is standing with their back facing the fitness exercise apparatus and performing a reverse low pulley standing bicep curl exercise. The two hand grips 61 are respectively connected to the second ends of the third cables 58 with the first ends of the third cables 58 being fixed.

**[0030]** Referring to Figure 14, the user is shown performing a cross body bicep curl exercise. The user stands sideways relative to the main frame 10 of the fitness exercise apparatus and performs a pulling motion using only a single hand grip 61 that is connected to the second end of one of the third cables 58.

**[0031]** Referring to Figure 15, the user is shown performing a standing high and low cable crossover exercise, where the user pulls the two hand grips 61 from a higher angle and a lower angle, to crossover at chest height. For this exercise one of the two hand grips 61 is connected to the first end of one of the third cables 58, and the other one of the two hand grips 61 is connected

to the second end of the other one of the third cables 58.

**[0032]** Referring to Figure 16, the user is shown performing an alternating leg drop exercise. For this exercise, the fitness exercise apparatus is setup the same as for the chest pull exercise, and the user uses the hand grips 61 as foot straps.

**[0033]** The fitness exercise apparatus according to the present disclosure has the following advantages:

1. The fitness exercise apparatus is operated against the elastic force of the first elastic members 31 and the second elastic members 41 by virtue of the combination of the main movable pulley set 53, the two side movable pulley sets 55, the first cable 56, the second cable 57, and the third cables 58. This structure has two notable advantages. The first one is that this structure is designed to avoid contact between the elastic members and the pulleys, which thereby prevents friction and prolongs the service life of the elastic members. Secondly, the first and second elastic members 31, 41 may have a linear deformation of up to 1.4 meters, allowing for 1.4 meters of travel for the user when operating the fitness exercise apparatus. The fitness exercise apparatus is thus applicable for a large range of users, and suitable for users with height up to 1.9 meters.

2. The first elastic unit 30 and the two second elastic units 40 form the resistance generating elements of the fitness exercise apparatus (while static resistance is provided by the weight blocks 82). In the exemplary embodiment of the disclosure, the first elastic unit 30 includes three first elastic members 31, and the two second elastic units 40 each include three second elastic members 41. The three first and second elastic members 31, 41 respectively have diameters of 8, 10, and 12mm. By choosing different combinations of the three first and second elastic members 31, 41 the user may be provided with seven different resistance levels to perform over 20 different strength training and rowing machine exercises on the fitness exercise machine. Referring to Figures 17 and 18, a force distance plots is shown where 10lb and 20lb weight blocks 82 are used in combination with 8mm, 10mm, and 12mm diameter first and second elastic members 31, 41 while performing three different types of exercises. The exercises are categorized in into three types, full stroke pulling exercises such as the wide grip lat pulldown exercise and the triceps pushdown exercise, and rowing machine exercises, two handed exercises such as the alternating straight arm pull down exercise and the chest pull exercise, and arm swing exercises such as the reverse standing low pulley bicep curl exercise. The results in Figures 17 and 18 show that the fitness exercise apparatus has the capacity to be used by a variety of users with different resistance preferences and that a variety of different exercises may be performed with the fitness exercise appara-

tus.

3. By designing the seat unit 20 to be a detachable bench, the structure of the seat unit 20 may be streamlined to lower costs. The detachability of the seat unit 20 also has the benefit of providing easier storage for the fitness exercise apparatus.

4. The seat unit 20 is mounted to the base seat 11 through its sheer weight alone without complicated mechanisms of attachment, which simplifies removal, storage and operation of the fitness exercise. Additionally, removing the seat unit 20 may allow the user to perform several exercises that require the user to stand right next to the fitness exercise

5. The structure of the seat unit 20 is simplified compared to the conventional exercise machine by not having complicated cable connections underneath the seat unit 20. Therefore, the seat unit 20 may be detached or reattached quickly and making it easier for the user to perform various exercises. Additionally, production costs may be lowered due to the simpler attachment.

6. Figure 20 shows the fitness exercise apparatus used in a manner similar to a two handle rowing machine by a user. The fitness exercise apparatus has the advantage in that it can be used for two styles of indoor rowing exercises. Additionally, the length of the inner leg member 21 of the seat unit 20 is adjustable so that the angle of the guide rail 23 may easily adjusted to be flat, inclined or declined. When the guide rail 23 is adjusted to be flat, the fitness exercise apparatus is suitable for bench training, and the guide rail 23 may be adjusted to be inclined to increase resistance for indoor rowing. Moreover, the seat unit 20 may be detached and removed in exercises where the user needs to stand right next to the fitness exercise apparatus.

7. By designing the seat unit 20 to be detachable, the fitness exercise apparatus is easier to manufacture, while also lowering the cost of manufacture. The detachable seat unit 20 is easier to package and ship, and can achieve 50% more shipping container utilization, which may translate to huge cost savings during periods of high inflation and high shipping costs.

8. Referring to Figures 1 and 19, the base seat 11 of the main frame 10 has a flared design so that the fitness exercise apparatus is more stable. The fitness exercise apparatus complies with European standards EN957-2 test methods for stationary training equipment under test conditions of an incline of 10° a total of nine first elastic members 31 and second elastic members 41 stretched to a maximum limit.

9. The base seat 11 includes two offset weight units 70 disposed on opposite sides of the base seat 11. The user may freely add the weight plates 72 as a counterweight to increase the stability of the main frame 10 and prevent the main frame 10 from top-

pling over. The recommended amount of counterweight is 20lbs on each side of the base seat 11 so as to comply with European standards EN957-2.

10. The first elastic unit 30 and the two second elastic units 40 form the resistance generating elements of the fitness exercise apparatus. In the exemplary embodiments of the disclosure, the first elastic unit 30 includes three first elastic members 31 and the two second elastic units 40 each include three second elastic members 41. The three first and second elastic members 31, 41 respectively have diameters of 8, 10, and 12mm. By choosing different combinations of the three first and second elastic members 31, 41 the user may be provided with various different resistance levels to perform over 20 different strength training and rowing machine exercises on the fitness exercise machine.

11. Although the fitness exercise apparatus according to the present disclosure has the functionality of both cardio and strength training exercise equipment, it is more geared towards cardio workouts.

12. The seat member 24 is adjustable by the latch unit 26 engaging different securing holes 231 on the guide rail 23. This allows the fitness exercise apparatus to accommodate the requirements of different users ergonomically.

**[0034]** Referring to Figure 1, a conventional rowing machine display and sensor 61 is installed on the seat unit 20, a phone holder 62 is installed on the support unit 12, and sensors 521, 531 are installed respectively on the long handlebar 62 and the short handlebar 63. These instruments allow the fitness exercise apparatus to display various exercise data such as laps/repetitions, speed, calorie expenditure, and heart rate so that the user may monitor their training progress and analyze their progress quantitatively. This may increase user motivation and incentivize the user to accomplish their fitness goals. The user may monitor their calorie expenditure and their heart rate from the conventional rowing machine display and sensor 61. Referring to Figure 21, the user is shown performing a cable glute kickback exercise where the support handle 126 may be used for support and the operating member may be an ankle strap.

**[0035]** In summary of the above, the fitness exercise apparatus according to the disclosure has the functions of both cardio and strength training exercise machines. The structure is simple, and the manufacture process may be streamlined. The fitness exercise apparatus allows users to quickly reach their strength training as well as cardio fitness goals.

**[0036]** In the description above, for the purposes of explanation, numerous specific details have been set forth in order to provide a thorough understanding of the embodiment(s). It will be apparent, however, to one skilled in the art, that one or more other embodiments may be practiced without some of these specific details.

It should also be appreciated that reference throughout this specification to "one embodiment," "an embodiment," an embodiment with an indication of an ordinal number and so forth means that a particular feature, structure, or characteristic may be included in the practice of the disclosure. It should be further appreciated that in the description, various features are sometimes grouped together in a single embodiment, figure, or description thereof for the purpose of streamlining the disclosure and aiding in the understanding of various inventive aspects; such does not mean that every one of these features needs to be practiced with the presence of all the other features. In other words, in any described embodiment, when implementation of one or more features or specific details does not affect implementation of another one or more features or specific details, said one or more features may be singled out and practiced alone without said another one or more features or specific details. It should be further noted that one or more features or specific details from one embodiment may be practiced together with one or more features or specific details from another embodiment, where appropriate, in the practice of the disclosure.

## Claims

1. A fitness exercise apparatus including:

a main frame (10) including a base seat (11) and a support unit (12) that is connected to said base seat (11); and  
a seat unit (20) mounted detachably on said base seat (11);

**characterized in that** said fitness exercise apparatus further includes:

a first elastic unit (30) mounted on said main frame (10) and including a plurality of first elastic members (31);

two second elastic units (40) mounted on said main frame (10), each of said second elastic units (40) including a plurality of second elastic members (41);

a transmission unit (50) including

a first fixed pulley set (51) that is mounted on said support unit (12),

a second fixed pulley set (52) that is mounted on said support unit (12),

a main movable pulley set (53),

two third fixed pulley sets (54) that are mounted on said support unit (12),

two side movable pulley sets (55) that are connected respectively to said second elastic units (40),

a first cable (56) that wraps around said first fixed pulley set (51) and said main

movable pulley set (53),  
 a second cable (57) that wraps around  
 said second fixed pulley set (52) and  
 said main movable pulley set (53), and  
 that is connected to said first elastic unit  
 (30), and  
 two third cables (58), each wrapping  
 around a respective one of said third  
 fixed pulley sets (54) and a respective  
 one of said side movable pulley sets  
 (55); and

an operating unit (60) including at least one  
 operating member (61, 62, 63) that is con-  
 nected to one of said first, second and ca-  
 bles (56, 57, 58);  
 wherein pulling of said first cable (56) drives  
 said main movable pulley set (53) to move  
 upwardly, thereby resulting in, via said sec-  
 ond cable (57), deformation of said first  
 elastic unit (30) against an elastic force of  
 said first elastic unit (30); and  
 wherein pulling of each of said third cables  
 (58) drives the respective one of said side  
 movable pulley sets (55) to move upwardly,  
 thereby resulting in deformation of the re-  
 spective one of said second elastic units  
 (40) against an elastic force of said second  
 elastic unit (40).

2. The fitness exercise apparatus of claim 1, **charac-**  
**terized by** two resistance units (80), each including  
 a weight block (82) that is mounted on said main  
 frame (10), and a connecting cable (83) that inter-  
 connects said weight block (82) and a respective one  
 of said side movable pulley sets (55), pulling of each  
 of said third cables (58) driving the respective one  
 of said side movable pulley sets (55) to move up-  
 wardly, thereby resulting in movement of said weight  
 block (82) of the respective one of said resistance  
 units (80).
3. The fitness exercise apparatus of claim 2, **charac-**  
**terized in that:**

said support unit (12) of said main frame (10)  
 includes a rear support member (121) that is in-  
 verted L-shaped, a front support member (122)  
 that is connected between said rear support  
 member (121) and said base seat (11) and that  
 is inverted L-shaped, a hanging member (123)  
 that is mounted on a top of said rear support  
 member (121), two lower mounting rods (124)  
 that are connected respectively to opposite lat-  
 eral sides of said rear support member (121),  
 an upper mounting rod (125) that is mounted on  
 said hanging member (123), two horizontal rods  
 (127) that are connected respectively to said op-

posite lateral sides of said rear support member  
 (121), and two guide rods (128), each guide rod  
 (128) having one end that is connected to said  
 base seat (11), and an opposite end that is con-  
 nected to a respective one of said horizontal  
 rods (127);  
 said first fixed pulley set (51) of said transmis-  
 sion unit (50) includes a plurality of first fixed  
 pulleys (511) that are mounted to said rear sup-  
 port member (121), said front support member  
 (122), and said hanging member (123);  
 said second fixed pulley set (52) of said trans-  
 mission unit (50) includes a plurality of second  
 fixed pulleys (521) that are mounted respectivel-  
 y to said rear support member (121) and said  
 base seat (11);  
 said third fixed pulley set (54) of said transmis-  
 sion unit (50) includes a plurality of third fixed  
 pulleys (541) mounted on said upper mounting  
 rod (125) and said lower mounting rods (124);  
 each of said resistance units (80) further in-  
 cludes a fourth fixed pulley set (81) that is mount-  
 ed on said main frame (10), and that includes  
 two fourth fixed pulleys (811) mounted respect-  
 ively one a respective one of said horizontal  
 rods (127) and said base seat (11); and  
 for each of said resistance units (80), said con-  
 necting cable (83) wraps around said fourth fixed  
 pulleys (811), and said weight block (82) is  
 sleeved slidably on the respective one of said  
 guide rods (128).

4. The fitness exercise apparatus of claim 3, **charac-**  
**terized in that:**

said main movable pulley set (53) of said trans-  
 mission unit (50) includes a main block (531),  
 and a main movable pulley (532) fixed on said  
 main block (531);  
 said first cable (56) wraps around said main  
 movable pulley (532); and  
 said second cable (57) is connected to said main  
 block (531).

5. The fitness exercise apparatus as claimed in any  
 one of claims 3 and 4, **characterized in that:**

each of said side movable pulley sets (55) of  
 said transmission unit (50) includes a side block  
 (551) and a side movable pulley (552) that is  
 fixed on said side block (551);  
 for each of said second elastic units (40), said  
 second elastic members (41) are connected de-  
 tachably to said side block (551) of a respective  
 one of said side movable pulley sets (55); and  
 said connecting cable (83) of each of said re-  
 sistance units (80) has one end connected to  
 said side block (551) of a respective one of said

side movable pulley sets (55), and an opposite end connected detachably to said weight block (82).

6. The fitness exercise apparatus as claimed in any one of claims 1 to 5, **characterized in that:**

said base seat (11) includes two spaced-apart legs (111), a plurality of connecting rods (112) that are connected between said legs (111), and two retaining members (113) that are connected fixedly and respectively to said legs (111); and said seat unit (20) includes an inner leg member (21) that is coupled removably to said retaining members (113), an outer leg member (22), a guide rail (23) that is connected between said inner leg member (21) and said outer leg member (22), and a seat member (24) that is mounted on said guide rail (23).

7. The fitness exercise apparatus of claim 6, **characterized in that:**

said inner leg member (21) of said seat unit (20) includes a stationary tube (211) that is connected transversely to said guide rail (23), an inner leg rod (212) that is connected telescopically to said stationary tube (211) and that is formed with a plurality of adjusting holes (214), and an adjusting component (213) that is inserted transversely into said stationary tube (211) and that engages a selected one of said adjusting holes (214); and

said inner leg rod (212) is inverted T-shaped, and has two arms coupled removably and respectively to said retaining members (113) of said base seat (11).

8. The fitness exercise apparatus as claimed in any one of claims 1 to 7, **characterized in that** each of said legs (111) of said base seat (11) has:

a base segment (114); and  
an inclined segment (115) that is transverse to said base segment (114), that has an inner end (116) connected to said base segment (114), and an outer end (117) opposite to said inner end (116), a distance between said inclined segments (115) of said legs (111) gradually increasing from said inner ends (116) of said inclined segments (115) toward said outer ends (117) of said inclined segments (115).

9. The fitness exercise apparatus as claimed in any one of claims 1 to 8, **characterized by** two weight units (70), each including a shaft (71) that is secured to said base seat (11), and a plurality of weight plates (72) that are sleeved removably on said shaft (71).

## Patentansprüche

1. Eine Fitnessstrainingsvorrichtung, die folgende Merkmale umfasst:

einen Hauptrahmen (10), der einen Basissitz (11) und eine Stützeinheit (12) umfasst, die mit dem Basissitz (11) verbunden ist; und eine Sitzeinheit (20), die abnehmbar an dem Basissitz (11) befestigt ist;  
**dadurch gekennzeichnet, dass** die Fitnessstrainingsvorrichtung ferner folgende Merkmale umfasst:

eine erste elastische Einheit (30), die an dem Hauptrahmen (10) befestigt ist und eine Mehrzahl von ersten elastischen Baugliedern (31) umfasst;  
zwei zweite elastische Einheiten (40), die an dem Hauptrahmen (10) befestigt sind, wobei jede der zweiten elastischen Einheiten (40) eine Mehrzahl von zweiten elastischen Baugliedern (41) umfasst;  
eine Übertragungseinheit (50), die folgende Merkmale umfasst:

einen ersten fixierten Rollensatz (51), der an der Stützeinheit (12) befestigt ist,

einen zweiten fixierten Rollensatz (52), der an der Stützeinheit (12) befestigt ist,

einen beweglichen Hauptrollensatz (53),

zwei dritte fixierte Rollensätze (54), die an der Stützeinheit (12) befestigt sind, zwei seitliche bewegliche Rollensätze (55), die jeweils mit den zweiten elastischen Einheiten (40) verbunden sind, ein erstes Kabel (56), das um den ersten fixierten Rollensatz (51) und den beweglichen Hauptrollensatz (53) gewickelt ist,

ein zweites Kabel (57), das um den zweiten fixierten Rollensatz (52) und den beweglichen Hauptrollensatz (53) gewickelt ist und das mit der ersten elastischen Einheit (30) verbunden ist, und

zwei dritte Kabel (58), die jeweils um einen jeweiligen der dritten fixierten Rollensätze (54) und einen jeweiligen der seitlichen beweglichen Rollensätze (55) gewickelt sind; und

eine Betätigungseinheit (60), die zumindest ein Betätigungsbauglied (61, 62, 63) umfasst, das mit einem des ersten, zweiten und

- dritten Kabels (56, 57, 58) verbunden ist; wobei ein Ziehen des ersten Kabels (56) den beweglichen Hauptrollensatz (53) antreibt, sich nach oben zu bewegen, was über das zweite Kabel (57) zu einer Verformung der ersten elastischen Einheit (30) gegen eine elastische Kraft der ersten elastischen Einheit (30) führt; und wobei ein Ziehen jedes der dritten Kabel (58) den jeweiligen der seitlichen beweglichen Rollensätze (55) antreibt, sich nach oben zu bewegen, was zu einer Verformung der jeweiligen der zweiten elastischen Einheiten (40) gegen eine elastische Kraft der zweiten elastischen Einheit (40) führt.
2. Die Fitnessstrainingsvorrichtung gemäß Anspruch 1, **gekennzeichnet durch** zwei Widerstandseinheiten (80), die jeweils einen Gewichtsblock (82), der an dem Hauptrahmen (10) befestigt ist, und ein Verbindungskabel (83) umfassen, das den Gewichtsblock (82) und einen jeweiligen der seitlichen beweglichen Rollensätze (55) miteinander verbindet, wobei ein Ziehen jedes der dritten Kabel (58) den jeweiligen der seitlichen beweglichen Rollensätze (55) antreibt, sich nach oben zu bewegen, was zu einer Bewegung des Gewichtsblocks (82) der jeweiligen der Widerstandseinheiten (80) führt.
3. Die Fitnessstrainingsvorrichtung gemäß Anspruch 2, **dadurch gekennzeichnet, dass:**
- die Stützeinheit (12) des Hauptrahmens (10) ein hinteres Stützbauglied (121), das eine umgekehrte L-Form aufweist, ein vorderes Stützbauglied (122), das zwischen dem hinteren Stützbauglied (121) und dem Basissitz (11) verbunden ist und das eine umgekehrte L-Form aufweist, ein Hängebauglied (123), das an einer Oberseite des hinteren Stützbauglieds (121) befestigt ist, zwei untere Befestigungsstangen (124), die jeweils mit gegenüberliegenden lateralen Seiten des hinteren Stützbauglieds (121) verbunden sind, eine obere Befestigungsstange (125), die an dem Hängebauglied (123) befestigt ist, zwei horizontale Stangen (127), die jeweils mit den gegenüberliegenden lateralen Seiten des hinteren Stützbauglieds (121) verbunden sind, und zwei Führungsstangen (128) umfasst, wobei jede Führungsstange (128) ein Ende, das mit dem Basissitz (11) verbunden ist, und ein gegenüberliegendes Ende aufweist, das mit einer jeweiligen der horizontalen Stangen (127) verbunden ist;
- der erste fixierte Rollensatz (51) der Übertragungseinheit (50) eine Mehrzahl von ersten fixierten Rollen (511) umfasst, die an dem hinteren Stützbauglied (121), dem vorderen Stützbauglied (122) und dem Hängebauglied (123) befestigt sind;
- der zweite fixierte Rollensatz (52) der Übertragungseinheit (50) eine Mehrzahl von zweiten fixierten Rollen (521) umfasst, die an dem hinteren Stützbauglied (121) beziehungsweise dem Basissitz (11) befestigt sind;
- der dritte fixierte Rollensatz (54) der Übertragungseinheit (50) eine Mehrzahl von dritten fixierten Rollen (541) umfasst, die an der oberen Befestigungsstange (125) und den unteren Befestigungsstangen (124) befestigt sind;
- jede der Widerstandseinheiten (80) ferner einen vierten fixierten Rollensatz (81) umfasst, der an dem Hauptrahmen (10) befestigt ist und der zweite fixierte Rollen (811) umfasst, die an einer jeweiligen der horizontalen Stangen (127) beziehungsweise dem Basissitz (11) befestigt sind; und
- für jede der Widerstandseinheiten (80) das Verbindungskabel (83) um die vierten fixierten Rollen (811) gewickelt ist und der Gewichtsblock (82) gleitbar auf die jeweilige der Führungsstangen (128) geschoben ist.
4. Die Fitnessstrainingsvorrichtung gemäß Anspruch 3, **dadurch gekennzeichnet, dass:**
- der bewegliche Hauptrollensatz (53) der Übertragungseinheit (50) einen Hauptblock (531) und eine bewegliche Hauptrolle (532) umfasst, die an dem Hauptblock (531) fixiert ist;
- das erste Kabel (56) um die bewegliche Hauptrolle (532) gewickelt ist; und
- das zweite Kabel (57) mit dem Hauptblock (531) verbunden ist.
5. Die Fitnessstrainingsvorrichtung gemäß einem der Ansprüche 3 und 4, **dadurch gekennzeichnet, dass:**
- jeder der beweglichen Seitenrollensätze (55) der Übertragungseinheit (50) einen Seitenblock (551) und eine bewegliche Seitenrolle (552) umfasst, die an dem Seitenblock (551) fixiert ist;
- für jede der zweiten elastischen Einheiten (40) die zweiten elastischen Bauglieder (41) abnehmbar mit dem Seitenblock (551) eines jeweiligen der beweglichen Seitenrollensätze (55) verbunden sind; und
- das Verbindungskabel (83) jeder der Widerstandseinheiten (80) ein Ende, das mit dem Seitenblock (551) eines jeweiligen der beweglichen Seitenrollensätze (55) verbunden ist, und ein gegenüberliegendes Ende aufweist, das abnehmbar mit dem Gewichtsblock (82) verbunden ist.

6. Die Fitnessstrainingsvorrichtung gemäß einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass:**

der Basissitz (11) zwei beabstandete Beine (111), eine Mehrzahl von Verbindungsstangen (112), die zwischen den Beinen (111) verbunden sind, und zwei Haltebauglieder (113) umfasst, die fest und jeweils mit den Beinen (111) verbunden sind; und die Sitzeinheit (20) ein inneres Beinbauglied (21), das entfernbar mit den Haltebaugliedern (113) gekoppelt ist, ein äußeres Beinbauglied (22), eine Führungsschiene (23), die zwischen dem inneren Beinbauglied (21) und dem äußeren Beinbauglied (22) verbunden ist, und ein Sitzbauglied (24) umfasst, das an der Führungsschiene (23) befestigt ist.

7. Die Fitnessstrainingsvorrichtung gemäß Anspruch 6, **dadurch gekennzeichnet, dass:**

das innere Beinbauglied (21) der Sitzeinheit (20) ein stationäres Rohr (211), das quer mit der Führungsschiene (23) verbunden ist, eine innere Beinstange (212), die teleskopisch mit dem stationären Rohr (211) verbunden ist und die mit einer Mehrzahl von Einstelllöchern (214) ausgebildet ist, und eine Einstellkomponente (213) umfasst, die quer in das stationäre Rohr (211) eingesetzt ist und die in ein ausgewähltes der Einstelllöcher (214) eingreift; und die innere Beinstange (212) umgekehrt T-förmig ist und zwei Arme aufweist, die entfernbar und jeweils mit den Haltebaugliedern (113) des Basissitzes (11) gekoppelt sind.

8. Die Fitnessstrainingsvorrichtung gemäß einem der Ansprüche 1 bis 7, **dadurch gekennzeichnet, dass** jedes der Beine (111) des Basissitzes (11) folgende Merkmale aufweist:

ein Basissegment (114); und ein geneigtes Segment (115), das quer zu dem Basissegment (114) ist, das ein inneres Ende (116), das mit dem Basissegment (114) verbunden ist, und ein äußeres Ende (117) gegenüber dem inneren Ende (116) aufweist, wobei ein Abstand zwischen den geneigten Segmenten (115) der Beine (111) von den inneren Enden (116) der geneigten Segmente (115) zu den äußeren Enden (117) der geneigten Segmente (115) allmählich zunimmt.

9. Die Fitnessstrainingsvorrichtung gemäß einem der Ansprüche 1 bis 8, **gekennzeichnet durch** zwei Gewichtseinheiten (70), die jeweils eine Welle (71), die an dem Basissitz (11) befestigt ist, und eine Mehr-

zahl von Gewichtsplatten (72) umfassen, die entfernbar auf die Welle (71) geschoben sind.

## 5 Revendications

1. Appareil d'exercice de fitness comportant:

un châssis principal (10) comportant un siège de base (11) et une unité de support (12) qui est connectée audit siège de base (11); et une unité de siège (20) montée de manière amovible sur ledit siège de base (11);

**caractérisé par le fait que** ledit appareil d'exercice de fitness comprend par ailleurs:

une première unité élastique (30) montée sur ledit châssis principal (10) et comportant une pluralité de premiers éléments élastiques (31);  
deux deuxièmes unités élastiques (40) montées sur ledit châssis principal (10), chacune desdites deuxièmes unités élastiques (40) comportant une pluralité de deuxièmes éléments élastiques (41);  
une unité de transmission (50) comportant

un premier ensemble de poulies fixes (51) qui est monté sur ladite unité de support (12),

un deuxième ensemble de poulies fixes (52) qui est monté sur ladite unité de support (12),

un ensemble de poulies mobiles principales (53),

deux troisièmes ensembles de poulies fixes (54) qui sont montés sur ladite unité de support (12),

deux ensembles de poulies mobiles latérales (55) qui sont connectés respectivement auxdites deuxièmes unités élastiques (40),

un premier câble (56) qui s'enroule autour dudit premier ensemble de poulies fixes (51) et dudit ensemble de poulies mobiles principales (53),

un deuxième câble (57) qui s'enroule autour dudit deuxième ensemble de poulies fixes (52) et dudit ensemble de poulies mobiles principales (53), et qui est connecté à ladite première unité élastique (30), et

deux troisièmes câbles (58) qui s'enroulent, chacun, autour de l'un desdits troisièmes ensembles de poulies fixes (54) et de l'un desdits ensembles de poulies mobiles latérales (55); et une unité d'actionnement (60) compor-

tant au moins un élément d'actionnement (61, 62, 63) qui est connecté à l'un desdits premier, deuxième et troisième câbles (56, 57, 58);

dans lequel la traction dudit premier câble (56) entraîne ledit ensemble de poulies mobiles principal (53) de manière à se déplacer vers le haut, ce qui résulte, par l'intermédiaire dudit deuxième câble (57), en la déformation de ladite première unité élastique (30) contre une force élastique de ladite première unité élastique (30); et

dans lequel la traction de chacun desdits troisièmes câbles (58) entraîne l'un respectif desdits ensembles de poulies mobiles latérales (55) de manière à se déplacer vers le haut, ce qui résulte en la déformation de l'un respectif desdits deuxièmes ensembles élastiques (40) contre une force élastique de ladite deuxième unité élastique (40).

2. Appareil d'exercice de fitness selon la revendication 1, **caractérisé par** deux unités de résistance (80) comportant, chacune, un bloc de poids (82) qui est monté sur ledit châssis principal (10), et un câble de connexion (83) qui connecte ledit bloc de poids (82) et l'un respectif desdits ensembles de poulies mobiles latérales (55), la traction de chacun desdits troisièmes câbles (58) entraînant l'un respectif desdits ensembles de poulies mobiles latérales (55) de manière à se déplacer vers le haut, ce qui résulte en un déplacement dudit bloc de poids (82) de l'une respective desdites unités de résistance (80).

3. Appareil d'exercice de fitness selon la revendication 2, **caractérisé par le fait que:**

ladite unité de support (12) dudit châssis principal (10) comporte un élément de support arrière (121) en forme de L inversé, un élément de support avant (122) qui est connecté entre ledit élément de support arrière (121) et ledit siège de base (11) et qui est en forme de L inversé, un élément de suspension (123) qui est monté sur une partie supérieure dudit élément de support arrière (121), deux tiges de montage inférieures (124) qui sont connectées respectivement aux côtés latéraux opposés dudit élément de support arrière (121), une tige de montage supérieure (125) qui est montée sur ledit élément de suspension (123), deux tiges horizontales (127) qui sont connectées respectivement auxdits côtés latéraux opposés dudit élément de support arrière (121), et deux tiges de guidage (128), chaque tige de guidage (128) présentant une extrémité qui est connectée audit siège de base

(11), et une extrémité opposée qui est connectée à l'une respective desdites tiges horizontales (127);

ledit premier ensemble de poulies fixes (51) de ladite unité de transmission (50) comporte une pluralité de premières poulies fixes (511) qui sont montées sur ledit élément de support arrière (121), ledit élément de support avant (122) et ledit élément de suspension (123);

ledit deuxième ensemble de poulies fixes (52) de ladite unité de transmission (50) comporte une pluralité de deuxièmes poulies fixes (521) qui sont montées respectivement sur ledit élément de support arrière (121) et ledit siège de base (11);

ledit troisième ensemble de poulies fixes (54) de ladite unité de transmission (50) comporte une pluralité de troisièmes poulies fixes (541) montées sur ladite tige de montage supérieure (125) et lesdites tiges de montage inférieures (124);

chacune desdites unités de résistance (80) comporte par ailleurs un quatrième ensemble de poulies fixes (81) qui est monté sur ledit châssis principal (10), et qui comporte deux quatrièmes poulies fixes (811) montées respectivement sur l'une respective desdites tiges horizontales (127) et ledit siège de base (11); et pour chacune desdites unités de résistance (80), ledit câble de connexion (83) s'enroule autour desdites quatrièmes poulies fixes (811), et ledit bloc de poids (82) est emmanché de manière coulissante sur l'une respective desdites tiges de guidage (128).

4. Appareil d'exercice de fitness selon la revendication 3, **caractérisé par le fait que:**

ledit ensemble de poulies mobiles principales (53) de ladite unité de transmission (50) comporte un bloc principal (531) et une poulie mobile principale (532) fixée sur ledit bloc principal (531);

ledit premier câble (56) s'enroule autour de ladite poulie mobile principale (532); et ledit deuxième câble (57) est connecté audit bloc principal (531).

5. Appareil d'exercice de fitness selon l'une quelconque des revendications 3 et 4, **caractérisé par le fait que:**

chacun desdits ensembles de poulies mobiles latérales (55) de ladite unité de transmission (50) comporte un bloc latéral (551) et une poulie mobile latérale (552) qui est fixée sur ledit bloc latéral (551);

pour chacune desdites deuxièmes unités élas-

- tiques (40), lesdits deuxièmes éléments élastiques (41) sont connectés de manière amovible audit bloc latéral (551) de l'un respectif desdits ensembles de poulies mobiles latérales (55); et ledit câble de connexion (83) de chacune desdites unités de résistance (80) présente une extrémité connectée audit bloc latéral (551) de l'un respectif desdits ensembles de poulies mobiles latérales (55), et une extrémité opposée connectée de manière amovible audit bloc de poids (82).
- 5  
10
6. Appareil d'exercice de fitness selon l'une quelconque des revendications 1 à 5, **caractérisé par le fait que**:
- 15  
20  
25  
30
- ledit siège de base (11) comporte deux pieds (111) distants l'un de l'autre, une pluralité de tiges de connexion (112) qui sont connectées entre lesdits pieds (111), et deux éléments de retenue (113) qui sont connectés de manière fixe et respectivement auxdits pieds (111); et ladite unité de siège (20) comporte un élément de jambe intérieur (21) qui est couplé de manière amovible auxdits éléments de retenue (113), un élément de jambe extérieur (22), un rail de guidage (23) qui est connecté entre ledit élément de jambe intérieur (21) et ledit élément de jambe extérieur (22), et un élément de siège (24) qui est monté sur ledit rail de guidage (23).
7. Appareil d'exercice de fitness selon la revendication 6, **caractérisé par le fait que**:
- 35  
40  
45  
50
- ledit élément de jambe intérieur (21) de ladite unité de siège (20) comporte un tube stationnaire (211) qui est connecté de manière transversale audit rail de guidage (23), une tige de jambe intérieure (212) qui est connectée de manière télescopique audit tube stationnaire (211) et qui est formée avec une pluralité de trous d'ajustage (214), et un composant d'ajustage (213) qui est inséré de manière transversale dans ledit tube stationnaire (211) et qui vient en prise avec l'un sélectionné parmi lesdits trous d'ajustage (214); et ladite tige de jambe intérieure (212) est en forme de T inversé et présente deux bras couplés de manière amovible et respectivement auxdits éléments de retenue (113) dudit siège de base (11).
8. Appareil d'exercice de fitness selon l'une quelconque des revendications 1 à 7, **caractérisé par le fait que** chacun desdits pieds (111) dudit siège de base (11) présente:
- 55
- un segment de base (114); et
- un segment incliné (115) qui est transversal audit segment de base (114), qui présente une extrémité intérieure (116) connectée audit segment de base (114), et une extrémité extérieure (117) opposée à ladite extrémité intérieure (116), une distance entre lesdits segments inclinés (115) desdits pieds (111) augmentant progressivement desdites extrémités intérieures (116) desdits segments inclinés (115) vers lesdites extrémités extérieures (117) desdits segments inclinés (115).
9. Appareil d'exercice de fitness selon l'une quelconque des revendications 1 à 8, **caractérisé par** deux unités de poids (70) comportant, chacune, un arbre (71) qui est fixé audit siège de base (11), et une pluralité de plaques de poids (72) qui sont emmanchées de manière amovible sur ledit arbre (71).

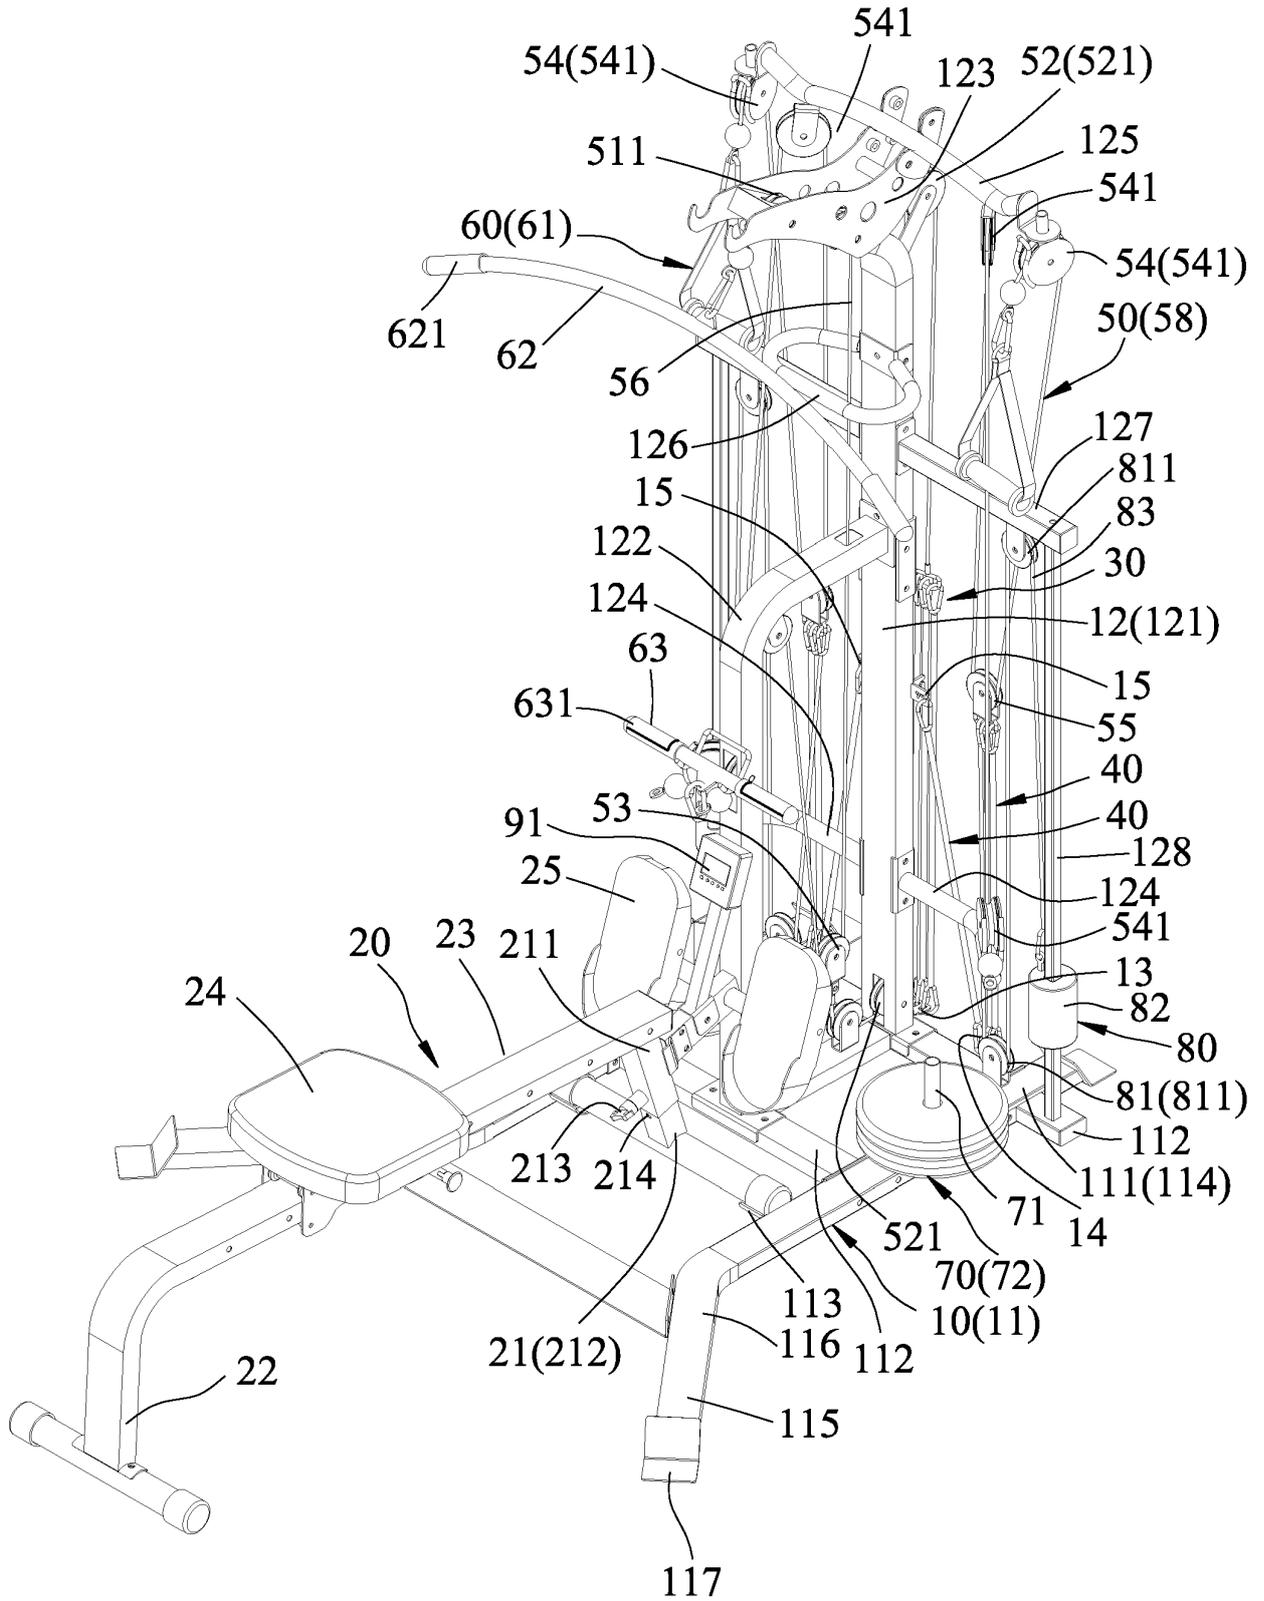


FIG.1

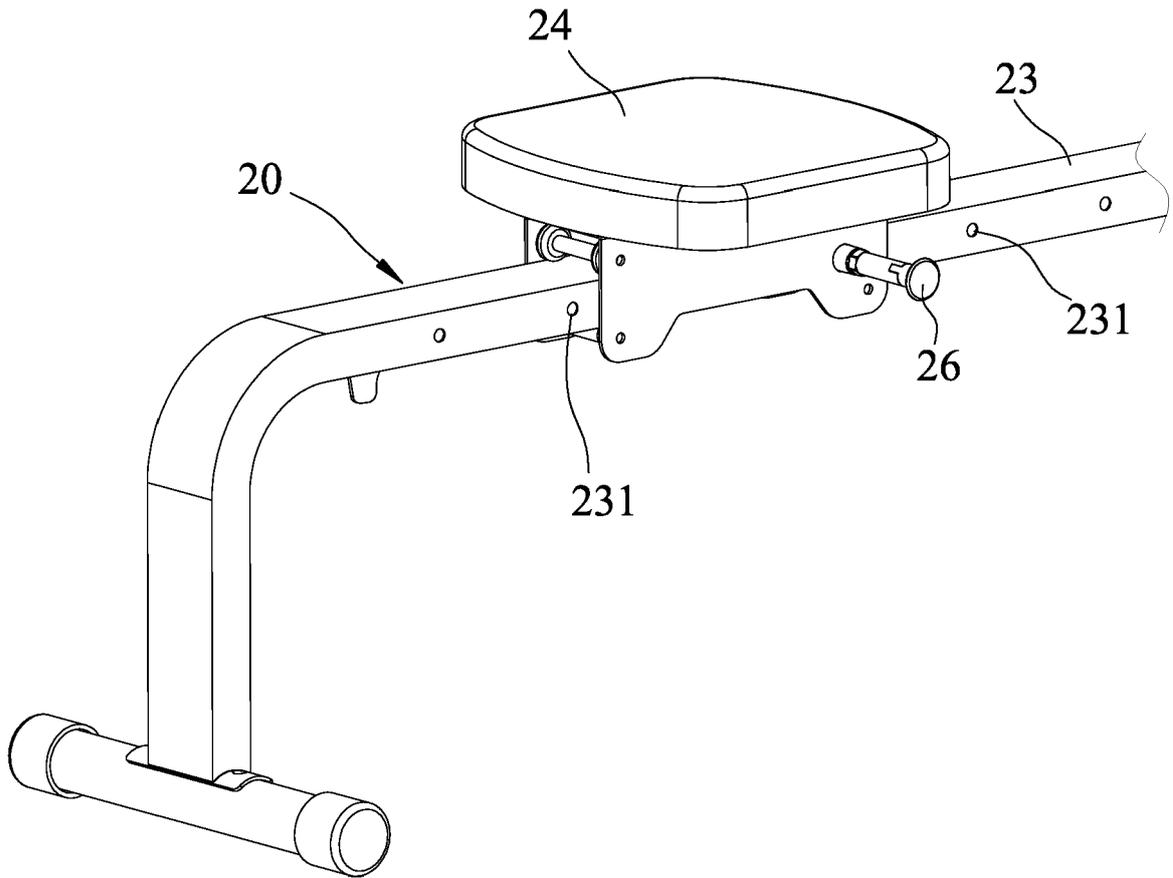


FIG.2

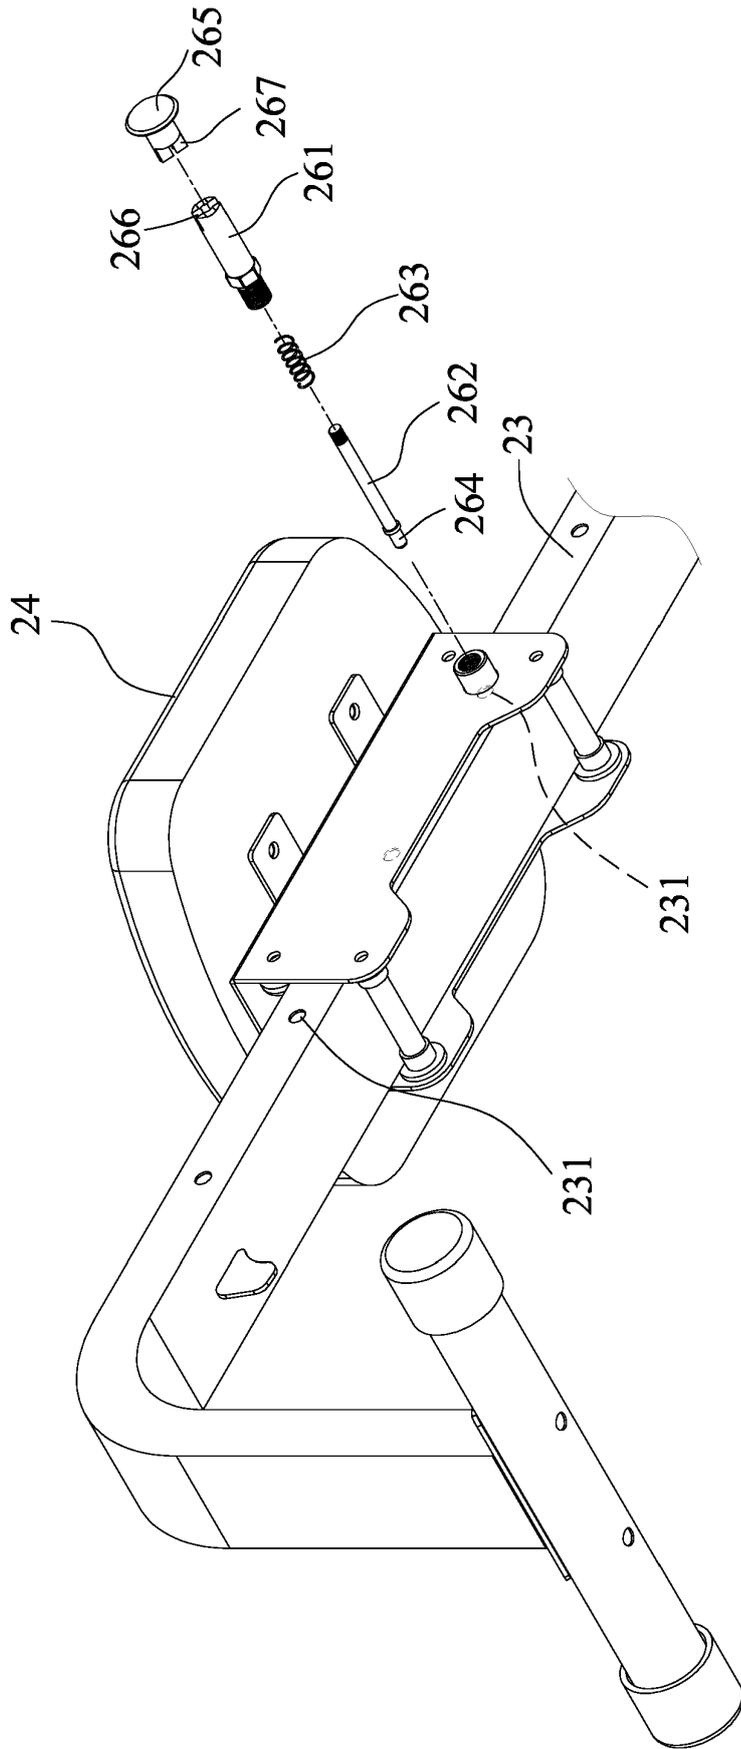


FIG.3

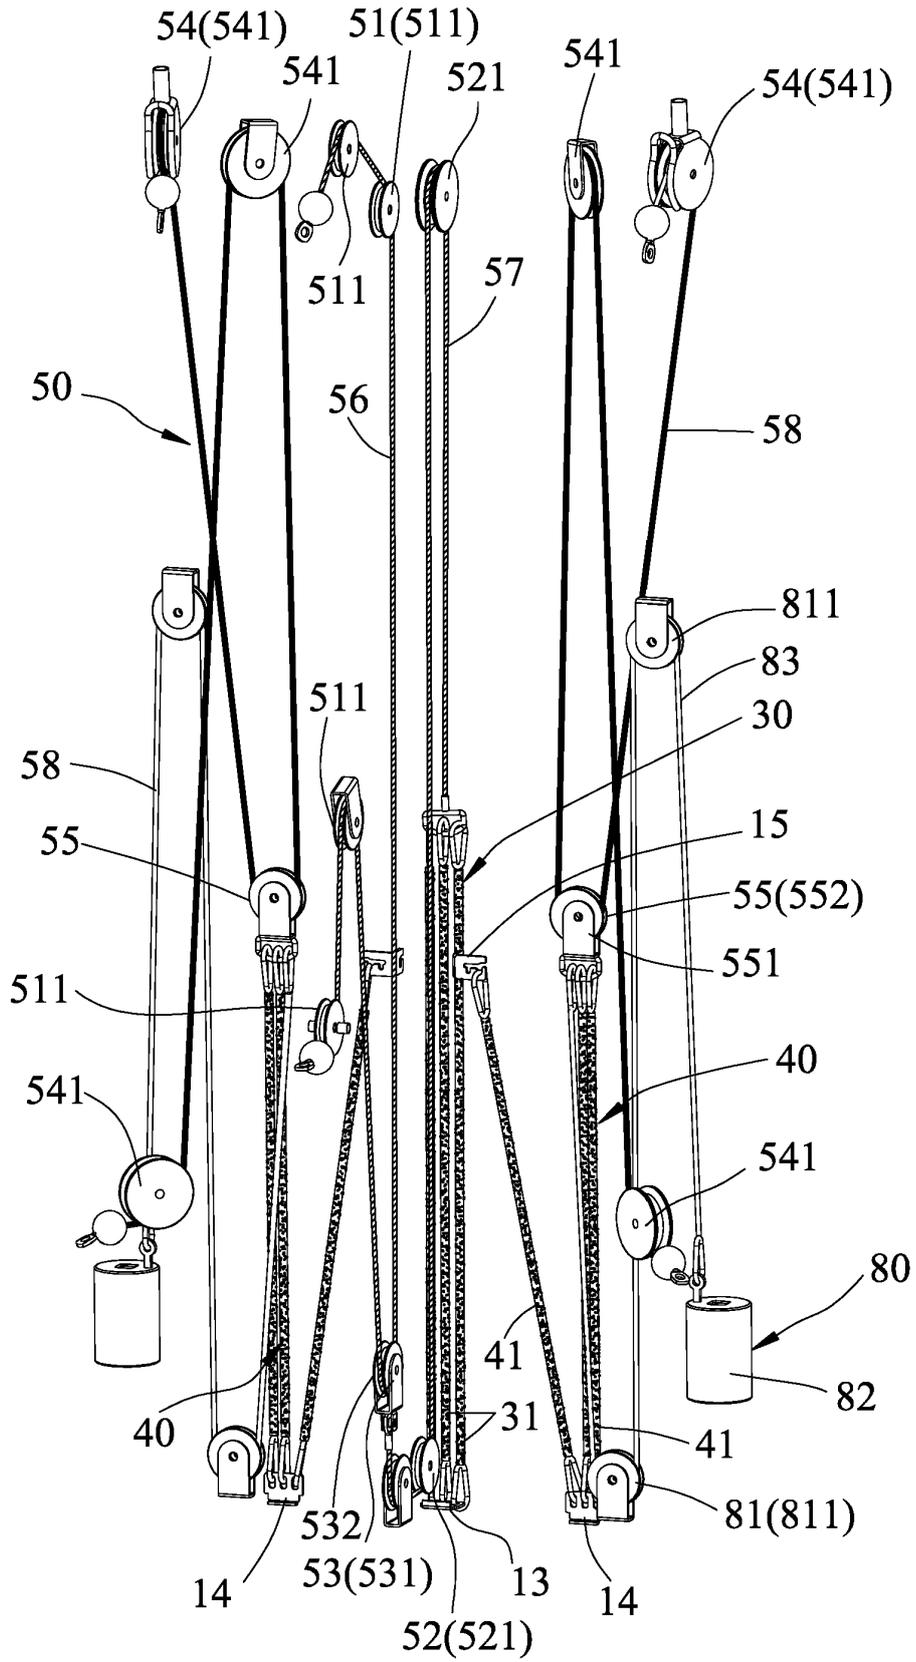


FIG.4

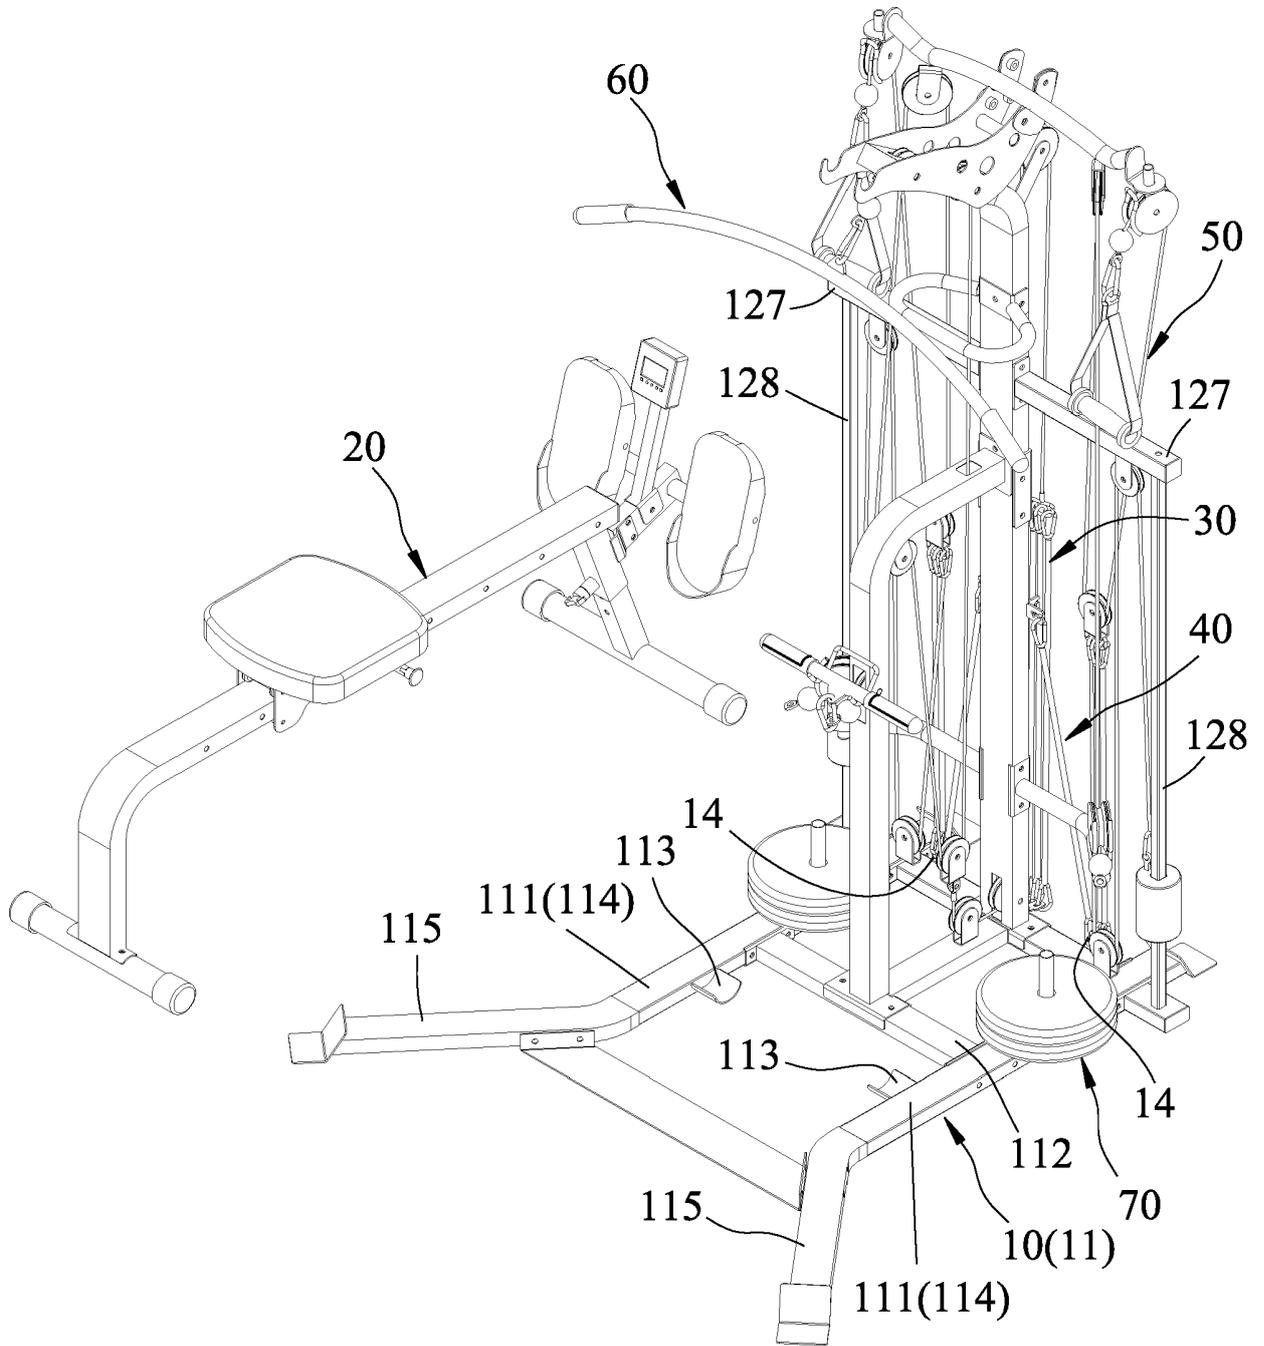


FIG.5

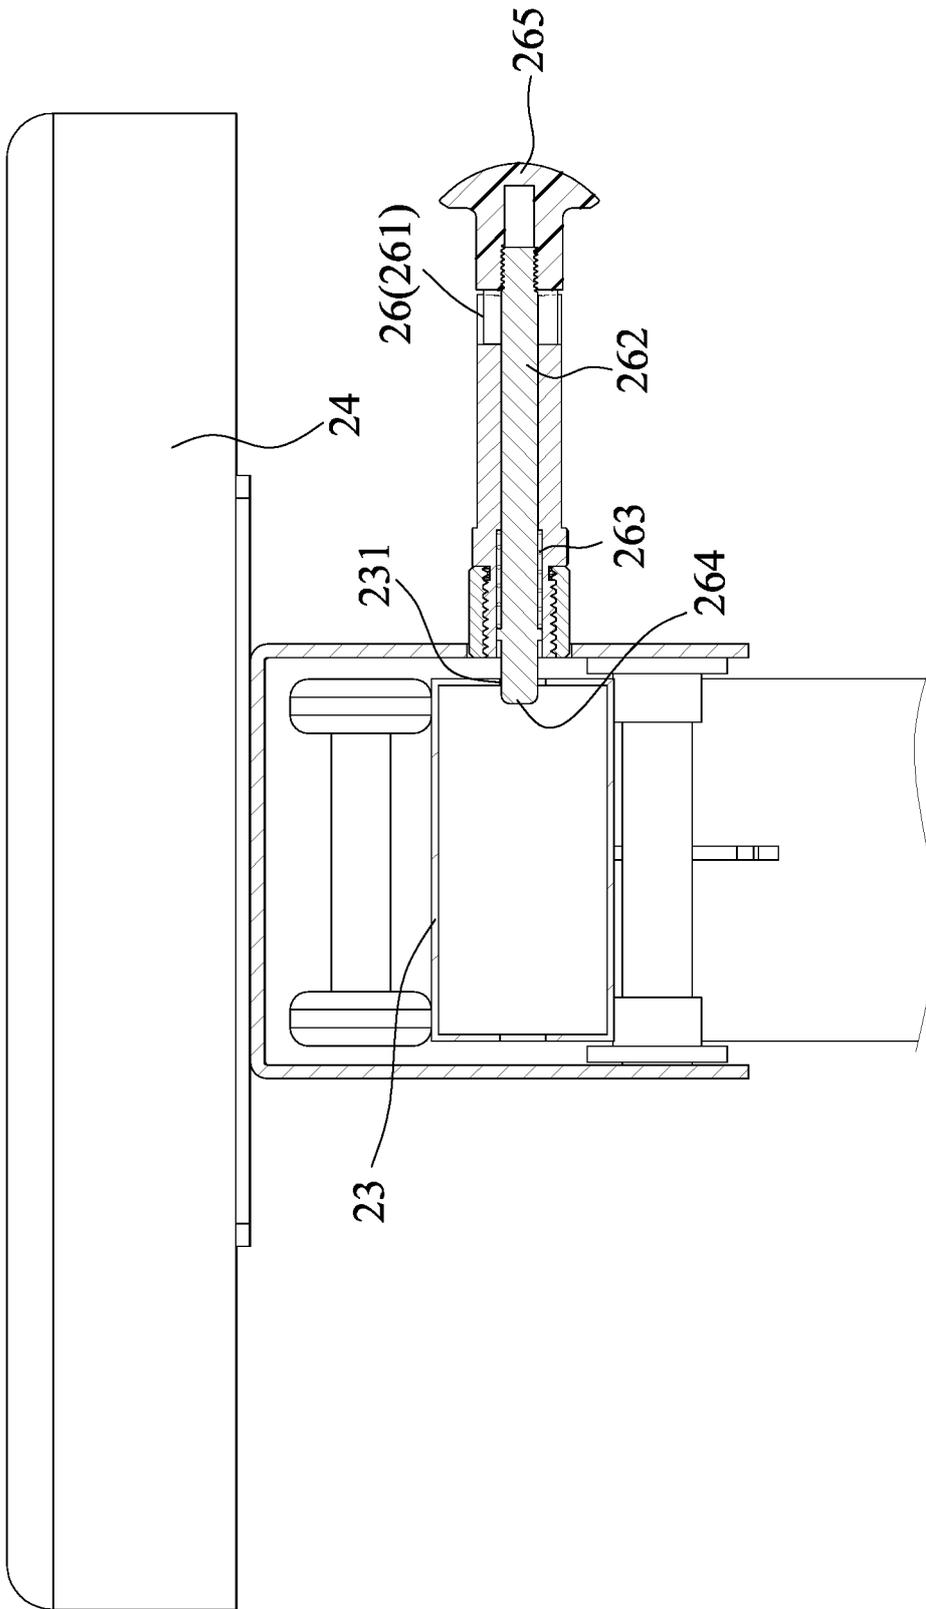


FIG.6

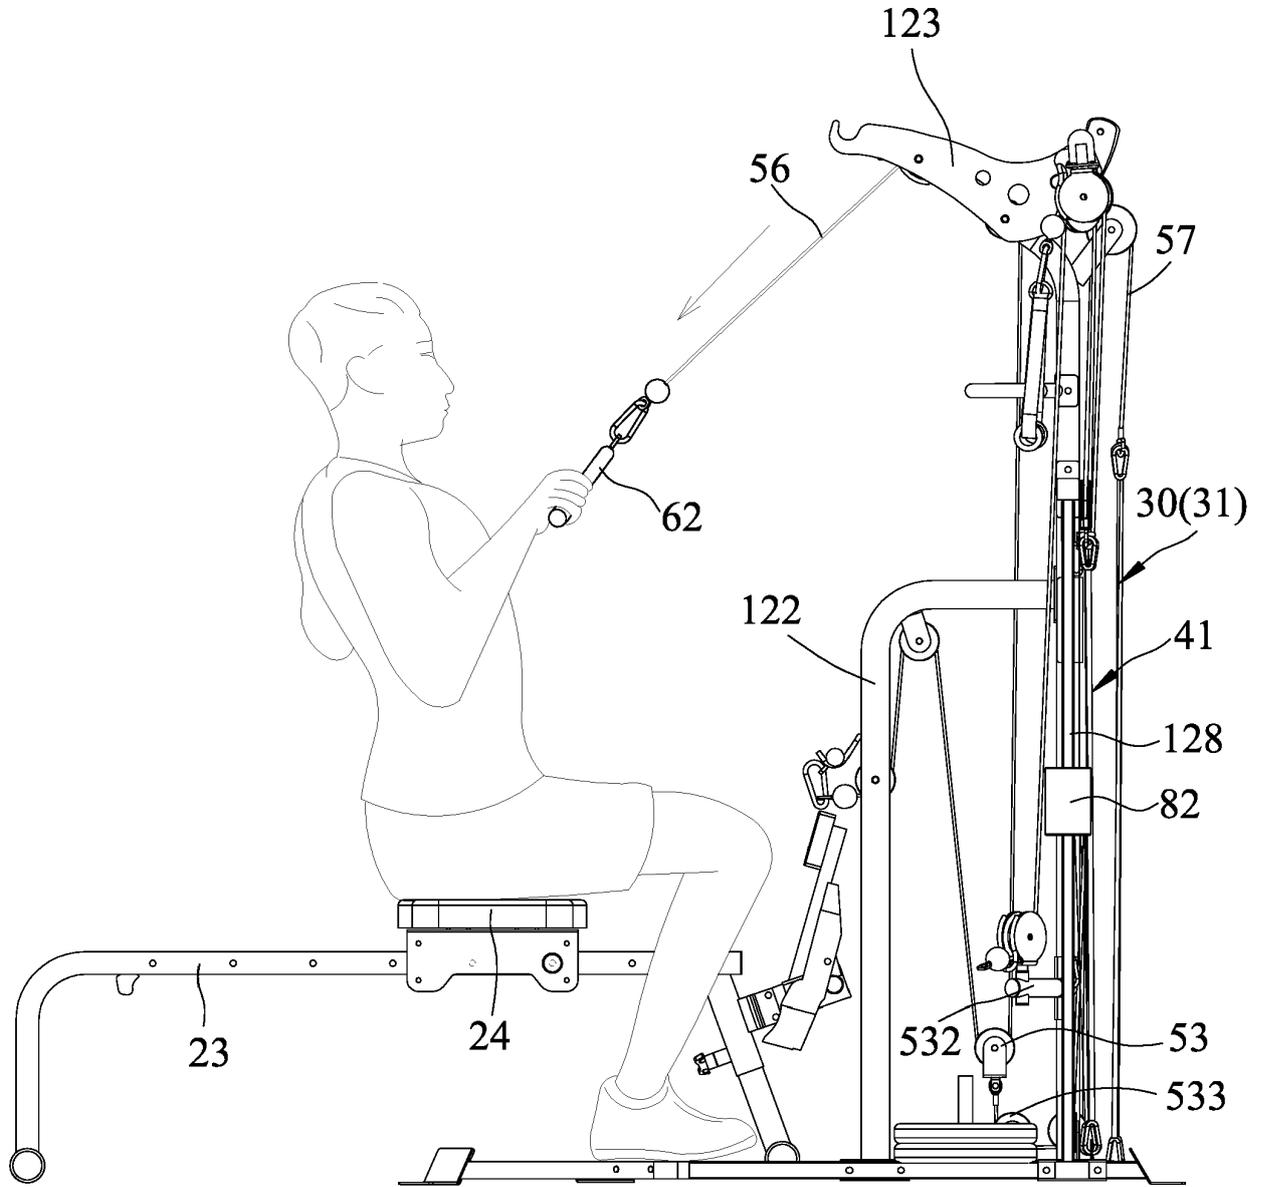


FIG.7

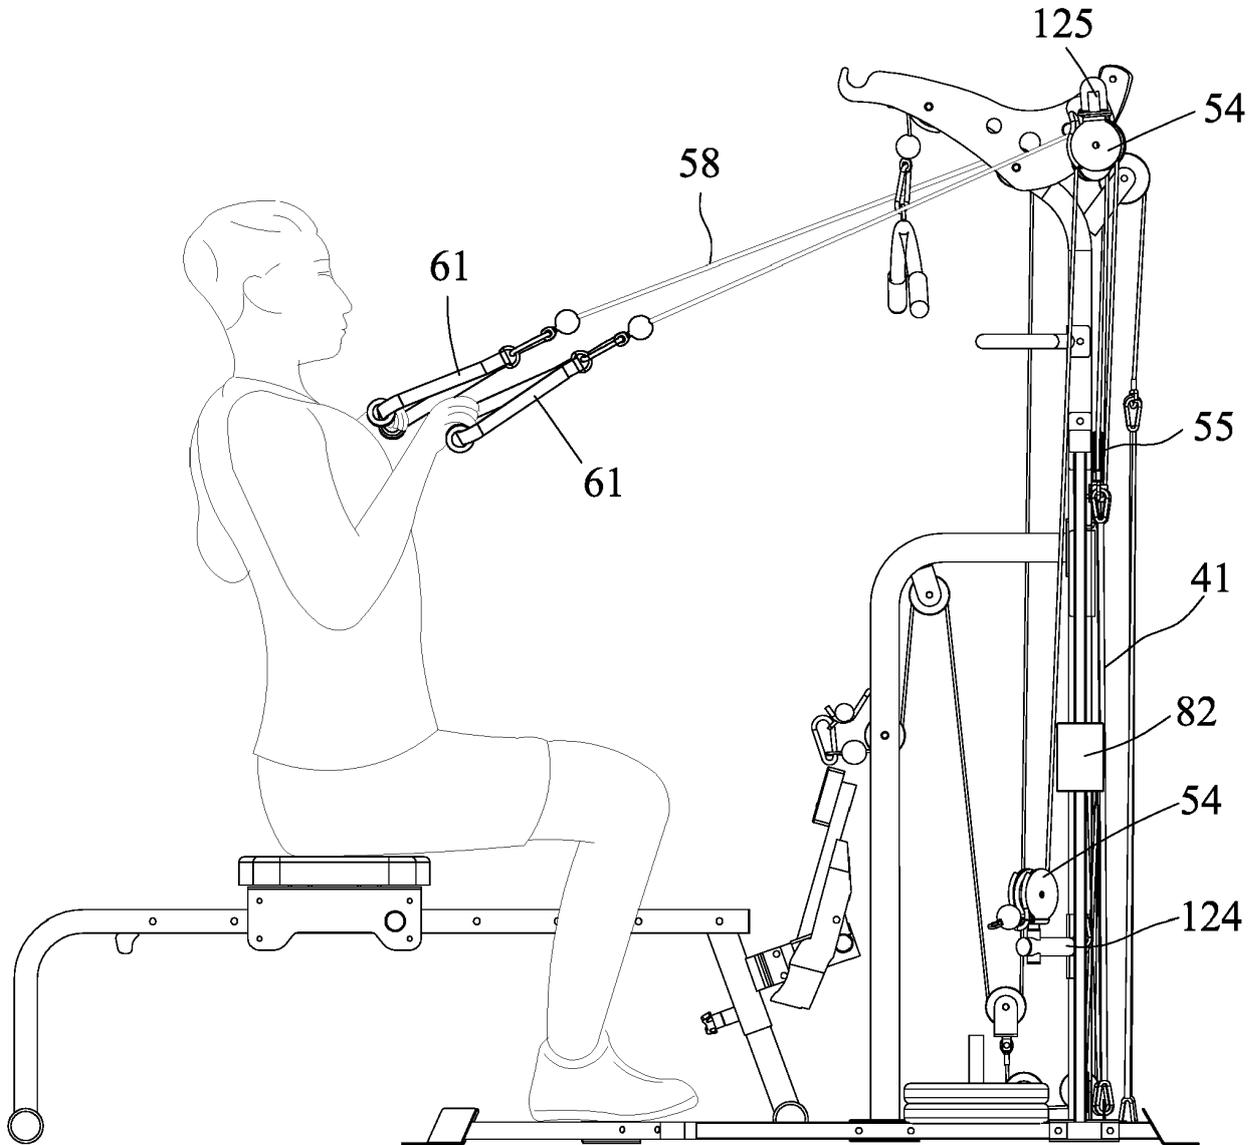


FIG.8

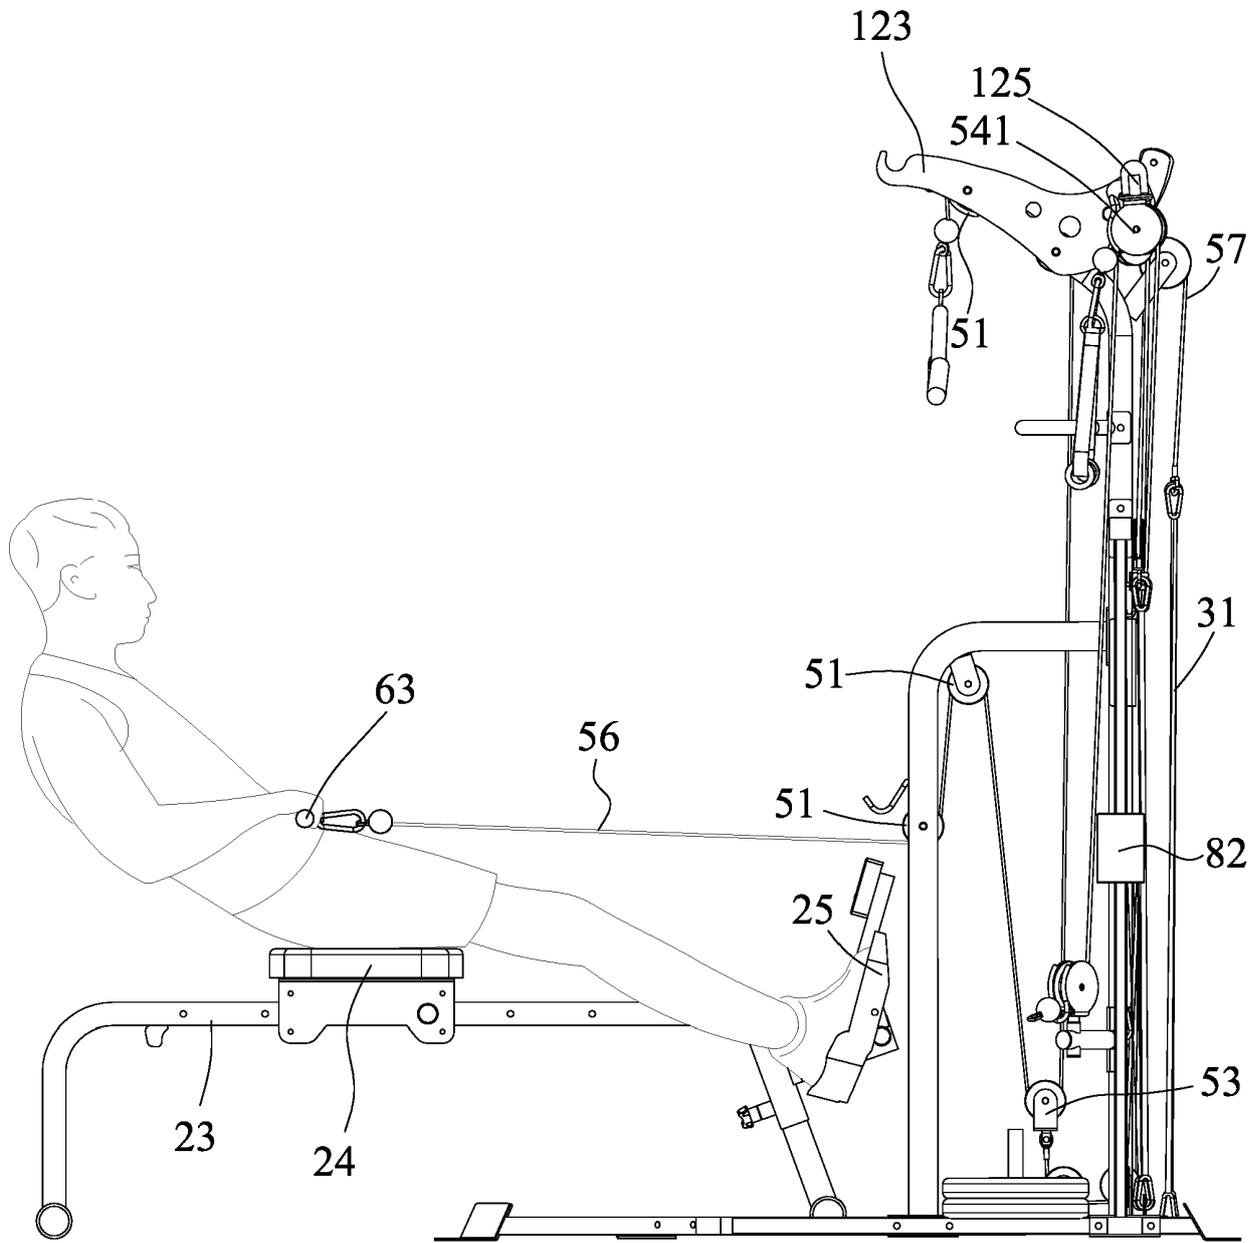


FIG.9

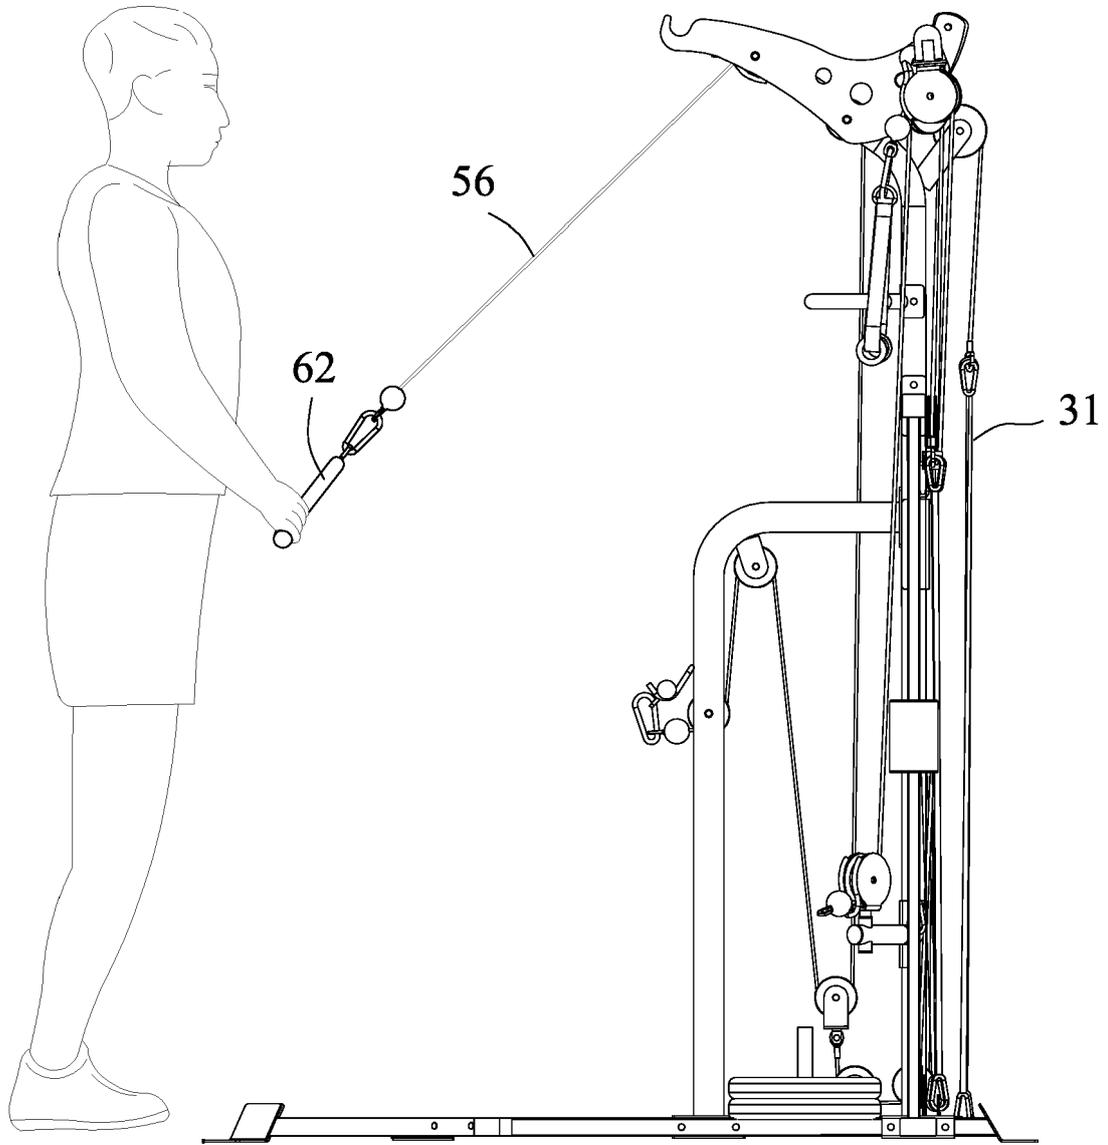


FIG.10

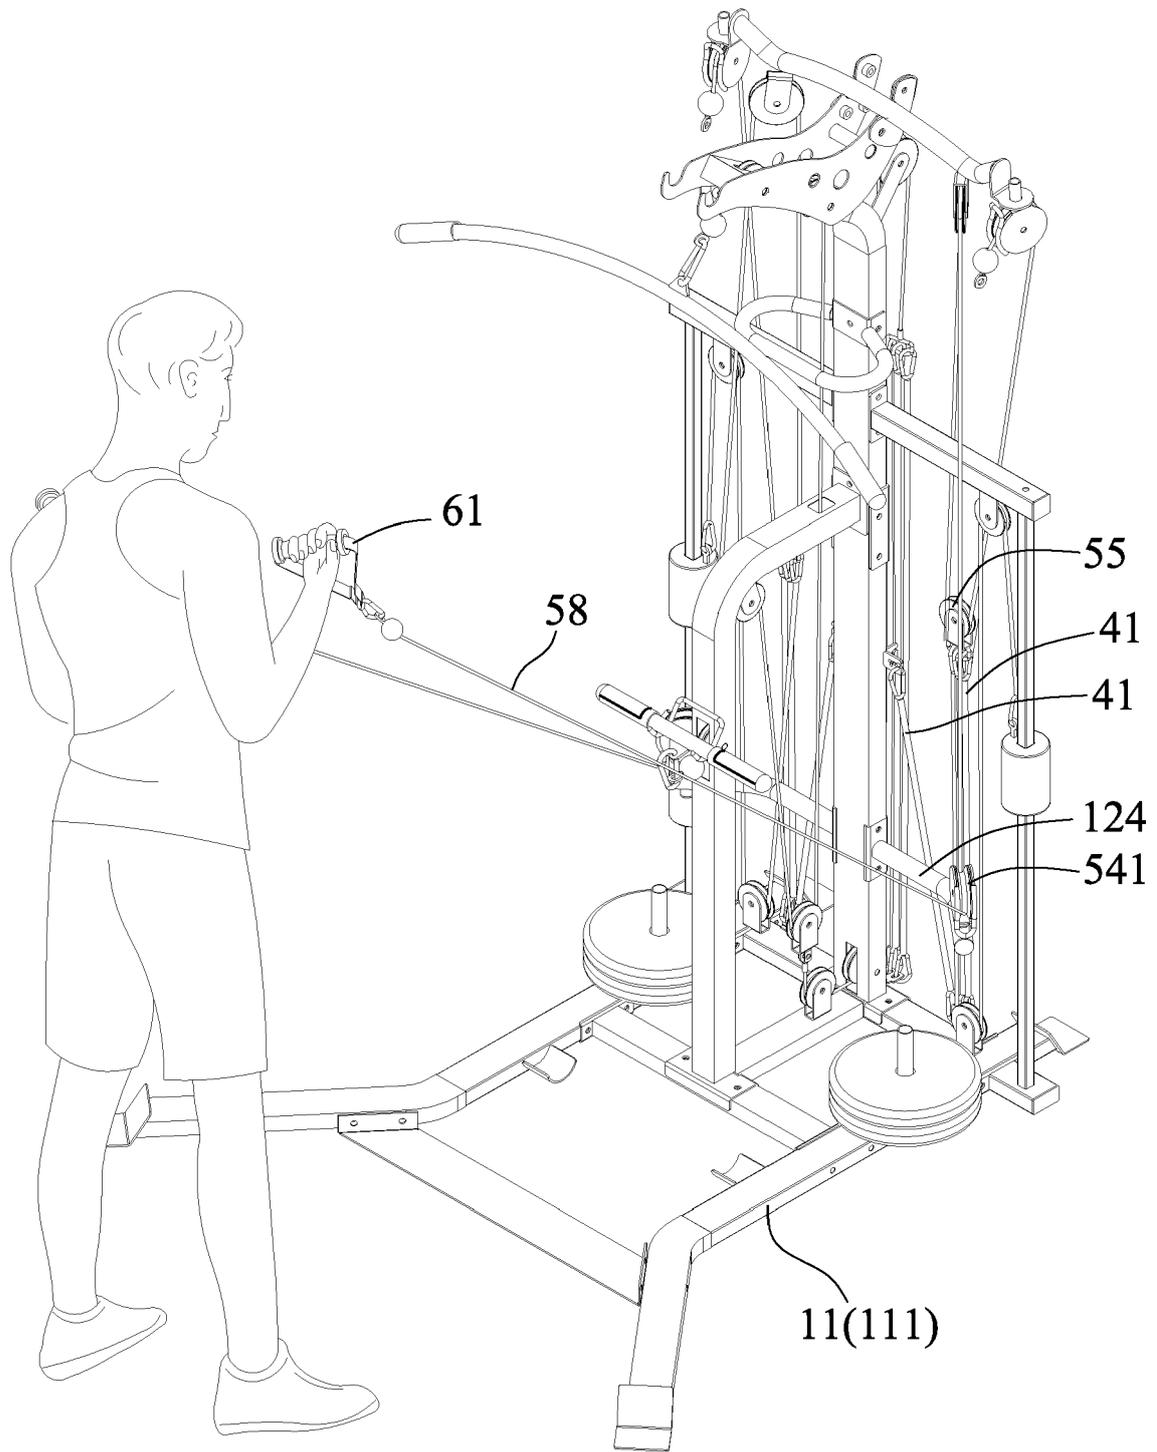


FIG.11

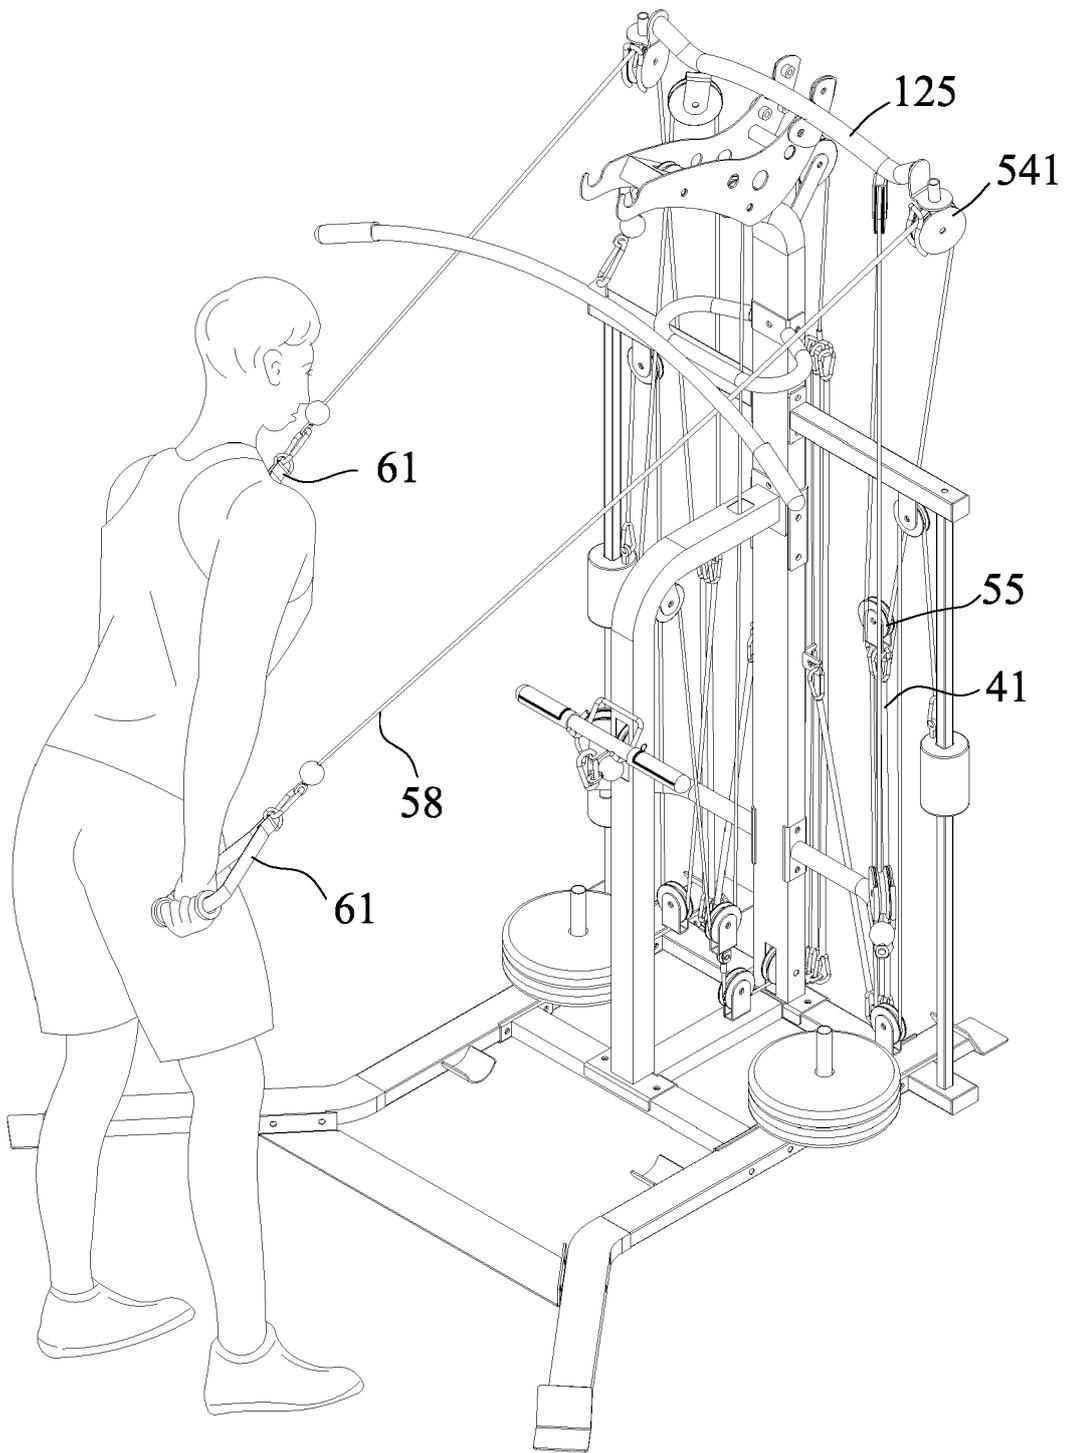


FIG.12

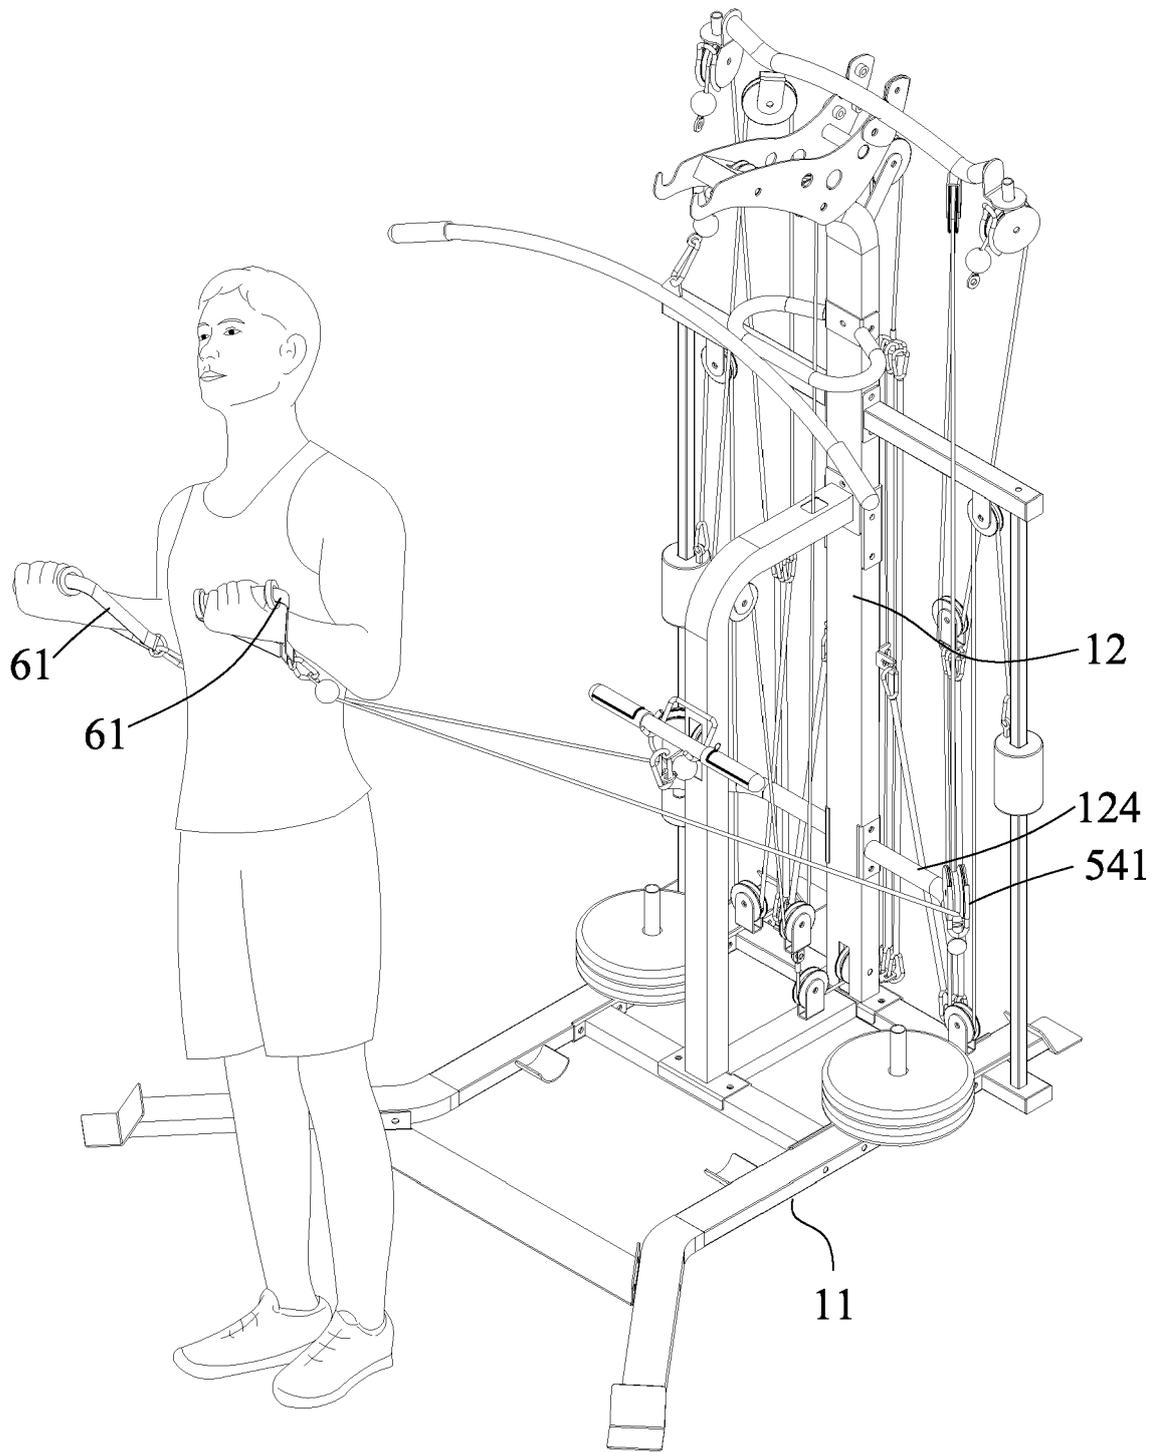


FIG.13

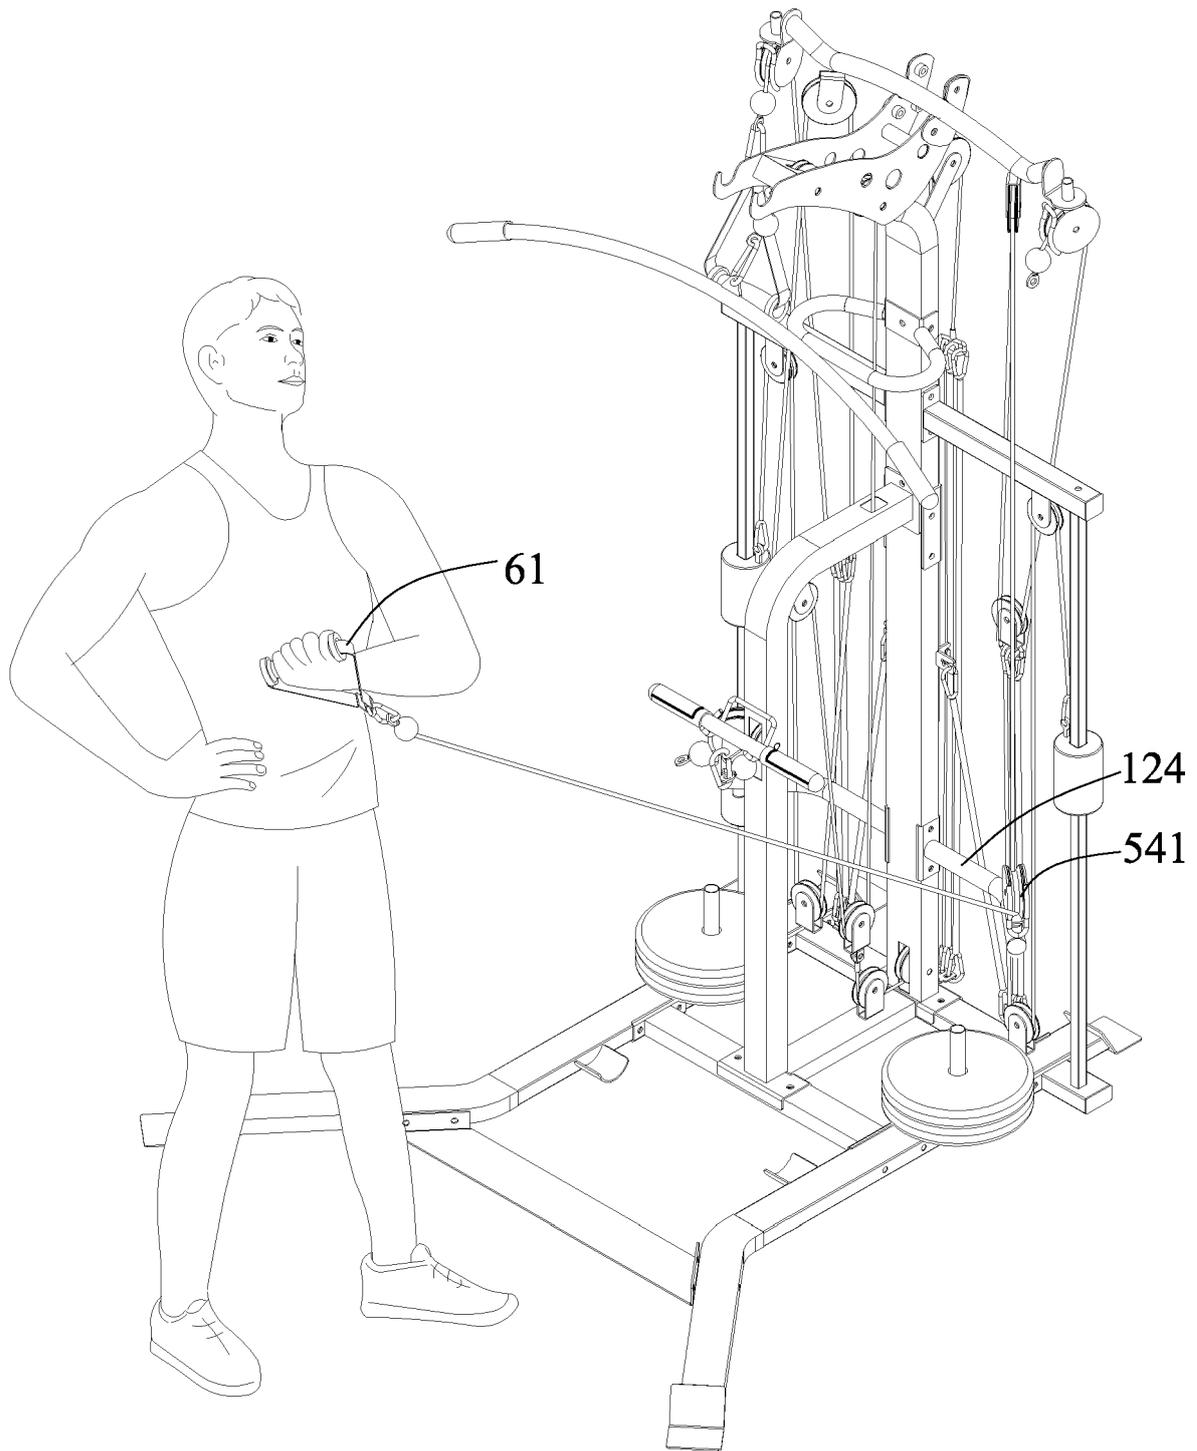


FIG.14

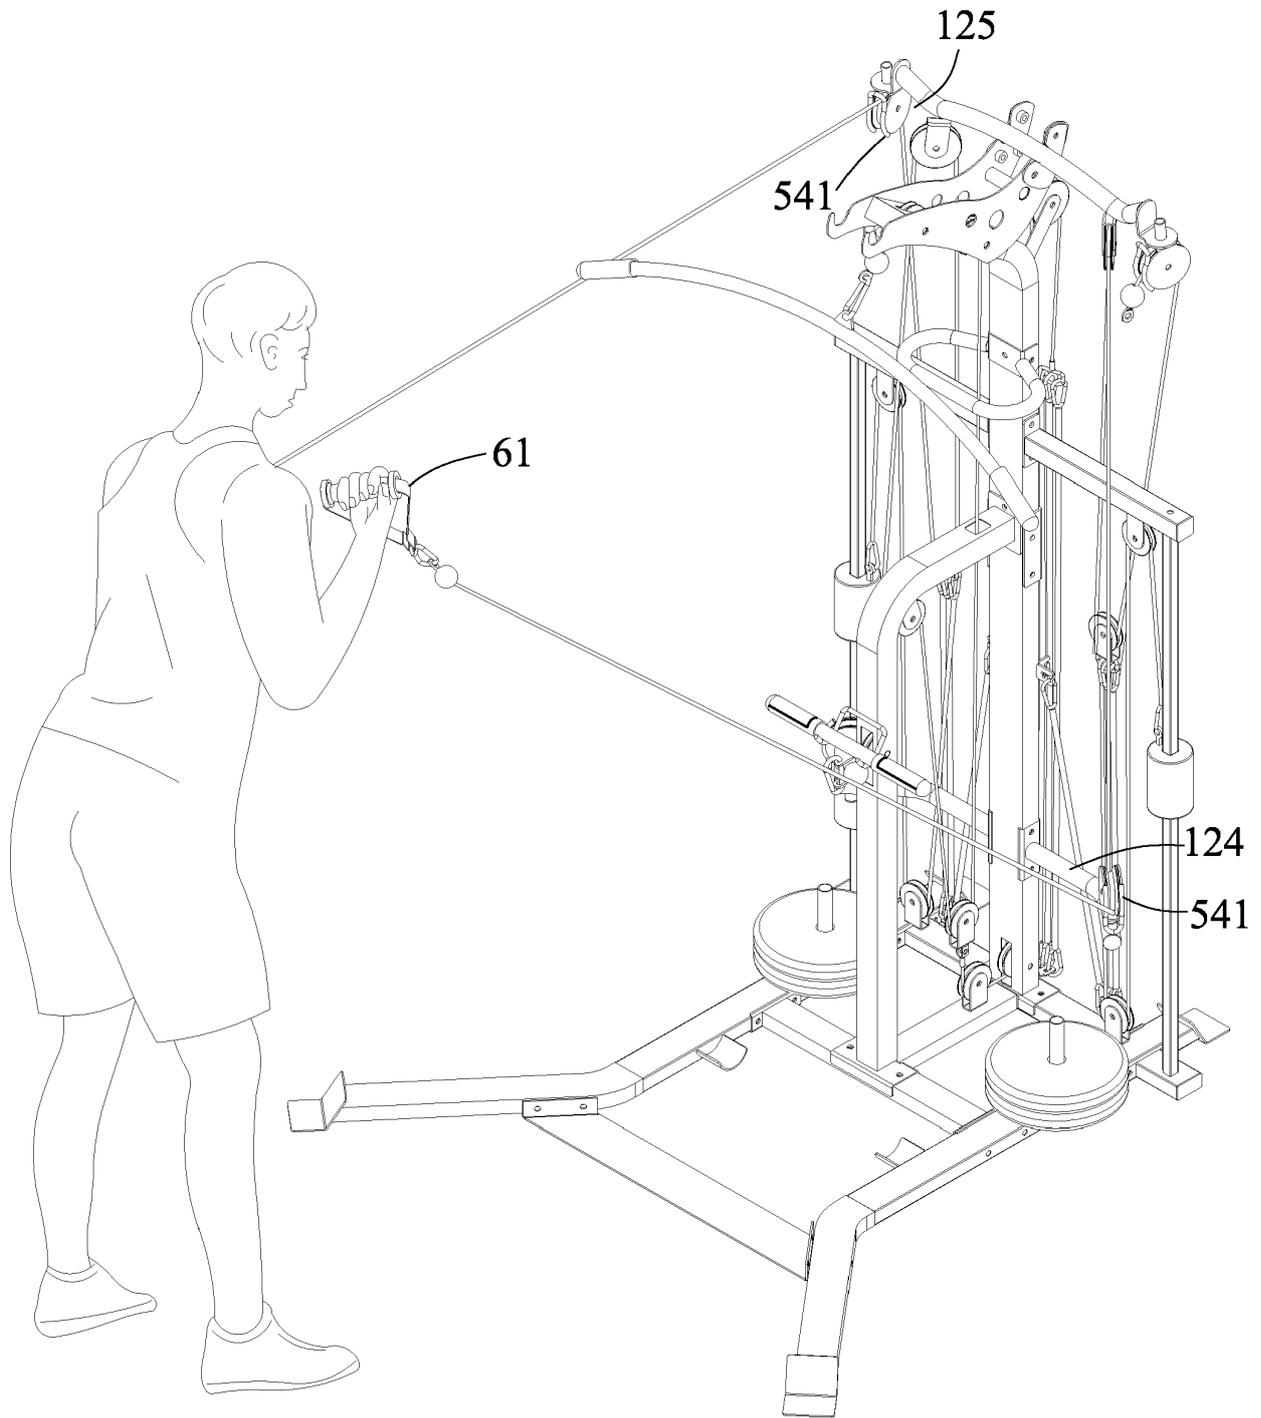


FIG.15

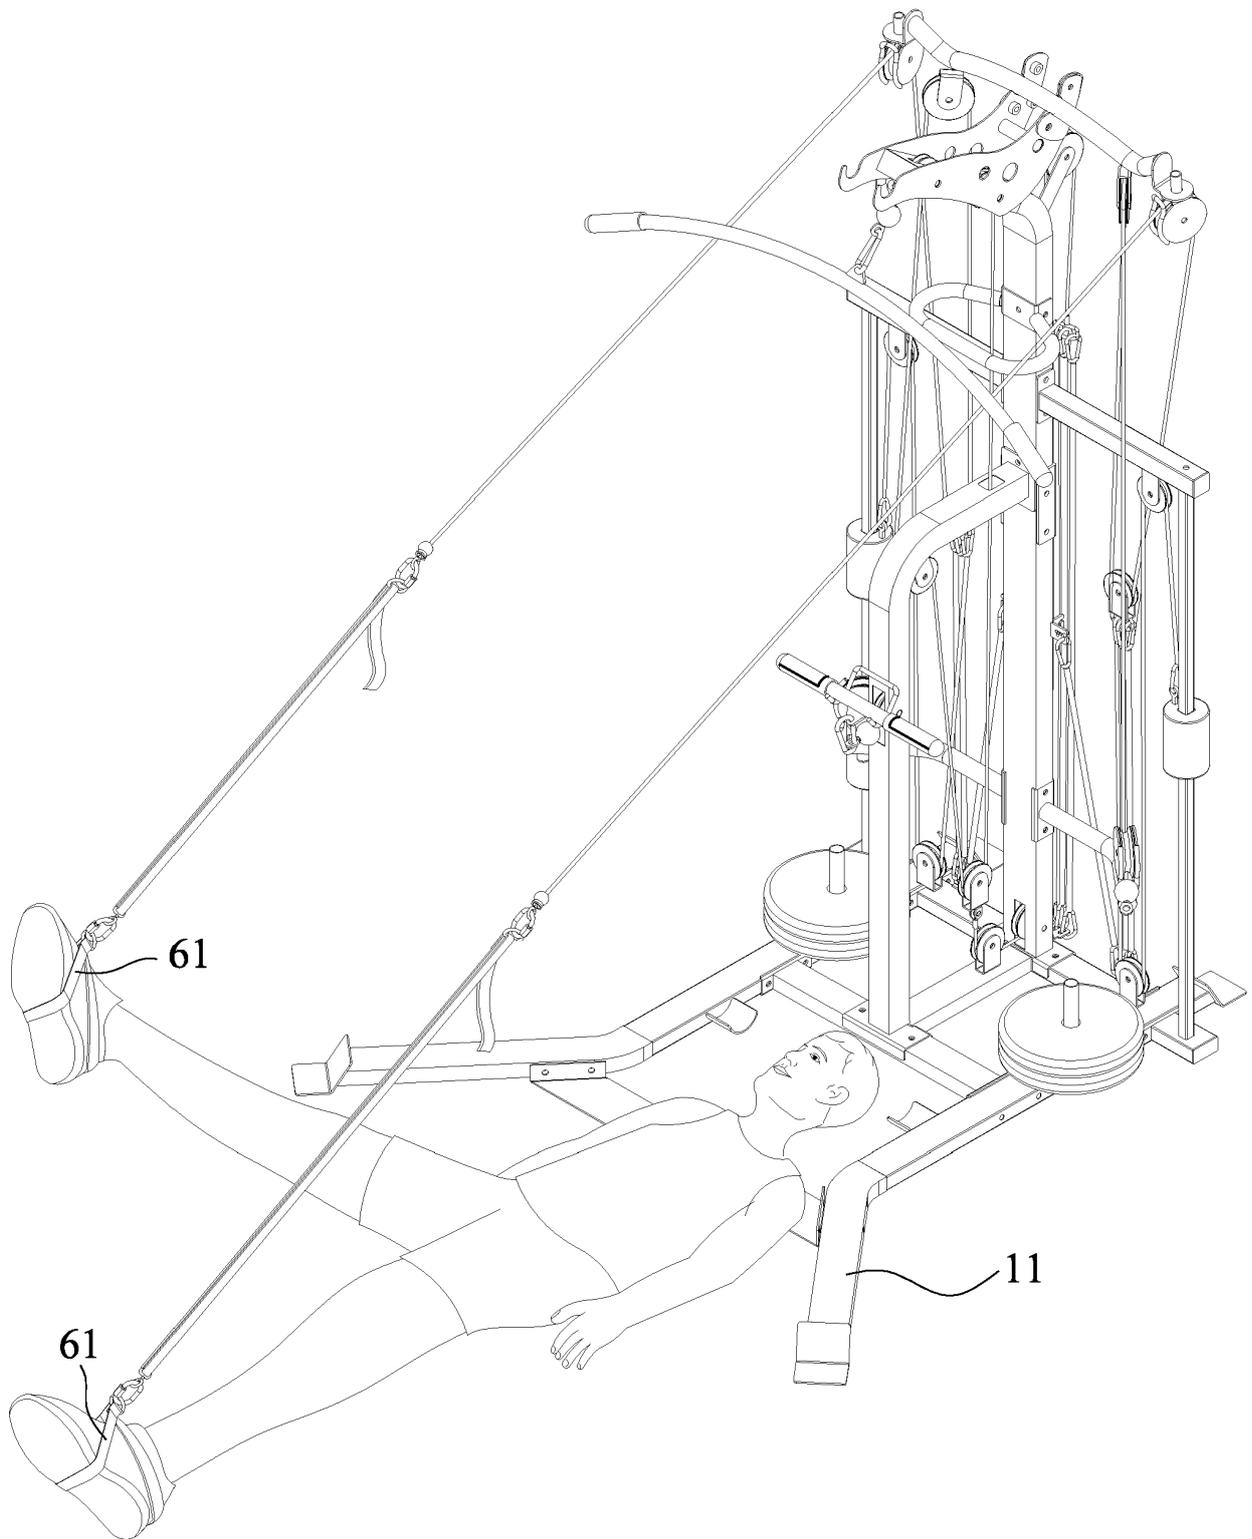


FIG.16

Three types of exercises performed at weight block 10lb with different elastic member combinations

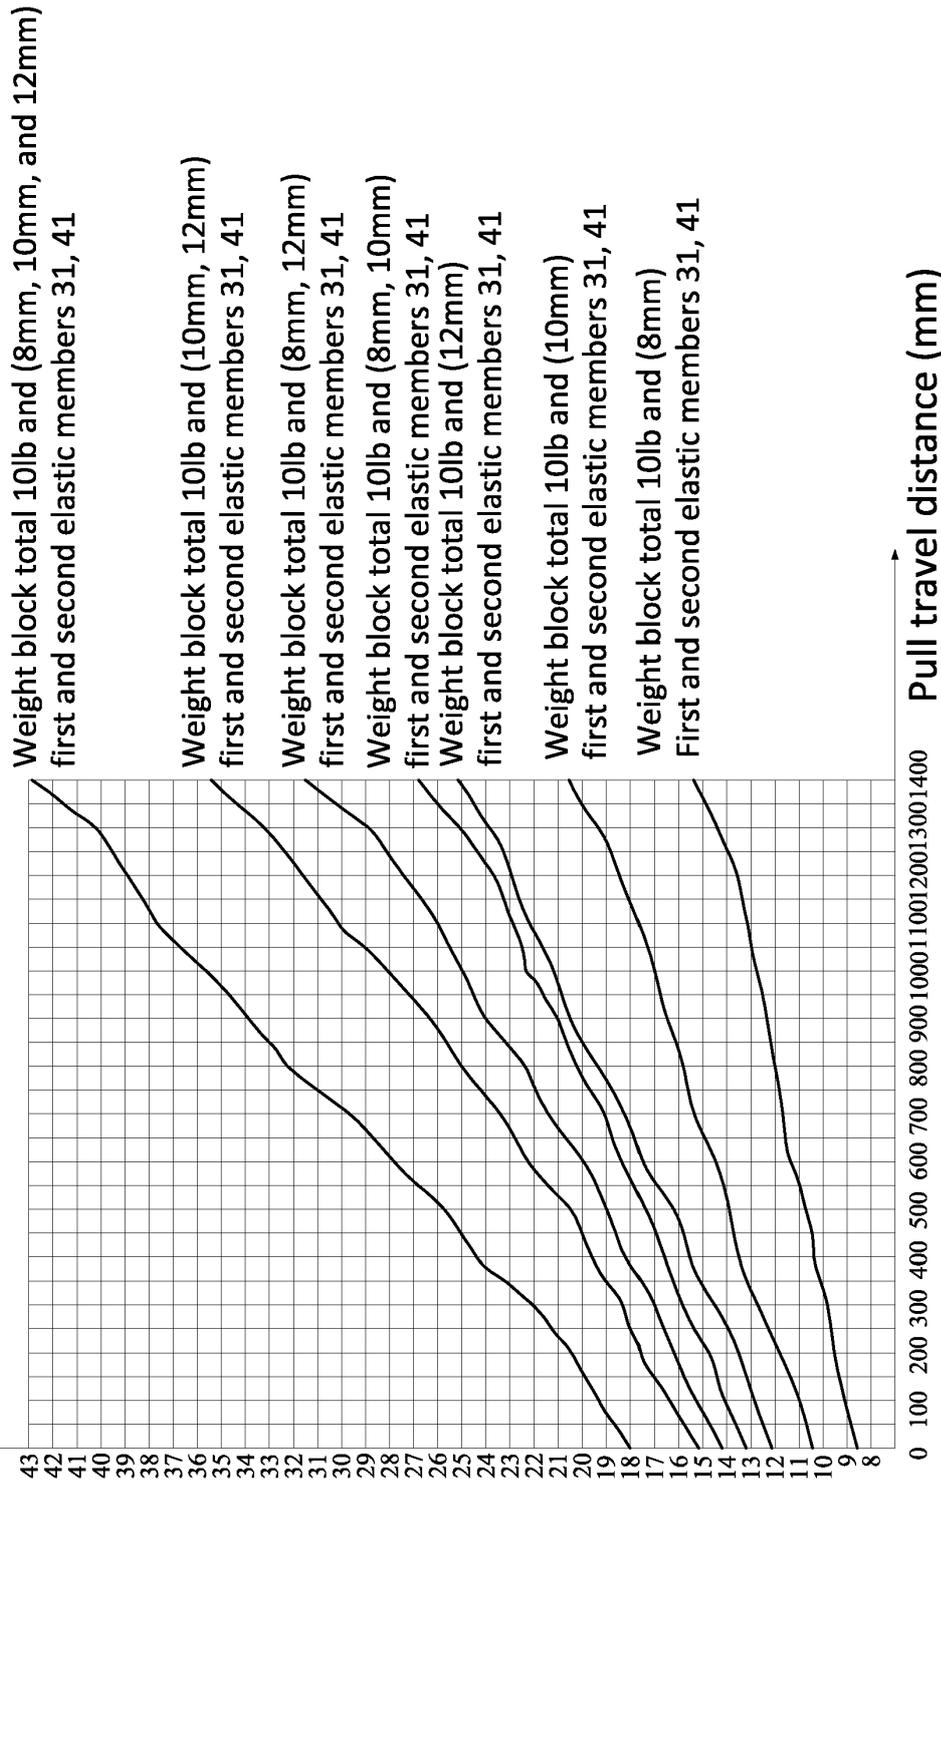


FIG.17

Three types of exercises performed at weight block 20lb with different elastic member combinations

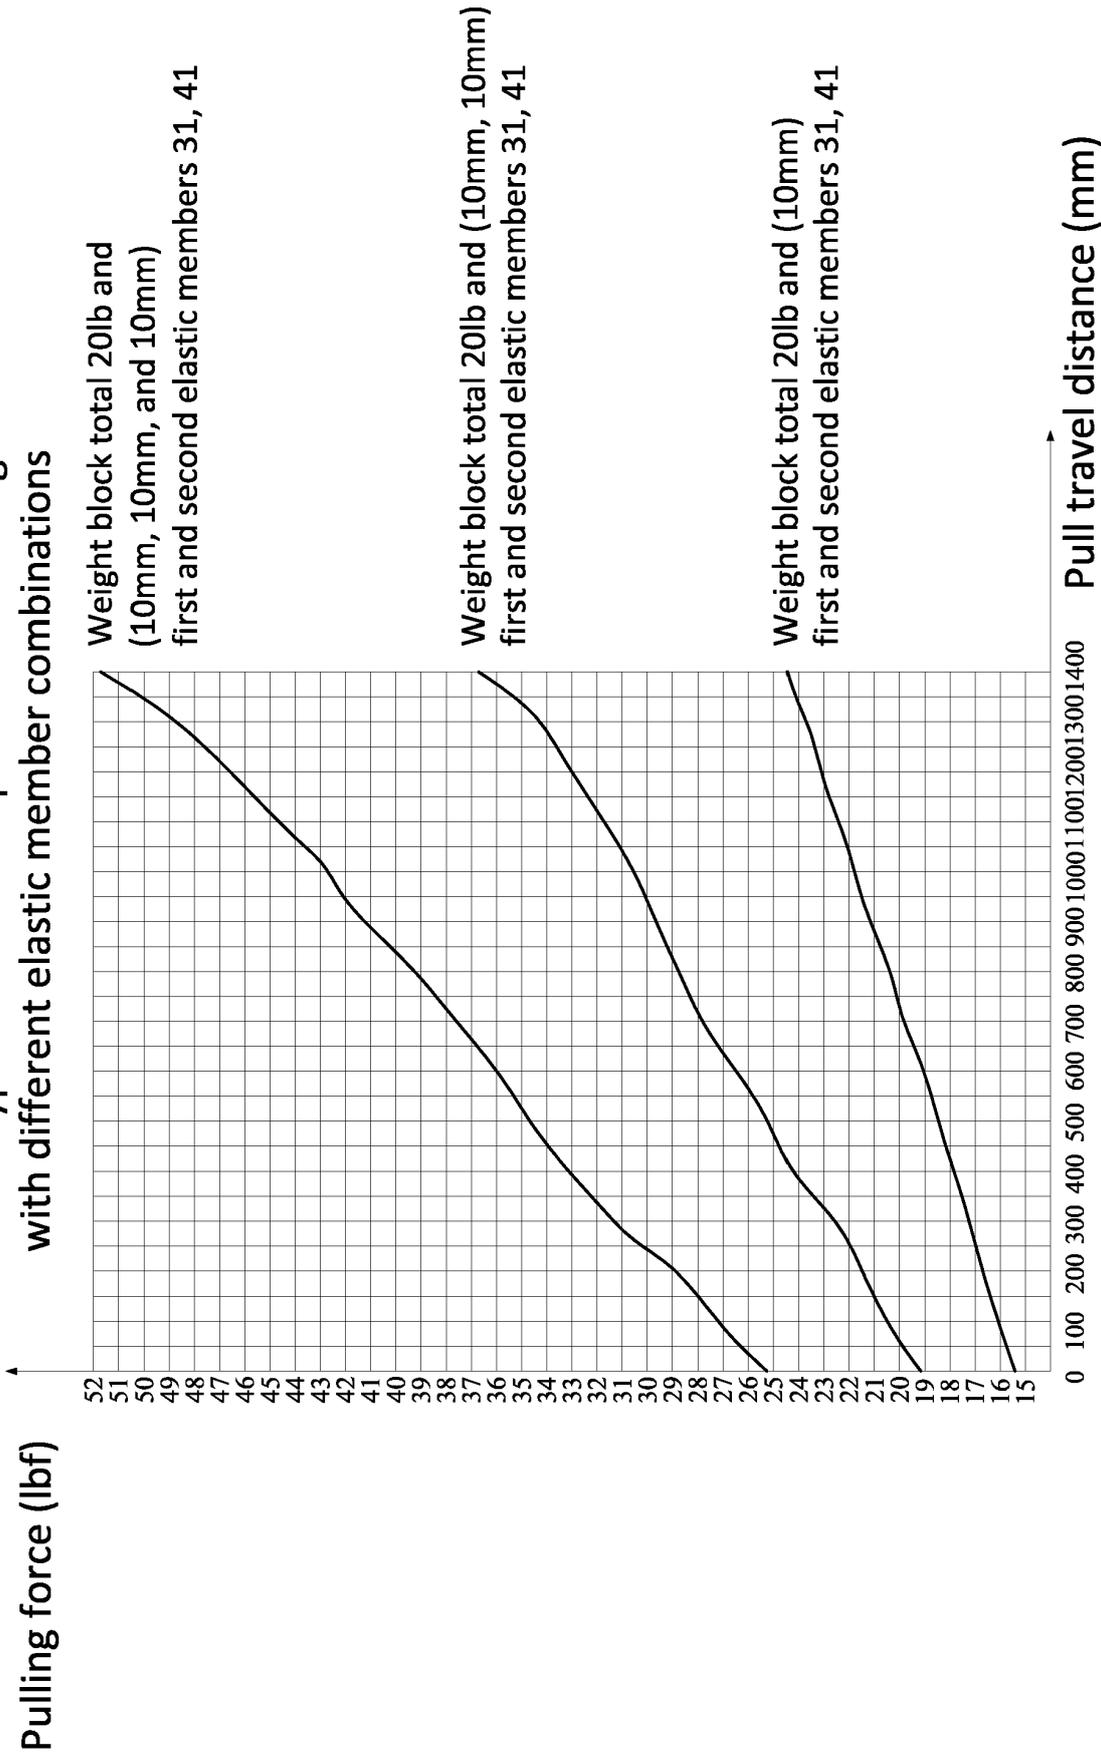


FIG.18

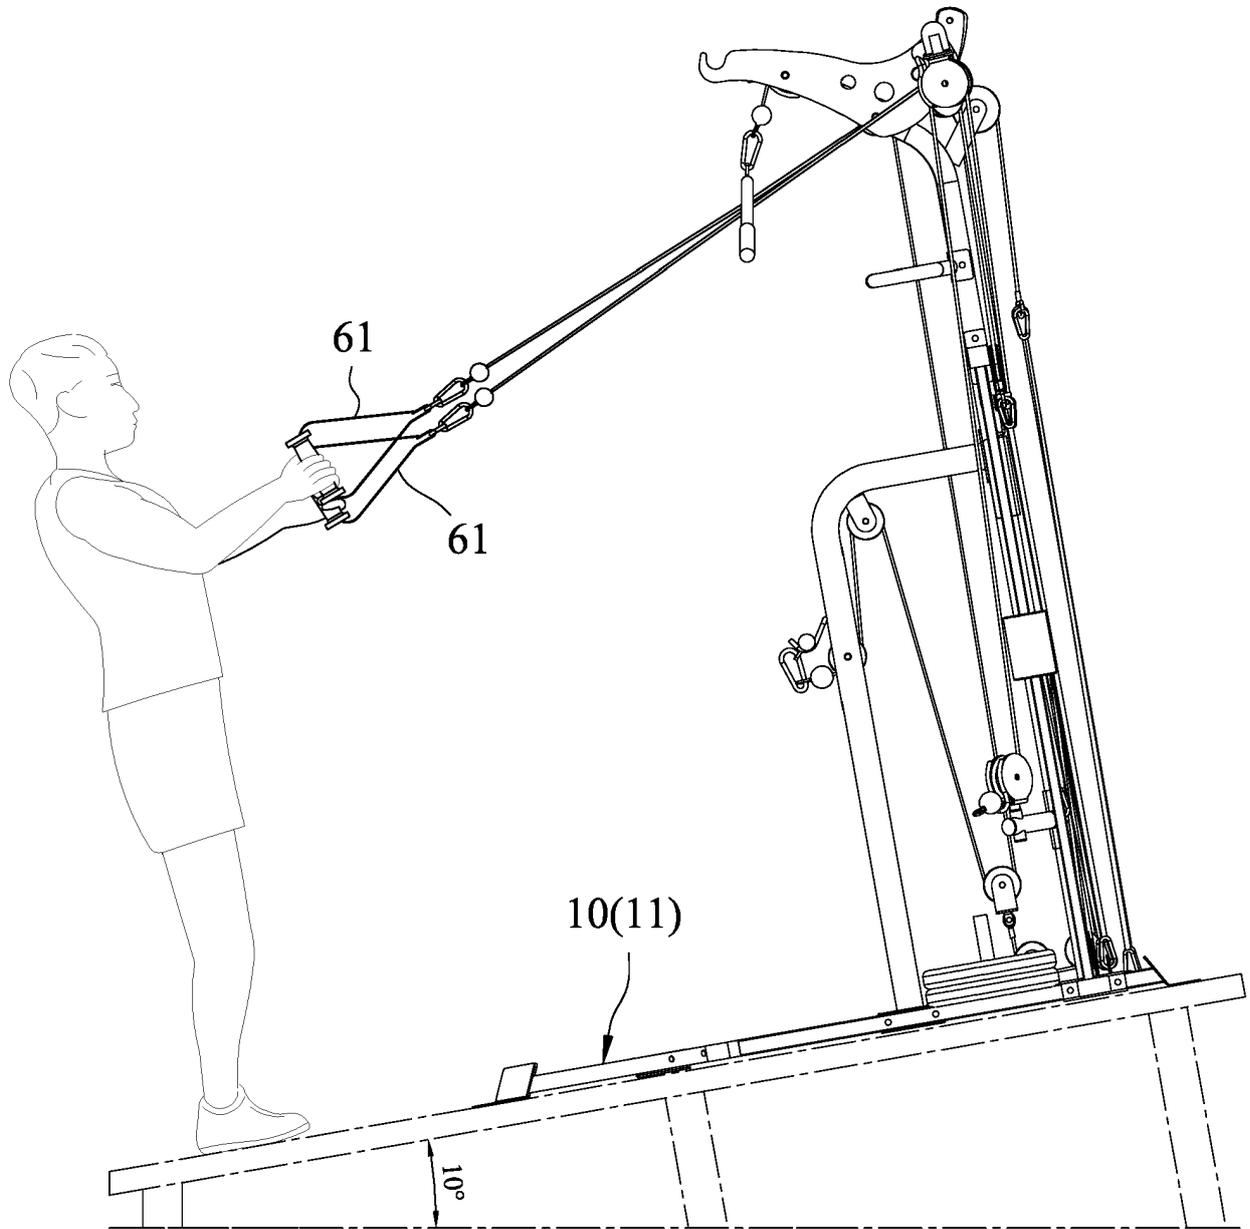


FIG.19

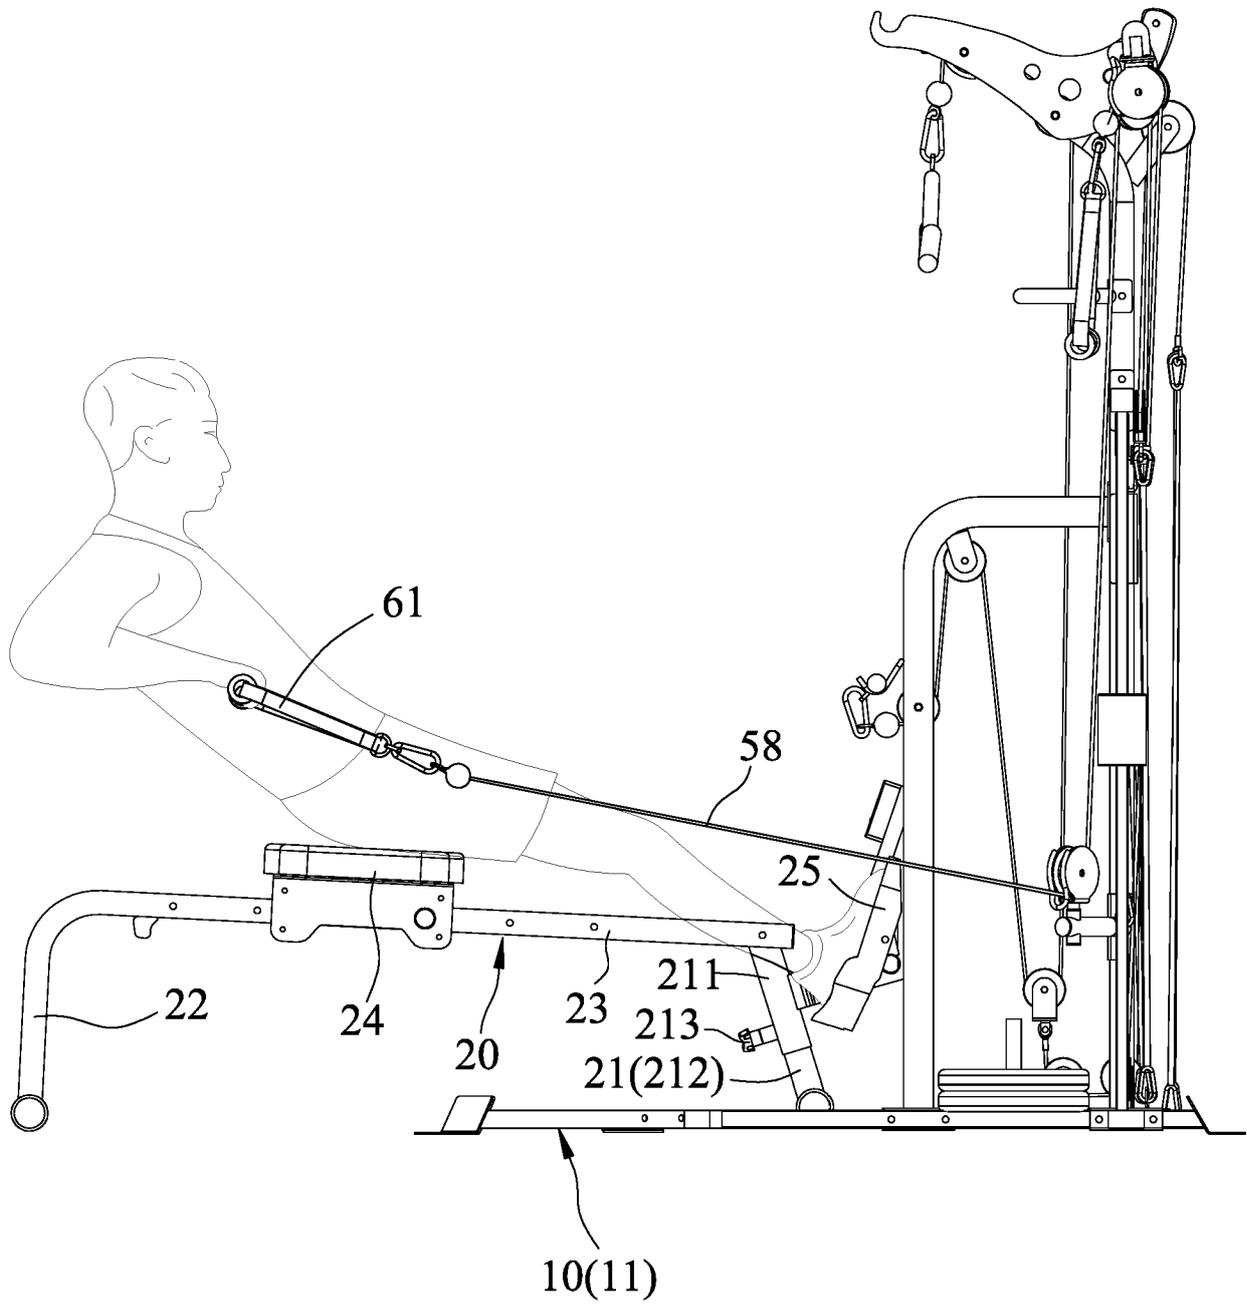


FIG.20

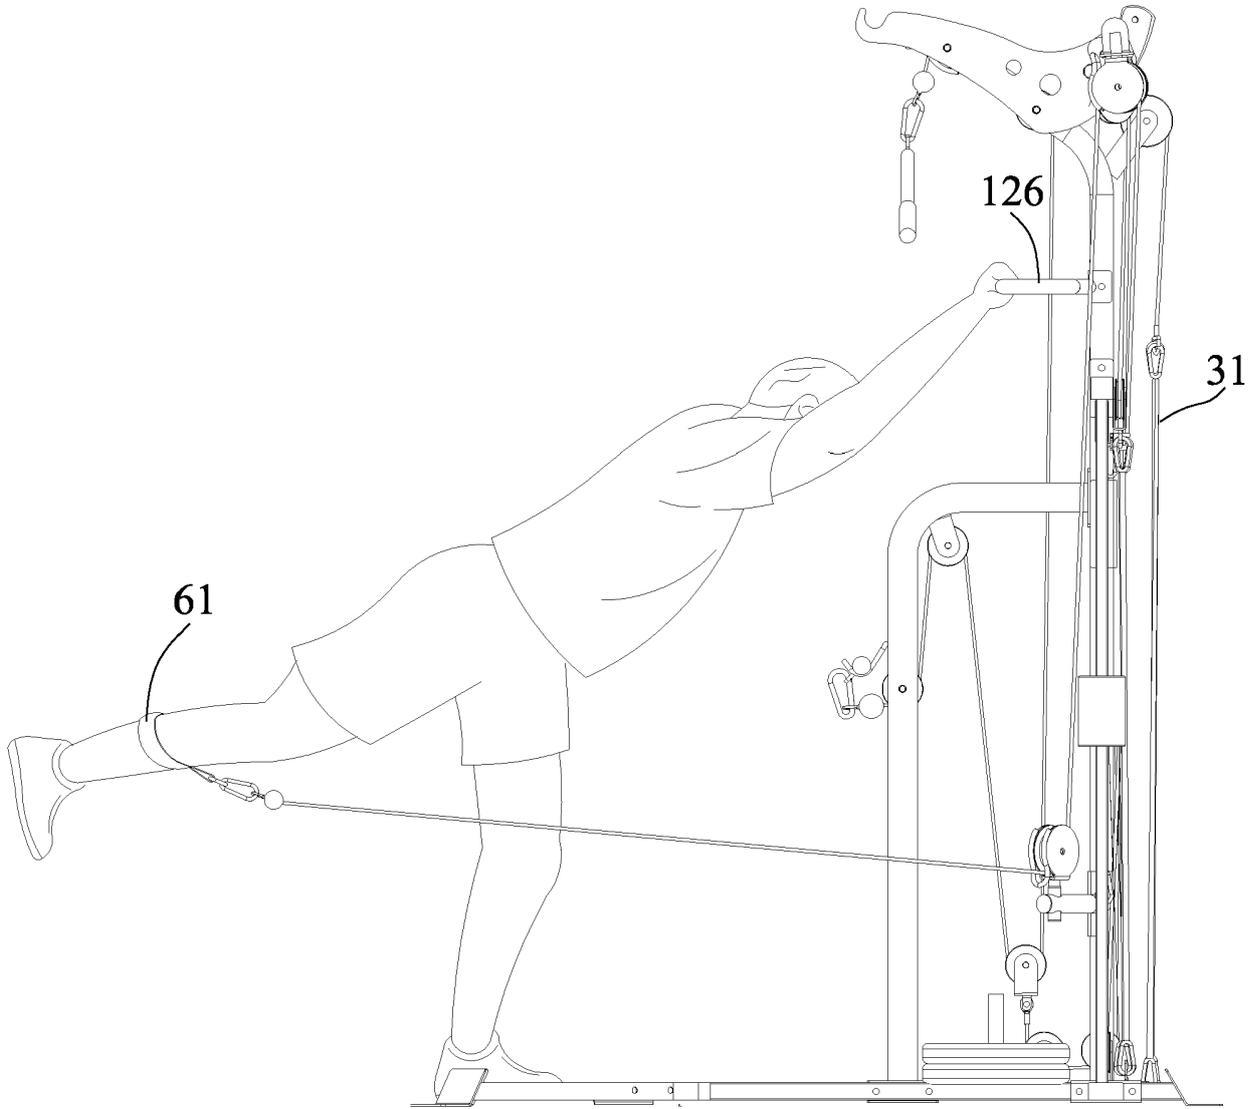


FIG.21

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20020077229 A1 [0002]