

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
26 August 2004 (26.08.2004)

PCT

(10) International Publication Number  
WO 2004/072373 A1

- (51) International Patent Classification<sup>7</sup>: D21F 11/04, 11/14, 11/00
- (21) International Application Number: PCT/US2004/003337
- (22) International Filing Date: 4 February 2004 (04.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10/360,038 6 February 2003 (06.02.2003) US  
10/360,021 6 February 2003 (06.02.2003) US  
10/740,059 18 December 2003 (18.12.2003) US  
10/740,060 18 December 2003 (18.12.2003) US
- (71) Applicant (for all designated States except US): THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): LORENZ, Timothy, Jude [US/US]; 5846 Valleyway Court, Cincinnati, OH 45247 (US). POLAT, Osman [US/US]; 8741 Tiburon Drive, Montgomery, OH 45249 (US). TROKHAN, Paul, Dennis [US/US]; 1356 Warvel Road, Hamilton, OH 45013 (US). PHAN, Dean, Van [US/US]; 6612 Tyler's Crossing, West Chester, OH 45069 (US).
- (74) Common Representative: THE PROCTER & GAMBLE COMPANY; T. David Reed, 6110 Center Hill Road, Cincinnati, OH 45224 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS FOR MAKING A FIBROUS STRUCTURE COMPRISING CELLULOSIC AND SYNTHETIC FIBERS

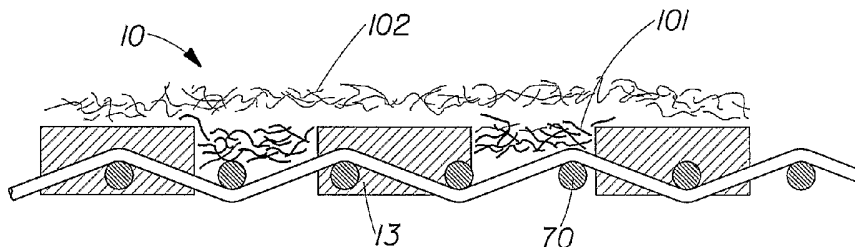

(57) Abstract: A fibrous structure (10) and method for making the fibrous structure (10), wherein the method comprises the steps of: providing a first plurality of fibers (101) onto a forming member (13) having a pattern of channels, the first plurality of fibers (101) provided such that at least some of the first plurality of fibers are disposed in the channels and providing a second plurality of fibers (102) onto the first plurality of fibers (101) such that the second plurality of fibers (102) are disposed adjacent to the first plurality of fibers (101); and forming a unitary fibrous structure including the first plurality and second pluralities of fibers, wherein at least the first plurality (101) or the second plurality (102) includes synthetic fibers.

WO 2004/072373 A1

**PROCESS FOR MAKING A FIBROUS STRUCTURE**  
**COMPRISING CELLULOSIC AND SYNTHETIC FIBERS**

**FIELD OF THE INVENTION**

The present invention relates to fibrous structures comprising cellulose fibers and synthetic fibers in combination, and more specifically to fibrous structures having cellulose fibers distributed generally randomly and synthetic fibers distributed in a non-random pattern or having cellulose fibers distributed in a non-random pattern and synthetic fibers disposed generally randomly.

**BACKGROUND OF THE INVENTION**

Fibrous structures, such as paper webs, are well known in the art and are in common use today for paper towels, toilet tissue, facial tissue, napkins, wipes, and the like. Typical tissue paper is comprised mostly of cellulosic fibers, often wood-based. Despite a broad range of cellulosic fiber types, such fibers are generally high in dry modulus and relatively large in diameter, which may cause their flexural rigidity to be higher than desired. Further, cellulosic fibers can have a relatively high stiffness when dry, which may negatively affect the softness of the product and may have low stiffness when wet, which may cause poor absorbency in the resulting product.

To form a web, the fibers in typical disposable paper products are bonded to one another through chemical interaction and often the bonding is limited to the naturally occurring hydrogen bonding between hydroxyl groups on the cellulose molecules. If greater temporary or permanent wet strength is desired, strengthening additives can be used. These additives typically work by either covalently reacting with the cellulose or by forming protective molecular films around the existing hydrogen bonds. However, they can also produce relatively rigid and inelastic bonds, which may detrimentally affect softness and absorption properties of the products.

The use of synthetic fibers along with cellulose fibers can help overcome some of the previously mentioned limitations. Synthetic polymers can be formed into fibers with very different characteristics, including very small fiber diameters. Further, such fibers can be lower in modulus than cellulose. Thus, a fiber can be made with very low flexural rigidity, which facilitates good product softness. In addition, functional cross-sections of the synthetic fibers can be micro-engineered as desired. Synthetic fibers can also be designed to maintain modulus when

wetted, and hence webs made with such fibers resist collapse during absorbency tasks. Accordingly, the use of thermally bonded synthetic fibers in tissue products can result in a strong network of highly flexible fibers (good for softness) joined with water-resistant high-stretch bonds (good for softness and wet strength). However, synthetic fibers can be relatively expensive as compared to cellulose fibers. Thus, it may be desired to include only as many synthetic fibers as are necessary to gain the desired benefits that the fibers provide or to preferentially dispose the fibers such that they are most effective.

Thus, it would be advantageous to provide improved fibrous structures including cellulosic and synthetic fibers in combination, and processes for making such fibrous structures. It would also be advantageous to provide a product that has synthetic or cellulosic fibers concentrated in certain desired portions of the resulting web and a method to allow for such non-random placement of such fibers.

### **SUMMARY OF THE INVENTION**

To address the problems with respect to the prior art, we have invented a unitary fibrous structure having a plurality of synthetic fibers disposed in a generally non-random pattern and a plurality of cellulosic fibers disposed generally randomly and a method of making such a structure. The method may include the steps of: providing a plurality of synthetic fibers onto a forming member having a pattern of channels such that at least some of the synthetic fibers are disposed in the channels; providing a plurality of cellulosic fibers onto the synthetic fibers such that the cellulosic fibers are disposed adjacent to the synthetic fibers; and forming a unitary fibrous structure including the synthetic fibers and the cellulosic fibers.

In an alternative embodiment, a web having a plurality of cellulosic fibers disposed in a generally non-random pattern and a plurality of synthetic fibers disposed generally randomly is provided. The method to make such a web may comprise the steps of: providing a plurality of cellulosic fibers onto a forming member having a pattern of channels such that at least some of the cellulosic fibers are disposed in the channels; providing a plurality of synthetic fibers onto the cellulosic fibers such that the synthetic fibers are disposed adjacent to the cellulosic fibers; and forming the unitary fibrous structure from the synthetic fibers and the cellulosic fibers.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 is a side view of an embodiment of the process of the present invention.

- Figure 2 is a plan view of an embodiment of a forming member having a substantially continuous framework.
- Figure 3 is a representational cross-sectional view of an exemplary forming member.
- Figure 4 is a plan view of an embodiment of a forming member having a substantially semi-continuous framework.
- Figure 5 is a plan view of an embodiment of a forming member having a discrete pattern framework.
- Figure 6 is a representational cross-sectional view of an exemplary forming member.
- Figure 7 is a cross-sectional view showing exemplary synthetic fibers distributed in the channels formed in the forming member.
- Figure 8 is a cross-sectional view showing a unitary fibrous structure of the present invention, wherein the cellulosic fibers are randomly distributed on the forming member including the synthetic fibers.
- Figure 9 is a cross-sectional view of a unitary fibrous structure of the present invention, wherein the cellulosic fibers are distributed generally randomly and the synthetic fibers are distributed generally non-randomly.
- Figure 9A is a cross-sectional view of a unitary fibrous structure of the present invention, wherein the synthetic fibers are distributed generally randomly and the cellulosic fibers are distributed generally non-randomly.
- Figure 10 is a plan view of an embodiment of the unitary fibrous structure of the present invention.
- Figure 11 is a cross-sectional view of a unitary fibrous structure of the present invention between a pressing surface and a molding member.
- Figure 12 is a cross-sectional view of a bi-component synthetic fiber co-joined with another fiber.
- Figure 13 is a plan view of an embodiment of a molding member having a substantially continuous pattern framework.
- Figure 14 is a cross-sectional view taken along line 14-14 of Figure 13.

## DETAILED DESCRIPTION OF THE INVENTION

As used herein, the following terms have the following meanings.

“Unitary fibrous structure” is an arrangement comprising a plurality of fibers that are inter-entangled or otherwise joined to form a sheet product having certain pre-determined microscopic geometric, physical, and aesthetic properties. The fibers may be cellulosic and/or synthetic fibers and may be layered or otherwise arranged in the unitary fibrous structure.

“Micro-geometry” or permutations thereof, refers to relatively small (i.e., “microscopical”) details of the fibrous structure, such as, for example, surface texture, without regard to the structure’s overall configuration, as opposed to its overall (i. e., “macroscopical”) geometry. For example, in the molding member of the present invention, the fluid-permeable areas and the fluid-impermeable areas in combination comprise the micro-geometry of the molding member. Terms containing “macroscopical” or “macroscopically” refer to a “macro-geometry,” or an overall geometry, of a structure or a portion thereof, under consideration when it is placed in a two-dimensional configuration, such as the X-Y plane. For example, on a macroscopical level, a fibrous structure, when disposed on a flat surface, comprises a flat sheet. On a microscopical level, however, the fibrous structure may comprise a plurality of micro-regions that form differential elevations, such as, for example, a network region having a first elevation, and a plurality of fibrous “pillows” dispersed throughout and outwardly extending from the framework region to form a second elevation.

“Basis weight” is the weight (measured in grams) of a unit area (typically measured in square meters) of the fibrous structure, which unit area is taken in the plane of the fibrous structure. The size and shape of the unit area from which the basis weight is measured is dependent upon the relative and absolute sizes and shapes of the regions having differential basis weights. Basis weight is measured as described in the test method section, below.

“Caliper” is the macroscopic thickness of a sample. Caliper should be distinguished from the elevation of differential regions, which is a microscopical characteristic of the regions. Most typically, a caliper is measured under a uniformly applied load of 95 grams per square centimeter ( $\text{g}/\text{cm}^2$ ). Caliper is measured as described in the test method section, below.

“Density” is the ratio of the basis weight to a thickness (taken normal to the plane of the fibrous structure) of a region. Apparent density is the basis weight of the sample divided by the caliper with appropriate unit conversions incorporated therein. Apparent density used herein has the units of grams per cubic centimeter ( $\text{g}/\text{cm}^3$ ).

“Machine direction” (or “MD”) is the direction parallel to the flow of the fibrous structure being made through the manufacturing equipment. “Cross-machine direction” (or “CD”) is the direction perpendicular to the machine direction.

“X,” “Y,” and “Z” designate a conventional system of Cartesian coordinates, wherein mutually perpendicular coordinates “X” and “Y” define a reference X-Y plane, and “Z” defines an orthogonal to the X-Y plane. When an element, such as, for example, a molding member curves or otherwise deplanes, the X-Y plane follows the configuration of the element.

“Substantially continuous” region (area/network/framework) refers to an area within which one can connect any two points by an uninterrupted line running entirely within that area throughout the line’s length. That is, a substantially continuous region or pattern has a substantial “continuity” in all directions parallel to the X-Y plane and is terminated only at edges of that region. The term “substantially” in conjunction with “continuous” is intended to indicate that while an absolute continuity is contemplated, minor deviations from the absolute continuity may be tolerable as long as those deviations do not appreciably affect the performance of the fibrous structure or a molding member as designed and intended.

“Substantially semi-continuous” region (area/network/framework) refers to an area which may have “continuity” in all, but at least one, directions parallel to the X-Y plane, and in which area one cannot connect every set of two points by an uninterrupted line running entirely within that area throughout the line’s length. Of course, minor deviations from such continuity may be tolerable as long as those deviations do not appreciably affect the performance of the structure or the molding member.

“Discontinuous” regions (or patterns) refer to discrete, and separated from one another areas that are discontinuous in all directions parallel to the X-Y plane.

“Redistribution” means at least some of the plurality of fibers comprised in the unitary fibrous structure of the present invention at least partially melt, move, shrink, and/or otherwise change their initial position, condition, and/or shape in the web.

“Co-joined fibers” means two or more fibers that have been fused or adhered to one another by melting, gluing, wrapping around, chemical or mechanical bonds, or otherwise joined together while at least partially retaining their respective individual fiber characteristics.

Generally, the process of the present invention for making a unitary fibrous structure will be described in terms of forming a web having a plurality of synthetic fibers 101 disposed in a

generally non-random pattern and a plurality of cellulosic fibers 102 disposed generally randomly (e.g. as shown in Figures 9 and 10). However, as noted above, the method and apparatus of the present invention are also suitable for forming a web having a plurality of cellulosic fibers 102 disposed in a generally non-random pattern and a plurality of synthetic fibers 101 disposed generally randomly (e.g. as shown in Figure 9A) and webs wherein the cellulosic fibers 102 and the synthetic fibers 101 are disposed in non-random patterns that are different from each other. In embodiments wherein the synthetic fibers 101 are disposed non-randomly, the method may include the steps of: providing a plurality of synthetic fibers 101 onto a forming member such that the synthetic fibers 101 are located at least in predetermined regions or channels; providing a plurality of cellulosic fibers 102 generally randomly on the forming member containing the synthetic fibers 101; and forming a unitary fibrous structure including the randomly disposed cellulosic fibers 102 and the non-randomly disposed synthetic fibers 101. However, in embodiments wherein the synthetic fibers 101 are disposed generally randomly, the method may include the steps of: providing a plurality of cellulosic fibers 102 onto a forming member such that the cellulosic fibers 102 are located at least in predetermined regions or channels; providing a plurality of synthetic fibers 101 generally randomly on the forming member containing the cellulosic fibers 102; and forming a unitary fibrous structure including the randomly disposed synthetic fibers 101 and the non-randomly disposed cellulosic fibers 102.

Figure 1 shows one exemplary embodiment of a continuous process of the present invention in which an aqueous mixture, or aqueous slurry 11 of cellulosic and synthetic fibers, from a headbox 12 is deposited on a forming member 13 to form an embryonic web 10. In this particular embodiment, the forming member 13 is supported by and continuously traveling around rolls 13a, 13b, and 13c in a direction of the arrow A. In this particular embodiment, a web will be formed having at least some synthetic fibers 101 disposed non-randomly. As such, the synthetic fibers 101 may be deposited prior to the deposition of the cellulosic fibers 102 and directly onto the forming member 13. In certain embodiments, more than one headbox 12 can be employed and/or the synthetic fibers 101 may be deposited onto a forming member 13 and then transferred to a different forming member where the cellulosic fibers 102 are then deposited. Alternatively, the synthetic fibers 101 could be one of several layers that are deposited onto the forming member 13 at about the same time as other types of fibers. In any case, in embodiments where the synthetic fibers 101 are to be disposed non-randomly, the synthetic fibers 101 should be deposited in such a way that at least some of the synthetic fibers 101 are directed into predetermined regions, such as channels 53 present in forming member 13 (e.g. as shown in Figures 7-8). If a

web is desired having at least some of the cellulosic fibers disposed non-randomly, any of the above-noted techniques may be used.

In one embodiment of the present invention, the synthetic fibers 101 are provided so as to be predominantly disposed in the channels 53 of the forming member 13. That is, more than half of the synthetic fibers 101 are disposed in the channels 53 when the web 10 is being formed. In other embodiments, it may be desired that at least about 60%, about 75%, about 80% or substantially all of the synthetic fibers 101 are disposed in the channels 53 when the web 10 is being formed. In addition, it may be desirable that the resulting web 100 include a certain percentage of synthetic fibers 101 disposed in one or more layers. For example, it may be desirable that the layer formed by fibers deposited first or closest to the forming member 13 have a concentration of greater than about 55%, greater than about 60% or greater than about 75% synthetic fibers 101. (A suitable method for measuring the percentage of a particular type of fiber in a layer of a web product is disclosed in U.S. Patent 5,178,729 issued to Bruce Janda on January 12, 1993.) Further, in certain embodiments, it may be desired that the cellulosic fibers 102 be provided so as to be disposed predominantly in at least one layer adjacent the layer formed by the synthetic fibers 101. In other embodiments, it may be desired that at least a certain percentage of the cellulosic fibers 102 are disposed in at least one layer of the web 100, such as for example, greater than about 55%, greater than about 60% or greater than about 75%. At least one layer of the cellulosic fibers 102 may be disposed generally randomly. Thus, the resulting web 100 can be provided with a non-random pattern of synthetic fibers 101 joined to one or more layers of generally randomly distributed cellulosic fibers 102 (e.g. Figures 9 and 10). Further, a fibrous structure can be formed that has micro-regions of different basis weight.

In embodiments of the present invention where the cellulosic fibers 101 are to be non-randomly disposed, the cellulosic fibers 102 may be provided so as to be predominantly disposed in the channels 53 of the forming member 13. That is, more than half of the cellulosic fibers 102 are disposed in the channels 53 when the web 10 is being formed. In other embodiments, it may be desired that at least about 60%, about 75%, about 80% or substantially all of the cellulose fibers 102 are disposed in the channels 53 when the web 10 is being formed. In addition, it may be desirable that the resulting web 100 include a certain percentage of cellulose fibers 102 disposed in one or more layers. For example, it may be desirable that the layer formed by fibers deposited first or closest to the forming member 13 have a concentration of greater than about 55%, greater than about 60% or greater than about 75% cellulose fibers 102. Further, in certain embodiments, it may be desired that the synthetic fibers 101 be provided so as to be disposed



predominantly in at least one layer adjacent the layer formed by the cellulosic fibers 102. In other embodiments, it may be desired that at least a certain percentage of the synthetic fibers 101 are disposed in at least one layer of the web 100, such as for example, greater than about 55%, greater than about 60% or greater than about 75%. At least one layer of the synthetic fibers 101 may be disposed generally randomly. Thus, the resulting web 100 can be provided with a non-random pattern of cellulosic fibers 102 joined to one or more layers of generally randomly distributed synthetic fibers 101 (e.g. Figure 9A). Further, as stated above, a fibrous structure can be formed that has micro-regions of different basis weight.

The forming member 13 may be any suitable structure and is typically at least partially fluid-permeable. For example, the forming member 13 may comprise a plurality of fluid-permeable areas 54 and a plurality of fluid-impermeable areas 55, as shown, for example in Figures 2-6. The fluid-permeable areas or apertures 54 may extend through a thickness H of the forming member 13, from the web-side 51 to the backside 52. In certain embodiments, some of the fluid-permeable areas 54 comprising apertures may be "blind," or "closed", as described in U.S. Patent 5,972,813, issued to Polat et al. on Oct. 26, 1999. The fluid permeable areas 54, whether open, blind or closed form channels 53 into which fibers can be directed. At least one of the plurality of fluid-permeable areas 54 and the plurality of fluid-impermeable areas 55 typically forms a pattern throughout the molding member 50. Such a pattern can comprise a random pattern or a non-random pattern and can be substantially continuous (e.g. Figure 2), substantially semi-continuous (e.g. Figure 4), discrete (e.g. Figure 5) or any combination thereof.

The forming member 13 may have any suitable thickness H and, in fact, the thickness H can be made to vary throughout the forming member 13, as desired. Further, the channels 53 may be any shape or combination of different shapes and may have any depth D, which can vary throughout the forming member 13. Also, the channels 53 can have any desired volume. The depth D and volume of the channels 53 can be varied, as desired, to help ensure the desired concentration of synthetic fibers 101 or cellulosic fibers 102 are disposed in the channels 53. In certain embodiments, it may be desirable for the depth D of the channels 53 to be less than about 254 micrometers or less than about 127 micrometers. Further, the amount of synthetic fibers 101 or cellulosic fibers 102 deposited onto the forming member 13 can be varied so as to ensure the desired ratio or percentage of synthetic fibers 101 and/or cellulosic fibers 102 are disposed in the channels 53 of a particular depth D or volume. For example, in certain embodiments, it may be desirable to provide enough synthetic fibers 101 to substantially fill channels 53 such that virtually no cellulosic fibers 102 will be located in the channels 53 during the web making

process, while in other embodiments, it may be desirable to provide only enough synthetic fibers 101 to fill a portion of the channels 53 such that at least some cellulosic fibers 102 can also be directed into the channels 53. In other embodiments, it may be desirable to provide enough cellulosic fibers 102 to substantially fill channels 53 such that virtually no synthetic fibers 101 will be located in the channels 53 during the web making process, while in other embodiments, it may be desirable to provide only enough cellulosic fibers 102 to fill a portion of the channels 53 such that at least some synthetic fibers 101 can also be directed into the channels 53

Some exemplary forming members 13 may comprise structures as shown in Figures 2-8 including a fluid-permeable reinforcing element 70 and a pattern or framework 60 extending therefrom to form a plurality of channels 53. In one embodiment, as shown in Figures 5 and 6, the forming member 13 may comprise a plurality of discrete protuberances 61 joined to or integral with a reinforcing element 70. The reinforcing element 70 generally serves to provide or facilitate integrity, stability, and durability. The reinforcing element 70 can be fluid-permeable or partially fluid-permeable, may have a variety of embodiments and weave patterns, and may comprise a variety of materials, such as, for example, a plurality of interwoven yarns (including Jacquard-type and the like woven patterns), a felt, a plastic or other synthetic material, a net, a plate having a plurality of holes, or any combination thereof. Examples of suitable reinforcing elements 70 are described in U.S. Patents 5,496,624, issued March 5, 1996 to Stelljes, et al., 5,500,277 issued Mar. 19, 1996 to Trokhan et al., and 5,566,724 issued Oct. 22, 1996 to Trokhan et al. Alternatively, a reinforcing element 70 comprising a Jacquard-type weave, or the like, can be utilized. Illustrative belts can be found in U.S. Patents 5,429,686 issued July 4, 1995 to Chiu, et al.; 5,672,248 issued Sept. 30, 1997 to Wendt, et al.; 5,746,887 issued May 5, 1998 to Wendt, et al.; and 6,017,417 issued January 25, 2000 to Wendt, et al. Further, various designs of the Jacquard-weave pattern may be utilized as a forming member 13.

Exemplary suitable framework elements 60 and methods for applying the framework 60 to the reinforcing element 70, are taught, for example, by U.S. Patents 4,514,345 issued April 30, 1985 to Johnson; 4,528,239 issued July 9, 1985 to Trokhan; 4,529,480 issued July 16, 1985 to Trokhan; 4,637,859 issued January 20, 1987 to Trokhan; 5,334,289 issued August 2, 1994 to Trokhan; 5,500,277 issued March 19, 1996 to Trokhan et al.; 5,514,523 issued May 7, 1996 to Trokhan et al.; 5,628,876 issued May 13, 1997 to Ayers et al.; 5,804,036 issued September 8, 1998 to Phan et al.; 5,906,710 issued May 25, 1999 to Trokhan; 6,039,839 issued March 21, 2000 to Trokhan et al.; 6,110,324 issued August 29, 2000 to Trokhan et al.; 6,117,270 issued September 12, 2000 to Trokhan; 6,171,447 B1 issued January 9, 2001 to Trokhan; and 6,193,847

B1 issued February 27, 2001 to Trokhan. Further, as shown in Figure 6, framework 60 may include one or apertures or holes 58 extending through the framework element 60. Such holes 58 are different from the channels 53 and may be used to help dewater the slurry or web and/or aid in keeping fibers deposited on the framework 60 from moving completely into the channels 53.

Alternatively, the forming member 13 may include any other structure suitable for receiving fibers and including some pattern of channels 53 into which the synthetic fibers 101 may be directed, including, but not limited to, wires, composite belts and/or felts. In any case, the pattern may be discrete, as noted above, or substantially discrete, may be continuous or substantially continuous or may be semi-continuous or substantially semi-continuous. Certain exemplary forming members 13 generally suitable for use with the method of the present invention include the forming members described in U.S. Patents 5,245,025; 5,277,761; 5,443,691; 5,503,715; 5,527,428; 5,534,326; 5,614,061 and 5,654,076.

If the forming member 13 includes a press felt, it may be made according to the teachings of U.S. Patents 5,580,423, issued Dec. 3, 1996 to Ampulski et al.; 5,609,725, issued Mar. 11, 1997 to Phan; 5,629,052 issued May 13, 1997 to Trokhan et al.; 5,637,194, issued June 10, 1997 to Ampulski et al.; 5,674,663, issued Oct. 7, 1997 to McFarland et al.; 5,693,187 issued Dec. 2, 1997 to Ampulski et al.; 5,709,775 issued Jan. 20, 1998 to Trokhan et al.; 5,776,307 issued Jul. 7, 1998 to Ampulski et al.; 5,795,440 issued Aug. 18, 1998 to Ampulski et al.; 5,814,190 issued Sept. 29, 1998 to Phan; 5,817,377 issued Oct. 6, 1998 to Trokhan et al.; 5,846,379 issued Dec. 8, 1998 to Ampulski et al.; 5,855,739 issued Jan. 5, 1999 to Ampulski et al.; and 5,861,082 issued Jan. 19, 1999 to Ampulski et al. In an alternative embodiment, the forming member 13 may be executed as a press felt according to the teachings of U.S. Patent 5,569,358 issued Oct. 29, 1996 to Cameron or any other suitable structure. Other structures suitable for use as forming members 13 are hereinafter described with respect to the optional molding member 50.

A vacuum apparatus such as vacuum apparatus 14 located under the forming member 13 may be used to apply fluid pressure differential to the slurry disposed on the forming member 13 to facilitate at least partial dewatering of the embryonic web 10. This fluid pressure differential can also help direct the desired fibers, e.g. the synthetic fibers 101 into the channels 53 of the forming member 13. Other known methods may be used in addition to or as an alternative to the vacuum apparatus 14 to dewater the web 10 and/or to help direct the fibers into the channels 53 of the forming member 13.

If desired, the embryonic web 10, formed on the forming member 13, can be transferred from the forming member 13, to a felt or other structure such as a molding member. A molding

member is a structural element that can be used as a support for the an embryonic web, as well as a forming unit to form, or "mold," a desired microscopical geometry of the fibrous structure. The molding member may comprise any element that has the ability to impart a microscopical three-dimensional pattern to the structure being produced thereon, and includes, without limitation, single-layer and multi-layer structures comprising a stationary plate, a belt, a woven fabric (including Jacquard-type and the like woven patterns), a band, and a roll.

In the exemplary embodiment shown in Figure 1, the molding member 50 is fluid permeable and vacuum shoe 15 applies vacuum pressure that is sufficient to cause the embryonic web 10 disposed on the forming member 13 to separate there from and adhere to the molding member 50. The molding member 50 of Figure 1 comprises a belt supported by and traveling around rolls 50a, 50b, 50c, and 50d in the direction of the arrow B. The molding member 50 has a web-contacting side 151 and a backside 152 opposite to the web-contacting side 151.

The molding member 50 can take on any suitable form and can be made of any suitable materials. The molding member 50 may include any structure and be made by any of the methods described herein with respect to the forming member 13, although the molding member 50 is not limited to such structures or methods. For example, the molding member 50 comprises a resinous framework 160 joined to a reinforcing element 170, as shown, for example in Figures 13-14. Further, various designs of Jacquard-weave patterns may be utilized as the molding member 50, and/or a pressing surface 210. If desired, the molding member 50 may be or include a press felt. Suitable press felts for use with the present invention include, but are not limited to those described herein with respect to the forming member 13

In certain embodiments, the molding member 50 may comprise a plurality of fluid-permeable areas 154 and a plurality of fluid-impermeable areas 155, as shown, for example in Figures 13 and 14. The fluid-permeable areas or apertures 154 extend through a thickness H1 of the molding member 50, from the web-side 151 to the backside 152. As noted above with respect to the forming member 13, the thickness H1 of the molding member can be any desired thickness. Further, the depth D1 and volume of the channels 153 can vary, as desired. Further, one or more of the fluid-permeable areas 154 comprising apertures may be "blind," or "closed", as described above with respect to the forming member 13. At least one of the plurality of fluid-permeable areas 154 and the plurality of fluid-impermeable areas 155 typically forms a pattern throughout the molding member 50. Such a pattern can comprise a random pattern or a non-random pattern and can be substantially continuous, substantially semi-continuous, discrete or any combination thereof. The portions of the reinforcing element 170 registered with apertures 154 in the molding

member 50 may provide support for fibers that are deflected into the fluid-permeable areas of the molding member 50 during the process of making the unitary fibrous structure 100. The reinforcing element can help prevent the fibers of the web being made from passing through the molding member 50, thereby reducing occurrences of pinholes in the resulting structure 100.

In certain embodiments, the molding member 50 may comprise a plurality of suspended portions extending from a plurality of base portions, as is taught by U.S. Patent 6,576,090 issued June 10, 2003 to Trokhan et al. In such embodiments, the suspended portions may be elevated from the reinforcing element 170 to form void spaces between the suspended portions and the reinforcing element 170, into which spaces the fibers of the embryonic web 10 can be deflected to form cantilever portions of the fibrous structure 100. The molding member 50 having suspended portions may comprise a multi-layer structure formed by at least two layers and joined together in a face-to-face relationship. The joined layers may be positioned such that the apertures of one layer are superimposed (in the direction perpendicular to the general plane of the molding member 50) with a portion of the framework of the other layer, which portion forms the suspended portion described above. Another embodiment of the molding member 50 comprising a plurality of suspended portions can be made by a process involving differential curing of a layer of a photosensitive resin, or other curable material, through a mask comprising transparent regions and opaque regions. The opaque regions comprise regions having differential opacity, for example, regions having a relatively high opacity (non-transparent) and regions having a relatively low, partial, opacity (some transparency).

When the embryonic web 10 is disposed on the web-contacting side 151 of the molding member 50, the web 10 at least partially conforms to the three-dimensional pattern of the molding member 50. In addition, various means can be utilized to cause or encourage the cellulosic and/or synthetic fibers of the embryonic web 10 to conform to the three-dimensional pattern of the molding member 50 and to become a molded web designated as "20" in Figure 1. (It is to be understood, that the referral numerals "10" and "20" can be used herein interchangeably, as well as the terms "embryonic web" and "molded web"). One method includes applying a fluid pressure differential to the plurality of fibers. For example, as shown in Figure 1, vacuum apparatuses 16 and/or 17 disposed at the backside 152 of the molding member 50 can be arranged to apply a vacuum pressure to the molding member 50 and thus to the plurality of fibers disposed thereon. Under the influence of fluid pressure differential  $\Delta P1$  and/or  $\Delta P2$  created by the vacuum pressure of the vacuum apparatuses 16 and 17, respectively, portions of the embryonic web 10

can be deflected into the channels 153 of the molding member 50 and conform to the three-dimensional pattern thereof.

By deflecting portions of the web 10 into the channels 153 of the molding member 50, one can decrease the density of resulting pillows 150 formed in the channels 153 of the molding member 50, relative to the density of the rest of the molded web 20. Regions 168 that are not deflected into the apertures may later be imprinted by impressing the web 20 between a pressing surface 218 and the molding member 50 (e.g. Figure 11), such as, for example, in a compression nip formed between a surface 210 of a drying drum 200 and the roll 50c, shown in Figure 1. If imprinted, the density of the regions 168 may increase even more relative to the density of the pillows 150.

The micro-regions (high and low density) of the fibrous structure 100 may be thought of as being disposed at two different elevations. As used herein, the elevation of a region refers to its distance from a reference plane (i. e., X-Y plane). The reference plane can be visualized as horizontal, wherein the elevational distance from the reference plane is vertical (i.e., Z-directional). The elevation of a particular micro-region of the structure 100 may be measured using any non-contacting measurement device suitable for such purpose as is well known in the art. The fibrous structure 100 according to the present invention can be placed on the reference plane with the imprinted region 168 in contact with the reference plane. The pillows 150 extend vertically away from the reference plane. The plurality of pillows 150 may comprise symmetrical pillows, asymmetrical pillows, or a combination thereof.

Differential elevations of the micro-regions can also be formed by using the molding member 50 having differential depths or elevations of its three-dimensional pattern. Such three-dimensional patterns having differential depths/elevations can be made by sanding pre-selected portions of the molding member 50 to reduce their elevation. Alternatively, a three-dimensional mask comprising differential depths/elevations of its depressions/protrusions, can be used to form a corresponding framework 160 having differential elevations. Other conventional techniques of forming surfaces with differential elevation can also be used for the foregoing purposes. It should be recognized that the techniques described herein for forming the molding member are also applicable to the formation of the forming member 13.

To ameliorate possible negative effects of a sudden application of a fluid pressure differential to the fibrous structure made by a vacuum apparatuses 16 and/or 17 and/or a vacuum pick-up shoe 15 that could force some of the filaments or portions thereof all the way through the molding member 50 and thus lead to forming so-called pin-holes in the resultant fibrous structure,

the backside 152 of the molding member 50 can be "textured" to form microscopical surface irregularities. Such surface irregularities can help prevent formation of a vacuum seal between the backside 52 of the molding member 50 and a surface of the papermaking equipment (such as, for example, a surface of the vacuum apparatus), creating "leakage" there between and thus, mitigating certain undesirable consequences of an application of a vacuum pressure in a through-air-drying process. Other methods of creating such leakage are disclosed in U.S. Patents 5,718,806; 5,741,402; 5,744,007; 5,776,311 and 5,885,421.

Leakage can also be created using so-called "differential light transmission techniques" as described in U.S. Patents 5,624,790; 5,554,467; 5,529,664; 5,514,523 and 5,334,289. The molding member 50 can be made by applying a coating of photosensitive resin to a reinforcing element that has opaque portions, and then exposing the coating to light of an activating wavelength through a mask having transparent and opaque regions, and also through the reinforcing element. Another way of creating backside surface irregularities comprises the use of a textured forming surface, or a textured barrier film, as described in U.S. Patents 5,364,504; 5,260,171 and 5,098,522. The molding member 50 may be made by casting a photosensitive resin over and through the reinforcing element while the reinforcing element travels over a textured surface, and then exposing the coating to light of an activating wavelength through a mask, which has transparent and opaque regions. It should be understood that the methods and structures described in this paragraph and the preceding paragraph may also be applicable to the structure and formation of the forming member 13.

The process of the present invention may also include a step wherein the embryonic web 10 (or molded web 20) is overlaid with a flexible sheet of material comprising an endless band traveling along with the molding member 50 so that the embryonic web 10 is sandwiched, for a certain period of time, between the molding member 50 and the flexible sheet of material. The flexible sheet of material can have air-permeability less than that of the molding member 50, and in some embodiments can be air-impermeable. An application of a fluid pressure differential to the flexible sheet through the molding member 50 can cause deflection of at least a portion of the flexible sheet towards, and in some instances into, the three-dimensional pattern of the molding member 50, thereby forcing portions of the web 20 disposed on the molding member 50 to closely conform to the three-dimensional pattern of the molding member 50. U.S. Patent 5,893,965 describes one arrangement of a process and equipment utilizing the flexible sheet of material.

Additionally or alternatively to the fluid pressure differential, mechanical pressure can be used to facilitate formation of a microscopical three-dimensional pattern on the fibrous structure

100 of the present invention. Such a mechanical pressure can be created by any suitable press surface 218, comprising, for example a surface of a roll or a surface of a band. The press surface 218 can be smooth or have a three-dimensional pattern of its own. In the latter instance, the press surface 218 can be used as an embossing device, to form a distinctive micro-pattern of protrusions and/or depressions in the fibrous structure 100 being made, in cooperation with or independently from the three-dimensional pattern of the molding member 50. Furthermore, the press surface can be used to deposit a variety of additives, such for example, as softeners, and ink, to the fibrous structure being made. Various other conventional techniques, such as, for example, ink roll, or spraying device, or shower, may be used to directly or indirectly deposit a variety of additives to the fibrous structure being made.

In certain embodiments, it may be desirable to foreshorten the fibrous structure 100 of the present invention as it is being formed. For example, the molding member 50 may be configured to have a linear velocity that is less than that of the forming member 13. The use of such a velocity differential at the transfer point from the forming member 13 to the molding member 50 can be used to achieve "microcontraction". U.S. Patent 4,440,597 describes in detail one example of wet-microcontraction. Such wet-microcontraction may involve transferring the web having a low fiber-consistency from any first member (such as, for example, a foraminous forming member) to any second member (such as, for example, an open-weave fabric) moving slower than the first member. The difference in velocity between the first member and the second member can vary depending on the desired end characteristics of the fibrous structure 100. Other patents that describe methods for achieving microcontraction include, for example, U.S. Patents 5,830,321; 6,361,654 and 6,171,442.

The fibrous structure 100 may additionally or alternatively be foreshortened after it has been formed and/or substantially dried. For example, foreshortening can be accomplished by creping the structure 100 from a rigid surface, such as, for example, a surface 210 of a drying drum 200, as shown in Figure 1. This and other forms of creping are known in the art. U.S. Patent 4,919,756, issued April 24, 1992 to Sawdai describes one suitable method for creping a web. Of course, fibrous structures 100 that are not creped (e.g. uncreped) and/or otherwise foreshortened are contemplated to be within the scope of the present invention as are fibrous structures 100 that are not creped, but are otherwise foreshortened.

In certain embodiments, it may be desirable to at least partially melt or soften at least some of the synthetic fibers 101. As the synthetic fibers 101 at least partially melt or soften, they may become capable of co-joining with adjacent fibers, whether cellulosic fibers 102 or other



synthetic fibers 101. Co-joining of fibers can comprise mechanical co-joining and chemical co-joining. Chemical co-joining occurs when at least two adjacent fibers join together on a molecular level such that the identity of the individual co-joined fibers is substantially lost in the co-joined area. Mechanical co-joining of fibers takes place when one fiber merely conforms to the shape of the adjacent fiber, and there is no chemical reaction between the co-joined fibers. Figure 12 shows one embodiment of mechanical co-joining, wherein a fiber 111 is physically entrapped by an adjacent synthetic fiber 112. The fiber 111 can be a synthetic fiber or a cellulosic fiber. In the example shown in Figure 12, the synthetic fiber 112 has a bi-component structure, comprising a core 112a and a sheath, or shell, 112b, wherein the melting temperature of the core 112a is greater than the melting temperature of the sheath 112b, so that when heated, only the sheath 112b melts, while the core 112a retains its integrity. However, it is to be understood that different types of bi-component fibers and/or multi-component fibers comprising more than two components can be used in the present invention, as can single component fibers.

In certain embodiments, it may be desirable to redistribute at least some of the synthetic fibers 101 in the web 100 after the web 100 is formed. Such redistribution can occur while the web 100 is disposed on the molding member 50 or at a different time and/or location in the process. For example, a heating apparatus 90, the drying surface 210 and/or a drying drum's hood (such as, for example, a Yankee's drying hood 80) can be used to heat the web 100 after it is formed to redistribute at least some of the synthetic fibers 101. Without wishing to be bound by theory, it is believed that the synthetic fibers 101 can move after application of a sufficiently high temperature, under the influence of at least one of two phenomena. If the temperature is sufficiently high to melt the synthetic fiber 101, the resulting liquid polymer will tend to minimize its surface area/mass, due to surface tension forces, and form a sphere-like shape at the end of the portion of fiber that is less affected thermally. On the other hand, if the temperature is below the melting point, fibers with high residual stresses will soften to the point where the stress is relieved by shrinking or coiling of the fiber. This is believed to occur because polymer molecules typically prefer to be in a non-linear coiled state. Fibers that have been highly drawn and then cooled during their manufacture are comprised of polymer molecules that have been stretched into a meta-stable configuration. Upon subsequent heating, the fibers attempt to return to the minimum free energy coiled state.

Redistribution may be accomplished in any number of steps. For example, the synthetic fibers 101 can first be redistributed while the fibrous web 100 is disposed on the molding member 50, for example, by blowing hot gas through the pillows of the web 100, so that the synthetic

fibers 101 are redistributed according to a first pattern. Then, the web 100 can be transferred to another molding member 50 wherein the synthetic fibers 101 can be further redistributed according to a second pattern.

Heating the synthetic fibers 101 in the web 100 can be accomplished by heating the plurality of micro-regions corresponding to the fluid-permeable areas 154 of the molding member 50. For example, a hot gas from the heating apparatus 90 can be forced through the web 100. Pre-dryers can also be used as the source of heat energy. In any case, it is to be understood that depending on the process, the direction of the flow of hot gas can be reversed relative to that shown in Figure 1, so that the hot gas penetrates the web through the molding member 50. Then, the pillow portions 150 of the web that are disposed in the fluid-permeable areas 154 of the molding member 50 will be primarily affected by the hot gas. The rest of the web 100 will be shielded from the hot gas by the molding member 50. Consequently, the synthetic fibers 101 will be softened or melted predominantly in the pillow portions 150 of the web 10. Further, this region is where co-joining of the fibers due to melting or softening of the synthetic fibers 101 is most likely to occur.

Although the redistribution of the synthetic fibers 101 has been described above as having been affected by passage of hot gas over at least a portion of some of the fibers 101, any suitable means for heating the fibers 101 can be implemented. For example, hot fluids may be used, as well as microwaves, radio waves, ultrasonic energy, laser or other light energy, heated belts or rolls, hot pins, magnetic energy, or any combination of these or other known means for heating. Further, although redistribution of the synthetic fibers 101 has generally been referred to as having been affected by heating the fibers 101, redistribution may also take place as a result of cooling a portion of the web 10. As with heating, cooling of the synthetic fibers 101 may cause the fibers 101 to change shape and/or reorient themselves with respect to the rest of the web. Further yet, the synthetic fibers may be redistributed due to a reaction with a redistribution material. For example, the synthetic fibers 101 may be targeted with a chemical composition that softens or otherwise manipulates the synthetic fibers 101 so as to affect some change in their shape, orientation or location within the web 10. Further yet, the redistribution can be affected by mechanical and/or other means such as magnetics, static electricity, etc. Accordingly, redistribution of the synthetic fibers 101, as described herein, should not be considered to be limited to just heat redistribution of the synthetic fibers 101, but should be considered to encompass all known means for redistributing (e.g. altering the shape, orientation or location) of any portion of the synthetic fibers 101 within the web 10. Further, although redistribution has

been described in terms of synthetic fibers 101, it should be understood that the cellulosic fibers 102 could also or alternatively be redistributed by means known to affect the shape and/or orientation of cellulosic fibers.

While the synthetic fibers 101 may be redistributed in a manner and by means described herein, the process for producing the web can be selected such that the random distribution of the cellulosic fibers 102 is not significantly affected by the means used to redistribute the synthetic fibers 101. Thus, the resulting fibrous structure 100 whether redistributed or not comprises a plurality of cellulosic fibers 102 randomly distributed throughout the fibrous structure and a plurality of synthetic fibers 101 distributed throughout the fibrous structure in a non-random pattern. Figure 10 schematically shows one embodiment of the fibrous structure 100 wherein the cellulosic fibers 102 are randomly distributed throughout the structure, and the synthetic fibers 101 are distributed in a non-random repeating pattern.

The synthetic fibers 101 can be any material, for example, those selected from the group consisting of polyolefins, polyesters, polyamides, polyhydroxyalkanoates, polysaccharides, and any combination thereof. More specifically, the material of the synthetic fibers 101 can be selected from the group consisting of polypropylene, polyethylene, poly(ethylene terephthalate), poly(butylene terephthalate), poly(1,4-cyclohexylenedimethylene terephthalate), isophthalic acid copolymers, ethylene glycol copolymers, polycaprolactone, poly(hydroxy ether ester), poly(hydroxy ether amide), polyesteramide, poly(lactic acid), polyhydroxybutyrate, starch, cellulose, glycogen and any combination thereof. Further, the synthetic fibers 101 can be single component (i.e. single synthetic material or mixture makes up entire fiber), bi-component (i.e. fiber is divided into regions, the regions including two different synthetic materials or mixtures thereof) or multi-component fibers (i.e. fiber is divided into regions, the regions including two or more different synthetic materials or mixtures thereof) or any combination thereof. Also, any or all of the synthetic fibers 101 may be treated before, during or after the process of the present invention to change any desired property of the fibers. For example, in certain embodiments, it may be desirable to treat the synthetic fibers 101 before or during the papermaking process to make them more hydrophilic, more wettable, etc.

The method of making the web 100 of the present invention may also include any other desired steps. For example, the method may include converting steps such as winding the web onto a roll, calendering the web, embossing the web, perforating the web, printing the web and/or joining the web to one or more other webs or materials to form multi-ply structures. Some

exemplary patents describing embossing include U.S. Patents 3,414,459; 3,556,907; 5,294,475 and 6,030,690. In addition, the method may include one or more steps to add or enhance the properties of the web 100 such as adding softening, strengthening and/or other treatments to the surface of the product or as the web is being formed. Further, the web 100 may be provided with latex or the like, for example, as described in U.S. Patent 3,879,257 or other materials or resins to provide beneficial properties to the web.

As noted above, the methods and apparatus described herein can also be used to form a web 100 wherein the cellulosic fibers 102 are generally non-randomly distributed and the synthetic fibers 101 are distributed generally randomly throughout at least a portion of the web 100 (e.g. Figure 9A). As such, all of the variations described herein with respect to the method steps and the different equipment used in the method should be understood to also apply to such alternative web embodiments, as should the alternative and optional steps described herein.

A variety of products can be made using the fibrous structure 100 of the present invention. For example, the resultant products may find use in filters for air, oil and water; vacuum cleaner filters; furnace filters; face masks; coffee filters, tea or coffee bags; thermal insulation materials and sound insulation materials; nonwovens for one-time use sanitary products such as diapers, feminine pads, and incontinence articles; textile fabrics for moisture absorption and softness of wear such as microfiber or breathable fabrics; an electrostatically charged, structured web for collecting and removing dust; reinforcements and webs for hard grades of paper, such as wrapping paper, writing paper, newsprint, corrugated paper board, and webs for tissue grades of paper such as toilet paper, paper towel, napkins and facial tissue; medical uses such as surgical drapes, wound dressing, bandages, and dermal patches. The fibrous structure 100 may also include odor absorbents, termite repellents, insecticides, rodenticides, and the like, for specific uses. The resultant product may absorb water and oil and may find use in oil or water spill clean-up, or controlled water retention or release for agricultural or horticultural applications.

#### Test Methods:

Caliper is measured according to the following procedure, without considering the micro-deviations from absolute planarity inherent to the multi-density tissues made according to the aforementioned incorporated patents.

The tissue paper is preconditioned at 71° to 75°F and 48 to 52 percent relative humidity for at least two hours prior to the caliper measurement. If the caliper of toilet tissue or other rolled products is being measured, 15 to 20 sheets are first removed from the outside of the roll and discarded. If the caliper of facial tissue or other boxed products is being measured, the sample is

taken from near the center of the package. The sample is selected and then conditioned for an additional 15 minutes.

Caliper is measured using a low load Thwing-Albert Progage micrometer, Model 89-2012, available from the Thwing-Albert Instrument Company of Philadelphia, Pennsylvania. The micrometer loads the sample with a pressure of 95 grams per square inch using a 2.0 inch diameter presser foot and a 2.5 inch diameter support anvil. The micrometer has a measurement capability range of 0 to 0.0400 inches. Decorated regions, perforations, edge effects, etc., of the tissue should be avoided if possible.

Basis weight is measured according to the following procedure.

The tissue sample is selected as described above, and conditioned at 71° to 75°F and 48 to 52 percent humidity for a minimum of 2 hours. Twelve finished product sheets are carefully selected, which are clean, free of holes, tears, wrinkles, folds, and other defects. To be clear, finished product sheets should include the number of plies that the particular finished product to be tested has. Thus, one ply product sample sets will contain 12 one ply sheets; two ply product sample sets will contain 12 two ply sheets; and so on. The sample sets are split into two stacks each containing 6 finished product sheets. A stack of six finished product sheets is placed on top of a cutting die. The die is square, having dimensions of 3.5 inches by 3.5 inches and may have soft polyurethane rubber within the square to ease removal of the sample from the die after cutting. The six finished product sheets are cut using the die, and a suitable pressure plate cutter, such as a Thwing-Albert Alfa Hydraulic Pressure Sample Cutter, Model 240-7A. The second set of six finished product sheets is cut in the same manner. The two stacks of cut finished product sheets are combined into a 12 finished product sheet stack and conditioned for at least 15 additional minutes at 71° to 75°F and 48 to 52 percent humidity.

The stack of 12 finished product sheets cut as described above is then weighed on a calibrated analytical balance having a resolution of at least 0.0001 grams. The balance is maintained in the same room in which the samples were conditioned. A suitable balance is made by Sartorius Instrument Company, Model A200S.

The basis weight, in units of pounds per 3,000 square feet, is calculated according to the following equation:

$$\frac{\text{Weight of 12 cut finished product sheets (grams)} \times 3000}{(453.6 \text{ grams/ pound}) \times (12 \text{ plies}) \times (12.25 \text{ sq. in. per ply}/144 \text{ sq. in./sq. ft.)}$$

The basis weight in units of pounds per 3,000 square feet for this sample is simply calculated using the following conversion equation:

$$\text{Basis Weight (lb/3,000 ft}^2\text{)} = \text{Weight of 12 ply pad (g)} \times 6.48$$

The units of density used here are grams per cubic centimeter (g/cc). With these density units of g/cc, it may be convenient to also express the basis weight in units of grams per square centimeters. The following equation may be used to make this conversion:

$$\text{Basis Weight (g/cm}^2\text{)} = \frac{\text{Weight of 12 ply pad (g)}}{948.4}$$

## CLAIMS:

1. A method for making a unitary fibrous structure, the method comprising the steps of:  
  
providing a first plurality of fibers onto a forming member having a pattern of channels, the first plurality of fibers provided such that at least some of the fibers are disposed in the channels;  
  
providing a second plurality of fibers onto the first plurality of fibers such that the second plurality of fibers are disposed adjacent to the first plurality of fibers; and  
  
forming a unitary fibrous structure including the first plurality of fibers and the second plurality of fibers, wherein at least the first plurality of fibers or the second plurality of fibers includes synthetic fibers.
2. The method of Claim 1 wherein the first plurality of fibers are provided onto the forming member before the second plurality of fibers.
3. The method of any of the preceding claims, wherein at least some of the first plurality of fibers are co-joined to each other or to at least some of the second plurality of fibers.
4. The method of any of the preceding claims wherein the first plurality of fibers are disposed predominantly in the channels during formation of the unitary fibrous structure.
5. The method of any of the preceding claims wherein the first plurality of fibers form a non-random pattern in the unitary fibrous structure.
6. The method of any of the preceding claims wherein the second plurality of fibers are generally randomly distributed in at least one layer of the unitary fibrous structure.
7. The method of any of the preceding claims, wherein the steps of providing a first plurality of fibers and a second plurality of fibers comprise steps of:  
  
providing an aqueous slurry comprising a first plurality of fibers layered with a second plurality of fibers;  
  
depositing the aqueous slurry onto a forming member; and  
  
partially dewatering the slurry to form an embryonic fibrous web comprising the second plurality of fibers randomly distributed throughout one or more layers of the web and the

- first plurality of fibers distributed at least partially in the channels on the forming member.
8. The method of Claim 7 wherein the forming member is moving at a first velocity and the method further includes the steps of:  
  
providing a second member at a second velocity that is less than the first velocity; and  
  
transferring the embryonic web from the forming member to the second member so as to microcontract the embryonic web.
  9. The method of any of the preceding claims, further comprising steps of:  
  
providing a molding member comprising a plurality of fluid-permeable areas and a plurality of fluid-impermeable areas;  
  
providing a drying surface to receive the unitary fibrous structure thereon;  
  
disposing the unitary fibrous structure on the molding member;  
  
transferring the unitary fibrous structure to the drying surface; and  
  
heating the unitary fibrous structure to a temperature sufficient to cause redistribution of at least some of the fibers in the unitary fibrous structure.
  10. The method of Claim 9, further including the step of impressing the plurality of fibers between the molding member and a pressing surface to densify portions of the unitary fibrous structure.
  11. The method of Claim 10, wherein the step of providing a molding member comprises providing a molding member including a patterned framework selected from the group consisting of a substantially continuous pattern, a substantially semi-continuous pattern, a discrete pattern, or any combination thereof.
  12. The method of any of the preceding claims wherein the first plurality of fibers include synthetic fibers and the second plurality of fibers include cellulosic fibers.
  13. The method of Claim 12 further including the step of redistributing at least some of the synthetic fibers to form a unitary fibrous structure in which at least some of the plurality of synthetic fibers are distributed in a pattern different from the pattern formed by the pattern of channels.



14. The method of Claim 13, wherein the step of redistributing the synthetic fibers includes heating, cooling, mechanically manipulating and/or chemically manipulating at least a portion of some of the synthetic fibers.
15. A method for making a unitary fibrous structure, comprising steps of:
  - providing a first aqueous slurry comprising a plurality of synthetic fibers;
  - providing a second aqueous slurry comprising a plurality of cellulosic fibers;
  - depositing the first and second aqueous slurries onto a fluid-permeable forming member having a pattern of channels;
  - partially dewatering the deposited first and second slurries to form a fibrous web comprising a plurality of cellulosic fibers randomly distributed throughout at least one layer of the fibrous web and a plurality of synthetic fibers at least partially non-randomly distributed in the channels;
  - applying a fluid pressure differential to the fibrous web disposed on the molding member, thereby molding the fibrous web according to the pattern of channels, wherein the fibrous web disposed on the molding member comprises a first plurality of micro-regions corresponding to a plurality of fluid-permeable areas of the molding member and a second plurality of micro-regions corresponding to a plurality of fluid-impermeable areas of the molding member; and
  - transferring the fibrous web from the molding member to a drying surface, thereby forming the unitary fibrous structure in which at least some of the plurality of synthetic fibers are disposed in a predetermined pattern and the plurality of cellulosic fibers remain generally randomly distributed throughout at least one layer of the fibrous structure.
16. The method of Claim 15 further including the step of:
  - heating the fibrous web to a temperature sufficient to cause redistribution of at least some of the synthetic fibers in the fibrous web, thereby forming the unitary fibrous structure in which some of the plurality of synthetic fibers are re-distributed, while the plurality of cellulosic fibers remain generally randomly distributed throughout at least one layer of the fibrous structure.

17. The method of Claims 15-16, wherein the step of heating the fibrous web occurs when the fibrous web is disposed on the molding member and/or the drying surface.
18. The method of any of the preceding claims, wherein the unitary fibrous structure is creped, uncreped, and/or embossed.
19. The method of any of the preceding claims wherein the unitary fibrous structure is combined with a separate unitary structure to form a multi-ply web.
20. The method of any of the preceding claims including the further step of providing a latex to at least a portion of at least one surface of the unitary fibrous structure.

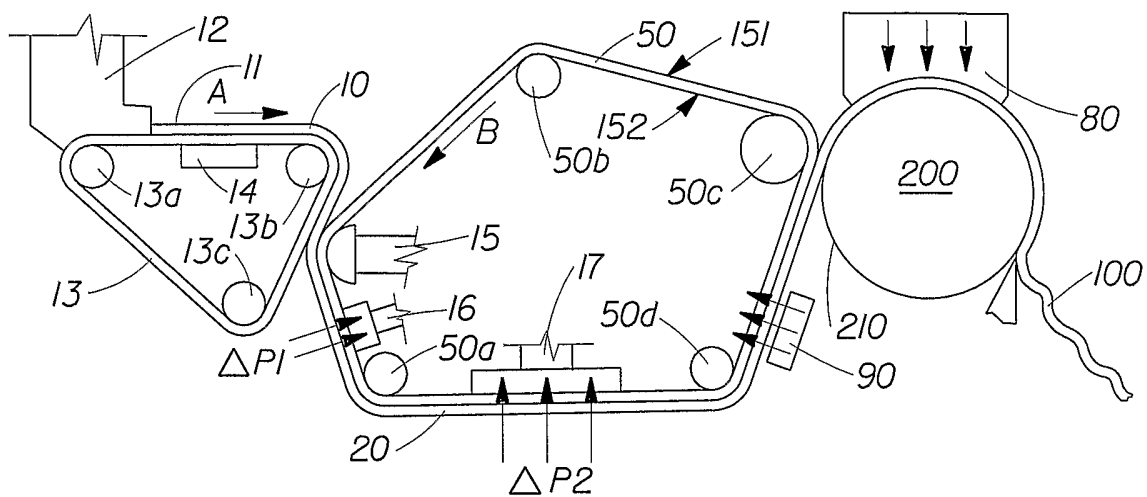


Fig. 1

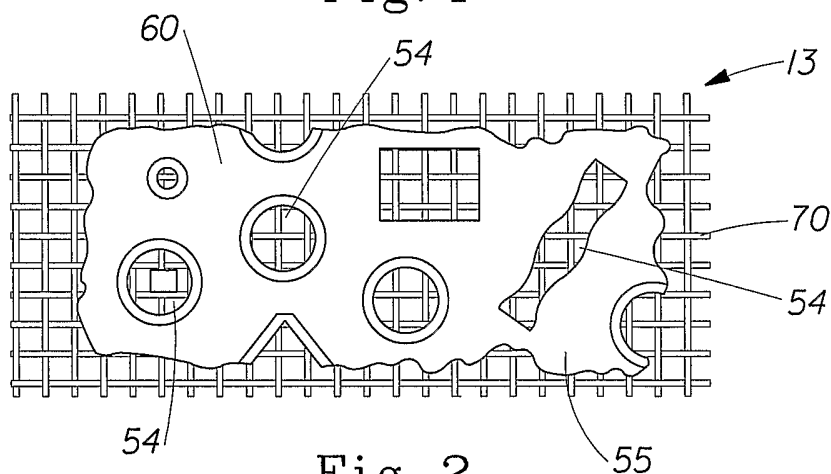


Fig. 2

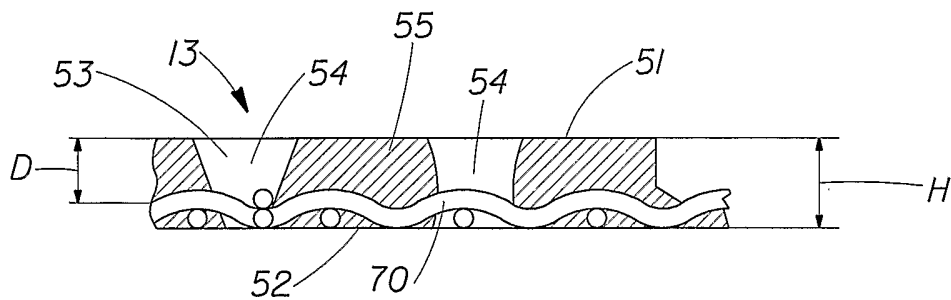


Fig. 3

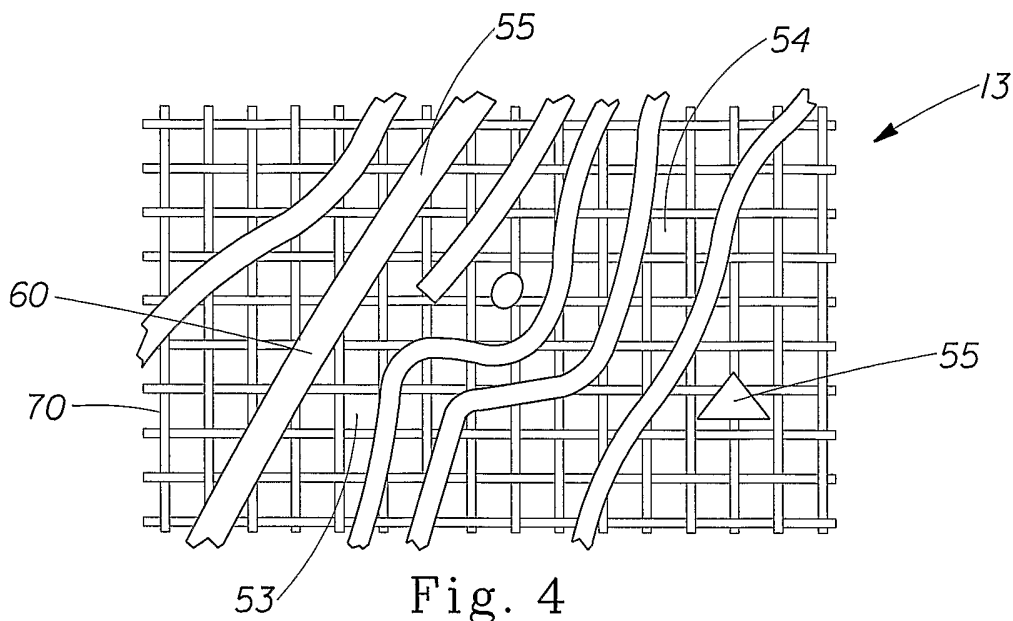


Fig. 4

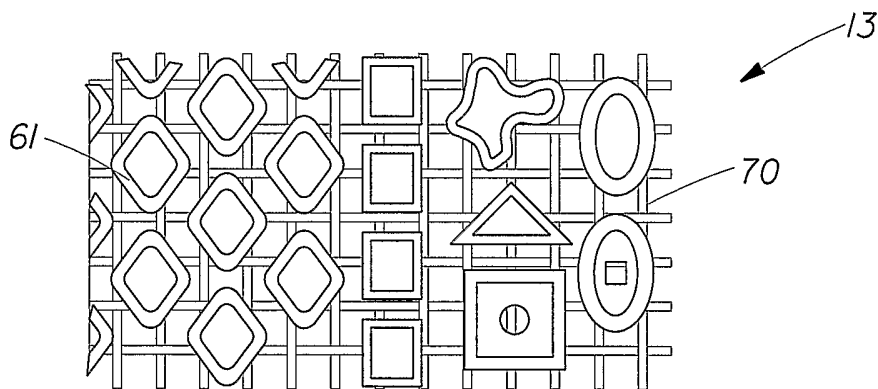


Fig. 5

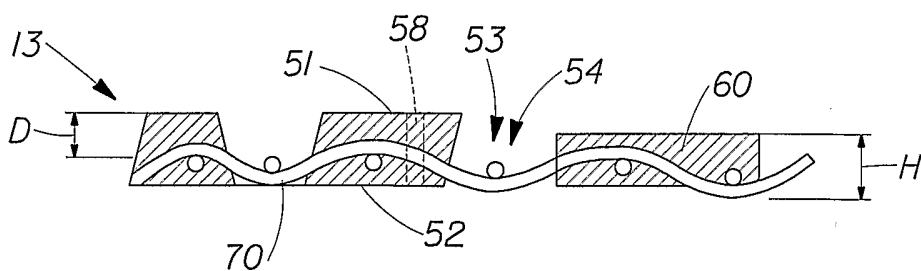


Fig. 6

3/5

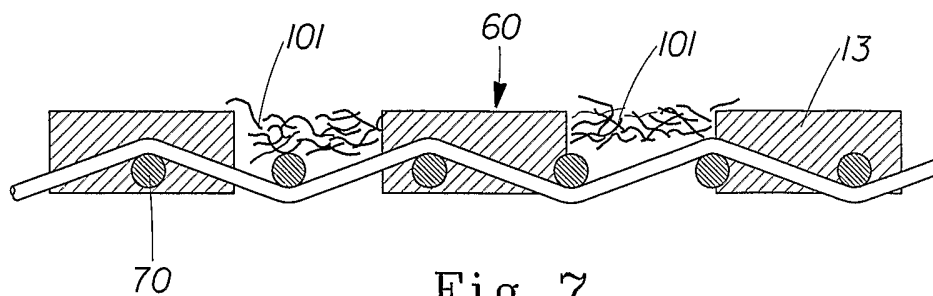


Fig. 7

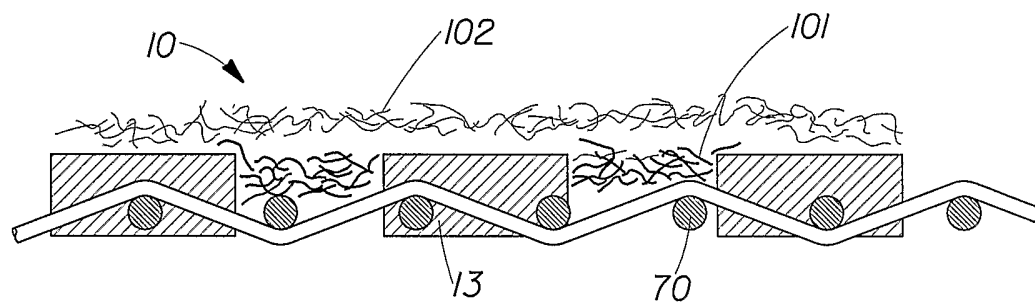


Fig. 8

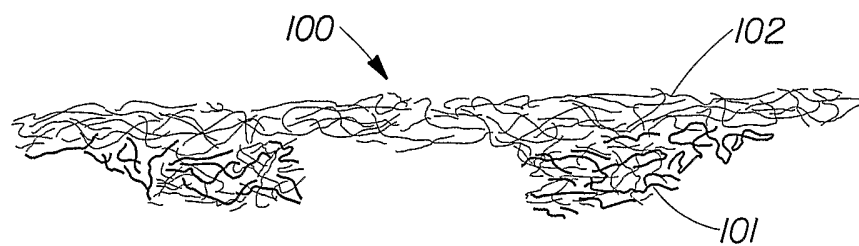


Fig. 9

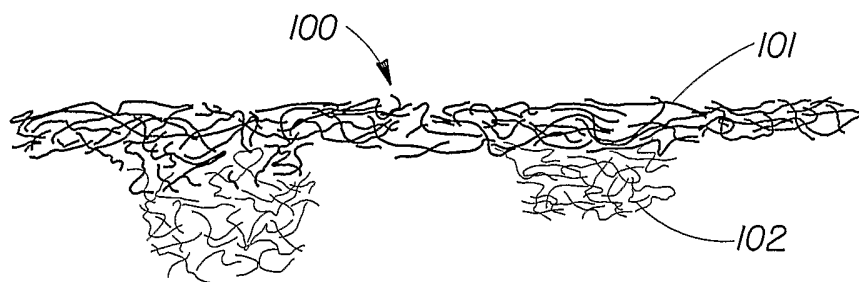


Fig. 9A

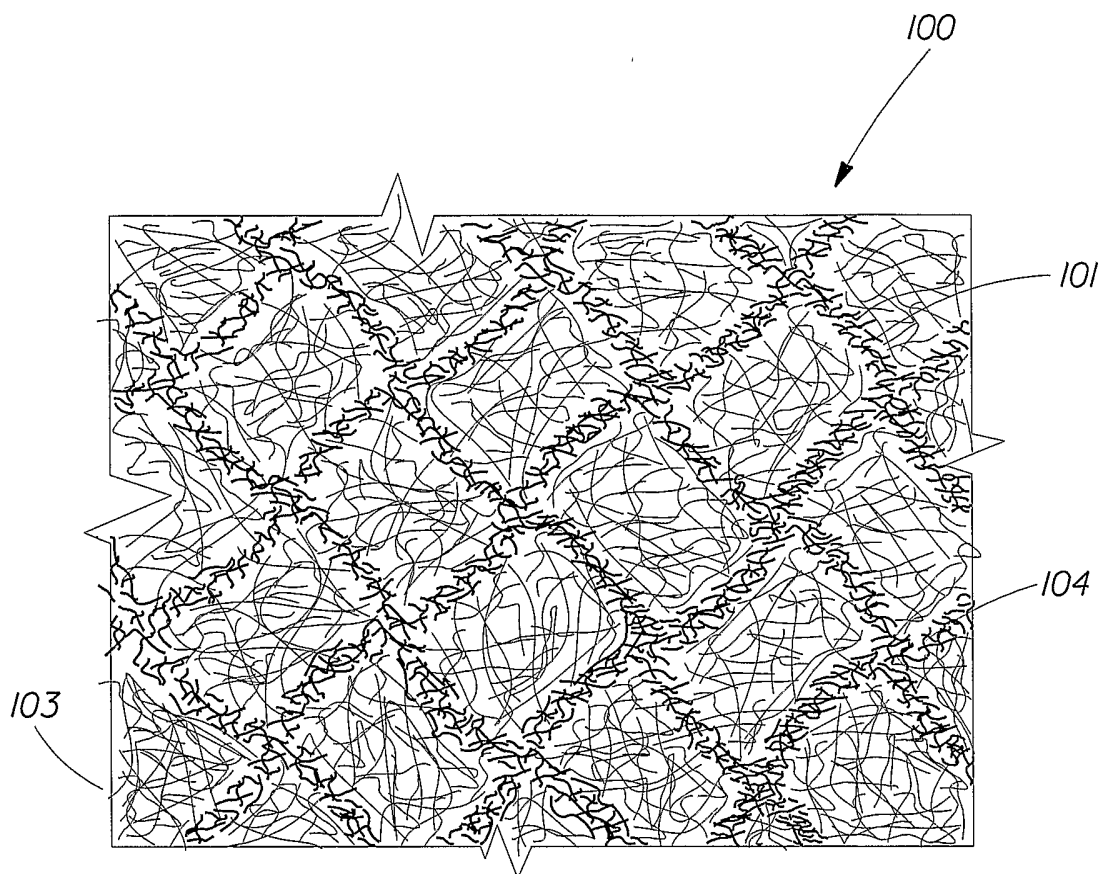


Fig. 10

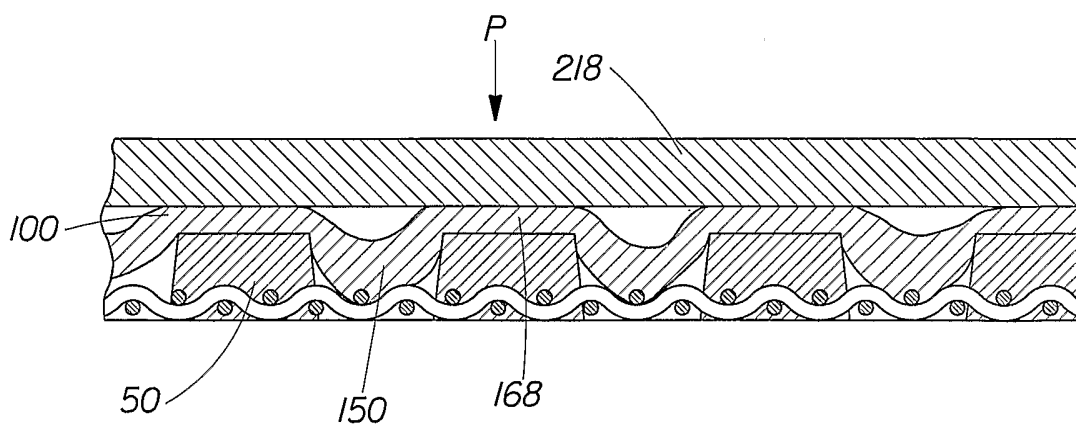


Fig. 11

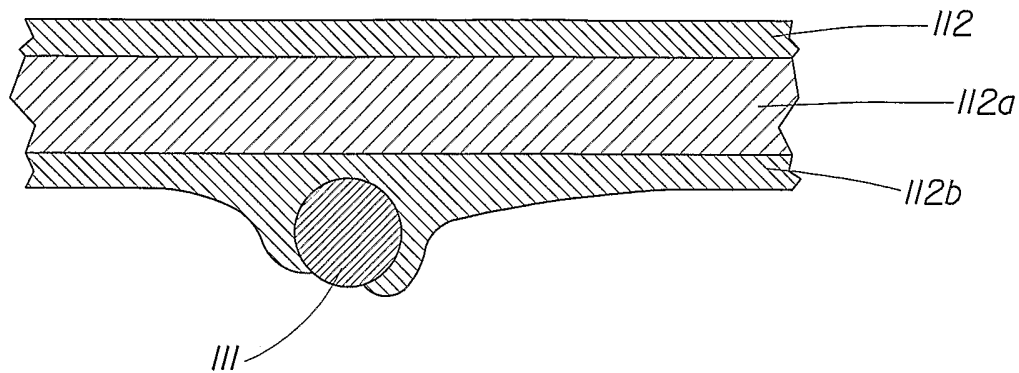


Fig. 12

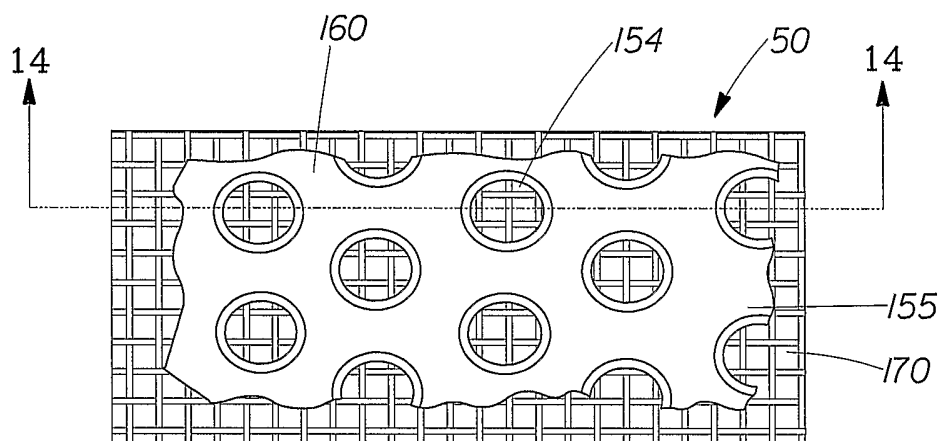


Fig. 13

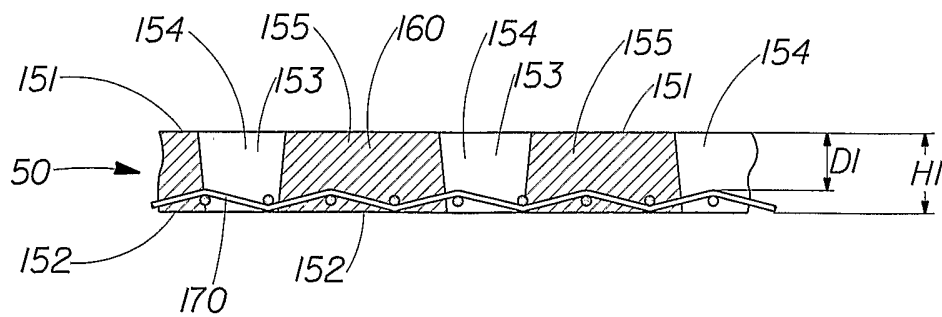


Fig. 14

# INTERNATIONAL SEARCH REPORT

Application No  
PCT/US2004/003337

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 D21F11/04 D21F11/14 D21F11/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 D21F D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X  A   Y	<p>EP 1 236 827 A (KIMBERLY CLARK CO) 4 September 2002 (2002-09-04)</p> <p>paragraphs '0102!, '0104! figures 1-4</p> <p style="text-align: center;">-----</p> <p>WO 00/39394 A (KIMBERLY CLARK CO) 6 July 2000 (2000-07-06) abstract page 6, line 31 - page 7, line 24 page 8, lines 17-32 example 1 figures</p> <p style="text-align: center;">-----</p> <p style="text-align: center;">-/--</p>	<p>1-7</p> <p>15, 19, 20</p> <p>15-18</p>

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

5 July 2004

Date of mailing of the international search report

13/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Pregetter, M



INTERNATIONAL SEARCH REPORT

Application No  
PCT/US2004/003337

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 93/14267 A (JAMES RIVER CORP) 22 July 1993 (1993-07-22) abstract page 4, line 11 - page 8, line 15 figures -----	15-18
A	US 5 245 025 A (VAN PHAN DEAN ET AL) 14 September 1993 (1993-09-14) cited in the application the whole document -----	1,15

INTERNATIONAL SEARCH REPORT

Application No  
PCT/US2004/003337

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1236827	A	04-09-2002	US 5990377 A	23-11-1999
			EP 1236827 A1	04-09-2002
			EP 1344511 A2	17-09-2003
			AU 6464698 A	20-10-1998
			AU 738012 B2	06-09-2001
			AU 6575798 A	20-10-1998
			BR 9808031 A	08-03-2000
			CA 2280018 A1	01-10-1998
			EP 0969787 A1	12-01-2000
			JP 2001521590 T	06-11-2001
			TW 410154 B	01-11-2000
			US 2002103469 A1	01-08-2002
			US 2002107495 A1	08-08-2002
			US 2002099347 A1	25-07-2002
			WO 9842289 A1	01-10-1998
			WO 9842290 A1	01-10-1998
			US 6395957 B1	28-05-2002
			ZA 9802342 A	22-09-1998
-----				
WO 0039394	A	06-07-2000	AU 2059800 A	31-07-2000
			WO 0039394 A1	06-07-2000
-----				
WO 9314267	A	22-07-1993	EP 0575601 A1	29-12-1993
			WO 9314267 A1	22-07-1993
-----				
US 5245025	A	14-09-1993	AT 148188 T	15-02-1997
			AU 667819 B2	18-04-1996
			AU 2267692 A	25-01-1993
			BR 9206224 A	22-11-1994
			CA 2110186 A1	07-01-1993
			CN 1068863 A ,B	10-02-1993
			CZ 9302879 A3	17-08-1994
			CZ 289880 B6	17-04-2002
			DE 69217053 D1	06-03-1997
			DE 69217053 T2	15-05-1997
			DK 591418 T3	23-06-1997
			EP 0591418 A1	13-04-1994
			ES 2096762 T3	16-03-1997
			FI 935864 A	10-02-1994
			GR 3022365 T3	30-04-1997
			HK 1006581 A1	05-03-1999
			HU 67765 A2	28-04-1995
			IE 922097 A1	30-12-1992
			JP 3162382 B2	25-04-2001
			JP 6508664 T	29-09-1994
			KR 240361 B1	15-01-2000
			MX 9203472 A1	01-12-1993
			NO 934809 A	28-02-1994
			NZ 243327 A	26-04-1996
			NZ 270552 A	26-04-1996
			PL 170987 B1	28-02-1997
			PT 101144 A ,B	29-10-1993
			SG 52317 A1	28-09-1998
			SK 148093 A3	07-09-1994
			US 5503715 A	02-04-1996
			WO 9300474 A1	07-01-1993