




(12) **DEMANDE DE BREVET CANADIEN**  
**CANADIAN PATENT APPLICATION**  
(13) **A1**

|                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>(22) Date de dépôt/Filing Date: 2018/06/26</p> <p>(41) Mise à la disp. pub./Open to Public Insp.: 2019/03/13</p> <p>(30) Priorité/Priority: 2017/09/13 (US15/703,510)</p> | <p>(51) Cl.Int./Int.Cl. <i>B29C 64/106</i> (2017.01),<br/><i>B32B 3/08</i> (2006.01), <i>B33Y 40/00</i> (2015.01),<br/><i>B33Y 80/00</i> (2015.01)</p> <p>(71) Demandeur/Applicant:<br/>AURORA FLIGHT SCIENCES CORPORATION, US</p> <p>(72) Inventeurs/Inventors:<br/>RILEY, P. GRAVES H., US;<br/>CAMPBELL, DANIEL S., US;<br/>COTTRELL, DANIEL, US</p> <p>(74) Agent: SMART &amp; BIGGAR</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

(54) Titre : STRUCTURES COMPOSITES INCORPORANT DES COMPOSANTES FABRIQUEES DE MANIERE ADDITIVE

(54) Title: COMPOSITE STRUCTURES INCORPORATING ADDITIVE MANUFACTURED COMPONENTS

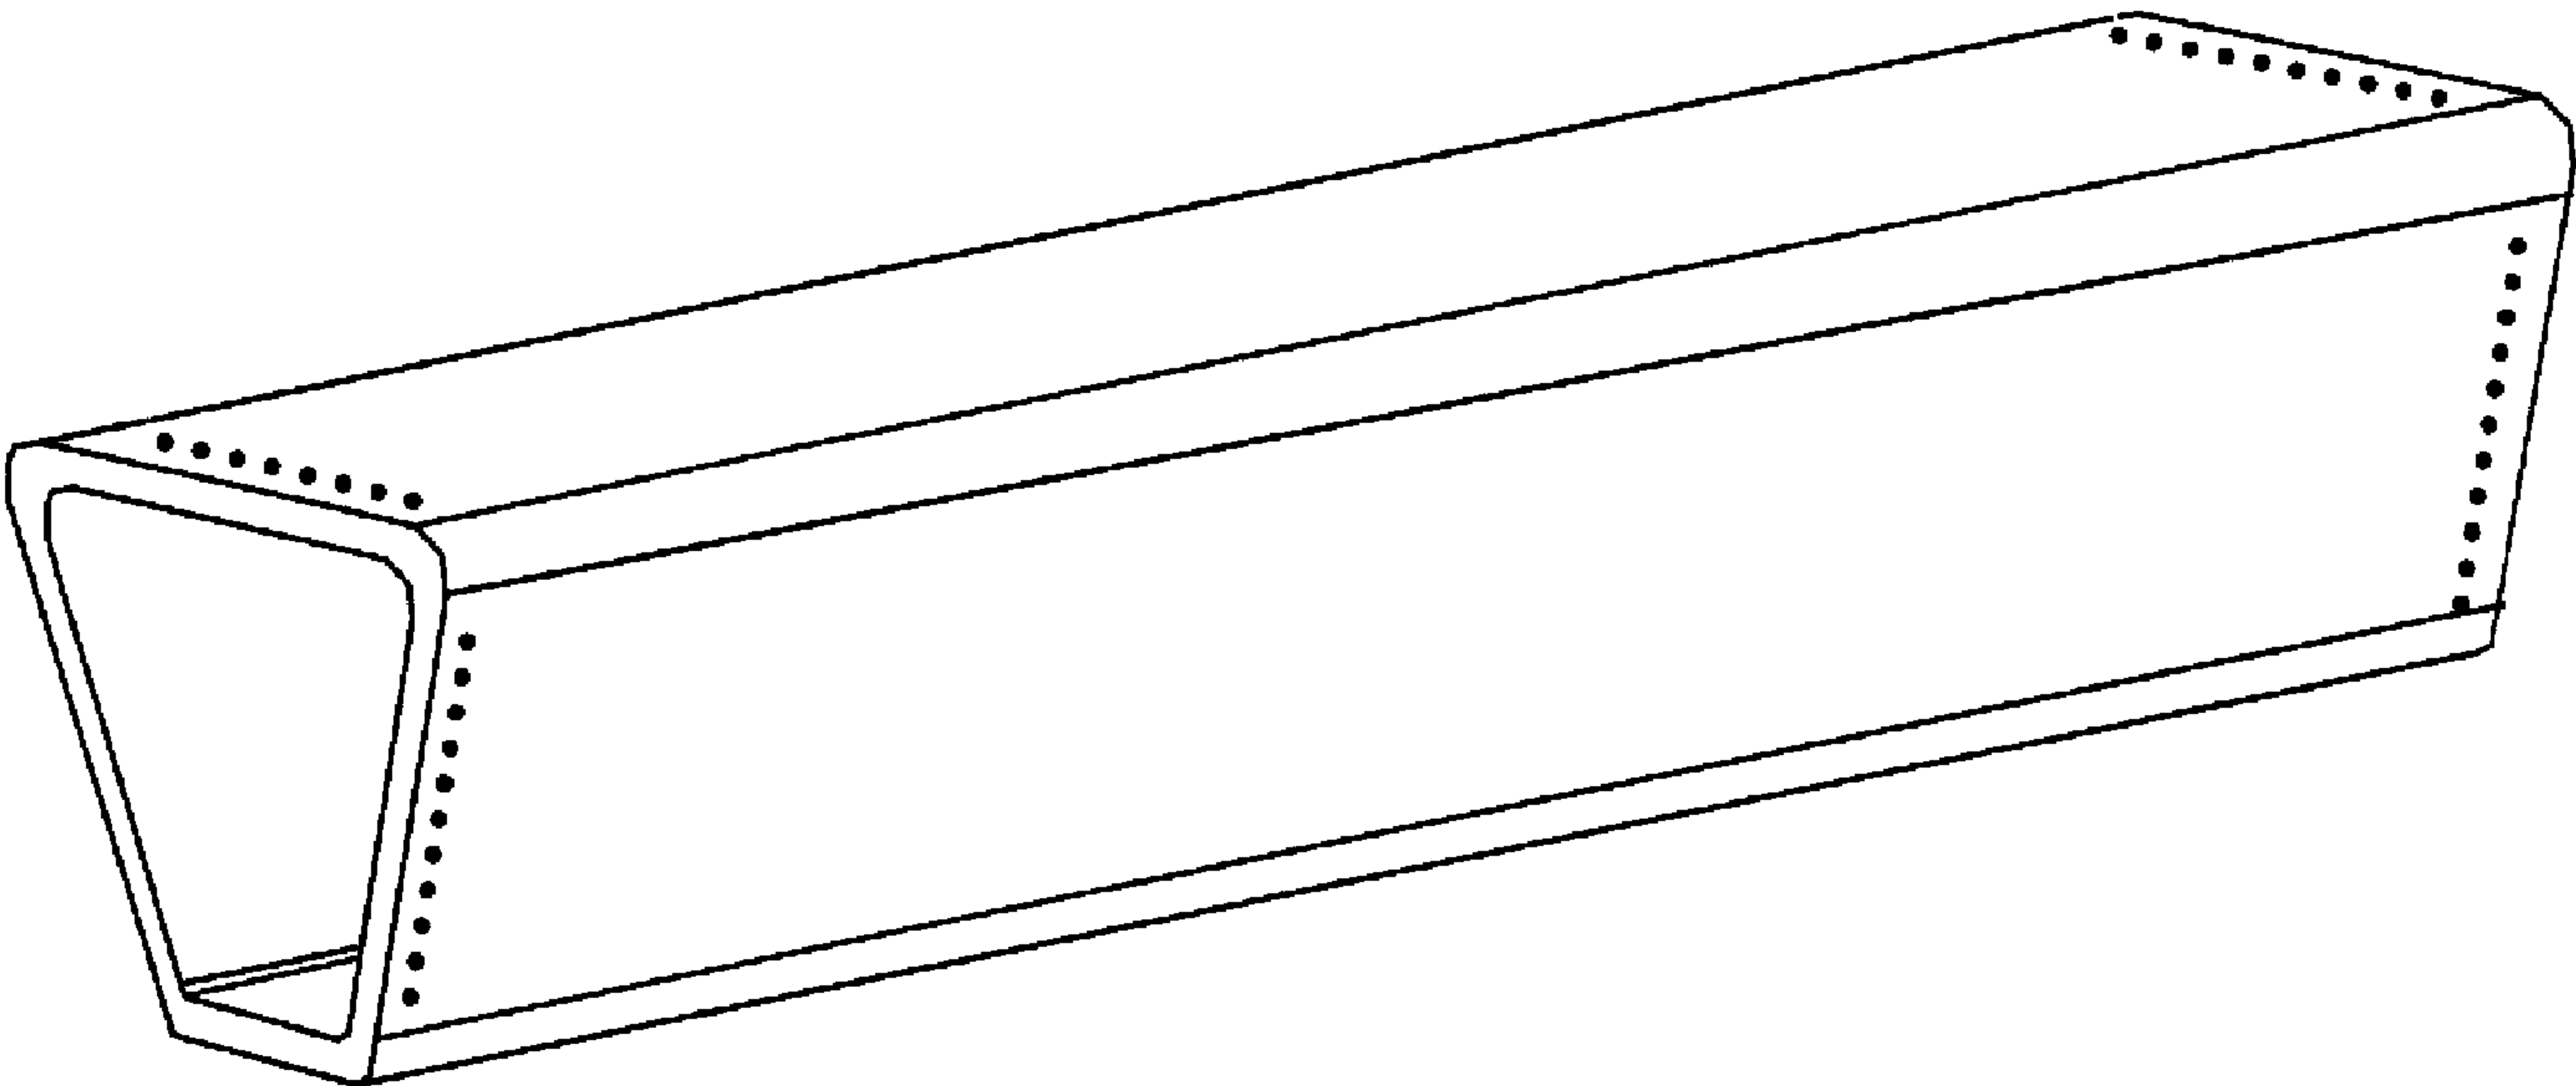

(57) Abrégé/Abstract:

A method of manufacturing a composite structure, comprises applying a first composite layer to a tooling surface of a tool positioning an additive manufactured component over at least a portion of the first composite layer, and applying a second composite layer over at least a portion of the composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component is embedded between the first and second composite layers.

## **ABSTRACT**

A method of manufacturing a composite structure, comprises applying a first composite layer to a tooling surface of a tool positioning an additive manufactured component over at least a portion of the first composite layer, and applying a second composite layer over at least a portion of the composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component is embedded between the first and second composite layers.

# **COMPOSITE STRUCTURES INCORPORATING ADDITIVE**

## **MANUFACTURED COMPONENTS**

### **TECHNICAL FIELD**

The present disclosure is directed the use of additive manufacturing in combination with composite structures and, more specifically to the incorporation of additive manufactured components into composite structures.

### **BACKGROUND**

Over recent years, composite materials have become an increasingly desirable material for aircraft structures. Composite materials typically comprise strands of fibers (e.g., glass- and/or carbon-fiber) mixed with a resin. For example, many commercially produced composites use a polymer matrix material as the resin. Common composite materials used on airplanes include fiberglass, carbon fiber, and fiber-reinforced matrix systems, or any combination of any of these. In fact, there are many different polymers available, depending upon the starting raw ingredients. The more common polymer may include, for example, polyester, vinyl ester, epoxy, phenolic, polyimide, polyamide, polypropylene, and PEEK. During fabrication, fibers may be often wound, or woven, into a sheet of material and then impregnated (e.g., infused) with a resin. Once the fibers have been impregnated with a resin, the composite material may then be formed into the desired shape and cured until properly hardened.

Composite materials have an advantage of being extremely lightweight and having high strength. As a result, they are useful in, among other things, aircraft applications. Additionally, composite structures may be molded into desired shapes and configurations. While many parts manufactured using composite materials could also be made from metal, a metallic part of the same strength and stiffness would be significantly heavier.

However, manufacturing components using composite materials can be time-consuming and labor intensive, especially when complex structures are needed. An additional drawback of certain composite materials is the actual assembly, or joining, of the composite materials. Unlike more traditional materials (e.g., metals), different considerations must be made for assembling composite materials. For example, placing holes in composite materials for attachment of fasteners severs the strands of fibers within the material and creates weak points within the material. While forming holes in the composite material by displacing the strands of the uncured fibers prevents severing of the fibers, this process is time-consuming and often impractical. Another alternative for assembling composite materials is the use of high-strength epoxies. Epoxies have an advantage of limiting the number of manufacturing steps. However, the distribution of the epoxy and the placement of the parts together can require expensive machines and numerous jigs (e.g., tooling). Moreover, such structures routinely involve multiple sets of tools, are very labor intensive, require several cure cycles and can require B-staged material with set expiration dates.

Additive manufacturing techniques, *i.e.*, 3-D printing, are beneficial to traditional composite material manufacturing techniques in that they provide the ability to rapidly produce and iterate printed polymeric components at reduced cost and time in comparison to composite material manufacturing techniques. Additive manufacturing processes also allow implementation of unique features into the printed component, which are difficult to produce using composite manufacturing methods. However, it is difficult for polymers to match the mechanical performance of composite materials. As a result, polymers are often not viable materials for large-scale use in constructing aircraft components.

Accordingly, there is a need in the art, for a method of manufacturing structures that leveraging the benefits of composite materials and additive manufactured components, while alleviating the drawbacks discussed above.

## **BRIEF SUMMARY**

The present disclosure endeavors to provide for the incorporation of additive manufactured components into composite structures.

According to a first aspect, a method of manufacturing a composite structure comprises: applying a first composite layer to a tooling surface of a tool; positioning an additive manufactured component over at least a portion of the first composite layer; and applying a second composite layer over at least a portion of the composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component is embedded between the first and second composite layers.

In certain aspects, the method further comprises the step of curing the composite structure after applying the second composite layer.

In certain aspects, the method further comprises the step of removing at least a portion of one of the first and second composite layers following curing to expose a portion of the additive manufactured component.

In certain aspects, the method further comprises the step of providing the additive component with a feature to facilitate post-curing removal of at least a portion of one of the first and second composite layers.

In certain aspects, the feature is configured to interface with a cutting tool to facilitate post-curing removal of at least a portion of one of the first and second composite layers.

In certain aspects, the method further comprises the step of providing the additive manufactured component with a feature configured to mate with a second structure for interconnecting the composite structure with the second structure. The second structure may include a composite structure manufactured according to the method above.

In certain aspects, the additive manufacture component is entirely embedded between the first and second composite layers.

In certain aspects, the method further comprises the step of removing a portion of at least one of the first and second composite layers to expose a portion of the additive manufactured component.

In certain aspects, the composite structure is cured prior to removing a portion of at least one of the first and second composite layers.

In certain aspects, the step of removing comprises cutting a portion of at least one of the first and second composite layers.

In certain aspects, the additive manufacture component comprise a printed thermoplastic material.

In certain aspects, the first and second composite layers are formed of the same material.

In certain aspects, the composite structure comprises an aircraft component.

In certain aspects, the method further comprises the step of providing locating features on the tool and the additive manufactured component to facilitate orientation of the additive manufactured component relative to the tool during the position step.

In certain aspects, the locating features comprise magnets.

In certain aspects, the locating features comprise magnets mounted in at least one of the tool and the additive manufactured component.

According to a second aspect, a composite structure comprises: first and second composite layers; and an additive manufactured component at least partially embedded between the first and second composite layers.

In certain aspects, the additive manufactured component comprises an exposed portion that is not embedded between the first and second composite layers.

In certain aspects, the exposed portion includes a connection feature configured to mate with a second structure for interconnecting the composite structure with the second structure.

In certain aspects, the additive component comprises a feature to facilitate removal of at least a portion of one of the first and second composite layers.

In certain aspects, the feature is configured to interface with a cutting tool to facilitate removal of at least a portion of one of the first and second composite layers.

In certain aspects, the additive manufacture component comprise a printed thermoplastic material.

In certain aspects, the first and second composite layers are formed of the same material.

According to a third aspect, a composite structure formed by the process of: applying a first composite layer to a tooling surface of a tool; positioning an additive manufactured component over at least a portion of the first composite layer; and applying a second composite layer over at least a portion of the composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component is embedded between the first and second composite layers.

In certain aspects, the process further comprises the step of curing the composite structure after applying the second composite layer.

In certain aspects, the process further comprises the step of removing at least a portion of one of the first and second composite layers following curing to expose a portion of the additive manufactured component.

In certain aspects, the process further comprises the step of providing the additive component with a feature to facilitate post-curing removal of at least a portion of one of the first and second composite layers.

In certain aspects, the feature is configured to interface with a cutting tool to facilitate post-curing removal of at least a portion of one of the first and second composite layers.

An embodiment described herein involves a method of manufacturing a composite structure that includes applying a first composite layer to a tooling surface of a tool; positioning an additive manufactured component over at least a portion of the first composite layer; and applying a second composite layer over at least a portion of the composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component may be embedded between the first and second composite layers. The method may also include curing the composite structure after applying the second composite layer. The method may also include removing at least a portion of one of the first and second composite layers following curing to expose a portion of the additive manufactured component. The method may also include providing the additive component with a feature to facilitate post-curing removal of at least a portion of one of the first and second composite layers. The feature may be configured to interface with a cutting tool to facilitate post-curing removal of at least a portion of one of the first and second composite layers. The method may also include providing the additive manufactured component with a feature configured to mate with a second structure for interconnecting the composite structure with the second structure. The additive manufacture component may be entirely embedded between the first and second composite layers. The method may also include removing a portion of at least one of the first and second composite layers to expose a portion of the additive manufactured component. The composite structure may be cured prior to removing a portion of at least one of the first and second composite layers. The step of removing may include cutting a portion of at least one of the first and second composite layers. The additive manufacture component may include a printed thermoplastic material. The method may also include providing locating features on the tool and the additive manufactured component to facilitate orientation of the additive manufactured component relative to the tool during the position step. The locating features may include magnets mounted in at least one of the tool and the additive manufactured component.

Another embodiment involves a composite structure that includes first and second composite layers; and an additive manufactured component at least partially embedded between the first and second composite layers. The additive manufactured component may include an exposed portion that is not embedded between the first and second composite layers. The exposed portion may include a connection feature configured to mate with a second structure for interconnecting the composite structure with the second structure. The additive component may include a feature to facilitate removal of at least a portion of one of the first and second composite layers. The feature may be configured to interface with a cutting tool to facilitate removal of at least a portion of one of the first and second composite layers. The additive manufacture component may include a printed thermoplastic material.

Another embodiment involves a composite structure formed by the process of: applying a first composite layer to a tooling surface of a tool; positioning an additive manufactured component over at least a portion of the first composite layer; and applying a second composite layer over at least a portion of the composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component may be embedded between the first and second composite layers. The process may also include the step of curing the composite structure after applying the second composite layer. The process may also include the step of removing at least a portion of one of the first and second composite layers following curing to expose a portion of the additive manufactured component. The process may also include the step of providing the additive component with a feature to facilitate post-curing removal of at least a portion of one of the first and second composite layers, wherein said feature is configured to interface with a cutting tool to facilitate post-curing removal of at least a portion of one of the first and second composite layers.

## **BRIEF DESCRIPTION OF THE FIGURES**

These and other advantages of the present disclosure will be readily understood with the reference to the following specifications and attached drawings wherein:

Figure 1 illustrates an exemplary embodiment of a composite structure with embedded additive manufactured components.

Figures 2A through 2H illustrate a method of manufacturing a composite structure with embedded additive manufactured components.

Figures 3A and 3B illustrate an additive manufactured sacrificial cap and an additive manufactured sacrificial pi-clip that are co-cured between composite layers according an exemplary embodiment.

Figures 4A and 4B illustrate an additive manufactured sacrificial cap with an additive manufactured skin-joiner that are co-cured between composite layers according an exemplary embodiment.

Figures 5A and 5B illustrate certain aspects of an additive manufactured sacrificial cap that is co-cured with an additive manufactured antenna between composite layers according to an exemplary embodiment.

Figures 6A through 6C certain aspects of an additive manufactured skin joiner that is co-cured between composite layers according to an exemplary embodiment.

Figures 7A through 7D illustrate certain aspects of magnetic locating features according to an exemplary embodiment.

## **DETAILED DESCRIPTION**

Preferred embodiments of the present disclosure will be described below with reference to the accompanying drawings. In the following description, certain well-known functions or constructions are not described in detail since they would obscure the disclosure in unnecessary detail. For this application, the following terms and definitions shall apply:

As used herein, the words “about” and “approximately,” when used to modify or describe a value (or range of values), mean reasonably close to that value or range of values. Thus, the embodiments described herein are not limited to only the recited values and ranges of values, but rather should include reasonable workable deviations.

As used herein, the terms “aerial vehicle” and “aircraft” refer to a machine capable of flight, including, but not limited to, traditional aircraft and vertical takeoff and landing (VTOL) aircraft. VTOL aircraft may include both fixed-wing aircraft, rotorcraft (e.g., helicopters), and/or tilt-rotor/tilt-wing aircraft.

The term “composite material” as used herein, refers to a material comprising an additive material and a matrix material. For example, a composite material may comprise a fibrous additive material (e.g., fiberglass, glass fiber (“GF”), carbon fiber (“CF”), aramid/para-aramid synthetic fibers, etc.) and a matrix material (e.g., epoxies, polyimides, and alumina, including, without limitation, thermoplastic, polyester resin, polycarbonate thermoplastic, casting resin, polymer resin, acrylic, chemical resin). In certain aspects, the composite material may employ a metal, such as aluminum and titanium, to produce fiber metal laminate (FML) and glass laminate aluminum reinforced epoxy (GLARE). Further, composite materials may include hybrid composite materials, which are achieved via the addition of some complementary materials (e.g., two or more fiber materials) to the basic fiber/epoxy matrix.

The term “composite laminates” as used herein, refers to a type of composite material assembled from layers (*i.e.*, a “ply”) of additive material and a matrix material.

The term “composite structure” as used herein, refers to structures or components fabricated, at least in part, using a composite material, including, without limitation, composite laminates.

The term “exemplary” means serving as a non-limiting example, instance, or illustration. As utilized herein, the terms “e.g.,” and “for example” set off lists of one or more non-limiting examples, instances, or illustrations.

The term “tool” and “tooling” as used herein refers to a mold or similar structure used to form a structure, such as a composite structure fabricated from a composite material.

Disclosed herein are techniques for manufacturing composite structures that incorporate additive manufacture components. Additive manufacturing techniques are beneficial to traditional composite material manufacturing techniques in that they provide the ability to rapidly produce and iterate printed thermoplastic material components at reduced cost and time in comparison to composite material manufacturing techniques. Additive manufacturing also allows the creation of complex shapes and features that can be difficult to achieve with composite manufacturing methods. For example, as described below, features can be formed in printed thermoplastic components to facilitate interconnection of composite structures that incorporate such printed thermoplastic components.

A printed thermoplastic material component, whether a single piece component or a multi-piece component, may be printed through one or more additive manufacturing techniques, also referred to as three-dimensional (3D) printing. Additive manufacturing generally refers to processes used to fabricate a 3D object in which successive layers of material (e.g., thermoplastic) are formed under computer control to create the 3D object (e.g., a printed material tool, such as a printed thermoplastic material part or component), which can be of almost any shape or geometry. The printed thermoplastic material component may be produced from digital model data or another electronic data source such as an additive manufacturing file (AMF) file (e.g., a Stratasys CMB file). In other words, the designer can create the design model for a printed thermoplastic material component in a digital space using a modeling program (e.g., a computer-aided design (CAD) package). A design model created with CAD (as opposed to scanning) may facilitate a reduction in errors, which can be corrected before printing the 3D object, thereby allowing verification in the design of the object before it is printed.

Additive manufacturing techniques print objects in three dimensions, therefore both the minimum feature size (*i.e.*, resolution) of the XY plane (horizontal resolution) and the layer height in Z-axis (vertical resolution) are considered in overall printer resolution.

Horizontal resolution is the smallest movement the printer's extruder can make within a layer on the X and the Y axis, while vertical resolution is the minimal thickness of a layer that the printer produces in one pass. Printer resolution describes layer thickness and X-Y resolution in dots per inch (dpi) or micrometers ( $\mu\text{m}$ ). The particles (3D dots) in the horizontal resolution can be around **50 to 100  $\mu\text{m}$  (510 to 250 DPI)** in diameter. Typical layer thickness (vertical resolution) is around **100  $\mu\text{m}$  (250 DPI)**, although the layers may be as thin as **16  $\mu\text{m}$  (1,600 DPI)**. The smaller the particles, the higher the horizontal resolution (*i.e.*, higher the details the printer produces). Similarly, the smaller the layer thickness in Z-axis, the higher the vertical resolution (*i.e.*, the smoother the printed surface will be). The printing process in a higher vertical resolution printing, however, will take longer to produce finer layers as the printer has to produce more layers. Accordingly, the printed thermoplastic material component can be printed with great accuracy and with numerous details, which may be advantageous, for example, in creating components requiring complex and/or precise features.

Figure 1 illustrates an exemplary embodiment of a composite structure with embedded additive manufactured components. Specifically, Figure 1 is a generic and simplified aircraft fuselage structure **100** that shown for explanation purposes. Traditional composite manufacturing processes are expensive and labor intensive. Through the selective incorporation of additive manufactured components into composite structures, the overall cost, time, and skill required to manufacture composite structures, such as aircraft parts, can be reduced. For example, as discussed below, the benefits of additive manufacturing can be leveraged into the manufacture of composite structures, such as a fuselage structure, by splitting a fuselage structure into sections, *e.g.*, along a natural mold lines, and using 3D printed joint component to interconnect the completed sections of the fuselage structure. For example, the 3D printed joint components can be embedded into (and co-cured with) the composite material during construction of the fuselage sections. In certain aspects, portions of the joint components may be exposed (either pre or post cure) to allow the fuselage sections to be interconnected via the mating 3D printed joint structures to assemble the completed fuselage structure.

Figures 2A through 2H illustrate a method of manufacturing a composite structure with embedded additive manufactured components, such as the exemplary fuselage structure **100** of Figure 1. Figure 2A illustrates a cross-sectional view of an exemplary manufacturing tool **200** that can be used in manufacturing a composite structure with embedded additive manufactured (e.g., 3D printed plastic) components according to certain aspects of the present disclosure. The tool **102** includes a tooling surface **104** that defines a predetermined shape for the resulting composite structure. For example, in the illustrated embodiment, the tooling surface may correspond to a section of the aircraft fuselage structure **100**. Other sections (not shown) of the fuselage structure can be manufactured in a similar fashion.

The manufacturing tool **102** may be constructed in accordance with the principles described in co-pending commonly-owned U.S. Provisional Patent Application Serial No. **62/410,181**, which was filed on October 19, 2016, is entitled "Increased Utility Composite Tooling through Additive Manufacturing," the entire disclosure of which is incorporated herein by reference. The tool **102** may be fabricated from a printed thermoplastic material, such a high-performance fused deposition modeling (FDM) thermoplastic. Suitable printed thermoplastic materials include, for example, polyetherimide (PEI), which offers excellent strength, thermal stability, and the ability to withstand autoclaving (high pressure and temperature). Polycarbonate is a suitable material for printed thermoplastic material tools due to its lower cost and ability to withstand the required **250°F** temperatures; however, other materials are contemplated as material selection is driven by the cure temperature for a given composite component. Therefore, other materials with higher, or lower, temperature tolerances may be employed depending on the application (e.g., the type of composite material).

In Figure 2B, a first (e.g., outer) composite layer **106** is applied to the tooling surface **104** of the tool **102**. The first composite layer **106** may be one of any number of composite materials. Suitable composite materials for aerial vehicles, include, without limitation, **977-3** resin and **IM7/977-3** pre-preg available from Cytec Industries, which is a toughened epoxy resin with **350° Fahrenheit (F) (177°C)** dry and **270°F (132°C)** wet service capability. Other types of composite materials may be used, however.

Accordingly, the tool **102** is capable of withstanding multiple cure cycles at, for example, at least **350°F** and a pressure of at least **90** pounds per square inch (PSI). As can be appreciated by those of ordinary skill in the art, the term pre-preg refers to “pre-impregnated” composite fibers where a material, such as epoxy is already present, in the composite fibers. Initially, pre-preg is flexible and sticky, but becomes hard and stiff once it has been heated (*i.e.*, during the curing process) and cooled. The first composite layer **106** may consist of a single layer or multiple layers of composite material. When multiple layers are used, the same or different composite materials may be used to form the first composite layer **106**.

Next, in Figure **2C-2D**, one or more additive manufactured components are positioned at selected locations over at least a portion of the first composite layer **106**. The tool **102** may be fabricated from a printed thermoplastic material, such a high-performance fused deposition modeling (FDM) thermoplastic or polycarbonate. As noted above, suitable printed thermoplastic materials include, for example, polyetherimide (PEI), Polycarbonate, etc.

In the illustrated embodiment, the additive manufactured components include a skin joiner **110** that runs horizontally along the top edge of the first composite layer **106** and a plurality of pi-clips **112** that run vertically (*i.e.*, perpendicular to the skin joiner **110**) between the top and bottom of the first composite layer. (See Figure **2C**). Additional additive manufactured components that are installed over the first composite layer may include core panels **114** (Figure **2D**) and an additive manufactured antenna **116** (Figure **2E**). As explained in greater detail below, locating features may be provided, *e.g.*, on the tool **102** and/or the additive manufactured components **110-116** to facilitate orientation of the additive manufactured component relative to the tool (and the first composite layer) when the additive manufactured components are being installed over the first composite layer.

Next, in Figure **2F**, a second or inner composite layer **120** is applied over at least a portion of the first composite layer **106** and at least a portion of the additive manufacture components **110-120** such that at least a portion of the additive manufactured

components are embedded between the first and second composite layers **104**, **120**. In the illustrated embodiment, the second composite layer **120** is generally coextensive with the first composite layer and the additive manufactured components **110-120** are completely or nearly completely embedded (or encapsulated) between the first and second composite layers. As with the first composite layer **106**, the second composite layer **120** may be comprised of multiple layers of the same or different composite materials. Likewise, the first and second composite layers **106**, **120** may comprise the same or different composite materials.

Following application of the second composite layer **120**, the resulting structure, (*i.e.*, composite structure with embedded additive manufacture components) and tool **104** may be bagged and cured in accordance with, for example, the bagging principles described in co-pending commonly-owned U.S. Patent Publication No. **2015/0210019A1**, which was published on July 30, 2015 and titled "Methods For Combining Components Of Varying Stages Of Cure," the entire disclosure of which is incorporated herein by reference. Once the composite structure is properly cured, the tool **104** may be broken down to allow for removal of the cured structure from the tool **104** (see, *e.g.*, Figures 2G and 2H, which illustrate cross sectional and isometric views of a cured composite structure).

Following curing, portions of the composite material layers **106**, **120** may be removed (*e.g.*, by cutting or trimming) to expose selected portions of the additive manufactured components. For example, in the illustrated example, sections of the second (inner) composite layer **120** are trimmed to expose selected portions of the pie-clips **112**, skin joiners **110**, and antenna **116**. With the pi-clips and skin joiners **110** appropriately trimmed, bulkheads **124** can be slid into place in the pi-clips (see, *e.g.*, Figures 2G and 2H) and secured in place with appropriate means, such as by bonding with epoxy or tape.

According to certain aspects of embodiments of the present disclosure, sacrificial components, which may be additively manufactured, may be embedded between the composite layers and subsequently removed after the curing process. For example,

Figures 3A and 3B illustrate an additive manufactured sacrificial cap **126** that is co-cured with the pi-clip **112** between the composite layers **106**, **120**. After curing, the second composite layer **120** is cut or trimmed to allow removal of the additive manufactured sacrificial cap **126**. As illustrated, the additive manufactured sacrificial cap **126** may be shaped to define channels to assist in cutting through the second composite layer **120**. Once the cap **126** is removed, a portion **128** of the pi-clip is exposed (see Figure 4B) while a portion **130** of the pi-clip **112** remains embedded between the first and second composite layers **106**, **120** to secure the pi-clip **112** in place. This technique may make it easier for the various components to bond more quickly.

The exposed portion **128** of the pi-clip **112** presents an interface **132** configured to mate with one of the bulkheads **124**. According to certain embodiments, the bulkhead **124** may also be manufactured as a composite structure with embedded additive manufactured components. According to one exemplary embodiment, the bulkhead **124** includes an additive manufactured component that presents a mounting interface which reciprocally mates with the mounting interface (e.g., slot **134** and profile **136**) of the pi-clip **112** to position the bulkhead relative the fuselage section. As illustrated, the bulkhead **124** may be slid onto the pi-clip **112** (e.g., the slot **134**) and bonded.

Another example of an additive manufactured sacrificial component is illustrated in Figures 4A and 4B. These figures illustrate an additive manufactured sacrificial cap **140** that is co-cured between composite layers **106**, **120** with an additive manufactured skin joiner **142**. The additive manufactured sacrificial cap **140** is removed, e.g., by cutting or trimming, following curing to expose a portion **144** of the skin joiner **142**. The exposed portion **144** of the skin joiner includes an interface **146** that mates with a reciprocal interface of a skin joiner on a second composite structure (e.g., fuselage section) (not shown) to permit the composite structures to be secured to one another. The sacrificial cap **140** covers the interface **146** during the curing process and ensures that the interface remains clean for subsequent joining of the composite structures to one another.

Similarly, Figures **5A** and **5B** illustrate an additive manufactured sacrificial cap that is co-cured with an additive manufactured antenna **116**. The additive manufactured sacrificial cap **150** may be removed, *e.g.*, by cutting or trimming, following curing to expose a portion (*e.g.*, the RF ports) of the antenna. The sacrificial cap **150** may serve to protect the embedded AM antenna during cure. Once cured, however, the sacrificial cap **150** can be removed to provide access to the antenna conduit and its electronics.

According to certain aspects of embodiments of the present disclosure, the additive manufactured components may incorporate features to facilitate post-curing removal of at least a portion of one of the first and second composite layers. For example, as is shown in Figures **6A** through **6C**, the exposed portion **144** of the skin joiner **142** can function as an index to guide a cutting tool **154**, such as a router, to permit precise removal/trimming of the first (outer) composite layer **106** along an edge of the skin joiner, resulting in a clean interface for subsequent joining of the composite structures, *e.g.*, fuselage sections, to one another.

As noted above, locating features may be provided to facilitate rapid and precise installation of the additive manufactured components relative to the composite layers. For example, the additive manufactured components may include printed markings, pins, stops, holes, guides, etc. to assist manufacturing technicians in position the additive manufactured components relative to one another and relative to the composite layers. According to one embodiment, the locating features may comprise magnetic locating features. For example, in certain embodiments magnets may be mounted in the tool **104** and the additive manufactured component. Alternatively, magnets may be mounted in tool **104** and a metallic element (or another magnet) may be mounted in the additive manufactured component or vice versa. The magnetic locating features may be used to properly and precisely orient the additive manufacture component relative to the tool **104** (and hence the first composite layer that is applied to the tooling surface).

Figures **7A** through **7C** illustrate an exemplary embodiment of the magnetic locating features. As shown, an array **160** of magnetic elements **162** is positioned on the tool **102**. In at least some embodiments, each magnetic element **162** is in the form of a

magnetic subarray **166** consisting of a plurality of magnets **168** arranged in a predefined pattern. According to some aspects the magnetic subarray comprises a plurality of magnets arranged in an opposed pole relation, where at least some magnets are aligned with the North pole facing in a first direction (e.g., out of the plane of the page in Figure 7B) and other magnets arranged with their North pole facing in the opposite direction (e.g., into the plane of the page in Figure 7B). According to one particular embodiment, each magnetic subarray consists of a plurality of individual magnets arranged in an X-shape (see, e.g., Figures 7B and 7D). In at least some embodiments, each X-shaped subarray consists of a center, North-pole magnet (i.e., North pole facing out of the page) and four South-pole magnets (South pole facing out of the page) arranged along the edges of the North-pole magnet. This magnet arrangement makes is easier for the components to properly snapped into place.

In some embodiments, the magnetic subarrays are mounted in pockets **174** formed in the manufacturing tool **102**. In the illustrated embodiment, the pockets are formed in a non-tooling portion of the tool **102**. In other embodiments, however, it may be desirable to form the in the tooling surface of the tool. In the illustrated embodiment, the magnets **168** and pockets **174** are both square shaped, which helps to orient and support the magnets **168** within the pockets and relative to one another. Additive manufactured inserts (e.g., plastic squares, not shown) may be provided to fill the voids between the magnets **168** within the pocket **174**. The additive manufactured inserts may be configured to fixedly secure the magnetic subarray in the pocket, e.g., by requiring the inserts to be press fit into the voids between the magnets **168** and the edges of the pocket.

Reciprocal magnetic elements (or metallic elements) carried by the additive manufactured components are configured to magnetically interface with the magnetic elements on the tool to position the additive manufactured component relative to the tool following application of the first composite layer. The magnetic interface between the tool and the additive manufactured component also functions to maintain the relative position of the additive manufactured component during subsequent application of the second composite layer and during the curing process. For example, magnetic

elements mounted in the pi-clips magnetically interface with magnetic elements in the tool to orient the pi-clips relative to the tool and first composite layer. In some embodiments, the magnetic array carried by the tool includes pair of vertically aligned magnetic elements, where each pair is used position a pi-clip relative to the first composite layer. In at least some embodiments, each magnetic element carried by the additive manufactured component is in the form of a magnetic subarray **176** consisting of a plurality of magnets **168** arranged in a predefined pattern. According to one particular embodiment, each magnetic subarray consists of a plurality of individual magnets arranged in an X-shape. (See Figure 7D). In at least some embodiments, each X-shaped subarray consists of a center south-pole magnet and four north-pole magnets arranged along the edges of the north-pole magnet, such that the magnetic subarrays **166**, **172** are attracted to one another when the additive manufactured component is properly positioned over the tool.


While the present disclosure has been described with respect to what is presently considered the preferred embodiments, it is to be understood that the concepts described herein are not limited to the disclosed embodiments. To the contrary, various modifications and equivalent arrangements may be made. The scope of the following claims is to be accorded the broadest interpretation to encompass all such modifications and equivalent structures and functions.

**EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**


1. A method of manufacturing a composite structure, comprising:
  - applying a first composite layer to a tooling surface of a tool;
  - positioning an additive manufactured component over at least a portion of the first composite layer; and
  - applying a second composite layer over at least a portion of the first composite layer and at least a portion of the additive manufactured component, wherein at least a portion of the additive manufactured component is embedded between the first and second composite layers.
2. The method of claim 1, further comprising curing the composite structure after applying the second composite layer.
3. The method of claim 2, further comprising removing at least a portion of one of the first and second composite layers following curing to expose a portion of the additive manufactured component.
4. The method of claim 3, further comprising providing the additive component with a feature to facilitate post-curing removal of at least a portion of one of the first and second composite layers.
5. The method of claim 4, wherein said feature is configured to interface with a cutting tool to facilitate post-curing removal of at least a portion of one of the first and second composite layers.

6. The method of any one of claims 1 – 5, further comprising providing the additive manufactured component with a feature configured to mate with a second structure for interconnecting the composite structure with the second structure.
7. The method of any one of claims 1 – 6, wherein the additive manufacture component is entirely embedded between the first and second composite layers.
8. The method of any one of claims 1 – 7, wherein the additive manufacture component comprise a printed thermoplastic material.
9. The method of any one of claims 1 – 8, further comprising providing locating features on the tool and the additive manufactured component to facilitate orientation of the additive manufactured component relative to the tool during the position step.
10. A composite structure, comprising:
  - first and second composite layers; and
  - an additive manufactured component at least partially embedded between the first and second composite layers.
11. The composite structure of claim 9, wherein the additive manufactured component comprises an exposed portion that is not embedded between the first and second composite layers.
12. The composite structure of claim 9 or claim 10, wherein the exposed portion includes a connection feature configured to mate with a second structure for interconnecting the composite structure with the second structure.


- 13.** The composite structure of claim **12**, wherein the additive component comprises a feature to facilitate removal of at least a portion of one of the first and second composite layers.
- 14.** The composite structure of claim **13**, wherein said feature is configured to interface with a cutting tool to facilitate removal of at least a portion of one of the first and second composite layers.
- 15.** The composite structure of claim **12**, wherein the additive manufacture component comprise a printed thermoplastic material.

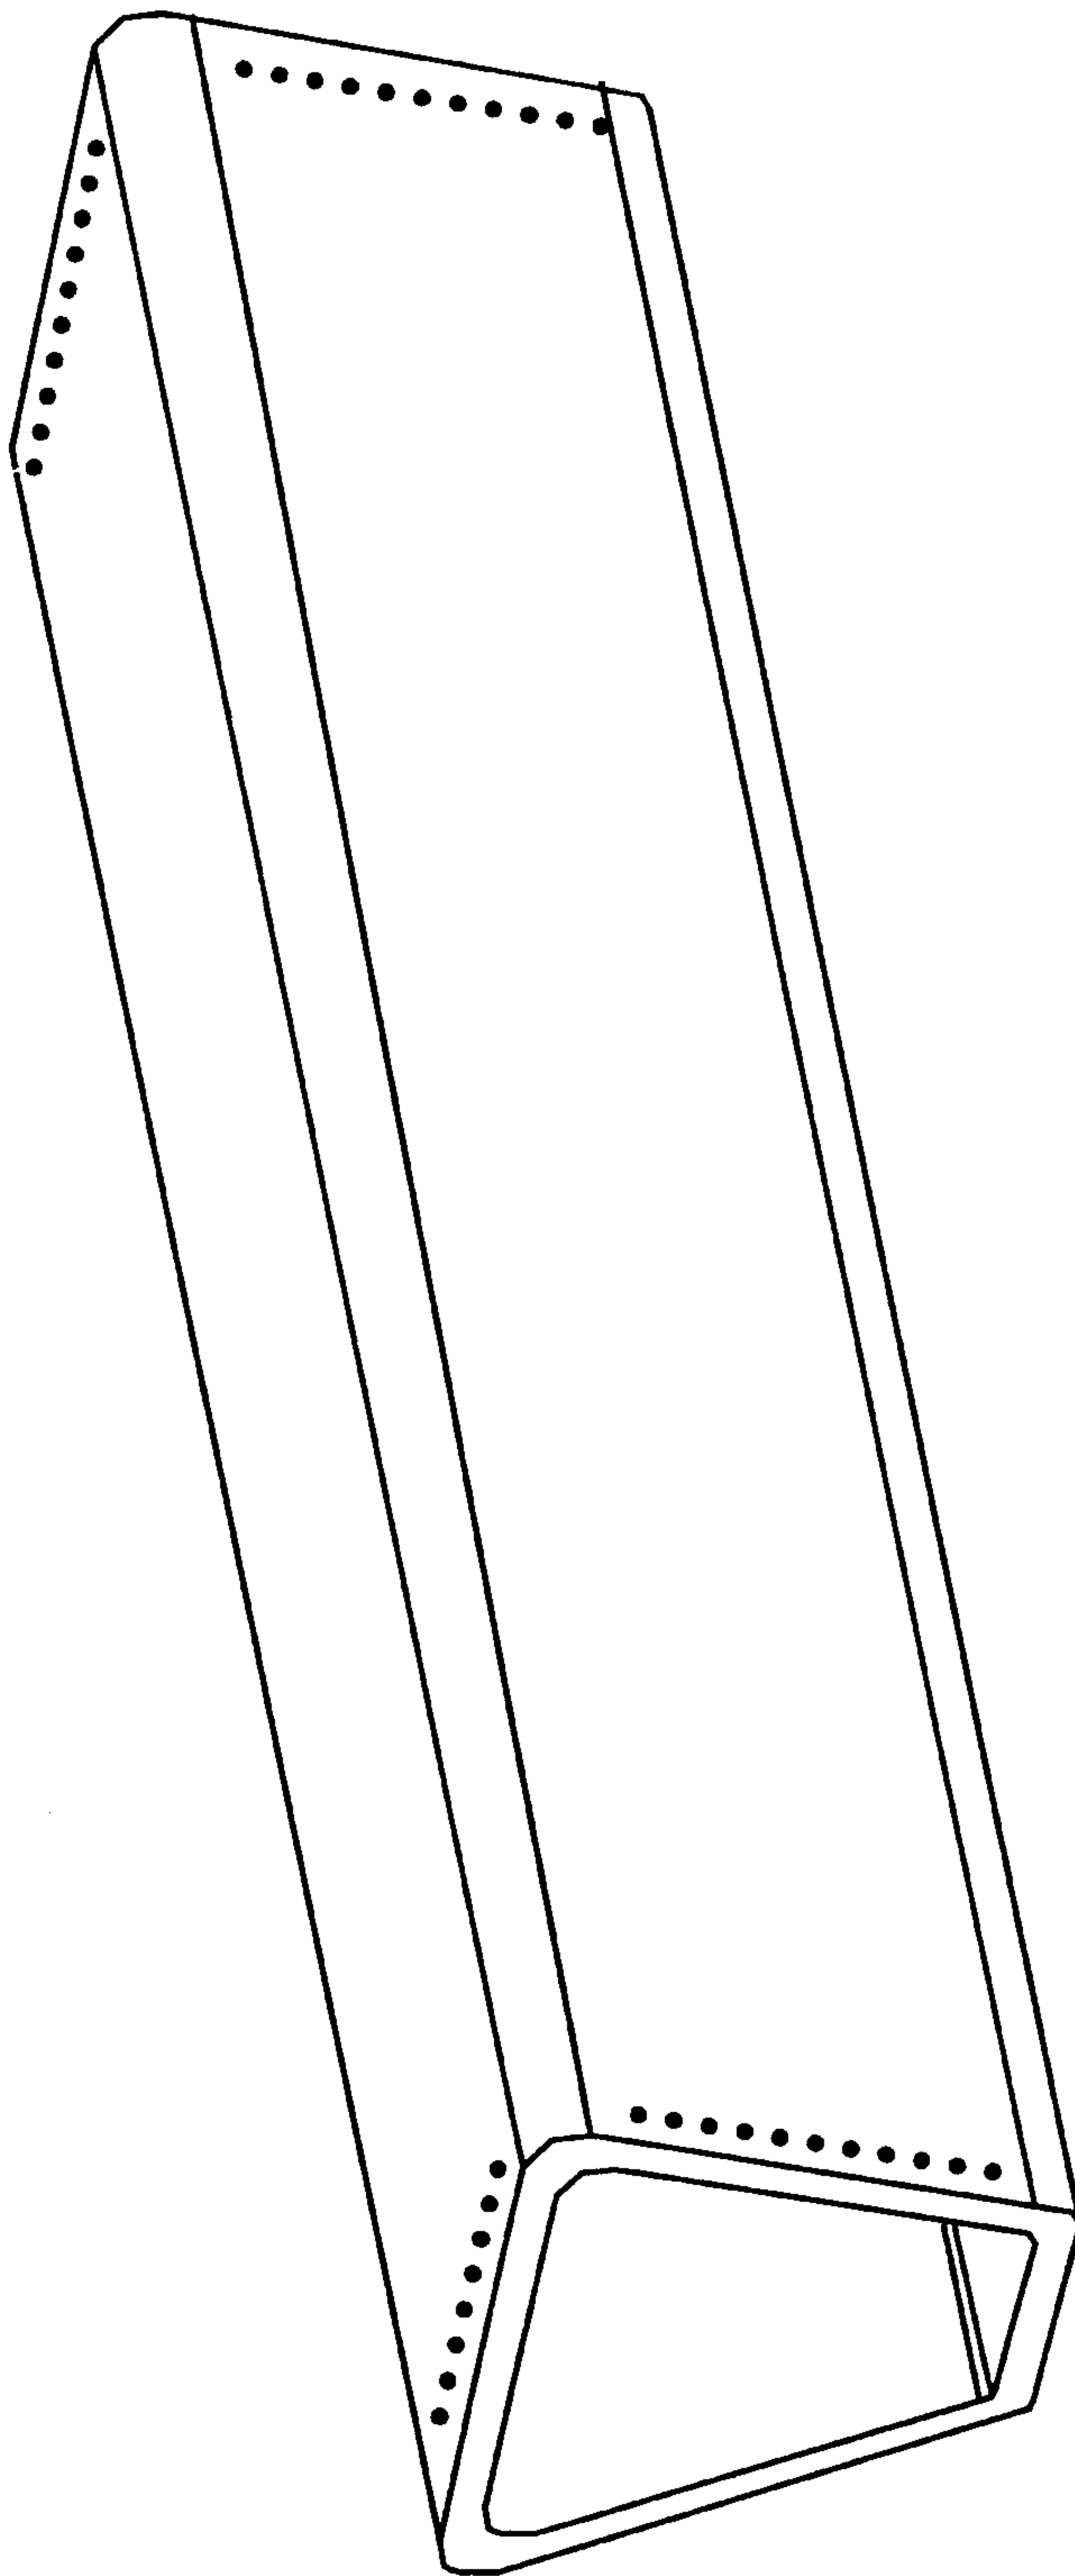


**FIG. 1**

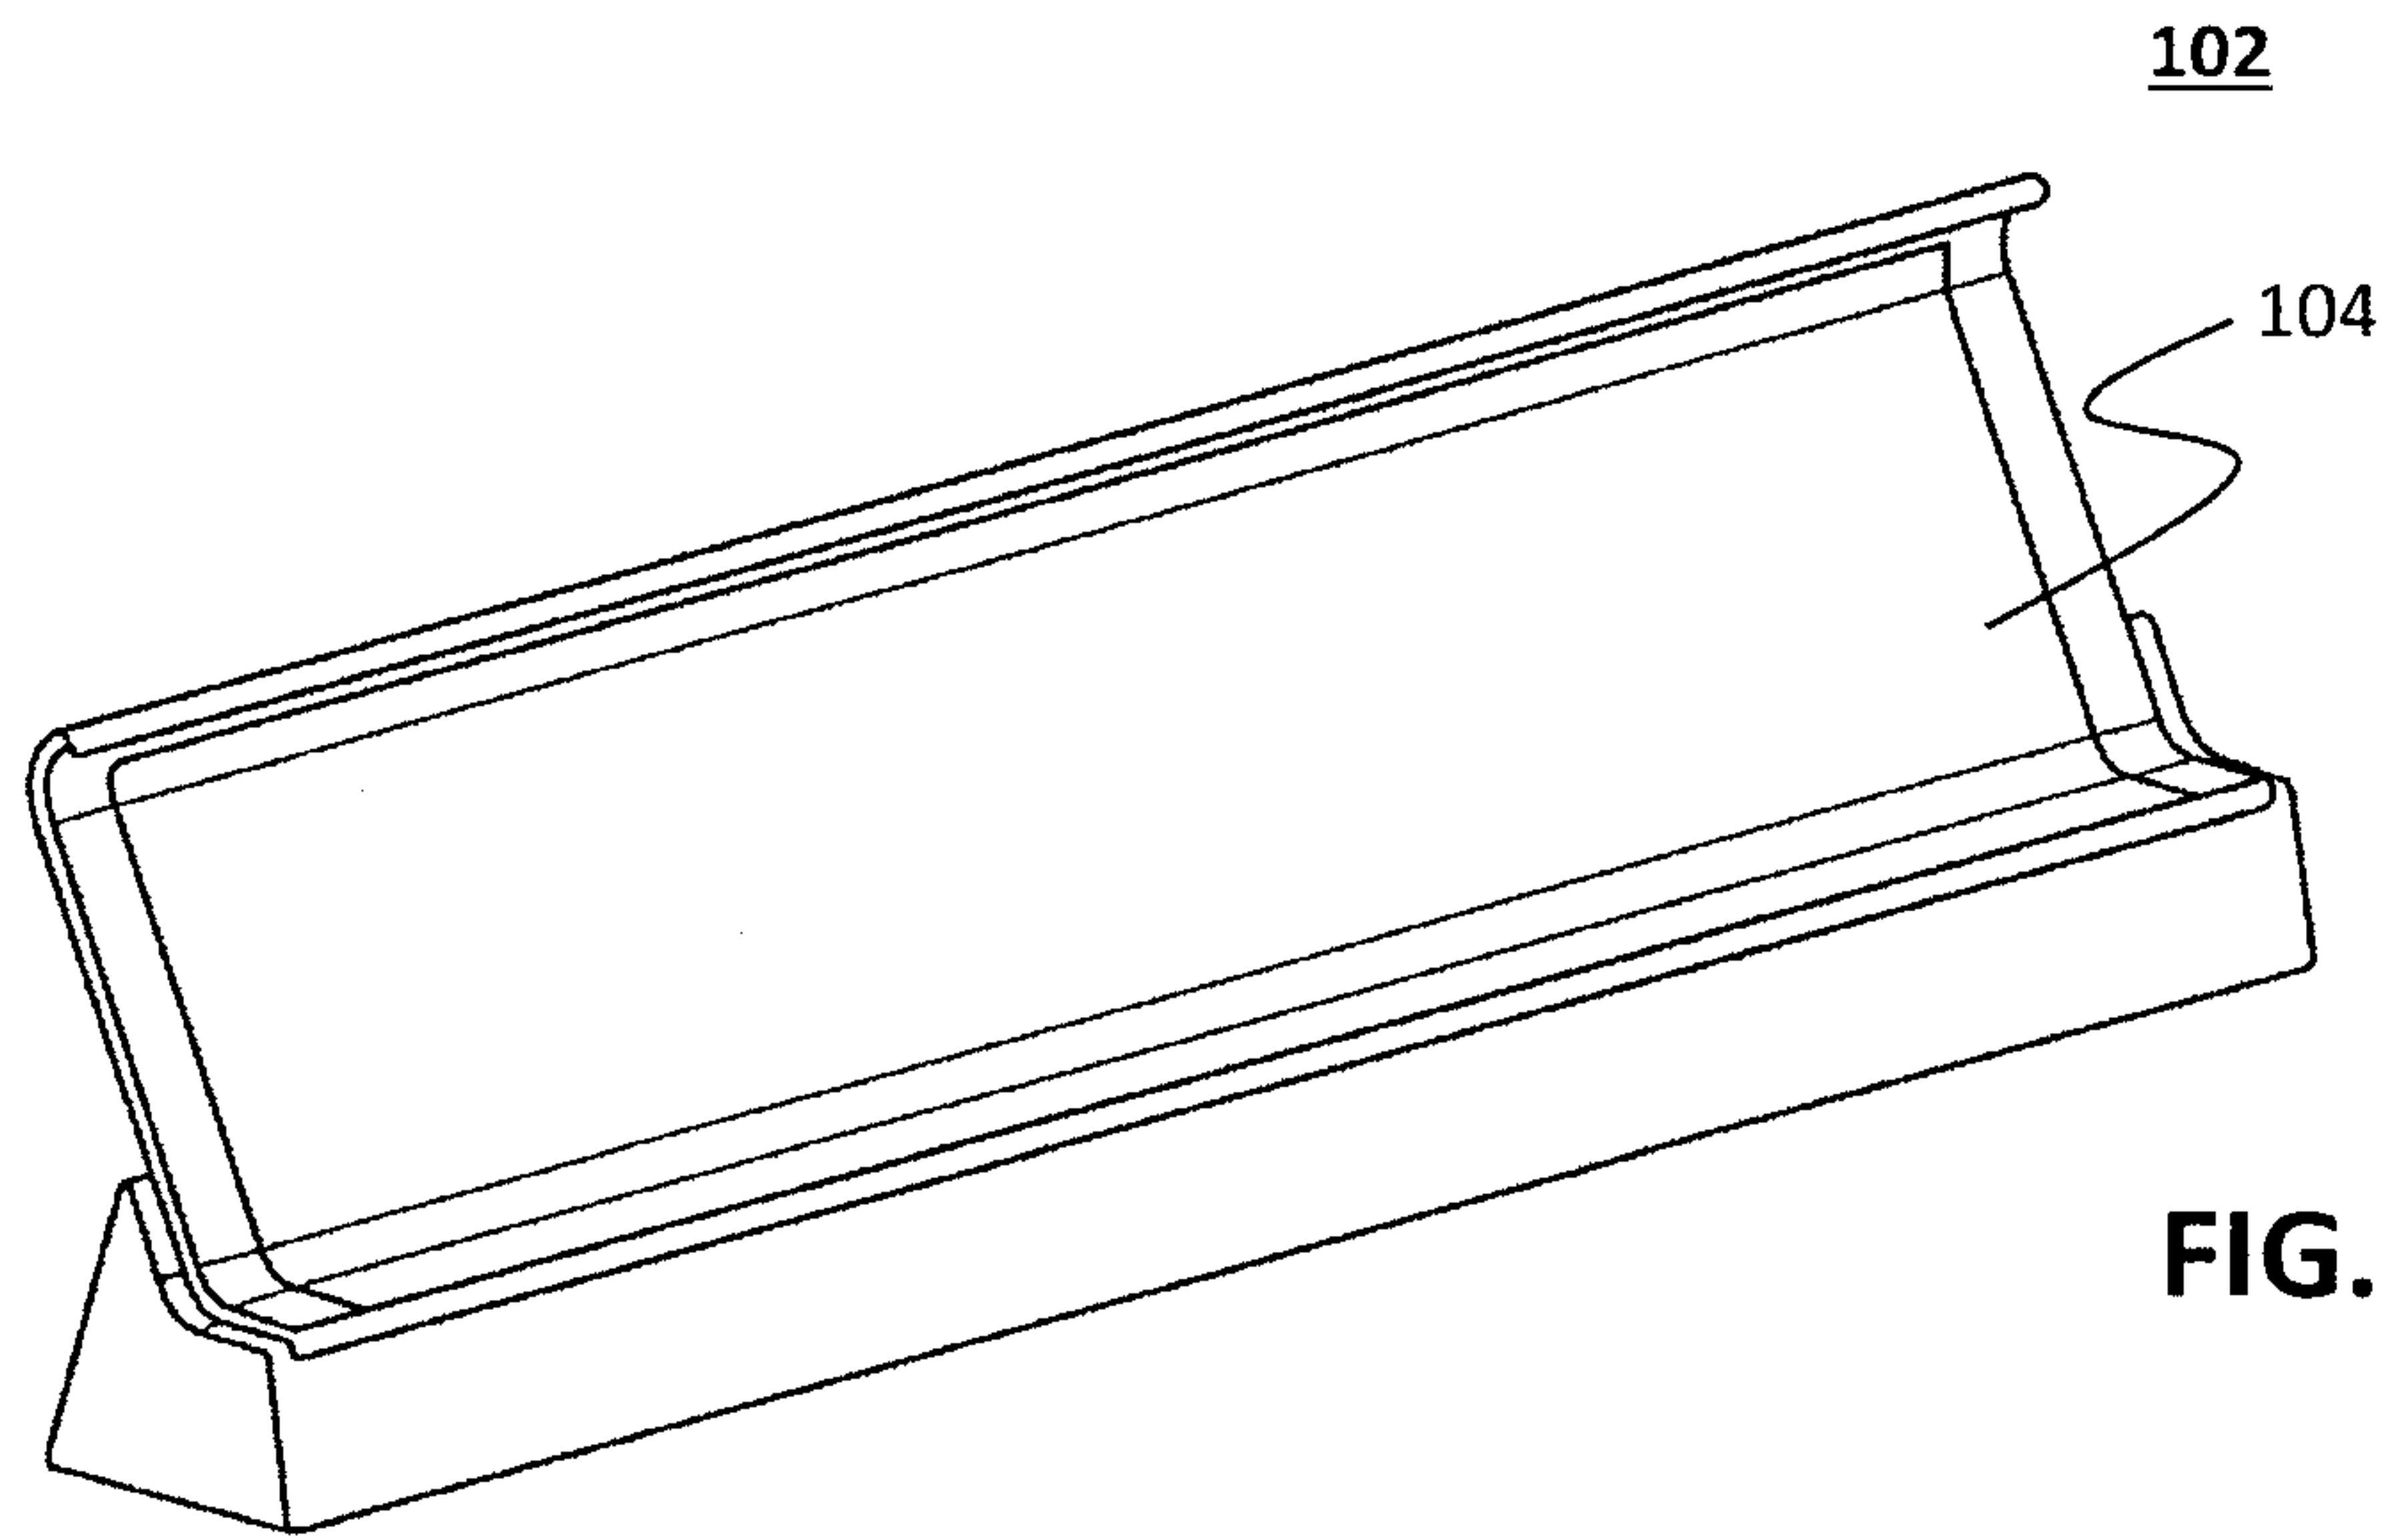




**FIG. 2A**

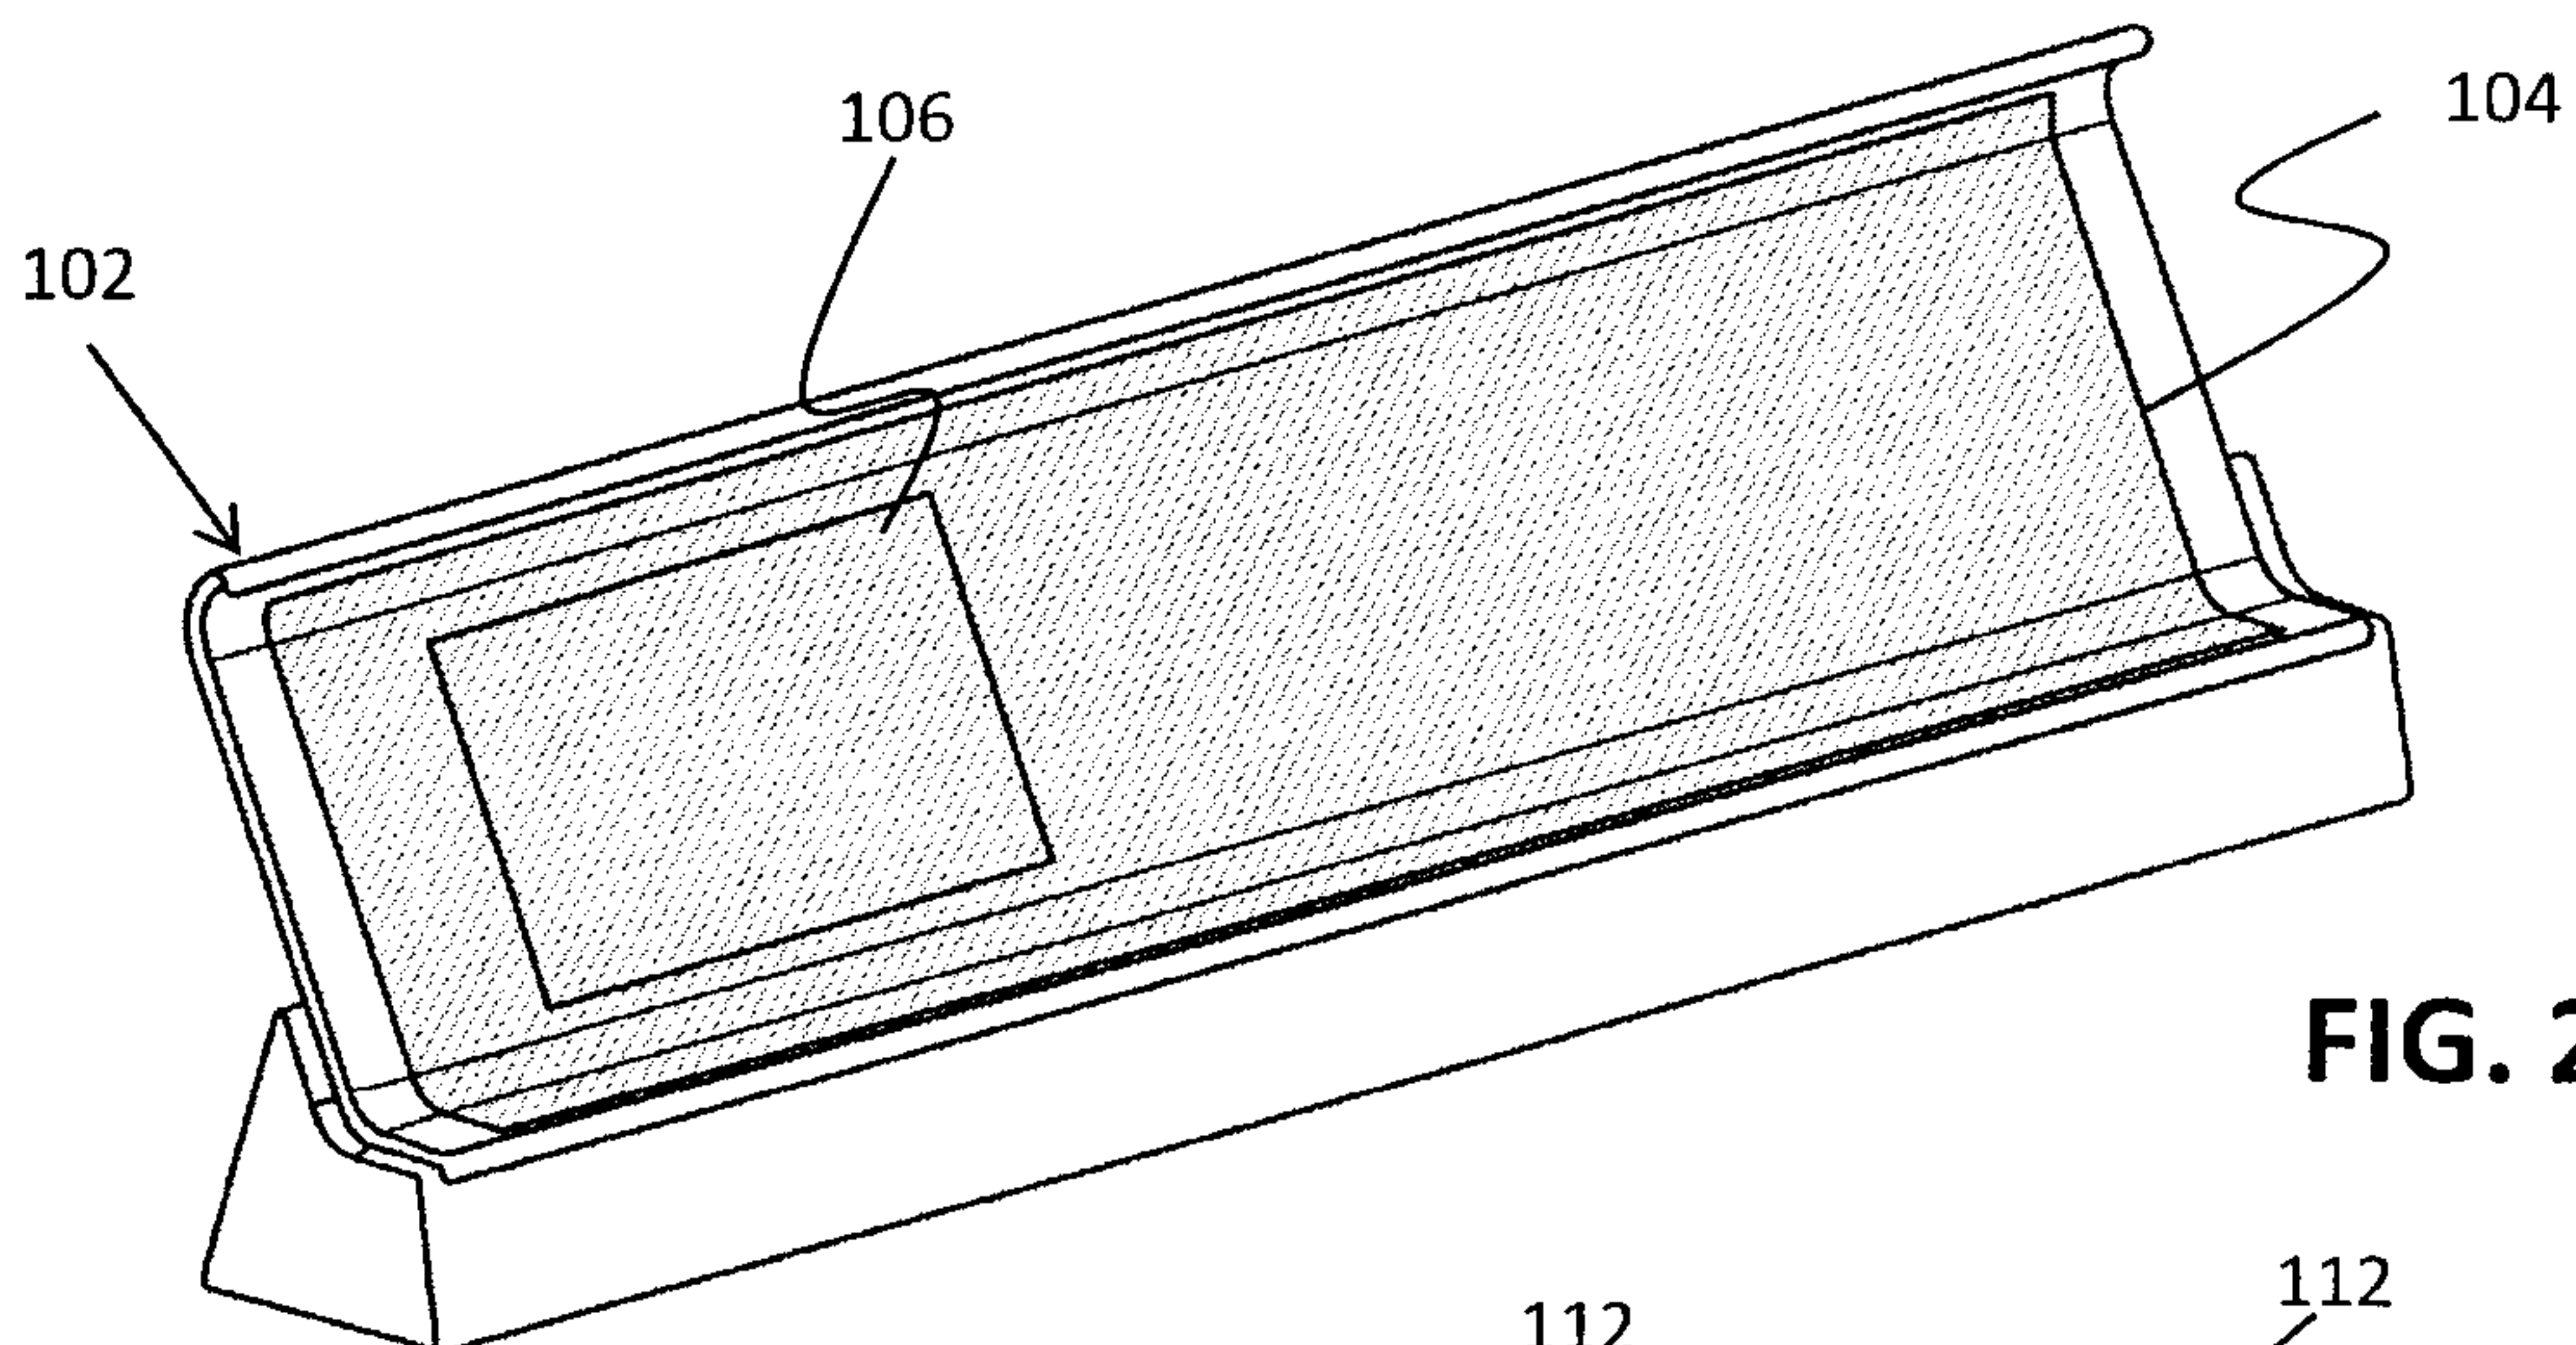


**FIG. 2B**

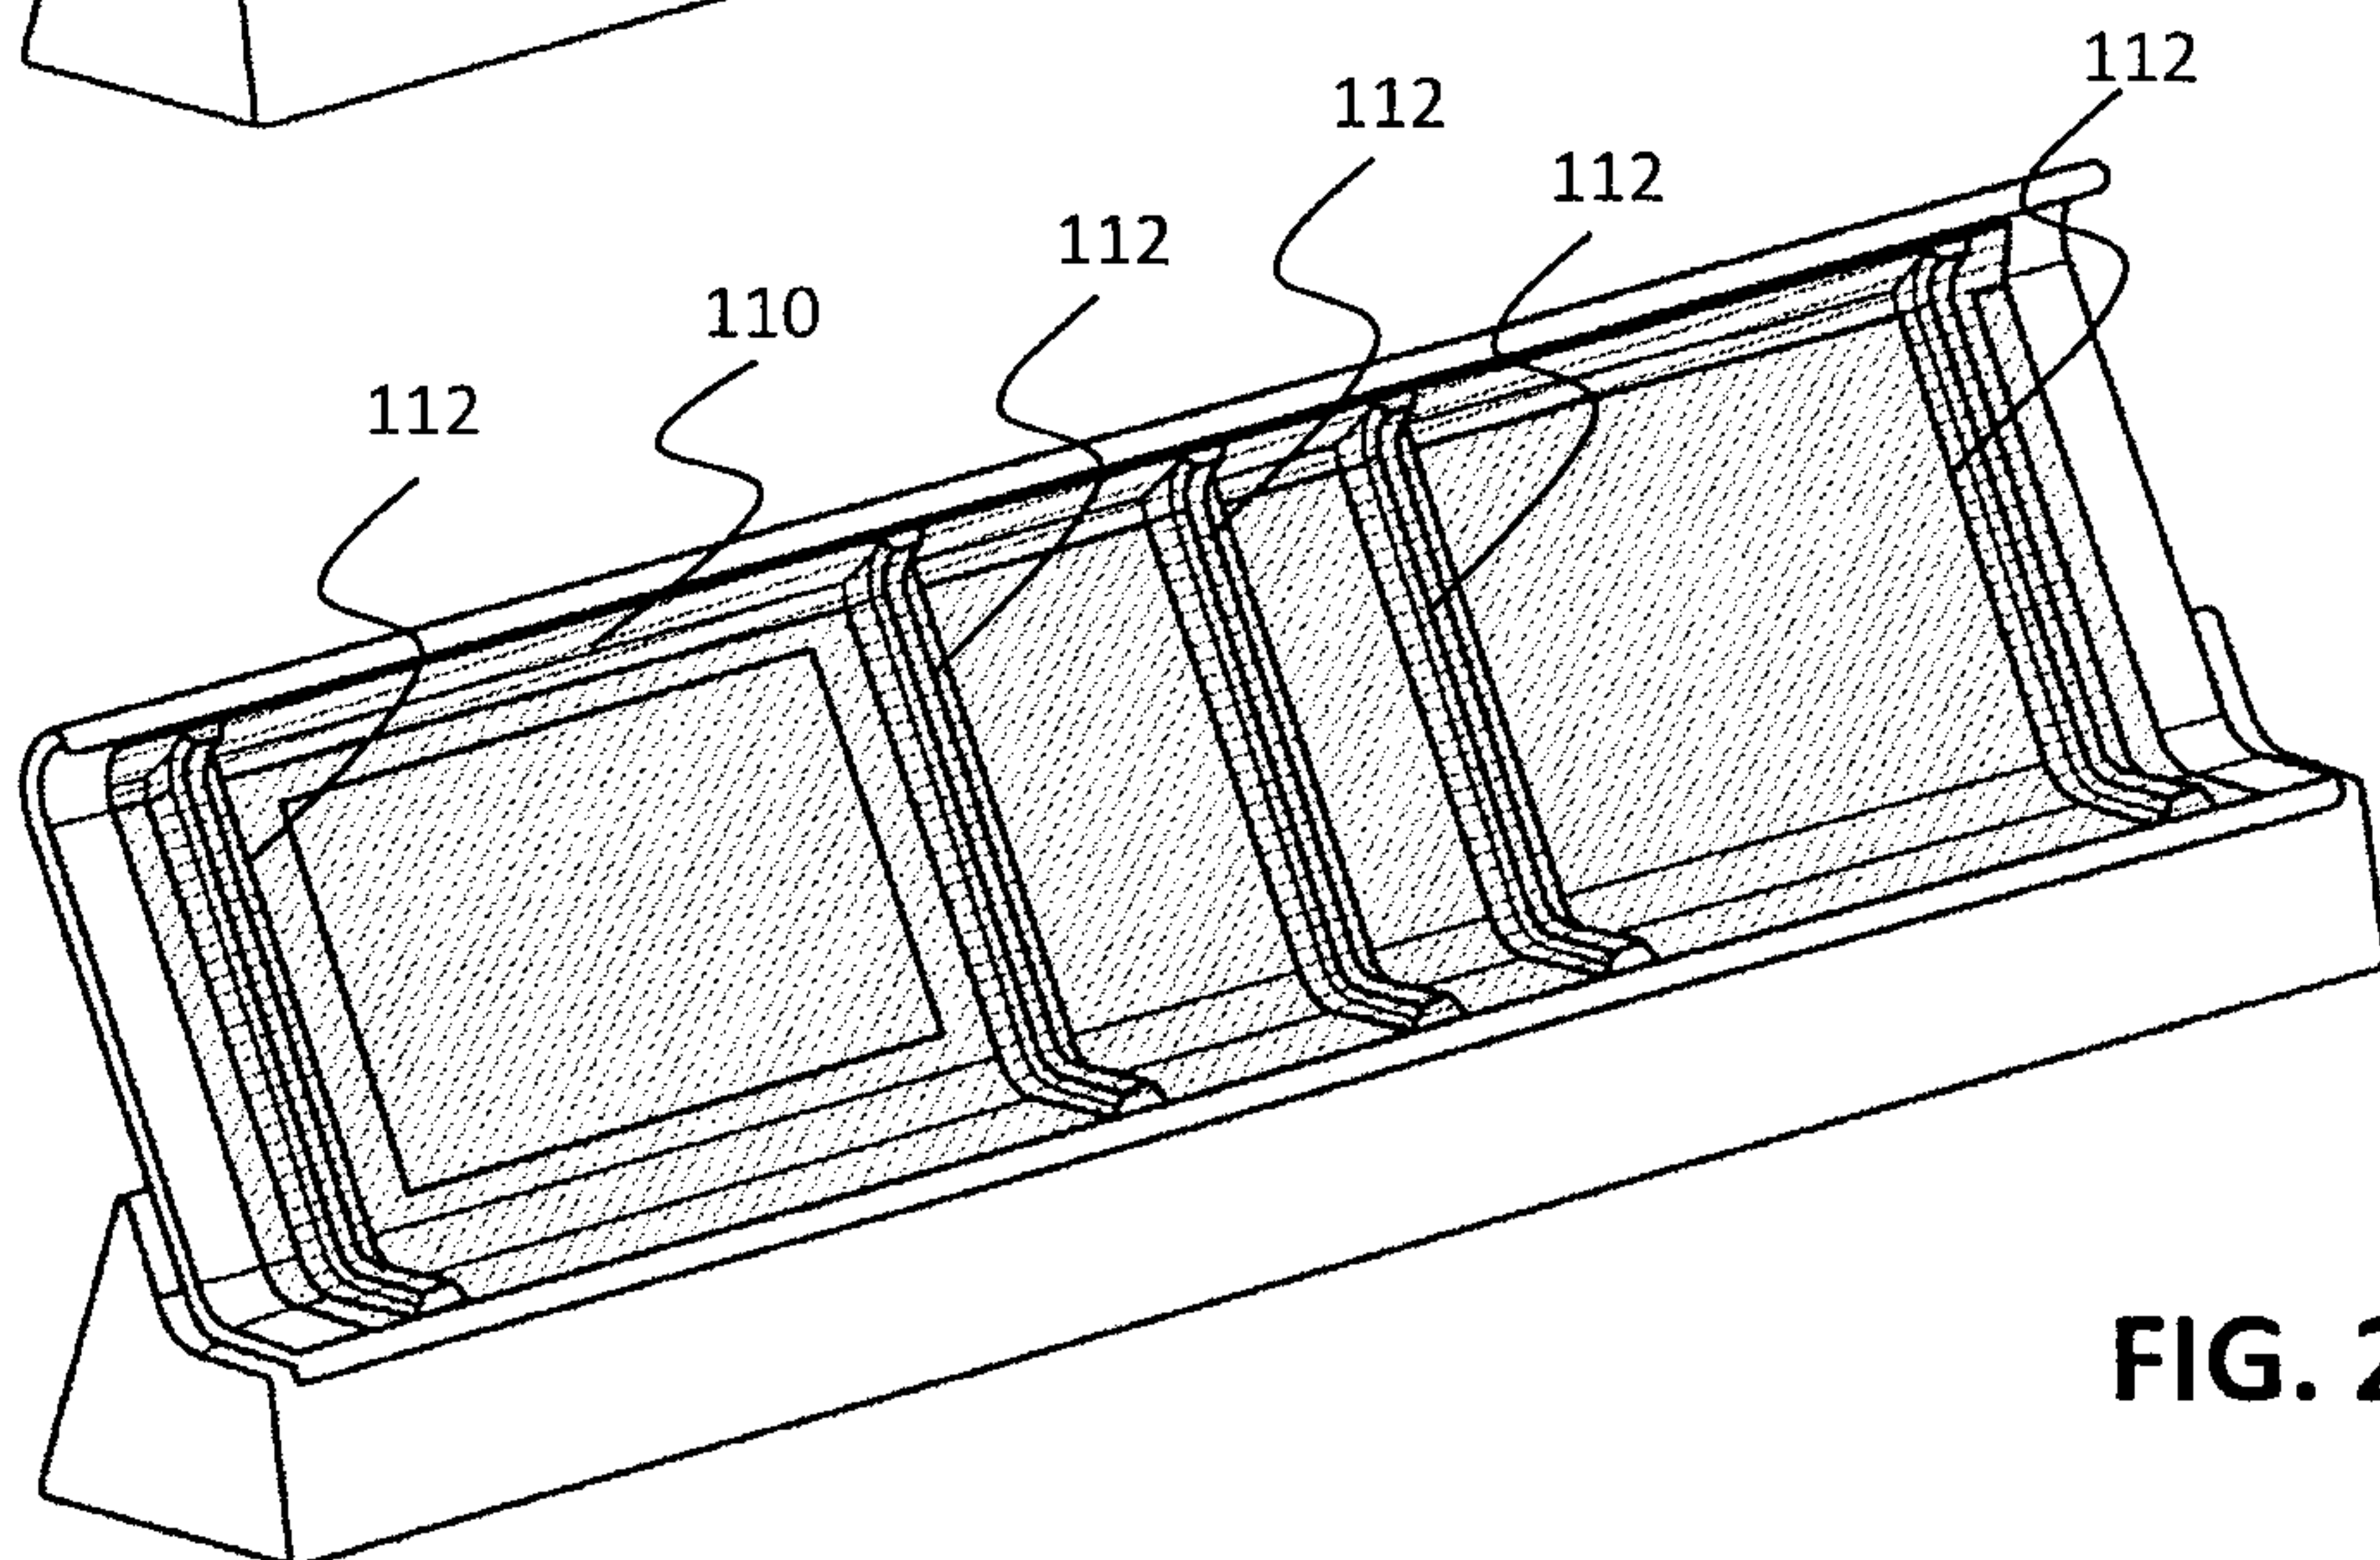


**FIG. 2C**

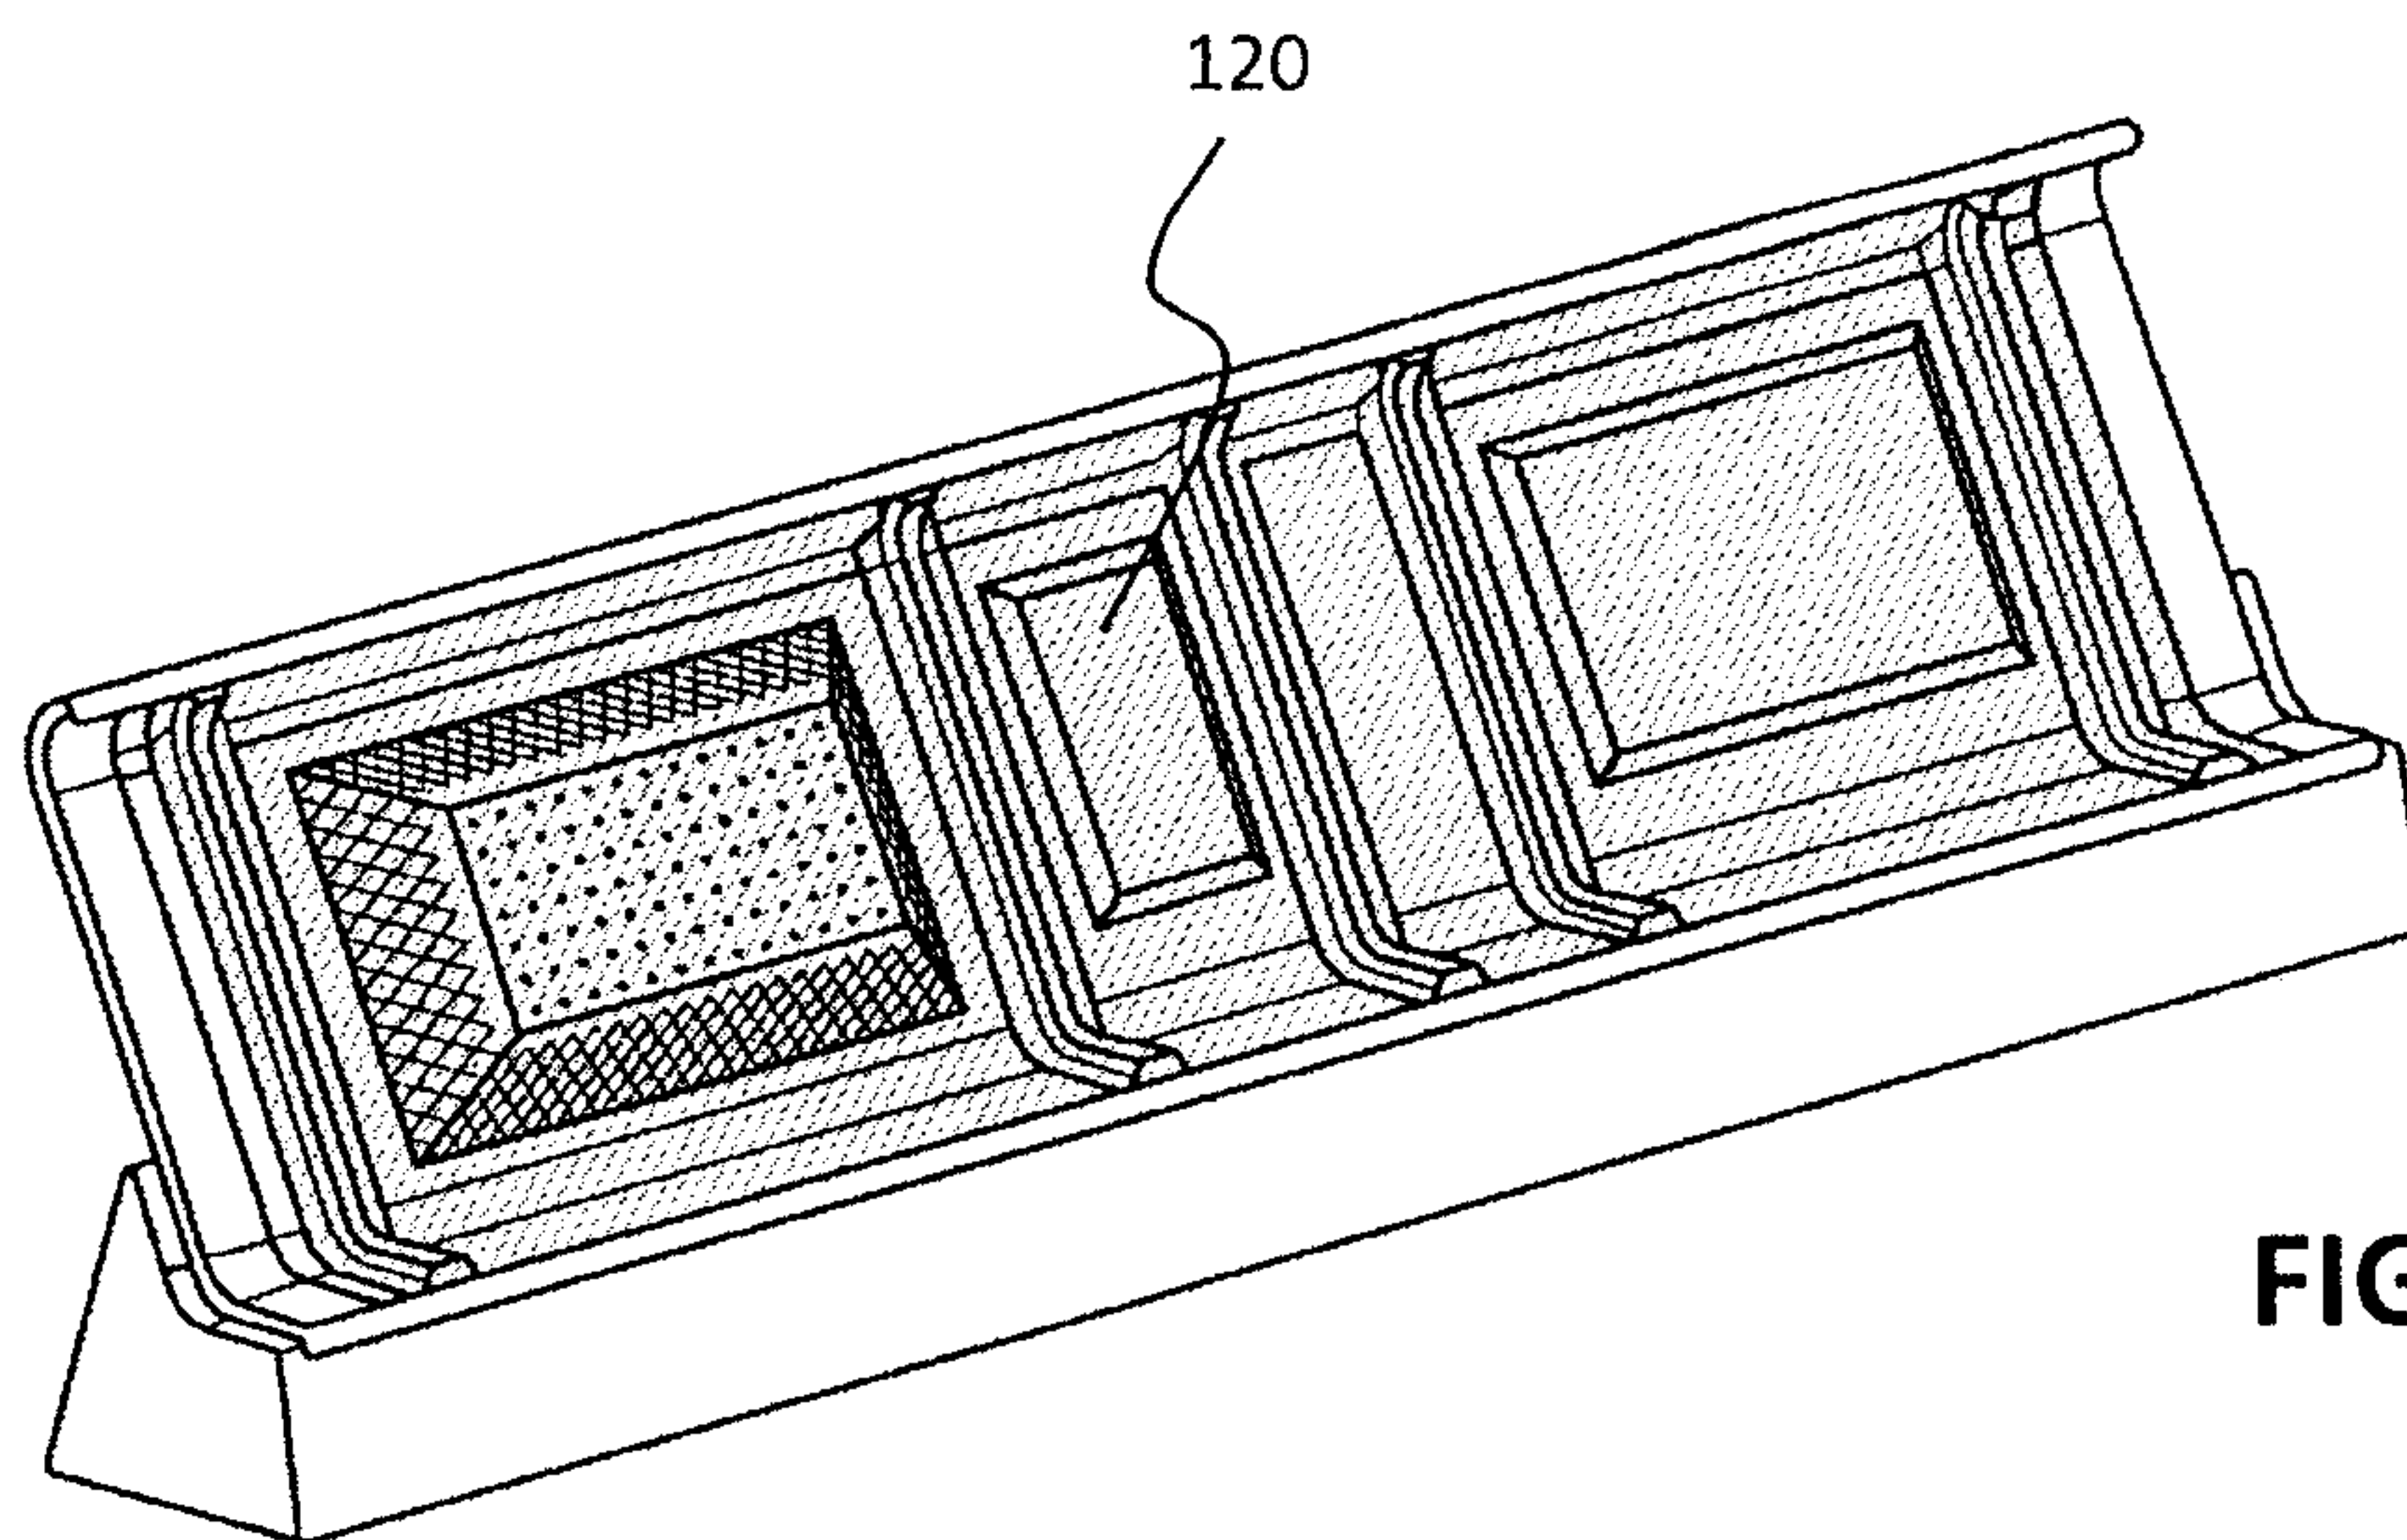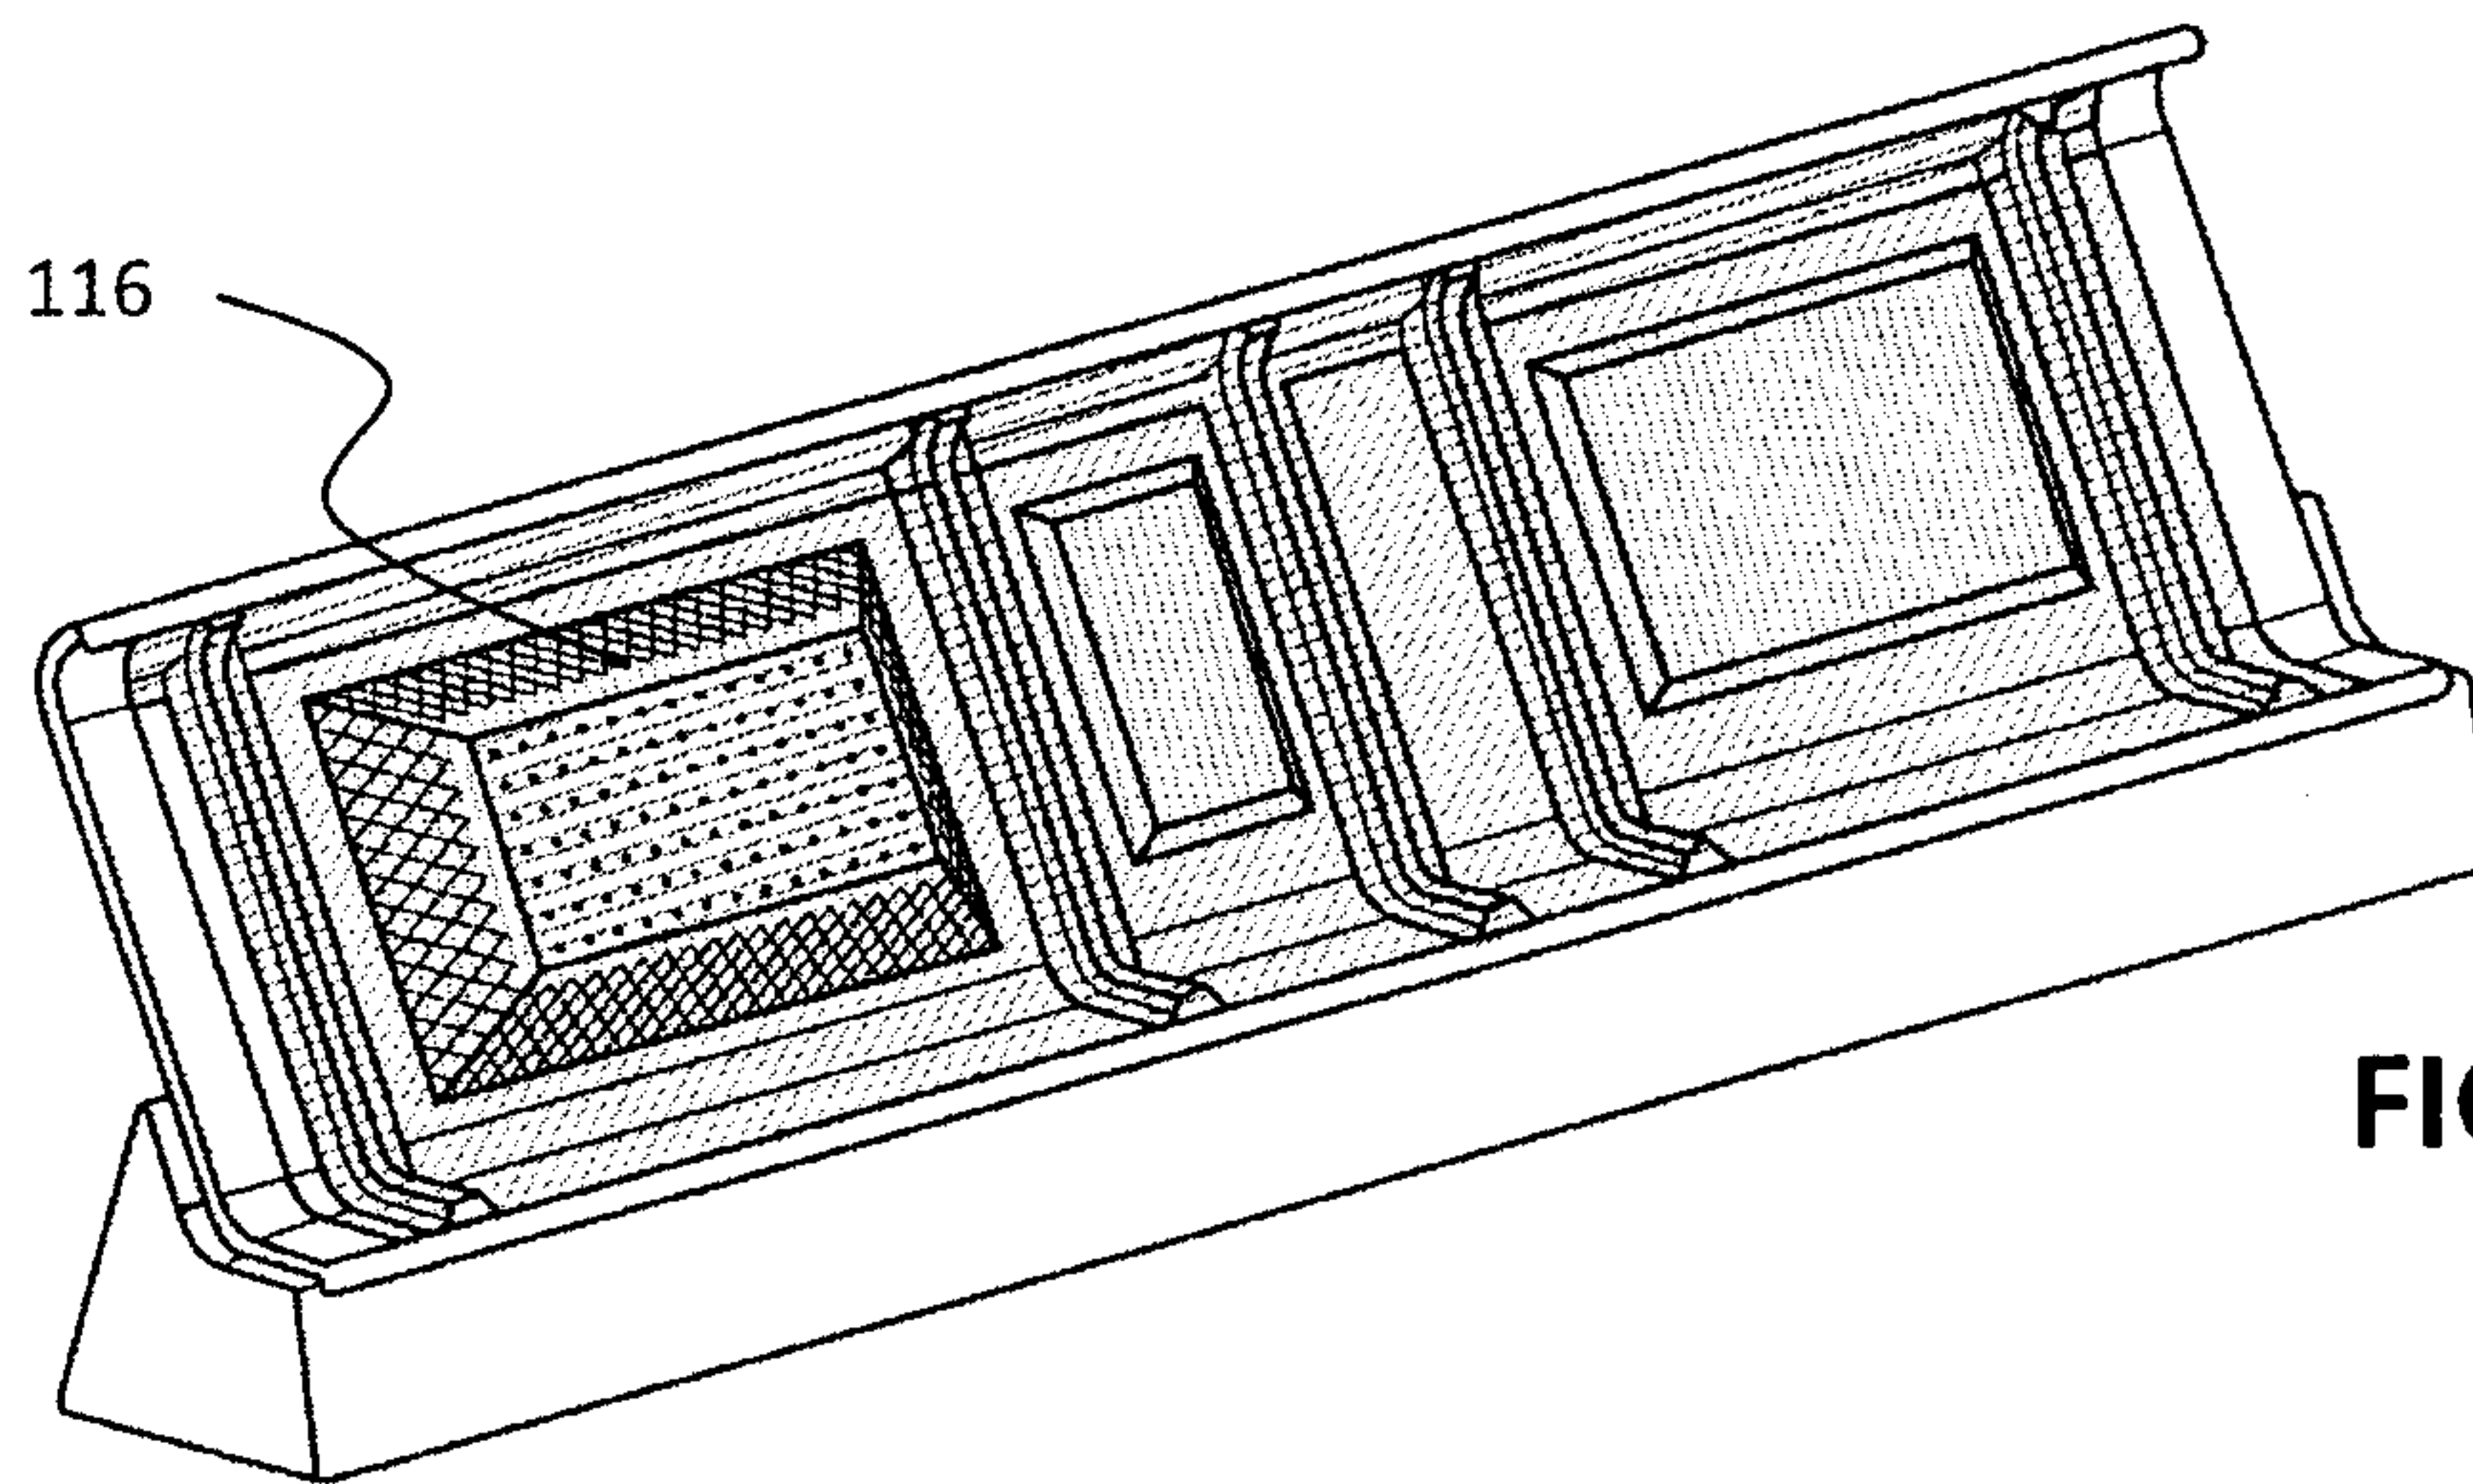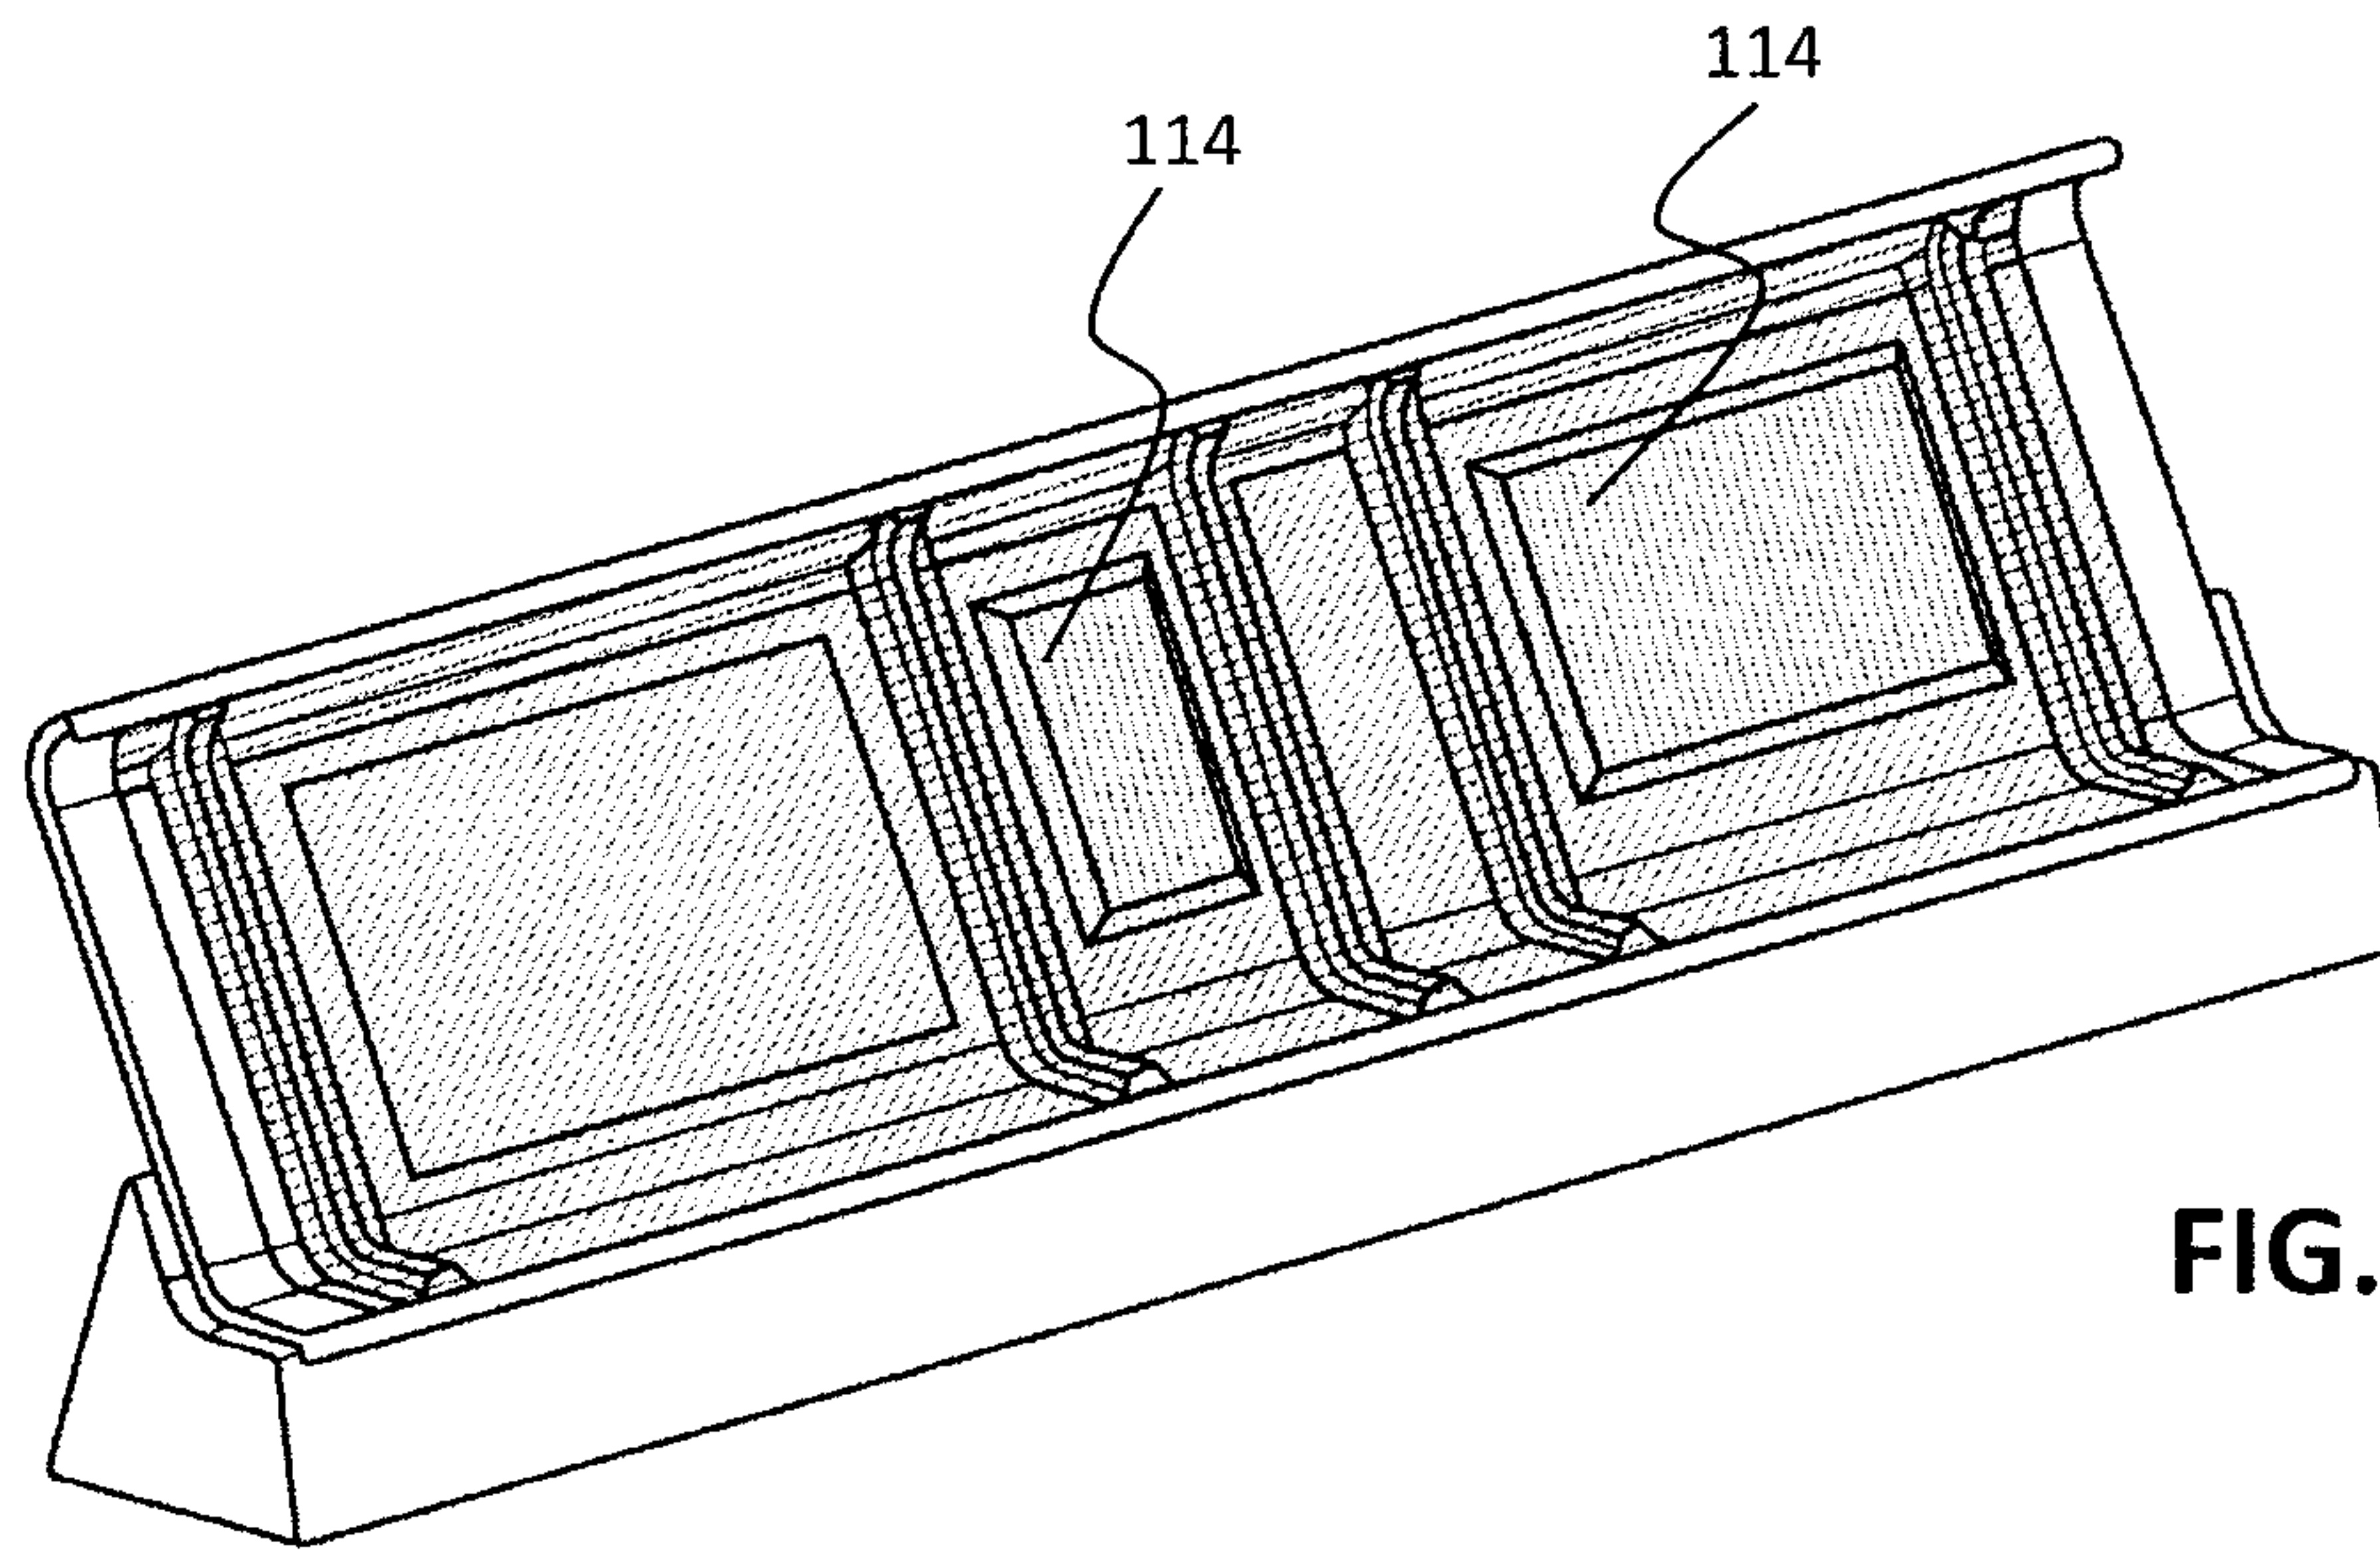


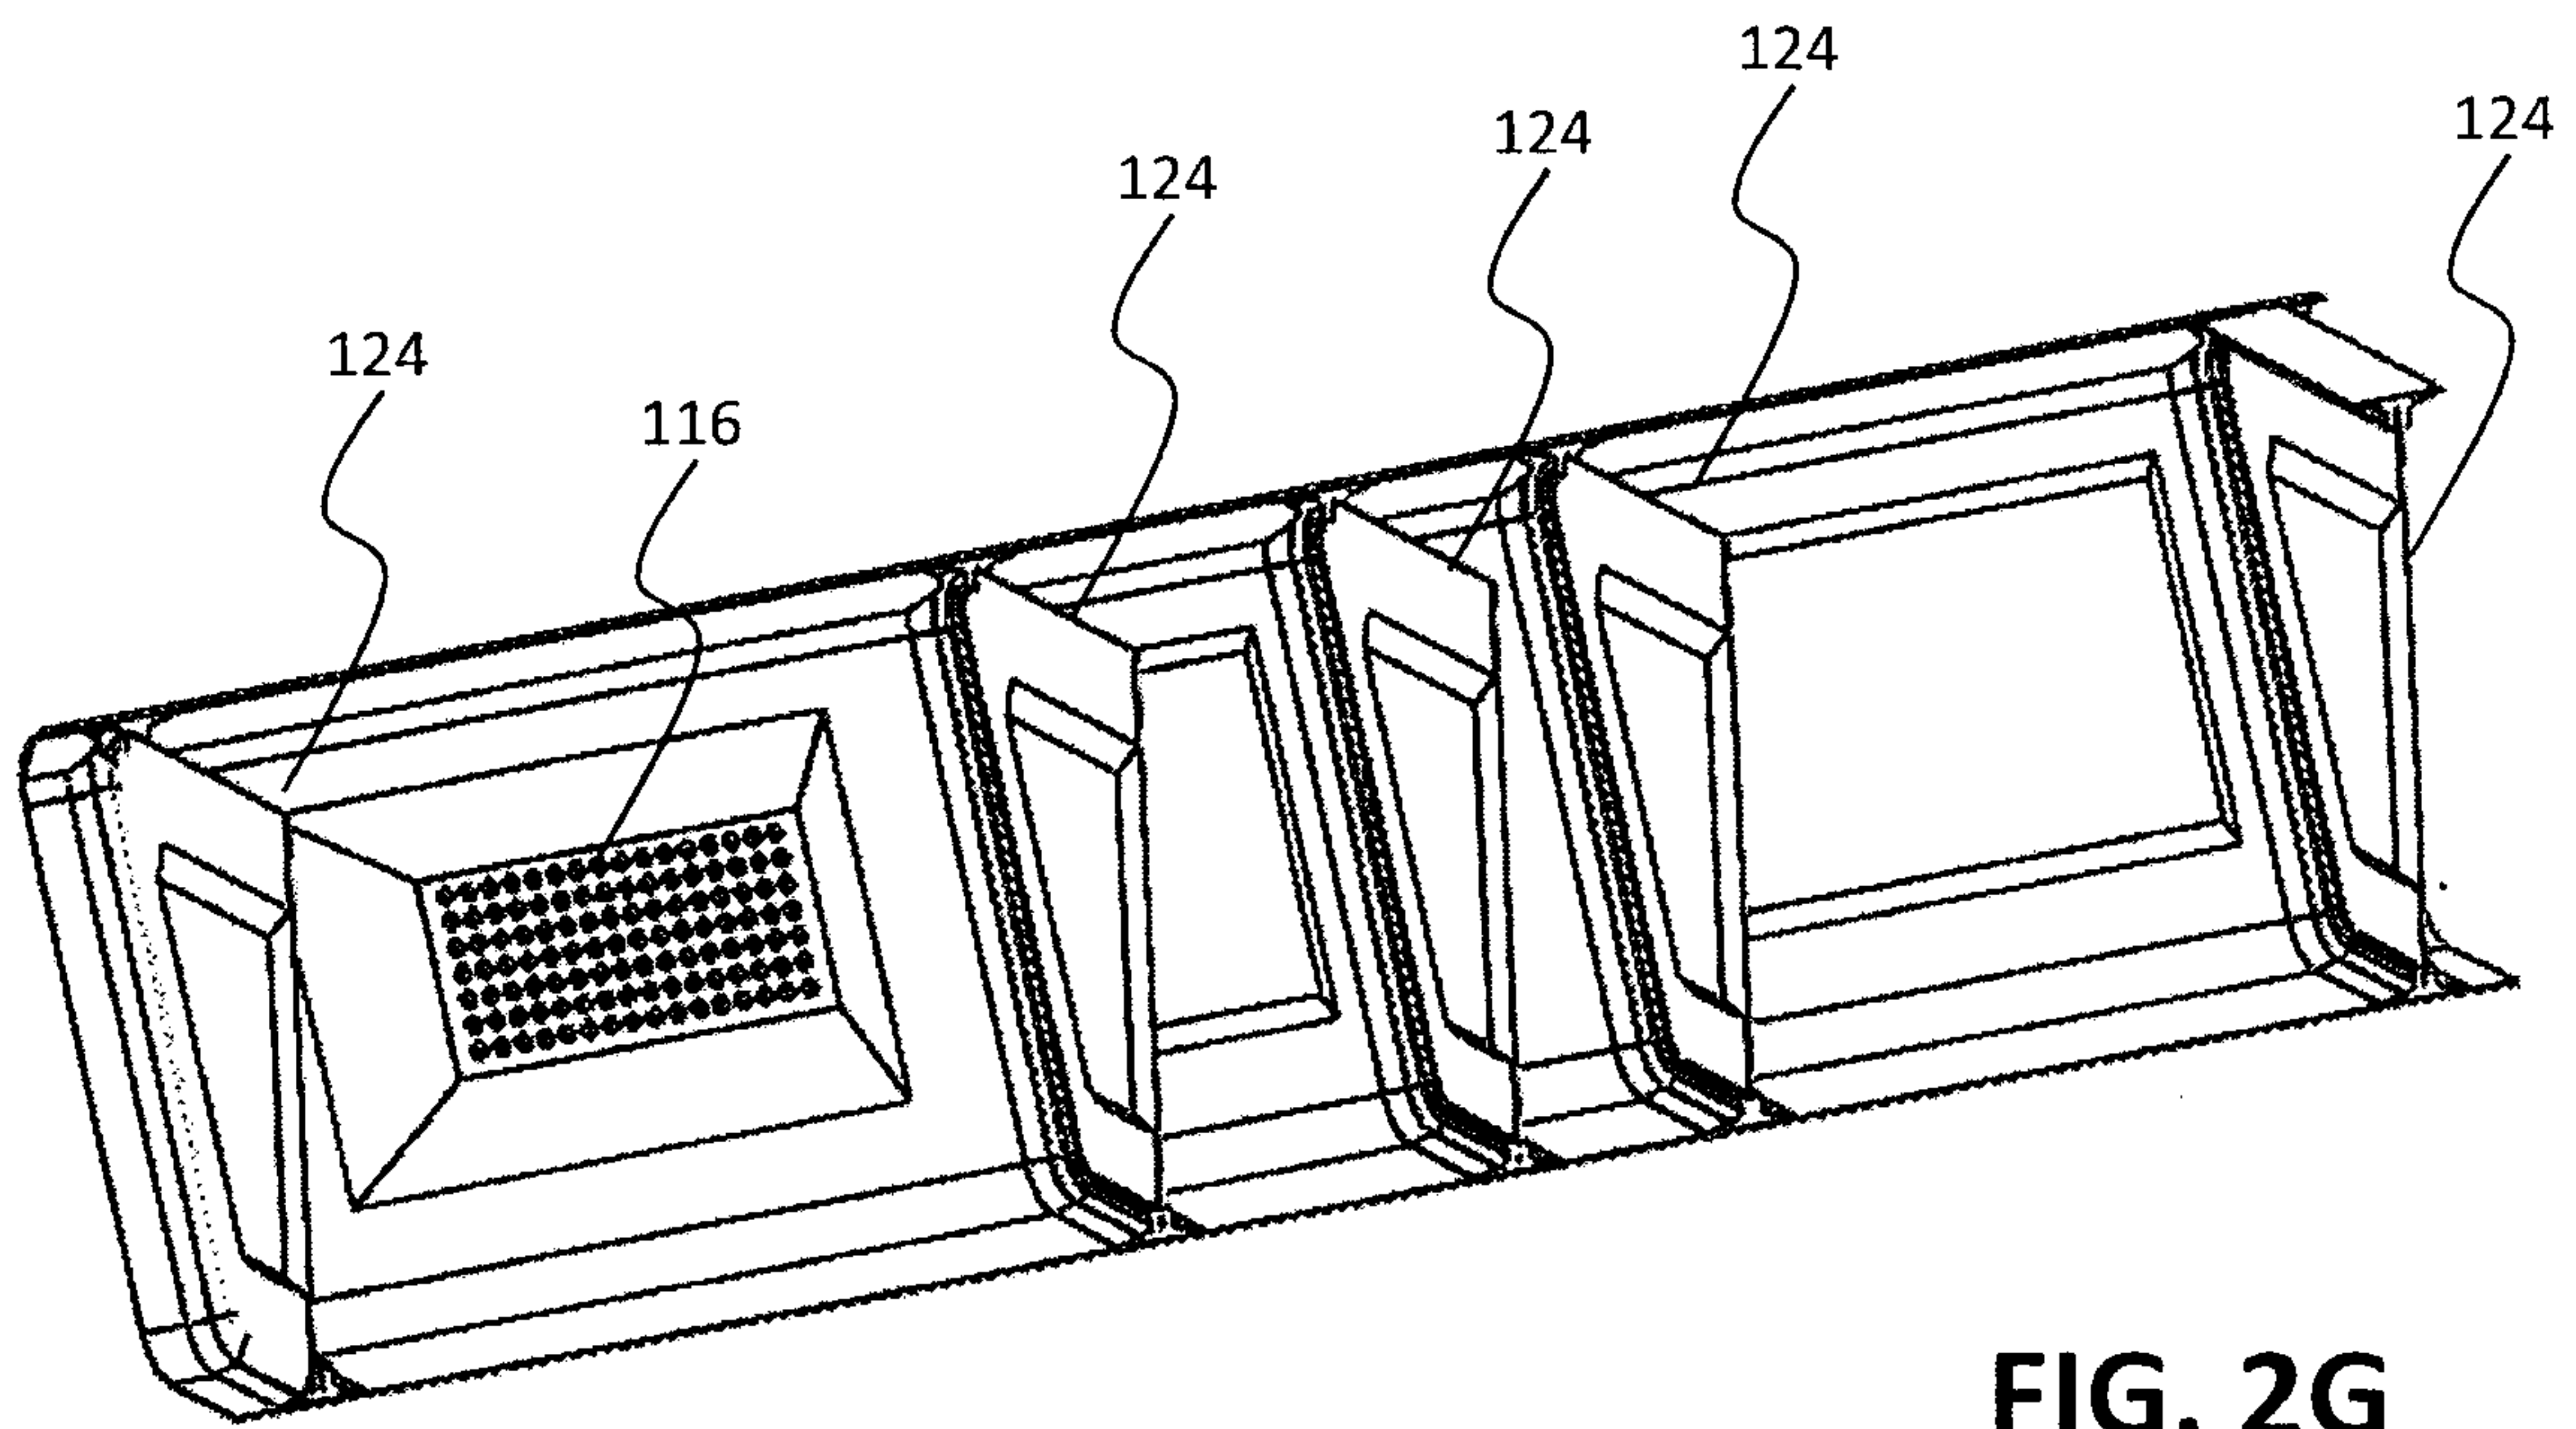


**FIG. 2G**

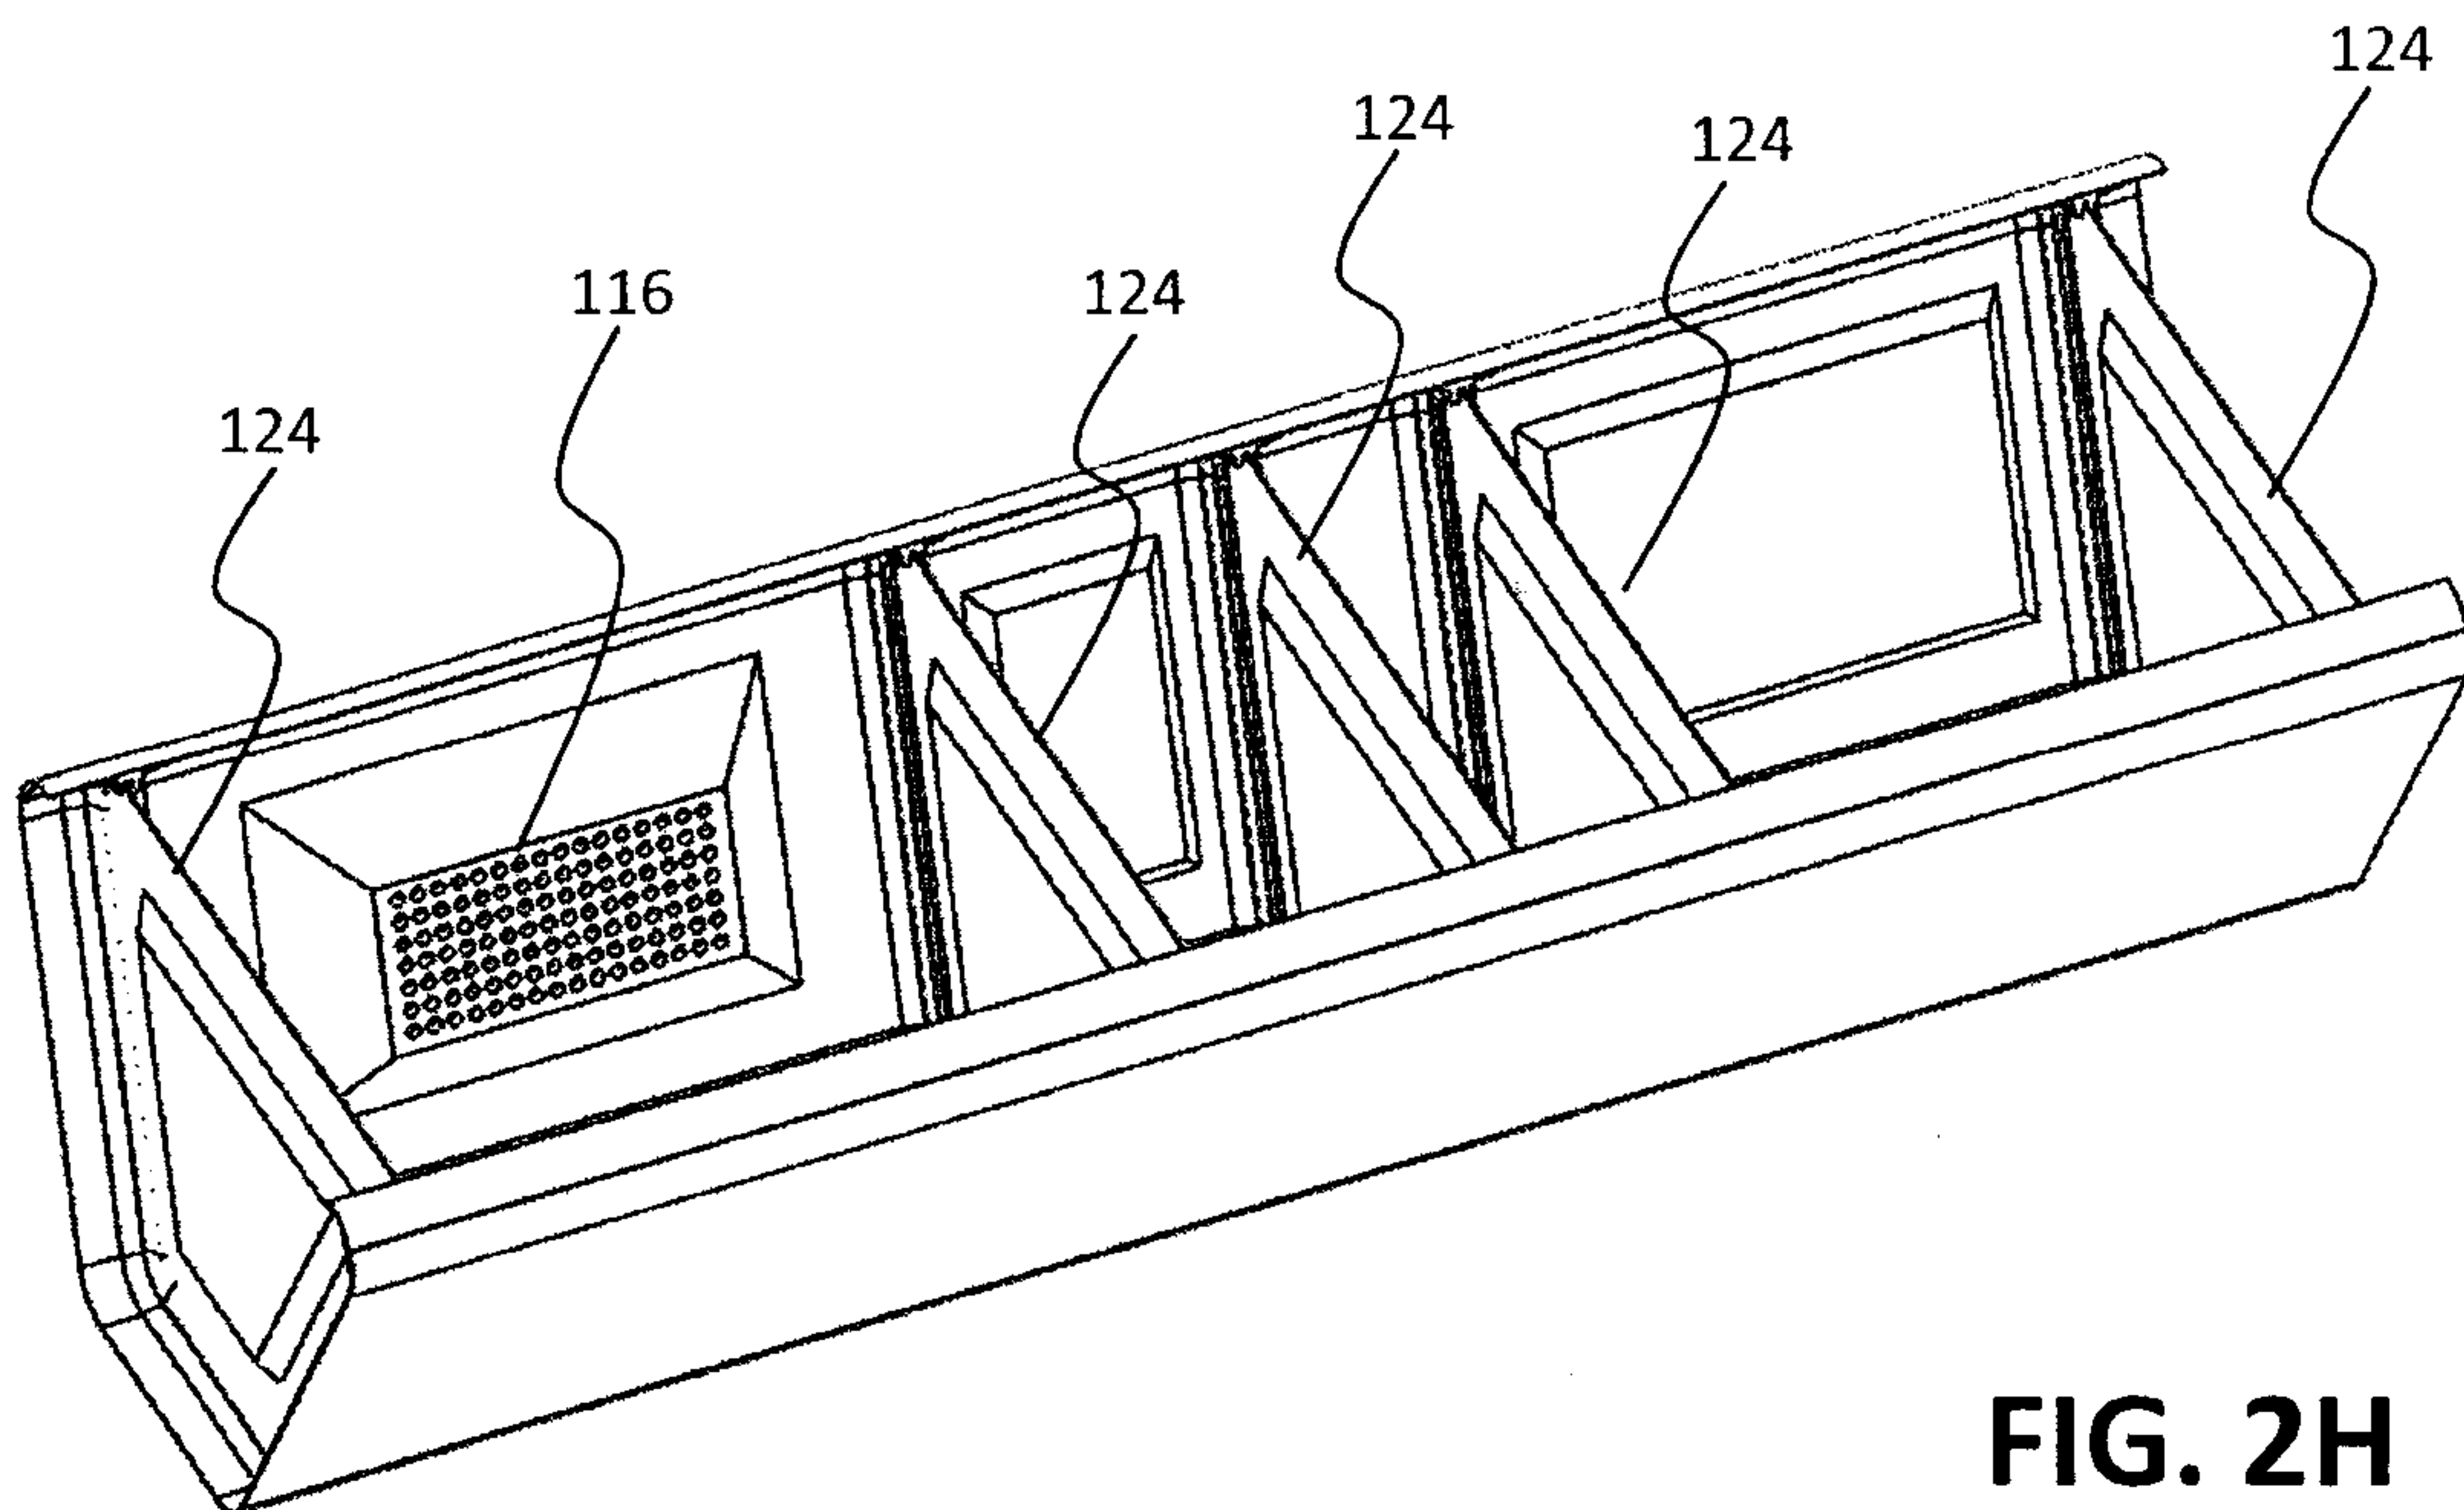


**FIG. 2H**

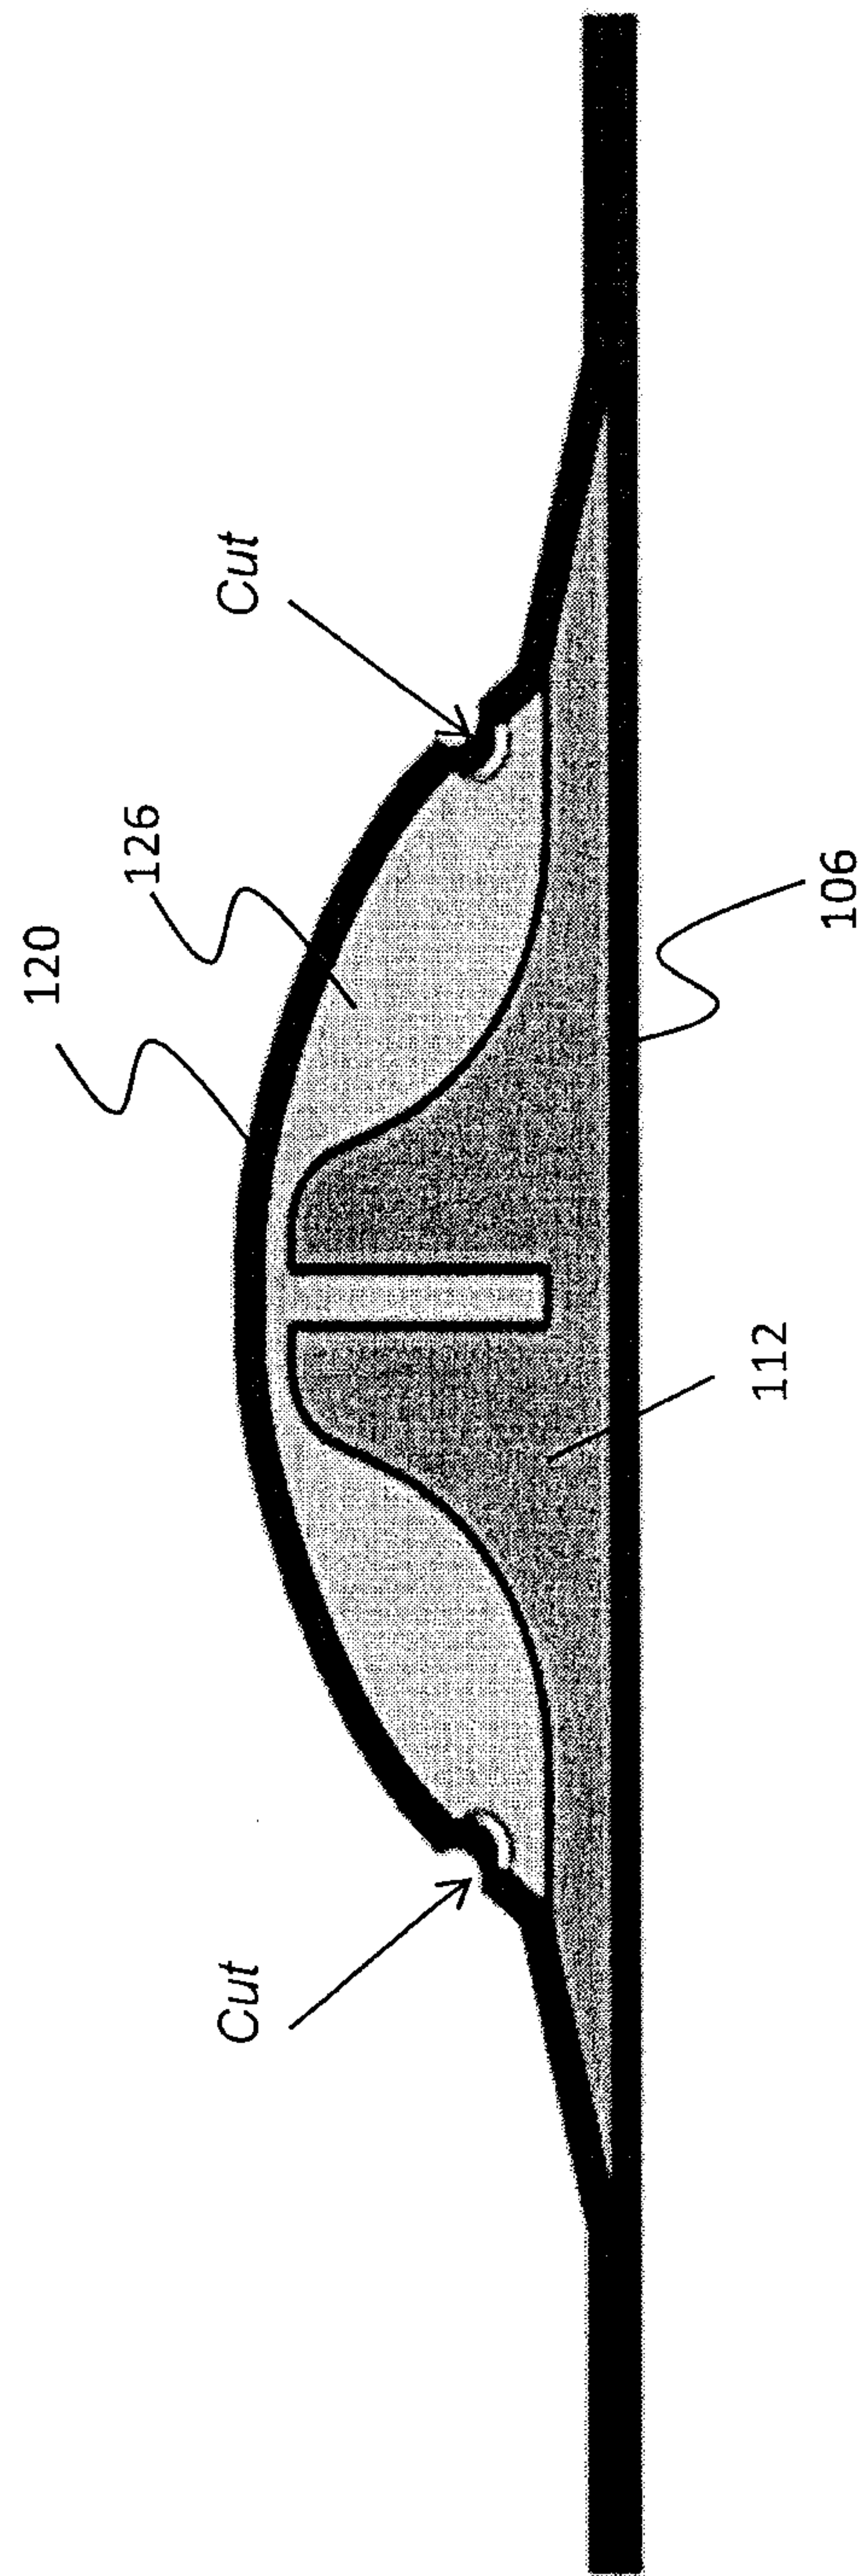

**FIG. 3A**

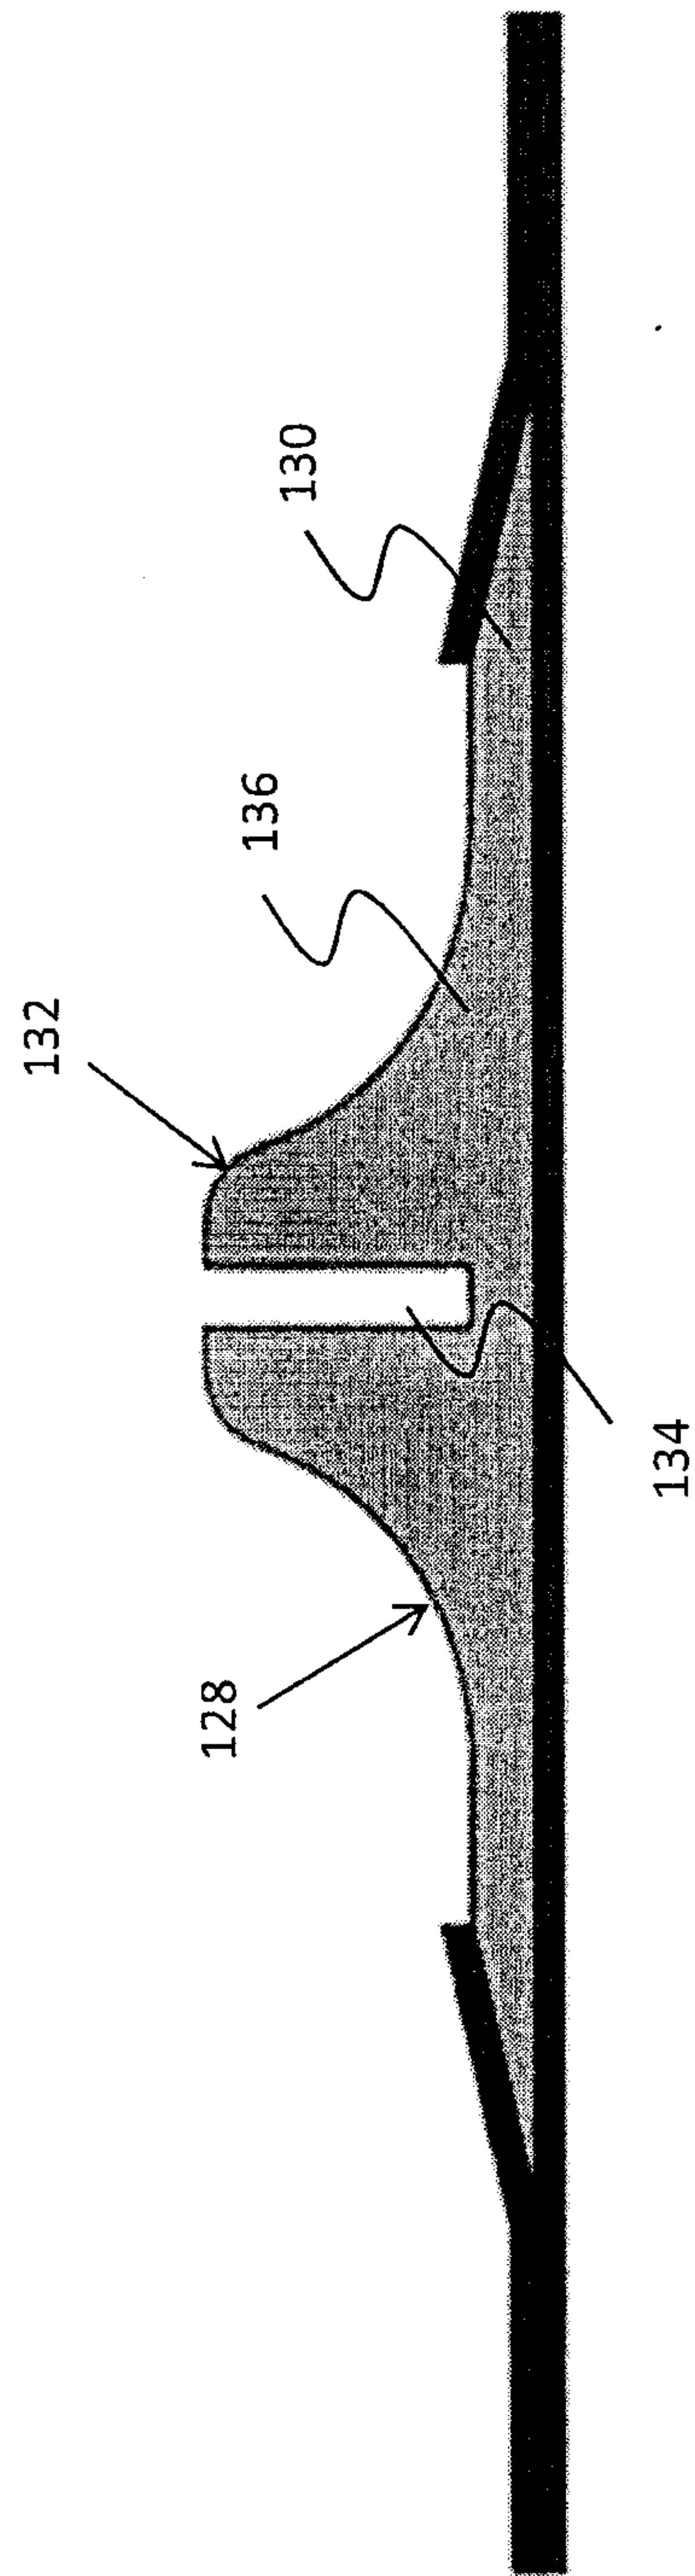

**FIG. 3B**

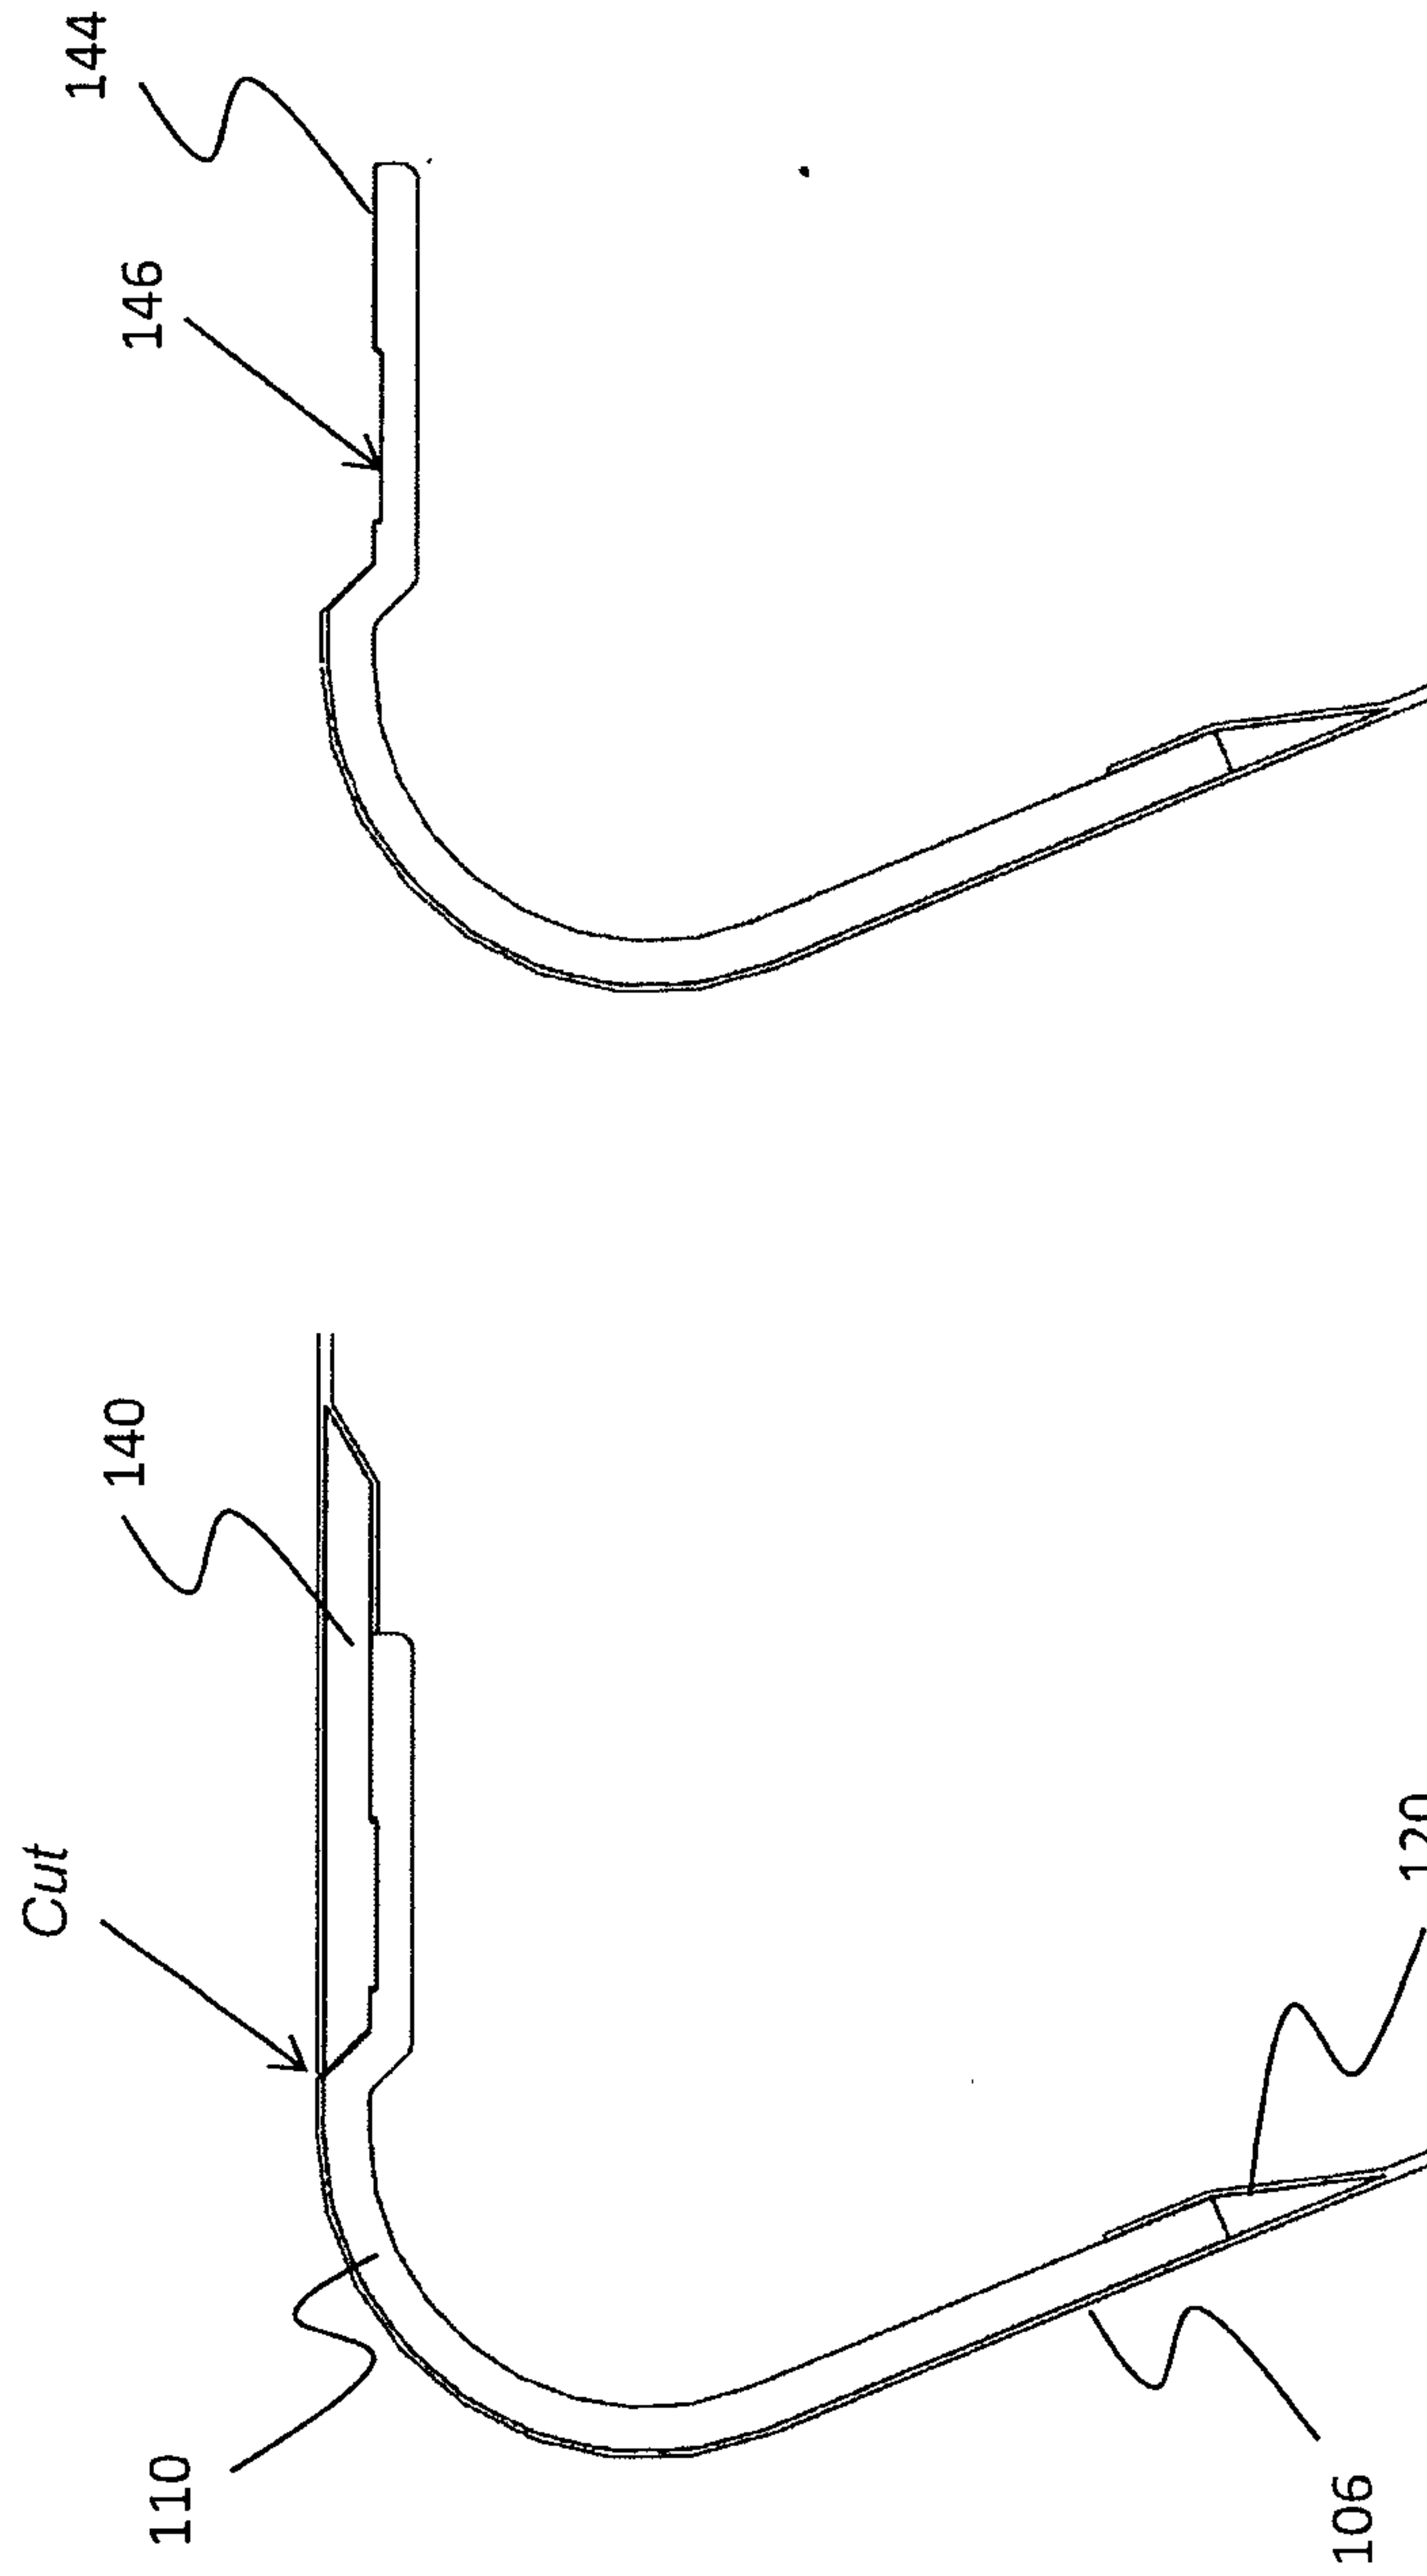

**FIG. 4B**

**FIG. 4A**

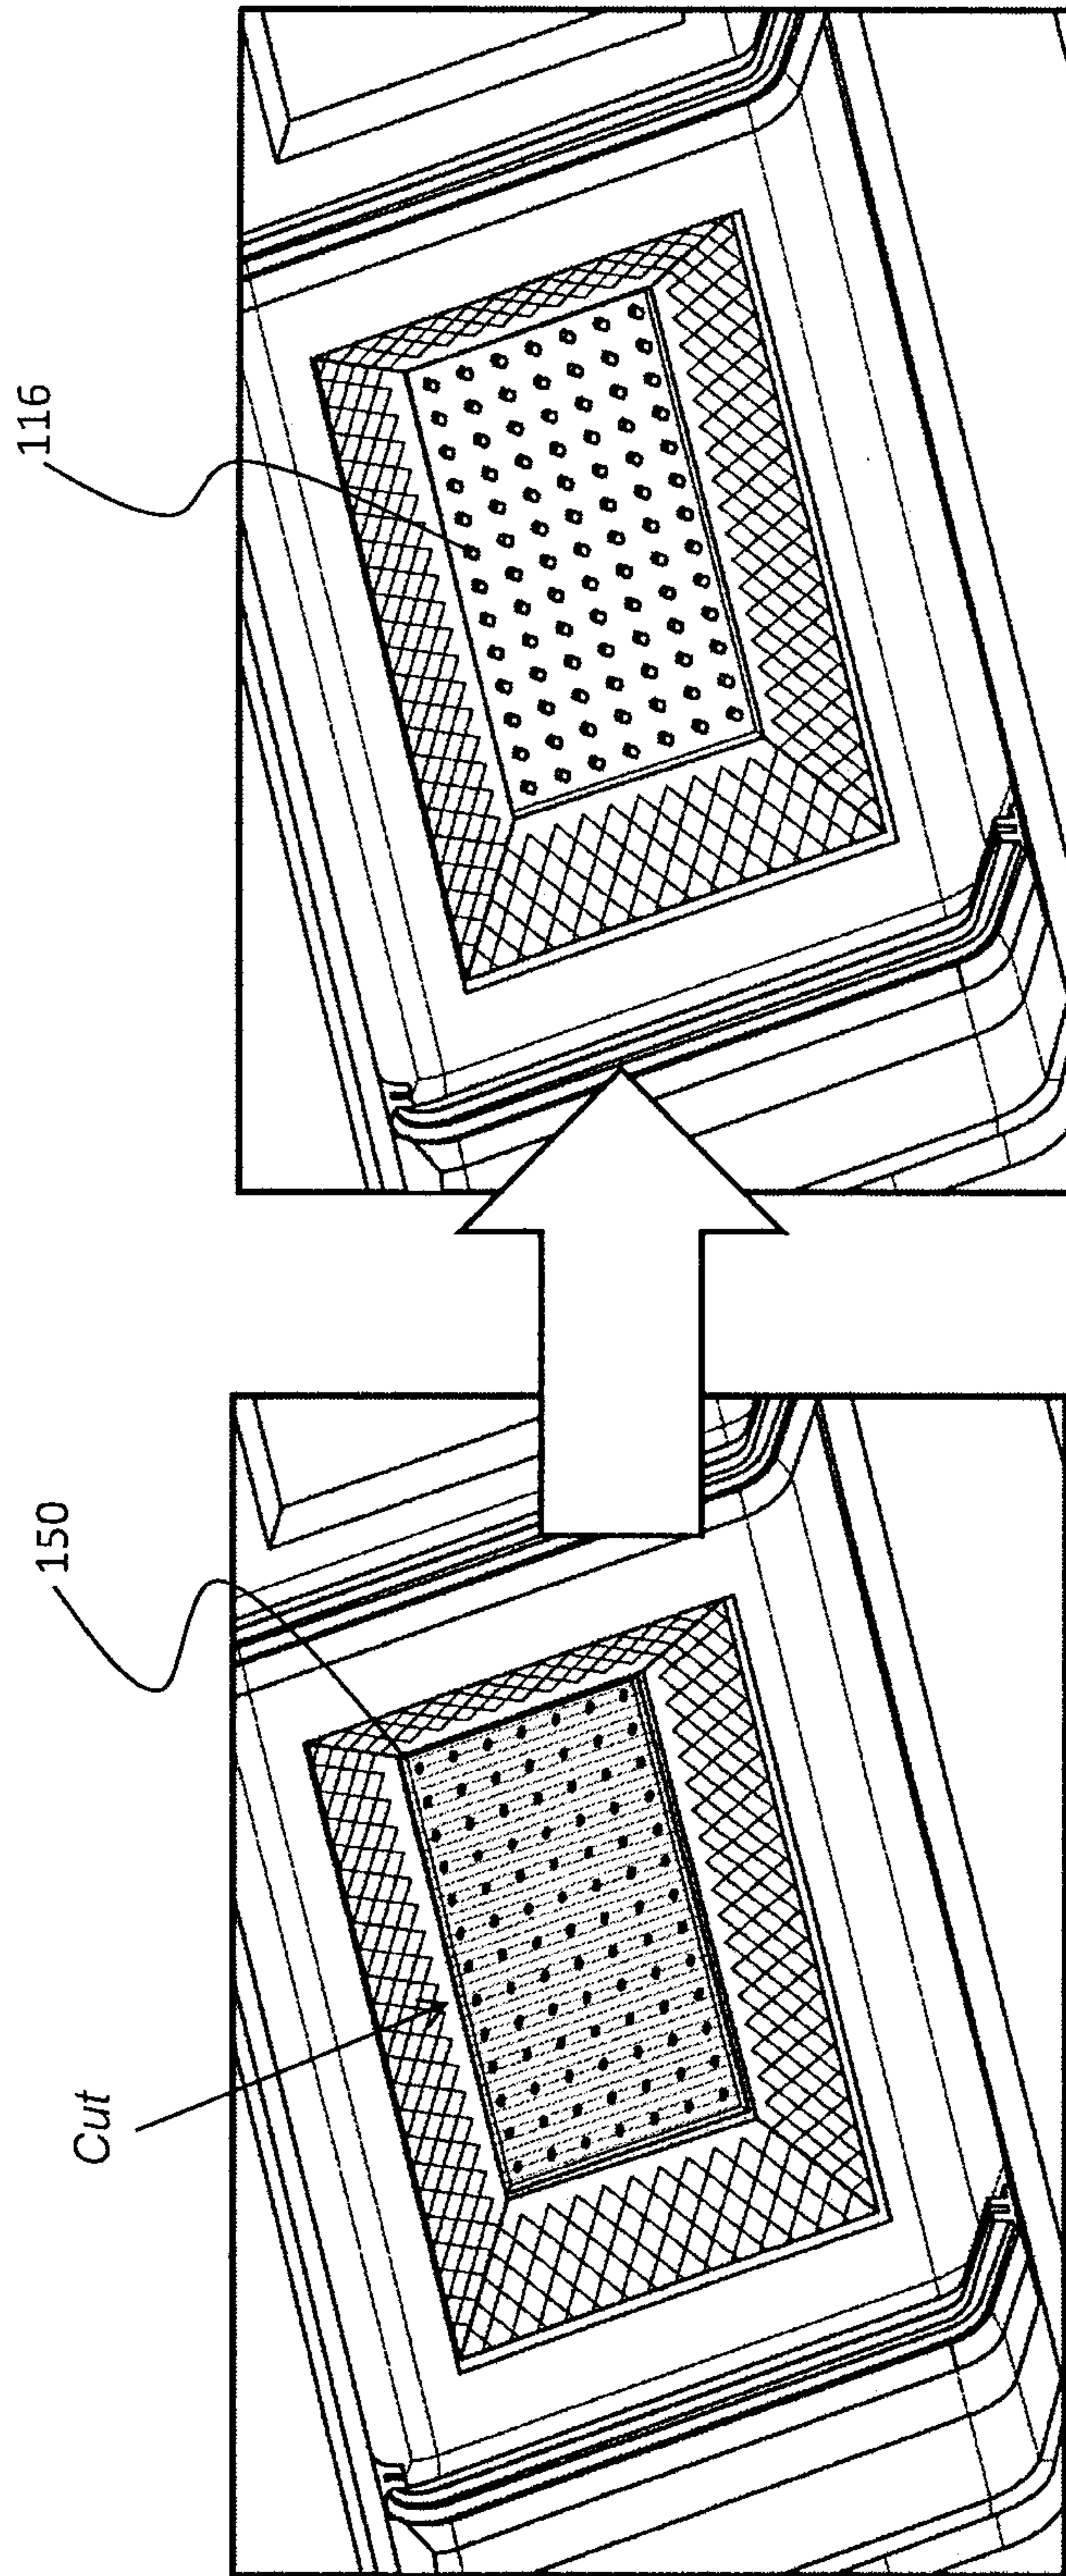


FIG. 5B

FIG. 5A

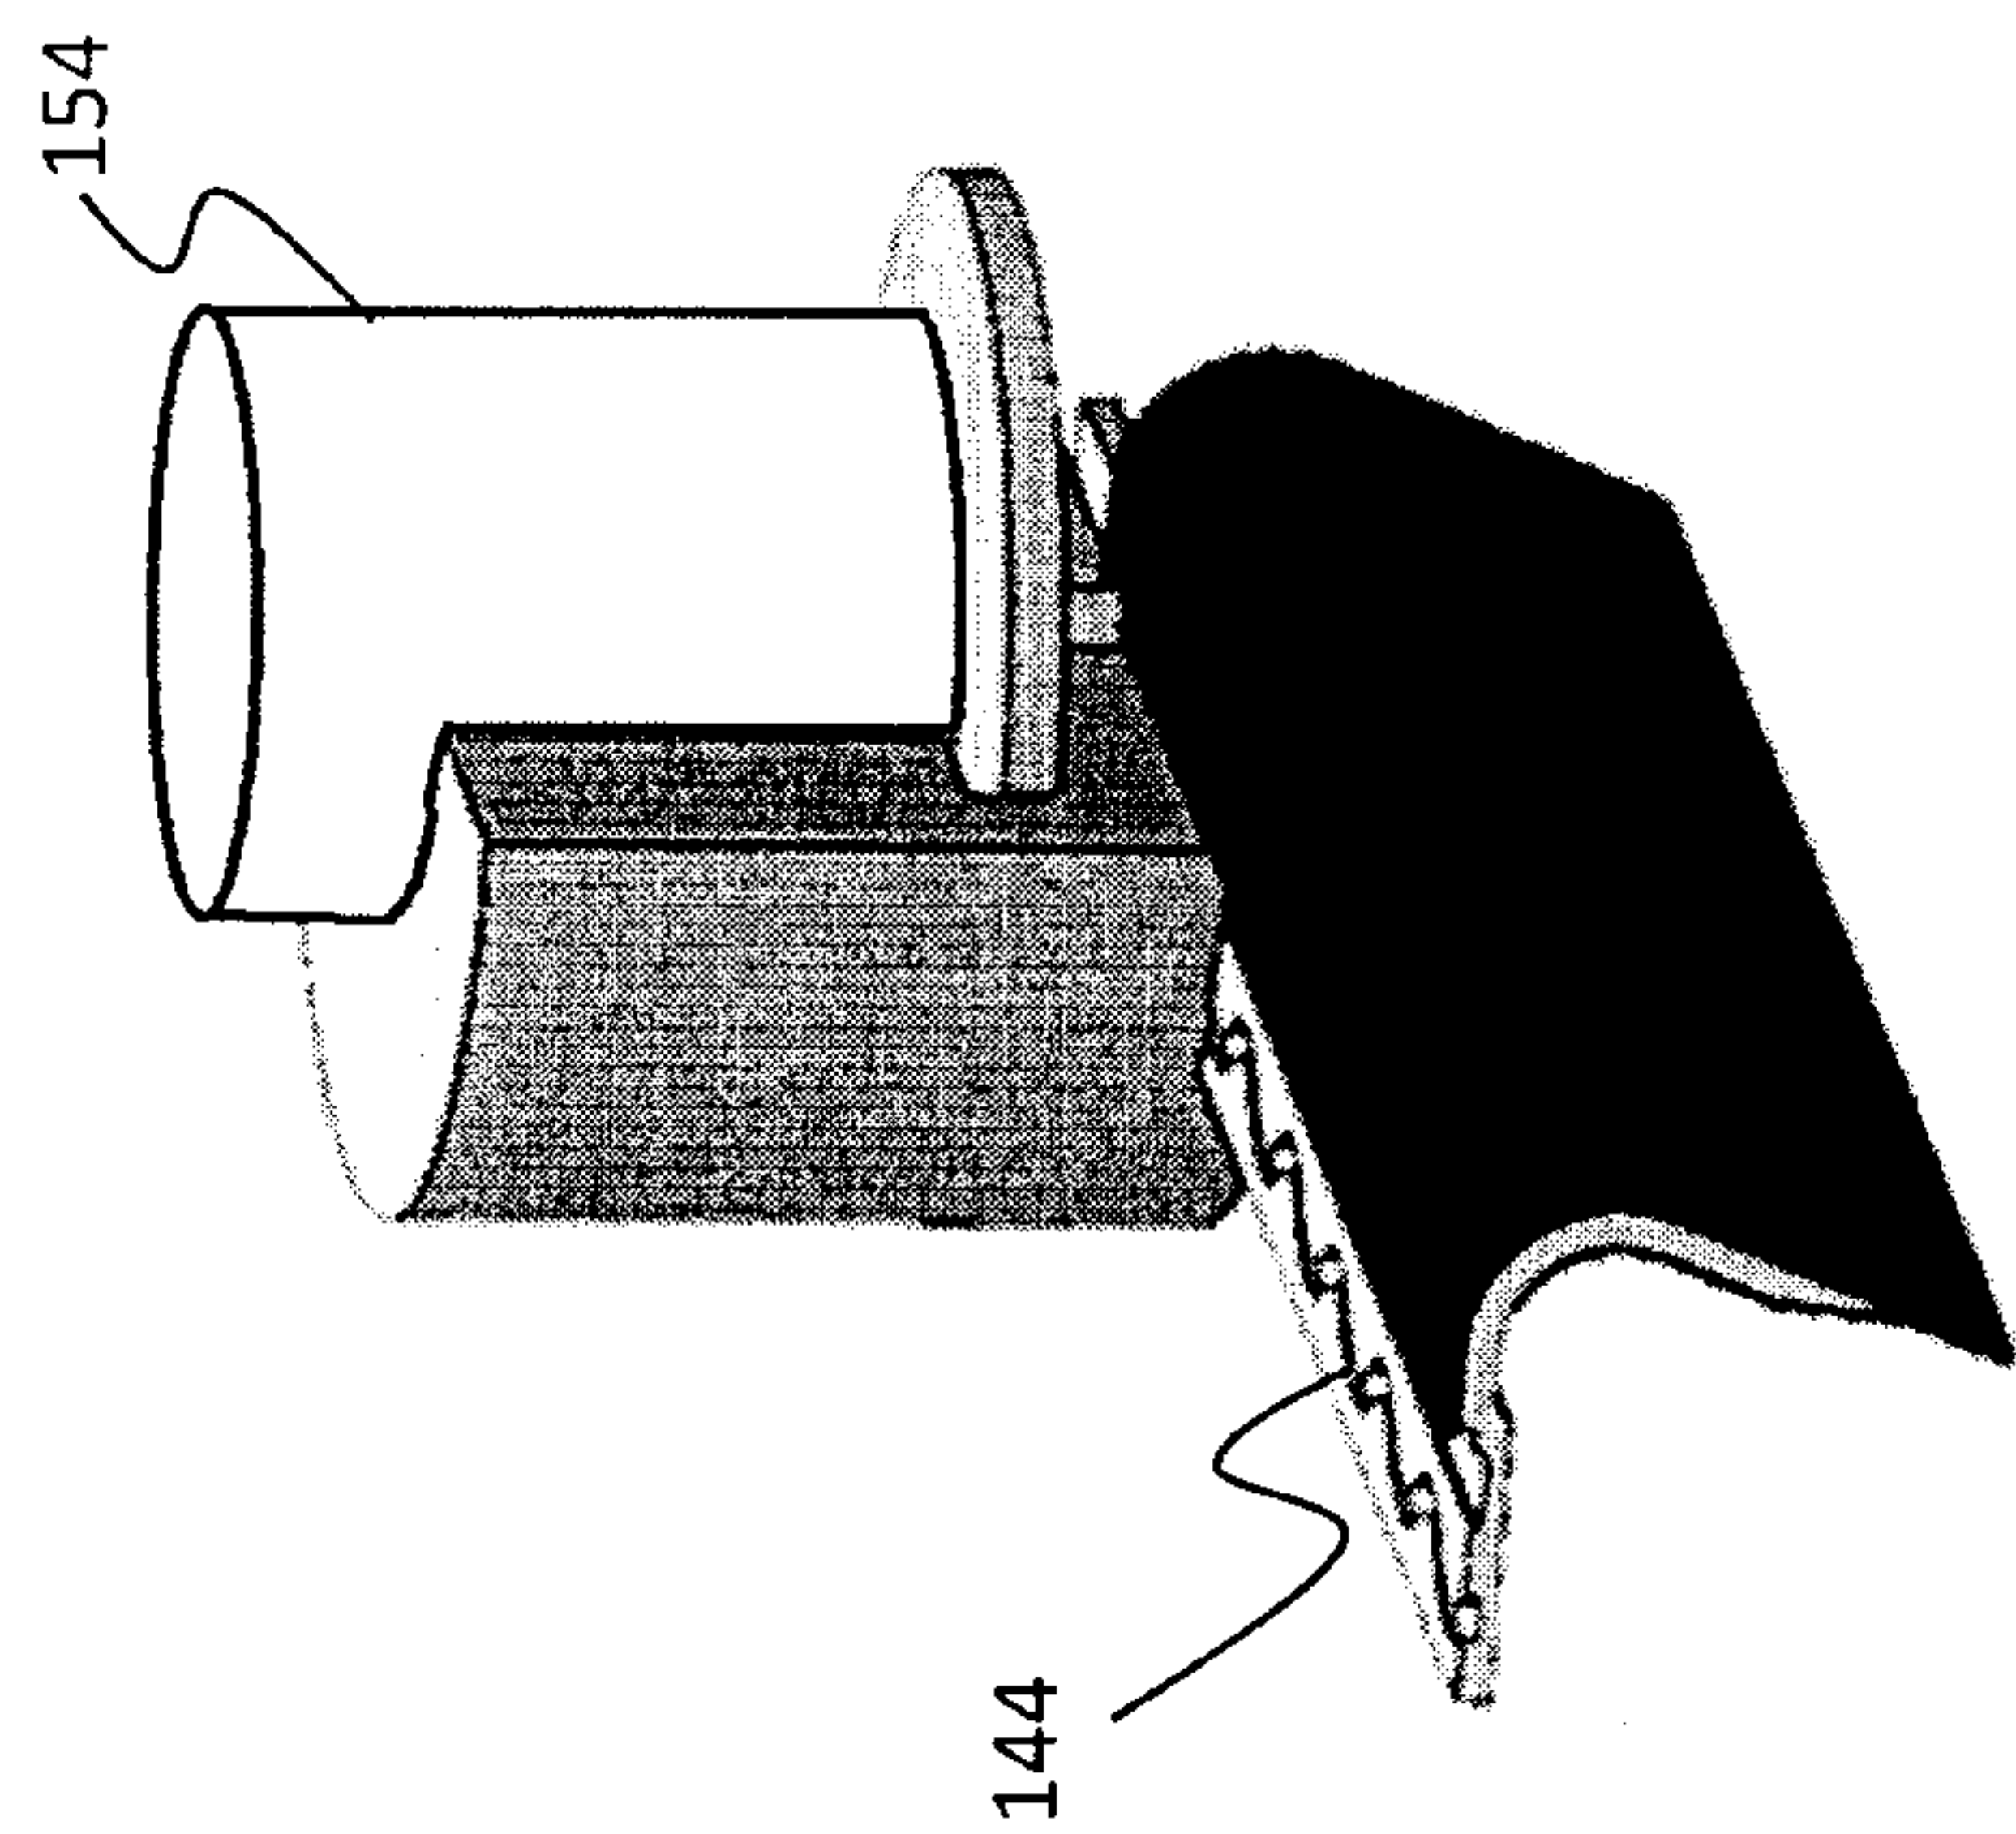


FIG. 6A


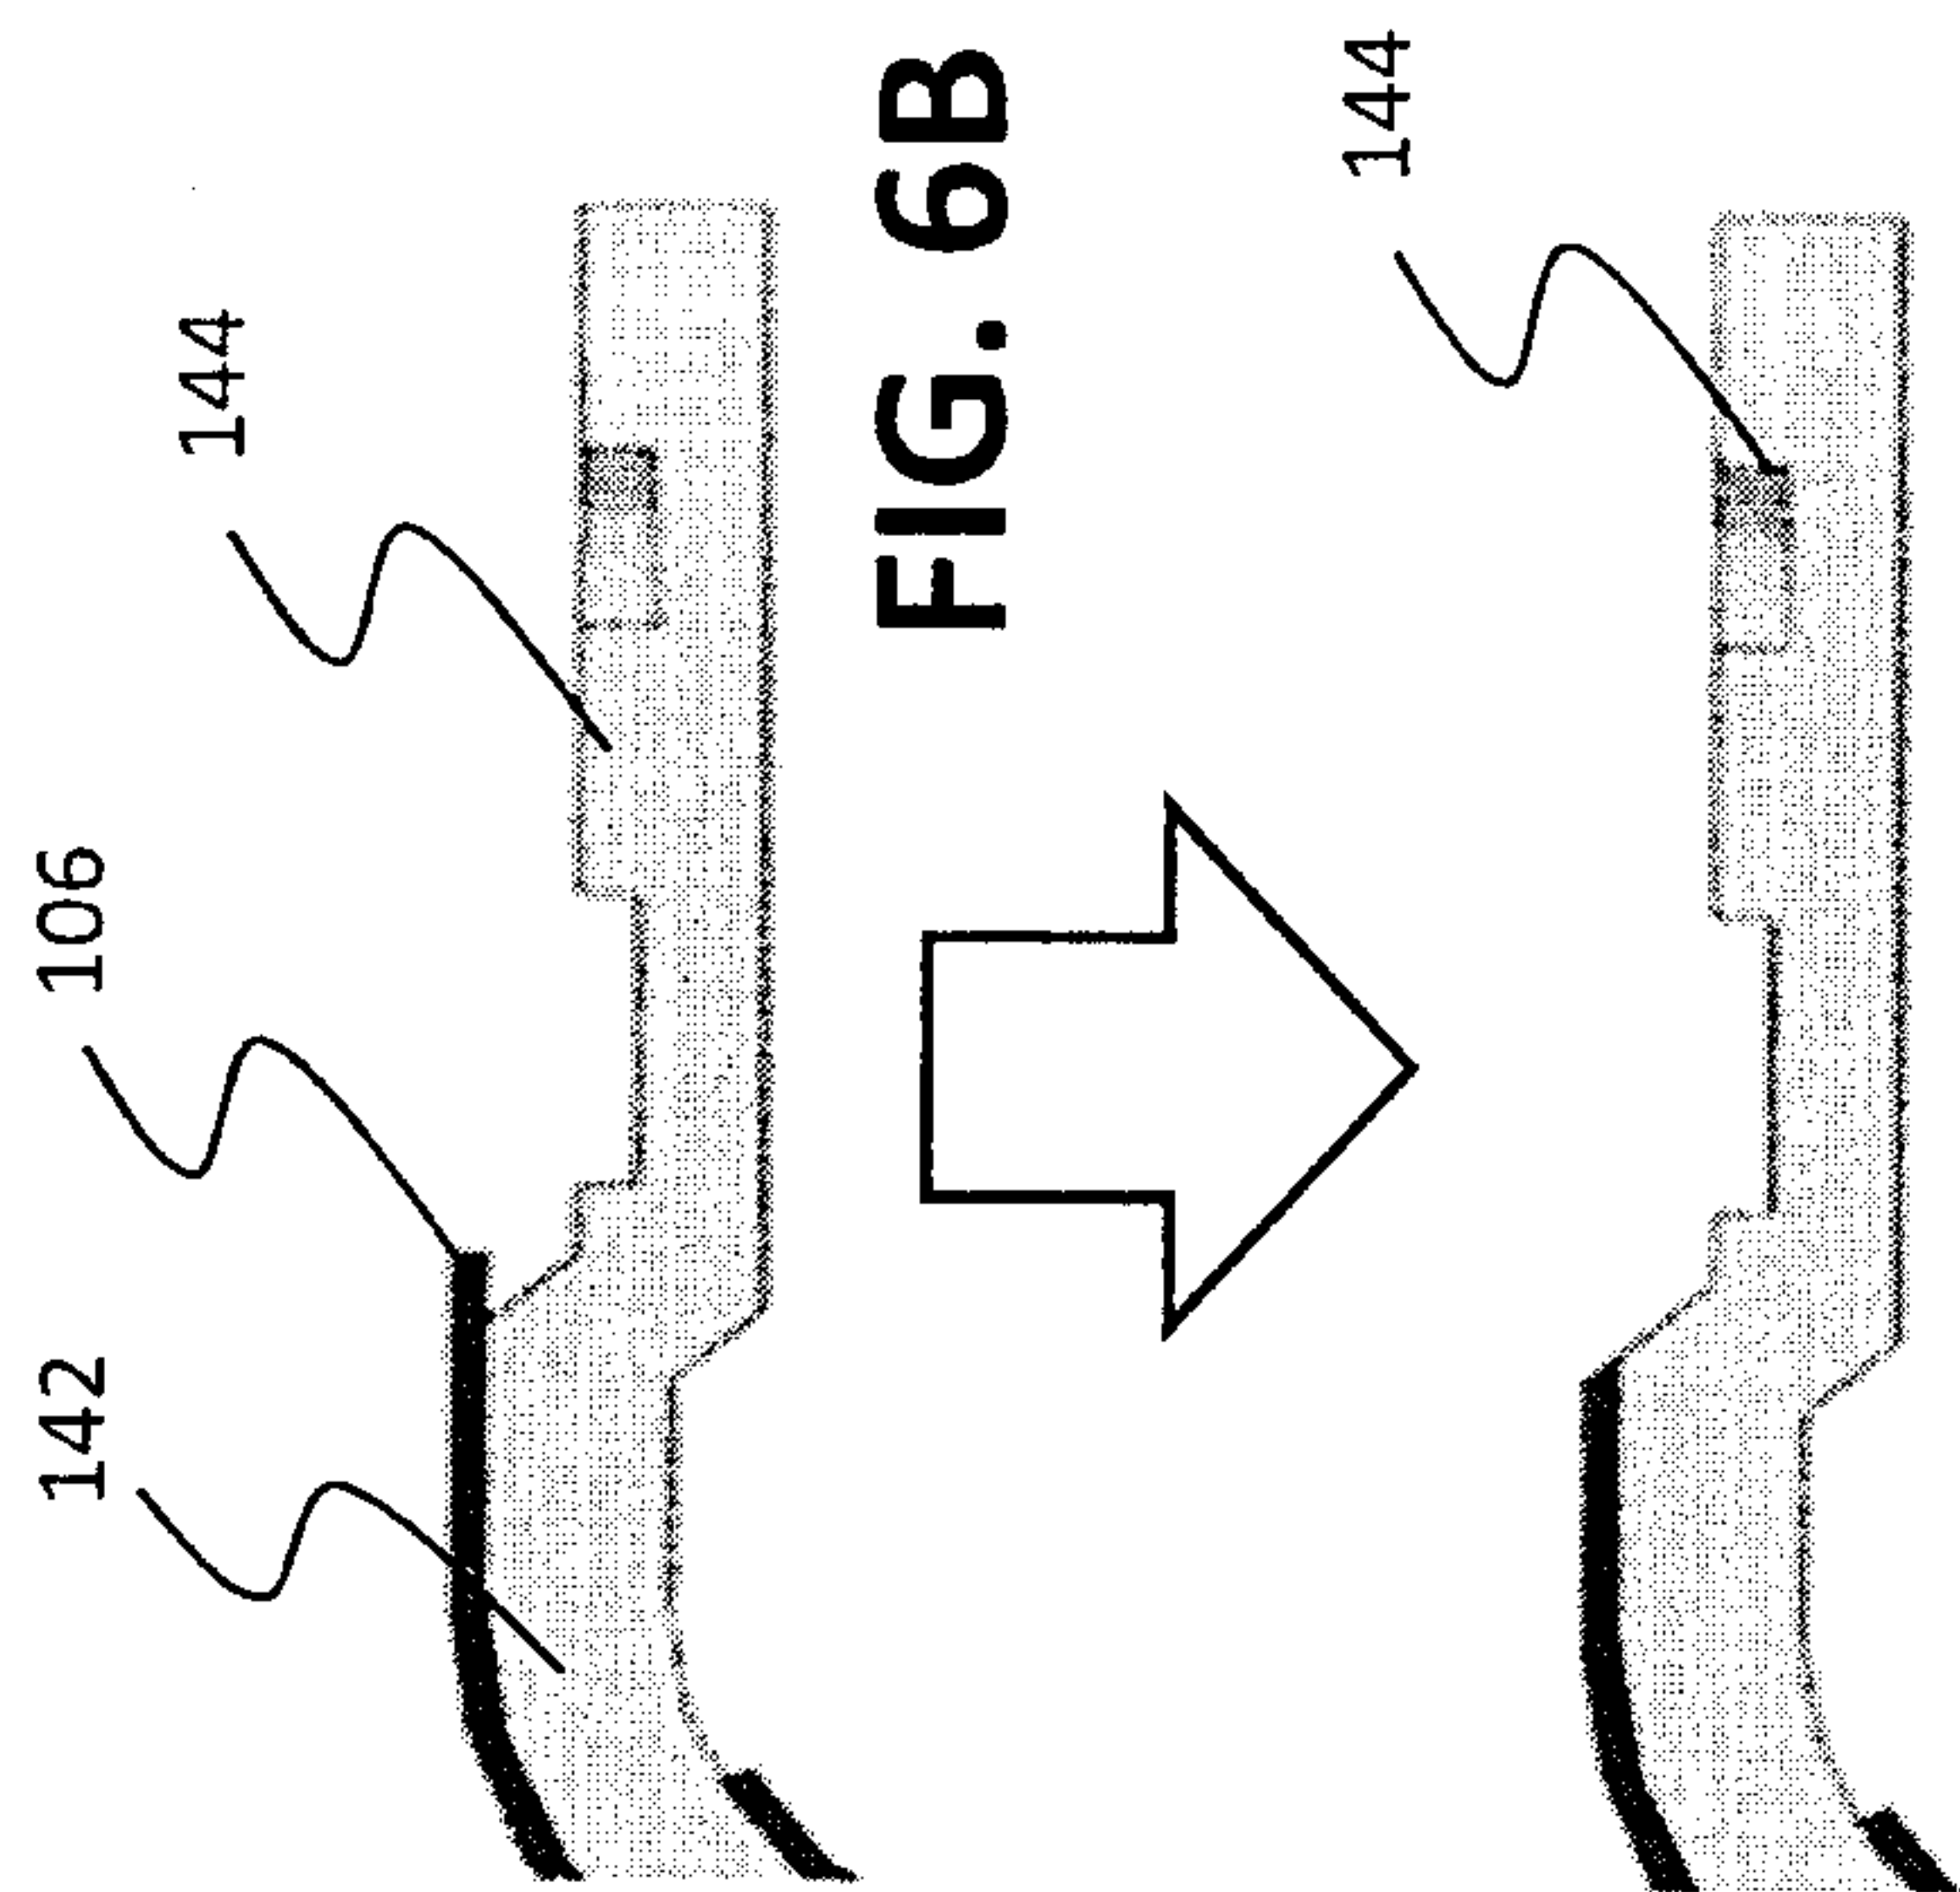


FIG. 6B


FIG. 6C

166

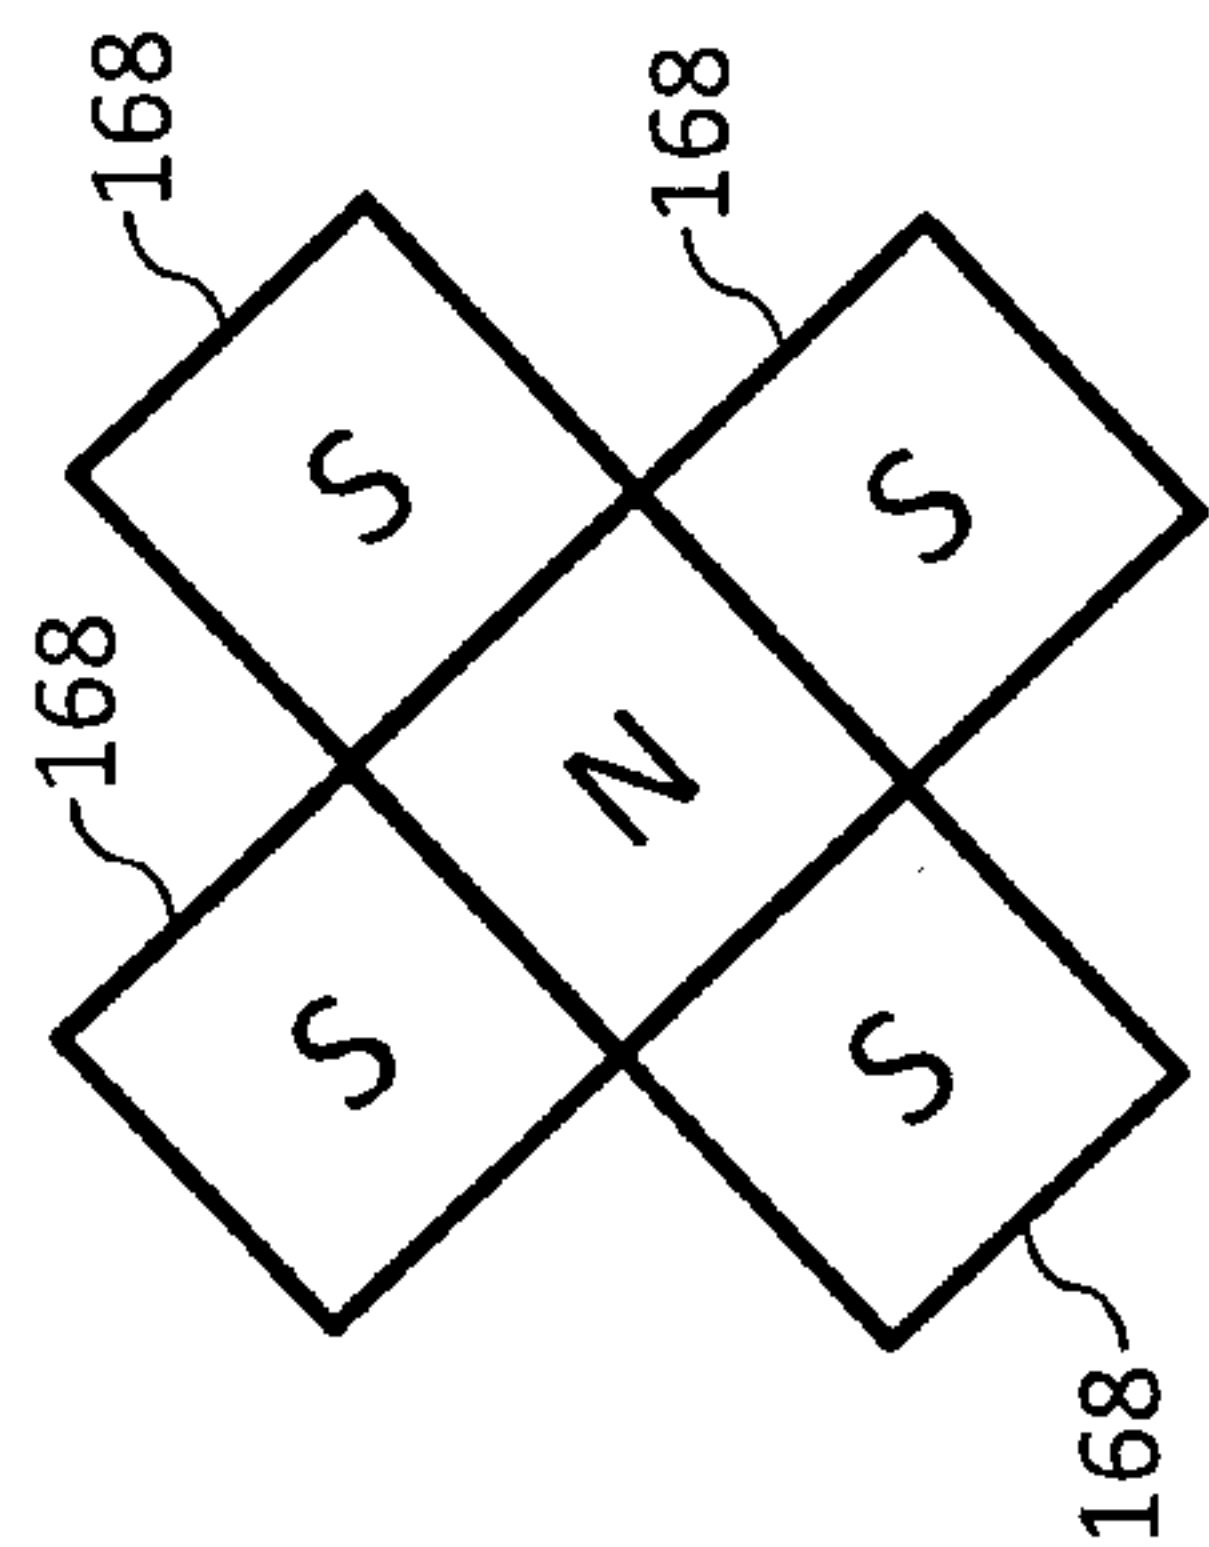


**FIG. 7B**


172

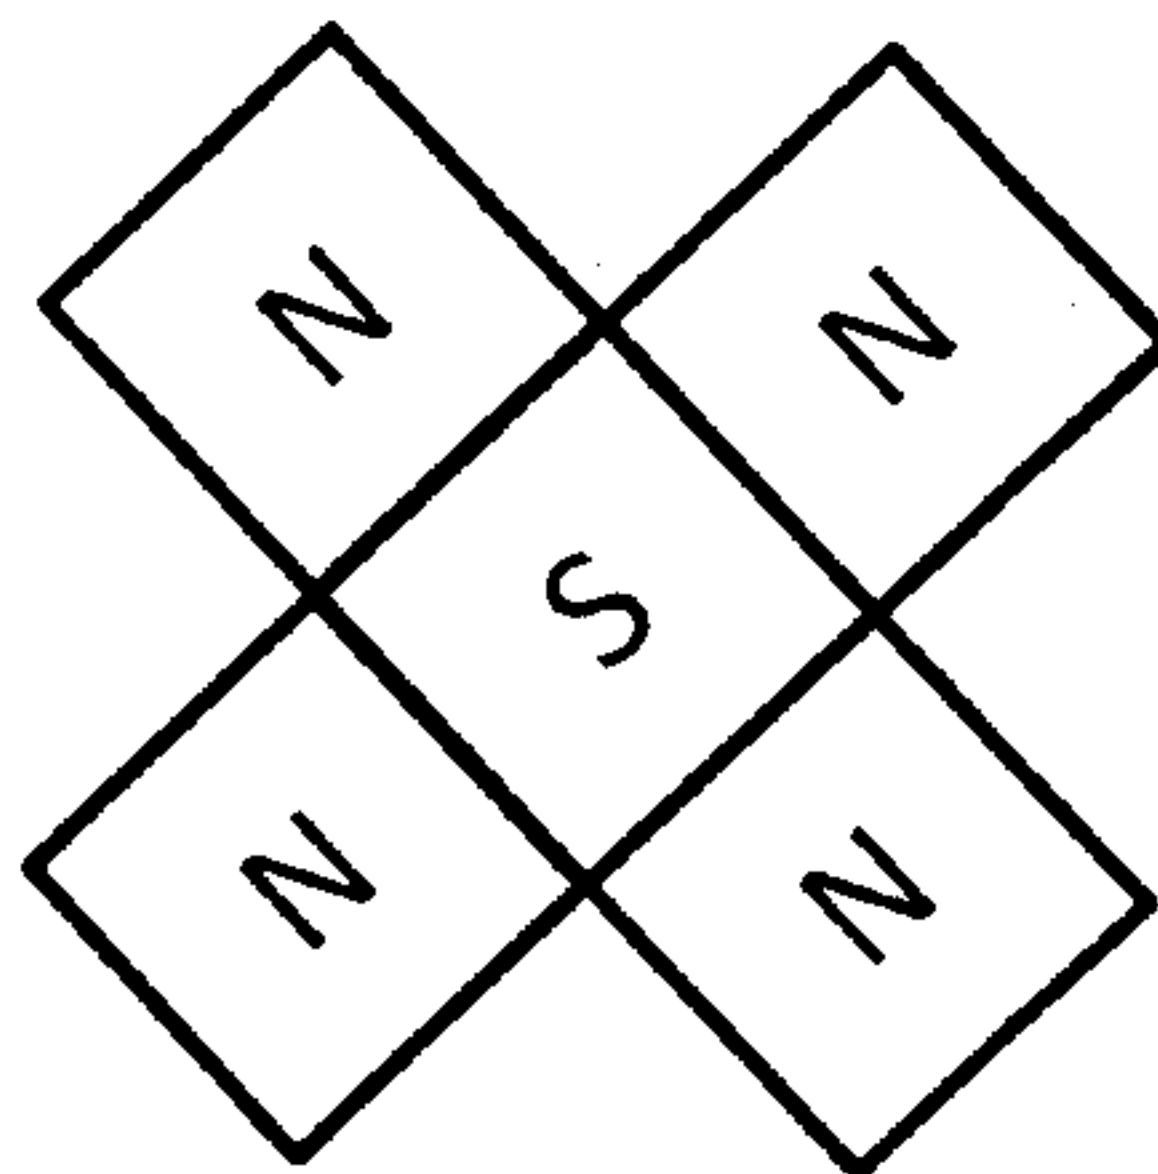

**FIG. 7D**

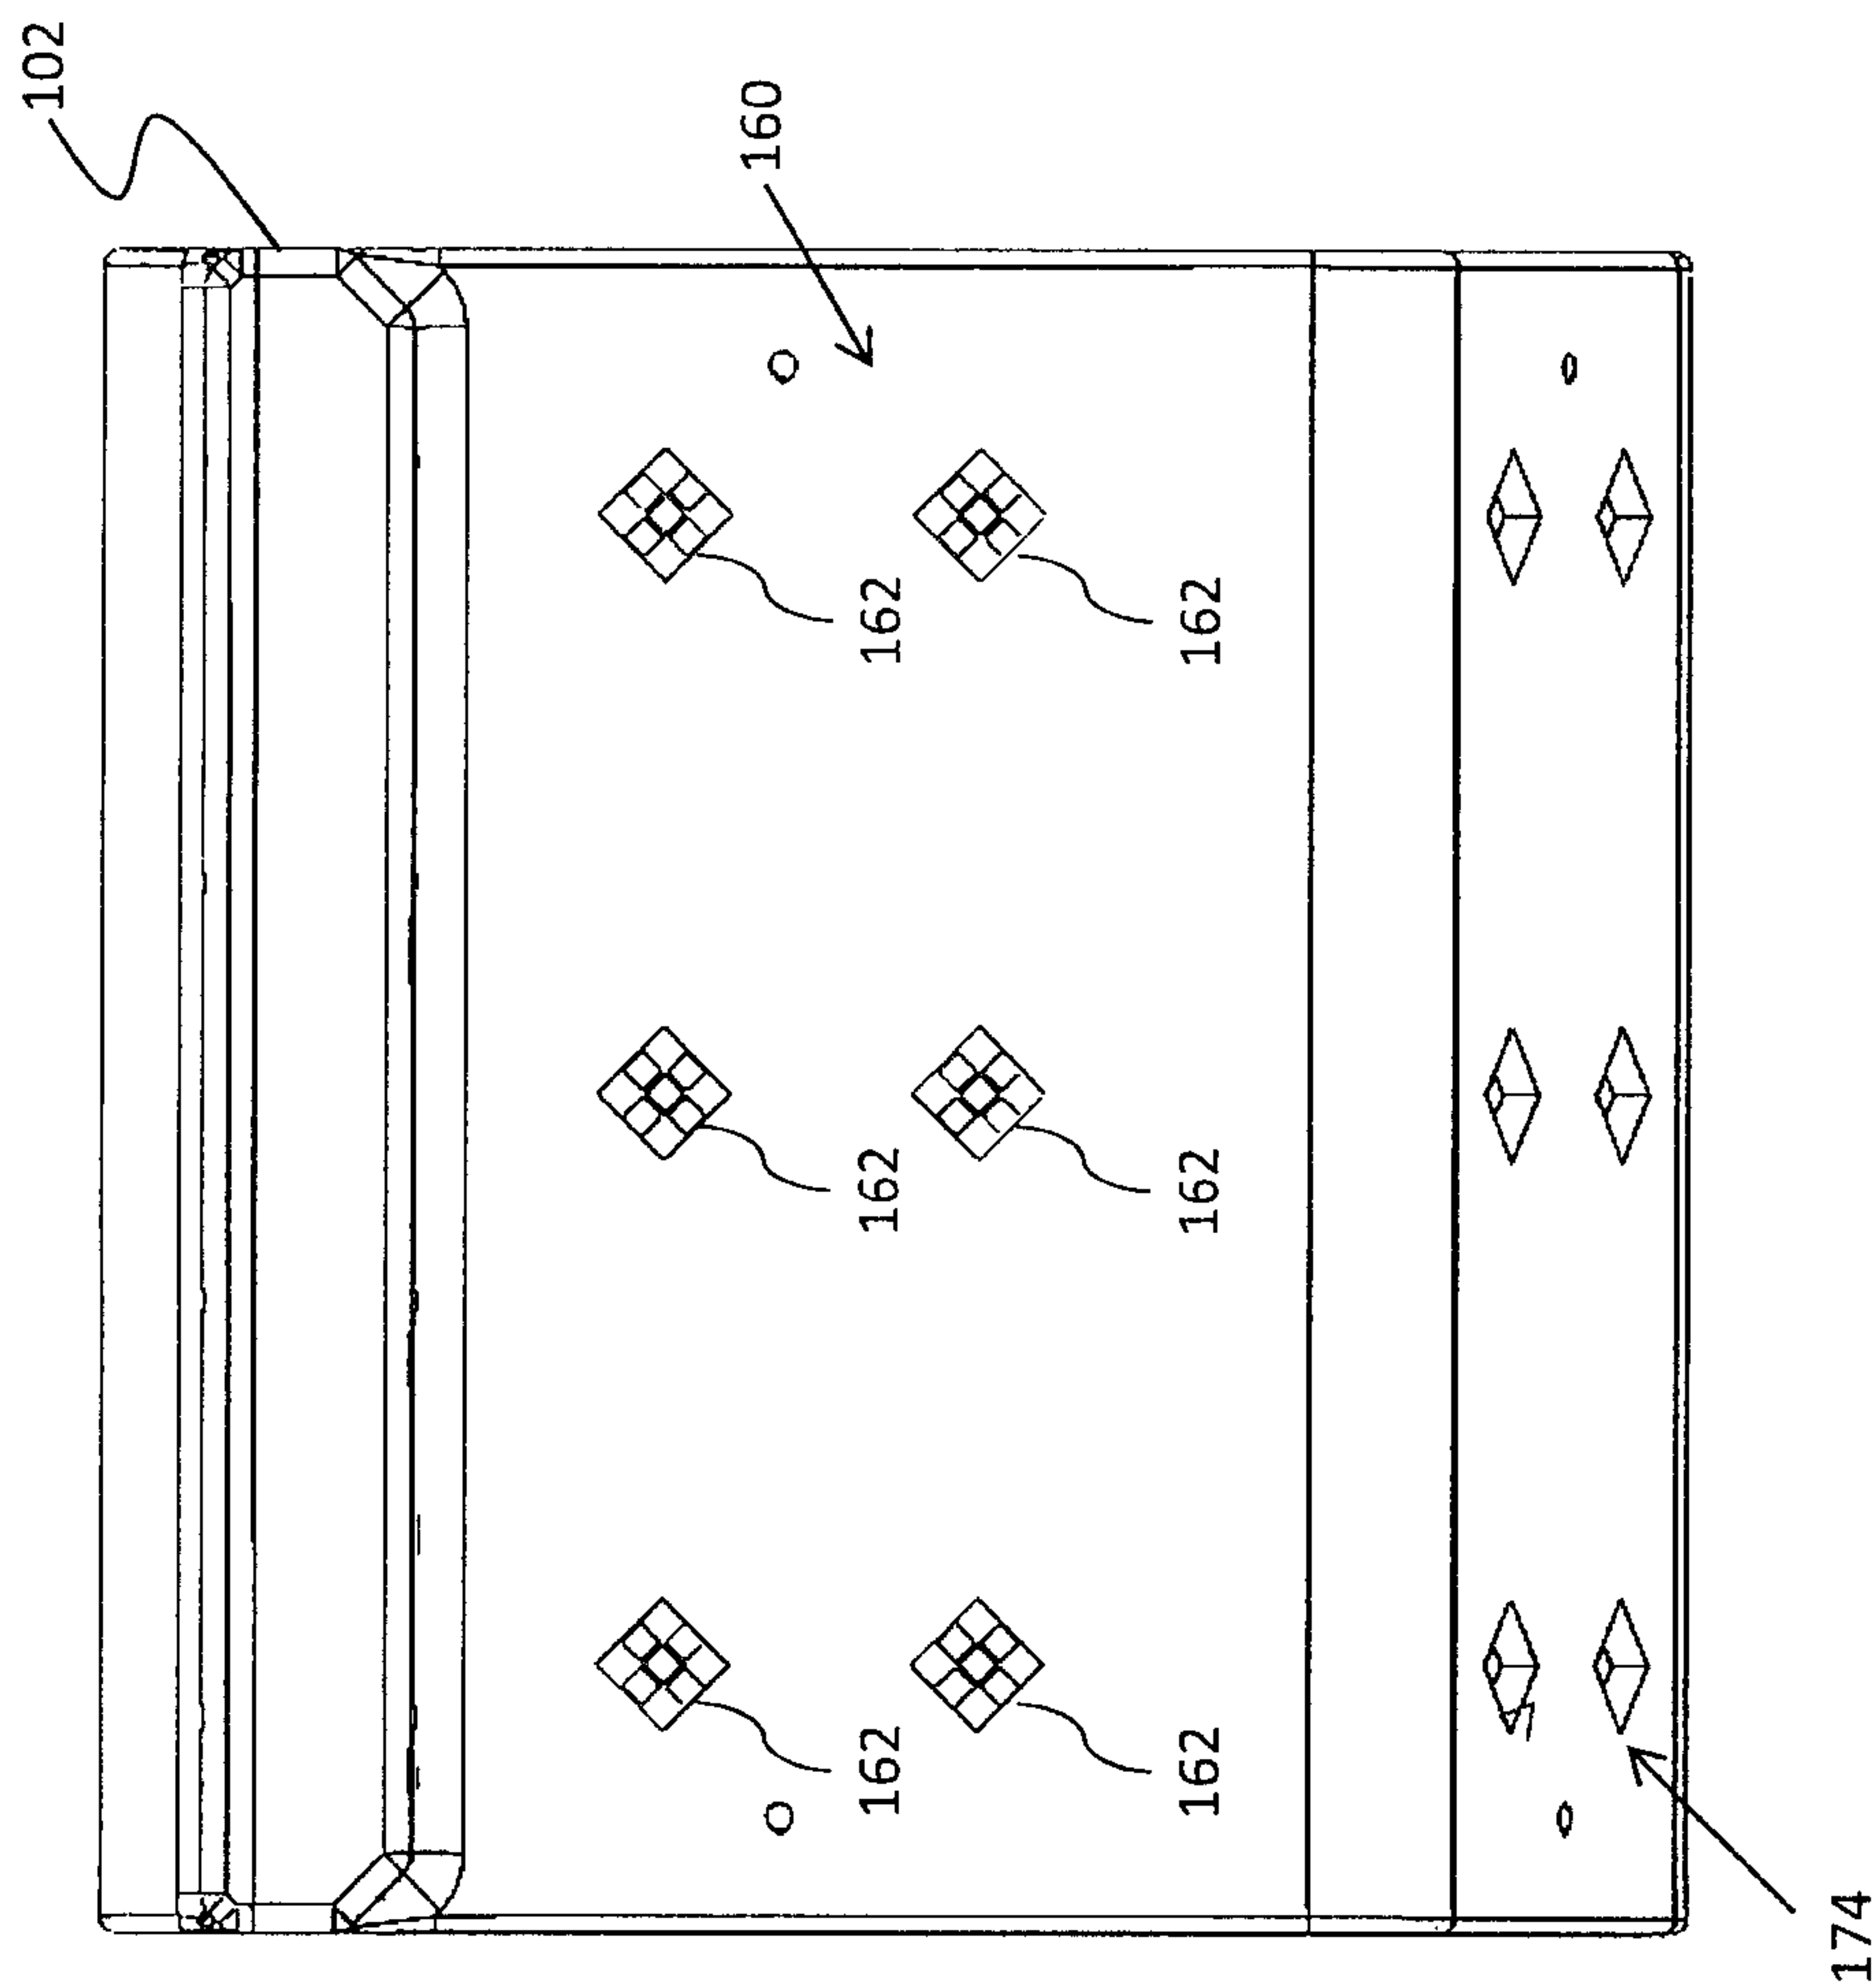

**FIG. 7A**

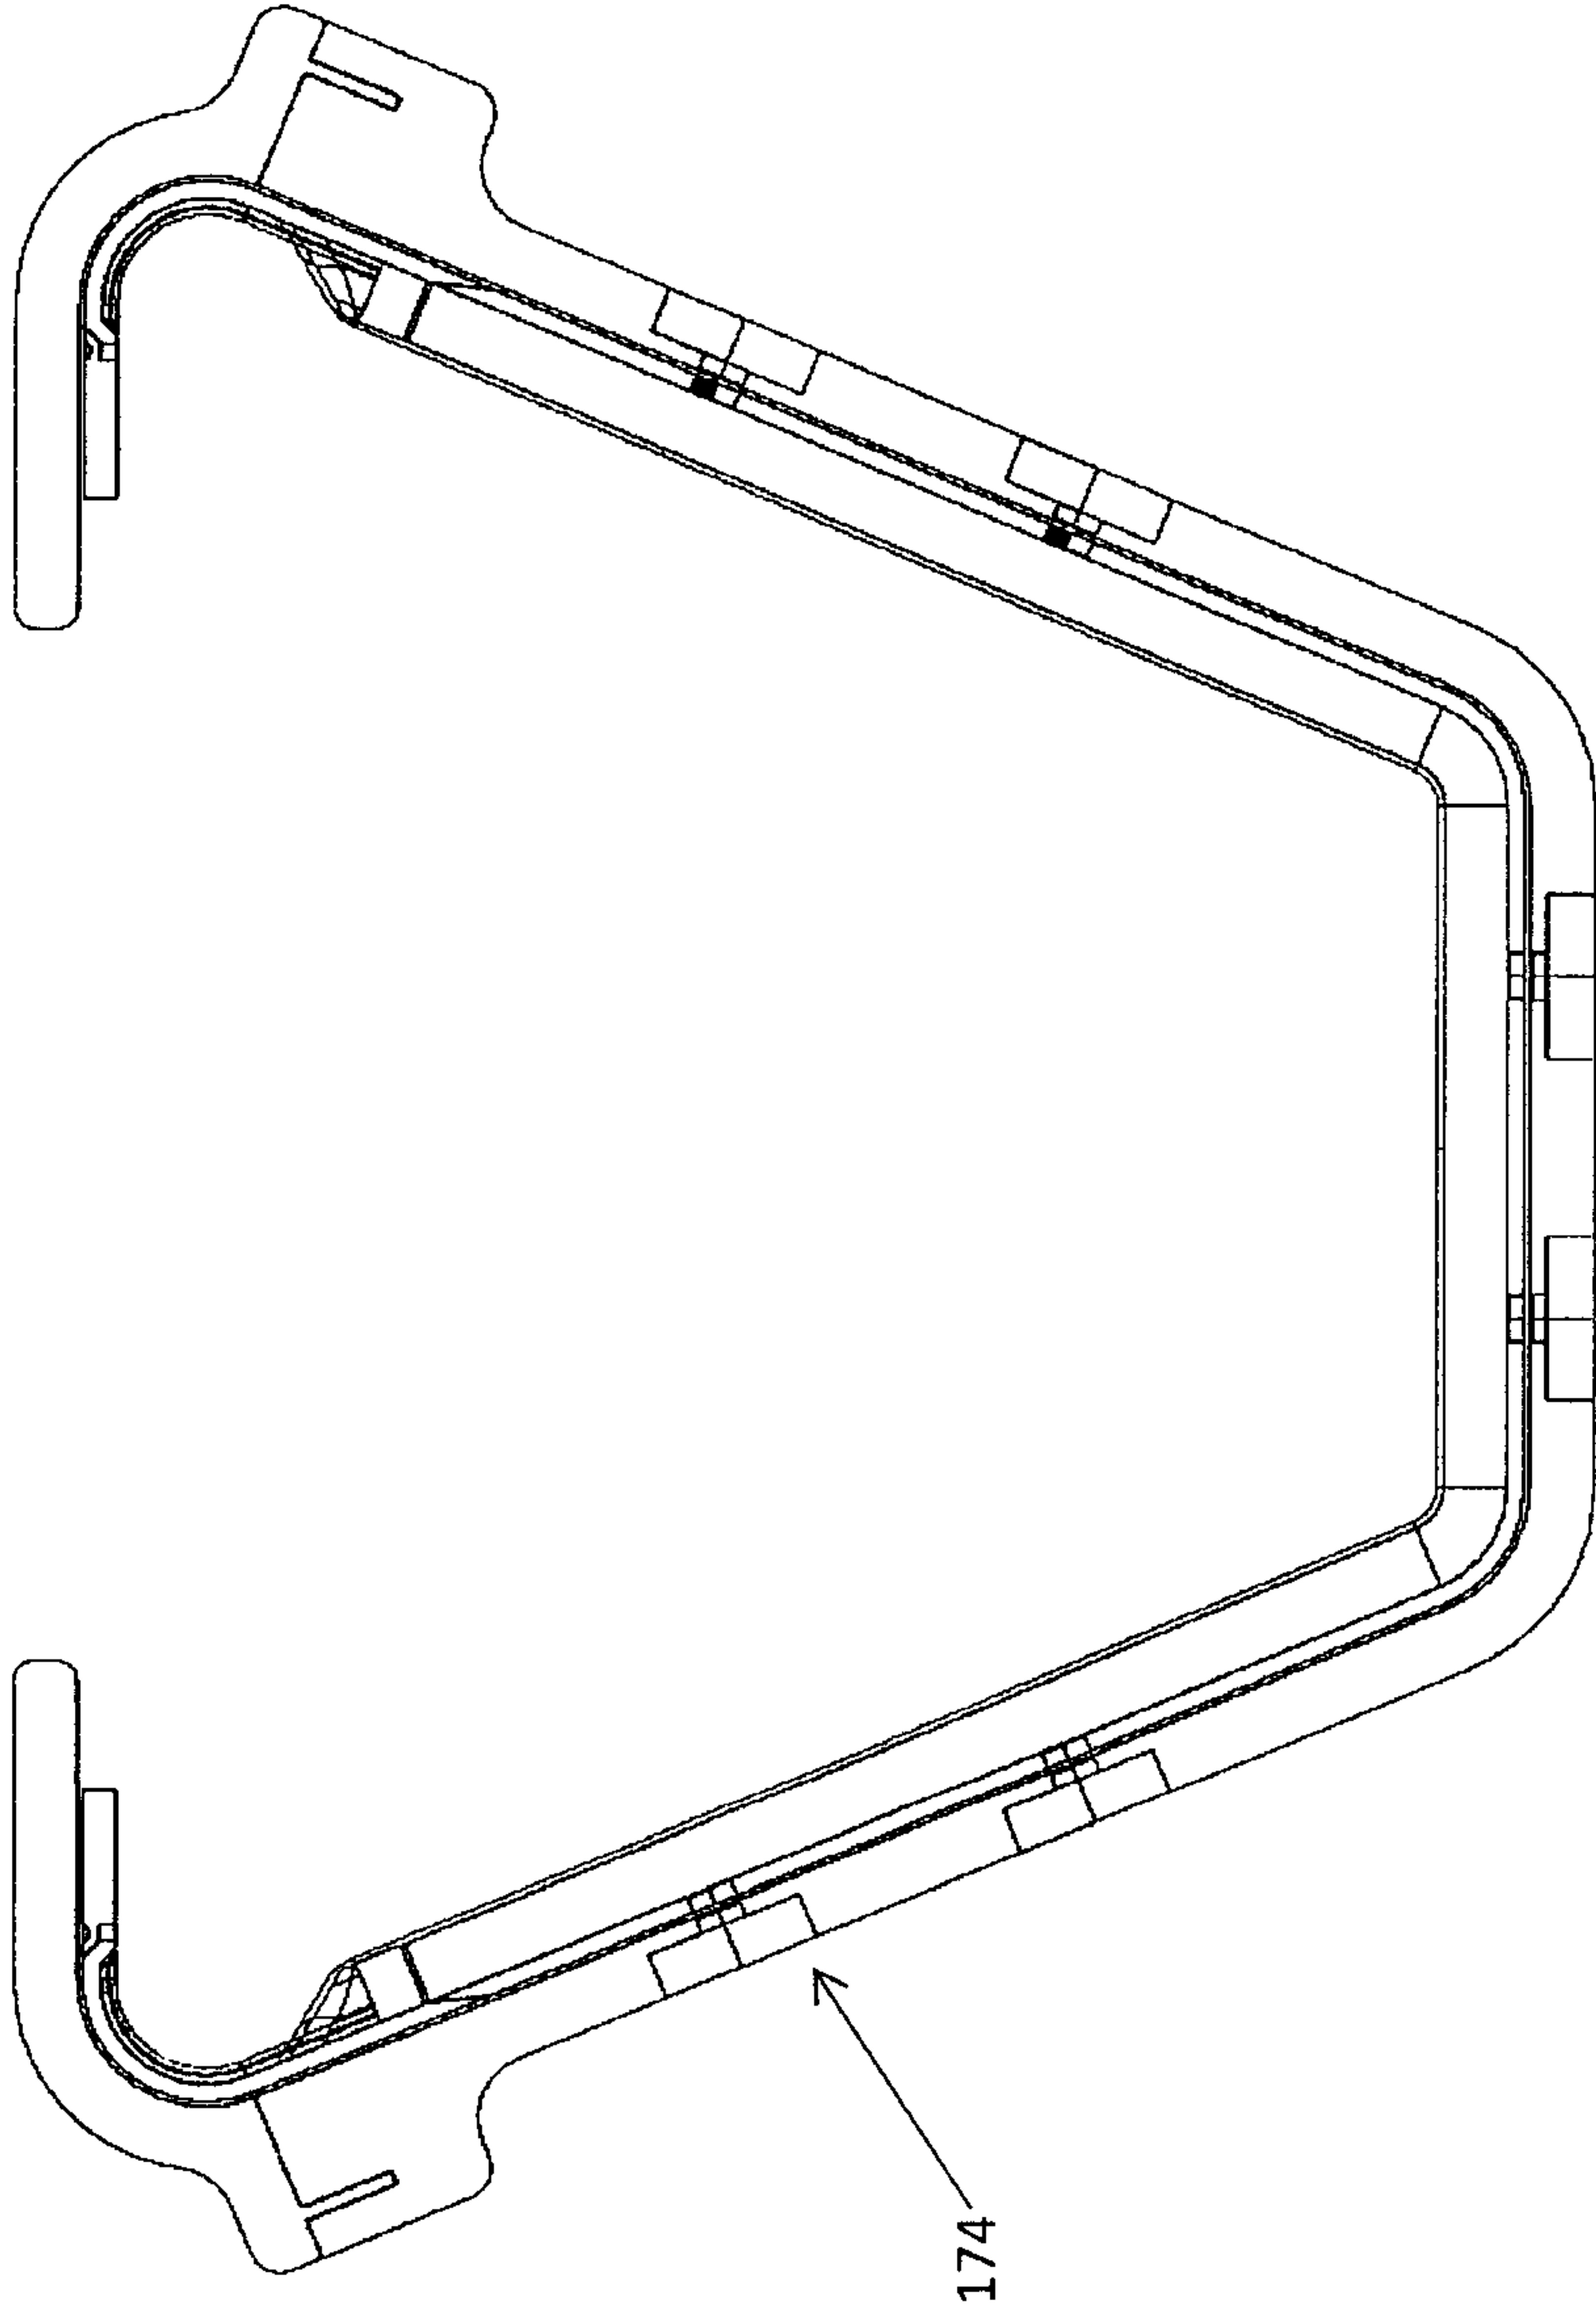

**FIG. 7C**

