




(86) Date de dépôt PCT/PCT Filing Date: 2014/03/26
(87) Date publication PCT/PCT Publication Date: 2014/10/23
(45) Date de délivrance/Issue Date: 2018/02/13
(85) Entrée phase nationale/National Entry: 2015/09/25
(86) N° demande PCT/PCT Application No.: EP 2014/056033
(87) N° publication PCT/PCT Publication No.: 2014/170104
(30) Priorité/Priority: 2013/04/19 (DE102013103970.7)

(51) Cl.Int./Int.Cl. *G01F 1/58* (2006.01),
G01F 15/18 (2006.01)
(72) Inventeurs/Inventors:
RAMSEYER, SEVERIN, CH;
ACHERMANN, MATTHIAS, CH;
ZIMMERMANN, HANS-RUEDI, CH
(73) Propriétaire/Owner:
ENDRESS+HAUSER FLOWTEC AG, CH
(74) Agent: SMART & BIGGAR

(54) Titre : DEBITMETRE A INDUCTION MAGNETIQUE DESTINE EN PARTICULIER A DES APPLICATIONS HAUTE
PRESSION

(54) Title: MAGNETIC-INDUCTION FLOW METER, PARTICULARLY FOR HIGH PRESSURE APPLICATIONS

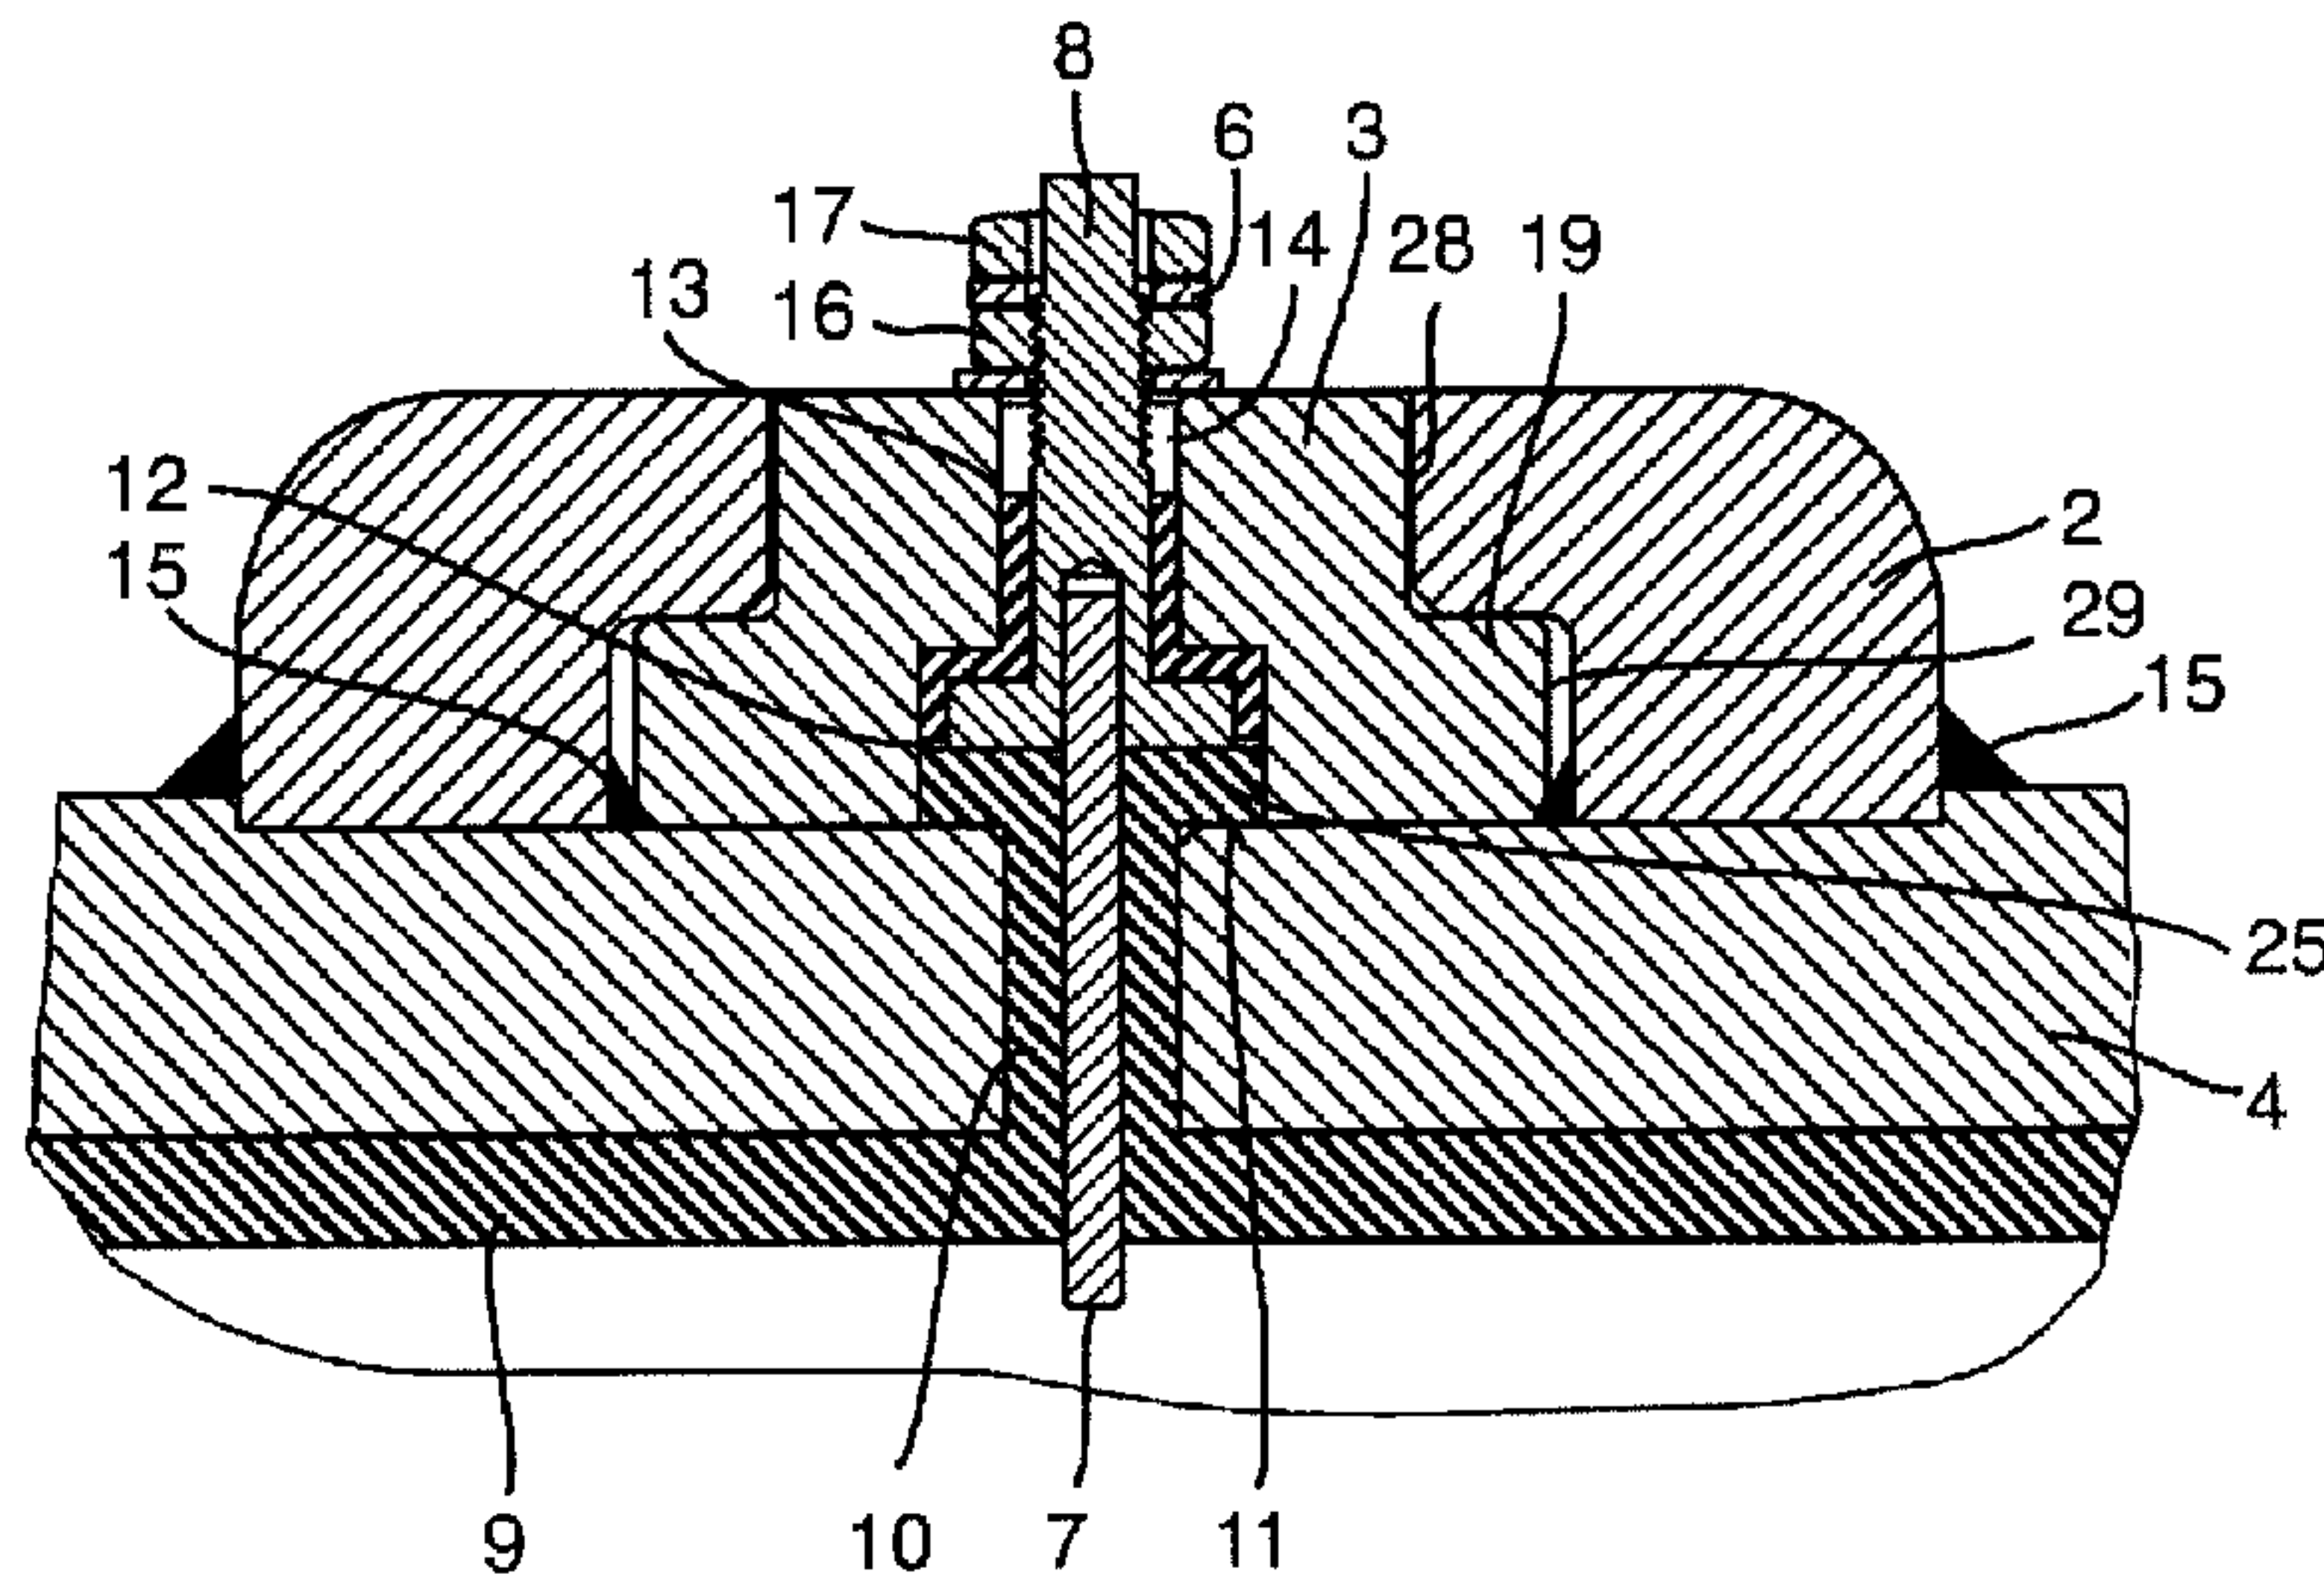

(57) **Abrégé/Abstract:**

The invention relates to a magnetic-induction flow meter, particularly for high pressure applications with medium pressures above 51 bar, having a measuring tube (4) on which a multi-part electrode anchor (1) for securing a measuring electrode (7) is arranged, which comprises the following components:

a) a coupling fitting (2), which is materially bonded to the measuring tube (4) and wherein the coupling fitting (2) comprises a groove, or forms a groove (29) together with the measuring tube (4), b) a coupling insert (3) for guiding and/or securing the measuring electrode (7), said coupling insert being connected to the coupling fitting (2) by way of a coupling, wherein said coupling insert (3) comprises anchoring wings (19) which engage in the groove (29) by a partial rotation and thereby effect the coupling. The invention further relates to an assembly procedure for an electrode anchor.

Abstract

The invention relates to a magnetic-induction flow meter, particularly for high pressure applications with medium pressures above 5.1 MPa (51 bar), having a measuring tube (4) on which a multi-part electrode anchor (1) for securing a measuring electrode (7) is arranged, which comprises the following components:

a) a coupling fitting (2), which is materially bonded to the measuring tube (4) and wherein the coupling fitting (2) comprises a groove, or forms a groove (29) together with the measuring tube (4),

b) a coupling insert (3) for guiding and/or securing the measuring electrode (7), said coupling insert being connected to the coupling fitting (2) by way of a coupling, wherein said coupling insert (3) comprises anchoring wings (19) which engage in the groove (29) by a partial rotation and thereby effect the coupling. The invention further relates to an assembly procedure for an electrode anchor.

81791873

1

MAGNETIC-INDUCTION FLOW METER, PARTICULARLY FOR HIGH PRESSURE APPLICATIONS

This invention concerns a magnetic-induction flow meter as well as an assembly procedure of an electrode anchor.

5

Magnetic-induction flow meters are used in many different fields of application. The problem of the anchoring of the measuring electrodes protruding into the measuring tube occurs especially in the area of high pressure applications.

10 In the past, several anchoring concepts have been described, which, however, for various reasons did not constitute any satisfactory solution.

DE 10 2007 004 827 A1 discloses a yoke assembly in one embodiment. Such a construction does, however, lead to excessive dimensions of the casing. US 7 938 020, US 2004 014 90 46 and US 3 924
15 466 each disclose screw connections or screw inserts to anchor the measuring electrode. Such screw connections might however lead to problems with tightness. US 4 388 834 discloses a so-called mushroom-head electrode whose connection to the measuring tube is based on its mushroom-head geometry. US 4 567 775 discloses a full grouting version used to anchor the measuring electrode.

20 Based on this state of the art, it is therefore the purpose of this invention to provide a magnetic-induction flow meter with an electrode anchor with high pressure stability and low construction height as well as a procedure for the construction of such an electrode anchor as well as a tool designed for this purpose.

25

According to the invention, a magnetic-induction flow meter that is particularly suitable for high pressure applications has a measuring tube with a multi-part electrode anchor to attach a measuring electrode, with the electrode anchor consisting of the following components:

- 30 a) a coupling fitting that is connected in same-substance manner with the measuring tube, with the coupling fitting having a groove or forming a groove together with the measuring tube.
b) a coupling insert for guiding and/or fixing a measuring electrode that is connected with the coupling fitting via a coupling, with the coupling insert having anchoring wings that engage in the groove by a partial rotation and thus effect the coupling.

35 The coupling fitting may hence either already have a groove or form one in interaction with the measuring tube. The anchoring wings engage in that groove. Fastening and loosening is effected by a partial rotation, e.g. by 90°, as in a bayonet catch.

This electrode anchor is suitable for securely attaching electrodes on the tube even at high
40 medium pressures, e.g. at medium pressures over 5 MPa (50 bar).

81791873

2

5 It is advantageous if the coupling insert has a recess parallel to the measuring electrode axis, in which the measuring electrode and/or a measuring electrode attachment connected to it is arranged. This recess allows the measuring electrode to be guided within the coupling insert.

10 It is an advantage if the measuring electrode or the measuring electrode attachment connected with the measuring electrode is fixed against the coupling insert in a tight fit. The tight fit allows a firm hold of the measuring electrode at least on one side, with the measuring electrode - as, for example, shown in Fig. 2 - being pressed against the sealing surface of a sealing insert.

15 It is advantageous if the external diameter of the measuring tube has a flat surface in the area of the electrode anchor. This allows for a large connecting surface between the measuring tube and the coupling fitting and thus high tear resistance.

20 The anchoring wing and the coupling fitting advantageously have surfaces that are placed over each other, so-called coupling surfaces, which have an inclination angle with regard to the flat surface of the external diameter of the measuring tube to set the rotation direction for the coupling of both, the coupling fitting with the coupling insert. This intuitively specifies the rotation direction during assembly, as an end stop is provided in the contrary rotation direction.

25 The coupling fitting is advantageously welded to the measuring tube and preferably fastened with circumferential welding seams. This allows for a same-substance fit. The coupling fitting and, if required, also the coupling insert are made of metal, just like the measuring tube, especially of steel.

The partial rotation for the coupling is advantageously done at an angle of 45-135°, preferably 60-120°, and especially 80-100°. The same applies for loosening the coupling.

30 The coupling advantageously is effected as a form-fitted coupling.

The coupling fitting may advantageously be designed as two L-shaped retaining brackets which require only very little space and reach behind the anchoring wings of the coupling insert.

35 It is advantageous if the recess in the coupling insert running parallel to the measuring electrode axis has a damping sleeve to limit the free movement of the measuring electrode and/or the measuring electrode attachment inside the recess and/or to electrically insulate the measuring electrode with regard to the coupling insert.

81791873

The measuring electrode may in some sections be surrounded by an insert made of a pressure-tight material arranged in a borehole in the measuring tube along the entire length of the borehole and having a sealing surface at the end, preferably in the form of a projection, on which the measuring electrode attachment is placed. This arrangement provides additionally improved pressure tightness.

It is advantageous if the sealing surface has an outwards material curvature when viewed from the radial direction.

The measuring tube may advantageously be coated on the inside at least in some sections with an electrically-insulating material layer, with the measuring electrode punctuating this material layer and the material layer having a material curvature in the direction of the measuring tube axis in the area of the measuring electrode.

According to the invention, an assembly process for an electrode anchor for a measuring electrode on a measuring tube of a magnetic-induction flow meter comprises the following steps:

- a) If necessary, attachment of flat surfaces on the external diameter on the measuring tube of the magnetic-induction flow meter;
- b) Fixing of a coupling fitting on the external diameter of the measuring tube, preferably while forming a groove together with the measuring tube;
- c) Insertion of a coupling insert into the coupling fitting orthogonally to the measuring tube.
- d) Rotating movement of the coupling insert, with the anchoring wings arranged on the coupling insert engaging in the groove or a groove arranged in the coupling fitting and wherein during the rotating movement a measuring electrode attachment partly arranged in the coupling insert, or a measuring electrode, is pressed against the coupling insert in a tight fit.

The assembly of the electrode anchor may be effected simply by a socket wrench not explained in detail.

81791873

3a

According to another aspect of the present disclosure, there is provided a magnetic-induction flow meter for high pressure applications with medium pressures of more than 5.1 MPa (51bar) with a measuring tube onto which an electrode anchor consisting of several parts for the purpose of fastening a measuring electrode is arranged, comprising the following components: a) a coupling fitting that is connected by adhesive bond with the measuring tube, with the coupling fitting having a groove or forming a groove together with the measuring tube, b) a coupling insert to guide and/or fix the measuring electrode that is connected to the coupling fitting via a coupling, wherein the coupling insert has anchoring wings that engage in the groove by means of a partial rotation and thus effect the coupling.

There is also provided an assembly process for an electrode anchor for a measuring electrode on a measuring tube of such a magnetic induction flow meter, comprising the following steps: a) attachment of flat surfaces on the external diameter on the measuring tube of the magnetic-induction flow meter; b) fixing of a coupling fitting on the external diameter of the measuring tube, preferably while forming a groove together with the measuring tube; c) insertion of a coupling insert into the coupling fitting orthogonally to the measuring tube, d) rotating movement of the coupling insert, with the anchoring wings arranged on the coupling insert engaging in the groove or a groove arranged in the coupling fitting and wherein during the rotating movement a measuring electrode attachment partly arranged in the coupling insert, or a measuring electrode, is pressed against the coupling insert in a tight fit.

The invention is described in more detail using the included illustrations on the basis of several exemplary embodiments. They show:

- Fig. 1 schematic view of an electrode anchor on the measuring tube of a magnetic-induction flow meter according to the invention;
- Fig. 2 sectional view of the electrode anchor;
- Fig. 3a-3c various views of a coupling insert as part of the electrode anchor;
- Fig. 4a-4c various views of a coupling fitting as part of the electrode anchor;
- Fig. 5 sectional view of a second modified electrode anchor;
- Fig. 6 sectional view of a third modified electrode anchor;

The structure and measuring principle of a magnetic-induction flow meter is basically known. According to Faraday's induction law, a voltage is induced in a conductor that moves inside a magnetic field. For the magnetic-inductive measuring principle, the flowing measuring substance corresponds to the moving conductor. A magnetic field with constant strength is generated by two field coils on two sides of a measuring tube. On the internal wall of the measuring tube, there are two measuring electrodes orthogonally to the former. When the measuring substance flows through the tube, they tap the voltage that is generated. The voltage induced is in a proportional relation to the flow velocity and thus to the volume flow rate. The magnetic field generated by the field coils is generated by a pulsed direct current with alternating polarity. This guarantees a stable zero point and renders the measuring resistant against influences from multiple phase substances, inhomogeneities in the liquid or low conductivity. Magnetic-induction flow meters with coil arrangement comprising more than two field coils and a different geometric arrangement are known.

High-pressure applications of magnetic-induction flow meters pose new challenges for the known electrode constructions. A high pressure acts on the measuring electrodes that protrude directly into the measuring tube. Consequently, the measuring electrodes must be anchored in a particularly tear-proof manner. Pressure tightness is another important aspect in the development of an electrode anchor suitable for high pressures. A further aspect is the compact construction of the electrode anchor, as there is only limited space in many applications for a magnetic-induction flow meter. Larger casing structures and electrode anchors are therefore a disadvantage. A special focus is on the installation height of the electrode anchor, i.e. the distance the electrode anchor protrudes from the measuring tube.

Fig. 1 shows an electrode anchor 1 for a measuring electrode 7 of a magnetic-induction flow meter with a measuring tube 4. The electrode anchor 1 comprises a coupling fitting 2 in the form of two opposite retaining brackets attached to the external diameter of the measuring tube 4. The coupling fitting 2 is attached to the measuring tube 4 in a same-material manner, preferably by welding. This means that no interference has to occur on the measuring tube 4, which would lead to pressure instability and problems with tightness in high pressure applications.

The coupling fitting shown in the form of a retaining bracket should only be understood as a preferred exemplary embodiment of the electrode anchor according to the invention since this version is particularly space-saving. The coupling fitting 2 may also be executed as a retaining plate if the respective openings for the reception of a coupling insert 3 are provided as well as anchoring surfaces which allow for a fixing of the coupling insert 3 on or in the support 2 when the former is rotated.

The coupling fitting is shown in detail in Fig. 4a - 4c. It has an anchoring segment 21 that is attached on one side at the termination to the measuring tube 4 by welded connection and radially protrudes from the external diameter of the measuring tube 4. The anchoring segment changes into a coupling segment 22 in a 90° curve (α). This coupling segment 22 mainly runs parallel to the measuring tube axis. Fig. 1 allows the viewer to see that the two coupling segments 22 of the retaining brackets of the coupling fitting

81791873

5

2 are opposite one another and/or each arranged towards each other. In this, every coupling segment has an end surface 28 on the front that is each arranged in a plane orthogonal to the measuring tube axis.

- 5 The anchoring segment 21 has an average dimension (width*length) of at least 10*10 mm, preferably more than 12*12 mm. The anchoring segment 21, incl. the curve, and hence also the coupling fitting, thus protrudes preferably a maximum distance of 25 mm, especially a maximum distance of 20 mm, from the measuring tube 4. This allows for a compact construction of the magnetic-induction flow meter.
- 10 The coupling segment 22 preferably has an average dimension (width*height) of 10*5 mm. The length of the coupling segment, including the curve, is preferably 12-30 mm.

- The coupling segment 22 has a coupling area and/or coupling surface 23 that is opposite the external diameter of the measuring tube 4. This coupling surface 23 is tilted in such a way that the lateral
- 15 distance x_2 of the first lateral edge of the coupling area 23 to the external diameter of the measuring tube 4 is larger than the lateral distance y_2 of the second lateral edge of the coupling area 23 to the external diameter of the measuring tube 4. The coupling insert 3 - especially its anchoring wing 19 - engages in the groove between the coupling area 23 and the external diameter of the measuring tube 4. This engagement is effected by a bayonet-like rotating movement. The tilt in the coupling area 23
- 20 demands a certain rotational direction in which the coupling insert 3 has to be turned to engage in the coupling fitting 2. Said groove has a height measured from the external diameter of the measuring tube of preferably 30-70% of the total height, especially 35-65% of the total height of the coupling fitting 2.

- The coupling segment 22 has a terminal recess 27 in the shape of a circular arc that imitates a
- 25 part of the external shape of the coupling insert 3. This prevents any slipping of the coupling insert 3, and guarantees that the rotational movement is guided when the coupling insert 3 is connected with the coupling fitting 2.

- The embodiment of the coupling fitting 2 shown in Fig. 4a - 4c has been subjected to a tear test to
- 30 prove the stability of the connection with the measuring tube 4. The coupling fitting 2 was subjected to the maximum load of the measuring device that was available, i.e. to 2 megagrams (2 tonnes). No tear was detected in this measuring range.

- Fig. 1 further shows the coupling insert 3 that is connected with the coupling fitting 2 in the
- 35 former's anchoring position. The coupling insert 3 shows a cylindrical core body 20. In a lower part segment of the core body 20, anchoring wings 19 are formed that protrude radially, preferably at least 1 mm, especially preferred at least 2 mm, from the shell surface of the core body. One anchoring wing in this shows a coupling area and/or coupling surface 18 which has an inclination angle with regard to a flat surface of the external diameter of the measuring tube 4 parallel to the circular surface of

the core body 20. This inclination angle is preferably 1-10°. It corresponds to the inclination angle of the coupling surface 23 of the coupling fitting 2.

The coupling insert 3 and coupling fitting 2 are each made of metal, preferably of stainless steel.

5

The coupling insert 3 has a cylindrical recess 14 that is rotation-symmetric and expands to the measuring tube wall and runs parallel to the measuring electrode axis of the pin-shaped measuring electrode 7. This recess contains a damping sleeve 13 of insulating material that shields the measuring electrode 7 and the measuring electrode attachment 8 connected to it electrically against the metallic components - especially against the coupling insert. At the same time, the damping sleeve softens the axial movement of the measuring electrode attachment 8 and the measuring electrode 7 in the rotation-symmetric cylindrical recess in the coupling insert 3. The measuring electrode attachment 3 has a thread in one end area that connects with a fastening nut 16 for the axial attachment of the measuring electrode attachment 8. A counter-nut 17 is also connected with the same thread. An electrode terminal is arranged between the fastening nut 16 and the counter-nut 17.

In Fig. 1, other components of the magnetic-induction flow meter that are basically known have not been illustrated for simplicity's sake. This regards, for example, a magnetic system, an evaluation unit, a casing etc. There is only a schematic indication of the fastening segments 5 for a magnetic system.

Fig. 2 shows the details of the arrangement of the electrode anchor 1. One can see that the external diameter of the measuring tube has a flat surface at the point where the electrode anchor is placed, in order to allow better positioning of the coupling fitting on the measuring tube. The coupling fitting is attached to the measuring tube 4 by means of one or several preferably circumferential welding connections 15. The measuring tube has an insert 10 with a projection 11 which rests on the external diameter of the measuring tube. The side of the insert 10 feeds into a liner 9 attached to the inside of the measuring tube 4 on the side opposite the projection. The insert 10 and the liner 9 are each made of an electrically insulating material. Rubber is particularly suited due to its additional sealing characteristics under high pressure. The insert and the liner may be connected by vulcanization.

The measuring electrode 7 may be pushed into the insert 10, or be connected permanently by gluing, vulcanization or overmolding.

35

The projection 11 on the insert has a frontal sealing surface 12 on which the electrode anchor rests. For this purpose, the sealing surface may have groove-shaped sealing grooves 26 on the front sealing surface.

Fig. 5 shows another embodiment of the electrode anchor according to the invention, wherein the frontal sealing surface 12 of the insert 10 has a material outward curvature 24. This sealing surface provides additional sealing at higher pressures.

- 5 Alternatively or in addition, the liner may also feature a material curvature directed towards the measuring tube axis that creates additional tightness for high medium pressures.

Basically, the coupling between the coupling fitting 2 and the coupling insert 3 provides a significantly better and especially more pressure-stable support due to the engagement of the
 10 anchoring wings 19 in the groove between the coupling segment 22 and the measuring tube compared to screw connections. In addition, the measuring electrode may be quickly and intuitively attached or detached, as required, by the 90° rotating movement.

The electrode anchor 1 shown in Fig. 1-6 is compelling due to its low installation height (less than
 15 25 mm) - which makes for a very compact casing dimension for the entire magnetic-induction flow meter.

An assembly process for an electrode anchor for a measuring electrode on a measuring tube of a magnetic-induction flow meter comprises the following steps:

- 20 a) If necessary, attachment of flat surfaces on the external diameter on the measuring tube of the magnetic-induction flow meter;
 b) Fixing of a coupling fitting on the external diameter of the measuring tube, preferably while forming a groove together with the measuring tube;
 c) Insertion of a coupling insert into the coupling fitting orthogonally to the measuring tube.
 25 d) Rotating movement of the coupling insert, with the anchoring wings arranged on the coupling insert engaging in the groove or a groove arranged in the coupling fitting and wherein during the rotating movement a measuring electrode attachment partly arranged in the coupling insert, or a measuring electrode, is pressed against the coupling insert in a tight fit.

- 30 In the following, individual steps and further optional steps for the construction are explained in more detail:

The flat surfaces according to step a) may be obtained by filing or milling, for example.

- 35 The attachment of the coupling fitting according to step b) is preferably effected by welding it to a measuring tube. In this process, a groove is preferably formed. Alternatively, the coupling fitting itself may already have a groove.

The insert 10 may subsequently be inserted into the borehole of the measuring tube housing the
 40 measuring electrode - it may be molded in place, for example. The measuring electrode 7 is then

pushed into this insert. The connection to the measuring electrode may also be effected by gluing or overmolding with sealing material.

The measuring electrode attachment 8 and the damping sleeve 13 may already be pre-installed in the coupling insert and be fixed with the fastening nut 14.

The coupling insert is then inserted into the coupling fitting. This is done by pushing it in.

Subsequent turning fixes the coupling insert inside the coupling fitting, with the L-shaped hooks of the coupling fitting reaching behind the coupling insert and thus fastening it to the measuring tube. At the moment of fastening, the contact between the measuring electrode attachment 8 and the measuring electrode 7 is made.

Reference signs

15	1	electrode anchor
	2	coupling fitting
	3	coupling insert
	4	measuring tube
20	5	magnetic system locking segments
	6	electrode terminal
	7	measuring electrode
	8	electrode attachment
	9	liner
25	10	insert
	11	protrusion and/or projection
	12	sealing surface
	13	damping sleeve
	14	cylindrical recess
30	15	welding seam
	16	fastening nut
	17	counter-nut
	18	coupling surface
	19	anchoring wing
35	20	core body
	21	anchoring segment
	22	coupling segment
	23	coupling surface
	24	material curvature
40	25	material curvature

FL0669-WO

9

- 26 sealing groove
- 27 recess
- 28 end surface
- 29 groove

81791873

CLAIMS:

1. A magnetic-induction flow meter for high pressure applications with medium pressures of more than 5.1 MPa (51bar) with a measuring tube onto which an electrode anchor consisting of several parts for the purpose of fastening a measuring electrode is arranged, comprising the following components:
 - a) a coupling fitting that is connected by adhesive bond with the measuring tube, with the coupling fitting having a groove or forming a groove together with the measuring tube,
 - b) a coupling insert to guide and/or fix the measuring electrode that is connected to the coupling fitting via a coupling,wherein the coupling insert has anchoring wings that engage in the groove by means of a partial rotation and thus effect the coupling.
2. The magnetic-induction flow meter according to claim 1, wherein the coupling insert has a recess running parallel to the measuring electrode axis, in which the measuring electrode is arranged or the measuring electrode and a measuring electrode attachment connected to the measuring electrode are arranged.
3. The magnetic-induction flow meter according to claim 1 or 2, wherein the measuring electrode or the measuring electrode attachment connected with the measuring electrode is connected by rotation of said coupling insert against said coupling fitting and is kept form-fitted as well as in a frictional connection in the process.
4. The magnetic-induction flow meter according to claim 1 wherein the external diameter of the measuring tube has a flat surface in the area of the electrode anchor.
5. The magnetic-induction flow meter according to claim 3 wherein the anchoring wings and the coupling fitting have surfaces placed against each other that have an inclination angle with regard to the flat surface of the external diameter of the measuring tube which is intended to determine the rotation direction of the two coupling components, i.e. the coupling insert and the coupling fitting.

81791873

11

6. The magnetic-induction flow meter according to claim 1 wherein the coupling fitting is welded to the measuring tube.
7. The magnetic-induction flow meter according to claim 6 wherein the coupling fitting is welded to the measuring tube with circumferential welding seams.
8. The magnetic-induction flow meter according to claim 1, wherein the partial rotation of the coupling insert may be detached from the coupling fitting by partial rotation at an angle of 45-135°.
9. The magnetic-induction flow meter according to claim 8, wherein the partial rotation of the coupling insert may be detached from the coupling fitting by partial rotation at an angle of 60-120°.
10. The magnetic-induction flow meter according to claim 8, wherein the partial rotation of the coupling insert may be detached from the coupling fitting by partial rotation at an angle of 80-100°.
11. The magnetic-induction flow meter according claim 1, wherein the coupling is marked by a form-fitted connection between the coupling insert and the coupling fitting.
12. The magnetic-induction flow meter according to claim 1, wherein the coupling fitting is executed in the form of two L-shaped retaining brackets that reach behind the anchoring wings of the coupling insert.
13. The magnetic-induction flow meter according to claim 1, wherein the recess of the coupling insert running parallel to the measuring electrode axis has a damping sleeve to limit the free movement of one or both of the measuring electrode and the measuring electrode attachment inside the recess, and/or to electrically insulate the measuring electrode with regard to the coupling insert.
14. The magnetic-induction flow meter according to claim 1, wherein the measuring electrode may in some sections be surrounded by an insert made of a pressure-tight material arranged in a borehole in the measuring tube along the entire length of the borehole and having a sealing surface at the end.

81791873

12

15. The magnetic-induction flow meter according to claim 1, wherein the measuring electrode may in some sections be surrounded by an insert made of a pressure-tight material arranged in a borehole in the measuring tube along the entire length of the borehole and having a sealing surface at the end, as a projection on which the measuring electrode attachment is placed.

16. The magnetic-induction flow meter according to claim 14 or claim 15, wherein the sealing surface has a material curvature pointing radially outwards.

17. The magnetic-induction flow meter according to claim 1, wherein the measuring tube is at least partly covered inside with an electrically insulating material layer, with the measuring electrode punctuating this material layer and with the material layer having a material curvature in the direction of the measuring tube axis in the area of the measuring electrode.

18. An assembly process for an electrode anchor for a measuring electrode on a measuring tube of a magnetic-induction flow meter, according to claim 1, comprising the following steps:

a) attachment of flat surfaces on the external diameter on the measuring tube of the magnetic-induction flow meter;

b) fixing of a coupling fitting on the external diameter of the measuring tube, preferably while forming a groove together with the measuring tube;

c) insertion of a coupling insert into the coupling fitting orthogonally to the measuring tube,

d) rotating movement of the coupling insert, with the anchoring wings arranged on the coupling insert engaging in the groove or a groove arranged in the coupling fitting and

wherein during the rotating movement a measuring electrode attachment partly arranged in the coupling insert, or a measuring electrode, is pressed against the coupling insert in a tight fit.

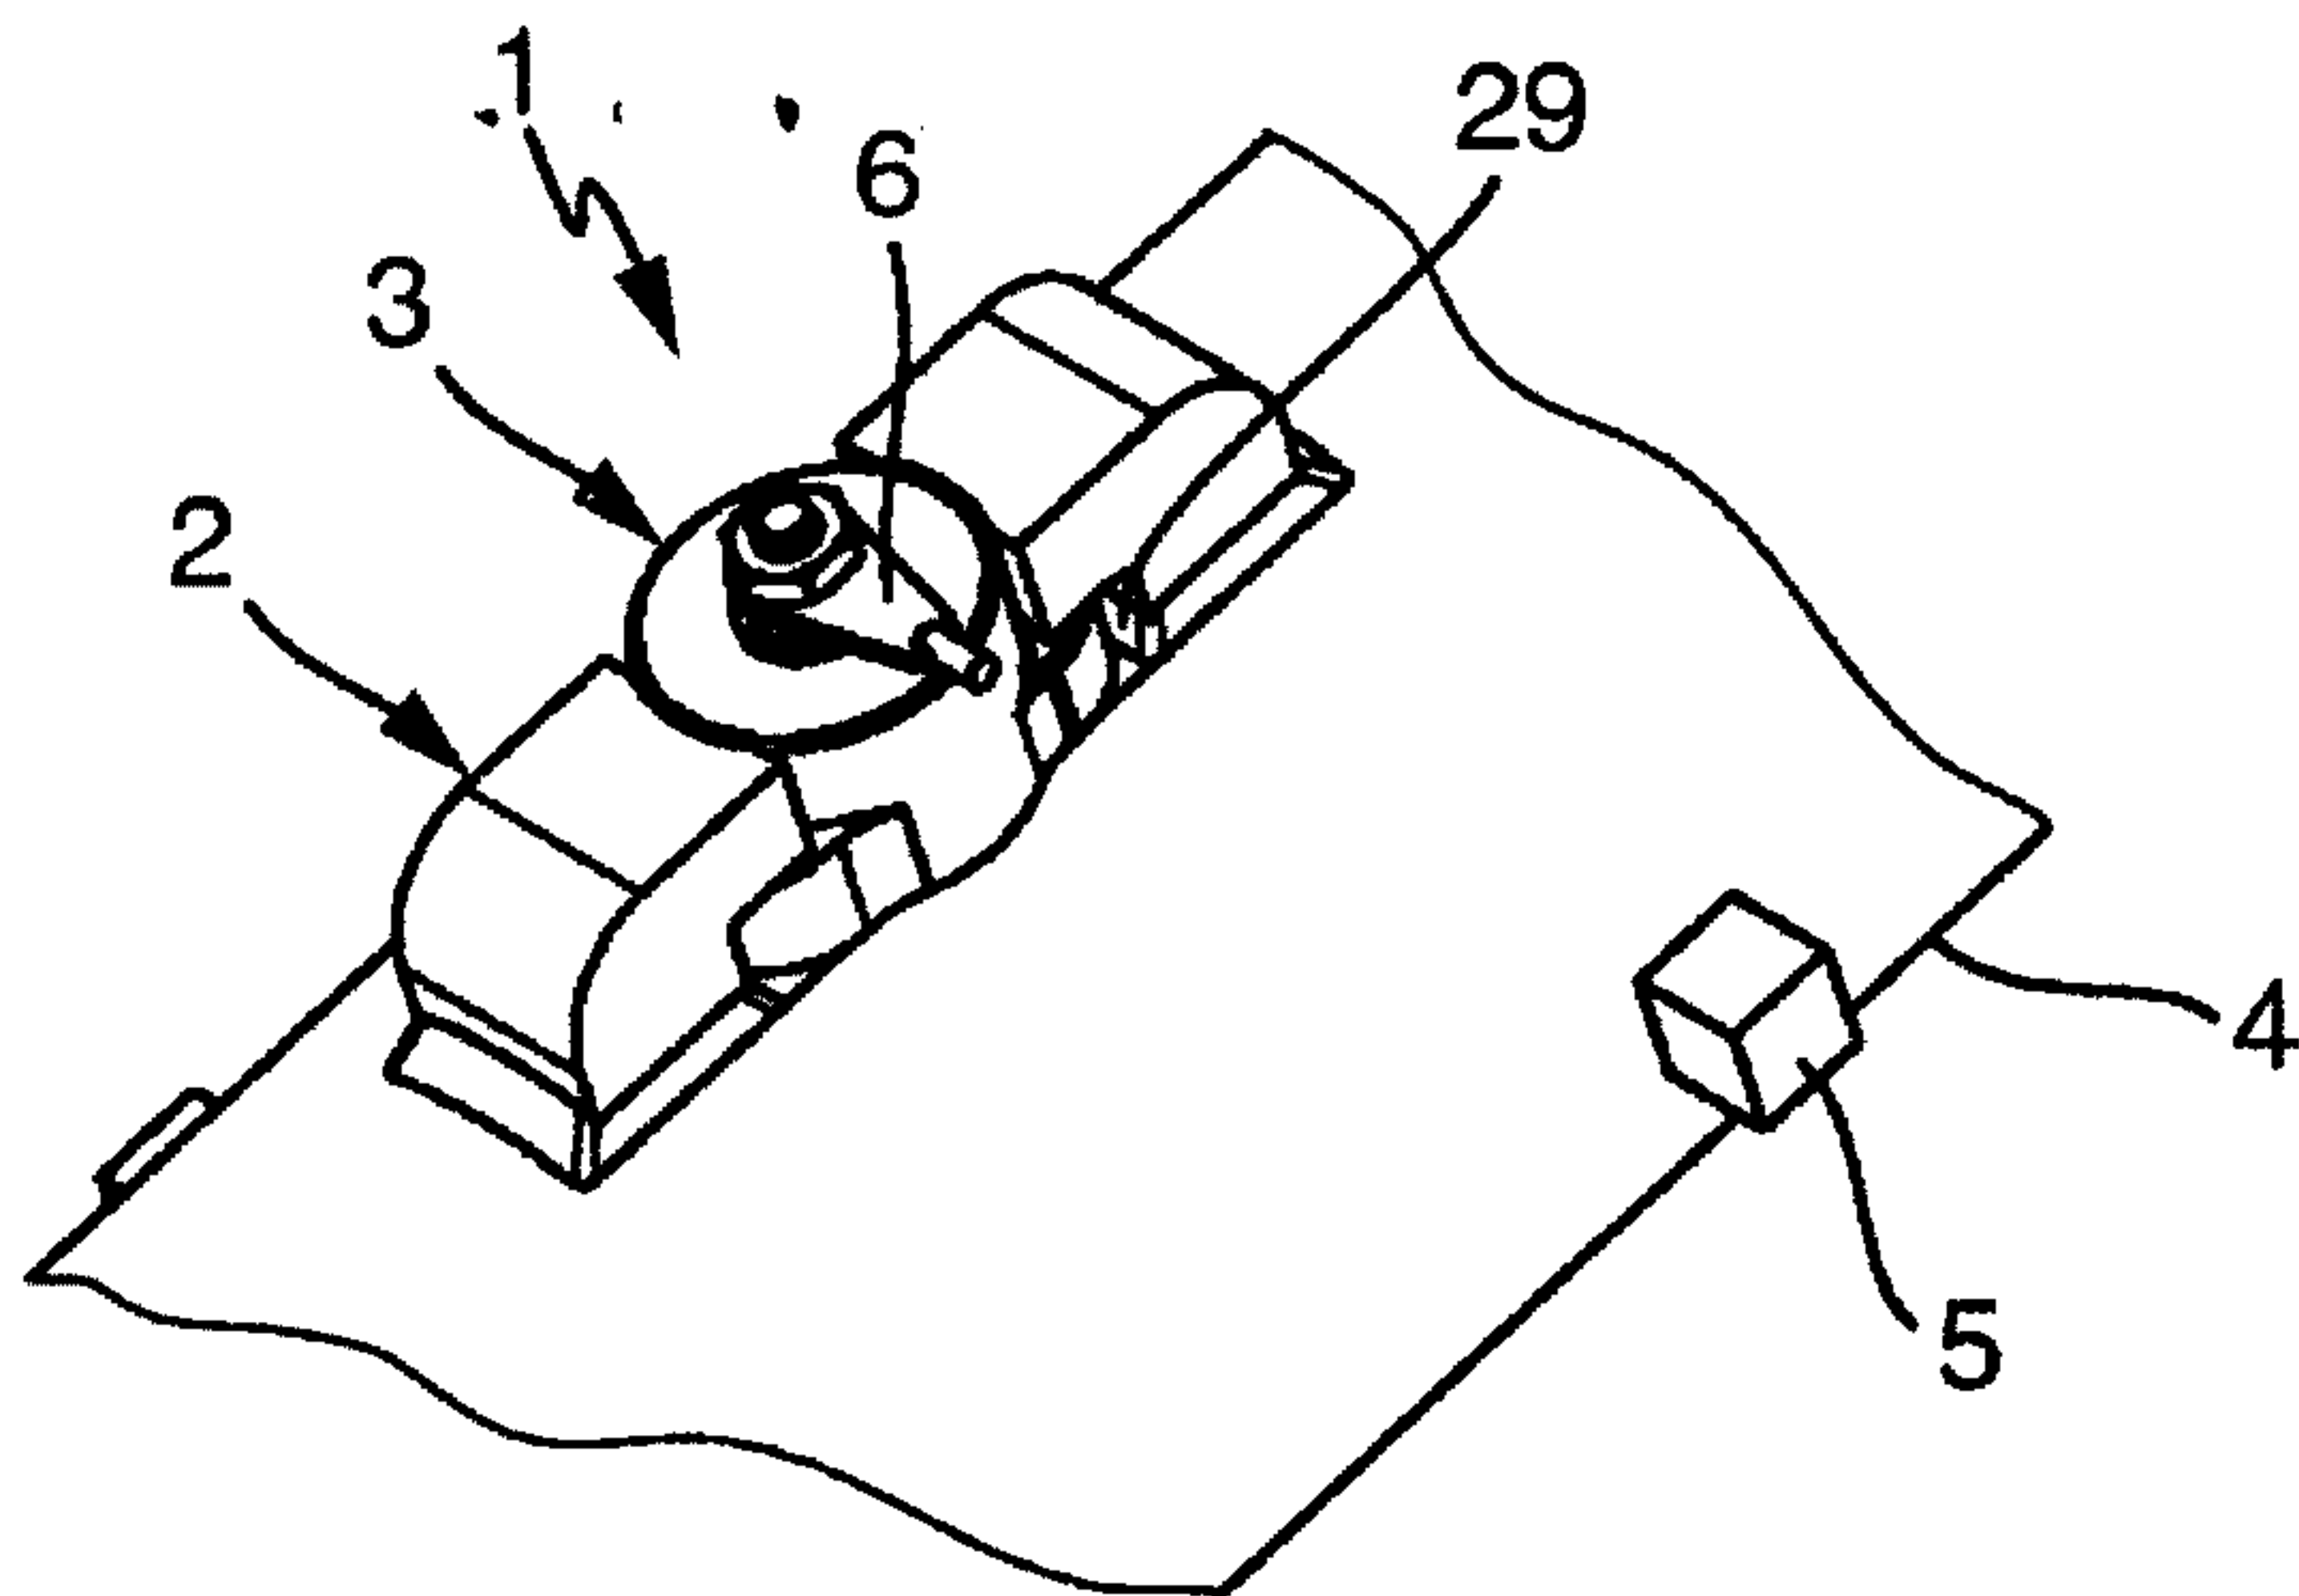


Fig. 1

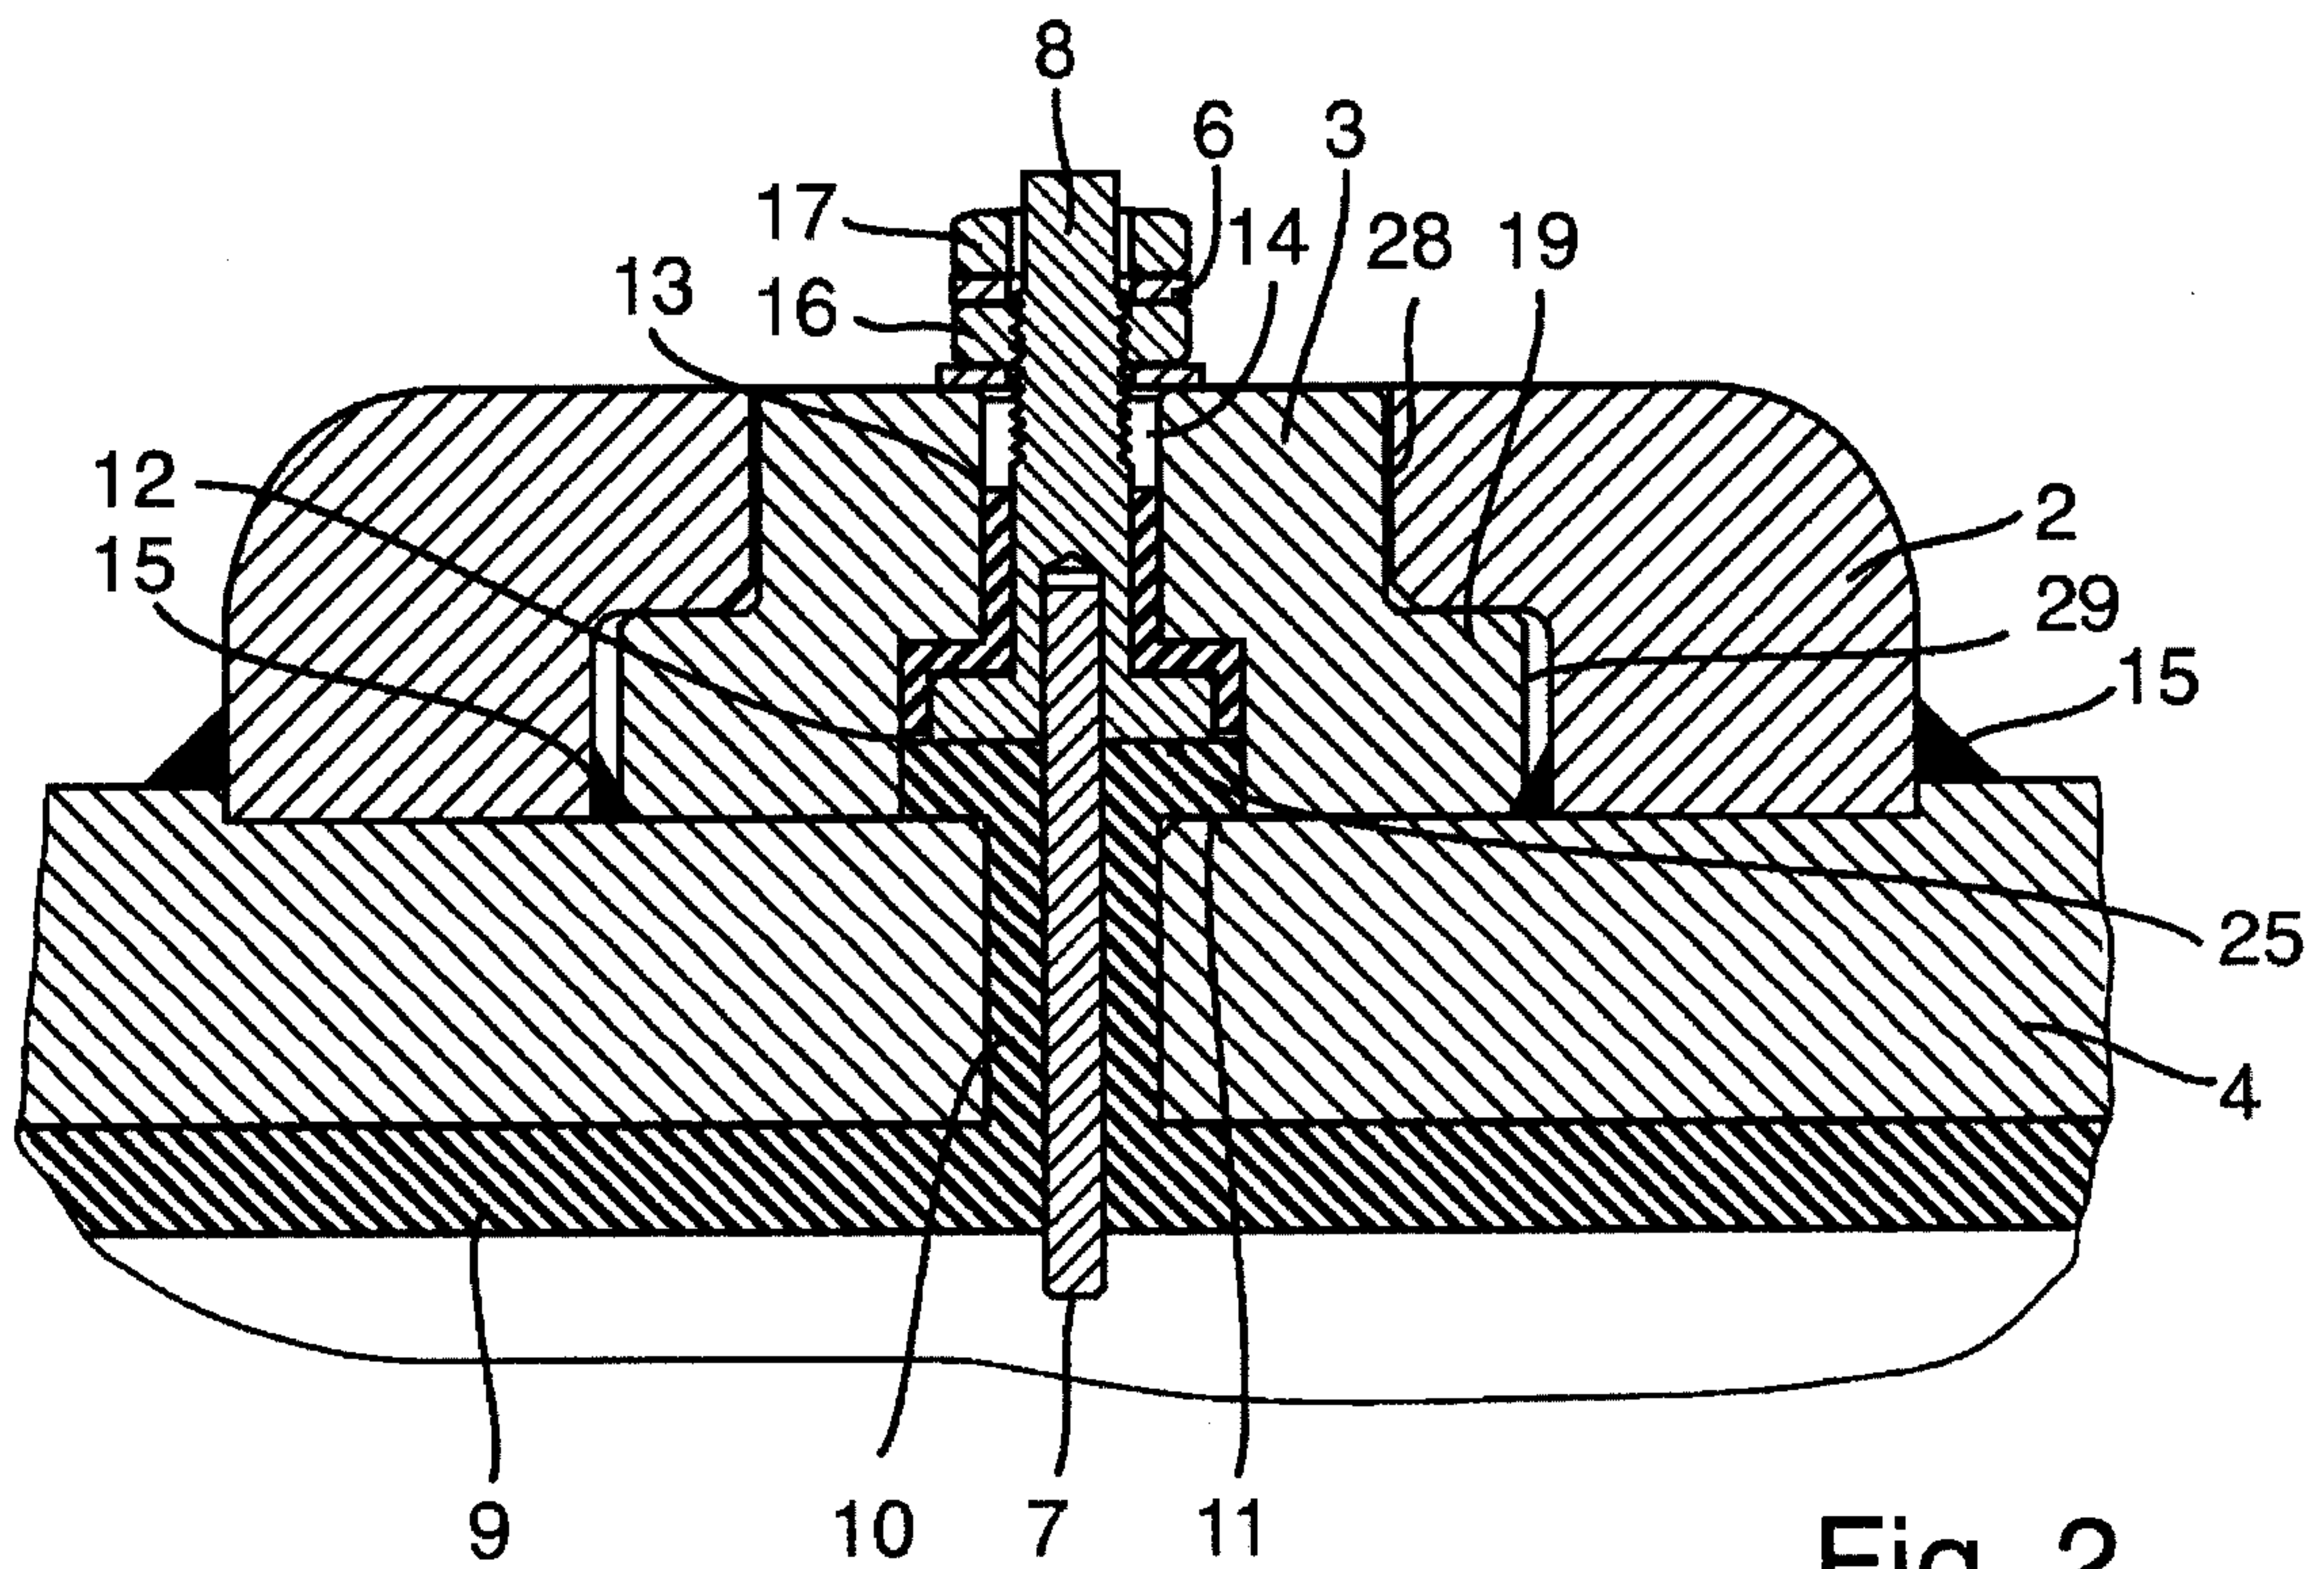


Fig. 2

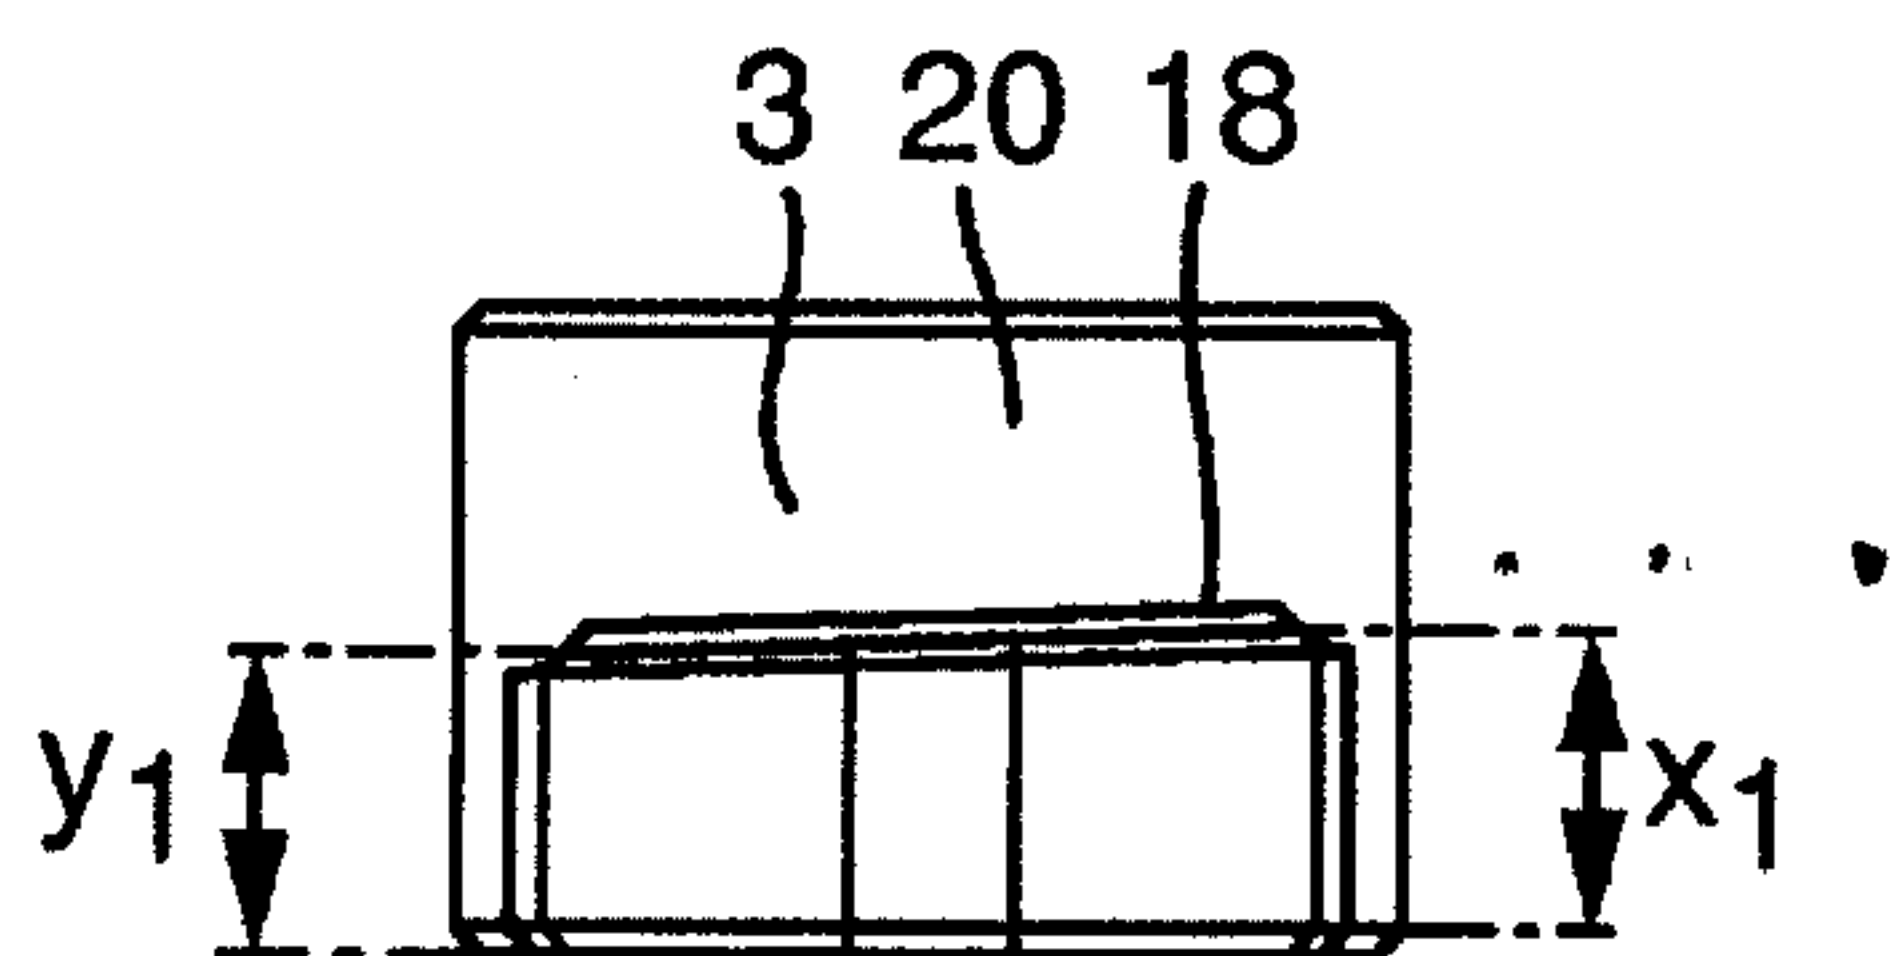


Fig. 3a

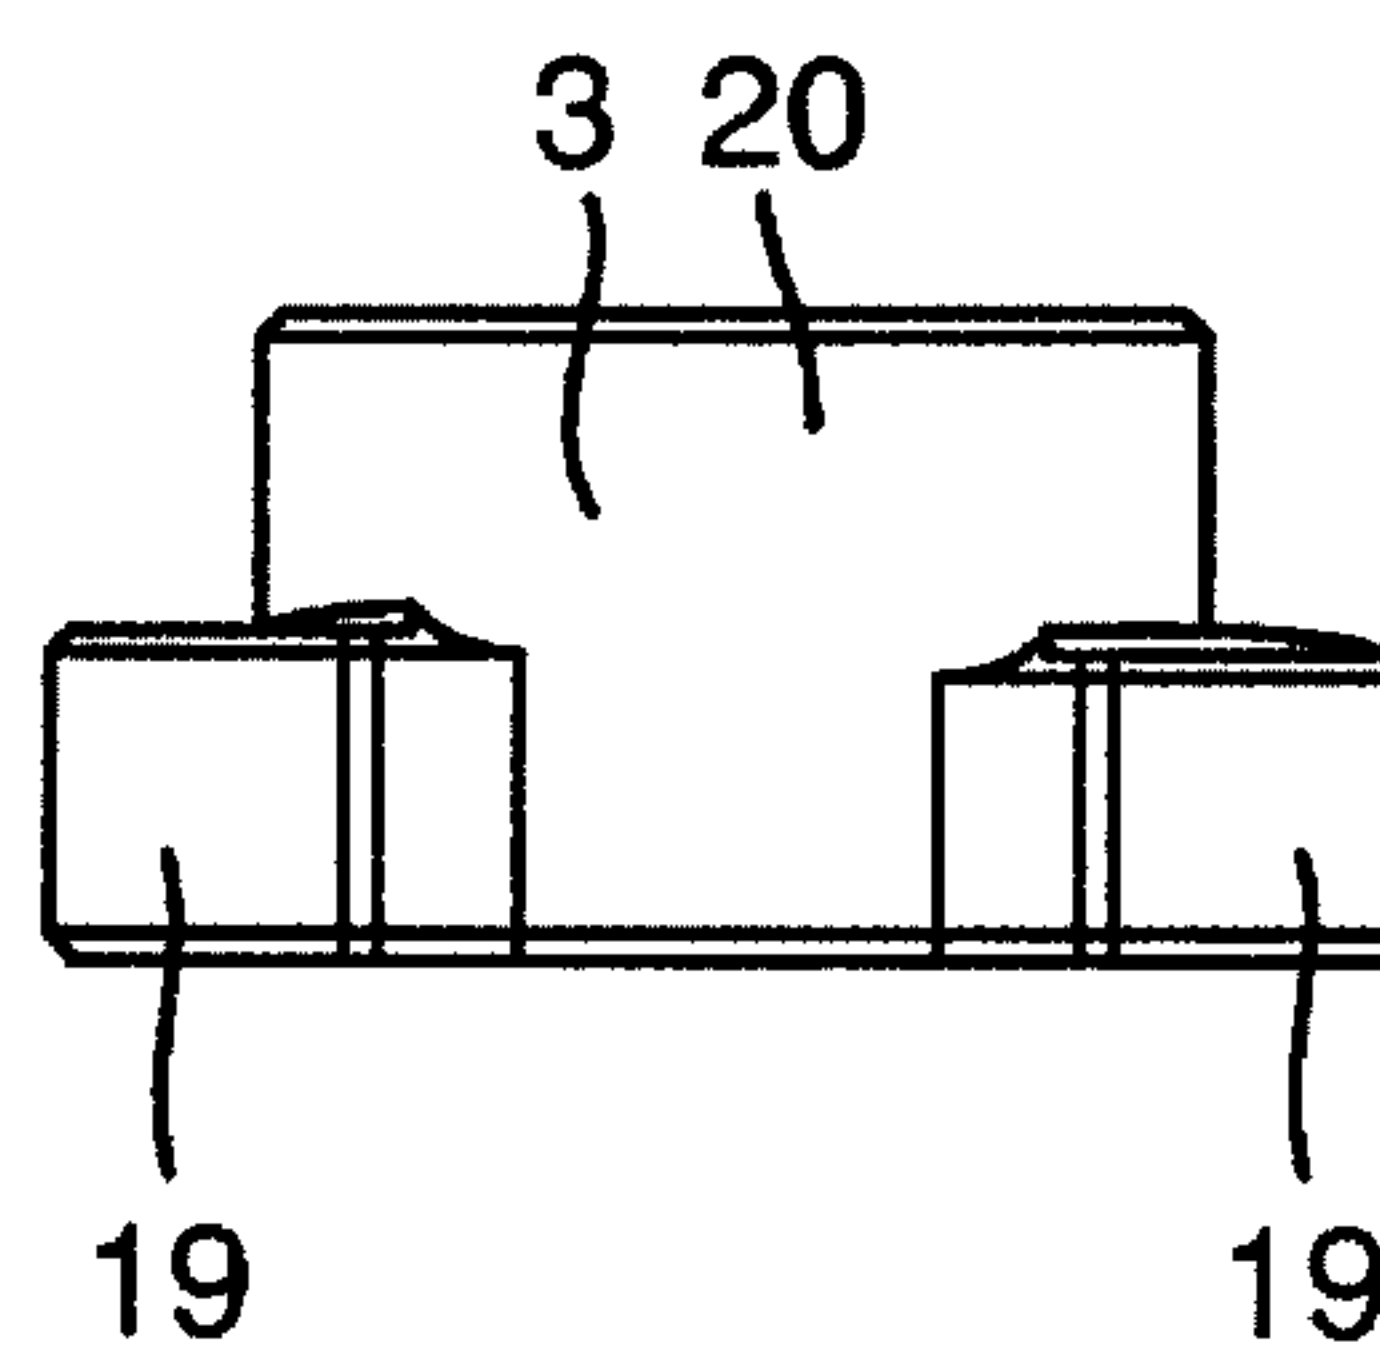


Fig. 3b

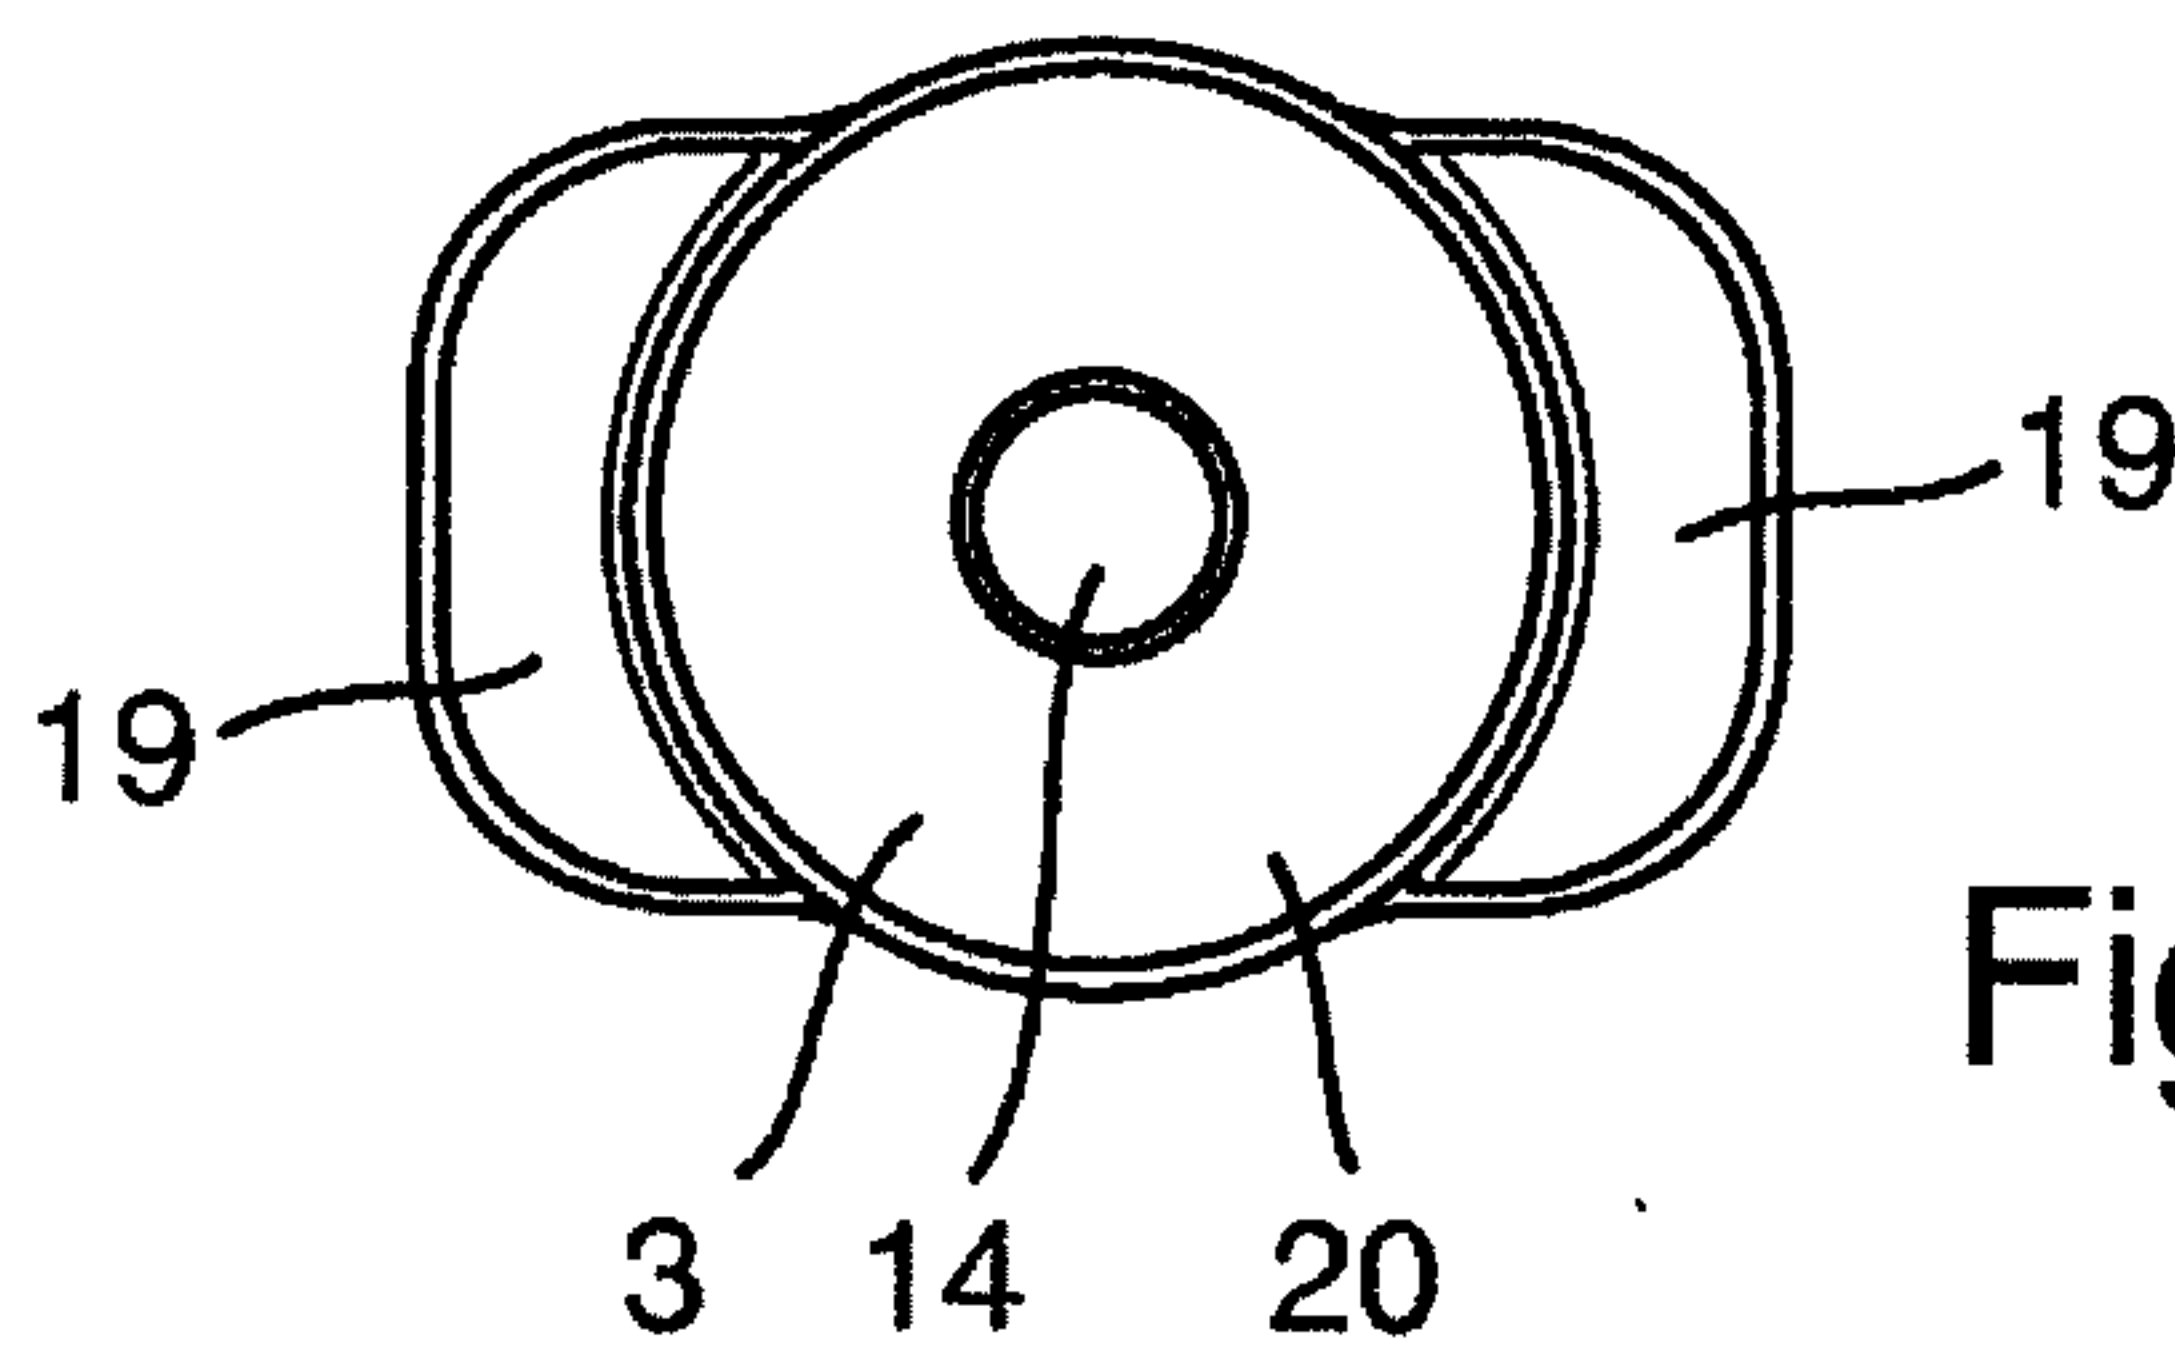


Fig. 3c

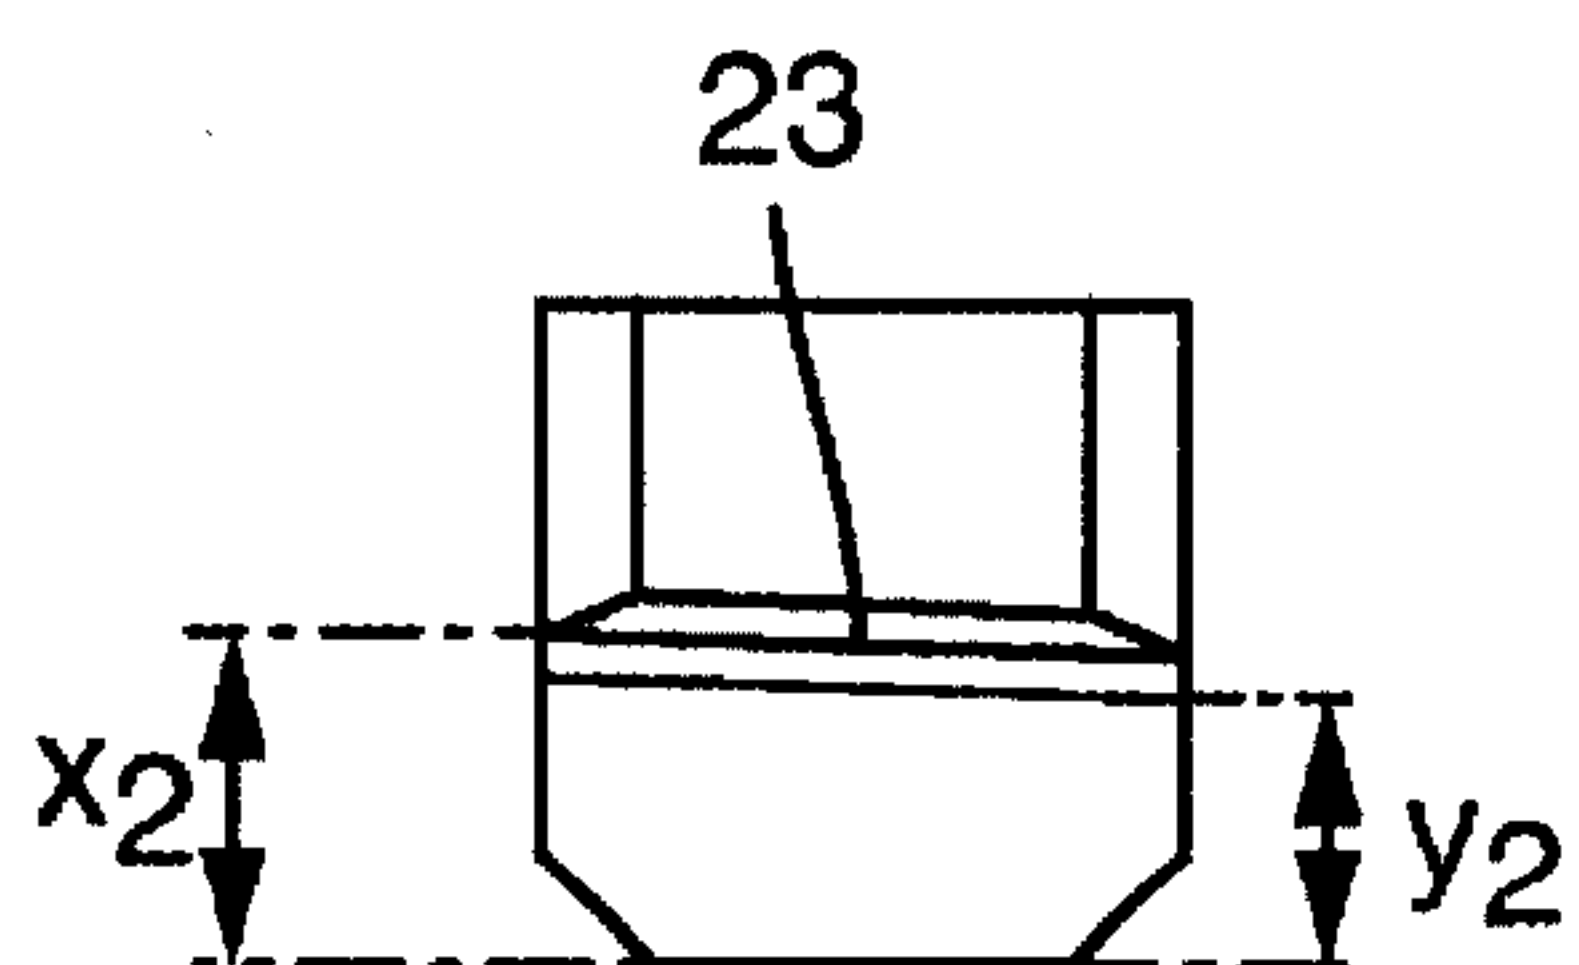


Fig. 4b

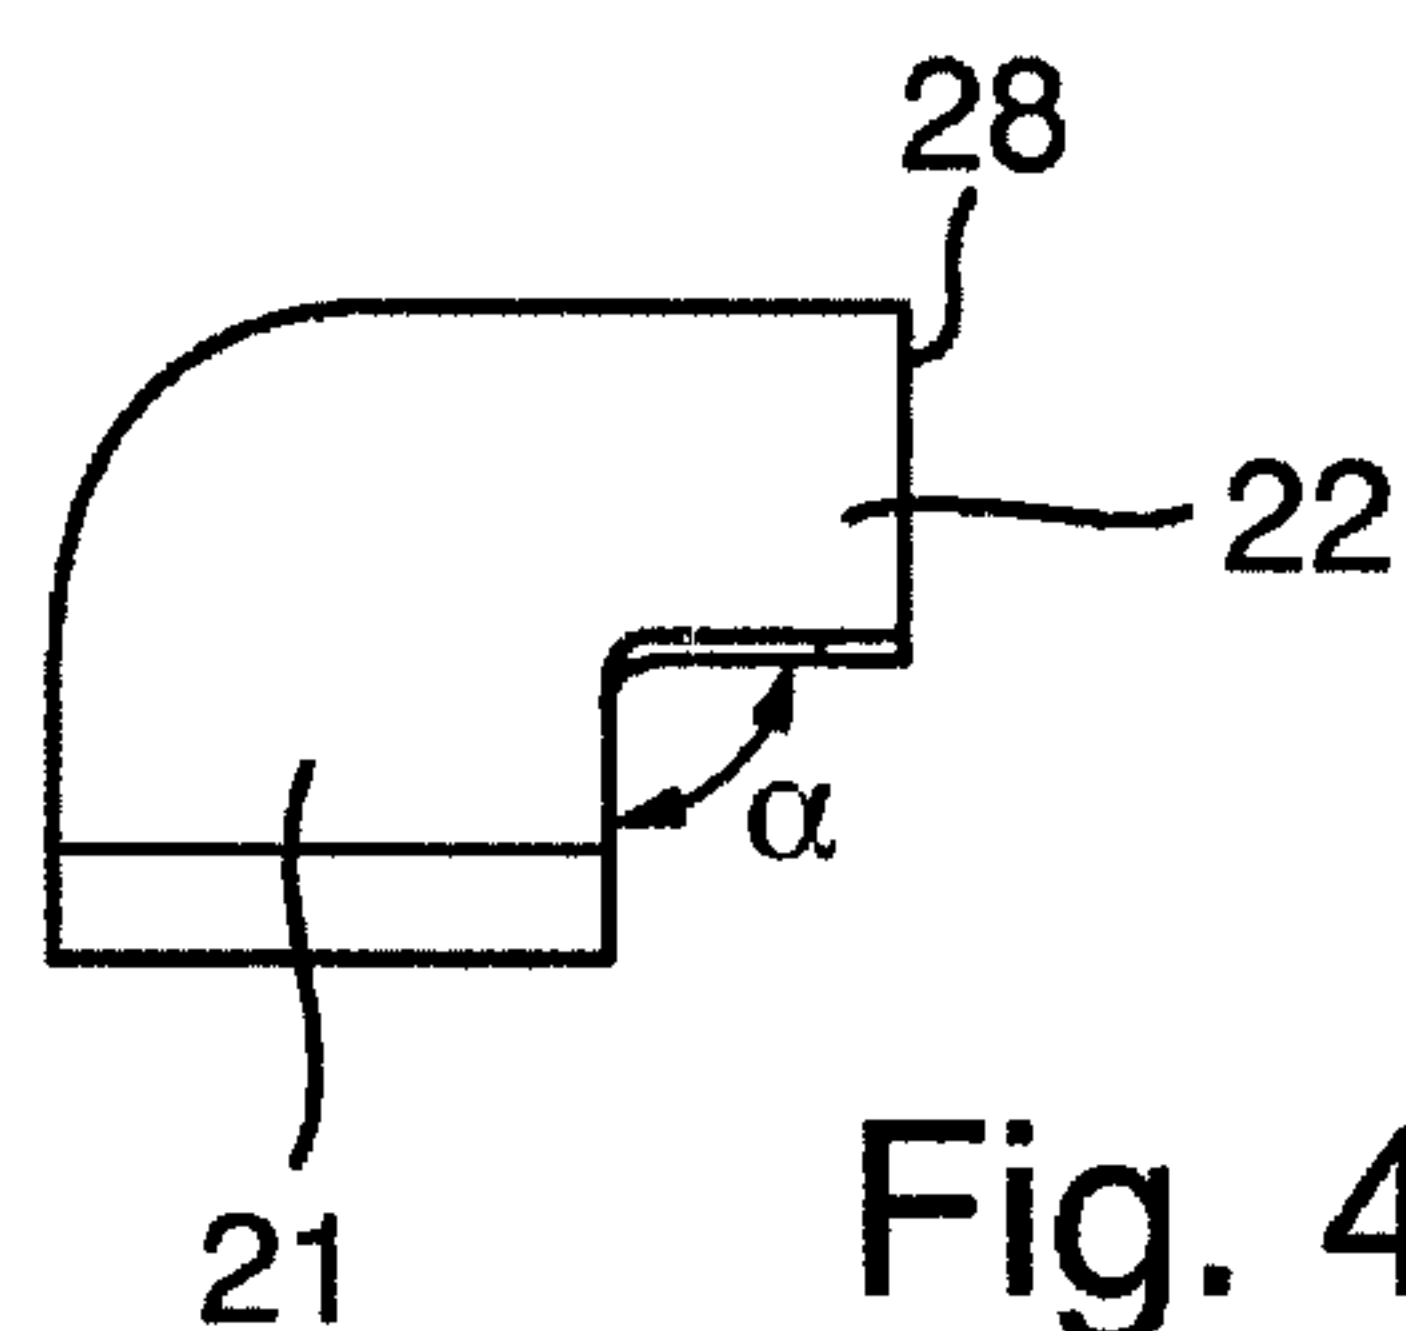


Fig. 4c

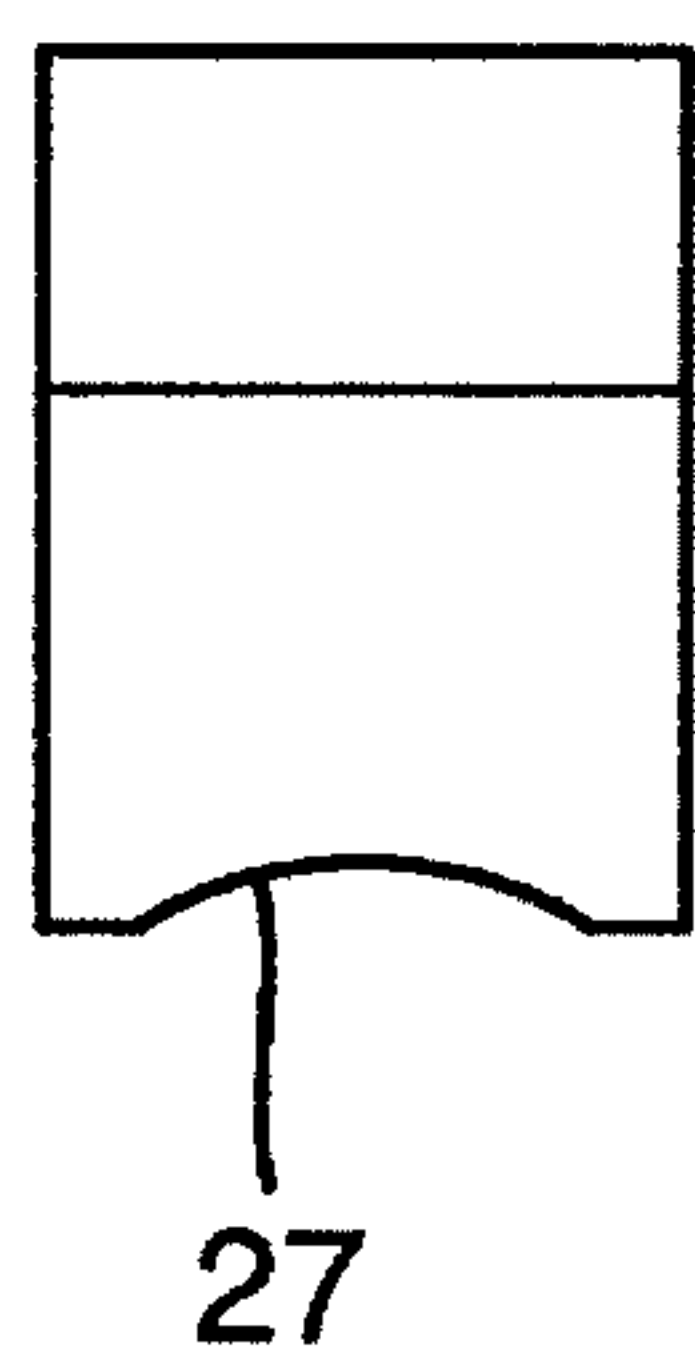


Fig. 4a

