



(19) **United States**  
(12) **Patent Application Publication**  
**Kagan et al.**

(10) **Pub. No.: US 2010/0179777 A1**  
(43) **Pub. Date: Jul. 15, 2010**

(54) **TEST PULSES FOR ENABLING REVENUE TESTABLE PANEL METERS**

continuation-in-part of application No. 10/969,713, filed on Oct. 20, 2004, now abandoned.

(75) Inventors: **Erran Kagan**, Great Neck, NY (US); **Tibor Banhegyesi**, Baldwin, NY (US)

**Publication Classification**

(51) **Int. Cl.**  
**G01R 21/06** (2006.01)  
**G06F 19/00** (2006.01)  
**G08B 21/00** (2006.01)  
(52) **U.S. Cl.** ..... **702/62; 702/61; 340/657**  
(57) **ABSTRACT**

Correspondence Address:  
**ELECTRO INDUSTRIES/ GAUGETECH**  
**C/O HESPOS & PORCO LLP**  
**110 West 40th Street - Suite 2501**  
**NEW YORK, NY 10018 (US)**

A panel meter including an energy test pulse device that enables the panel meter to be used for revenue applications and eliminates the need for two separate meters, one for panel indication, and the other for energy and revenue applications. The electrical panel meter including at least one sensor configured for measuring an electrical parameter; at least one analog-to-digital converter coupled to the at least one sensor for converting the measured electrical parameter to a digital signal; a display for continuously displaying at least one electrical parameter; a processor configured to receive the digital signal and calculate an amount of energy consumed; and a test pulse circuit configured to receive the calculated amount and generate a plurality of pulses equal to the calculated amount, wherein each of the plurality of pulses is equal to a predetermined amount of energy.


(73) Assignee: **ELECTRO INDUSTRIES/GAUGE TECH**, Westbury, NY (US)

(21) Appl. No.: **12/728,567**

(22) Filed: **Mar. 22, 2010**

**Related U.S. Application Data**

(63) Continuation of application No. 12/401,791, filed on Mar. 11, 2009, now Pat. No. 7,683,605, which is a continuation of application No. 11/317,227, filed on Dec. 22, 2005, now Pat. No. 7,508,190, which is a

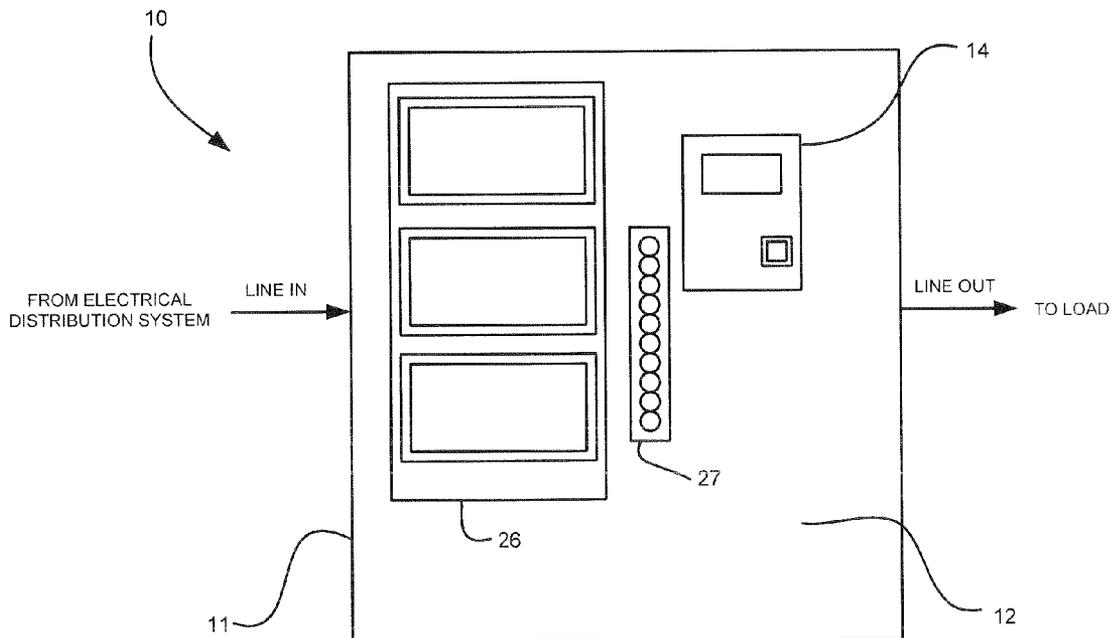

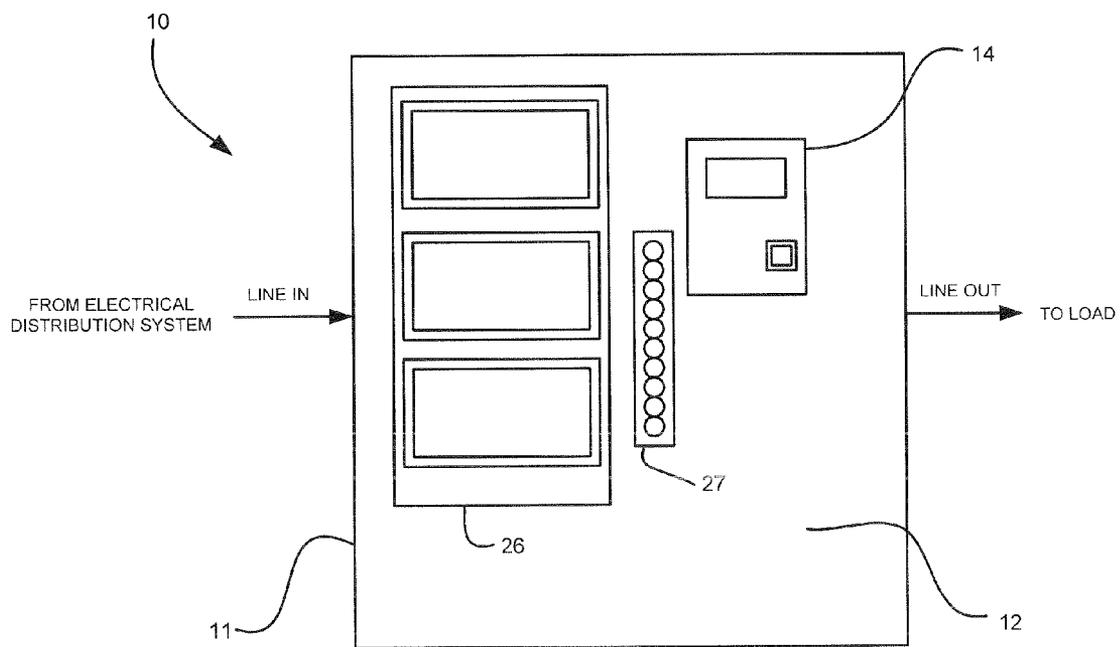


FIG. 1

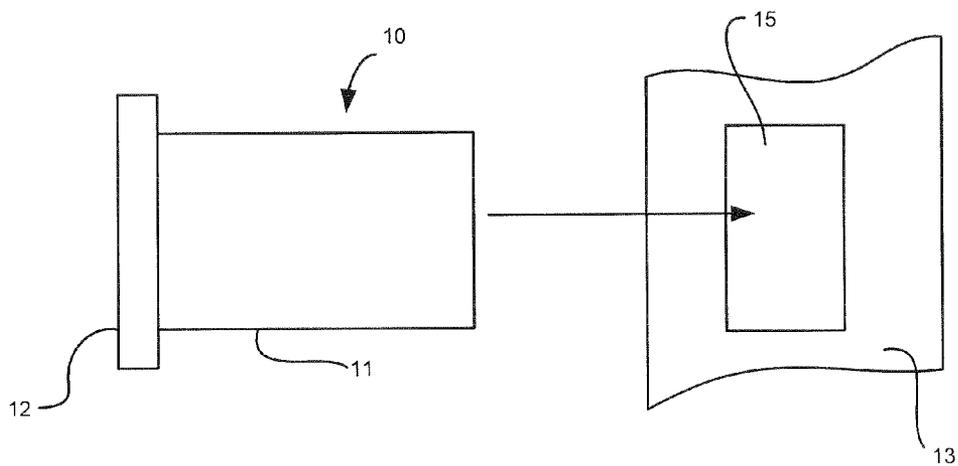


FIG. 1A


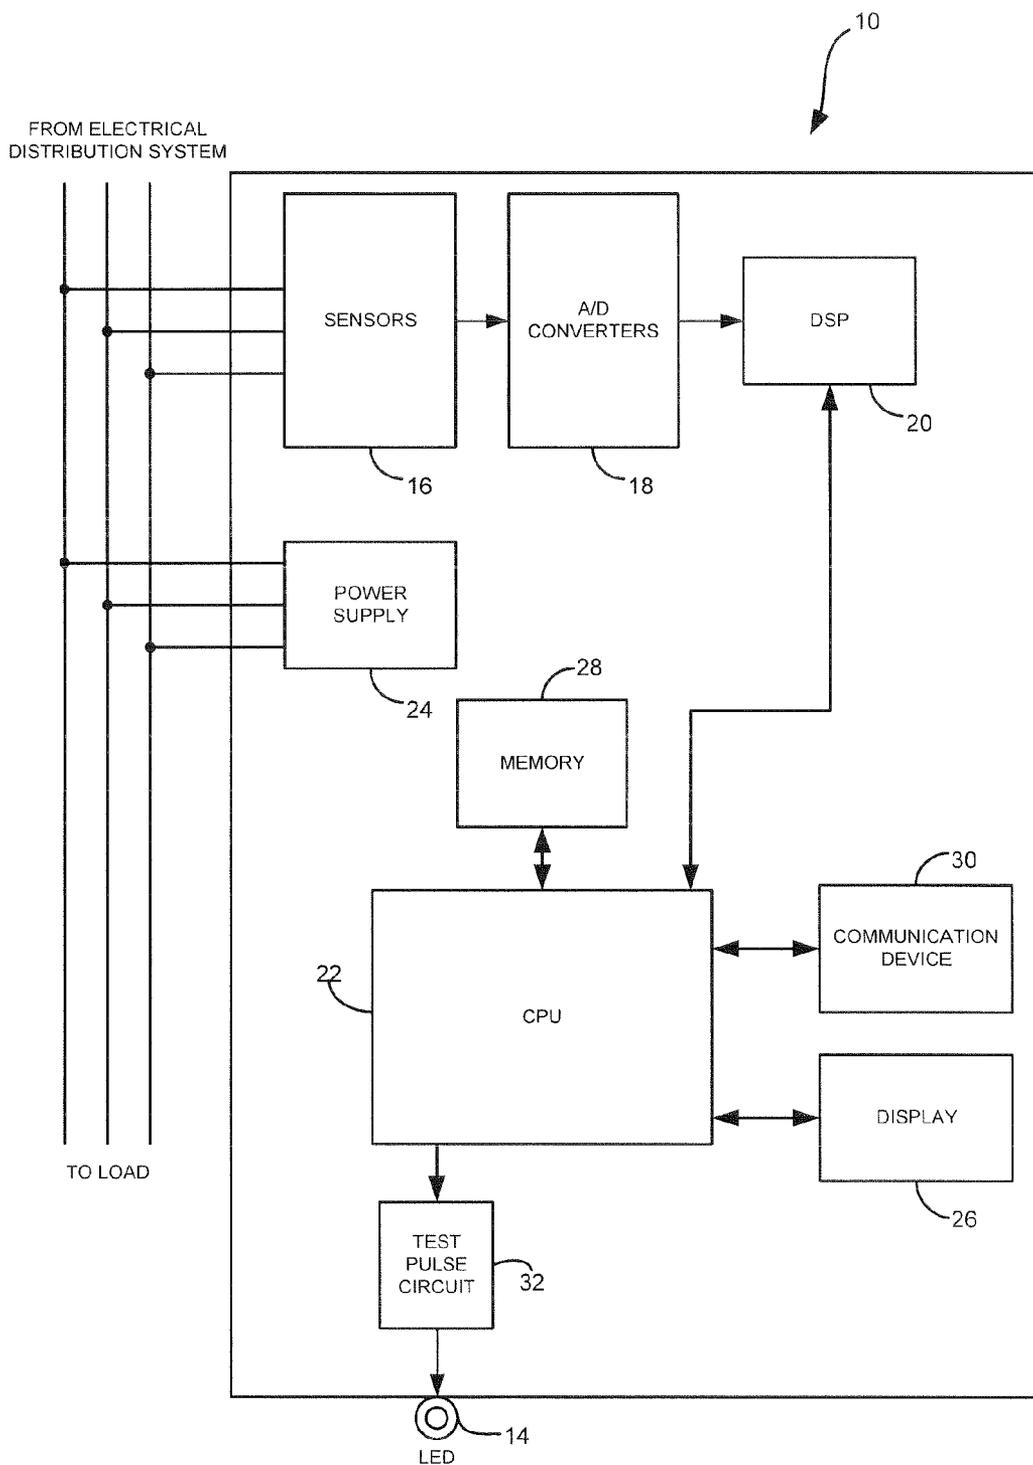


FIG. 2

FIG.3A FIG.3B

FIG.3

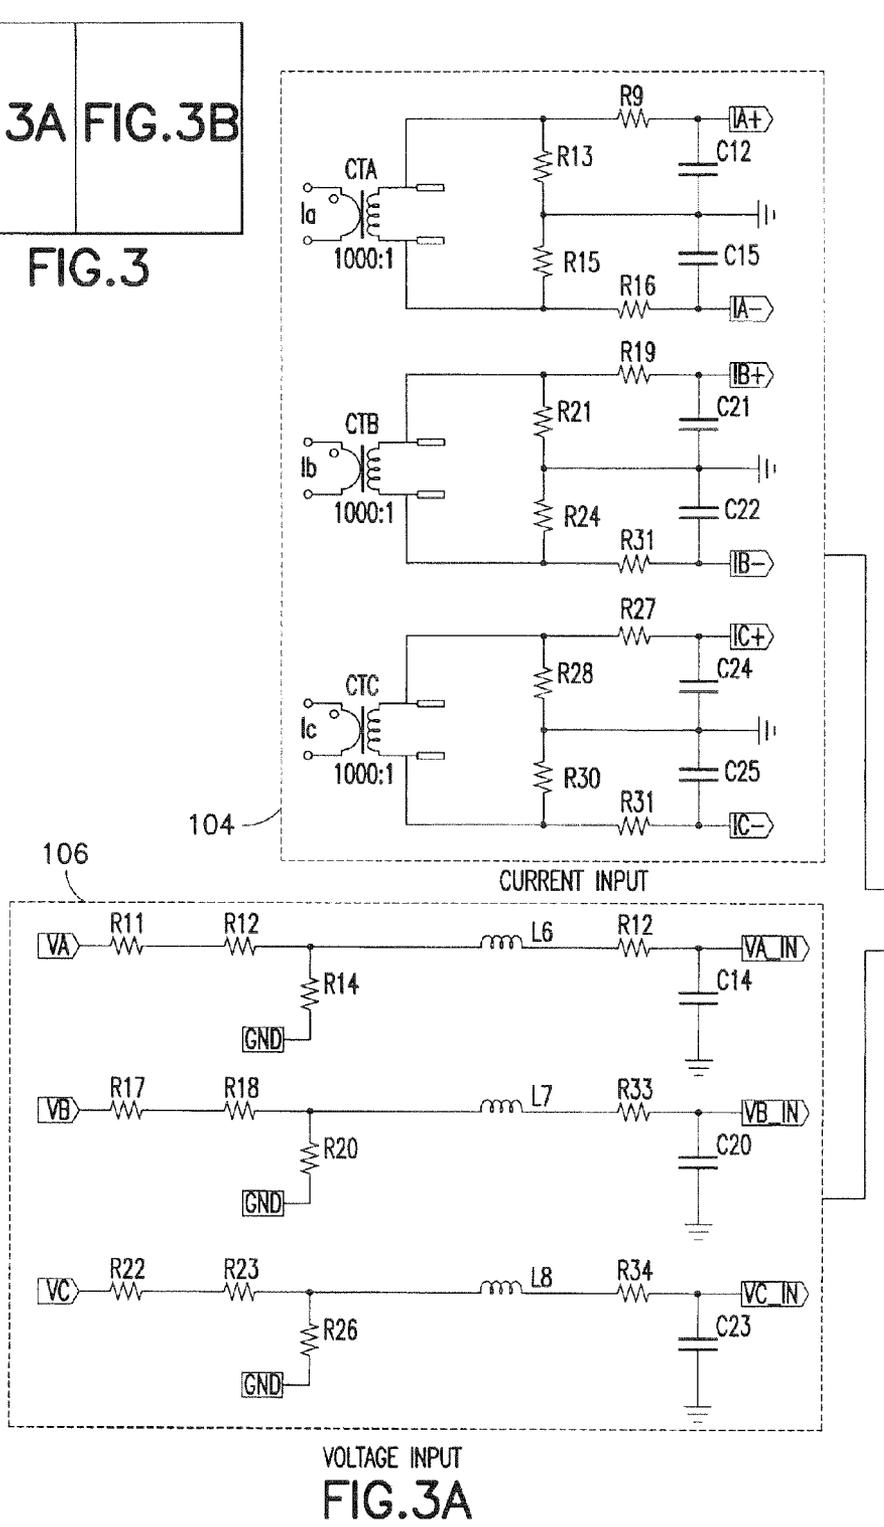

VOLTAGE INPUT  
FIG.3A

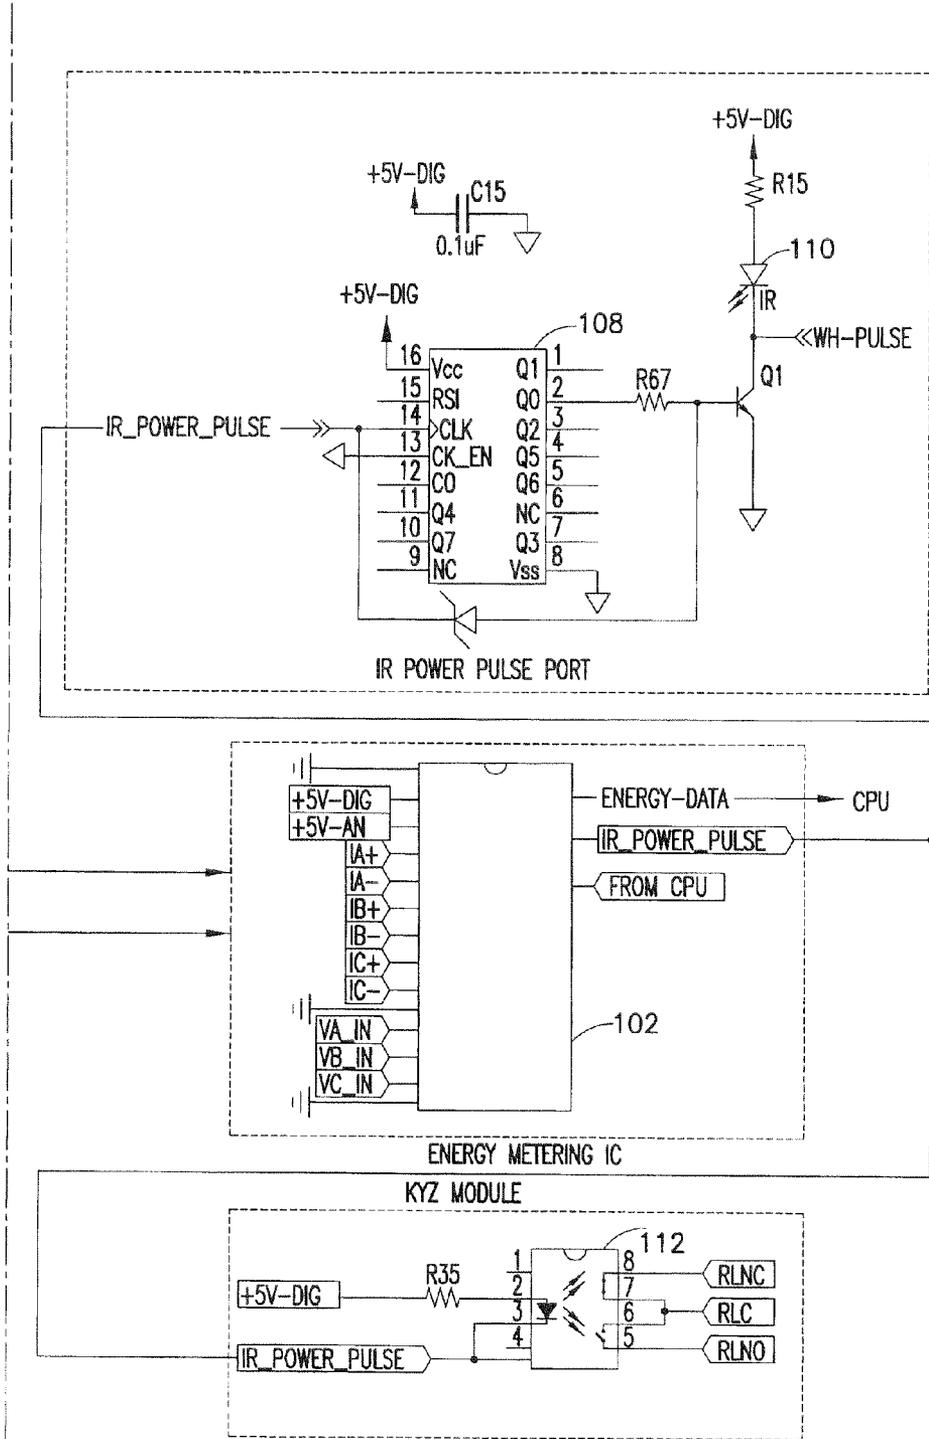


FIG.3B

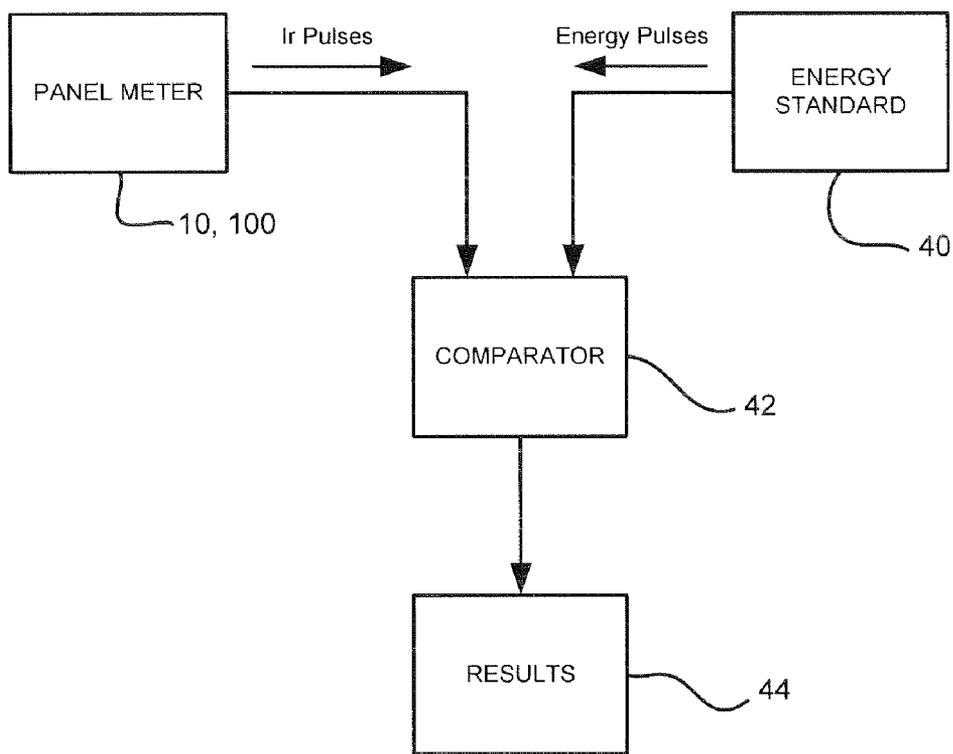


FIG. 4

## TEST PULSES FOR ENABLING REVENUE TESTABLE PANEL METERS

### CROSS REFERENCE TO RELATED APPLICATIONS

**[0001]** The present application is a continuation application of U.S. application Ser. No. 12/401,791, filed Mar. 11, 2009 entitled "TEST PULSES FOR ENABLING REVENUE TESTABLE PANEL METERS", which is a continuation application of U.S. application Ser. No. 11/317,227, filed Dec. 22, 2005 entitled "TEST PULSES FOR ENABLING REVENUE TESTABLE PANEL METERS", now U.S. Pat. No. 7,508,190, which is a continuation-in-part application of U.S. application Ser. No. 10/969,713, filed Oct. 20, 2004 entitled "TEST PULSES FOR ENABLING REVENUE TESTABLE PANEL METERS", the contents of all of which are hereby incorporated by reference.

### BACKGROUND OF THE INVENTION

**[0002]** 1. Field of the Invention. The present invention relates generally to electrical panel meters, and more specifically, to a system and method for utilizing test pulses in electrical panel meters to enable their use for revenue metering.

**[0003]** 2. Discussion of the Related Prior Art. Electric utility companies use revenue meters to track electric usage by customers. These meters track the amount of power consumed at a particular location. These locations range from commercial businesses to residential homes. The electric utility companies use the revenue meter to charge its customers for their power consumption, i.e., revenue metering. Typically, the revenue meter connects between utility power lines supplying electricity and a usage point, namely a residence or commercial place of business.

**[0004]** Traditionally, panel mounted or panel meters were utilized only for a visual indication of instantaneous readings on an electrical switchboard panel. In the past, these panel meters were exclusively analog, and were utilized for measuring the amount of voltage, current, wattage etc., supplied to consumers through the utility lines. As metering technology progressed, the panel meters became multifunction, and have the ability to measure energy as well as instantaneous measurements.

**[0005]** However, even though the panel meters had the ability to measure energy, the panel meters did not have the ability to be tested and verified for accuracy using traditional Utility energy based testing methods. Furthermore, since these types of meters are used generally for indication, the hardware design for panel meters was limited to a low accuracy standard, e.g., 1%, making energy test pulses futile. Therefore, conventional panel meters do not have the capability to be used for revenue billing measurements.

**[0006]** Traditionally, revenue meters used mechanical or analog means to track the amount of consumed power. The inductive spinning disk power meter is still commonly used. The spinning disk drives mechanical counters that track the power consumption information. Newer to the market are electronic power meters, which have replaced the older mechanical meters. Electronic revenue meters utilize digital sampling of the voltage and current waveforms to generate power consumption information. In addition to monitoring power consumption, electronic revenue meters can also monitor and calculate power quality, e.g., voltage, current,

real power, reactive power, apparent power, etc. These power quality measurements and calculations are displayed on an output display device on the meter.

**[0007]** The traditional method for testing the revenue meters is to take an infrared pulse supplied by the mechanical energy meter, which pulses proportionally to the energy accumulated, e.g., one revolution of the inductive spinning disk equals one pulse. The standard revolution value is 1.8 watt-hours per pulse, but this value is generally adjustable. The pulses are then counted and compared to pulses generated by a standard energy reference. If the accuracy of the taken infrared pulses is within the percentage required by the industry standards, then the energy meter would be determined to be in good standing and put into service. Otherwise, the meter would be re-calibrated and tested again or not used.

**[0008]** The veracity of panel measuring devices could not be determined in the field through the use of traditional methods and equipment. Since utility testing equipment relies on energy pulse accumulation of which are not available with indication panel instrumentation. Therefore, these meters would not be used for billing purposes as the supplied data can potentially be erroneous.

### SUMMARY OF THE INVENTION

**[0009]** Therefore, the present invention has been designed to substantially solve at least the above problems and/or disadvantages and to provide at least the advantages below.

**[0010]** Accordingly, an object of the present invention is to provide an electrical panel metering device capable of performing multiple metering functions including an energy test device for testing a veracity of an energy measurement of the electrical panel metering device.

**[0011]** According to another object of the present invention, a method for testing a veracity of an energy measurement of an electrical panel metering device is provided. The method includes the step of proving an energy test pulse to verify the energy measurement of the electrical panel metering device.

**[0012]** According to one aspect of the present disclosure, an electrical panel metering device including a housing is provided. The panel metering device includes at least one sensor configured for measuring an electrical parameter; at least one analog-to-digital converter coupled to the at least one sensor for converting the measured electrical parameter to a digital signal; a display for continuously displaying at least one electrical parameter; a processor configured to receive the digital signal and calculate an amount of energy consumed; and a test pulse circuit configured to receive the calculated amount and generate a plurality of pulses equal to the calculated amount, wherein each of the plurality of pulses is equal to a predetermined amount of energy. The at least one analog-to-digital converter has 24 bit resolution and has a sampling rate of 400 samples per cycle.

**[0013]** In another aspect of the present disclosure, the test pulse circuit includes an LED disposed on a face of the housing to generate infrared pulses.

**[0014]** In a further aspect, the test pulse circuit further includes a divider for receiving the calculated amount from the processor, generating the plurality of pulses and transmitting the pulses to the LED.

**[0015]** In another aspect of the present disclosure, the at least one analog-to-digital converter, the processor, and the test pulse circuit are disposed on a single integrated circuit.

**[0016]** In various embodiments, the display is configured to continuously and simultaneously display at least three electrical parameters. The display may further include a % load bar display.

**[0017]** According to another aspect, an electrical panel metering device including a housing having a front face includes three current sensors configured for measuring current on each of three phases of an electrical distribution system; three voltage sensors configured for measuring voltage on each of three phases of an electrical distribution system; six analog-to-digital converters for converting the measured electrical parameters to digital signals, each analog-to-digital converter coupled to one of the three current sensors and three voltage sensors; a display disposed on the front face for continuously displaying at least three electrical parameters; a processor configured to receive the digital signals and calculate an amount of energy consumed; a test pulse circuit configured to receive the calculated amount and generate a plurality of pulses equal to the calculated amount, wherein each of the plurality of pulses is equal to a predetermined amount of energy; and a light emitting diode disposed on the front face and coupled to the test pulse circuit for receiving the plurality of pulses and generating a plurality of infrared pulses.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0018]** The above and other aspects, features, and advantages of the present disclosure will become more apparent from the following detailed description when taken in conjunction with the following drawings in which:

**[0019]** FIG. 1 illustrates a block diagram of a panel meter including an energy test pulse device according to a preferred embodiment of the present disclosure;

**[0020]** FIG. 1A is a side view of the panel meter shown in FIG. 1;

**[0021]** FIG. 2 is a schematic diagram of the components of the panel meter shown in FIG. 1;

**[0022]** FIG. 3 is a schematic diagram of a panel meter according to another embodiment of the present disclosure; and

**[0023]** FIG. 4 is a diagram illustrating a method for testing the veracity of the panel metering device of the present disclosure.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0024]** Preferred embodiments of the present disclosure will be described hereinbelow with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail to avoid obscuring the present disclosure in unnecessary detail. Throughout the figures like reference numerals represent like elements.

**[0025]** The present disclosure provides a device and method for assuring accuracy in verifying a panel meter, thereby enabling such panel meters to be used as power meters for the purpose of revenue metering. Verification of accuracy determines if the electronic panel meter is calibrated to within the standard traditionally used in the Utility industry for verifying veracity of electronic revenue meters, e.g., socket meters, to enable such meter to be used as utility revenue meters.

**[0026]** More specifically, panel meters according to the present invention are designed to provide Real Time indication, not merely energy usage indication. Panel operators are traditionally looking for the load on a bank or the voltage when employing conventional panel meters. The present invention performs this function, but also provides revenue certifiable energy data that can be brought back to a central monitoring system. Conventionally, this was a function that was relegated to “higher end” revenue metering.

**[0027]** The present invention provides an electronic panel meter that includes circuitry for generating an energy test pulse. FIG. 1 illustrates an electronic panel meter **10** having a front face panel **12**. An energy test pulse device **14**, which generates an infrared test pulse, is applied to the front face **12** of the panel meter **10**. In the preferred embodiment of the present invention, the test pulse device **14** is added to the front face **12** of the electronic panel meter **10**, which automatically pulses in proportion to the energy used. Sending infrared pulses in accordance with the amount of energy used is known to those skilled in the art.

**[0028]** Generally, the panel meter **10** will be disposed in a housing **11** which will facilitate mounting of the panel meter **10** in a conventional indication panel **13**. Referring to FIG. 1A, the housing **11** will have a generally rectangular volume that will fit in conventional DIN 92 mm square and ANSI C39.1 round cut-outs **15**, as are known in the art. As can be seen from FIG. 1A, the front face **12** is dimensioned to be larger than the housing **11**. In further embodiments, the housing may be configured to mount the panel meter **10** directly on a wall or on a wall using conventional DIN rail.

**[0029]** The internal components of the panel meter **10** of the present disclosure for monitoring and determining an amount of electrical power usage by a consumer are illustrated in FIG. 2. Generally, the panel meter **10** includes sensors **16**, a plurality of analog-to-digital (A/D) converters **18** and a processing system including a central processing unit (CPU) **22** and/or a digital signal processor (DSP) **20**.

**[0030]** The sensors **16** will sense electrical parameters, e.g., voltage and current, of the incoming lines from an electrical power distribution system. Preferably, the sensors will include current transformers and potential transformers, wherein one current transformer and one voltage transformer will be coupled to each phase of the incoming power lines. A primary winding of each transformer will be coupled to the incoming power lines and a secondary winding of each transformer will output a voltage representative of the sensed voltage and current. The panel meter **10** will support 3 element wye, 2.5 element wye, 2 element delta and 4 wire delta systems. The output of each transformer will be coupled to the A/D converters **18** configured to convert the analog output voltage from the transformer to a digital signal that can be processed by the CPU **22** or DSP **20**.

**[0031]** In one embodiment, the A/D converters **18** will utilize 24-bit analog to digital conversion and provide sampling at 400+ samples per cycle on all channels measured, wherein a cycle is one complete set of positive and negative values of an alternating current or voltage. Preferably, the panel meter will include six A/D converters, each individual A/D converter coupled to an individual sensor, e.g., 3 voltage sensors and 3 current sensors. By employing this high bit resolution, the panel indication meter of the present disclosure will have an accuracy of +/-0.1% for volts and amps and 0.2% for

power and energy functions, which will meet the accuracy requirements of IEC687 (Class 0.2%) and ANSI C12.201 (Class 0.2%).

**[0032]** The CPU **22** is capable of receiving the digital signals from the A/D converters **18** to perform the necessary calculations to determine the power usage and controlling the overall operations of the panel meter **10**. In a preferred embodiment, the DSP **20** will receive the digital signals from the A/D converters **18** and perform the necessary calculations to determine the power usage to free the resources of the CPU **22**.

**[0033]** A power supply **24** is also provided for providing power to each component of the panel meter **10**. Preferably, the power supply **24** is a transformer with its primary windings coupled to the incoming power distribution lines and having an appropriate number of windings to provide a nominal voltage, e.g., 5VDC, at its secondary windings.

**[0034]** The panel meter **10** of the present disclosure will have user interface for interacting with a user and for communicating events, alarms and instructions to the user. The user interface will include a display **26** for providing visual indications to the user. The display **26** may include a touch screen, a liquid crystal display (LCD), a plurality of LED number segments, individual light bulbs or any combination of these. The display **26** may provide the information to the user in the form of alpha-numeric lines, computer-generated graphics, videos, etc. The user interface will also include a speaker or audible producing means (not shown) for alerting a user of alarm and for providing spoken instructions. The speaker will be coupled to the CPU **22** via a digital-to-analog converter (D/A) for converting digital audio files stored in memory **28** to analog signals playable by the speaker.

**[0035]** In a preferred embodiment, the display **26** of panel meter **10** will include at least three sections of LEDs, e.g., a three line display, to enable the panel meter to continuously and simultaneously display three parameters of the electrical system, e.g., voltage on each of the three phases, to a user, e.g., a panel operator. Furthermore, the display **26** will include a 10 segment LED display **27** to represent % of load on the electrical system at the point of measurement of the panel meter **10**. The % of load bar display **27** may be any bar indication known in the art to quickly indicate to a user the % of load.

**[0036]** The panel meter **10** will include a communication device **30** for enabling communications between the panel meter **10** and other computing devices, e.g., a desktop computer, laptop computer, other intelligent electronic devices (IEDs), SCADA systems, other meters, etc. The communication device **30** may be a modem, network interface card (NIC), wireless transceiver, etc. In one embodiment, the panel meter **10** will include two communications ports: (1) a first port will provide RS-485 communications speaking Modbus ASCII, Modbus RTU or DNP 3.0 protocol and (2) a second port will be an optical IrDA port coupled to the front face panel to enable setup and programming of the IED without the use of a communication cable. The first port will operate with a baud rate from about 9600 baud to about 57,600 baud. An exemplary IrDA port is disclosed in commonly owned U.S. patent application Ser. No. 10/146,339 entitled "METER WITH IRDA PORT", the contents of which are hereby incorporated by reference. The IrDA port will enable wireless transmitting and receiving of data to and from the panel meter. Preferably, the IrDA port operates according to one or more of the standard IrDA protocols, such as IrDA

Infrared Link Access Protocol (IrLAP), IrDA Infrared Link Management Protocol (IrLMP), IrDA Transport Protocols (Tiny TP), IrDA Object Exchange Protocol (IrOBEX), Extensions to IrOBEX for Ir Mobile Communications, and IrTran-P (Infrared Transfer Picture) Specification. Preferably, the IrDA port transmits and receives data according to speeds defined for the IrDA version 1.0, i.e., 2400 to 115200 kbps, and speeds defined by the IrDA version 1.1, i.e., speeds of 0.576 and 1.152 Mbps, with 1/4 mark-to-space ratio. The IrDA port can also operate at a speed of 4 Mbps, i.e., 4 PPM modulation with 1/4 mark-to-space ratio. Also, the IrDA port preferably uses a pulse width of only 3/16 or 1/4 (mark-to-space ratio) of the total time for one bit. The IrDA port will enable communications to a variety of wireless handheld devices including a corresponding IrDA port such as a laptop computer, a PocketPC operating with Windows™ mobile software or Windows™ CE, a Palm OS enabled device, etc.

**[0037]** The panel meter **10** includes a test pulse circuit **32** for generating test pulses to be applied to the front panel face **12**. The test pulse circuit **32** will drive a light emitting diode (LED) **14** for generating infrared test pulses. The CPU **22** or DSP **20** will perform the necessary calculations to determine the energy being consumed. The test pulse LED will continuously emit calibration pulses, where each pulse is equal to a predetermined number of Watthours per pulse. The predetermined number of Watthours per pulse will be user adjustable via programming from the front face panel or via a computer coupled to the communications device. Additionally, the millisecond duration of each output pulse, e.g., pulse width, is also user adjustable.

**[0038]** It is to be understood that the present disclosure may be implemented in various forms of hardware, software, firmware, special purpose processors, or a combination thereof. The panel meter also includes an operating system and micro instruction code. The various processes and functions described herein may either be part of the micro instruction code or part of an application program (or a combination thereof) which is executed via the operating system.

**[0039]** It is to be further understood that because some of the constituent system components and method steps depicted in the accompanying figures may be implemented in software, the actual connections between the system components (or the process steps) may differ depending upon the manner in which the present disclosure is programmed. Given the teachings of the present disclosure provided herein, one of ordinary skill in the related art will be able to contemplate these and similar implementations or configurations of the present disclosure.

**[0040]** In a further embodiment, several of the above mentioned components can be combined to conserve space in the small form factor of the panel meter of the present disclosure. In prior art revenue meters, the analog-to-digital converters, central processing unit and DSP would require at least three separate circuit boards rendering the prior art revenue meters large and expensive to manufacture making them unsuitable for panel metering which require a smaller form factor and to be inexpensive for the functionality they are providing. Referring to FIG. 3, panel meter **100** includes an energy metering integrated circuit (IC) to perform the functions of the A/D converters, central processing unit, the DSP and the test circuit. The energy metering integrated circuit (IC) is adapted to receive a current input (**104**) and a voltage input (**106**). The panel meter **100** includes three current sensors Ia, Ib, Ic and three voltage sensors Va, Vb, Vc individually coupled to a six

single A/D converter channels residing on-board of the metering IC **102**. The metering IC **102** will perform the necessary energy calculations via an on-board processor and will output active power information as a pulse, e.g., IR\_POWER\_PULSE. This pulse may be fed directly to the LED **110** to generate test pulses at the front face of the panel meter **100**. However, the processing speed and frequency of the output of the metering IC **102** is too fast to be used to drive a LED test pulse to be tested by conventional testing equipment, e.g., a WECO meter tester. Therefore, the output active power information pulse, e.g., IR\_POWER\_PULSE, will be sent to a counter/divider **108** to, in effect, slow down the pulses. For example, if a divide-by-8 counter is employed, for every 8 pulses inputted to the counter **108**, one pulse will be generated to drive LED **110**. As is known in the art, the metering IC may include memory for storing operating instructions, algorithms, etc. It is to be appreciated that the analog-to-digital converters of the metering IC will have at least 24 bit resolution and the metering IC will be able to process at least 400 samples/cycles to ensure the accuracy of the panel meter for revenue standards.

**[0041]** The output active power information, e.g., IR\_POWER\_PULSE, may also be used to generate a KYZ output pulse, i.e., a three wire pulse output wherein each pulse or transition represents a predetermined increment of power. The IR\_POWER\_PULSE will be fed to relay **112** which in turn will generate the KYZ output pulse. An exemplary relay is model LCC110 common input OptoMOST™ relay commercially available from Clare, Inc. of Beverly, Mass.

**[0042]** Furthermore, the metering IC **102** includes a SPI serial interface for outputting energy data to the CPU **22**. The CPU will then further process the data as needed, e.g., generating signals representative of values to be displayed on display **26**, calculating % load, etc.

**[0043]** To be certified for revenue metering, power providers and utility companies have to verify that the panel meter will perform to its stated accuracy. Referring to FIG. **4**, a method for testing the veracity of the panel metering device is illustrated. The panel meter **10,100** of the present disclosure will be compared to an energy or reference standard **40**. The reference standard **40** is an electrical meter that is extremely accurate and has had its accuracy certified by the National Institute of Science and Technology (NIST). A variety of reference standards are commercially available from Radian Research, Inc. of Lafayette, Ind. Reference standards are manufactured in accuracy classes of  $\pm 0.1\%$ ,  $\pm 0.05\%$  and  $\pm 0.025\%$ , wherein the accuracy class needed for any comparative test is a function of the accuracy class of the meter being tested. Generally, laboratory testing requirements state that where possible, the comparative reference shall be of an accuracy class 10 times better than the meter being tested.

**[0044]** During the test, a regulated voltage and current source are simultaneously applied to the meter under test **10** and the reference standard **40**. Energy pulses from the meter under test **10** and the reference standard **40** are then fed into a comparator **42** which compares the pulses of the meter to the known reference **40** to determine the accuracy of the meter under test, e.g., a results report **44**. If the meter under test is within an acceptable range, the panel meter is put in use. Otherwise, if the panel meter under test is outside an acceptable range, the panel meter is either taken out of service or recalibrated.

**[0045]** By providing an ability to determine the calibration veracity for accumulated energy of an electrical panel meter

using standard field accepted testing methods designed for a different class of product, the present invention enables a panel meter, an significant lower cost and smaller device, to be used for revenue applications and eliminates the need for two separate meters, one for panel indication, and the other for energy and revenue applications.

**[0046]** While the disclosure has been shown and described with reference to certain preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the disclosure as defined by the appended claims.

What is claimed is:

1. A panel power monitoring device comprising:
  - three current sensors configured for measuring current on each of three phases of an electrical distribution system;
  - three voltage sensors configured for measuring voltage on each of three phases of the electrical distribution system;
  - six analog-to-digital converters for converting the measured electrical parameters to digital signals, each analog-to-digital converter coupled to one of the three current sensors and three voltage sensors;
  - a display for continuously displaying at least one electrical parameter; and
  - a processing module configured to receive the digital signals and calculate an amount of energy consumed, wherein the six analog-to-digital converters and the processing module are disposed on a single integrated circuit.
2. The panel power monitoring device of claim **1**, wherein each of the six analog-to-digital converters has 24 bit resolution.
3. The panel power monitoring device of claim **1**, wherein each of the six analog-to-digital converters has a sampling rate of at least 400 samples per cycle.
4. The panel power monitoring device of claim **1**, wherein the integrated circuit further comprises a SPI serial interface for outputting the calculated energy consumed.
5. The panel power monitoring device of claim **1**, wherein the display is configured to continuously and simultaneously display at least three electrical parameters.
6. The panel power monitoring device of claim **1**, wherein the display further comprising a % load bar display.
7. The panel power monitoring device of claim **1**, wherein the display is a touch screen.
8. The panel power monitoring device of claim **1**, wherein the display is a liquid crystal display (LCD).
9. The panel power monitoring device of claim **1**, further comprising audible producing means for alerting of alarms.
10. The panel power monitoring device of claim **1**, further comprising a communication device for enabling communications to other meters and at least one computing device via at least one communication protocol.
11. The panel power monitoring device of claim **10**, wherein the at least one communication protocol is Modbus, Modbus RTU or DNP.
12. The panel power monitoring device of claim **1**, wherein the panel metering device is configured to wirelessly communicate to a computing device.
13. The panel power monitoring device of claim **12**, wherein the wireless communication is performed by an optical port located on the front face of the meter.

**14.** The panel power monitoring device of claim **13**, wherein the optical port operates according to at least one IrDA protocol.

**15.** An panel power monitoring device comprising:  
a housing including a front face panel configured to facilitate mounting of the panel power monitoring device in a cut-out of an indication panel;

three current sensors configured for measuring current on each of three phases of an electrical distribution system;  
three voltage sensors configured for measuring voltage on each of three phases of the electrical distribution system;  
six analog-to-digital converters for converting the measured electrical parameters to digital signals, each analog-to-digital converter coupled to one of the three current sensors and three voltage sensors;

a processing module configured to receive the digital signals, calculate an amount of energy consumed for revenue metering and calculate the percent of load on the electrical system at the point of measurement, wherein the six analog-to-digital converters and the processing module are disposed on a single integrated circuit; and  
a display disposed on the front face panel of the housing for continuously displaying at least one electrical parameter,

wherein the display further comprising a % load bar display for continuously displaying the calculated percent of load on the electrical system at the point of measurement.

**16.** The panel power monitoring device of claim **15**, wherein the display is configured to continuously and simultaneously display at least three electrical parameters.

**17.** The panel power monitoring device of claim **16**, wherein the panel power monitoring device is configured to wirelessly communicate to a computing device.

**18.** The panel power monitoring device of claim **17**, wherein the wireless communication is performed by an optical port located on the front face panel.

**19.** The panel power monitoring device of claim **18**, wherein the optical port operates according to at least one IrDA protocol.

**20.** The panel power monitoring device of claim **19**, further comprising a light emitting diode (LED) located on the front face panel configured for emitting light pulses equal to a predetermined amount of energy accumulated for verifying the accuracy of the panel power monitoring device with an external reference standard device.

\* \* \* \* \*