

No. 826,349.

PATENTED JULY 17, 1906.

E. McLEAN.
METHOD OF REGULATING FURNACES.

APPLICATION FILED MAY 6, 1905.

4 SHEETS—SHEET 1.

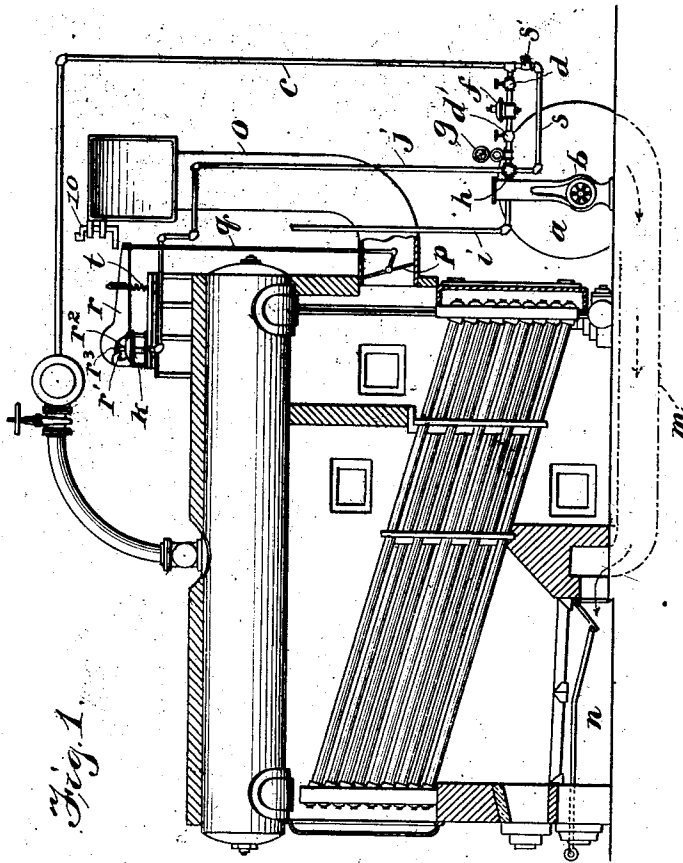


Fig. 1.

WITNESSES:

Robert Head
R. B. Cavanagh.

INVENTOR

Embury McLean

Clifford P. Hall

ATTORNEY &

No. 826,349.

PATENTED JULY 17, 1906

E. McLEAN.

METHOD OF REGULATING FURNACES.

APPLICATION FILED MAY 6, 1905.

4 SHEETS—SHEET 2.

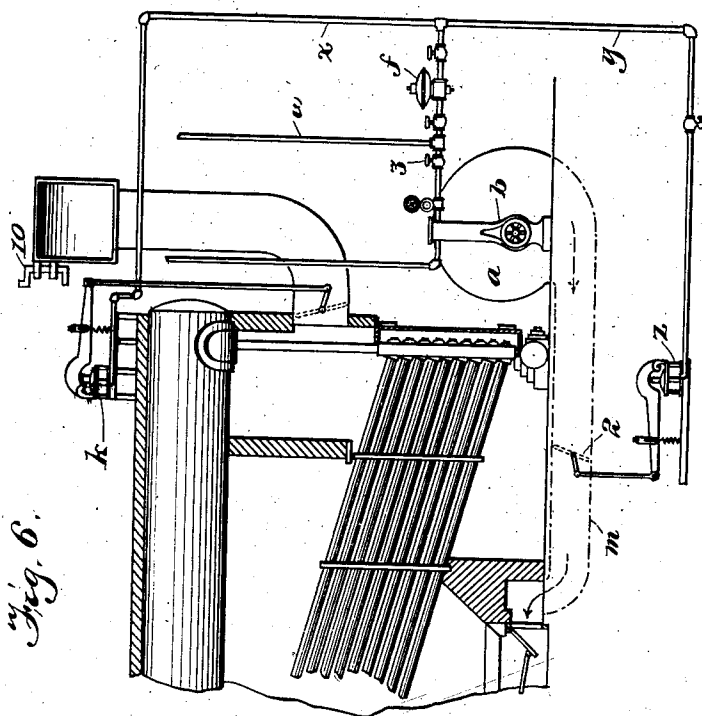


Fig. 6.

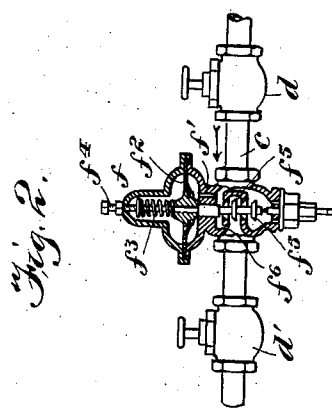


Fig. 7.

WITNESSES:

Robert Head
P. D. Caranagh

INVENTOR

Embury McLean
BY Clifford & Price
ATTORNEYS

No. 826,349.

PATENTED JULY 17, 1906.

E. McLEAN.

METHOD OF REGULATING FURNACES.

APPLICATION FILED MAY 6, 1905.

4 SHEETS—SHEET 3.

Fig. 3.

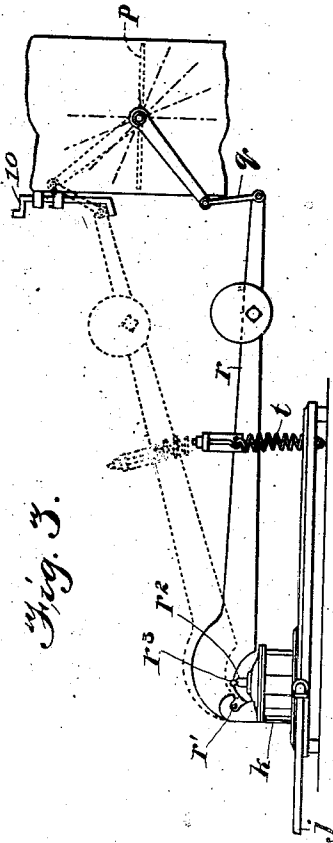
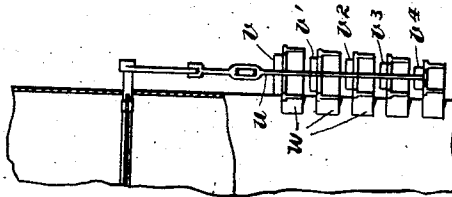


Fig. 3.

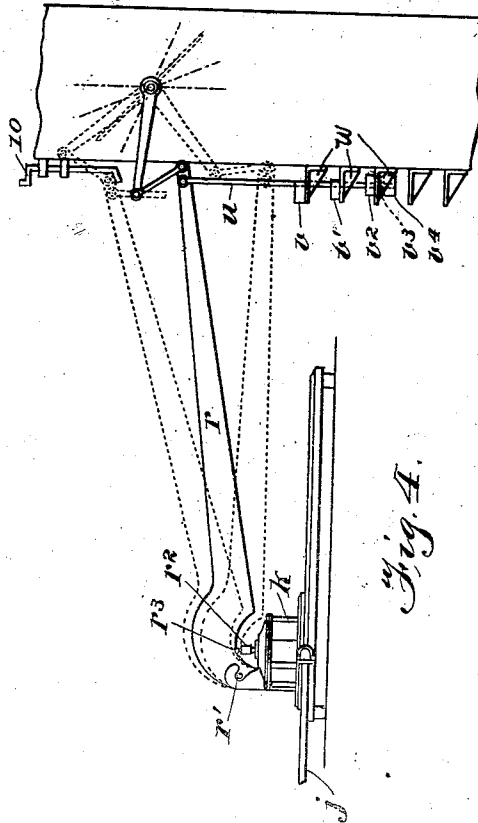


Fig. 4.

WITNESSES:

Robert Head
R. B. Caranagho.

INVENTOR

Embury McLean

Oppert & Pice


ATTORNEYS

No. 826,349.

PATENTED JULY 17, 1906.

E. McLEAN.
METHOD OF REGULATING FURNACES.
APPLICATION FILED MAY 6, 1905.

4 SHEETS—SHEET 4.

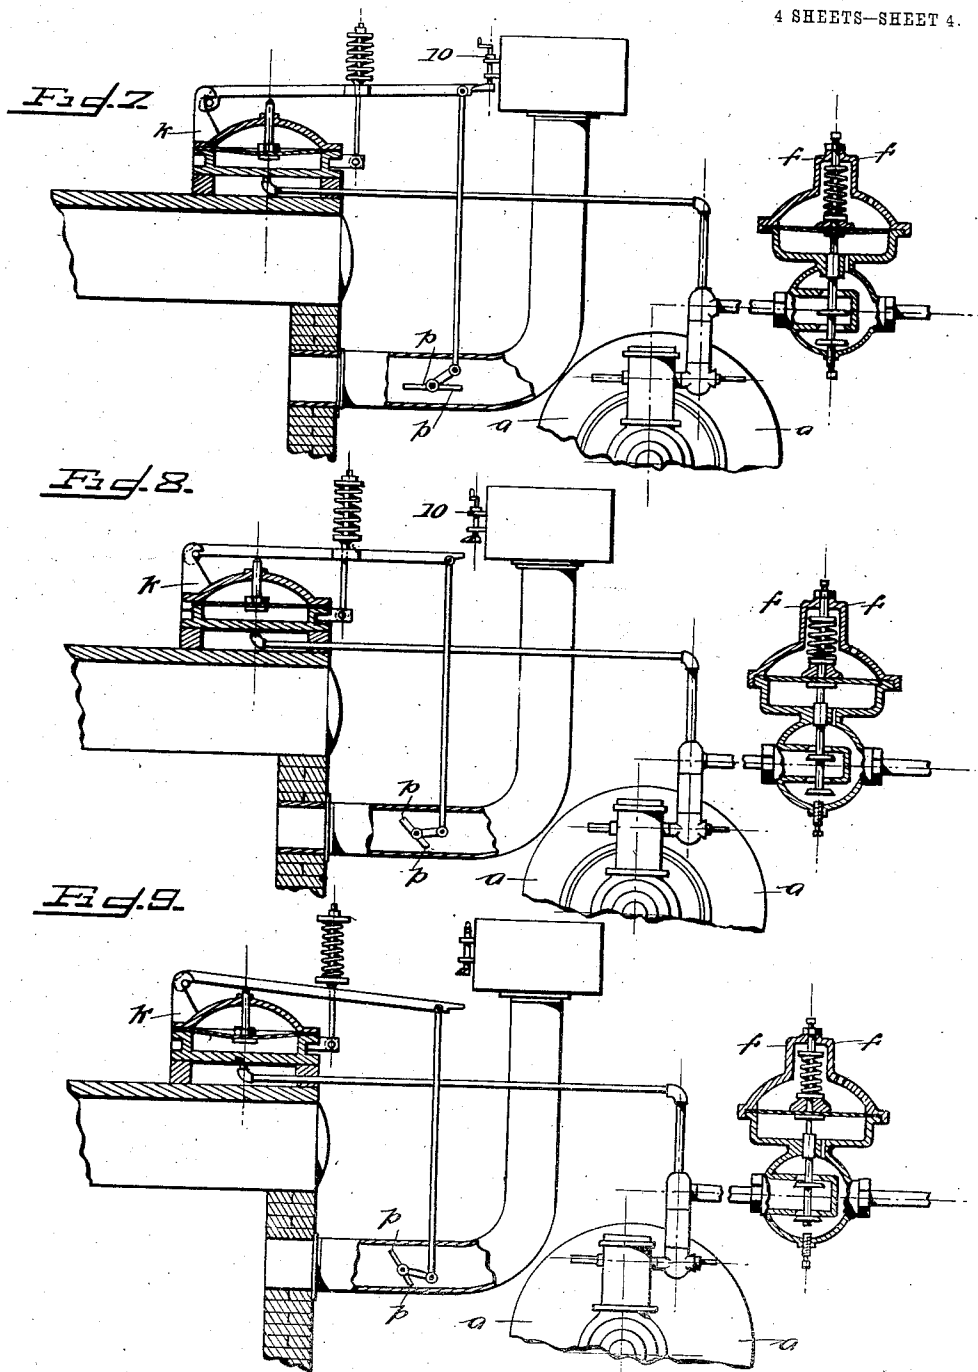

Witnesses
R. D. Ashley
R. B. Caranagh

Inventor
Embury McLean.
By his Attorneys
Clifford & Pease

UNITED STATES PATENT OFFICE.

EMBURY McLEAN, OF NEW YORK, N. Y.

METHOD OF REGULATING FURNACES.

No. 826,349.

Specification of Letters Patent.

Patented July 17, 1906.

Original application filed May 23, 1904, Serial No. 209,256. Divided and this application filed May 6, 1905. Serial No. 259,241.

To all whom it may concern:

Be it known that I, EMBURY McLEAN, a citizen of the United States, and a resident of the city of New York, borough of Brooklyn, in the county of Kings and State of New York, have invented certain new and useful Improvements in Methods of Regulating Furnaces, of which the following is a specification.

This invention relates to a novel and improved method of regulating furnaces and is a division of my pending application, Serial No. 209,256.

My invention consists in the method set forth in and falling within the scope of the appended claims.

In order that my method may be readily understood by those skilled in the art to which it appertains, I have shown in the accompanying drawings one form of apparatus through the agency of which it may be carried into effect.

In the drawings, Figure 1 is a vertical longitudinal section, somewhat diagrammatic, through a steam-boiler and fire-box provided with an apparatus by which the method may be practiced. Fig. 2 is a detailed enlarged section through the steam connection containing a regulating-valve. Fig. 3 is an enlarged detail view showing the stack-damper and diaphragm-damper motor. Fig. 4 is a similar view showing a modification. Fig. 5 is a view at the left-hand side of the apparatus shown by Fig. 4. Fig. 6 is a vertical longitudinal section similar to Fig. 1, showing a modification of the general organization. Figs. 7, 8, and 9 show diagrammatically the position of the damper, the damper-motor, and the blower-engine regulating-valve at the condition of starting before there is steam in the boiler, the condition of running below normal steam-pressure, and the condition of running above normal steam-pressure, respectively.

With the apparatus illustrated my improved method is accomplished by regulating the outlet for products of combustion correspondingly with and commensurate to the regulation of the forced draft with graduated rate of combustion between the extremes. It will be readily understood that the method may be practiced in various

ways or by the utilization of various kinds of apparatus and is applicable to furnaces for various purposes.

The present invention has in view to maintain substantially uniform steam-pressure with maximum economy of coal consumption and minimum liability of injury to the boiler by inrush of cold air when the fire-box is opened and of dilution and cooling of the gases by air drawn in through crevices in the door or furnace-setting. This is accomplished by maintaining in the fire-box a pressure equal or substantially equal to the atmospheric pressure in the boiler-room, while at the same time supplying to the fire-box the full amount of air required for effective combustion of the fuel. Under these conditions when the door of the fire-box is opened there is an absence of inward or outward draft, as may be readily determined by suspending a light cloth across the open door.

One organization that experience has demonstrated to be effective in producing automatically the conditions described comprises a draft-blower and a cooperating stack-damper both controlled by the steam-pressure in such way that a comparatively minute reduction of pressure causes a corresponding acceleration of the speed of the blower and increase of volume of air supplied to the fire-box by the blower and an actuation of the damper to afford a corresponding increase of the stack-outlet area commensurate with the increased air-delivery from the blower—that is to say, there is in the operation of this system minute or gradual changes of the position of the damper corresponding to variations of speed of the blower. In this way the steam-pressure may be held at a substantially uniform point, and the pressure within the fire-box may exactly or substantially balance atmospheric pressure in the boiler-room, so that on the opening of the fire-box door there will be no inrush of the cold air with the usual accompanying boiler contraction. In the particular organization shown steam from the boiler is passed through a regulating-valve, from whence it passes to the blower-engine and to a diaphragm-motor having the characteristic operation hereinafter described. Another way of practicing my method is to operate the

blower at uniform or substantially uniform speed and throttle the air-supply passing therefrom to the fire-box.

In Fig. 1 a draft-blower *a* is driven by an engine *b*, supplied by steam from the boiler through pipe connection *c*, which contains steam-cocks *d* and *d'* and between them a steam-regulating valve *f* and also has applied to it a steam-gage *g*, beyond which one branch of the pipe *h* passes to the blower-engine, of which *i* is the exhaust-pipe, and another branch *j* passes to the diaphragm-motor *k*, that controls the damper. Air from the blower passes through the duct *m* into the ash-pit *n*, while the products of combustion pass through flue *o*, in which is located the damper *p*. The axis of the damper is turned by rod *q*, connected with a lever-arm *r*, hinged upon a knife-edge at *r'* and engaged by the piston-rod *r²* of the diaphragm-motor *k*. Preferably to assure desirable delicacy of operation the end of the piston-rod *r²* is engaged by knife-edge *r³*, carried by the lever *r*.

The diaphragm-motor *k* is or may be of any suitable ordinary type; but the lever *r* thereof is controlled, as hereinafter described, relatively to the steam-pressure exerted upon the diaphragm of the motor—that is to say, its movement is a graduated one between its two extreme positions, one being the closed position in which the damper may be entirely closed or only partly closed, according to the special requirements in any given case, and the other the open position in which the damper may be entirely or only partly open, or the lever of the damper-motor may be so controlled that the changes in the position of the damper occur as a series of relatively minute steps or increments of movement either from the open or closed position of the damper, as the case may be.

Around the parts *d d' f g* is a shunt or by-pass pipe connection *s*, containing an ordinary steam-cock *s'*, which may be opened in starting to allow steam at full boiler-pressure to pass to the blower-engine, as well as to the lower side of the diaphragm of the damper-motor *k*, and thereby cause the opening of the damper.

Steam from the boiler enters the regulating-valve *f*, as indicated by the arrow, Fig. 2, and passes by opening *f'* to the under side of a diaphragm *f²*, which is normally urged downwardly by a spring *f³*, adjusted by screw-bolt *f⁴*, and carries a valve-spindle, with two valves *f⁵* seating in the same direction upon two valve-seats, through which steam from the boiler passes. The steam-outlet side of the regulating-valve is connected by an opening *f⁶* with the steam-inlet side. The opening *f⁶* is of such capacity as to deliver a determined quantity of steam when steam from the boiler is at a given pressure. Thus if the valves *f⁵* be seated a volume of steam, determined by the capacity of

opening *f⁶*, will pass to the blower-engine, causing the blower to operate at minimum speed and to the under side of the damper-motor, causing minimum opening of the damper. This condition of course only occurs when the boiler-pressure is at a maximum. As the boiler-pressure falls the diaphragm *f²* moving downward opens the valves *f⁵*, permitting additional steam to pass to the blower-engine and damper-motor and causing increase of speed of the blower and a corresponding extent of opening (or increase of opening) of the damper. A further fall of steam-pressure produces a corresponding further opening of valves *f⁵*, resulting in corresponding further increase of speed of blower and opening of damper. As steam-pressure increases reverse conditions are brought about. In other words, the increase or decrease of blower speed and corresponding damper-opening correspond to variations of boiler-pressure, and the changes occur on such minute changes of boiler-pressure that the latter is maintained substantially uniform. Since in any boiler which is to be worked at a given pressure the required amount of air and the required stack capacity to carry off the products of combustion at the various possible speeds of the blower may readily be arrived at, the pressure of gases in the fire-box and of air in the boiler-room may be equal or substantially so, and when the fire-door is opened there will be, therefore, no inrush of cold air to lower the temperature of the furnace and injure the boiler. As the boiler-pressure and blower speed vary, the damper-opening correspondingly varies, the opening being increased in one case to carry off the increased volume of gases without material increase of pressure in the fire-box and in the other decreased to prevent material reduction of pressure in the fire-box. Such retardation of gas and products of combustion by this action of the damper allows time for intimate mixture of the heated air with the gases, insuring substantially complete combustion and a substantially smokeless stack. If the boiler is properly proportioned for the work it has to do, there is also a maximum absorption by the boiler of heat from the gases, so that the temperature of the stack may be very little above the temperature of the boiler.

The described control of the lever-arm *r* of the damper-motor may be accomplished by means of a suitably-constructed coiled spring of such character and dimensions that the strength of its reaction through the entire required range of its distention shall in cooperation with the regulated steam-pressure beneath the diaphragm of its motor result in the graduated or gradual changes of position of the damper, as already described. Like results may approximately be effected by the arrangement of weights shown in Figs. 13c

4 and 5. A pendent rod u , pivoted upon the end of the lever r , passes through a series of weights v v' v^2 v^3 v^4 , (of which, however, there may be any desired number,) supported upon
 5 brackets w . The weights are graded as to size, the upper ones of the series being larger, and the rod u is headed at its lower end, so that as the lever is moved upwardly by the strain of the damper-motor the weights v^4 , v^3 ,
 10 v^2 , v' , and v are picked up in succession, corresponding positions of the damper p being indicated by the dotted lines on Fig. 4, as they are also indicated by the dotted lines in Fig. 3, wherein in lieu of the series of blocks
 15 of different weight the spring t above described is employed. To locate the brackets and adjust the weights shown in Figs. 4 and 5 to assist in maintaining constantly atmospheric pressure in the fire-box, the following
 20 method may be employed. Let the blower be run at minimum speed and by hand adjust the damper until atmospheric pressure in the fire-box is attained. This may be determined by suspending a sheet of light material in front of the open furnace-door. The
 25 position of the lower end of the rod u is then noted, and the weight required to hold the damper stationary in that position ascertained. This determines the position of the lowest bracket and the required amount of the weight v^4 resting thereon. Next, let the
 30 blower be run at maximum speed and by hand adjust the damper until atmospheric pressure in the fire-box is attained. The position of the lower end of the rod u is then noted and the weight required to hold the damper stationary in that position ascertained. This determines the position of the uppermost bracket and the required aggregate amount of the weights v v' v^2 v^3 v^4 . Next repeat these proceedings with as many intermediate speeds of the blower as desired, thereby determining the positions of the intermediate brackets and the weights to be carried thereby. By this means the apparatus may be adjusted so that substantially constant atmospheric pressure will be maintained in the fire-box for all working speeds of the blower.

35 Theoretically and practically the best results are obtained by supplying to the fire-box sufficient air for perfect combustion and maintaining a balance, or substantially so, between the pressures in the fire-box and boiler-room. The apparatus may, however, be so adjusted that any desired substantially uniform pressure below that of the boiler-room may be maintained. This may be desired in some cases for the purpose of ventilation notwithstanding a loss in efficiency and possible injury to the boiler. Of course a fire-box pressure above that of the boiler-room might be obtained, but is not desirable.

40 Another way of practicing this invention is shown in Fig. 6. There steam passes from

the boiler by pipe w' , through the regulating-valve f , and thence by pipe x to the diaphragm-motor k of the stack and by pipe y to a diaphragm-motor z , controlling a damper 2 in the air-duct m , through which air passes from the blower to the ash-pit. Both these
 70 damper-motors are controlled by springs or weights in the manner already described. The blower-engine, however, is connected direct to the boiler and runs, therefore, at a substantially uniform speed, the quantity of steam admitted thereto being fixed by setting the hand-operated valve 3.

I am aware that heretofore systems of boiler regulation in some respects resembling
 80 that herein disclosed have been proposed. In such systems, however, while the blower-engine has been controlled to control the blower relatively to the steam-pressure of the boiler the stack-damper has been so constructed and operated as to have really but
 85 two positions, one open and the other closed—that is to say, on a rise of pressure above normal the stack-damper will close and the blower, slow down until a condition is established resulting in the increased speed of the
 90 blower, accompanied by full opening of the damper. Such systems while having advantages and being comparatively efficient, affording an economy in coal consumption not obtained in unregulated boilers, nevertheless necessarily permit of a somewhat marked variation of boiler-pressure, rendering liable expulsion of the gases from the fire-box into the boiler-room when the blower speed
 95 is increased and before the damper opens, and also tend at times when the damper is open to cause a reduction of pressure in the fire-box below that of the boiler-room atmosphere, causing inrush of a large quantity of cold air should the furnace-door be opened.

100 Instead of a blower-engine actuated by steam from the boiler the motor or engine of the blower may be of a different character and may be actuated from another source of power. For instance, an electric motor could be used, the speed of which may be controlled by a rheostat and the contact device of the rheostat be controlled by a governing-motor—such, for instance, as the damper-motor k or z .
 115

In Figs. 7, 8, and 9 I have shown diagrammatically the damper p , the damper-motor k , and the regulating-valve f in the positions which they occupy, respectively, first, when the fire is starting and there is no steam on the boiler; second, when the pressure in the boiler is below the normal, and, third, when the pressure in the boiler is above the normal. Thus, referring to Fig. 7, which shows the parts when the fire is starting and there is no steam on the boiler, it will be observed that the damper p is wide open, so as to allow the fire to start under natural draft. It is shown as held open in this case by a hook 10, for which of course any suitable device
 120
 125
 130

performing the function may be substituted. The damper-motor *k* is then performing no function, while the regulating-valve *f* is wide open (there being no pressure under the diaphragm) and ready to admit a free passage of steam when it is generated to the blower-engine. Fig. 8 shows the position of the parts when the pressure in the boiler is so far below normal that the speed of the blower is at its maximum, the damper-motor being brought into action by releasing the hook 10. In this case, owing to a small steam-pressure on the under side of the diaphragm of the regulating-valve *f*, the maximum amount of steam is permitted to pass, on the one hand, to the blower-engine *a*, and, on the other hand, to the damper-motor *k*, thus holding the damper *p* in the position where it will balance the draft at the maximum blower speed. Fig. 9 shows the position of the parts when the steam-pressure is sufficiently above normal to reduce the blower to its minimum speed. In this case the increased pressure under the diaphragm of the regulating-valve *f* almost closes the passage through the regulating-valve, reducing, on the one hand, the amount of steam admitted to the blower-engine to the minimum and, on the other hand, reducing the pressure under the diaphragm of damper-motor *k* sufficiently to bring the damper *p* to the position where it will balance the draft at this speed of the blower. At intermediate steam-pressures, as will be readily understood, the positions of the parts shown in Figs. 8 and 9 will be simultaneously and correspondingly varied between the limits there shown, so that the pressure in the fire-chamber will always be maintained substantially constant, and preferably equal to the pressure of the atmosphere.

Where I have employed the term "blower" I intend the same to include any apparatus for supplying air to the furnace at a pressure above atmospheric pressure. Instead of automatically controlling the volume of air supplied to and the volume of gases discharged from the furnace by the steam-pressure or other function of the furnace it is obvious that one of these may be controlled by

hand or in any other manner (including steam-pressure) provided the other is simultaneously controlled correspondingly by any suitable means, so as to maintain a substantially uniform pressure in the furnace under varying rates of combustion, as already described.

I do not claim in this application the apparatus described herein, as the same forms the subject-matter of and is claimed in my Patent No. 817,438, patented April 10, 1906, and of which this application is a division.

Having thus described my invention, what I claim as new, and desire to secure by Letters Patent, is—

1. The method of regulating furnaces which consists in maintaining in the furnace-chamber a substantially uniform pressure under varying rates of combustion.

2. The method of regulating furnaces which consists in maintaining in the furnace-chamber a pressure substantially equal to atmospheric pressure under varying rates of combustion.

3. The method of regulating furnaces, which consists in supplying air to the furnace at different rates of delivery and simultaneously discharging gases from the furnace in quantities proportioned to said different rates of delivery, whereby a substantially uniform pressure is maintained in the furnace under varying rates of combustion.

4. The method of regulating furnaces, which consists in supplying air to the furnace at a pressure above that of the atmosphere and at different rates of delivery and simultaneously discharging gases from the furnace in quantities proportioned to said different rates of delivery, whereby a substantially uniform pressure is maintained in the furnace under varying rates of combustion.

In testimony whereof I have signed my name to this specification in the presence of two subscribing witnesses.

EMBURY McLEAN.

Witnesses:

R. B. CAVANAGH,
C. J. RATHJEN.