

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 August 2009 (13.08.2009)

(10) International Publication Number
WO 2009/099421 A1

(51) **International Patent Classification:**
BOID 63/12 (2006.01) BOID 25/24 (2006.01)
BOID 63/10 (2006.01)

01863 (US). **RAUTIO, Kevin** [US/US]; 12 Lincoln Street, Manchester-by-the-sea, MA 01944 (US).

(21) **International Application Number:**
PCT/US2008/0125 17

(74) **Agent:** HUBBARD, John, Dana; Millipore Corporation, 290 Concord Road, Billerica, MA 01821 (US).

(22) **International Filing Date:**
6 November 2008 (06.11.2008)

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
61/065,117 8 February 2008 (08.02.2008) US

(71) **Applicant** (for all designated States except US): **MILLIPORE CORPORATION** [US/US]; 290 Concord Road, Billerica, MA 01821 (US).

(72) **Inventors; and**


(75) **Inventors/Applicants** (for US only): **STRAEFFER, Gregory** [US/US]; 5 Barry Drive, North Chelmsford, MA

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) **Title:** MULTIFILTRATION CARTRIDGE FILTRATION APPARATUS

Figure 3

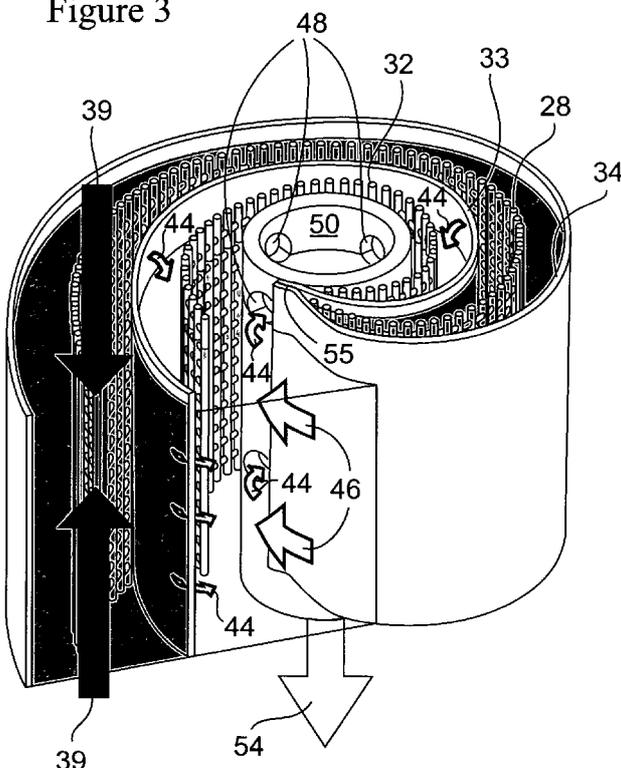

(57) **Abstract:** A filtration apparatus is provided comprising a housing having an inlet (14) and an outlet (16) and a plurality of spirally wound filtration cartridges (18,24). The filtration cartridges include two filter layers, a feed spacer layer and a permeate spacer layer. Seals are provided to prevent admixtures of feed and permeate and to permit recovery of permeate in a dead-end filtration mode.

WO 2009/099421 A1

ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, **Published:**
MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI - *with international search report (Art. 21(3))*
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG).

MULTI FILTRATION CARTRIDGE FILTRATION APPARATUS

CROSS-REFERENCE RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application No. 61/065,117, filed on February 8, 2008 the entire contents of which are incorporated by reference herein.

BACKGROUND OF THE INVENTION

This invention relates to a filtration apparatus utilizing multiple spiral wound filtration cartridges.

In filtration, it is desirable to maximize filter area while minimizing the volume of the filter construction employed. One common means for attaining this result is to provide a construction formed by spirally winding a multi-layer material having a filter layer to form a tightly wound cylinder into which liquid is introduced at one spiral end and removed from the opposite spiral end. Means must be provided in the filter construction for assuring that all entering liquid passes through the filter medium prior to being removed, that is, the entering liquid must be prevented from simply passing through the spaces between the wound filter material without passing through the filter medium. Such constructions are shown, for example in U.S. Patent 3,962,097.

A problem encountered in spiral wound construction results from the fragile characteristic of some membranes, such as ultrafiltration membranes which tear during filter cartridge construction.

In one process, spiral wound filters are formed of multiple layers of membrane filter and screens wherein a membrane filter layer is folded onto itself to form a V shape and two filter layers. Multiple leaves of membrane/screen stacks are glued in a flat orientation, and then rolled onto a perforated core. Layers are formed of feed and permeate screens. During the rolling operation, to form the spiral wound filter, because the membrane layers are sticky, they tend to wrinkle instead of sliding past each other. As a result, retention integrity is compromised. Flow properties are good, as negligible parasitic losses are measured from flow through the relatively short permeate channel (about 18 inches long).

In a second process, a single long leaf is used to form the spiral device. Glue is applied only in the rolled form. This limits the number of leaves to one, but reduces the stress on the membrane as it is being rolled. In a single layer format, devices made with this technique are shown to be integral. However, because the permeate channel is long (about 40 inches) the parasitic losses, primarily due to high pressure drop, in that channel are unacceptable high.

Accordingly, it would be desirable to provide a filtration apparatus which utilizes spiral wound filter cartridge construction to minimize permeate flow losses while providing satisfactory permeate production capacity.

SUMMARY OF THE INVENTION

The present invention provides a filtration apparatus having a housing with an inlet and an outlet and a plurality of filtration cartridges positioned within the housing. The filtration cartridges include a plurality of flat layer materials wound about a perforated core. The flat layers include two filter layers which are formed by folding a flat filter sheet into a V shape. Fluid permeable layers are also provided comprising a feed spacer layer and a permeate spacer layer. The filter layers and feed spacer layers are adhered to the perforated core. The permeate spacer layer is sealed to accept permeate passed through the filter layers and to direct permeate into the perforated core. The feed spacer layer is sealed to accept fluid feed and to direct feed through the filter layers. The filtration cartridges are sealed to prevent admixture of feed and permeate.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of the filtration apparatus of this invention.

Figure 2 is a cross sectional view of the filtration apparatus of Figure 1 illustrating fluid flow to form permeate.

Figure 3 is an exploded view of a filtration cartridge of this invention.

Figure 4 is a schematic diagram of one method of forming the filtration cartridge of this invention.

Figure 5 is a perspective view of an additional permeate spacer layer which can be utilized in a filtration cartridge of this invention.

Figure 6 is a partial cross sectional view of the filtration cartridge of this invention.

Figure 7 illustrates an adhesive pattern for the feed spacer layer and the permeate spacer layer of this invention.

Figure 8 illustrates an alternative adhesive pattern for a permeate spacer layer of this invention.

DESCRIPTION OF SPECIFIC EMBODIMENTS

Referring to Figure 1, the filtration apparatus 10 of this invention comprises a housing 12 having an inlet 14, an outlet 16 and a plurality of filtration cartridges 18, 20, 22, 24 and 26 and preferably five or six filtration cartridges.

The fluid flow path within the filtration apparatus will be described with reference to Figures 2, 3, 6 and 7. As shown therein, incoming fluid feed 39 enters housing 12 through inlet 14. The fluid feed enters the filtration cartridges 18, 20, 22, 24 and 26 (Figure 1) at the top surfaces and bottom surfaces thereof and into feed spacer layer 28. By causing the fluid feed to enter the filtration cartridges at their top surfaces and bottom surfaces, undesirable pressure drop along the feed paths is reduced as compared to causing the fluid feed to enter at only the top surfaces or the bottom surfaces. The top surface 30 of permeate spacer layer 32 is sealed by seals 31 from the interior of housing 12. Filtration layers 33 and 34 are positioned between feed spacer layer 28 and permeate spacer layer 32. The bottom surfaces 29 and 35 of both permeate spacer layer 32 and feed spacer layer 28 are sealed with seals 36 and 37 (Figure 7). The feed spacer layer 28 includes side seals 43 and 45. The permeate spacer layer 32 includes side seal 42. The outer surface of each filtration cartridge 18, 20, 22, 24 and 26 is sealed with a fluid impermeable sheet 38 (Figure 2). Incoming fluid feed 39 fills the spaces 40 (Figure 2) between the filtration cartridges 18, 20, 22, 24 and 26 and enters these filtration cartridges through spirally wound feed spacer layer 28 as shown by arrows 43. The feed 39 passes through the filter layer 33 and 34 to form permeate 44. The permeate 44 travels in a spiral path within permeate spacer layer 32 as indicated by arrow 46 and passes through perforations 48 of core 50. The permeate then travels through pathways 52 (Figure 2) and then through outlet 16 as indicated by arrow 54.

The filtration layers can comprise one or more filter layers formed of a V shaped filter sheet. The filter layers can be adhered to each other at the V juncture 55 (Figure 3). It is preferred to utilize two V shaped filter sheets positioned in contact with each other to form the filtration layers 33 and 34.

Referring to Figure 4, the process of forming the spirally wound multilayer filter cartridge of this invention is illustrated. The filtration layers 33 and 34 are formed at the V juncture such as with an adhesive. Filtration layer 33 is unrolled from roller 57 and filtration layer 34 is unrolled from roller 58. Feed spacer layer 28 is unrolled from roller 59 and permeate spacer layer 32 is unrolled from roller 60. The feed spacer layer 28 and the permeate spacer layer 32 are sealed as shown in Figure 7.

The filter layer junction 55 is adhered to core 50. Alternatively, the permeate spacer layer can include a plurality of spaced apart seals 61 and 62 (Figure 8) to promote adhesion to core 50 while promoting permeate flow through perforations 48.

A filtration cartridge of this invention having a single spacer layer provides efficient filtration when its length in the spiral wound direction is less than about 24 inches, preferably about 16 to 20 inches and most preferably about 18 inches.

Referring to Figure 5, a second permeate spacer layer 32b is shown. The permeate spacer layer 32b is positioned adjacent permeate spacer layer 32 and rolled as shown in Figure 4. The result is a thicker permeate spacer layer which promotes permeate flow.

The feed and permeate spacer layers can comprise either a woven or nonwoven material having a high void volume which is permeable to fluid flow in the edgewise direction and at reasonably high rates without the need for high inlet pressures. In addition, the spacer layer should have a thickness sufficiently great to permit substantial fluid flow rates but not so thick as to reduce filter surface area and filter capacity substantially for a given filter volume. It is preferred that the spacer layer be between about 0.020 and 0.030 inches thick. Suitable spacer layers include netting formed by two sets of parallel plastic strands; one set of strands is laid on and adhered to one surface of the other set in an arrangement so that the sets of strands intersect at an angle. Suitable netting is available under the trade name "Vexar" from E.I. DuPont deNemours & Co. The strands have a generally circular cross section. This structure when placed adjacent two flat filter layers has each set of strands in contact with only one adjacent filter layer so that fluid can pass easily into the spacer layer and between the two adjacent filter layers.

The filter layer must be sufficiently pliable to permit winding it around the core without fracturing the filter. While many filter materials are sufficiently pliable for this purpose, some filter materials are too brittle to afford their use and must be modified prior to being incorporated in the multi-layer web. Such filter materials include microporous ultrafiltration and filters formed from cellulose esters such as cellulose acetate and cellulose nitrate and having an average pore size extending into the submicrometer range as small as about 0.025 micrometer, marketed by Millipore Corporation including Celolate® filters, Duralon® filters, Mitex® filters Polyvic® filters, Solvinert® filters and Microweb® filters. To render these filters sufficiently pliable, they may be laminated between two pliable porous materials such as a woven cloth formed from polyester fibers with a net adhesive formed with heat-sealable resin fiber such as polyester, polyethylene or polyamide fibers. However, it is to be understood that the present invention is not limited to the use of ultrafiltration or microporous filter layers but includes the use of any flat filter medium that can be wound in the desired configuration shown.

The type and amount of adhesive employed is such that adhesive will penetrate into the filter layer but not through the filter layer when applied so that sealing on one surface of a filter layer does not result in sealing on the opposite surface. Epoxy or polyurethane-based adhesives are particularly useful for providing the desired sealing.

CLAIMS

What is claimed:

1. A filtration apparatus comprising:
a housing having an inlet and an outlet,
a plurality of filtration cartridges having inlet means and outlet means,
said filtration cartridges comprising a perforated core and a spirally wound multi-layer material having two opposed spiral end surfaces,
said multi-layer material including two flat filter layers formed by folding a filter sheet,
a permeate spacer layer and a feed spacer layer,
a first surface of each filter layer contacting said permeate spacer layer and a second surface of each filter layer contacting said feed spacer layer,
said feed spacer layer being sealed to permit fluid feed to enter said feed spacer layer and to pass through said filter layers, and
said permeate spacer layer being sealed to accept permeate from said filter layer and to direct permeate into said core.
2. The filtration apparatus of Claim 1 having between five and six filter cartridges.
3. The filtration apparatus of Claim 1 wherein the length of the permeate spacer layer in a spirally wound direction is less than about 24 inches.
4. The filtration apparatus of Claim 1 wherein the length of the permeate spacer layer in a spirally wound direction is between about 16 and about 20 inches.
5. The filtration apparatus of Claim 1 wherein the length of the permeate spacer layer in a spirally wound direction is about 18 inches.
6. The filtration apparatus of Claim 1 wherein said flat filter layers are ultrafiltration membranes.
7. The filtration apparatus of Claim 1 wherein said flat filter layers are microporous membranes.

8. The filtration apparatus of Claim 1 wherein the core of each filtration cartridge is connected by a pathway to the outlet of the housing.

9. The filtration apparatus of Claim 1 wherein the fluid feed of the housing inlet enters the filtration cartridges at the top surfaces and bottom surfaces and into feed spacer layer thereof.

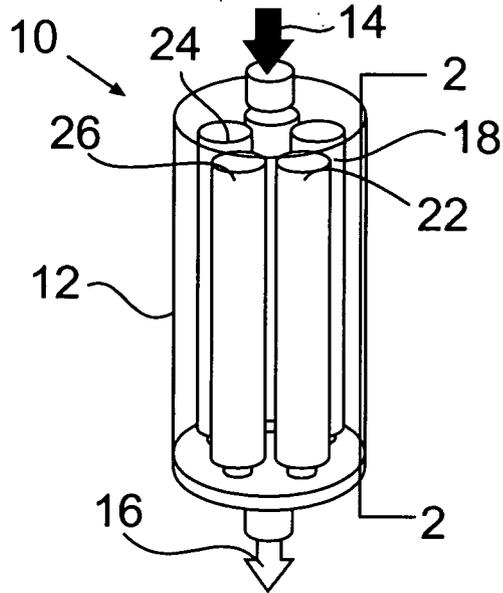


Figure 1

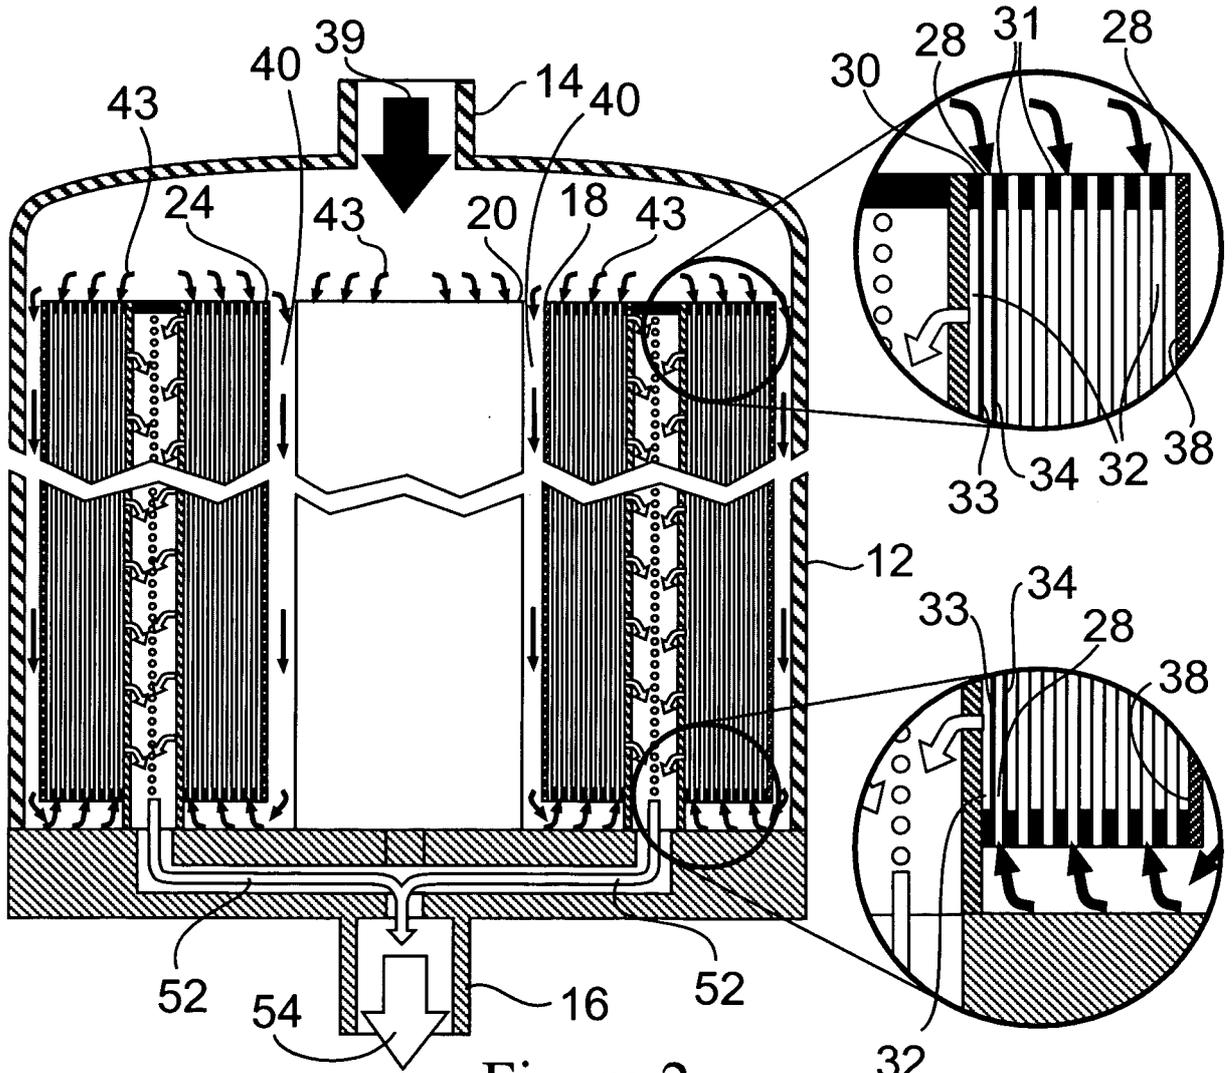


Figure 2
1/4

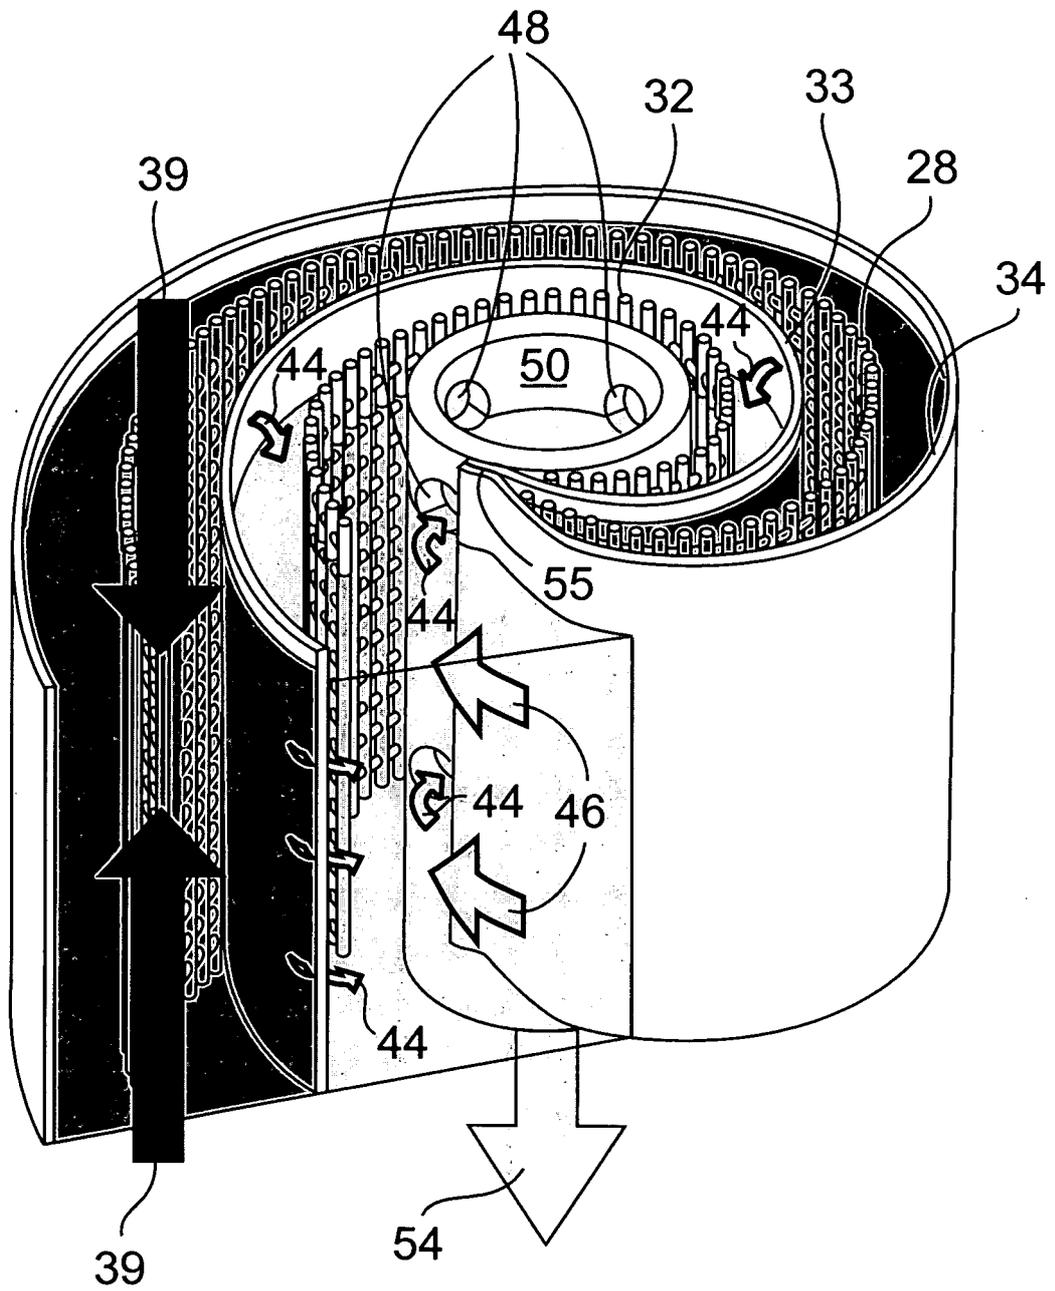


Figure 3

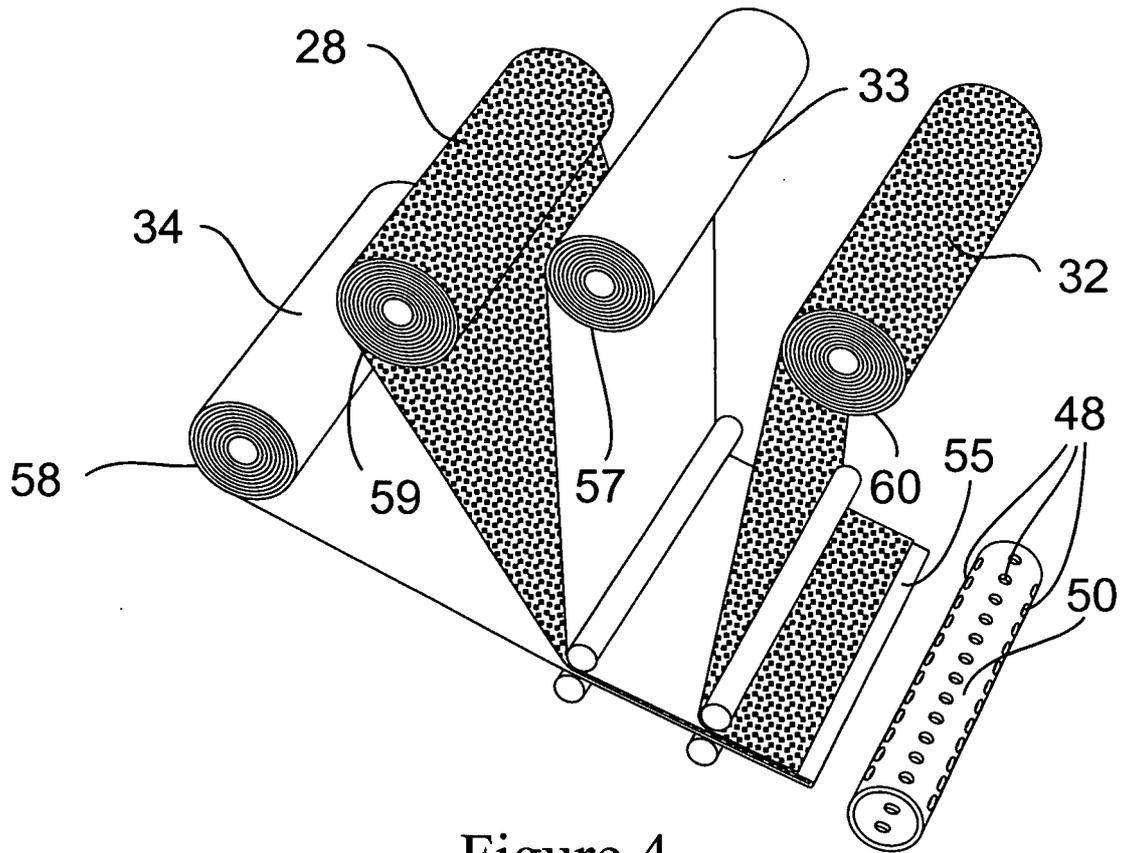


Figure 4




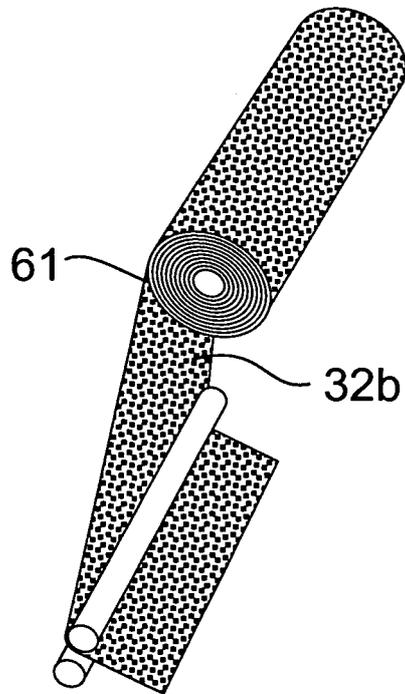


Figure 5

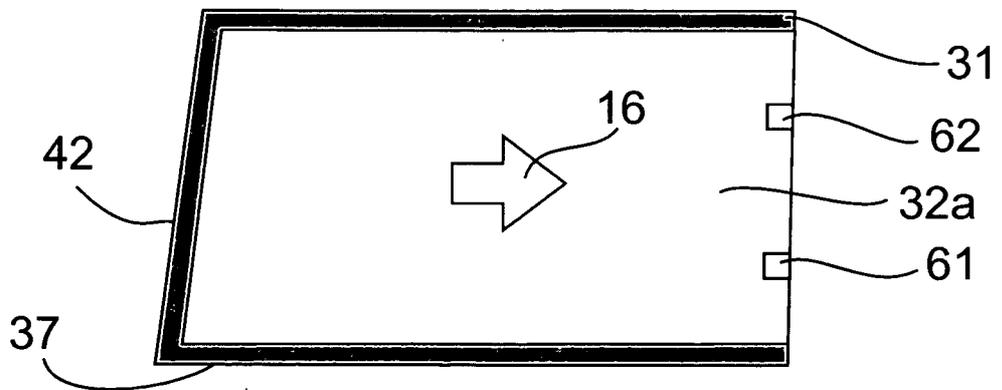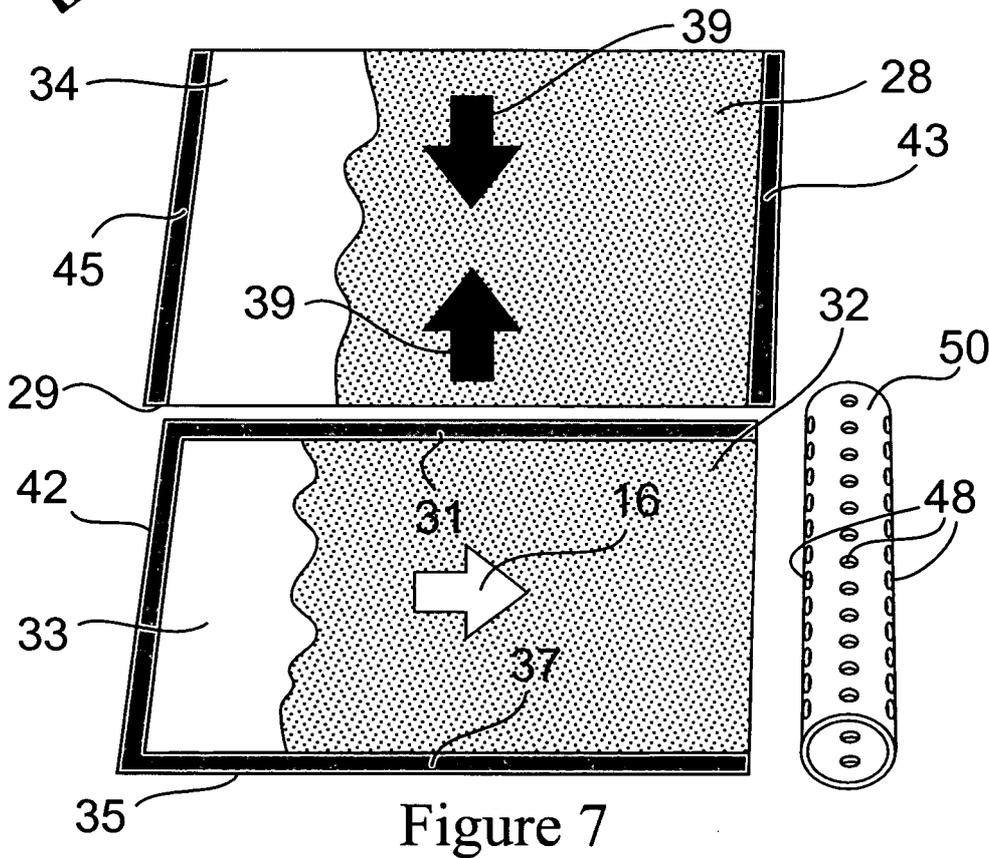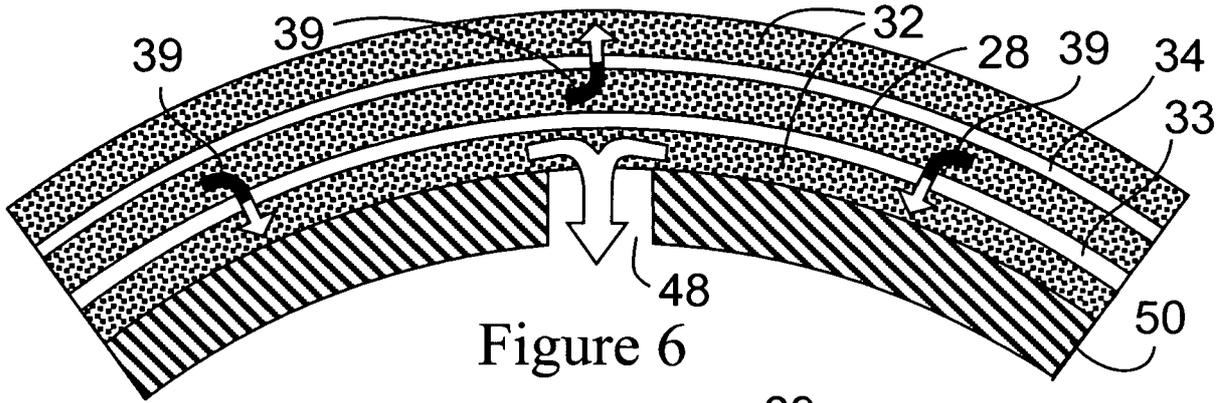

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/012517

A. CLASSIFICATION OF SUBJECT MATTER
INV. B01D63/12 B01D63/10 B01D25/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal , WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
X	US 2008/011157 A1 (WYNN NICHOLAS P [US] ET AL) 17 January 2008 (2008-01-17)	1,8
Y	figures 1-3,5	9
X	US 5 238 563 A (SMITH JR DEAN L [US] ET AL) 24 August 1993 (1993-08-24)	1,6-8
Y	column 5, line 62 - line 66; figure 1 column 9, line 30 - line 62	3-5
X	US 4 083 780 A (CALL NOEL STUART) 11 April 1978 (1978-04-11)	1,6-8
Y	column 1, line 5 - line 8; figures 1-4	3-5,9
Y	EP 1 022 051 A (NITTO DENKO CORP [JP]) 26 July 2000 (2000-07-26) paragraphs [0015], [0018], [0019], [0097], [0118] - [0121]; figure 4	9
	-/~	

Further documents are listed in the continuation of Box C

See patent family annex

* Special categories of cited documents

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T1" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

15 January 2009

Date of mailing of the international search report

29/01/2009

Name and mailing address of the ISA/
European Patent Office, P B 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040,
Fax (+31-70) 340-3016

Authorized officer

Goers, Bernd

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2008/012517

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	RAUTENBACH R : "Membranverfahren" 1 January 1997 (1997-01-01), 19970101 , XP002510529 page 109 - page 113 -----	3-5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/012517

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008011157	A1	17-01-2008	NONE
<hr/>			
US 5238563	A	24-08-1993	CA 2100647 A1 30-01--1994
			DE 69302246 D1 23-05--1996
			DE 69302246 T2 05-09--1996
			EP 0584949 A1 02-03--1994
			ES 2086193 T3 16-06--1996
			JP 6154558 A 03-06--1994
			MX 9304111 A1 31-03--1994
			SG 64355 A1 27-04--1999
<hr/>			
US 4083780	A	11-04-1978	NONE
<hr/>			
EP 1022051	A	26-07-2000	JP 2000271460 A 03-10-2000
			US 6402956 B1 11-06-2002
<hr/>			