

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/100606 A1

(51) International Patent Classification⁷: **H04R 25/00**

(21) International Application Number:
PCT/DK2003/000307

(22) International Filing Date: 9 May 2003 (09.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **WIDEX A/S** [DK/DK]; Ny Vestergaardsvej 25, DK-3500 Værløse (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LINKENKÆR-HANSEN, Morten** [DK/DK]; Skovgårds Alle 1, DK-3500 Værløse (DK).

(74) Agents: **NIELSEN, Kim, Garsdal** et al.; Internationalt Patent-Bureau A/S, Høje Taastrup Boulevard 23, DK-2630 Taastrup (DK).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A METHOD FOR MANUFACTURING A CARRIER ELEMENT FOR A HEARING AID AND A CARRIER ELEMENT FOR A HEARING AID

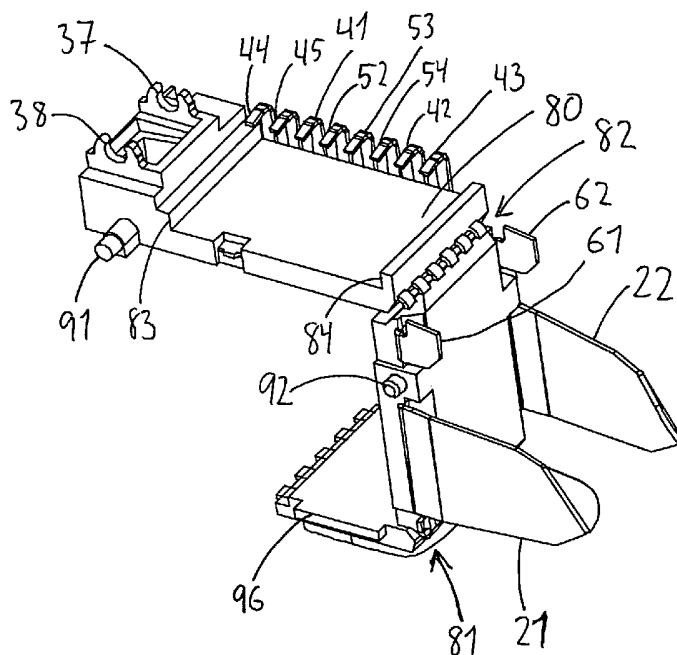

(57) Abstract: A method for manufacturing a carrier element for a hearing aid said method comprising the steps of providing a substantially flat conducting structure, moulding a plastic material around selected areas of said structure leaving at least one gap bridged by said substantially flat conducting structure, and permanently deforming said substantially flat structure by bending it along said at least one gap.

A method for manufacturing a carrier element for a hearing aid and a carrier element for a hearing aid.

The present invention relates to a method for manufacturing a carrier element for a hearing aid and to a carrier element for a hearing aid.

Modern hearing aids have very small dimensions. Hence, the internal space has to be utilized efficiently. Moreover, the small dimensions complicate the use of sub-assemblies, groups of components or similar modular parts. Though modular parts may be made to fit inside the hearing aid housing, they suffer from the drawback that they need to be interconnected electrically, e.g. by soldering, which in turn involves rather delicate manual work.

To overcome these problems it has been suggested to use groups of components mounted on flexible circuit boards. Examples of such flexible circuit boards are found in e.g. US-B-6456720 and US-A-4710961.

Flexible circuit boards, however, leave much to be desired in terms of ruggedness and durability. In particular, the rather harsh humid environment existing in or at the ear where hearing aids are worn, severely affects the flexible circuit giving it a too short life compared to the remainder of the components of the hearing aid.

It is the object of the invention to overcome the above problems in hearing aids in terms of utilization of internal space of the hearing aid and facilitating the manufacturing operations without compromising the durability of the hearing aid.

According to a first aspect of the invention, this object is achieved by a method for manufacturing a carrier element for a hearing aid, said method comprising the steps of providing a substantially flat conducting structure, moulding a plastic material around selected areas of said structure leaving at

least one gap bridged by said substantially flat conducting structure, and permanently deforming said substantially flat structure by bending it along said at least one gap.

5 According to a second aspect of the invention the object is achieved by a carrier element for a hearing aid manufactured using the above method.

 Thereby a rugged carrier element, which better utilizes the internal spacing in the hearing aid, is
10 obtained. Moreover the carrier element allows for reduction in the number of leads and wires, which need to be connected by soldering or similar between various components or groups of components. The carrier element provides a structural member, which serves as
15 a convenient platform during stages of assembly of the hearing aid.

 Where components or groups of components do need to be connected by means of soldered wires, a preferred embodiment, in which moulding of a plastic
20 material around selected areas of said structure leaves further parts of said substantially flat conducting structure protruding from said areas, inter alia facilitates this.

 According to a preferred embodiment said further parts are permanently deformed to form tabs for
25 contacting and holding a battery.

 By forming the battery tabs as an integral part of the carrier element, short distances between the power supply and the power consumers may be achieved,
30 thereby reducing losses and undesirable voltage drops.

 In another preferred embodiment said further parts are permanently deformed to form connection pads. This is advantageous, as, depending on the circumstances, connection pads may be arranged in such a
35 way on the carrier element, that wire connections to other parts, such as the processing chip, mounted on said carrier, are avoided. That is, the external con-

tacts of the chip may be connected directly to the connection pads without intermediate wires.

According to another embodiment of the invention the method further comprises the preceding step
5 of forming said substantially flat structure from a blank by etching. Etching is presently preferred over other methods such as punching or laser cutting, which require a relatively large set-up, e.g. punching tools, that may be too costly for smaller produc-
10 tion batches. For larger production runs punching is preferred.

In a preferred embodiment of the carrier element according to the second aspect of the invention, said further parts are arranged so as to form the
15 fixed contacts of a switch. Preferably, in that case the plastic material around at least one of said selected areas of the structure comprises a fulcrum for a switch operating element.

According to a further preferred embodiment said
20 plastic material around at least one of said selected areas of the structure comprises a plane surface. This plane surface provides suitable accommodation for an electronics module such as a block containing inter alia the processing chip, to be mounted on the
25 carrier by e.g. gluing or soldering. Preferably, at least some connection pads are arranged in the vicinity of the plane surface so as to allow them to contact terminals of an electronics module mounted on said surface. Thereby, contact can be made between
30 the carrier element and the electronics module without the use of additional wiring.

According to yet another preferred embodiment the plastic material around at least one of said selected areas of the structure comprises a surface
35 provided with recesses exposing partially said conducting structure. This allows the access to the conductive structure by means of contacts in the form of pins. Thus temporary electrical connection for e.g.

programming purposes or to auxiliary add-on modules can be made. Preferably, in that case said plastic material around at least one of said selected areas of the structure comprises a surface adapted to form
5 part of the housing of a hearing aid. This then allows direct external access to the hearing aid processor for e.g. programming purposes, when the hearing aid is in an assembled condition.

The invention will now be explained in greater
10 detail with reference to a non-limiting exemplary embodiment illustrated on the schematic drawings. In the drawings,

fig. 1 shows a original blank with the conductive structure of the carrier,

15 fig. 2 shows the blank after parts of conductive structure have been deformed,

fig. 3 shows the finished blank with the conductive structure after moulding, but before severing the conductive structure from the blank from which it
20 has been etched

fig. 4 shows the conductive structure after moulding according to fig. 3, but after severing the conductive structure from the blank from which it has been etched,

25 fig. 5 shows a top plan view of the conductive structure after moulding according to fig. 3,

fig. 6 shows an view of the conductive structure of fig. 5,

fig. 7 shows a side view of the conductive
30 structure according to fig. 5,

fig. 8 shows a cross sectional view taken along the line VIII-VIII in fig. 5,

fig. 9 shows the severed conductive structure of fig. 4 after it has been bent into its final
35 shape,

fig. 10 shows the conductive structure of fig. 9 after a rocker switch and an electronics module have been fitted,

fig. 11 shows the conductive structure of fig. 10 after it has been placed in position in a housing part of a hearing aid side, and

fig. 12 shows the finished hearing aid with the 5 conductive structure in place and a combined battery compartment and switch mounted.

Fig. 1 shows a plane conductive structure 1. The conductive structure comprises two wing-like elements or lobes 21 and 22, which are to serve as battery tabs. The conductive structure 1 furthermore 10 comprises a first, a second and a third bridge 3, 4, 5 serving to hold the various webs or conductors of the conductive structure 1 in a predetermined configuration until they are later secured by the plastic material to be moulded around certain areas of 15 the conductive structure 1, as shown in fig 3. After the plastic material has been moulded around the conductive structure, these bridges 3, 4, 5 may be severed or broken away as illustrated in fig. 4, thus 20 converting the webs into a number of conductors without mutual electrical interconnections.

From the third bridge 5 five conductors 51-55 extend. The two conductors 51 and 55 are connected to the second bridge 4 via the battery tabs 21, 22 and 25 further conductors 31, 41 and 42, respectively, whereas the remaining three conductors 52, 53, 54 extend directly to the second bridge 4.

From the battery tab 21 the conductor 31 branches into the already mentioned conductor 41, 30 leading to the second bridge 4, and into a conductor 32, leading to the first bridge 3. From the first bridge 3 two conductors 44 and 45 lead to the second bridge 4. Around the first bridge 3 the respective conductors 32, 44, 45 have slightly enlarged areas 35 33, 34 and 35, respectively, which, once the first bridge 3 has been severed, form the fixed contacts of a bridging rocker switch, the handle of which is seen

in fig. 10, for the volume control of the hearing aid.

On the conductor 31 a further fixed contact lobe 61 is formed. This fixed contact lobe 61 corresponds to a fixed contact lobe 62 connected to the second bridge 4 via a conductor 43. These fixed contact lobes cooperate with a bridge contact of a programme selector switch, such as a push-button switch 88 mounted in the housing of the hearing aid, as seen in fig. 11.

In fig. 2 the conductors 51-55 have been deformed in such a way that raised portions 51a-55a have been formed. Also, the battery tabs 21, 22 have been deformed slightly at respective bends 23, 24 and 25, 26. This is preferably done together with deformation of the conductors 51-55, but it could also take place after a subsequent moulding stage.

In fig. 3 the conductive structure is shown after this subsequent moulding stage, where plastic material has been moulded around the conductive structure in selected areas. The plastic material around the raised portions of 51a-55a of the conductors 51-55 has an upper surface 70. In the upper surface 70 a number of recesses 71-75 corresponding to respective raised portions 51a-55a of the conductors 51-55 are provided. The conductors are accessible through said recesses 71-75. As best seen in fig. 12, the upper surface 70 will form part of the hearing aid housing, in which it is later to be mounted, and the conductors will thus be externally accessible for programming purposes or for add-on auxiliary modules, such as an FM radio receiver unit, e.g. for places where no loop system is available. Such a module could then be supplied with power from the hearing aid battery via the conductors 51 and 55, whereas the received information would be communicated to the electronics module 85 (illustrated in fig. 10) via one or more of the conductors 52-54.

Reference is again made to fig. 3. For the accommodation of the electronics module 85 a generally flat surface 80 is provided on the plastic material moulded around another area of the
5 conductive structure. The substantially flat surface is delimited at two ends by means of walls 83, 84. These walls serve as base for the positioning of the electronics module 85, when it is placed over the flat surface 80 on the end walls 83 and 84 and se-
10 cured thereto by means of e.g. glue. On the other side of the wall 83 away from the flat surface 80 there is provided an aperture 36 in the plastic material. As best seen in fig. 5, this aperture 36 allows access to the fixed contacts 33, 34, 35. On
15 two sides of the aperture two uprights 37, 38 of a fulcrum are provided. On the fulcrum the rocker carrying the contact bridge of a rocker switch 86 bridging pairs of the fixed contacts 33/34 and 33/35, respectively, is to be located. Via the rocker switch
20 86 selective connections serving as indication for volume up and volume down for the electronics module 85, may be provided on the conductors 44 and 45.

In fig. 4 the conductive structure has been severed from the remainder of the blank. The ends of
25 the conductors 41, 42, 43, 44, 45, 52, 53 and 54 are cut at a distance from the plastic material so that they protrude from it.

In fig. 9 the conductive structure after a subsequent bending step is illustrated. As can be seen
30 the ends of the conductors 41, 42, 43, 44, 45, 52, 53 and 54 are bent over the flat surface 80. The ends thus form connection pads, to which terminals of the electronics module 85 may be directly connected without intermediate flexible leads, as illustrated in
35 fig 10. This could be done by means of soldering or conductive gluing or by any other appropriate means known in the art. As also seen in fig. 9 the conductive structure is bent at the bending zones 81 and 82

in order to configure the conductive structure. The bending zones 81 and 82 being the areas of the conductors, which have been left uncovered between the areas around which the plastic material has been
5 moulded.

In fig. 9 is also seen that the lobes 21, 22 and 61, 62 have been bent. The conductive structure has thus been bent into its final shape to form a carrier element, which will fit in the hearing aid
10 housing as a part thereof.

As mentioned above and as best seen in fig. 11, the upper surface 70 of the plastic material covering one of the areas forms part of the housing of the hearing aid. The housing typically consists of two
15 halves or shells 87a, 87b. In order to facilitate correct positioning of the shells and the part with the surface 70 relatively to each other a number of generally cylindrical projections 91, 92, or guide pins 93, 94, and other projections 95, 96, best seen
20 in the top view of fig. 5 are formed from the plastic material.

In figs. 1, 2, 5, 6 and 7 it is illustrated that the conductive structure is preferably provided as a larger blank. The blank is preferably etched,
25 but may just as well be provided by other means such as punching or laser-cutting. Although the figures illustrate a single blank, the skilled person will appreciate that the blank may be provided as a part of a strip, a band or an array of identical blanks.

30 Figs. 5, 6 and 7 are respective top, end and side views, of blank with the conductive structure after moulding but prior to severing.

Fig. 8 is a cross section taken along the line VIII-VIII in fig. 5. Fig. 8 illustrates how the conductor 53 has a bent portion 53a where it approximates the upper surface 70, so as to be readily accessible at the bottom of the recess 73. The other
35 four conductors 51, 52, 54, 55 have corresponding

bends in order to be readily accessible in their respective recesses 71, 72, 74, 75, as illustrated in fig 2.

As will be understood from the above, figs. 1-4, 9 and 10 illustrate stages in a manufacturing process for a carrier element according to the invention.

Thus in fig. 1 there is provided a substantially flat conducting structure 1. The conducting structure is preferably provided by means of etching from a metal sheet.

From this situation the substantially flat structure 1 is slightly deformed to form the raised portions 51a-55a of the conductors 51-55. Also the lobes 21 and 22 are deformed along the lines 23 to 25.

Then a plastic material is been moulded around selected areas of said structure leaving at least one gap 81, 82 bridged by said substantially flat conducting structure 1, so as to provide the structure illustrated in fig. 3. As also illustrated in fig. 3, the moulding of a plastic material around selected areas of said structure may leave further parts 3, 4, 5, 21, 22, 41-45 and 51-55 of said substantially flat conducting structure protruding from said areas. As can be seen in fig. 5 also the further parts, which are to form the fixed contacts 31-33 of the rocker switch are left protruding from the plastic material.

After the moulding, the conductive structure is severed from the blank, thereby obtaining the situation of fig. 4.

Having finished the moulding and severing processes, the situation in fig. 9 is obtained by permanently deforming said substantially flat structure by bending it along said at least one gap 81, 82. As will be noted, in the illustrated exemplary embodiment also some of the further parts 21, 22 are permanently deformed to form tabs for contacting and hold-

ing a battery, whereas other parts 41-45 and 52-54 are deformed, and connecting bridges 3, 4 and 5 cut away in order to leave connection pads.

The carrier element formed from the conductive structure 1 may be subjected to other finishing processes, e.g. surface treatment for surface protection, and will then be finished as such, and can be fitted with the electronics module 85 and the rocker 86 carrying the contact bridge of the rocker switch to form a finished assembly, as illustrated in fig. 10. The finished assembly carries all the necessary electronics for the hearing aid and needs only to be connected to input and output transducers, as far as the latter are not already located on the electronics module 85. Thereby a substantial reduction in the wiring work is obtained.

The finished assembly may then be fitted with a right shell 87a and a left shell 87b, guided by respective projections 91, 92, 93, 94, 95, and 96, and other parts to generally provide the hearing aid housing as illustrated in figs. 11 and 12. In the assembled hearing aid of fig. 12 is illustrated a battery compartment 89. This battery compartment may pivot about an axis located in a recess 90 in the shell 87a of the hearing aid housing and a corresponding recess (not visible) in inner surface of the shell 87b. This pivoting motion allows the battery located in the battery compartment to perform on/off switching of the hearing aid by engaging or disengaging, respectively, the battery tabs 21 and 22 of the carrier element. The carrier element thus incorporates all the fixed contacts of the various switches of the hearing aid, i.e. on/off switch, programme selector switch and volume up/down switch.

The skilled person will appreciate that further steps may precede, succeed or be interposed between the steps mentioned above without departing from the scope of the claims.

Moreover, the skilled person will appreciate that depending on the configuration of the hearing aid with which the carrier element according to the present invention is to be used, other configurations
5 than the one of the illustrating embodiment can be utilised, without departing from the scope of the claims.

P A T E N T C L A I M S



1. A method for manufacturing a carrier element for a hearing aid said method comprising the steps of
 - a) providing a substantially flat conducting
5 structure,
 - b) moulding a plastic material around selected areas of said structure leaving at least one gap bridged by said substantially flat conducting structure, and
 - 10 c) permanently deforming said substantially flat structure by bending it along said at least one gap.
2. A method according to claim 1, wherein said moulding of a plastic material around selected areas
15 of said structure leaves further parts of said substantially flat conducting structure protruding from said areas.
3. A method according to claim 2, wherein said further parts are permanently deformed to form tabs
20 for contacting and holding a battery.
4. A method according to claim 2, wherein said further parts are permanently deformed to form connection pads.
5. A method according to any one of the preceding
25 ing claims, further comprising the preceding step of forming said substantially flat structure from a blank by etching.
6. A carrier element for a hearing aid manufactured using a method according to any one of the preceding
30 ceding claims.
7. A carrier element according to claim 6, wherein said further parts are arranged so as to form the fixed contacts of a switch.
8. A carrier element according to any one of
35 claims 6 to 7, wherein said plastic material around at least one of said selected areas of the structure comprises a plane surface.

9. A carrier element according to any one of claims 6 to 8, wherein said plastic material around at least one of said selected areas of the structure comprises a surface provided with recesses exposing
5 partially said conducting structure.

10. A carrier element according to any one of claims 6 to 9, wherein said plastic material around at least one of said selected areas of the structure comprises a fulcrum for a switch operating element.

10 11. A carrier element according to any one of claims 6 to 10, wherein said plastic material around at least one of said selected areas of the structure comprises a surface adapted to form part of the housing of a hearing aid.

15 12. A carrier element according to any one of claims 6 to 11, wherein at least some connection pads are arranged in the vicinity of the plane surface so as to allow them to contact terminals of an electronics module mounted on said surface.

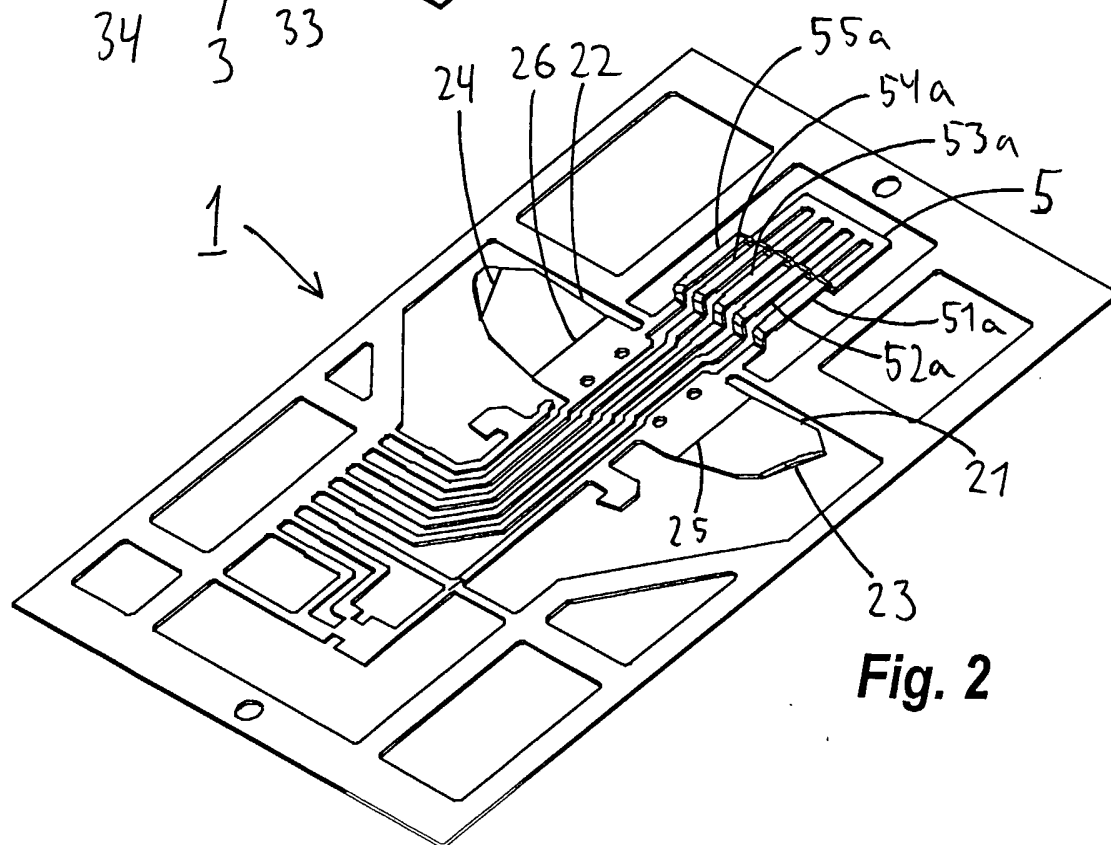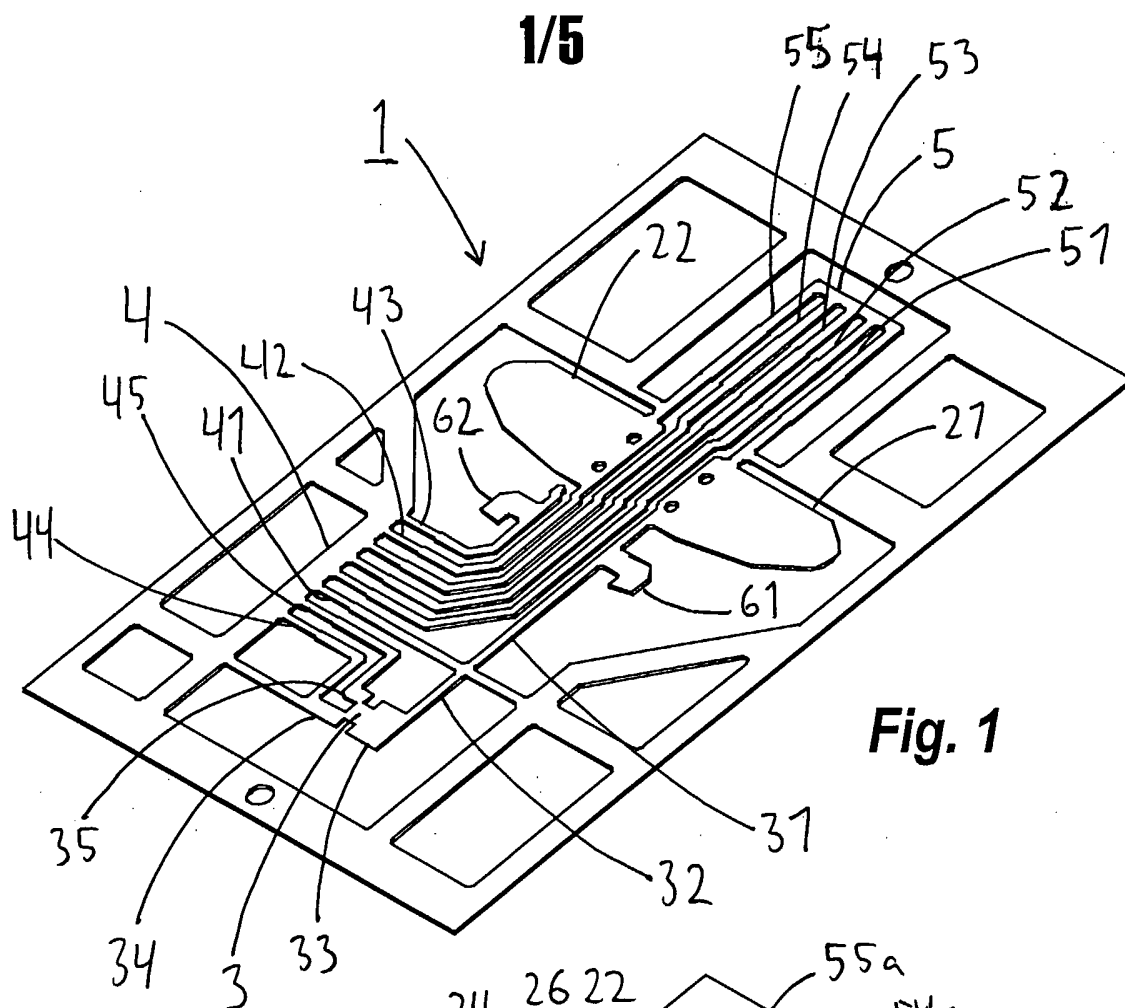

2/5

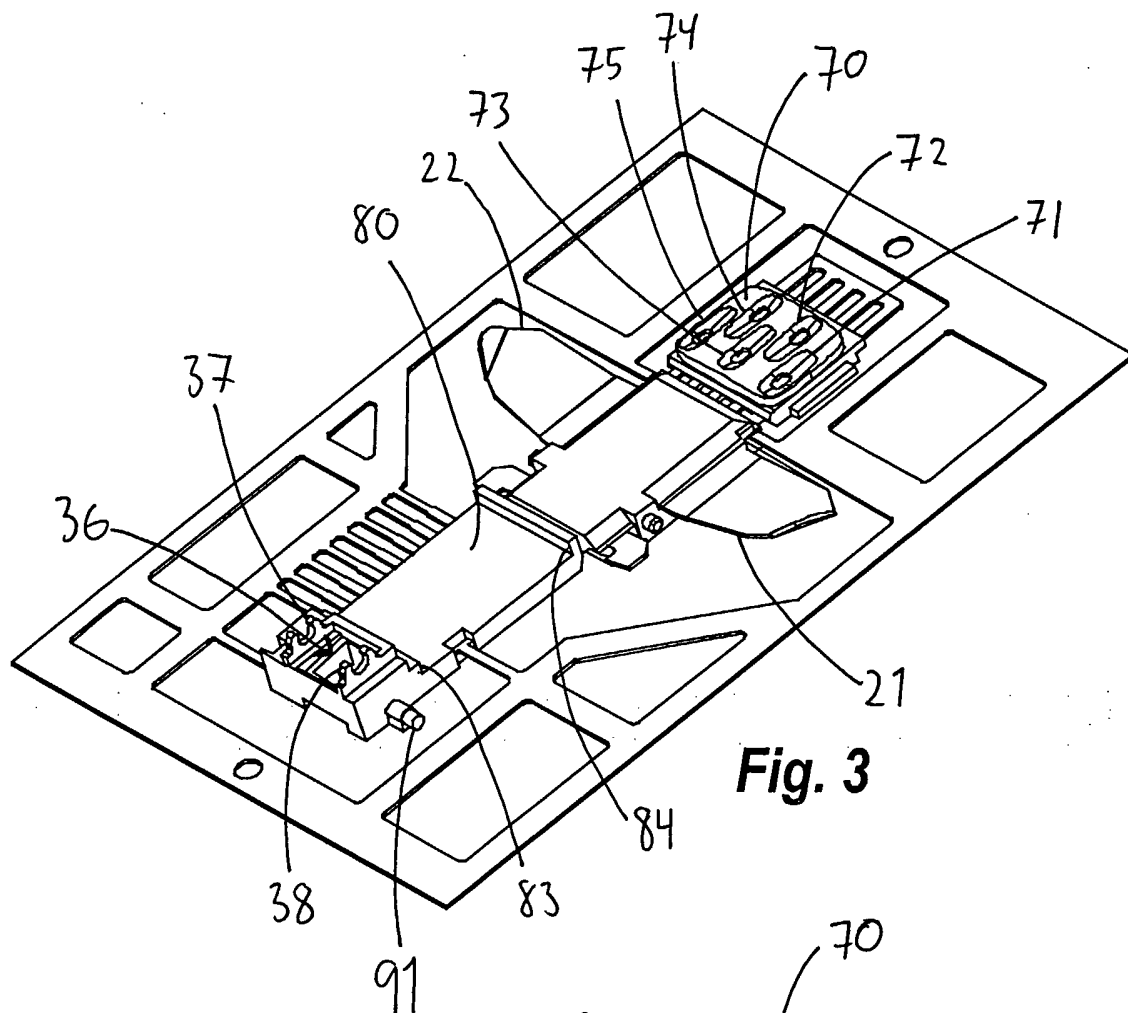


Fig. 3

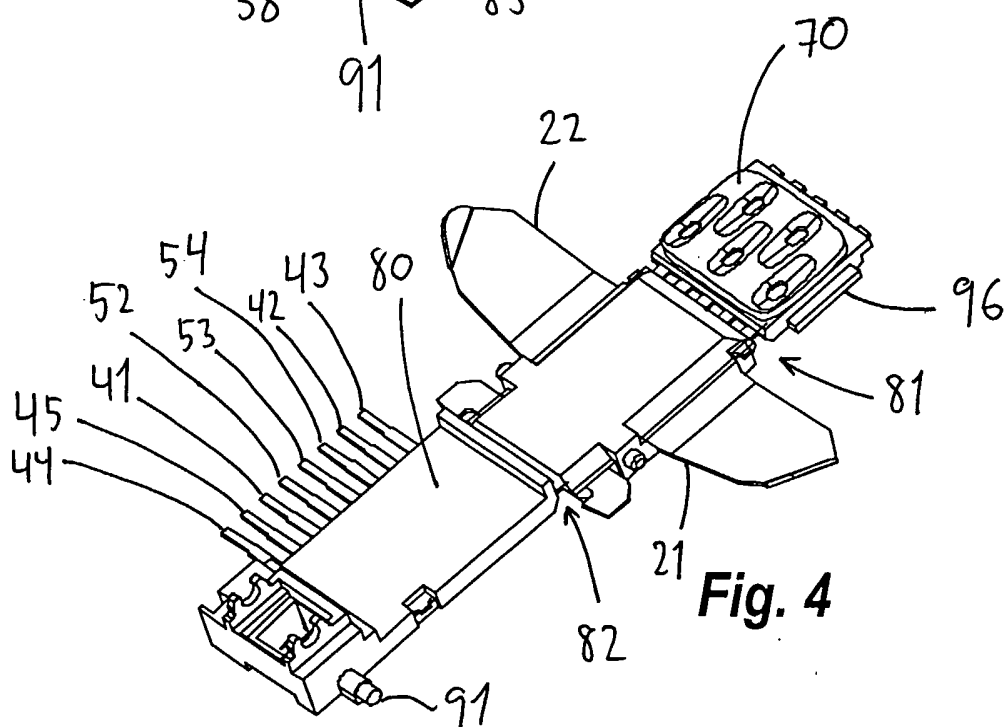


Fig. 4

3/5

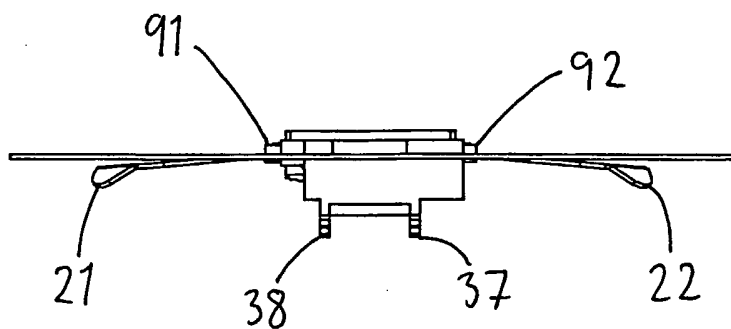


Fig. 6

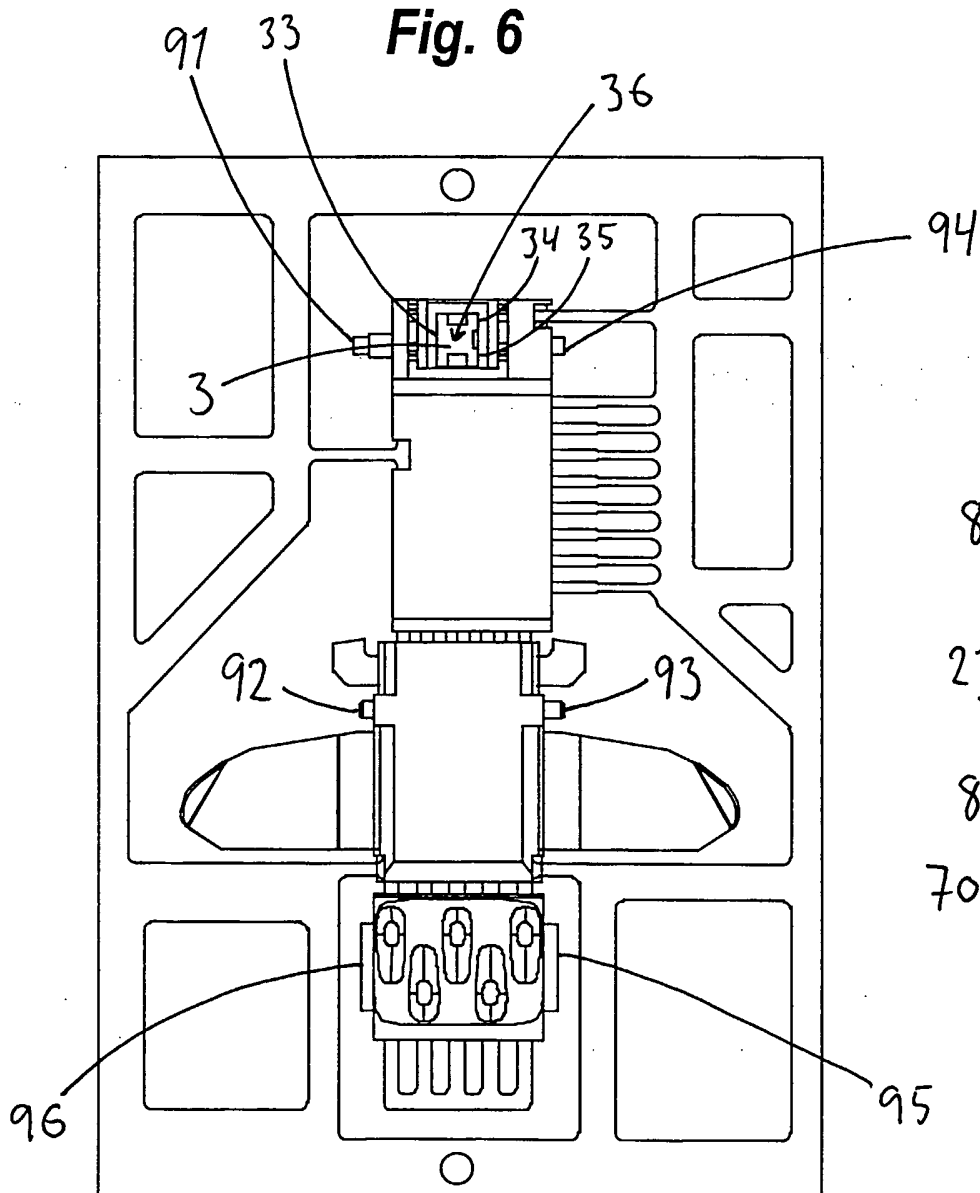


Fig. 5

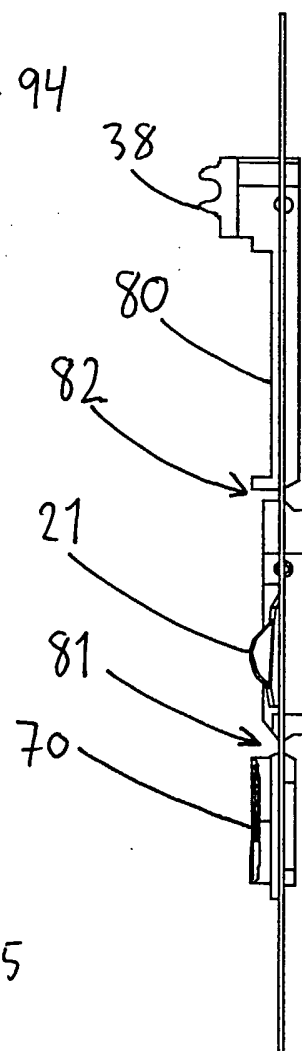


Fig. 7

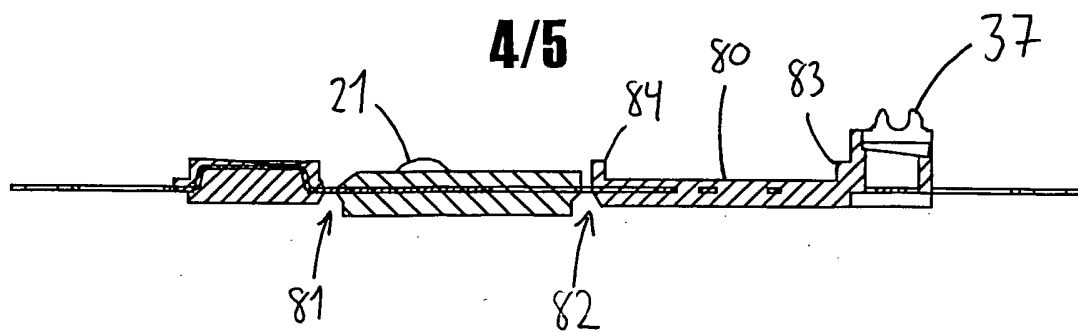


Fig. 8

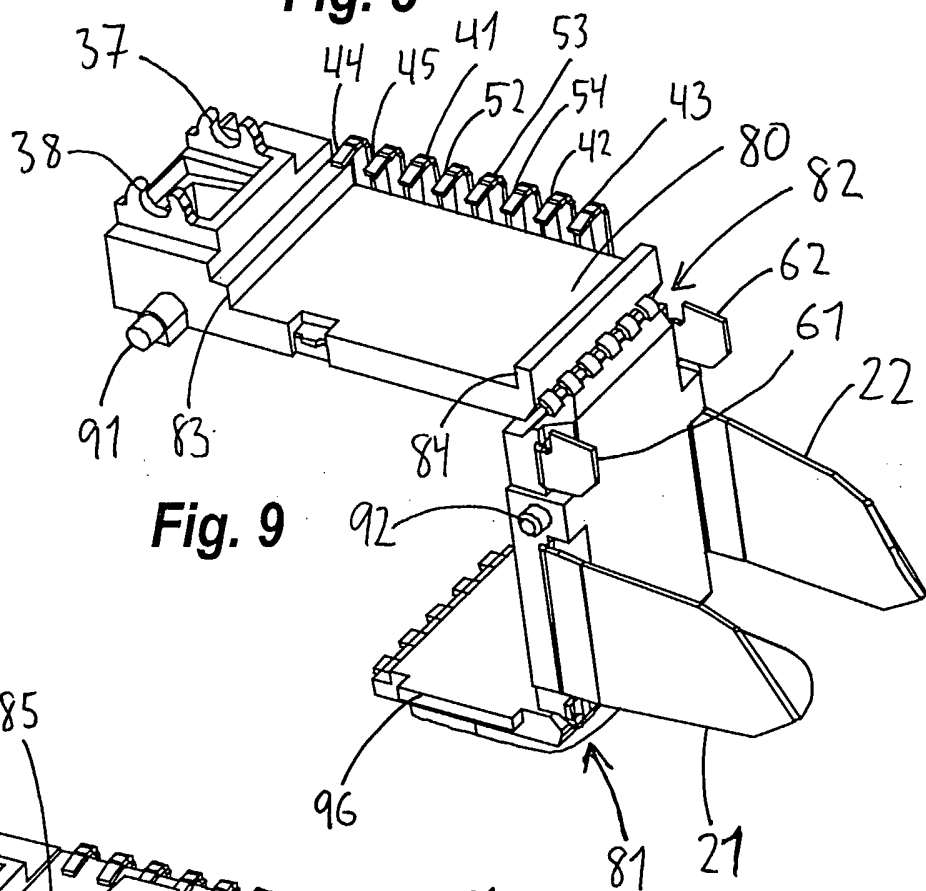


Fig. 9



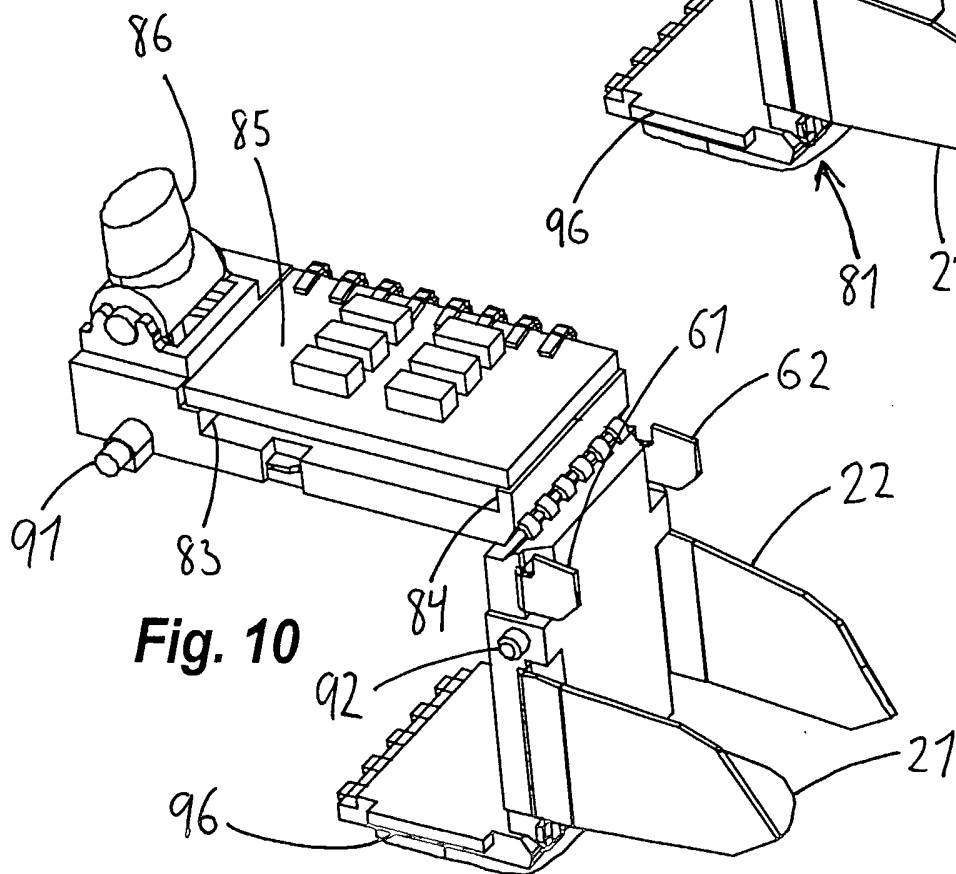


Fig. 10

5/5

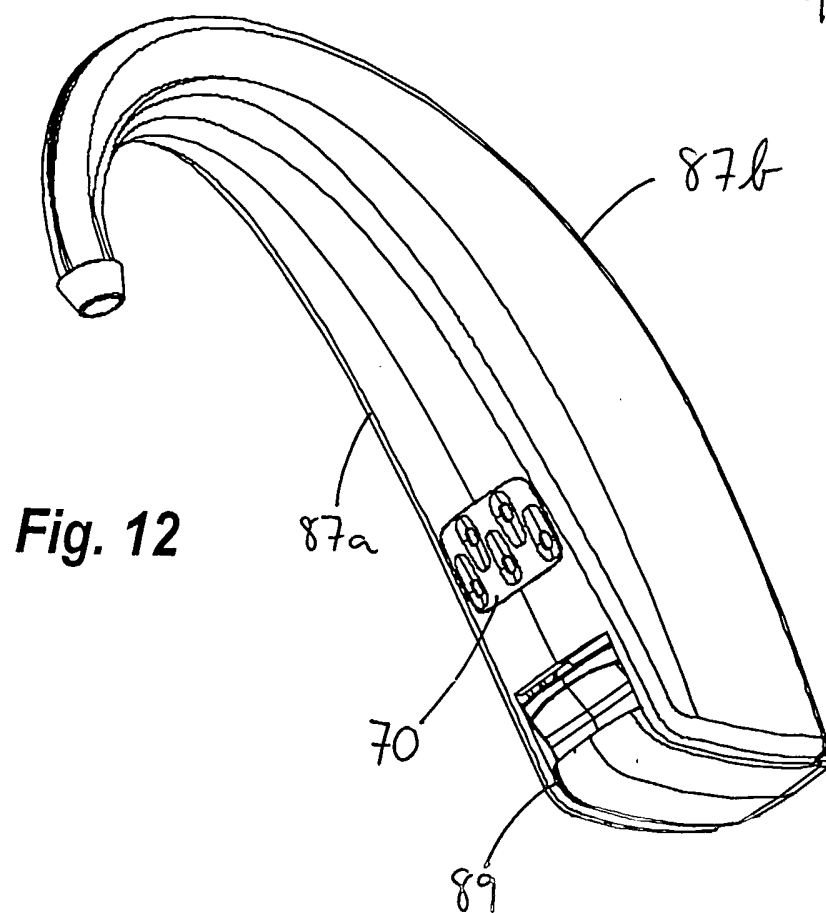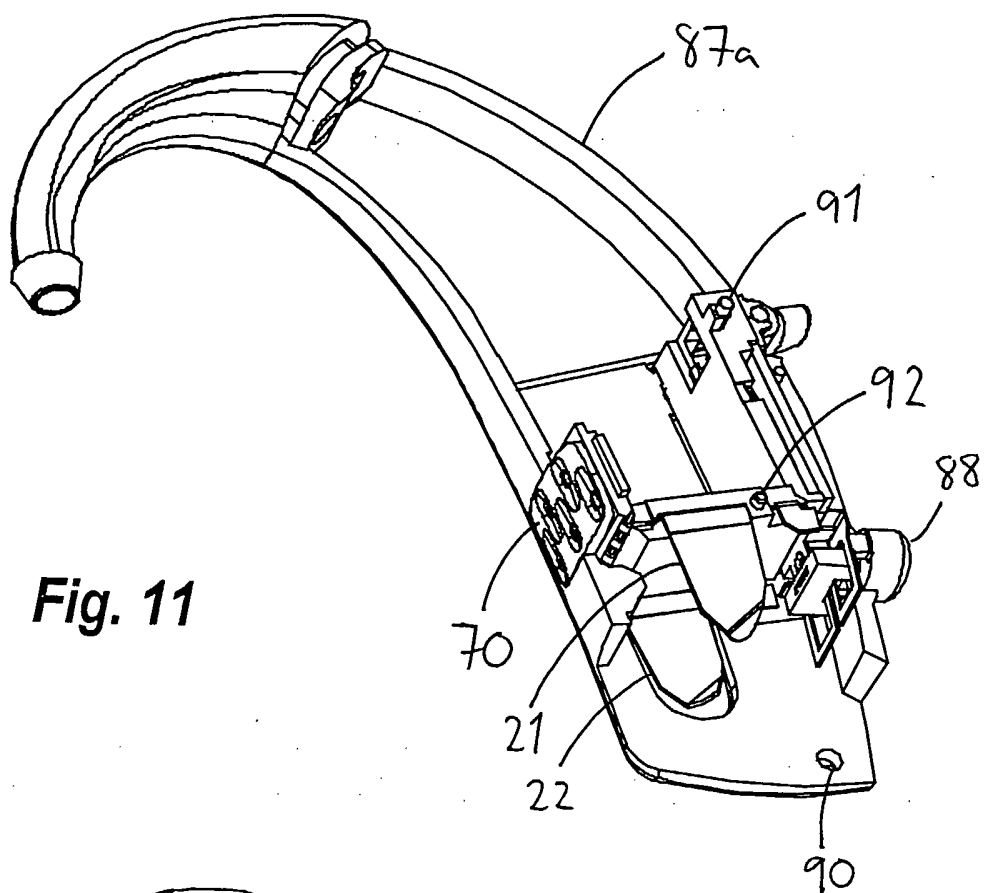

INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00307

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04R25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 912 769 A (ERBE EHRENFRIED) 27 March 1990 (1990-03-27) the whole document	1-12
A	US 4 639 556 A (WAGNER HANS ET AL) 27 January 1987 (1987-01-27) the whole document	1-12
A	US 6 533 062 B1 (HESSEL HANS ET AL) 18 March 2003 (2003-03-18) the whole document	1-12
A	US 6 339 648 B1 (MCINTOSH IAN ET AL) 15 January 2002 (2002-01-15) the whole document	1-12
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

4 November 2003

Date of mailing of the international search report

07.01.2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

HENRIK ANDERSSON/MN

INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 03/00307

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 533 258 A (KONINKL PHILIPS ELECTRONICS NV) 24 March 1993 (1993-03-24) the whole document -----	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 03/00307

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4912769	A	27-03-1990	DE 8708892 U1	27-10-1988
			DE 8708895 U1	27-10-1988
			AT 391047 B	10-08-1990
			AT 98088 A	15-01-1990
			AU 606960 B2	21-02-1991
			AU 1838188 A	05-01-1989
			CA 1296417 C	25-02-1992
			CH 675939 A5	15-11-1990

US 4639556	A	27-01-1987	DE 3336266 A1	18-04-1985
			CA 1240027 A1	02-08-1988
			DE 8328734 U1	13-02-1986
			DK 475284 A	06-04-1985
			EP 0136643 A2	10-04-1985
			ES 281773 U	01-04-1985

US 6533062	B1	18-03-2003	NONE	

US 6339648	B1	15-01-2002	CA 2302962 A1	26-09-2000

EP 0533258	A	24-03-1993	AT 166763 T	15-06-1998
			DE 69225657 D1	02-07-1998
			DE 69225657 T2	07-01-1999
			DK 533258 T3	22-03-1999
			EP 0533258 A2	24-03-1993
			JP 3121687 B2	09-01-2001
			JP 5219596 A	27-08-1993
			US 5440082 A	08-08-1995
