



- (51) International Patent Classification:
A61M 5/142 (2006.01) *F04C 2/00* (2006.01)
G06K 9/18 (2006.01) *G06Q 50/22* (2012.01)
- (21) International Application Number:
PCT/US2012/028799
- (22) International Filing Date:
12 March 2012 (12.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/069,347 22 March 2011 (22.03.2011) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 13/069,347 (CON)
Filed on 22 March 2011 (22.03.2011)
- (71) Applicant (for all designated States except US): **CARE-FUSION 303, INC.** [US/US]; 3750 Torrey View Court, San Diego, CA 92130 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **BORGES, Gregory** [US/US]; 13747 Torrey Glenn Road, San Diego, CA 92117 (US). **GAETANO, Jeffrey, L.** [US/US]; 5070 Frink Avenue, San Diego, CA 92117 (US). **VIK, Daniel** [SE/US]; 926 Genter Street, La Jolla, CA 92037 (US).
- (74) Agents: **GALLENSON, Mavis, S.** et al.; 5670 Wilshire Boulevard, Suite 2100, Los Angeles, CA 90036 (US).

[Continued on next page]

(54) Title: DISPLAYING A BARCODE ON A DISPLAY OF AN INFUSION PUMP

100

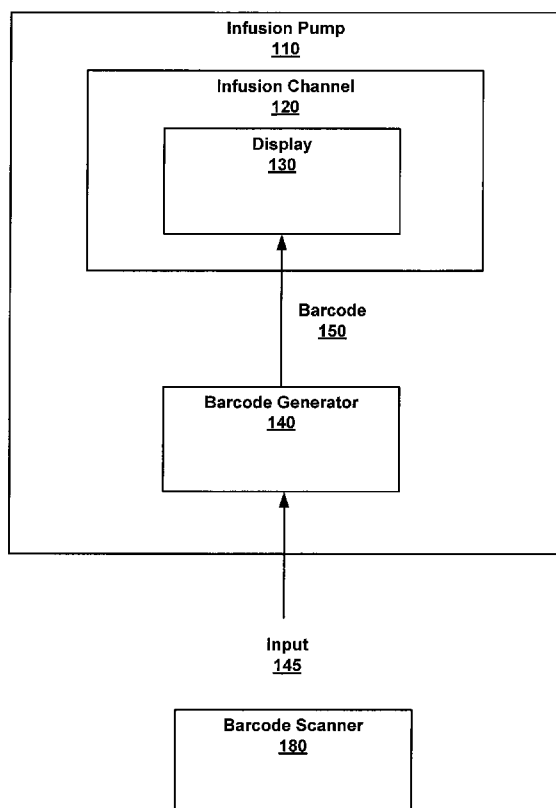


FIG. 1

(57) Abstract: An infusion pump system includes an infusion channel, and a display associated with the infusion channel. The display is for rendering a scannable barcode.





(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

DISPLAYING A BARCODE ON A DISPLAY OF AN INFUSION PUMP

BACKGROUND

[0001] Use of an infusion pump in conjunction with a Bar Code Medical Administration (BCMA) system requires that the infusion pump present a barcode. Typically, this barcode is manually attached or adhered to an infusion channel of an infusion pump. This barcode is scanned to associate a medication order with the infusion channel. The use of this approach has many issues. For example, correlation of the BCMA systems identification information with that of other means (e.g., wireless networking), cleaning of the infusion pump, barcode label loss and subsequent replacement.

[0002] Moreover, the symbology, format and content of the barcode used to identify the pump channel is specific to the BCMA system used. The manufacturer of the infusion pump's barcode is not used, and there is no universal standard for the barcodes compatible with BCMA systems.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] Figs. 1-3 illustrate examples of an infusion pump system, in accordance with embodiments of the present technology.

[0004] Fig. 4 illustrates an example of a method for displaying a barcode on a display of an infusion pump system, in accordance with an embodiment of the present technology.

[0005] The drawings referred to in this description should be understood as not being drawn to scale except if specifically noted.

DESCRIPTION OF EMBODIMENTS

[0006] Reference will now be made in detail to embodiments of the present technology, examples of which are illustrated in the accompanying drawings. While the technology will be described in conjunction with various embodiment(s), it will be understood that they are not intended to limit the present technology to these embodiments. On the contrary, the present technology is intended to cover alternatives, modifications and equivalents, which may be included within the spirit and scope of the various embodiments as defined by the appended claims.

[0007] Furthermore, in the following description of embodiments, numerous specific details are set forth in order to provide a thorough understanding of the present technology. However, the present technology may be practiced without these specific details. In other instances, well known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects of the present embodiments.

[0008] Figure 1 depicts an embodiment of infusion pump system 100. Infusion pump system includes infusion pump 110. Infusion pump 110 includes at least one infusion channel 120 for providing an order of medication to a patient.

[0009] Infusion pump 110 also includes at least one display 130. Display 130 is for rendering a scannable barcode 150 generated by barcode generator 140.

[0010] Additionally, display 130 displays user-readable information. For example, in addition to displaying barcode 150, display 130 also displays information such as, a name of the pump, patient name, drug dosage, etc that are able to be read by a user.

[0011] In one embodiment, display 130 is a transmissive display (e.g., backlit LCD display) with sufficient contrast and resolution such that an image scanner is able to scan barcode 150. In another embodiment, display 130 is a reflective display (e.g., electronic paper).

[0012] Barcode 150 is any optical machine-readable representation of data. For example, a 2-D barcode. In general, barcode 150 uniquely identifies infusion channel 120. For example, barcode 150 is utilized to associate infusion channel 120 to an infusion order.

[0013] In one embodiment, barcode 150 includes a Uniform Resource Locator (URL). When scanned by an appropriate configured mobile device, a browser on the mobile device is able to view the given web page associated with the URL and display its contents. Moreover, this functionality allows a user access to context-sensitive instruction material (e.g., videos, diagrams, etc.) or to information on a particular device alarm or malfunction.

[0014] Barcode 150 can be static information or dynamically changing information, which will be described in detail below.

[0015] Barcode generator 140 receives input 145 to facilitate in generating barcode 150. Input 145 can be, but is not limited to, configuration data, unique device data and system state. Barcode generator 140 assures that each barcode is compatible with the barcoding application (e.g., a BCMA system) in use.

[0016] In one embodiment, barcode generator 140 dynamically generates barcodes for display on display 130. For example, display 130 dynamically displays a first dynamic barcode when infusion pump is at a first state and dynamically displays a second dynamic barcode when infusion pump is at a second state. In another example, display 130 initially displays a barcode indicating a channel identifier, but changes to displaying a barcode indicating infusion status in response to a clinician pressing a button/key on infusion pump 110.

[0017] Unique device data is information particular to infusion pump 110 and/or infusion channel 120. For example, model number, serial number or MAC address, etc.

[0018] System state information allows barcode generator 140 to change the generated barcode that is rendered on the display to dynamically change in real-time according to the current state of infusion pump system 100.

[0019] Configuration data is information associated with the current configuration of infusion pump 110. It specifies what is to be displayed on display 130 for each applicable system state.

[0020] In one embodiment, configuration data indicates how to construct the data to be encoded into barcode 150. For example, data to be encoded may include a fixed field plus a field containing the device serial number. In another example, the barcode data could be a unique identifier generated by a particular rule from the device serial number and/or model number.

[0021] In another embodiment, configuration data includes a specification of the format, symbology and encoding used to create the barcode image from the barcode data. For example, configuration data can be configuration data from a plurality of different BCMA systems. Moreover, the configuration data can be stored on memory on infusion pump 110 or from an external configuration system.

[0022] In a further embodiment, a user specifies a configuration by selecting support for a particular BCMA system or by making lower level, more granular choices. The configuration may be applied through device settings or via a

clinical dataset. Moreover, configurations may be institution wide or vary by care area.

[0023] Input 145 can include dynamic data (e.g., configuration data and/or system state) such as, but not limited to, medication order information, infusion status, drug information, dosage information, volume infused, volume remaining, patient ID, clinician ID, etc.

[0024] Accordingly, infusion pump system 100 can utilize the dynamic data to aid in charting. For example, to facilitate in populating an automated flow sheet or Electronic Medication Administration Record (eMAR). The dynamic information can be used to confirm handling of an automated order that is transmitted back to a medication administration system.

[0025] Barcode scanner 180 is for scanning barcode 150 rendered on display 130. Barcode scanner 180 can be any scanner capable of scanning barcode 150 displayed on display 130.

[0026] In one embodiment, display 130 is integrated into infusion pump 110. For example, display 130 is integrated in the form factor of infusion pump 110. In particular, display 130 is integrated into infusion channel 120.

[0027] In another embodiment, display 130 is a separate component that is attached to a legacy infusion pump or infusion channel. Accordingly, display

130 includes barcode generator 140 or is able to wirelessly receive barcode 150 from barcode generator located in another medical system.

[0028] Display 130 is disposed at a location that the correspondence between the infusion channel and the barcode is obvious to a clinician.

[0029] Figure 2A depicts an embodiment of infusion pump 210A. Infusion pump 210A is similar to infusion pump 110. Accordingly, infusion pump 210A operates in a similar fashion as infusion pump 110.

[0030] However, infusion pump 210A includes infusion channels 220-222 and displays 230-232 correspondingly associated with infusion channels 220-222. It should be appreciated that infusion pump 210A can include any number of infusion channels.

[0031] In one embodiment, infusion channels 220-222 are integrated in infusion pump 210A.

[0032] Barcode generator 140 generates barcodes 250-252 that are correspondingly displayed on displays 230-232.

[0033] Figure 2B depicts an embodiment of infusion pump 210B. Infusion pump 210B is similar to infusion pump 210A. Accordingly, infusion pump 210B operates in a similar fashion as infusion pump 210A.

[0034] However infusion channels 220-222 are modular components that are associated with infusion pump 210B. It should be appreciated that infusion pump 210B can include any number of infusion channels.

[0035] Barcode generators 240-242 are a part of or integrated with infusion channels 220-222, respectively.

[0036] Figure 3 depicts an embodiment of infusion pump 310. Infusion pump 310 is similar to infusion pumps 110, and 210A-B. Accordingly, infusion pump 310 operates in a similar fashion as infusion pumps 110, and 210A-B.

[0037] However, infusion pump 310 includes display 330 associated with infusion channels 320-322. In one embodiment, infusion channels 320-322 are modular infusion channels. It should be appreciated that infusion pump 310 can include any number of infusion channels.

[0038] Barcode generator 140 generates barcodes 350-352 that are associated with infusion channels 320-322, respectively. As such, display 330 is able to display a barcode associated with a selected infusion channel. For example, display 330 renders barcode 350 when infusion channel 320 is selected.

[0039] Display 330 can be integrated within infusion pump 310 or can be a separate from infusion pump 310.

[0040] Figure 4 depicts an embodiment of a method 400 for displaying a barcode on a display of an infusion pump system. In various embodiments, method 400 is carried out by processors and electrical components under the control of computer readable and computer executable instructions. The computer readable and computer executable instructions reside, for example, in a data storage medium such as computer usable volatile and non-volatile memory. However, the computer readable and computer executable instructions may reside in any type of computer readable storage medium. In some embodiments, method 400 is performed at least by infusion pumps 110, 210 and 310, as described in Figures 1-3.

[0041] At 410 of method 400, a barcode is generated. For example, barcode generator 140 generates barcode 150 associated with infusion channel 120.

[0042] In one embodiment, at 412, a barcode is dynamically generated. For example, barcode 150 is dynamically changed in response to a dynamically changing system state.

[0043] In another embodiment, at 414, in response to input information, the barcode is generated, wherein the input information is selected from a group consisting of: configuration data, unique device data and system state. For example, in response to input 145, barcode 150 is generated.

[0044] In a further embodiment, at 416, the barcode is generated at power up (in response to configuration data and unique device data) and displayed until the device is turned off.

[0045] At 420, the barcode is displayed on a display of the infusion pump system, wherein the display is associated with an infusion channel of the infusion pump system.

[0046] In one embodiment, at 422, a plurality of barcodes are displayed on a corresponding plurality of displays, wherein the plurality of displays are associated with a plurality of infusion channels. For example, barcodes 250-252 are correspondingly displayed on displays 230-232. Moreover, displays 230-232 are integrated with infusion channels 230-232.

[0047] In another embodiment, at 424, a barcode of a plurality of barcodes is displayed on the display, wherein the plurality of barcodes are associated with a plurality of infusion channels. For example, barcode 351 is displayed on display 330 when infusion channel 321 is selected by a user. Moreover, barcodes 350-352 are associated with infusion channels 320-322.

[0048] In further embodiments, at 425, the barcodes are displayed on a transmissive display, and at 426, the barcodes are displayed on a reflective display.

[0049] At 430, user-readable information is displayed on the display. For example, a patients name is displayed on display 150.

[0050] At 440, the barcode displayed on the display is scanned. For example, barcode scanner 180 scans barcode 150 that is displayed on display 130.

[0051] Various embodiments of the present technology are thus described. While this technology has been described in particular embodiments, it should be appreciated that the present invention should not be construed as limited by such embodiments, but rather construed according to the following claims.

[0052] All elements, parts and steps described herein are preferably included. It is to be understood that any of these elements, parts and steps may be replaced by other elements, parts and steps or deleted altogether as will be obvious to those skilled in the art.

[0053] Broadly, this writing discloses the following: an infusion pump system includes an infusion channel, and a display associated with the infusion channel. The display is for rendering a scannable barcode.

[0054] CONCEPTS

This writing also discloses the following concepts.

- Concept 1. An infusion pump system comprising:
an infusion channel; and
a display associated with said infusion channel, wherein said display is for rendering a scannable barcode.
- Concept 2. The infusion pump system of Concept 1, further comprising:
a plurality of infusion channels; and
a plurality of displays associated with said corresponding plurality of infusion channels, wherein said plurality of displays are for rendering a plurality of scannable barcodes that correspond to said plurality of infusion channels.
- Concept 3. The infusion pump system of Concept 1, wherein said display is associated with a plurality of infusion channels.
- Concept 4. The infusion pump system of Concept 1, wherein said display is integrated with said pump.
- Concept 5. The infusion pump system of Concept 1, wherein said display is a transmissive display.
- Concept 6. The infusion pump system of Concept 1, wherein said display is a reflective display.
- Concept 7. The infusion pump system of Concept 1, further comprising:
a barcode generator for generating said scannable barcode based on input information.
- Concept 8. The infusion pump system of Concept 7, further comprising:

input information for input to said barcode generator, wherein said input information is selected from a group consisting of: configuration data, unique device data and system state.

Concept 9. The infusion pump system of Concept 7, further comprising:
input information for input to said barcode generator, wherein said input information comprises: configuration data and unique device data.

Concept 10. The infusion pump system of Concept 1, wherein said scannable barcode is a dynamically scannable barcode.

Concept 11. The infusion pump system of Concept 1, wherein said display is further configured for rendering user readable information.

Concept 12. The infusion pump system of Concept 1, wherein said barcode comprises:
a Uniform Resource Locator (URL).

Concept 13. A method for displaying a barcode on a display of an infusion pump system, said method comprising:
generating a barcode; and
displaying said barcode on a display of said infusion pump system, wherein said display is associated with an infusion channel of said infusion pump system.

Concept 14. The method of Concept 13, wherein said generating a barcode comprises:
dynamically generating a barcode.

Concept 15. The method of Concept 13, wherein said generating a barcode comprises:

in response to input information, generating said barcode, wherein said input information is selected from a group consisting of: configuration data, unique device data and system state.

Concept 16. The method of Concept 13, wherein said generating a barcode comprises:

in response to input information, generating said barcode, wherein said input information comprises: configuration data and unique device data.

Concept 17. The method of Concept 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying a plurality of barcodes on a corresponding plurality of displays, wherein said plurality of displays are associated with a plurality of infusion channels.

Concept 18. The method of Concept 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying a barcode of a plurality of barcodes on said display, wherein said plurality of barcodes are associated with a plurality of infusion channels.

Concept 19. The method of Concept 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying said barcode on a transmissive display.

Concept 20. The method of Concept 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying said barcode on a reflective display.

Concept 21. The method of Concept 13, wherein said displaying said barcode comprises:

displaying said barcode, wherein said barcode comprises a Uniform Resource Locator (URL).

Concept 22. The method of Concept 13, further comprising:
displaying user-readable information on said display.

Concept 23. The method of Concept 13, further comprising:
scanning said barcode displayed on said display.

Claims:

1. An infusion pump system comprising:
an infusion channel; and
a display associated with said infusion channel, wherein said display is for rendering a scannable barcode.
2. The infusion pump system of Claim 1, further comprising:
a plurality of infusion channels; and
a plurality of displays associated with said corresponding plurality of infusion channels, wherein said plurality of displays are for rendering a plurality of scannable barcodes that correspond to said plurality of infusion channels.
3. The infusion pump system of Claim 1, wherein said display is associated with a plurality of infusion channels.
4. The infusion pump system of Claim 1, wherein said display is integrated with said pump.
5. The infusion pump system of Claim 1, wherein said display is a transmissive display.
6. The infusion pump system of Claim 1, wherein said display is a reflective display.
7. The infusion pump system of Claim 1, further comprising:
a barcode generator for generating said scannable barcode based on input information.
8. The infusion pump system of Claim 7, further comprising:
input information for input to said barcode generator, wherein said input information is selected from a group consisting of: configuration data, unique device data and system state.

9. The infusion pump system of Claim 7, further comprising:
input information for input to said barcode generator, wherein said input information comprises: configuration data and unique device data.
10. The infusion pump system of Claim 1, wherein said scannable barcode is a dynamically scannable barcode.
11. The infusion pump system of Claim 1, wherein said display is further configured for rendering user readable information.
12. The infusion pump system of Claim 1, wherein said barcode comprises:
a Uniform Resource Locator (URL).
13. A method for displaying a barcode on a display of an infusion pump system, said method comprising:
generating a barcode; and
displaying said barcode on a display of said infusion pump system, wherein said display is associated with an infusion channel of said infusion pump system.
14. The method of Claim 13, wherein said generating a barcode comprises:
dynamically generating a barcode.
15. The method of Claim 13, wherein said generating a barcode comprises:
in response to input information, generating said barcode, wherein said input information is selected from a group consisting of: configuration data, unique device data and system state.
16. The method of Claim 13, wherein said generating a barcode comprises:

in response to input information, generating said barcode, wherein said input information comprises: configuration data and unique device data.

17. The method of Claim 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying a plurality of barcodes on a corresponding plurality of displays, wherein said plurality of displays are associated with a plurality of infusion channels.

18. The method of Claim 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying a barcode of a plurality of barcodes on said display, wherein said plurality of barcodes are associated with a plurality of infusion channels.

19. The method of Claim 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying said barcode on a transmissive display.

20. The method of Claim 13, wherein said displaying said barcode on a display of said infusion pump system comprises:

displaying said barcode on a reflective display.

21. The method of Claim 13, wherein said displaying said barcode comprises:


displaying said barcode, wherein said barcode comprises a Uniform Resource Locator (URL).

22. The method of Claim 13, further comprising:

displaying user-readable information on said display.

23. The method of Claim 13, further comprising:

scanning said barcode displayed on said display.

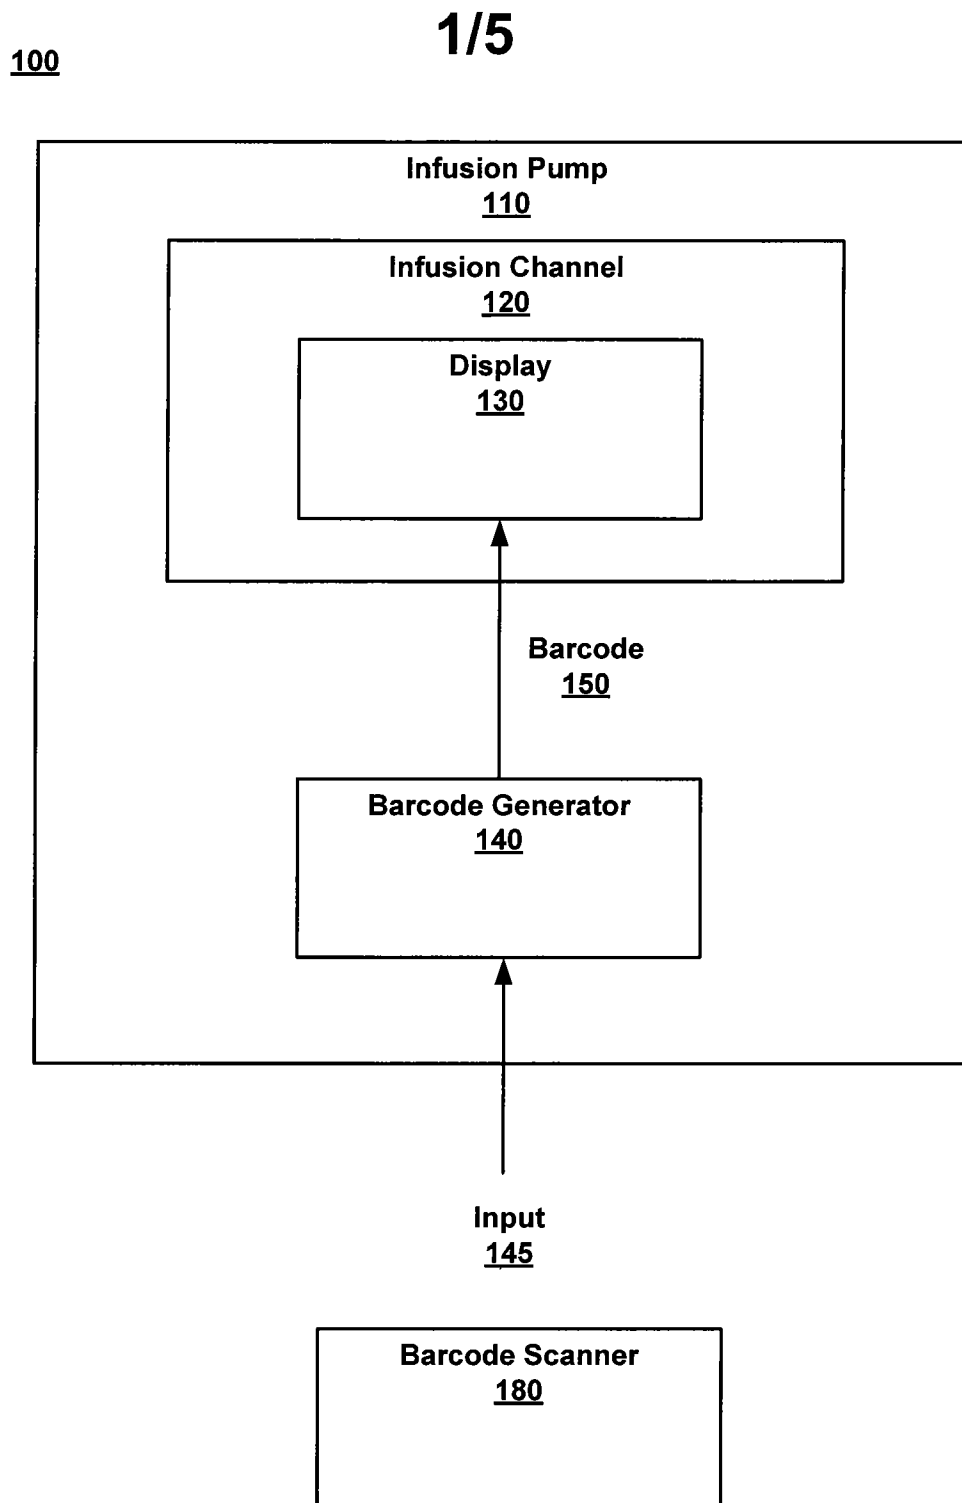**FIG. 1**

2/5

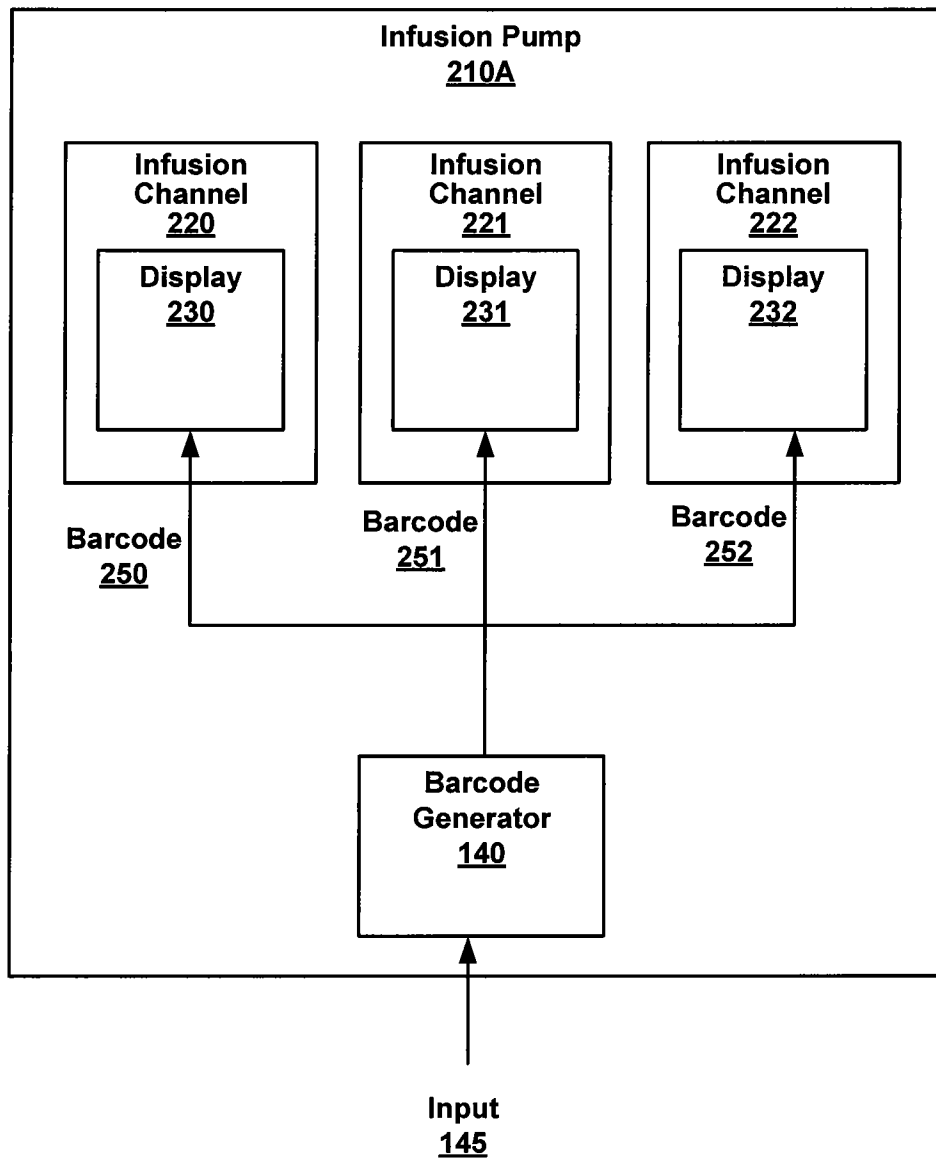


FIG. 2A

3/5

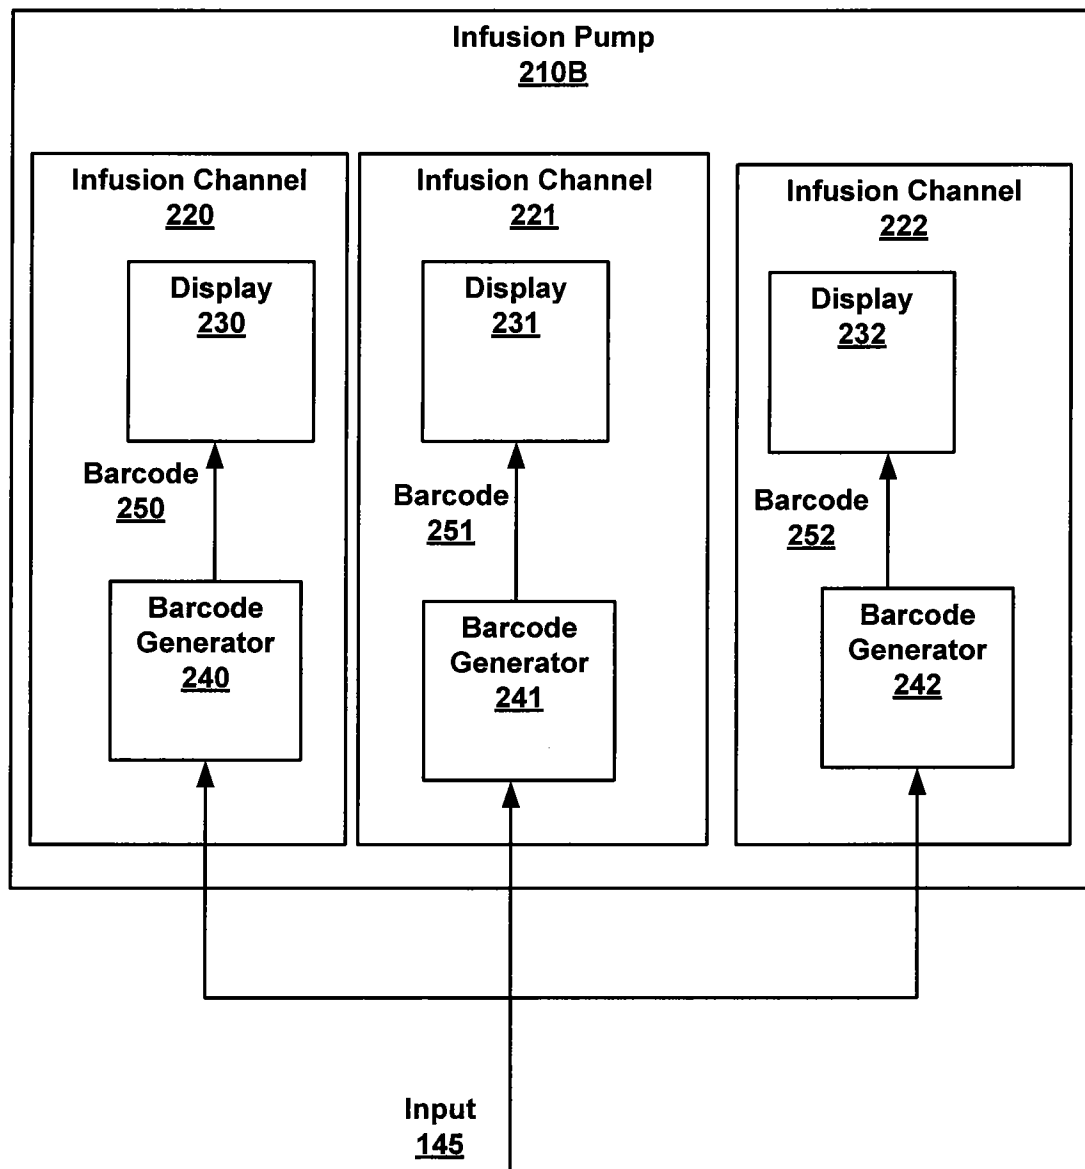


FIG. 2B

4/5

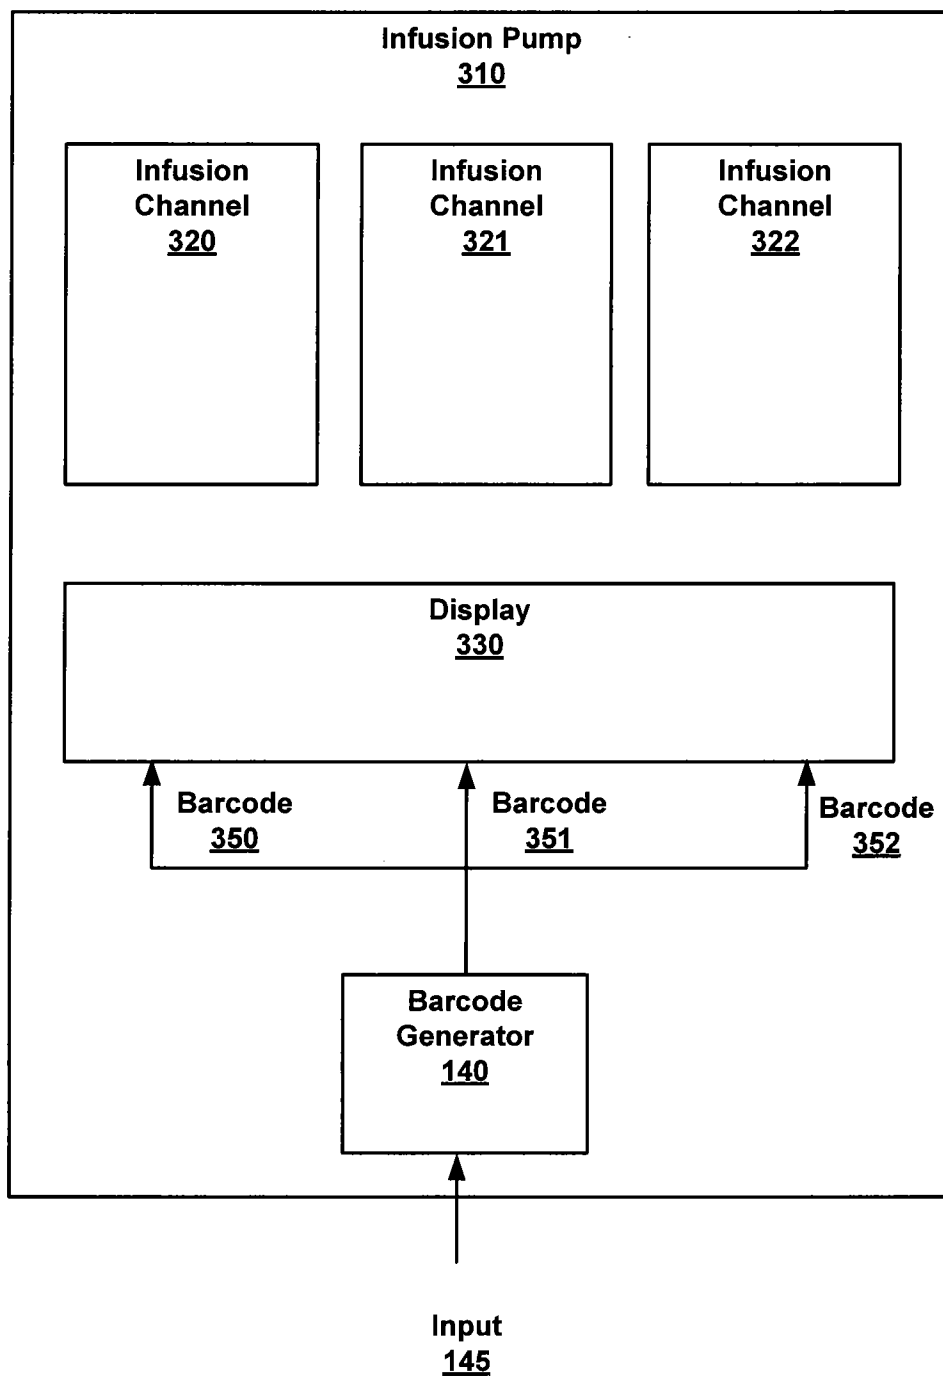
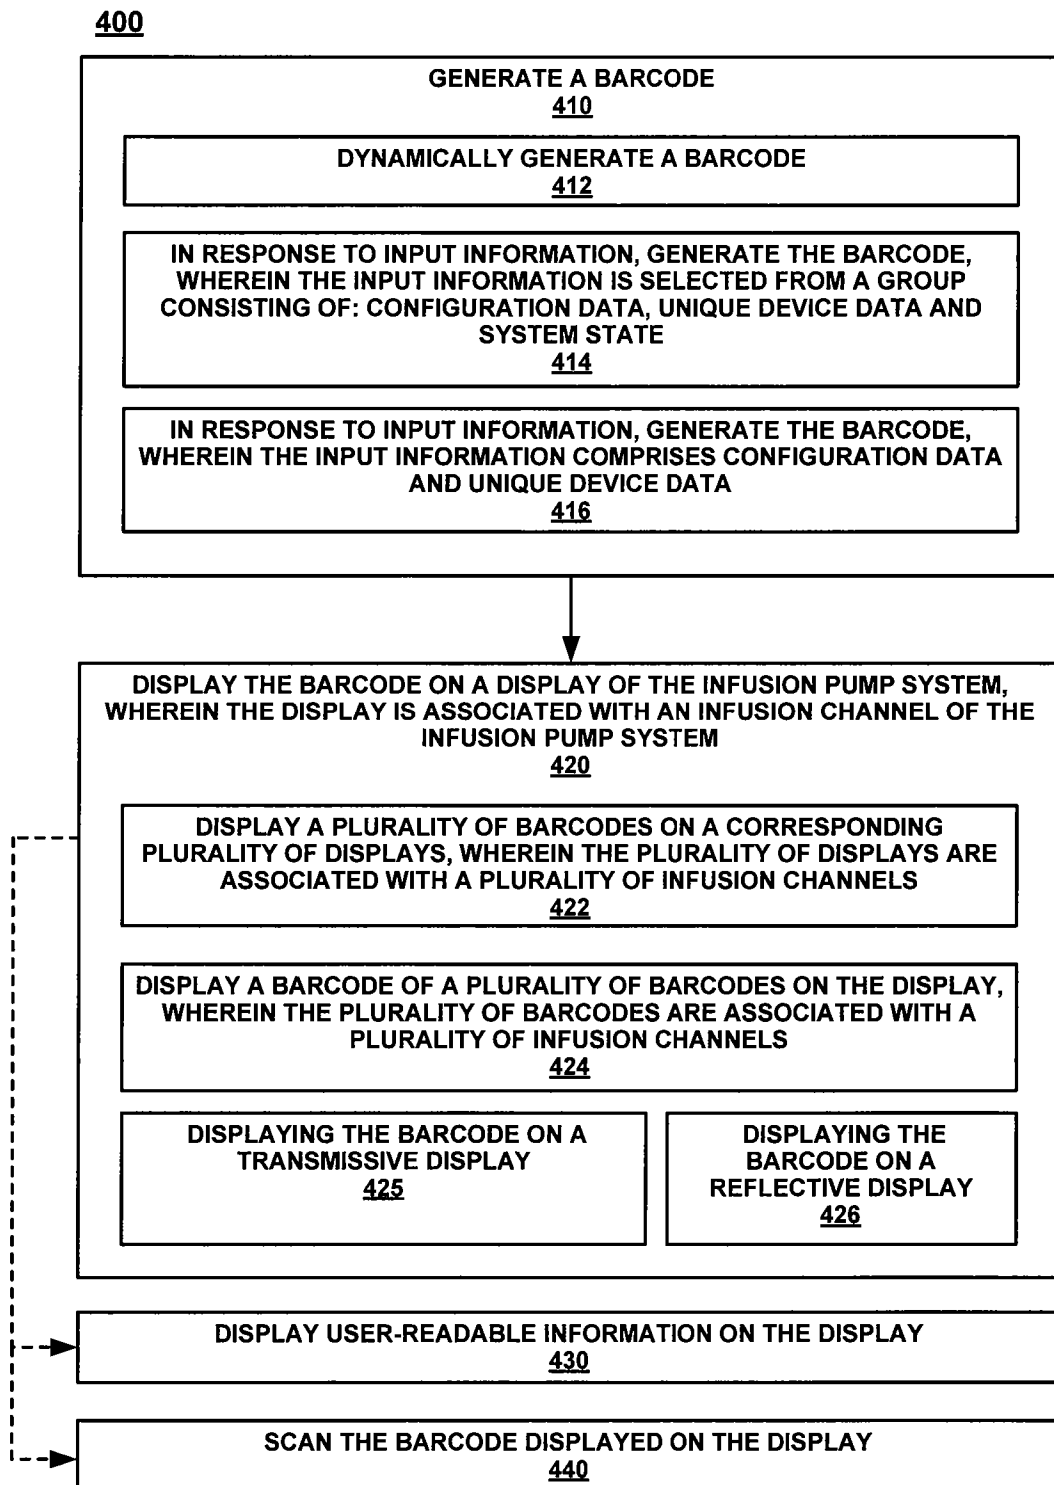


FIG. 3

5/5**FIG. 4**