



(11)

**EP 3 187 067 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**05.07.2017 Bulletin 2017/27**

(51) Int Cl.:  
**A45D 1/00 (2006.01) A45D 2/00 (2006.01)**

(21) Application number: **16165671.5**

(22) Date of filing: **15.04.2016**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**  
Designated Extension States:  
**BA ME**  
Designated Validation States:  
**MA MD**

(71) Applicant: **Conair Corporation**  
**Stamford, CT 06902 (US)**

(72) Inventor: **Leung, Anthony**  
**North Point, Hong Kong (CN)**


(74) Representative: **Cross, James Peter Archibald et  
al**  
**Maucher Jenkins**  
**26 Caxton Street**  
**London SW1H 0RJ (GB)**

(30) Priority: **31.12.2015 US 201514985710**  
**25.02.2016 EP 16157435**

(54) **HAIR STYLING APPARATUS**

(57) A hair styling apparatus (100) adapted to impart a straightening and/or curling effect on hair includes a heating assembly (130), which conveys thermal energy uniformly to all areas of the treatment head such that the desired style is achieved regardless of the skill of the user. The apparatus further includes a hinge assembly

(106) incorporating one or more ceramic bearings units (142a, 142b) which provide smooth consistent resistance for pivoting movement of the treatment members and a more durable hinge joint thereby increasing the life and usability of the apparatus.

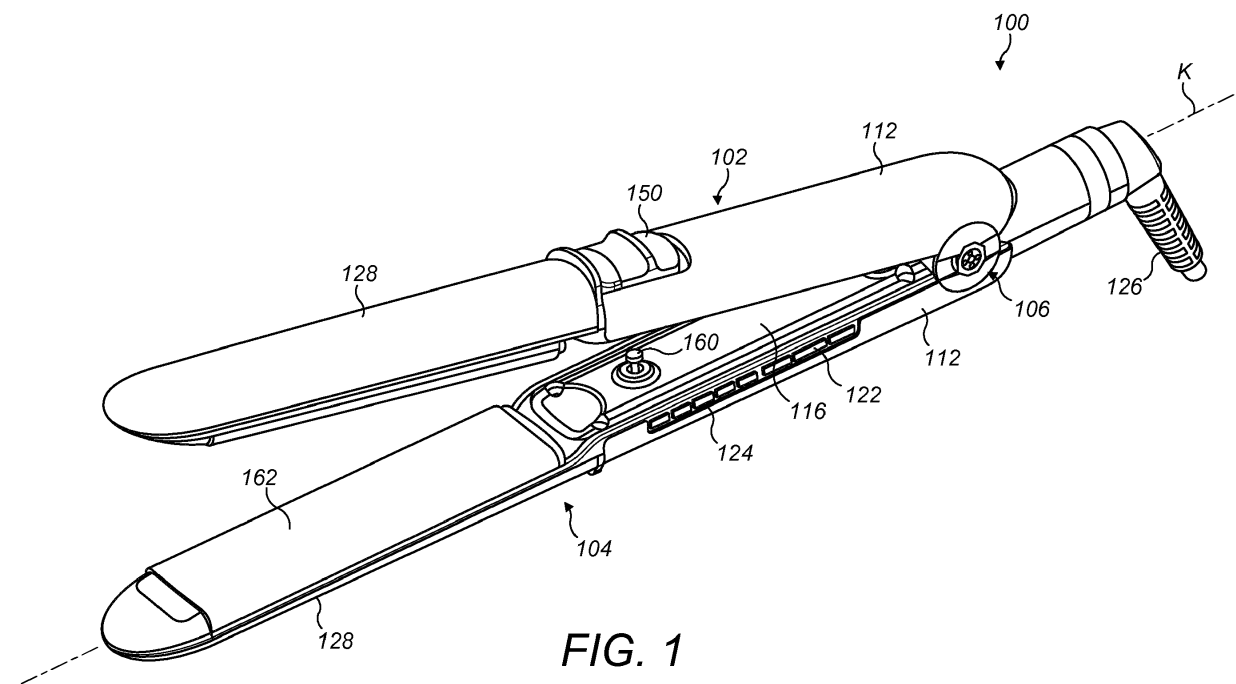

**FIG. 1**

## Description

### BACKGROUND

#### 1. Technical Field

[0001] The present disclosure relates to an apparatus for treating hair, and, in particular, relates to an apparatus adapted to impart both a straightening and curling effect on a subject's hair. The apparatus further relates to an apparatus with a dual ceramic heating assembly and metallic construction, which distributes thermal energy to all areas of the treatment head whereby hair straightening and curling capabilities are enhanced.

#### 2. Background of the Related Art

[0002] Heated hair may be smoothed, manipulated, and styled more easily than non-heated hair. There are numerous hair styling tools and appliances for heated styling of hair including hair straightener and curling irons apparatuses with each having a variety of features. Hair straightener apparatuses typically include two pivotal handles which are hinged at one end and pivot about the hinge between open and closed positions. Heating heads extend from each handle and have inner surfaces comprised of a heatable material, usually metal, for straightening or styling hair. An electric heater element located beneath each heatable surface is activated to warm the surfaces to a desired temperature. The inner surfaces are positionable around hair to be styled, and the hinged handles are moved to a closed position bringing the heated inner surfaces in contact with the hair. The gripped handles are then slid along the hair strands until the hair exits from the heads. One example of a hair straightener apparatus is disclosed in commonly assigned U.S. Patent No. 7,178,532, the entire contents of which are incorporated by reference herein.

[0003] Curling irons are intended to impart a curl, wave or twist pattern to hair being styled by sufficiently heating a barrel or mandrel of the curling iron and restraining the hair in physical contact with the barrel. A section of hair is typically wound around the heated barrel of the curling iron and held in contact with the heated barrel for a period of time. Heat from the heated barrel reforms plastic bonds in the hair. When the heat styled hair is removed from the heated barrel, the hair generally retains the shape of the curling iron's barrel.

[0004] Conventional hair straighteners and curling irons have certain deficiencies which detract from their usefulness in performing multiple styling functions on a subject's head. For example, these apparatuses are ill suited to perform the dual function of hair straightening and hair curling. Reasons for this include insufficient heat distribution to the outer heating heads or mandrels, which may be a result of the construction, materials and/or the arrangement and configurations of the heating assemblies of these apparatuses.

## SUMMARY

[0005] Accordingly, the present disclosure is directed to a hair treatment or styling apparatus adapted to impart both a straightening and/or curling effect on hair. The apparatus includes a novel thermally conductive construction and heating assembly, which conveys thermal energy uniformly to all areas of the treatment head such that the desired style is achieved regardless of the skill of the user. The apparatus further includes a hinge assembly incorporating one or more ceramic bearing units which provide smooth consistent resistance for pivoting movement of the treatment members and a more durable hinge joint thereby increasing the life and usability of the apparatus. The frame components of the styling apparatus are made from a metal, e.g. a stainless steel construction, which provides superior resistance to warping, shrinkage, expansion, etc. when subjected to various thermal energy levels in comparison to conventional models utilizing plastic components and parts.

[0006] In accordance with one embodiment, a hair styling apparatus includes a first member and a second member adapted for relative movement between an open position for receiving hair therebetween and an approximated position. The first and second members each include a handle and a treatment head. The treatment heads each include an inner plate segment to impart a straightening effect on hair and an outer shell segment configured to impart a curling effect on hair. The outer shell segments are formed of a thermally conductive metallic material. A heating assembly is associated with the inner plate segments of the first and second members whereby thermal energy is conveyed from the inner plate segments to the outer shell segments of the treatment heads.

[0007] In embodiments, the thermally conductive metallic material of the outer shell segments includes stainless steel. The handles of the first and second members each may include a handle cover, which is formed of a thermally conductive material. A handle insulator may be disposed between the handles and the treatment heads of the first and second members. The handle insulator includes an insulator material to reduce transfer of thermal energy from the treatment heads to the handles. In certain embodiments, a tip insulator may be disposed adjacent outer ends of each of the treatment heads. The tip insulators may include an insulator material to permit grasping of the outer ends by a user. The insulator material of the handle insulator and the tip insulator may include silicon.

[0008] In some embodiments, a manually manipulative lock switch is mounted to the first member. The manually manipulative lock switch may be movable between an unlocked position permitting movement of the first and second members to an open position and a locked position securing the first and second members in the approximated condition. One of the first and second members may include a lock hood and the other of the first

and second members may include a lock pin. The lock hood is dimensioned to securely engage the lock pin when the lock switch is in the locked position and releases the lock pin when the lock switch is in the unlocked position. In certain embodiments, the lock hood has lock surfaces defining a recess whereby the lock pin is received within the recess and configured to engage the lock surfaces when the lock switch is in the locked position.

[0009] In some embodiments, each heating assembly of the first and second members includes a first ceramic heating plate and at least one ceramic substrate having a heating element mounted thereto. Each heating assembly of the first and second members may further include a second ceramic substrate in superposed relation with the first ceramic substrate and having a heating element mounted thereto. The heating element of each of the first and second ceramic substrates may include a resistive wire. The resistive wire may be printed on each of the first and second ceramic substrates. In some aspects, the resistive wire includes a plurality of longitudinal wire segments extending along a longitudinal axis of the first and second members and arranged in laterally spaced relation.

[0010] In embodiments, a hinge assembly is coupled to the first and second members to enable pivotal movement of the first and second members between the open position and the approximated position. The hinge assembly includes at least one hinge bearing, with the at least one hinge bearing comprising a ceramic material. In some embodiments, the hinge assembly includes first and second sets of hinge bearings mounted to the first member and the second member. Individual hinge bearings of each of the first and second sets comprise a ceramic material and are mounted to respective first and second members in contacting relation.

[0011] In an alternate embodiment, a hair styling apparatus includes first and second members configured to style hair, a hinge assembly coupled to the first and second members to enable pivotal movement between an open position for receiving hair therebetween and an approximated position. The hinge assembly includes at least one hinge bearing formed of a ceramic material and a heating element associated with at least one of the first and second members.

[0012] In embodiments, the hinge assembly includes a first hinge bearing mounted to the first member and a second hinge bearing mounted to the second member. The first and second hinge bearings include a ceramic material and are in contacting relation. The hinge assembly includes a third hinge bearing mounted to the first member and a fourth hinge bearing mounted to the second member. The third and fourth hinge bearings include a ceramic material and are in contacting relation, and are spaced from the first and second hinge bearings.

[0013] Other advantages of the present disclosure will be appreciated from the following description.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Various embodiments of the present disclosure are described hereinbelow with references to the drawings, wherein:

**FIG. 1** is a perspective view of the hair styling apparatus in accordance with the principles of the present disclosure illustrating the first and second treatment members in an open condition;

**FIG. 2** is an exploded perspective view of the hair styling apparatus;

**FIG. 3** is a perspective view with parts separated illustrating the components of the ceramic hinge assembly of the hair styling apparatus;

**FIG. 4** is an axial cross-sectional view illustrating the components of the ceramic hinge assembly mounted within the handle of the hair styling apparatus;

**FIG. 5** is a perspective view with parts separated illustrating the components of an alternate ceramic hinge assembly of the hair styling apparatus;

**FIG. 6** is an axial cross-sectional view illustrating the components of the ceramic hinge assembly of **FIG. 5** mounted within the handle of the hair styling apparatus;

**FIG. 7** is a side elevation view in partial cross-section of the hair styling apparatus illustrating the lock mechanism in an unlocked condition;

**FIG. 8** is an enlarged view of the area of detail depicted in **FIG. 7** illustrating the relationship of the lock switch, the lock pin and the lock hood of the lock mechanism in the unlocked condition;

**FIG. 9** is a view similar to the view of **FIG. 7** illustrating the lock mechanism in a locked condition facilitating use of the hair styling apparatus in a curling function;

**FIG. 10** is an enlarged view of the area of detail depicted in **FIG. 9** illustrating the relationship of the lock switch, the lock pin and the lock hood of the lock mechanism in the locked condition;

**FIG. 11** is a perspective view of the dual ceramic heating assembly mounted within each of the first and second treatment members;

**FIG. 12** is an exploded perspective view of the dual ceramic heating assembly of **FIG. 11**;

**FIG. 13** is a perspective view of an alternate embodiment of the hair styling apparatus; and

**FIG. 14** is a perspective view of another alternate embodiment of the hair styling apparatus.

## DETAILED DESCRIPTION

[0015] Referring now in detail to the drawings and, in particular, to **FIG. 1**, the hair styling apparatus **100** in accordance with the principles of the present disclosure is illustrated. The hair styling apparatus **100** is operable between two modes, including a first hair straightening mode to impart a straightening effect on the hair of the subject and a second hair curling mode to impart a shap-

ing, twisting or curling effect on the subject's hair.

[0016] The hair styling apparatus **100** includes first and second members **102**, **104** connected to each other through a hinge assembly **106**. The segment or section of the first and second members **102**, **104** adjacent the hinge assembly **106** and which is engaged by the user defines the handle segment or "handle" of the apparatus while the segment or section remote from the hinge assembly **106** which styles the hair defines the "treatment head" of the apparatus **100**.

[0017] The hinge assembly **106** typically incorporates a spring (not shown) to normally bias the first and second members **102**, **104** to the open position depicted in FIG. 1. The first and second members **102**, **104** are adapted to pivot about the hinge assembly **106** between open and approximated positions. As discussed hereinabove, the hinge assembly **106** includes one or more ceramic bearings which enhances the pivoting operation of the first and second members **102**, **104** and increases the stability of the hinge joint thereby increasing the life and usability of the apparatus **100**. Further details of the hinge assembly **106** will be discussed hereinbelow.

[0018] With reference to FIG. 2, in conjunction with FIG. 1, the first and second members **102**, **104** include respective first and second housing members **108**, **110** extending along a longitudinal axis "k" (FIG. 1) of the apparatus **100**. Each of the first and second housing members **108**, **110** has an outer handle cover **112** mounted thereto adjacent the hinge assembly **106** and dimensioned for engagement by the user. The outer handle covers **112** may be formed in whole, or in part, of stainless steel. The first and second housing members **108**, **110** further include respective first and second inner handle frames **114**, **116** with the first handle frame **114** incorporating an electrical component **118** such as a rheostat or electrical connector, and the second handle frame **116** having a control or circuit board **120**. The control or circuit board **120** may include a controller/processor for controlling operation of the apparatus **100**. The second housing member **110** may include an a plurality of control buttons **122** in electrical communication with the control board **120** for controlling operation of the apparatus **100**, including temperature control, duration of treatment time, etc., and also include at least one or more indicator lights, e.g., LEDs **124** for providing visual indicia when the power is activated. A power cord **126** extends from the second housing member **110** for connection to a suitable electric outlet. Alternatively, the apparatus **100** may include a rechargeable battery.

[0019] Referring still to FIGS. 1-2, each of the first and second housing members **108**, **110** has an outer shell **128** mounted thereto via conventional means within the treatment head segment of the apparatus **100**. Each outer shell **128** may include a slight arcuate profile. The outer shells **128** may be formed in whole, or in part, of a thermally conductive material such as stainless steel. Similarly, the first and second housing members **108**, **110** may be formed in whole, or in part, of stainless steel.

Each of the first and second housing members **108**, **110** further include a heating assembly **130** mounted within the interior surface of the housing members **108**, **110**. The heating assemblies **130** each include multiple ceramic heating elements/substrates. Further details of the heating assemblies **130** and the significance of the stainless steel construction of the first and second housing members **108**, **110** and the outer shells **128** will be discussed in greater detail hereinbelow.

[0020] Referring now to FIGS. 3-4, in conjunction with FIG. 2, the hinge assembly **106** will be discussed. The hinge assembly **106** includes a hinge pin or axle **132** which extends through openings **134**, **136** of hinge mounts **138**, **140** of the first and second inner handle frames **114**, **116** of the first and second members **102**, **104** respectively. The hinge mount **138** may include a single post or column while the hinge mount **140** may include a pair of spaced posts or columns **140a**, **140b** (FIG. 4). The single post of the hinge mount **138** is disposed or received within the spaced columns **140a**, **140b** of the hinge mount **140** upon coupling of the hinge assembly **106** as best depicted in FIG. 4. The hinge assembly **106** further includes two sets of bearings **142a**, **142b** disposed between the hinge mounts **138**, **140**, i.e., on each side of the hinge mount **138**. The bearings **142a** of each set are mounted or engaged with the hinge mount **138** of the first member **102** and the bearings **142b** are mounted or engaged with the respective columns **140a**, **140b** of the second hinge mount **140** of the second member **104**. The bearings **142a**, **142b** are in contacting relation and provide the surfaces about or along which the first and second members **102**, **104** pivot.

[0021] The bearings **142a**, **142b** are formed of a ceramic material. The use of a ceramic material within the hinge assembly **106** provides very smooth, consistent resistance for relative pivoting movement of the first and second members **102**, **104** thereby providing a much stronger and stable hinge joint as compared to conventional units utilizing plastic or metallic hinge elements. The ceramic material or bearings incorporated within the hinge assembly **106** increases the overall life of the hair styling apparatus **100** by permitting unlimited pivotal action of the first and second members **102**, **104** with minimal wear and tear on the bearings **142a**, **142b**. The hinge assembly **106** further includes hinge covers **144** with associated fasteners and/or nuts **146**, **148** to enclose the hinge assembly **106**.

[0022] FIGS. 5 and 6 illustrate an embodiment where only one set of ceramic bearings **142a**, **142b** may be incorporated within the hinge assembly **106**. Due to the characteristics of the ceramic material, it is envisioned that one set of ceramic bearings **142a**, **142b** may provide sufficient support and smooth resistance to facilitate pivotal movement of the first and second members **102**, **104** while also extending the life of the apparatus **100**.

[0023] Referring to FIGS. 1, 2 and 7-8, the hair styling apparatus **100** further includes a lock mechanism to secure the first and second members **102**, **104** in the ap-

proximated condition when utilizing the apparatus **100** in a curling styling mode. The lock mechanism includes a lock switch **150** at least partially received within an opening **152** (**FIG. 2**) in the handle cover **112** of the first member **102**. The lock switch **150** is secured to a generally U-shaped lock hood **154** through fastener **156**. The lock hood **154** defines an elongated opening **158**. The lock mechanism further includes a lock pin **160** depending outwardly from the second inner handle frame **116** of the second member **104**. The lock pin **160** is received within the elongated opening **158** of the lock hood **154**. In the unlocked position of the lock switch **150** (**FIGS. 7 and 8**) the lock pin **160** is aligned with the opening **158** of the lock hood **154** to permit the lock pin **160** to pass through the opening **158** thereby enabling the first and second members **102, 104** to move to the open position depicted in **FIG. 1**. Upon longitudinal movement of the lock switch **150** and the lock hood **154** to the locked position depicted in **FIGS. 9-10**, the lock pin **160** is misaligned with the opening **158** such that the enlarged pin head **160a** of the lock pin **160** engages the surfaces of the lock hood **154** defining the opening **158** in secured relation therewith. In this position, the first and second members **102, 104** are prevented from undergoing pivotal movement, thereby securing the first and second members **102, 104** in a curling iron mode, i.e., where the first and second members **102, 104** may be utilized to curve hair around the outer shells **128**.

[0024] Referring now to **FIGS. 11-12**, in conjunction with **FIG. 2**, the dual ceramic heating assemblies **130** within the treatment head of the apparatus **100** will be discussed. Each heating assembly **130** includes an inner heating plate **162** and first and second ceramic substrates **164, 166** in superposed relation with respect to the heating plate **162**. The heating plate **162** is substantially planar; however, the heating plate **162** may include an arcuate profile depending on the intended use of the apparatus **100**. The heating plate **162** is comprised of a ceramic material. The first and second ceramic substrates **164, 166** each include at least one wire resistor **168**, printed on, embedded within, or mounted to, each surface of the ceramic substrates **164, 166**. The wire resistor **168** includes a plurality of longitudinally extending and spaced resistor segments **168a** extending along a majority of the length of the respective first and second substrates **164, 166** to encompass substantially the entire surfaces areas of the first and second ceramic substrates **164, 166**. The first ceramic substrate **164** is electrically connected to the power source through first and second lead wires **170** and contacts **172** electrically coupled to the resistor **168**. Similarly, the second ceramic substrate **166** is electrically connected to the power source through third and fourth lead wires **174** and contacts **176**. The third and fourth lead wires **174** extend through openings **178** of the first ceramic substrate **164** to engage the contacts **176**.

[0025] The provision and arrangement of the first and second ceramic substrates **164, 166** with associated wire

resistors **168** maximizes the surface area heated and the thermal energy conveyed to the heating plates **162** (e.g., the ceramic heating plates **162**). Moreover, the relative thin profile of the ceramic substrates **164, 166** facilitates transfer of thermal energy to the heating plates **162** without the energy loss inherent in larger volume conventional steel or aluminum heaters. In addition, as will be discussed hereinbelow, the dual ceramic heating assemblies **130** enhance heat transfer to the stainless steel outer shells **128** of the first and second members **102, 104**, which facilitates use of the apparatus **100** during the curling mode.

[0026] The use of the styling apparatus **100** for imparting a straightening effect on hair will now be discussed. In use, the apparatus **100** is activated, and hair is positioned between the heating plates **162** of the heating assemblies **130** of each of the first and second members **102, 104** when in the open position of **FIG. 1**. The first and second members **102, 104** are moved to the approximated position of **FIG. 7**. In one embodiment, electrical contacts (not shown) associated with the first and second members **102, 104** may engage and activate the heating assemblies **130**. The apparatus **100** is maneuvered to drag the hair between the heating plates **162** to straighten the hair. When it is desired to utilize the apparatus **100** in a curling mode, the lock switch **150** is moved from the unlocked position of **FIGS. 7-8** to the locked position of **FIGS. 9-10** and the apparatus **100** is manipulated to wrap the hair about the outer shells **128** of the first and second members **102, 104**. As discussed in detail hereinabove, the dual ceramic substrate and ceramic heating plate of each heating assembly **130** produces a substantial amount of thermal energy which is conveyed (with minimal heat loss) to the highly conductive (e.g., thermal) stainless steel outer shells **128** of the first and second housing members **108, 110**. It is noted that the first and second housing members **108, 110** are fabricated from stainless steel and also may conduct thermal energy to the outer shells **128**. The outer shells **128**, which are at an appropriate temperature to plasticize and shape hair, are utilized to impart a curling or wave effect to the hair.

[0027] **FIGS. 13-14** illustrate additional or alternate features of the present disclosure. The styling apparatus **100** of **FIG. 13** includes proximal cooling ridges or handle insulators **180** which may be mounted at the end of the handle of the styling apparatus **100**, e.g., between the handle covers **112** and the outer shells **128** of each of the first and second members **102, 104**, or alternatively be mounted about the respective peripheries of either the handle covers **112** or the outer shells **128**. As a further option, the handle insulators **180** may be received within grooves defined within the peripheries of either handle covers **112** or the outer shells **128**. The handle insulators **180** may be fabricated from a heat insulator material such as, e.g., silicon, and may be band-like in configuration extending relative to the periphery of the respective first and second members **102, 104**. The handle insulators **180** each substantially prevent conveyance of thermal

energy from the treatment head of the apparatus **100**, e.g., from the outer shells **128** to the handle covers **112** to protect the user. In **FIG. 14**, the apparatus **100** incorporates a second or tip insulator **182** adjacent each of the ends of the first and second members **102**, **104** remote from the hinge assembly **106**. The tip insulators **182** may be similar in construction and function to the handle insulators **180** and serve to insulate the end of the first and second members **102**, **104**, e.g., disrupt thermal conductivity to the ends. In this manner, the user may grasp or pinch the ends of the first and second members **102**, **104** while holding the handle with the remaining hand during operation of the apparatus **100** to facilitate maneuverability. The tip insulators **182** may be mounted about the outer shells **128** spaced from the extreme ends of the first and second members **102**, **104** and/or may at least partially extend between the inner and outer surfaces of the outer shells **128**, e.g., be received within respective grooves in the outer shells **128**.

**[0028]** The styling apparatus **100** of the present disclosure provides significant benefits over known devices. Firstly, the styling apparatus **100** is readily convertible for use as a hair straightener or a hair curler. The frame components including the first and second housing members **108**, **110**, the handle covers **112**, the first and second inner handle frames **114**, **116** and the outer shells **128** may be entirely formed of stainless steel which significantly improves the life of the apparatus **100** while also providing a more robust device compared to conventional partially plastic units. The dual ceramic heating assemblies **130** provide an effective, efficient and uniform transfer of thermal energy to the internal heating plates **162** during a hair straightening mode of the apparatus **100**, and to the outer stainless steel outer shells **128** during a hair curling mode of the apparatus **100**. The ceramic hinge assembly enhances smooth and unencumbered pivoting movement of the first and second members **102**, **104** and provides a more durable hinge joint further increasing the life and usability of the apparatus.

**[0029]** The above description and the drawings are provided for the purpose of describing embodiments of the present disclosure and are not intended to limit the scope of the disclosure in any way. It will be apparent to those skilled in the art that various modifications and variations can be made without departing from the spirit or scope of the disclosure. Thus, it is intended that the present disclosure cover the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

## Claims

1. A hair styling apparatus (100), comprising:

a first member (102) and a second member (104) adapted for relative movement between an open position for receiving hair therebetween

and an approximated or closed position, said first and second members each including a handle and a treatment head, said treatment heads each including an inner plate segment (162) for imparting a straightening effect on hair and an outer shell segment (128) for imparting a curling effect on hair, said outer shell segments being formed of a thermally conductive metallic material; and

a heating assembly (130) associated with said inner plate segments of said first and second members whereby thermal energy is conveyed from said inner plate segments to said outer shell segments of said treatment heads.

2. The hair styling apparatus according to claim 1, further comprising a manually manipulative lock switch (150) mounted to said first member, said lock switch movable between an unlocked position permitting movement of said first and second members (102, 104) to an open position and a locked position securing said first and second members (102, 104) in said approximated or closed condition.

3. The hair styling apparatus according to any preceding claim, wherein each said heating assembly (130) of said first and second members (102, 104) includes the inner plate segment (162) and at least one ceramic substrate (164) having a heating element (168) mounted thereto.

4. The hair styling apparatus according to claim 3, wherein each said heating assembly (130) of said first and second members (102, 104) includes a second ceramic substrate (166) in superposed relation with said first ceramic substrate (164) and having a heating element (168) mounted thereto.

5. The hair styling apparatus according to claim 4, wherein said heating element (168) of each said first and second ceramic substrates (164, 166) includes a resistive wire (168) printed with respect to each said first and second ceramic substrates (164, 166).

6. The hair styling apparatus according to any preceding claim, wherein said thermally conductive metallic material of said outer shell segments (128) includes stainless steel.

7. The hair styling apparatus according to any preceding claim, wherein said thermally conductive material of said outer shell segments (128) is configured such that the degree or rate of expansion of said outer shell segments (128) when subjected to thermal energy generally corresponds to the degree or rate of expansion of said inner plate segments (162) thereby maintaining positioning of said outer shell segments (128) relative to said inner plate segments

(162).


8. The hair styling apparatus according to any preceding claim, wherein said handles of said first and second members (102, 104) each include a handle cover (112), said handle covers (112) being formed of a thermally conductive material. 5
9. The hair styling apparatus according to any preceding claim, further comprising a handle insulator (180) disposed between said handles and said treatment heads of said first and second members (102, 104), said handle insulator (180) including an insulator material for reducing the transfer of thermal energy from said treatment heads to said handles. 10 15
10. The hair styling apparatus according to claim 9, further comprising a tip insulator (182) disposed adjacent outer ends of each said treatment heads, said tip insulators (182) including an insulator material for permitting grasping of said outer ends by a user. 20
11. The hair styling apparatus according to any preceding claim, including a hinge assembly (106) coupled to said first and second members (102, 104) to enable pivotal movement of said first and second members (102, 104) between said open position and said approximated or closed position, said hinge assembly (106) including a plurality of hinge bearings (142a, 142b). 25 30
12. The hair styling apparatus according to claim 11, wherein said hinge bearings (142a, 142b) comprise ceramic material. 35

40

45

50

55

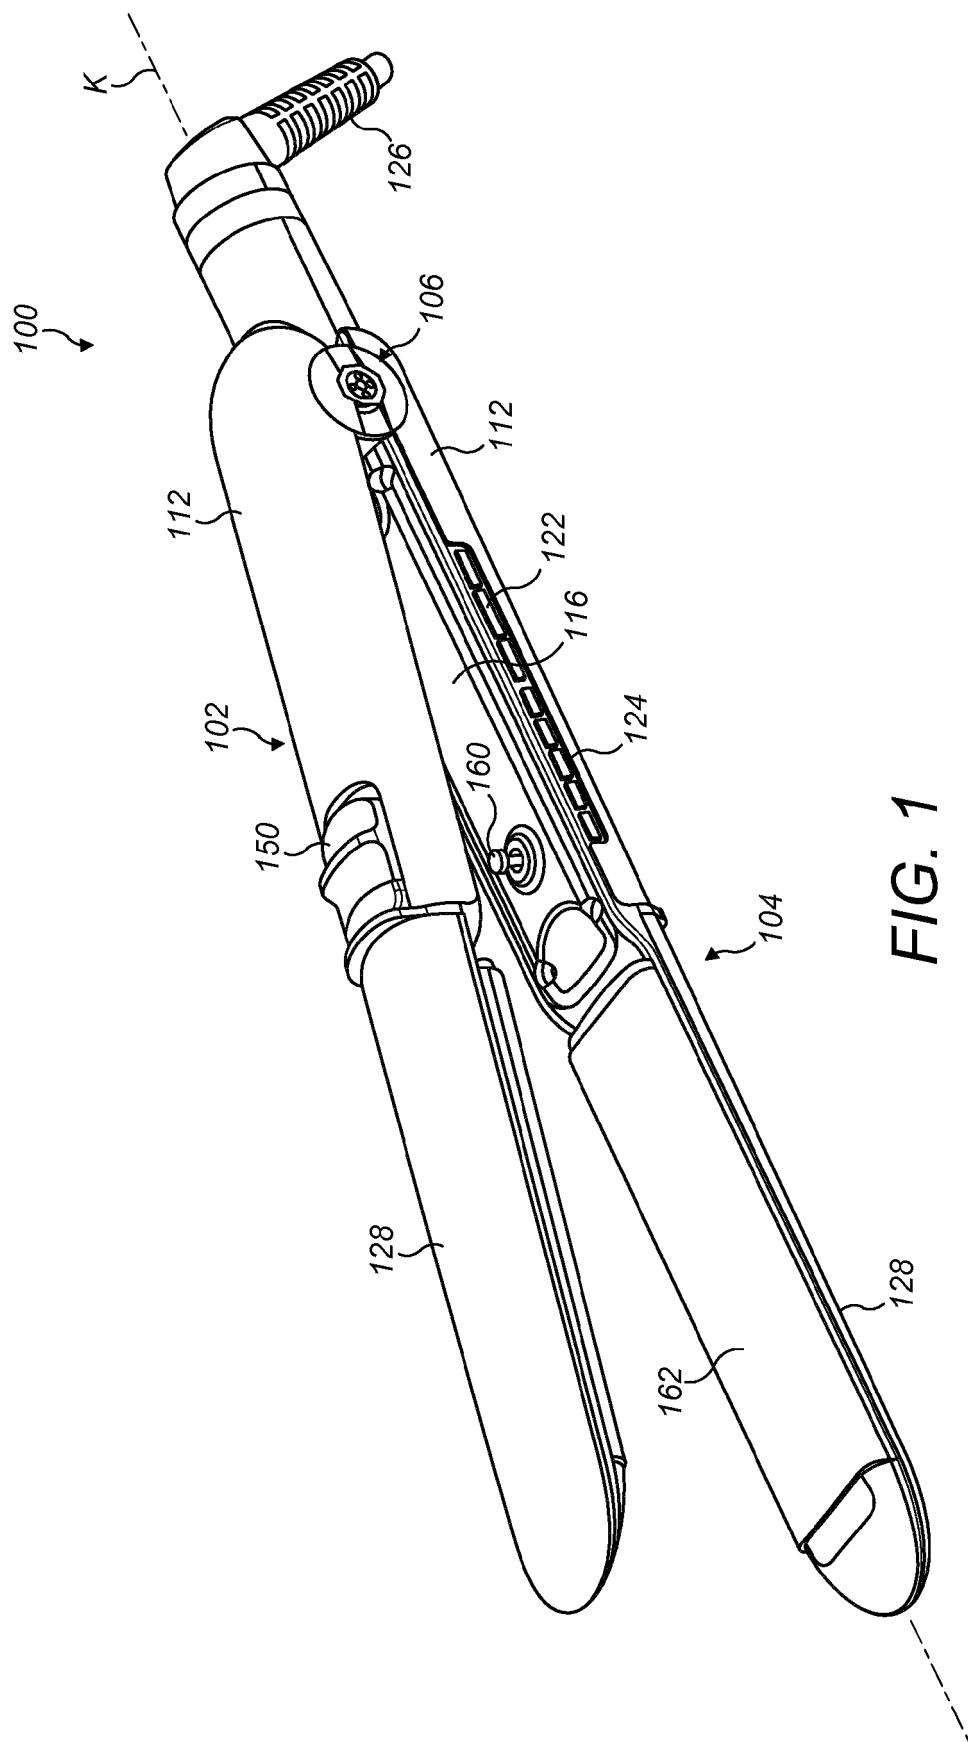



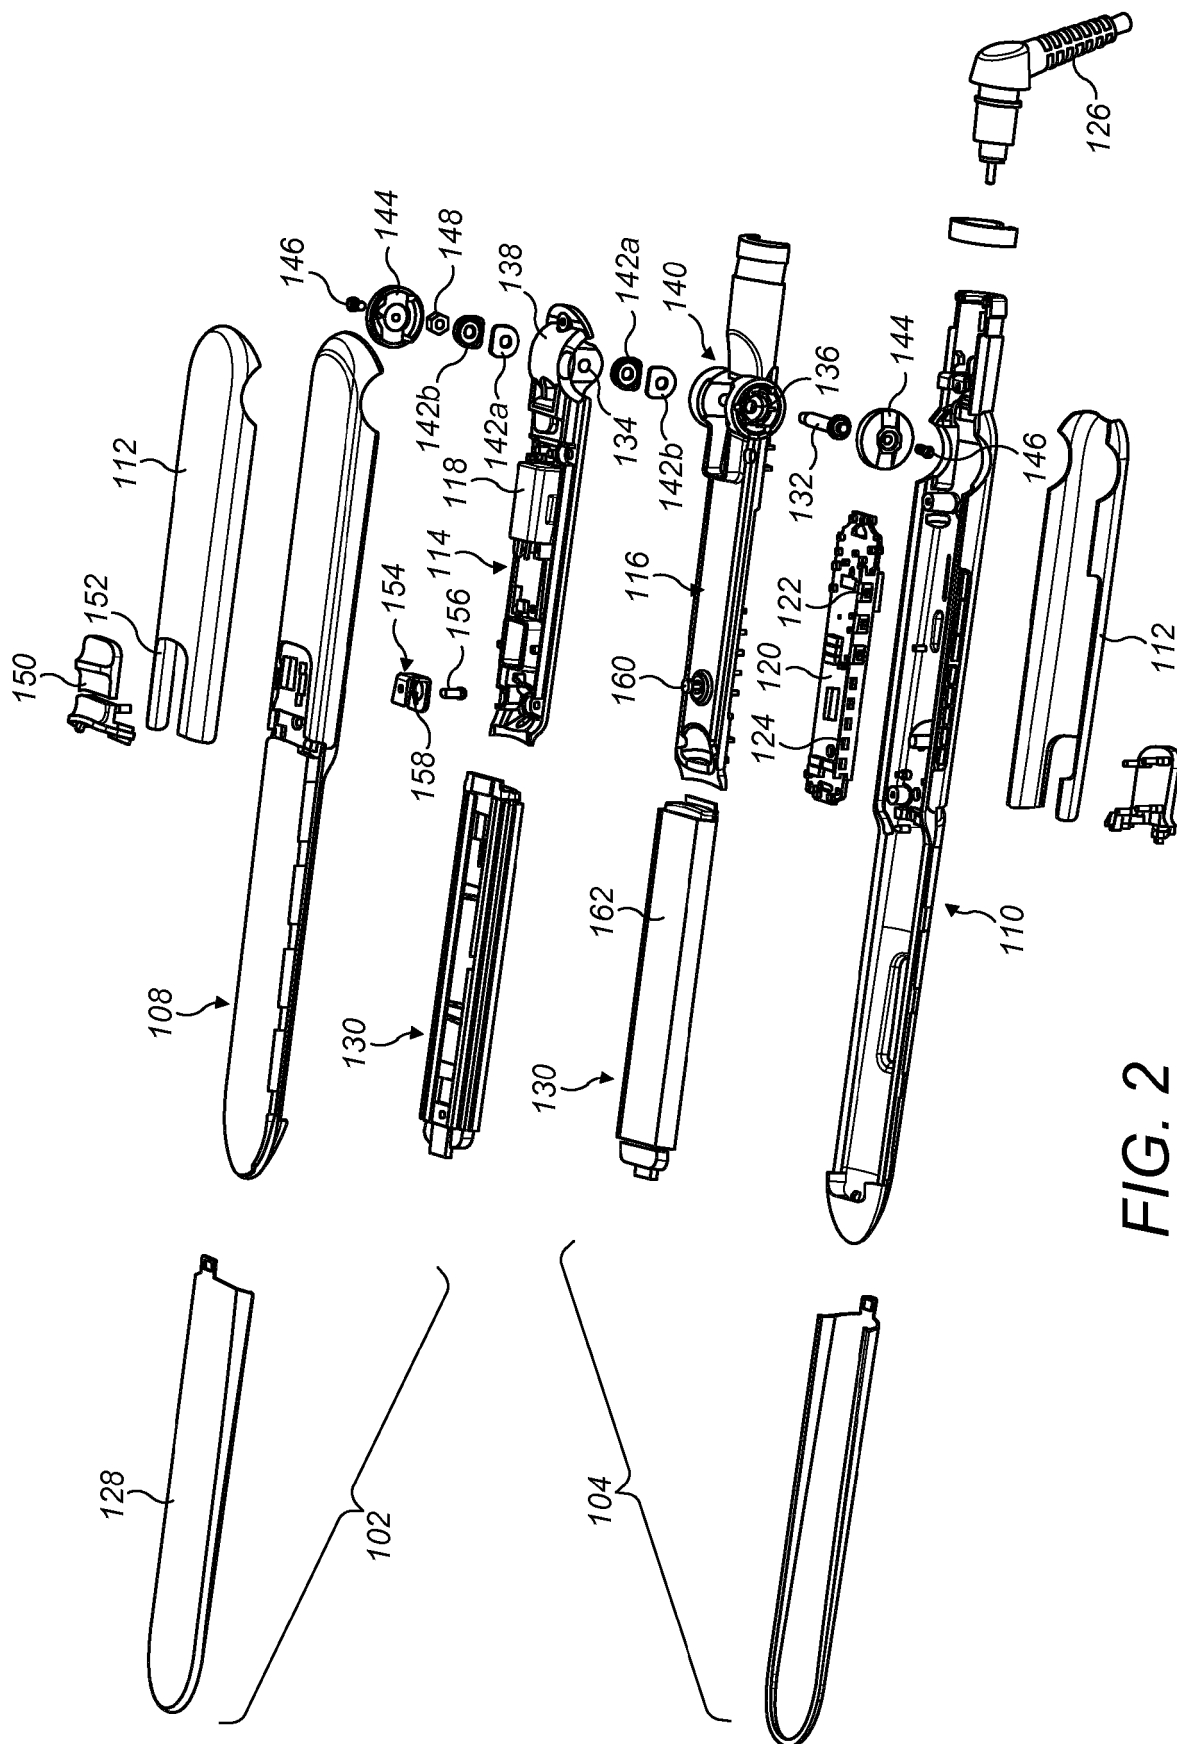


FIG. 2

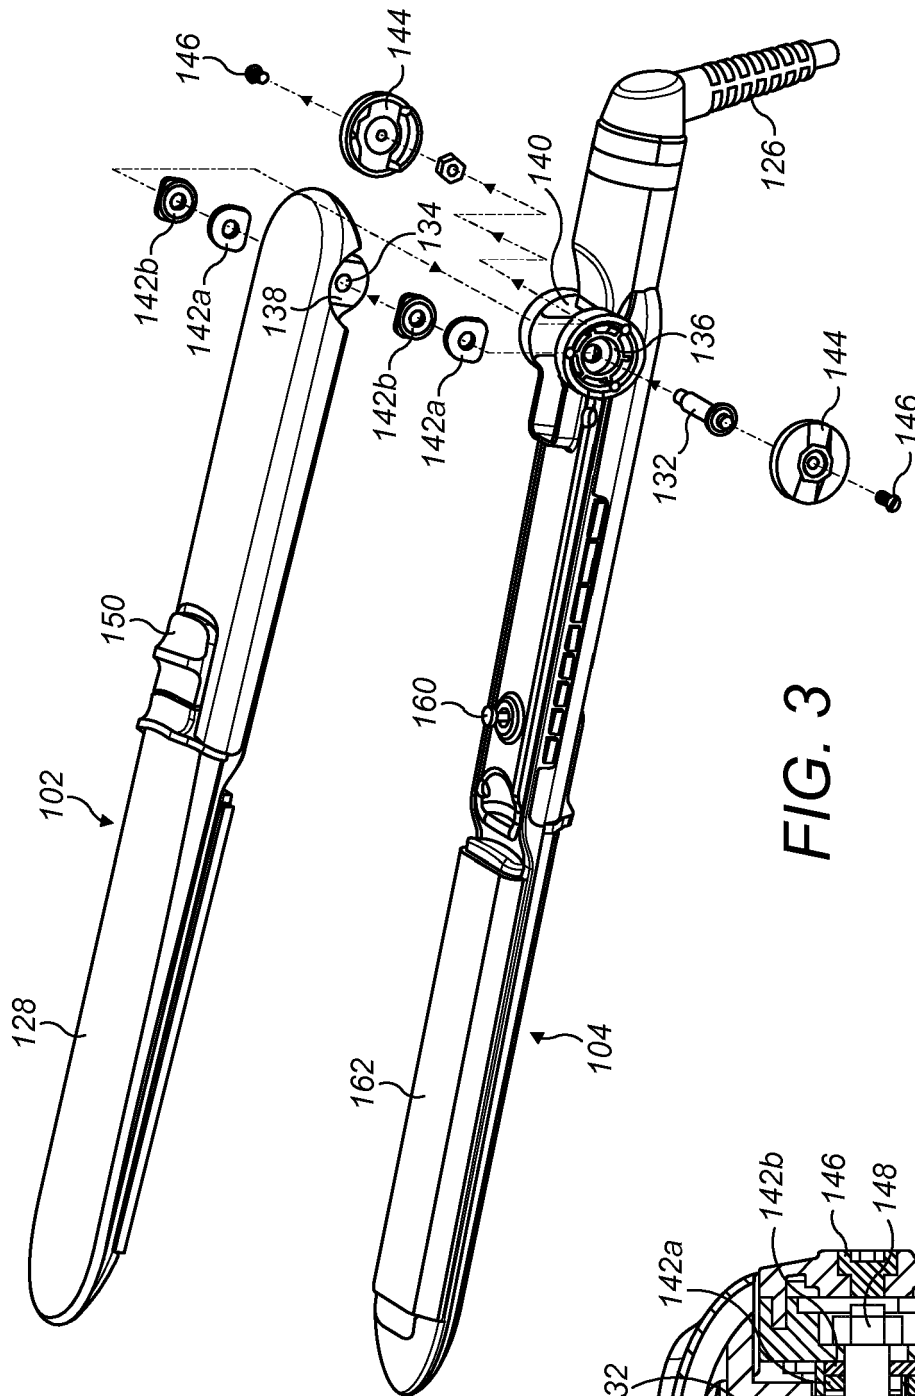


FIG. 3

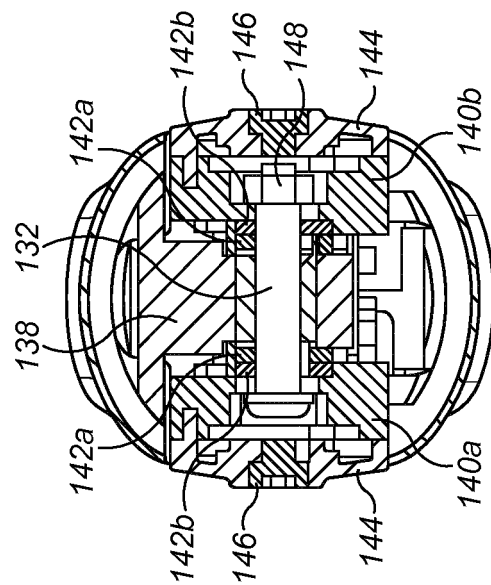


FIG. 4

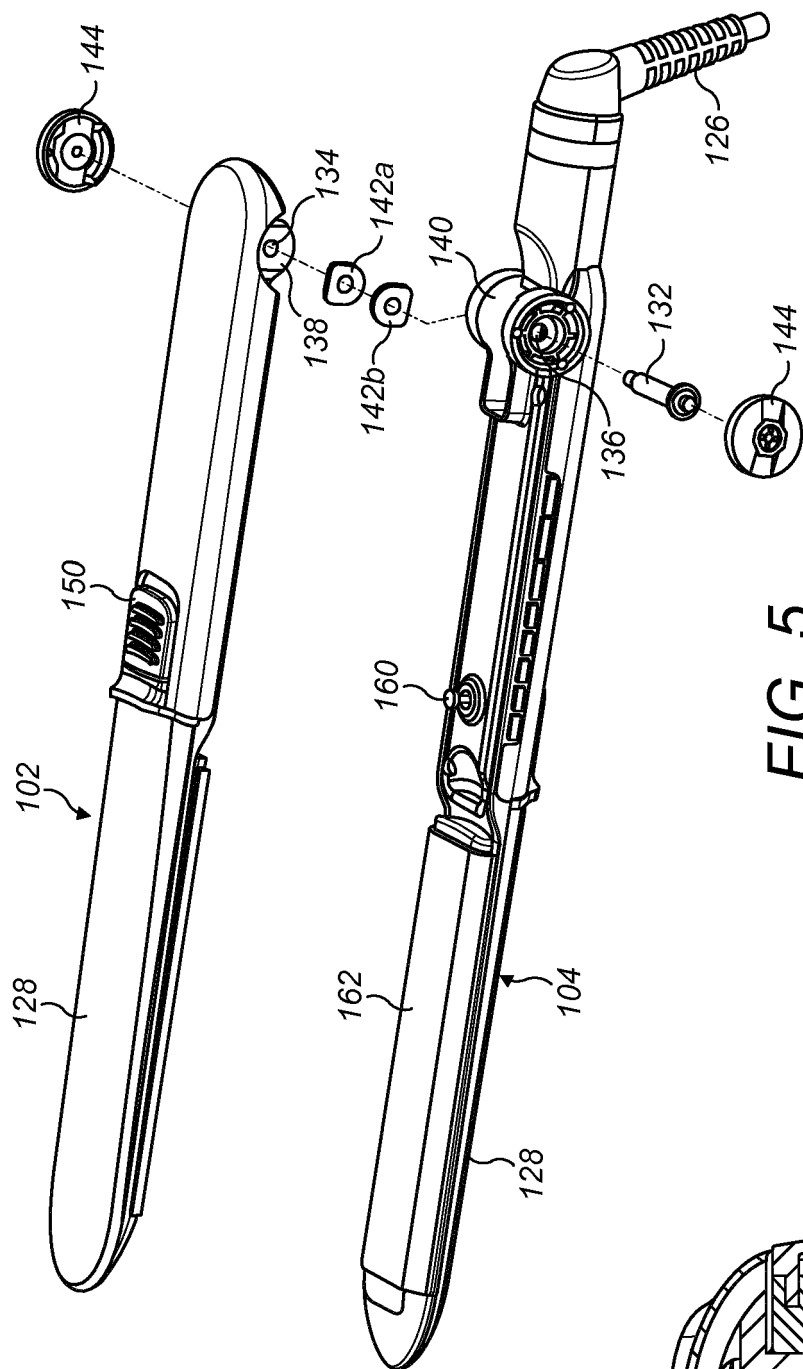


FIG. 5

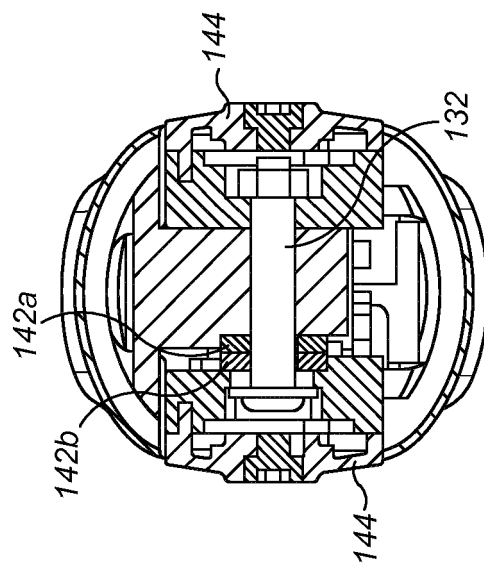


FIG. 6

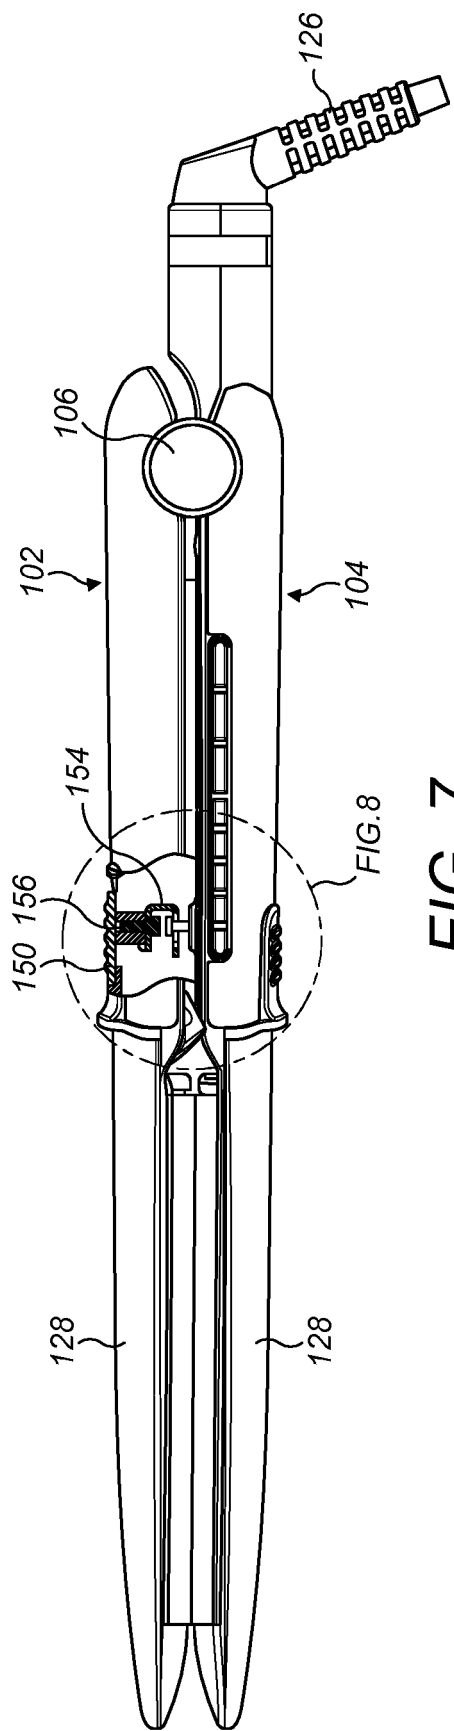


FIG. 7

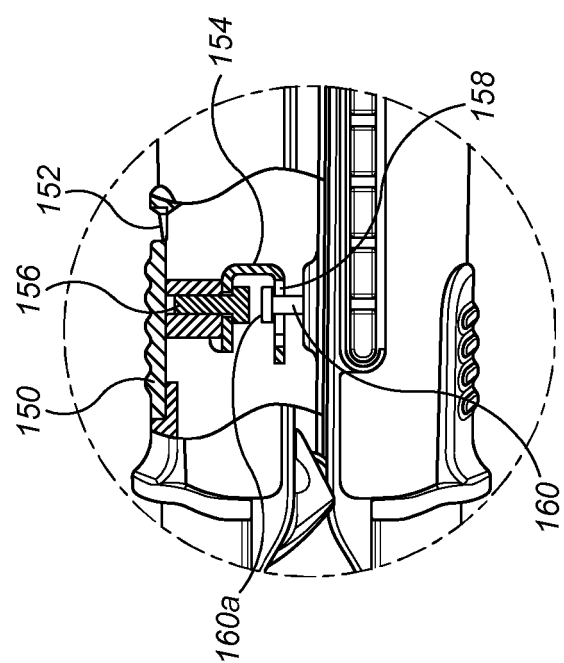


FIG. 8

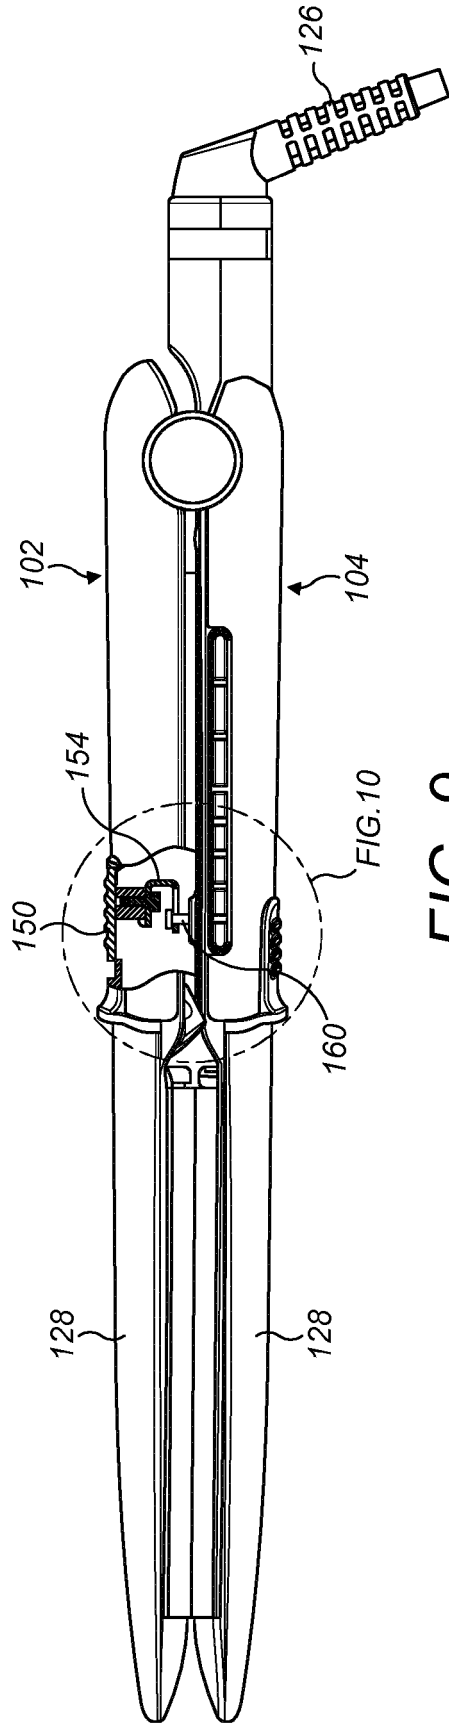


FIG. 9

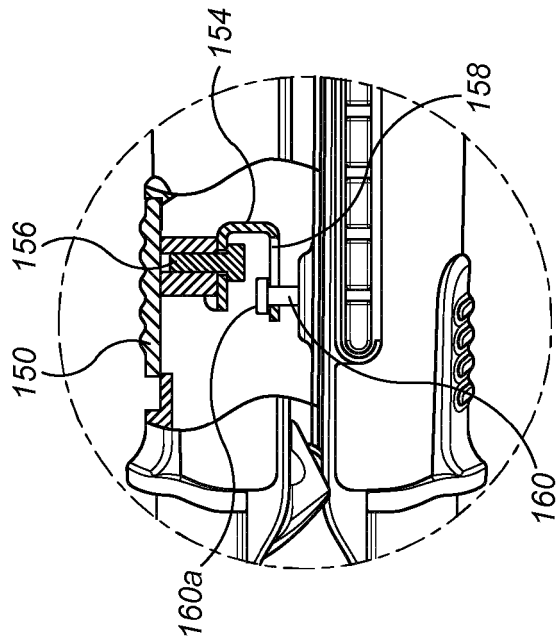


FIG. 10

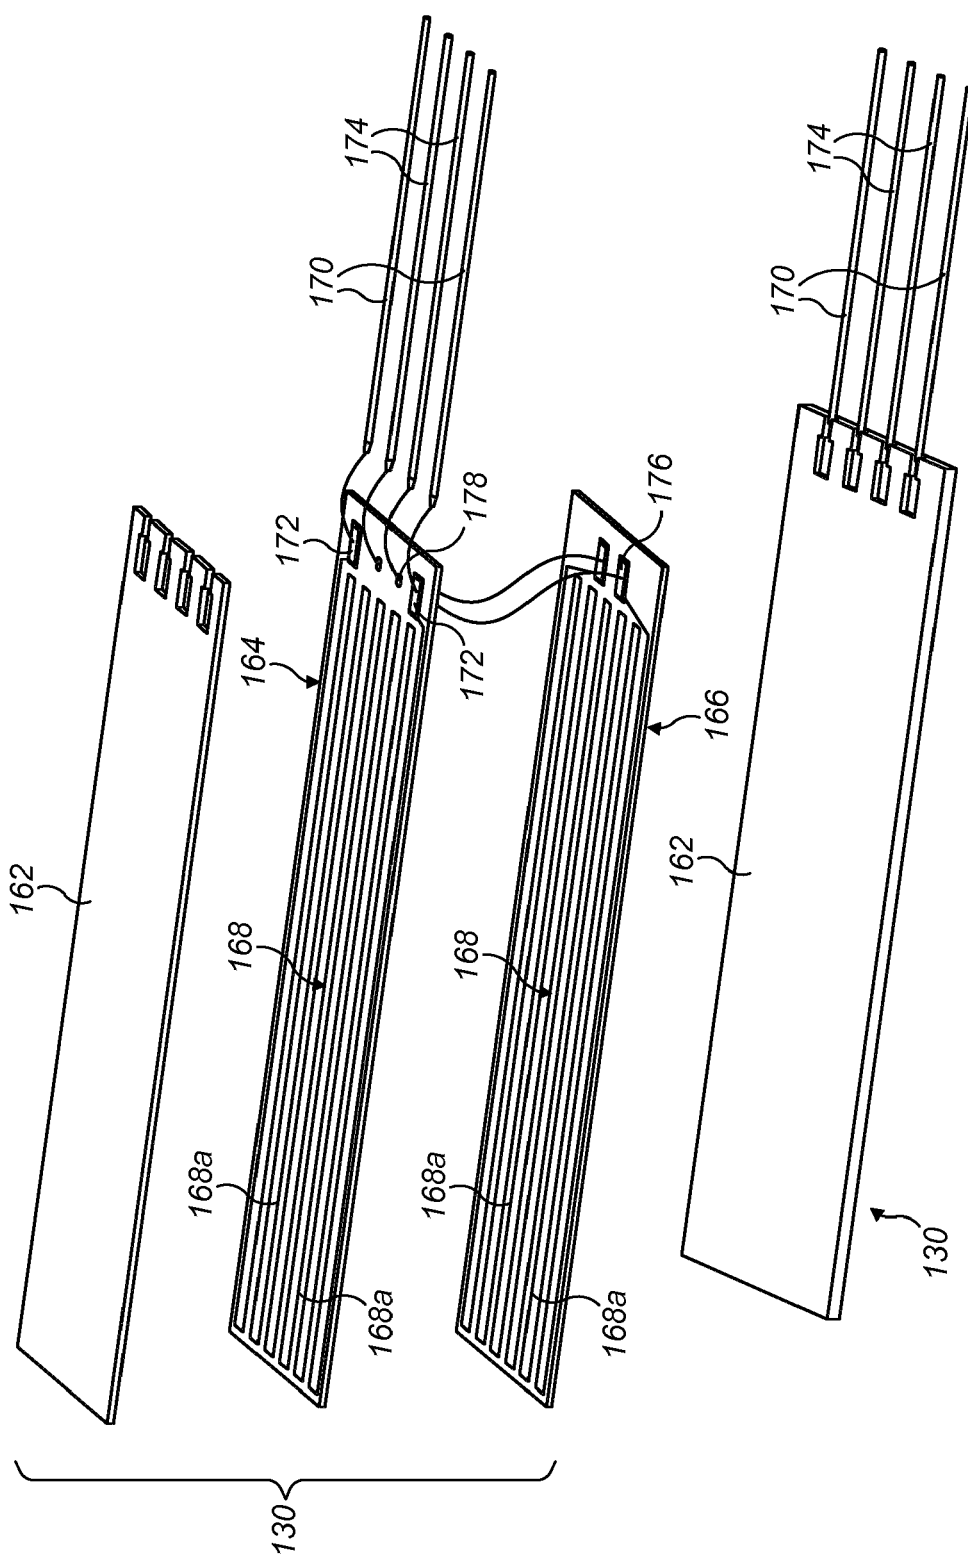


FIG. 11

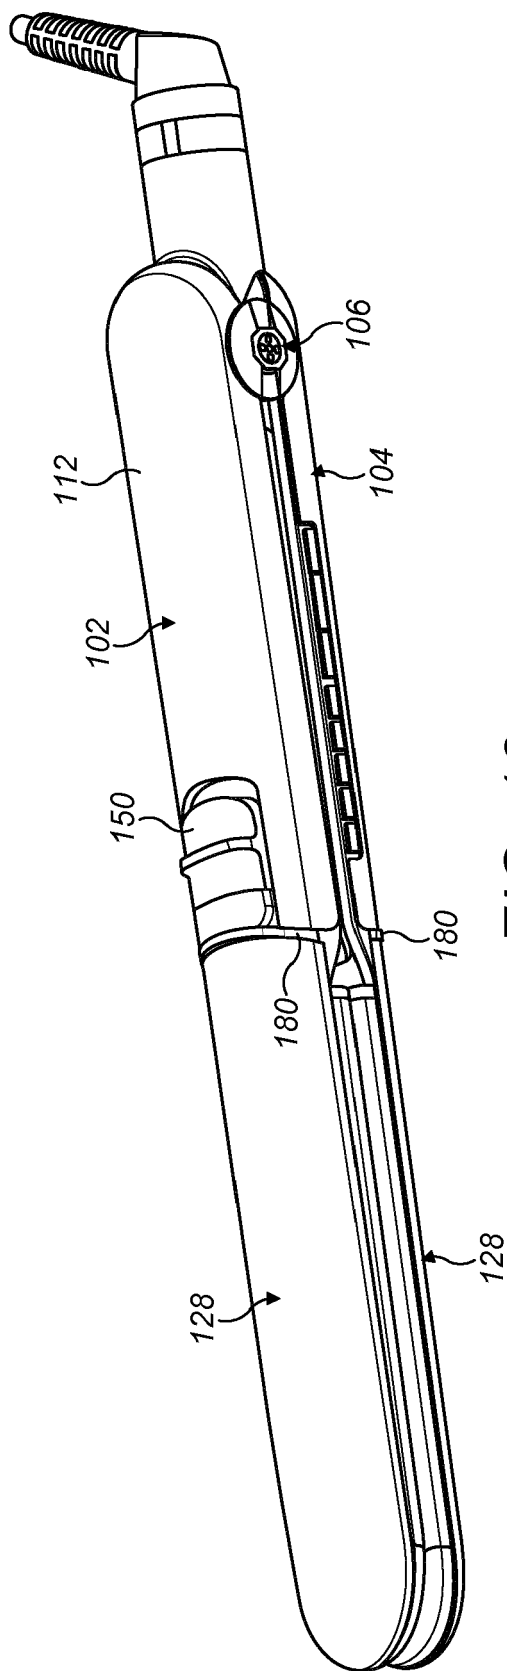


FIG. 13

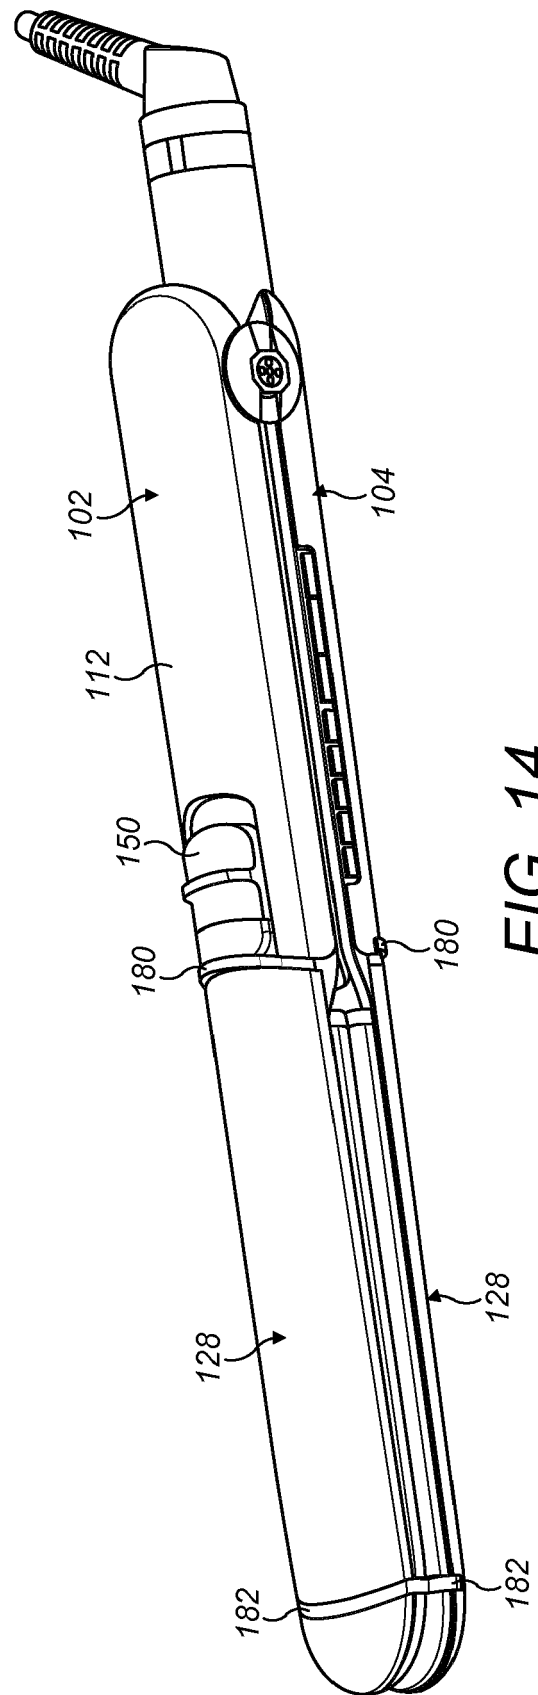


FIG. 14



## EUROPEAN SEARCH REPORT

 Application Number  
 EP 16 16 5671

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2005/022836 A1 (TONG KWOK KUEN [HK]) 3 February 2005 (2005-02-03)	1,2,6-12	INV. A45D1/00 A45D2/00
Y	* paragraphs [0038] - [0062]; figures * -----	3-5	
Y	US 2013/098389 A1 (UWANO IZUMI [US]) 25 April 2013 (2013-04-25)	3-5	
	* paragraphs [0020] - [0028]; figures * -----		
X	US 2014/238432 A1 (DENG ZHUANG FA [CN]) 28 August 2014 (2014-08-28)	1-12	
	* paragraphs [0041] - [0062]; figures * -----		
X	WO 2014/173554 A1 (KONINKL PHILIPS NV [NL]) 30 October 2014 (2014-10-30)	1-12	
	* page 8, line 16 - page 13; figures * -----		
			TECHNICAL FIELDS SEARCHED (IPC)
			A45D
The present search report has been drawn up for all claims			
Place of search <b>The Hague</b>		Date of completion of the search <b>11 May 2017</b>	Examiner <b>Van Bastelaere, Tiny</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1  
 EPO FORM 1503 03/02 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 16 16 5671

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-05-2017

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005022836 A1	03-02-2005	CN 1863468 A	15-11-2006
		GB 2418140 A	22-03-2006
		US 2005022836 A1	03-02-2005
		WO 2005011435 A1	10-02-2005
-----			
US 2013098389 A1	25-04-2013	NONE	
-----			
US 2014238432 A1	28-08-2014	NONE	
-----			
WO 2014173554 A1	30-10-2014	CN 105101833 A	25-11-2015
		EP 2953500 A1	16-12-2015
		ES 2593156 T3	05-12-2016
		JP 2016526940 A	08-09-2016
		PL 2953500 T3	30-12-2016
		US 2016174677 A1	23-06-2016
		WO 2014173554 A1	30-10-2014
-----			

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 7178532 B [0002]