



(51) International Patent Classification:
H04N 7/00 (2011.01) *H04N 13/00* (2006.01)

(21) International Application Number:
PCT/CN2016/071238

(22) International Filing Date:
18 January 2016 (18.01.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/CN2016/070712
12 January 2016 (12.01.2016) CN
PCT/CN2016/070823
13 January 2016 (13.01.2016) CN

(71) Applicant: SHANGHAITECH UNIVERSITY [CN/CN];
Room 404, Administration Building, 100 Haike Road,
Pudong New District, Shanghai 201210 (CN).

(72) Inventors: YU, Jingyi; Room 404, Administration Build-
ing, 100 Haike Road, Pudong New District, Shanghai
201210 (CN). MA, Yi; Room 404, Administration Build-
ing, 100 Haike Road, Pudong New District, Shanghai
201210 (CN).

(74) Agent: SHANGHAI SAVVY INTELLECTUAL PROP-
ERTY AGENCY; Room 341, Building 1, 789 West Tian-
shan Road, Changning District, Shanghai 200335 (CN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COMPRESSION METHOD AND APPARATUS FOR PANORAMIC STEREO VIDEO SYSTEM

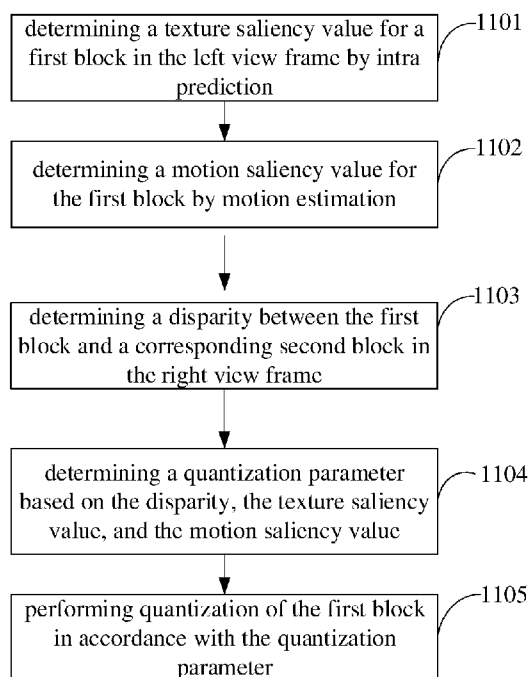


Figure 11

(57) Abstract: A method of compressing a stereoscopic video including a left view frame and a right view frame is provided, the method including: determining a texture saliency value for a first block in the left view frame by intra prediction(1101); determining a motion saliency value for the first block by motion estimation(1102); determining a disparity saliency value between the first block and a corresponding second block in the right view frame(1103); determining a quantization parameter based on the disparity saliency value, the texture saliency value, and the motion saliency value(1104); and performing quantization of the first block in accordance with the quantization parameter(1105).

COMPRESSION METHOD AND APPARATUS FOR PANORAMIC STEREO VIDEO SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit and priority of International Patent Application No. PCT/CN2016/070712, entitled “Calibration Method and Apparatus for Panoramic Stereo Video System” filed on January 12, 2016, and International Patent Application No. PCT/CN2016/070823, entitled “Stitching Method and Apparatus for Panoramic Stereo Video System” filed on January 13, 2016. The entire disclosures of the above applications are incorporated herein by reference.

TECHNICAL FIELD

The present invention relates to panoramic stereo video systems for capturing, processing, compressing, and displaying 3D panoramic stereo videos, and more particularly, to methods and apparatus for compressing 3D panoramic stereo videos in the panoramic stereo video systems.

BACKGROUND

In the proposed panoramic stereo video system, the stereo panorama videos are shown on head mounted displays (HMD) to provide an immersed 3D experience. Two essential features that determine user experience are resolution and persistence of the stereo video. In the proposed system, the stereo videos are stitched from 16 high resolution (HD) cameras, and the resolution is at least 3840x2160 (4K) for each view. With a frame rate of 50fps, the proposed system can substantially reduce motion blurring and flicking affects. However, the super high resolution and high refresh rate generate tremendous amount of video data, which is a challenge for 3D video services and broadcasting.

Modern hybrid video coding methods, such as H.264, VC-1 and HEVC, have achieved significant improvement in video coding efficiency in the last decade. Spatial and temporal redundancy in video sequences has been dramatically decreased by employing intensive spatial-temporal prediction. Recent 3D extensions, such as MV-HEVC and 3D-HEVC, have further investigated disparity prediction between different views. However, to achieve better compression performance for stereo panorama videos, human visual

characteristics and panorama-specific characteristics need to be further considered to improve subjective video quality.

Generally speaking, 360-degree panoramic image contains an elongated field of view, and there is a high probability that most of the field of view is background. Users are more likely to pay attention to only a small part of field with significant contrast of color, texture, movement, or depth.

The basic idea behind human visual characteristics based compression method is to only encode a small number of selected attention regions with high priority to obtain a high subjective video quality, while treating less interesting regions with low priority to save bits. To achieve this, an attention prediction method is often used to predict which regions that the user will likely to pay attention to.

Currently, 2D image saliency computation mainly considers the features contrast, such as color, shape, orientation, texture, curvedness, etc. In image sequences or videos, region of interesting detection is focused on motion information to separate the foreground from the background. However, the current compression methods for videos are not suitable for stereo videos, as they do not consider the stereopsis contrasts in the stereo videos. Moreover, when salient objects do not exhibit visual uniqueness in spatial and movement in temporal, the ROI become challenging for existing methods to detect.

Therefore, there is a need to provide a new compression method for stereo videos where the texture, motion and stereopsis contrast are explored in the same time for saliency analysis.

SUMMARY OF THE INVENTION

To address issues in the prior art, embodiments of the present invention provide a new compression method for stereo videos where the texture, motion and stereopsis contrast are explored in the same time for saliency analysis. Specifically, block-based stereopsis detection is employed to provide an additional depth cue, which plays an important role in human vision.

In accordance with an embodiment of the present invention, a method of compressing a stereoscopic video comprising a left view frame and a right view frame is provided, the method comprising: determining a texture saliency value for a first block in the left view frame by intra prediction; determining a motion saliency value for the first block by motion estimation; determining a disparity saliency value between the first block and a corresponding

second block in the right view frame; and determining a quantization parameter based on the disparity saliency value, the texture saliency value, and the motion saliency value.

Preferably, the method further comprises performing quantization of the first block in accordance with the quantization parameter.

Preferably, the method further comprises determining a hybrid stereo saliency map for the left view frame; downscaling the hybrid stereo saliency map to match the dimension of a transform unit (TU); determining a second quantization parameter for the transform unit; and performing quantization of the transform unit in accordance with the second quantization parameter.

Preferably, the method further comprises determining the texture saliency value based on output of a DC mode intra prediction in high efficiency video coding (HEVC).

Preferably, the method further comprises determining a motion saliency value for the first block based on output of motion estimation in high efficiency video coding (HEVC).

Preferably, the method further comprises determining the hybrid stereo saliency value for the first block by superposing the disparity saliency value, the texture saliency value, and the motion saliency value with weighting parameters.

Preferably, the left view frame and the right view frame are rectified in a first direction, and the method further comprises searching the disparity saliency value in a second direction perpendicular to the first direction.

Preferably, the disparity saliency value comprises a non-integer value.

Preferably, the method further comprises determining the disparity saliency value based on quarter-pixel samples generated by sub-pixel motion estimation in high efficiency video coding (HEVC).

In accordance with another embodiment of the present invention, a non-transitory computer-readable medium having stored thereon computer-executable instructions, said computer-executable instructions comprising a method of compressing a stereoscopic video comprising a left view frame and a right view frame is provided, the method comprising: determining a texture saliency value for a first block in the left view frame by intra prediction; determining a motion saliency value for the first block by motion estimation; determining a disparity saliency value between the first block and a corresponding second block in the right view frame; and determining a quantization parameter based on the disparity saliency value, the texture saliency value, and the motion saliency value.

Preferably, the method further comprises performing quantization of the first block in accordance with the quantization parameter.

Preferably, the method further comprises determining a hybrid stereo saliency map for the left view frame; downscaling the hybrid stereo saliency map to match the dimension of a transform unit (TU); determining a second quantization parameter for the transform unit; and performing quantization of the transform unit in accordance with the second quantization parameter.

Preferably, the method further comprises determining the texture saliency value based on output of a DC mode intra prediction in high efficiency video coding (HEVC).

Preferably, the method further comprises determining a motion saliency value for the first block based on output of motion estimation in high efficiency video coding (HEVC).

Preferably, the method further comprises determining the hybrid stereo saliency value for the first block by superposing the disparity saliency value, the texture saliency value, and the motion saliency value with weighting parameters.

Preferably, the left view frame and the right view frame are rectified in a first direction, and the method further comprises searching the disparity saliency value in a second direction perpendicular to the first direction.

Preferably, the disparity saliency value comprises a non-integer value.

Preferably, the method further comprises determining the disparity saliency value based on quarter-pixel samples generated by sub-pixel motion estimation in high efficiency video coding (HEVC).

In accordance with embodiments of the present invention, a region of interest based video coding scheme using a visual attention-based bit allocation strategy is provided. In particular, spatial, temporal and stereo cues are considered in video attention prediction. The spatial and temporal contrast features are directly extracted from existing video encoding processes without introducing any extra computation, and sub-pixel disparity intensity estimation is used to improve the visual saliency accuracy. Thus, the stereo video can be compressed efficiently without affecting end-user's perceptual quality.

BRIEF DESCRIPTION OF THE DRAWINGS

To better illustrate the technical features of the embodiments of the present invention, various embodiments of the present invention will be briefly described in conjunction with the accompanying drawings.

Figure 1 is an exemplary schematic diagram for a panoramic stereo video system in accordance with an embodiment of the present invention.

Figure 2 is an exemplary schematic diagram for a camera array in the panoramic stereo video system in accordance with an embodiment of the present invention.

Figure 3 is an exemplary schematic diagram for a data processing unit in a panoramic stereo video system in accordance with an embodiment of the present invention.

Figure 4 is an exemplary flowchart for a method of stitching a panoramic stereo video in accordance with an embodiment of the present invention.

Figure 5 is an exemplary flowchart for a method of displaying a panoramic stereo video in accordance with an embodiment of the present invention.

Figure 6 is an exemplary schematic diagram for spatial prediction modes in HEVC in accordance with an embodiment of the present invention.

Figure 7 is an exemplary schematic diagram for block-based motion estimation with MV prediction in accordance with an embodiment of the present invention.

Figure 8 is an exemplary schematic diagram for a motion intensity map acquired from motion estimation in accordance with an embodiment of the present invention.

Figure 9 is an exemplary schematic diagram for block-based disparity estimation for stereo video coding in accordance with an embodiment of the present invention.

Figure 10 is an exemplary schematic diagram for the hybrid ROI based stereo video compression system in accordance with an embodiment of the present invention.

Figure 11 is an exemplary flowchart for the hybrid ROI based stereo video compression method in accordance with an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

To better illustrate the purpose, technical feature, and advantages of the embodiments of the present invention, various embodiments of the present invention will be further described in conjunction with the accompanying drawings. It is obvious that the drawings are but for exemplary embodiments of the present invention, and that a person of ordinary skill in

the art may derive additional draws without deviating from the principles of the present invention.

In accordance with embodiments of the present invention, a panoramic stereo video system including multi-camera video capturing, data processing, stereo video coding, transmission, and 3D displaying is provided. The panoramic stereo video system employs real-time multi-view videos capturing, image rectification and pre-processing, and region of interest (ROI) based stereo video compression. After the transmission and decoding process, a head-mounted display (HMD) headset is used to display the left and right views.

1. System overview

Figure 1 is an exemplary schematic diagram for a panoramic stereo video system in accordance with an embodiment of the present invention. The panoramic stereo video system 100 uses a camera array to capture 3D panoramic video, and displays the captured 3D panoramic video on either a 3D TV or a head-mounted virtual reality display device. As shown in Figure 1, the panoramic stereo video system 100 includes a data capturing unit 200, a data processing unit 300, and a data display unit 400. The data capturing unit 200 includes a plurality of cameras in a camera array 210, and a camera calibration unit 220. The data processing unit 300 includes a data pre-processing unit 310 and an advanced stereo video transcoding unit 320. The data display unit 400 includes a decoding unit 410, and a display headset 420.

2. Data Capturing Unit

As shown in Figure 1, the data capturing unit 200 includes a plurality of cameras in a camera array 210, and a camera calibration unit 220 for calibrating the camera array 210.

2.1. Camera Array

Figure 2 is an exemplary schematic diagram for a camera array in the panoramic stereo video system in accordance with an embodiment of the present invention.

As shown in Figure 2, the camera array 210 has 16 high-definition cameras c1-c16 installed on a mounting frame in the shape of a regular octagon, with a pair of cameras placed on each side of the octagon. The two cameras on each side, such as c1 and c2, have parallel optical axes, and are separated by a distance d . The raw video data captured by the camera array 210 is transmitted through cable to a computer for further processing. The parameters for the camera are listed in Table 1 below.

Sensor	OV2710
Sensor Size	1/2.7 inch
Pixel Size	3 * 3
Image Area	5856 * 3276
Resolution	FULL HD 1920(H) * 1080(V)
Frame	MJPEG@30fps
USB protocol	USB2.0 HS/FS
AEC	Support
AEB	Support
AGC	Support
Lens Parameter	Standard 2.1 mm, optional/2.5/2.8/3.6/6mm/ FOV(D) 170 Degree /187 Degree

Table 1

It should be noted that while the camera array is depicted as a regular octagon in Figure 2, the camera array can be configured in other shapes in accordance with other embodiments of the present invention. Specifically, in one embodiment of the present invention, the cameras are installed on a rigid frame, so that the relative positions among the plurality of cameras are substantially constant. In another embodiment of the present invention, the cameras are located substantially on the same plane, such as on the sides of a polygon.

2.2. Camera Calibration

To stitch images captured by the cameras together and generate 3D effects, it is necessary to obtain both the internal and parameters of the cameras. The extrinsic parameters include the rotation and translation among the cameras, so that the images captured by different cameras can be rectified and aligned in the horizontal direction. Also, there may be distortions in the images captured by the cameras, and to obtain images free of the distortions, it is necessary to know the camera distortion parameters. These parameters are obtained during the camera calibration process.

2.2.1. Calibration of Internal and Distortion Parameters

The internal and distortion parameters of the cameras can be obtained using a variety of methods, such as the calibration method proposed by Zhengyou Zhang, and tools like MatLab can be employed to obtain these parameters.

2.2.2. Calibration of Extrinsic Parameters

After obtaining the internal parameters of the cameras, a method based on structure from motion is employed to obtain the rotations and translations among the cameras. This method has the following advantages.

Efficiency: there is no need to calibrate the cameras pair by pair. Rather, all cameras capture videos of a scene simultaneously during calibration, and the extrinsic parameters for all the cameras can be obtained at the same time.

Accuracy: in pattern-based calibration methods, the pattern needs to be captured by two adjacent cameras, which often results in lower resolution for the pattern and reduces the accuracy of the calibration. In our structure from motion based method, the movement of each camera will be estimated independently to obtain the parameters, and there is no need for adjacent cameras to have an overlapping field of view. Thus, we can place the cameras closer to the scene to be captured to achieve better accuracy.

Extensibility: since our method does not require an overlapping field of view for adjacent cameras, it is even applicable to cameras placed in back-to-back positions.

2.3. Data Capturing Method

Data from the 16 cameras are captured and stored using software, and then provided to the data processing unit. Image data for each frame captured by the cameras can be collected using software such as FFmpeg and DirectShow (or DShow). The frames captured by each camera are compressed and then stored as video files. Since there are a number of cameras, the frames captured by the cameras need to be synchronized, such as using time stamps. For example, each frame captured by the cameras can be affixed with a time stamp, and placed in a queue so that it is synchronized with other frames with the same time stamp. The synchronized frames are coded into video streams, and stored locally or transmitted through the network together.

3. Data Processing Unit

As shown in Figure 1, the data processing unit 300 includes data pre-processing unit 310 and an advanced stereo video transcoding unit 320.

Figure 3 is an exemplary schematic diagram for a data processing unit in a panoramic stereo video system in accordance with an embodiment of the present invention. As shown in Figure 3, the data pre-processing unit 310 includes a timeline synchronization 311 for synchronizing the images captured by the cameras, a number of decoders 312 for decoding streams of raw video, a number of rectifiers 313 for rectifying the raw video, an encoder 314 for video processing, including noise reducing and editing, a stitching unit for stitching videos to generate panoramic video. The data pre-processing unit 310 outputs a left view video and a right view video to the advanced stereo video transcoding unit 320. The advanced stereo video transcoding unit 320 generates a motion map 321 and a texture map 322 for the video, and a hybrid region of interest (ROI) generating unit 323 identifies regions of interests in the videos based on the motion map and 321 the texture map 322. A bits allocation unit 324 allocates bits based on the identified region of interests, and a HEVC encoding unit 325 encodes the videos. A H.265 packetizer 326 packs the encoded videos for transmission.

Figure 4 is an exemplary flowchart for a method of stitching a panoramic stereo video in accordance with an embodiment of the present invention.

3.1 Distortion Correction and Preprocessing

The frames captured by the cameras are warped in accordance with the distortion parameters obtained during the calibration process to obtain frames free of distortions. In order to enhance the accuracy of image alignment and stitching, the frames are filtered first to reduce noises.

3.2. Image Alignment

Image alignment is performed on each pair of cameras located on each side of the octagon, and the images captured by each pairs of cameras are aligned in the horizontal direction. In accordance with an embodiment of the present invention, each frame captured by the pairs of cameras is warped to a plane that is parallel to the optical axes of the pair of cameras.

4. Panoramic Video Stitching

The camera array has 8 pairs of cameras. The frames captured by all the left cameras are projected onto a cylinder, and then stitched into a panoramic image. A panoramic video can be obtained by repeating the above steps for all the frames captured by the left cameras. Another panoramic video can be obtained by processing the frames captured by the right cameras in the same fashion. These two panoramic videos form a panoramic stereo video.

5. Data Display Unit

As shown in Figure 1, the data display unit 400 includes a decoding unit 410, and a display headset 420. After going through an encoding and decoding system, the panoramic stereo video is played on display headset 420, which can be a wearable virtual reality (VR) equipment, such as one provided by Oculus VR. The panoramic stereo video is rendered respectively to the left display and the right display of the Oculus device. The display area of the panoramic stereo video can be adjusted in accordance with the movement of the detection device to simulate the change in perspective in the virtual reality.

Figure 5 is an exemplary flowchart for a method of displaying a panoramic stereo video in accordance with an embodiment of the present invention. As shown in Figure 5, in step 501, the encoded video stream is first decoded to YUV. In step 502, position calculation and view selection are made in accordance with the Oculus sensors data. In step 503, the images for the left eye and the right eye are respectively rendered. In step 504, the rendered images are displayed on the Oculus display headset.

6. Stereo Video Compression

In the stereo panorama video system, left and right super-resolution videos are stitched in the video processing module. As a result, huge amount of video data bring challenge for video compression and transmission. In accordance with embodiments of the present invention, a region of interest based video coding scheme using a visual attention-based bit allocation strategy is provided. In particular, spatial, temporal and stereo cues are considered in video attention prediction. The spatial and temporal contrast features are directly extracted from video encoding process, and no extra computation is introduced. Also, sub-pixel disparity intensity estimation is used to improve the visual saliency accuracy in the stereo system. Both sub-pixel sample reusing and block-based matching ensuing the proposed algorithm performs the detection in real-time with good performance. The overall scheme highly improves video compression rate without affecting end-user's perceptual quality.

6.1 Region of interest detection

6.1.1 Spatial feature extraction from intra prediction

In HEVC coding standard, intra prediction (or spatial prediction) is used for coding blocks that need to be compressed independent of previously coded frames. The spatial correlation at pixel level is exploited by using the neighboring samples of previously encoded and reconstructed blocks. Then the predicted sample is subtracted from the original pixel values to create a residual block. The residual contains texture contrast information, and we

use the residual obtained from intra prediction to generate the spatial saliency map.

In HEVC video coding, spatial prediction includes 33 directional modes (compared to eight such modes in H.264), DC (overall averaging) and planar (surface fitting) prediction modes, which is selected per Prediction Unit (PU). Figure 6 is an exemplary schematic diagram for spatial prediction modes in HEVC in accordance with an embodiment of the present invention. All the 35 prediction modes are shown in Figure 6. The HEVC PU size is selected from 64 x 64 to 8x8, and all the 35 modes can be used to obtain the optimal block partition and residual. To reduce complexity, in one embodiment, the block-based residual map reuses the results generated by DC mode prediction on fixed 8x8 blocks. The residual of block k is calculated as follow:

$$res_k = \sum_{i=1}^8 \sum_{j=1}^8 (C_{ij} - R_{ij})^2 \quad (1)$$

where C_{ij} and R_{ij} are the $(i,j)th$ elements of the current original block C and the reconstructed block R. Then the texture saliency value S_T for each block can be computed based on its residual, and normalized into [0,1]

$$S_T(k) = \frac{res_k}{\sum_{i=1}^N res_i} \quad (2)$$

where N is the number of blocks in a frame. Since the 8x8 block spatial residual detection is conducted in HEVC intra prediction process, no extra computation is introduced.

In other embodiments, each frame can be divided into non-overlapped blocks of a different size, such as 64x64 or 16x16 pixels; the texture saliency map can be calculated based on the results of other video coding process that is similar or comparable to intra prediction; and the compression can be based on other coding standards, such as H.264/AVC or AVS. Preferably, the intra prediction or other video process is based on the same block size that the frame is divided into.

6.1.2 Temporal feature extraction from motion estimation

A fast moving object draws visual attention. However, since a video sequence is captured by a moving camera, there exists a global motion. Thus, we need to measure the local motion salient by estimating motion vector difference (MVD), which is the output of motion estimation process in inter prediction of HEVC.

The motion estimation techniques in most video coding standards are typically based on block matching, where the motion vector is represented by a 2D translational model. Each block is matched with all candidate positions within a defined search region. Since motion vectors for neighboring blocks are often highly correlated, HEVC employs the

motion vector prediction technique, which predicts the current block's motion vector from the motion vectors of nearby, and previously coded blocks.

Figure 7 is an exemplary schematic diagram for block-based motion estimation with MV prediction in accordance with an embodiment of the present invention. As shown in Figure 7, a vector mv_{pred} 712 is predicted based on the motion vectors of the neighboring blocks for the current block 711 in current frame 710. The corresponding block 721 is matched with all candidate positions within a defined search region 725. Finally, the difference between the best vector mv_{best} 723 and the predicted vector mv_{pred} 721 is encoded and transmitted.

In one embodiment, the MVD generated by 8x8 block motion estimation is used. The magnitude of motion difference can be defined as:

$$MVD_k = \|mv_{best}(k) - mv_{pred}(k)\| \quad (3)$$

Then, the motion saliency map S_M can be calculated by normalizing the MVD in same frame:

$$S_M(k) = \frac{MVD_k}{\sum_{i=1}^N MVD_i} \quad (4)$$

The motion saliency map can be computed according to the results of motion estimation, which is an essential process in HEVC video coding. Thus, this method can extract the motion features without introducing any extra processing. Figure 8 is an exemplary schematic diagram for a motion intensity map acquired from motion estimation in accordance with an embodiment of the present invention.

In other embodiments, each frame can be divided into non-overlapped blocks of a different size, such as 64x64 or 16x16 pixels; the motion saliency map can be calculated based on the results of other video coding process that is similar or comparable to motion estimation in inter prediction; and the compression can be based on other coding standards, such as H.264/AVC or AVS. Preferably, the motion estimation or other video process is based on the same block size that the frame is divided into.

6.1.3 Disparity estimation from disparity prediction

We also explore stereopsis for saliency analysis, which provides an additional depth cue and plays an important role in the stereo panorama videos. A block based disparity estimation method is introduced to handle disparity map.

Figure 9 is an exemplary schematic diagram for block-based disparity estimation for

stereo video coding in accordance with an embodiment of the present invention. As shown in Figure 9, in the high-resolution video system, the left view 910 and the right view 920 of the stereoscopic image are well rectified. Each view is divided into non-overlapped blocks of size of 8x8 pixels, and all pixels within a block assume to have same disparity. As a result, blocks of the right view of matching blocks of the left view are expected to be found in the same scan lines, and disparity 922 is a one-dimension vector (the vertical components is equal to zero). The disparity matching scheme is similar as the motion estimation in inter prediction. In particular, searching area 925 is limited only in horizontal direction with range of ± 32 . The initial search position is set as the position of the corresponding block 921 in the right view 920. The sum of absolute difference (SAD) is employed as the matching criterion.

In order to provide better prediction accuracy, disparities with non-integer values are also considered and sub-pixel intensities are interpolated using HEVC 7-8 tap filter. Since the sub-pixel samples interpolation is one of most complex operations, the proposed sub-pixel disparity search directly uses the quarter-pixel samples generated by HEVC sub-pixel motion estimation. The reuse of HEVC's 7-tap interpolation greatly reduces the computational complexity. The block-wise disparity map is generated according to block's disparity value d_k :

$$S_D(k) = \frac{\|d_k\|}{\sum_{i=1}^N \|d_i\|} \quad (5)$$

In other embodiments, each frame can be divided into non-overlapped blocks of a different size, such as 64x64 or 16x16 pixels; the disparity map can be calculated using the results of other video coding process that is similar or comparable to motion estimation; and the compression can be based on other coding standards, such as H.264/AVC or AVS. Preferably, the motion estimation process is based on the same block size that the frame is divided into.

6.1.4 Hybrid ROI determination

In one embodiment, the region of interest is detected by combing the spatiotemporal and disparity features: the texture contrast S_T in (2), the motion contrast S_M in (4) and the disparity intensity in (5). While each feature has its own strength and weakness, the combination of all the features provides the optimal results. First, each feature map is normalized to have the range of [0,1]. Second, a hybrid stereo saliency map S is formed by superposing S_M , S_T and S_D .

$$S(b_i) = \lambda_T S_T + \lambda_M S_M + \lambda_D S_D \quad (6)$$

where λ_T, λ_M and λ_D are weighting parameters.

Figure 10 is an exemplary schematic diagram for the hybrid ROI based stereo video compression system in accordance with an embodiment of the present invention. As shown in Figure 10, the stereo video compression system has a spatial prediction module 1001, a temporal prediction module 1102, and a disparity prediction module 1103. The results generated by the spatial prediction module 1001, the temporal prediction module 1102, and the disparity prediction module 1103 are inputted to a hybrid region of interest generation module 1004, which identified the salient regions, and allocate the bits accordingly. The transformation and quantization module 1105 performs quantization based on the bits allocation determined by the hybrid region of interest generation module 1004, and the entropy coding module 1106 coding the frames to generated compressed frames 1006.

6.2 ROI based stereo video coding

One of the ideas for ROI-based compression is bit allocation in favor of salient regions. The hybrid ROI detection approach generates a high quality and accurate saliency map. Furthermore, to improve video compression performance, the advanced video standard HEVC is chosen for its high compression efficiency.

Since our ROI detection is 8x8 block-based, the estimated saliency map needs to be downsampled to match the dimensions of current Transform Unit, which may be chosen as 32x32, 16x16 and 8x8. The new QP values can be computed using the following equation:

$$Q' = \max(Q - \psi \cdot (S - ES), 0) \quad (8)$$

where $Q \in \mathbb{R}$ is the original QP values selected by x265 encoder, and

$S: \mathbb{R}^2 \rightarrow [0; 1]$ is a downsampled saliency map for the current frame.

Thus, the QP value for coding unit containing salient regions is reduced, while the QP value for coding unit not containing salient regions is increased. The parameter ψ can be selected by user, and controls bitrate distribution between salient and non-salient regions: the greater the value of ψ , more bits for salient regions.

Figure 11 is an exemplary flowchart for the hybrid ROI based stereo video compression method in accordance with an embodiment of the present invention. As shown in Figure 11, the compression method includes the following steps.

Step 1101: determining a texture saliency value for a first block in the left view frame by intra prediction. Preferably, the texture saliency value is determined based on output of a

DC mode intra prediction in high efficiency video coding (HEVC).

Step 1102: determining a motion saliency value for the first block by motion estimation. Preferably, the motion saliency value is determined based on output of motion estimation in high efficiency video coding (HEVC).

Step 1103: determining a disparity between the first block and a corresponding second block in the right view frame. Preferably, the left view frame and the right view frame are rectified in a first direction, and the disparity is searched in a second direction perpendicular to the first direction.

Step 1104: determining a quantization parameter based on the disparity, the texture saliency value, and the motion saliency value. Preferably, a hybrid stereo saliency value is determined by superposing the disparity, the texture saliency value, and the motion saliency value with weighting parameters.

Step 1105: performing quantization of the first block in accordance with the quantization parameter. Here, if the block size is different from the size of the current transform unit, the hybrid stereo saliency map is downsampled to match the dimensions of current Transform Unit, and a new quantization parameter is calculated.

In accordance with embodiments of the present invention, a region of interest based video coding scheme using a visual attention-based bit allocation strategy is provided. In particular, spatial, temporal and stereo cues are considered in video attention prediction. The spatial and temporal contrast features are directly extracted from existing video encoding processes without introducing any extra computation, and sub-pixel disparity intensity estimation is used to improve the visual saliency accuracy. Thus, the stereo video can be compressed efficiently without affecting end-user's perceptual quality.

The various modules, units, and components described above can be implemented as an Application Specific Integrated Circuit (ASIC); an electronic circuit; a combinational logic circuit; a field programmable gate array (FPGA); a processor (shared, dedicated, or group) that executes code; or other suitable hardware components that provide the described functionality. The processor can be a microprocessor provided by Intel, or a mainframe computer provided by IBM.

Note that one or more of the functions described above can be performed by software or firmware stored in memory and executed by a processor, or stored in program storage and executed by a processor. The software or firmware can also be stored and/or transported within any computer-readable medium for use by or in connection with an

instruction execution system, apparatus, or device, such as a computer-based system, processor-containing system, or other system that can fetch the instructions from the instruction execution system, apparatus, or device and execute the instructions. In the context of this document, a "computer-readable medium" can be any medium that can contain or store the program for use by or in connection with the instruction execution system, apparatus, or device. The computer readable medium can include, but is not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus or device, a portable computer diskette (magnetic), a random access memory (RAM) (magnetic), a read-only memory (ROM) (magnetic), an erasable programmable read-only memory (EPROM) (magnetic), a portable optical disc such as a CD, CD-R, CD-RW, DVD, DVD-R, or DVD-RW, or flash memory such as compact flash cards, secured digital cards, USB memory devices, memory sticks, and the like.

The various embodiments of the present invention are merely preferred embodiments, and are not intended to limit the scope of the present invention, which includes any modification, equivalent, or improvement that does not depart from the spirit and principles of the present invention.

Claims

1. A method of compressing a stereoscopic video comprising a left view frame and a right view frame, the method comprising:

determining a texture saliency value for a first block in the left view frame by intra prediction;

determining a motion saliency value for the first block by motion estimation in inter prediction;

determining a disparity saliency value between the first block and a corresponding second block in the right view frame;

determining a quantization parameter based on the disparity saliency value, the texture saliency value, and the motion saliency value; and

performing quantization of the first block in accordance with the quantization parameter.

2. The method of claim 1, further comprising:

determining the texture saliency value based on output of a DC mode intra prediction in high efficiency video coding (HEVC).

3. The method of claim 1, further comprising:

determining a motion saliency value for the first block based on output of motion estimation in high efficiency video coding (HEVC).

4. The method of claim 1, further comprising:

determining a hybrid stereo saliency value for the first block by superposing the disparity saliency value, the texture saliency value, and the motion saliency value with weighting parameters.

5. The method of claim 1, wherein the first left view frame is divided into a plurality of non-overlapping blocks, and the motion estimation is based on a same size as the first block.

6. The method of claim 5, further comprising:
performing quantization of the first block in accordance with the quantization parameter.
7. The method of claim 5, further comprising:
determining a hybrid stereo saliency map for the left view frame;
downscaling the hybrid stereo saliency map to match the dimension of a transform unit (TU);
determining a second quantization parameter for the transform unit; and
performing quantization of the transform unit in accordance with the second quantization parameter.
8. The method of claim 1, wherein the left view frame and the right view frame are rectified in a first direction, and the method further comprising:
searching the disparity saliency value in a second direction perpendicular to the first direction.
9. The method of claim 8, wherein the disparity saliency value comprises a non-integer value.
10. The method of claim 9, further comprising:
determining the disparity saliency value based on quarter-pixel samples generated by sub-pixel motion estimation in high efficiency video coding (HEVC).
11. A non-transitory computer-readable medium having stored thereon computer-executable instructions, said computer-executable instructions comprising a method of compressing a stereoscopic video comprising a left view frame and a right view frame, the method comprising:
determining a texture saliency value for a first block in the left view frame by intra prediction;
determining a motion saliency value for the first block by motion estimation;

determining a disparity saliency value between the first block and a corresponding second block in the right view frame;

determining a quantization parameter based on the disparity saliency value, the texture saliency value, and the motion saliency value; and

performing quantization of the first block in accordance with the quantization parameter.

12. The computer-readable medium of claim 11, the method further comprising:

determining the texture saliency value based on output of a DC mode intra prediction in high efficiency video coding (HEVC).

13. The computer-readable medium of claim 11, the method further comprising:

determining a motion saliency value for the first block based on output of motion estimation in high efficiency video coding (HEVC).

14. The computer-readable medium of claim 11, the method further comprising:

determining a hybrid stereo saliency value for the first block by superposing the disparity saliency value, the texture saliency value, and the motion saliency value with weighting parameters.

15. The computer-readable medium of claim 11, wherein the first left view frame is divided into a plurality of non-overlapping blocks, and the motion estimation is based on a same size as the first block.

16. The computer-readable medium of claim 15, the method further comprising:

performing quantization of the first block in accordance with the quantization parameter.

17. The computer-readable medium of claim 15, the method further comprising:

determining a hybrid stereo saliency map for the left view frame;

downscaling the hybrid stereo saliency map to match the dimension of a transform

unit (TU);

determining a second quantization parameter for the transform unit; and

performing quantization of the transform unit in accordance with the second quantization parameter.

18. The computer-readable medium of claim 11, wherein the left view frame and the right view frame are rectified in a first direction, and the method further comprising:

searching the disparity saliency value in a second direction perpendicular to the first direction.

19. The computer-readable medium of claim 18, wherein the disparity saliency value comprises a non-integer value.

20. The computer-readable medium of claim 19, the method further comprising:

determining the disparity saliency value based on quarter-pixel samples generated by sub-pixel motion estimation in high efficiency video coding (HEVC).

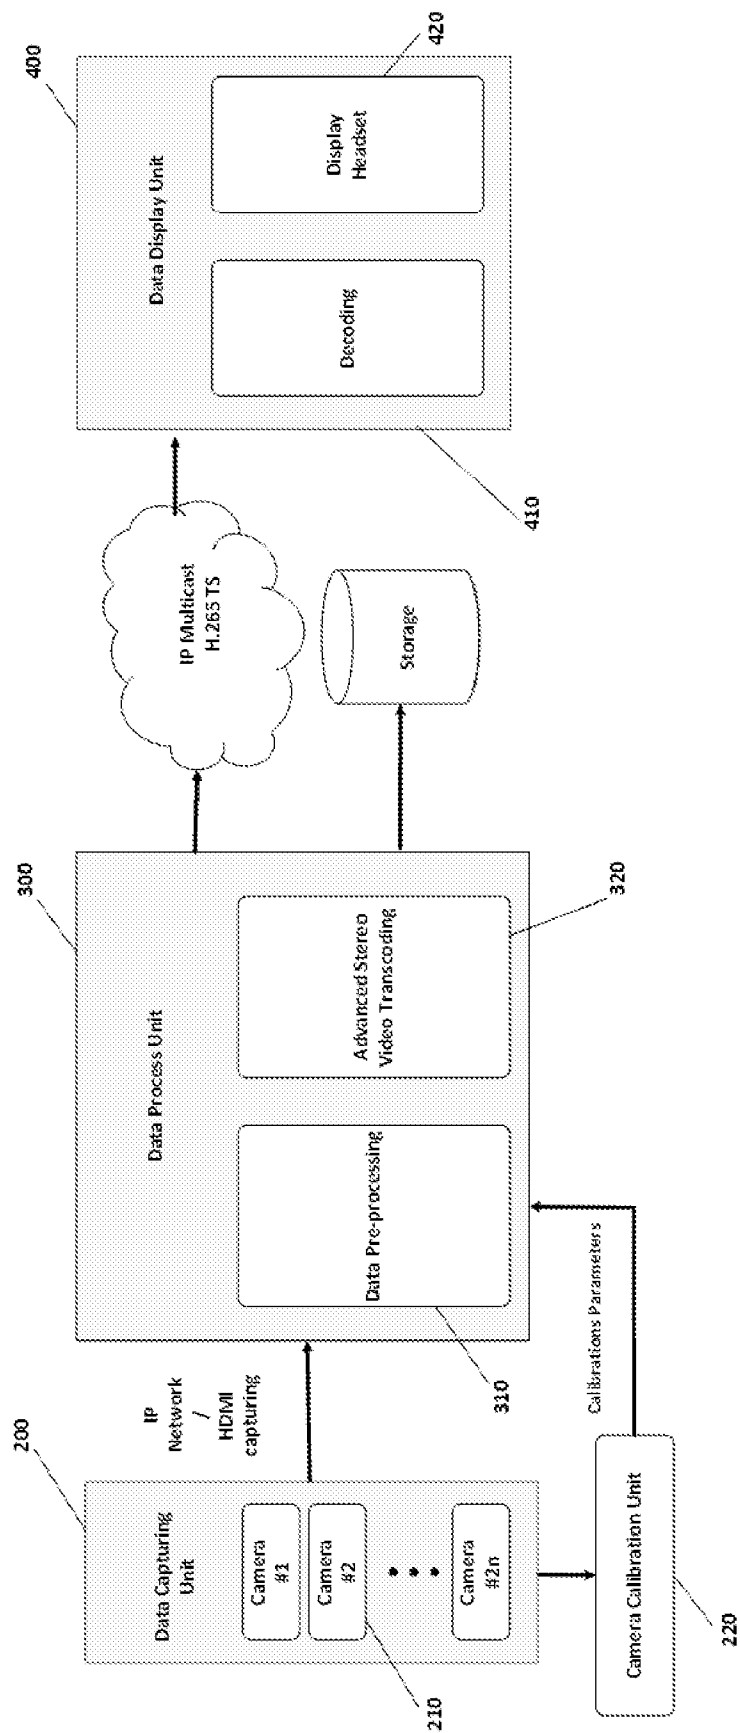


Figure 1

2/7

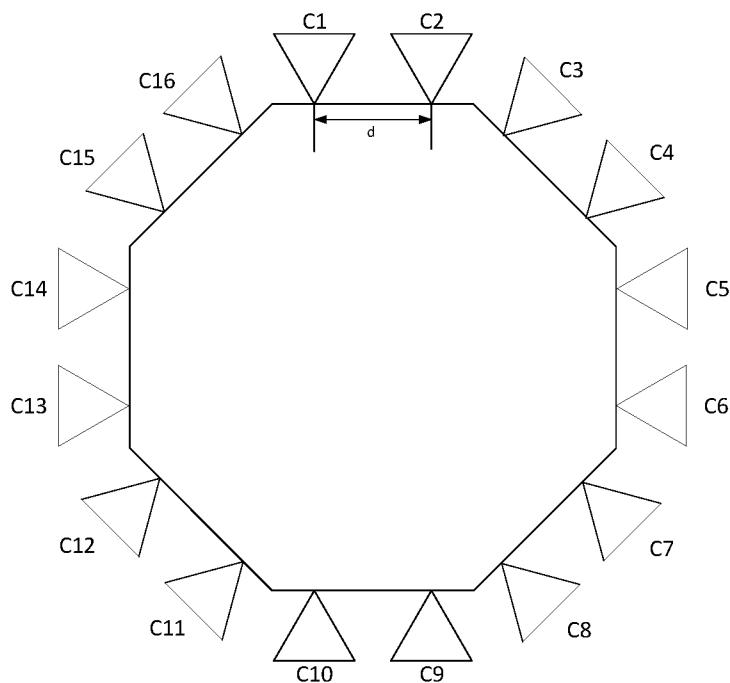


Figure 2

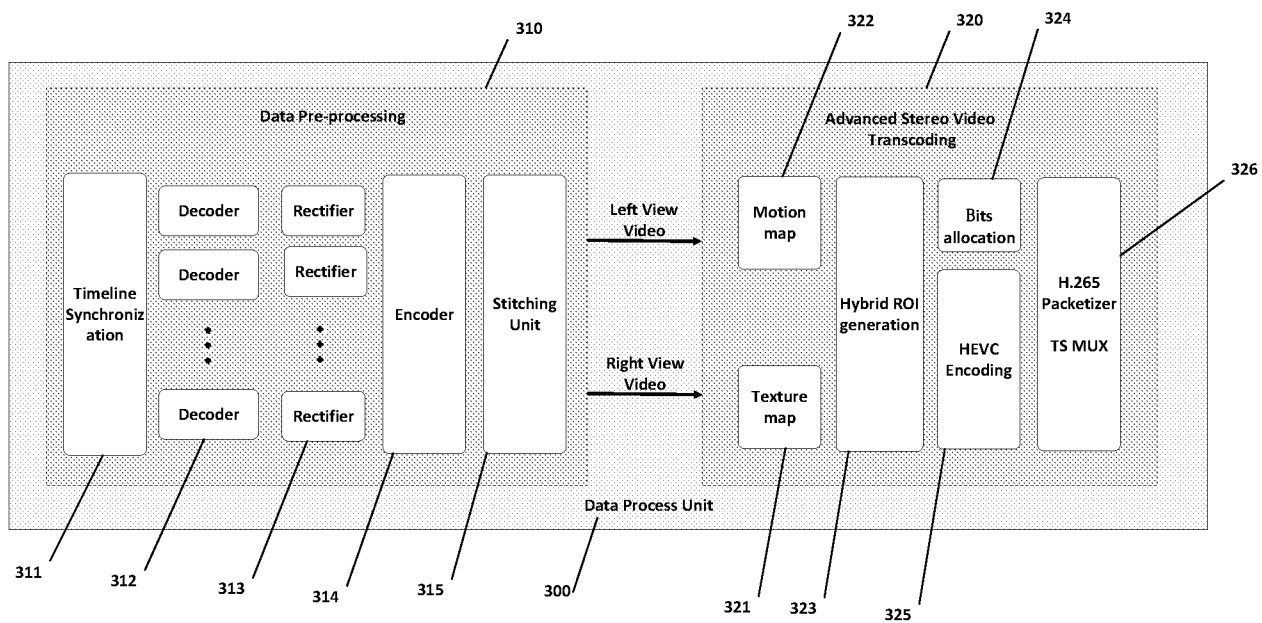


Figure 3

3/7

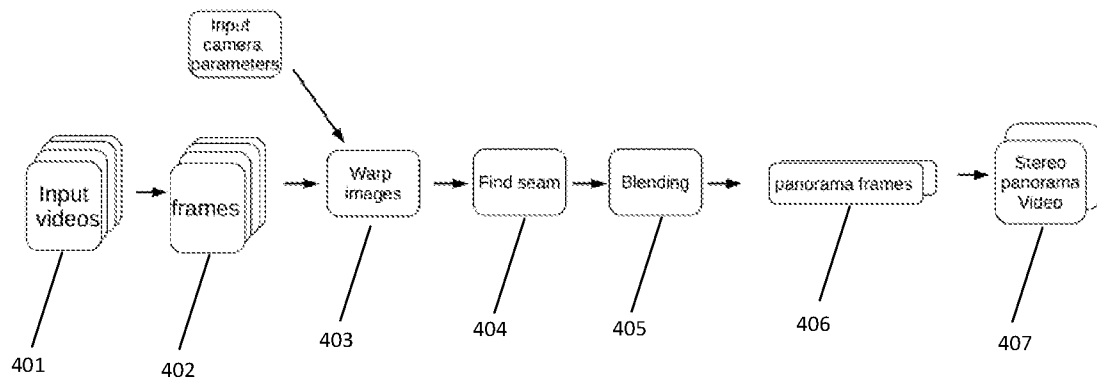


Figure 4

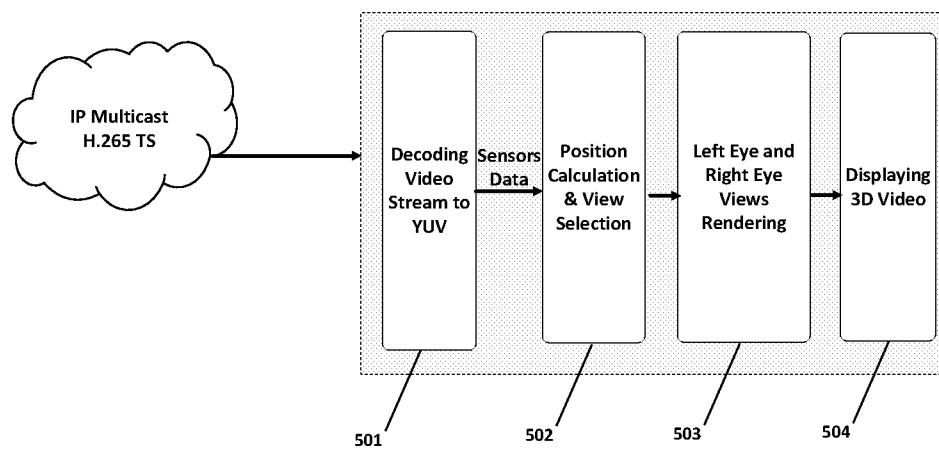


Figure 5

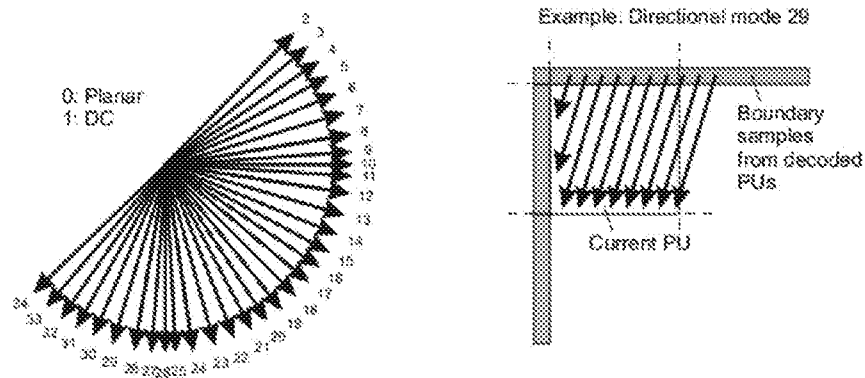


Figure 6

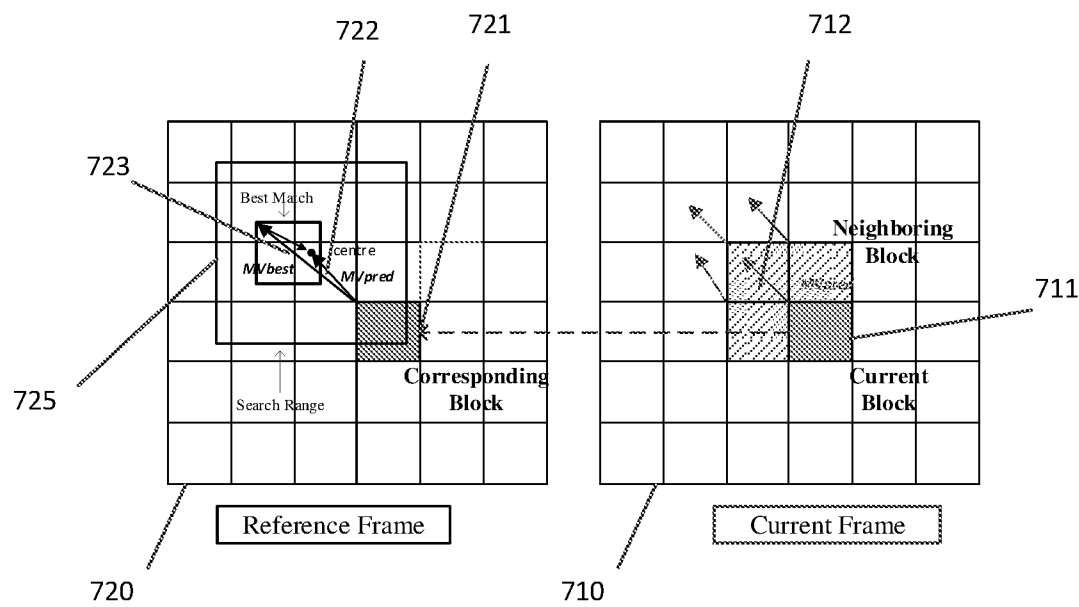


Figure 7

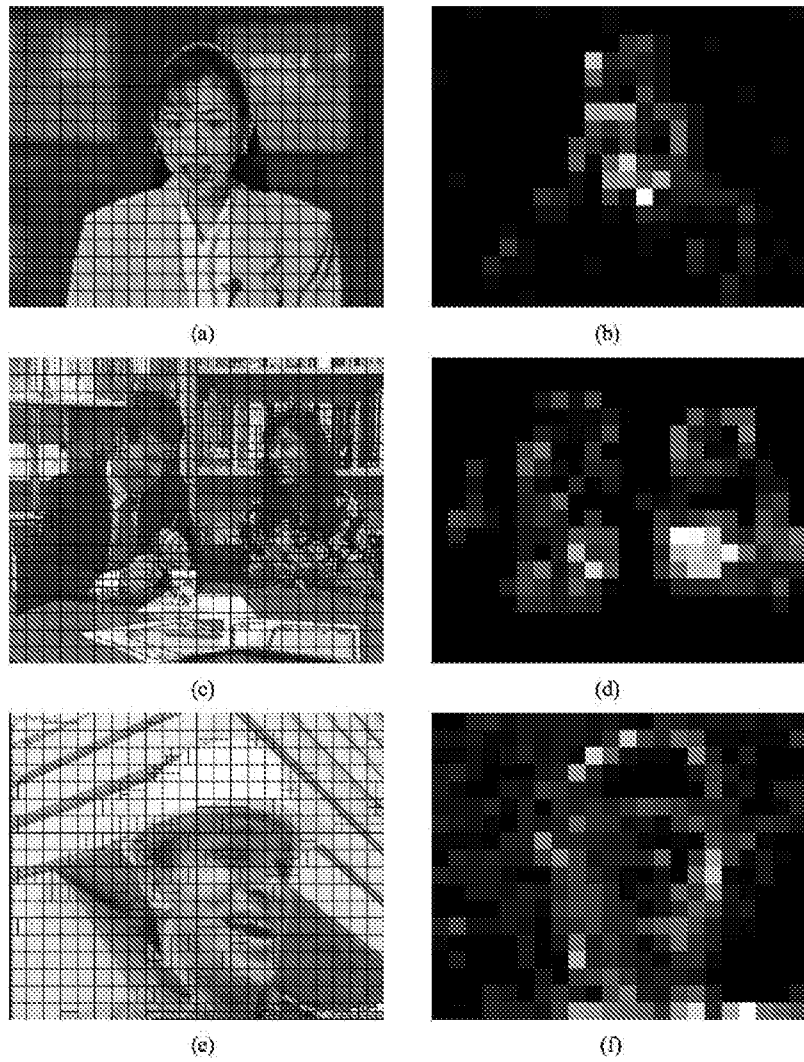


Figure 8

6/7

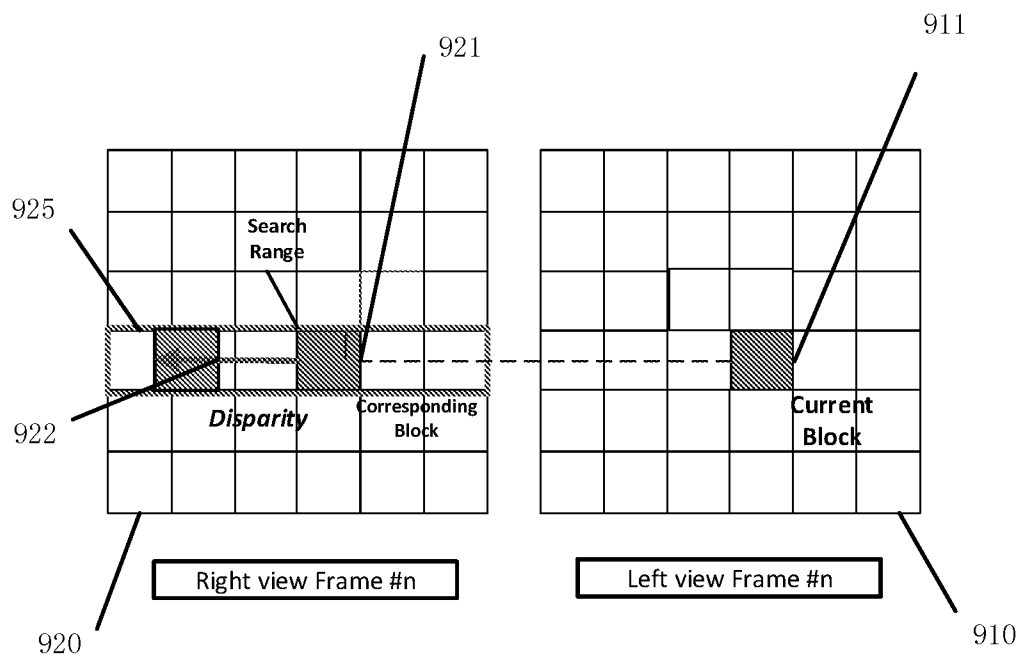


Figure 9

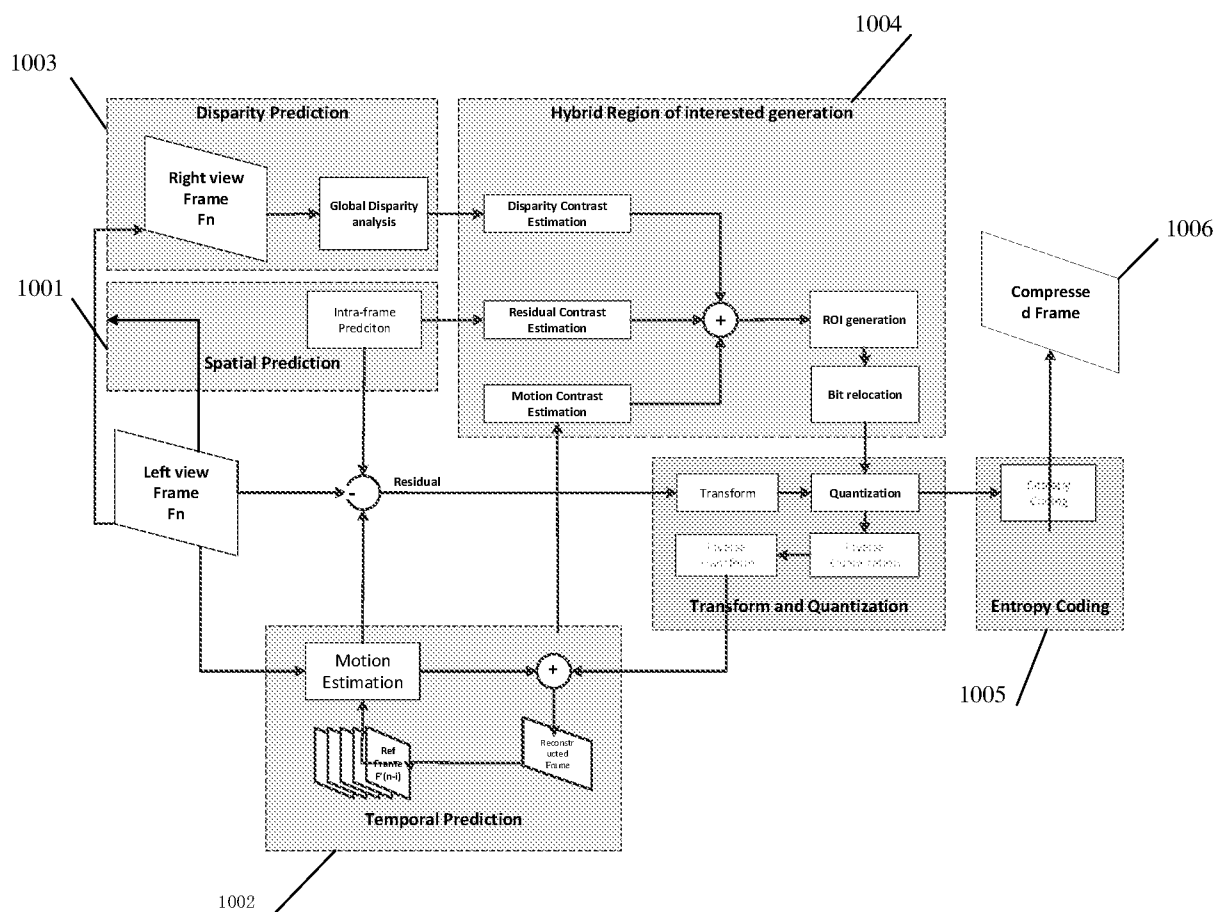


Figure 10

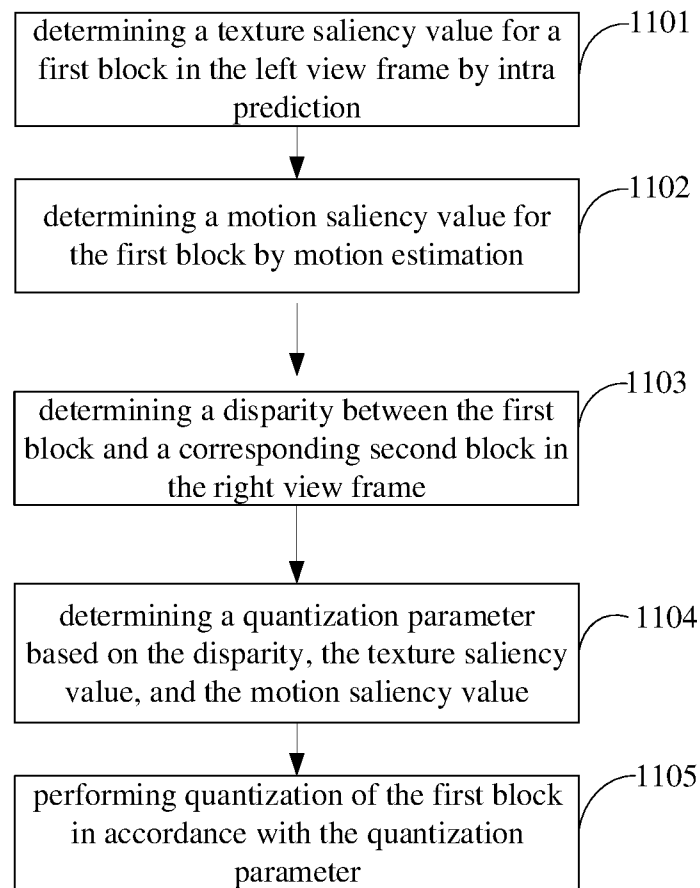


Figure 11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/071238

A. CLASSIFICATION OF SUBJECT MATTER

H04N 7/00(2011.01)i; H04N 13/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI,EPODOC,CNPAT,CNKI,IEEE:stereo+, compress+, code, encode, motion, texture, disparity, quantization, video, saliency, HEVC, left, right

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 102055982 A (ZHEJIANG UNIVERSITY) 11 May 2011 (2011-05-11) the whole document	1-20
A	CN 103108187 A (TSINGHUA UNIVERSITY) 15 May 2013 (2013-05-15) the whole document	1-20
A	US 2012236934 A1 (QUALCOMM INCORPORATED) 20 September 2012 (2012-09-20) the whole document	1-20
A	US 2014098185 A1 (DAVARI, SHAHRAM ET AL.) 10 April 2014 (2014-04-10) the whole document	1-20
A	FENG, Kun et al., "A Bit Allocation Method for Multi-view Video Coding Based on Stereoscopic Visual Saliency," <i>Journal of Optoelectronics • Laser</i> , Vol. 24, No. 10, 31 October 2013 (2013-10-31), page 1996	1-20
A	KIM, Haksun et al., "Saliency Prediction on Stereoscopic Videos," <i>IEEE TRANSACTIONS ON IMAGE PROCESSING</i> , Vol. 23, No. 4, 30 April 2014 (2014-04-30), pages 1476-1490	1-20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 October 2016

Date of mailing of the international search report

17 October 2016

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Authorized officer

WU, Qiong

Facsimile No. (86-10)62019451

Telephone No. (86-10)010-62413702

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/071238

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	102055982	A	11 May 2011	None			
CN	103108187	A	15 May 2013	None			
US	2012236934	A1	20 September 2012	WO	2012128847	A1	27 September 2012
US	2014098185	A1	10 April 2014	None			