




(86) Date de dépôt PCT/PCT Filing Date: 2005/12/06
 (87) Date publication PCT/PCT Publication Date: 2006/06/15
 (85) Entrée phase nationale/National Entry: 2007/05/16
 (86) N° demande PCT/PCT Application No.: US 2005/043987
 (87) N° publication PCT/PCT Publication No.: 2006/062919
 (30) Priorité/Priority: 2004/12/06 (US11/005,526)

(51) Cl.Int./Int.Cl. *A41D 1/04* (2006.01)
 (71) Demandeur/Applicant:
HOOD, TONY, US
 (72) Inventeur/Inventor:
HOOD, TONY, US
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : SAC A DOS VETEMENT
 (54) Title: GARMENT BACKPACK

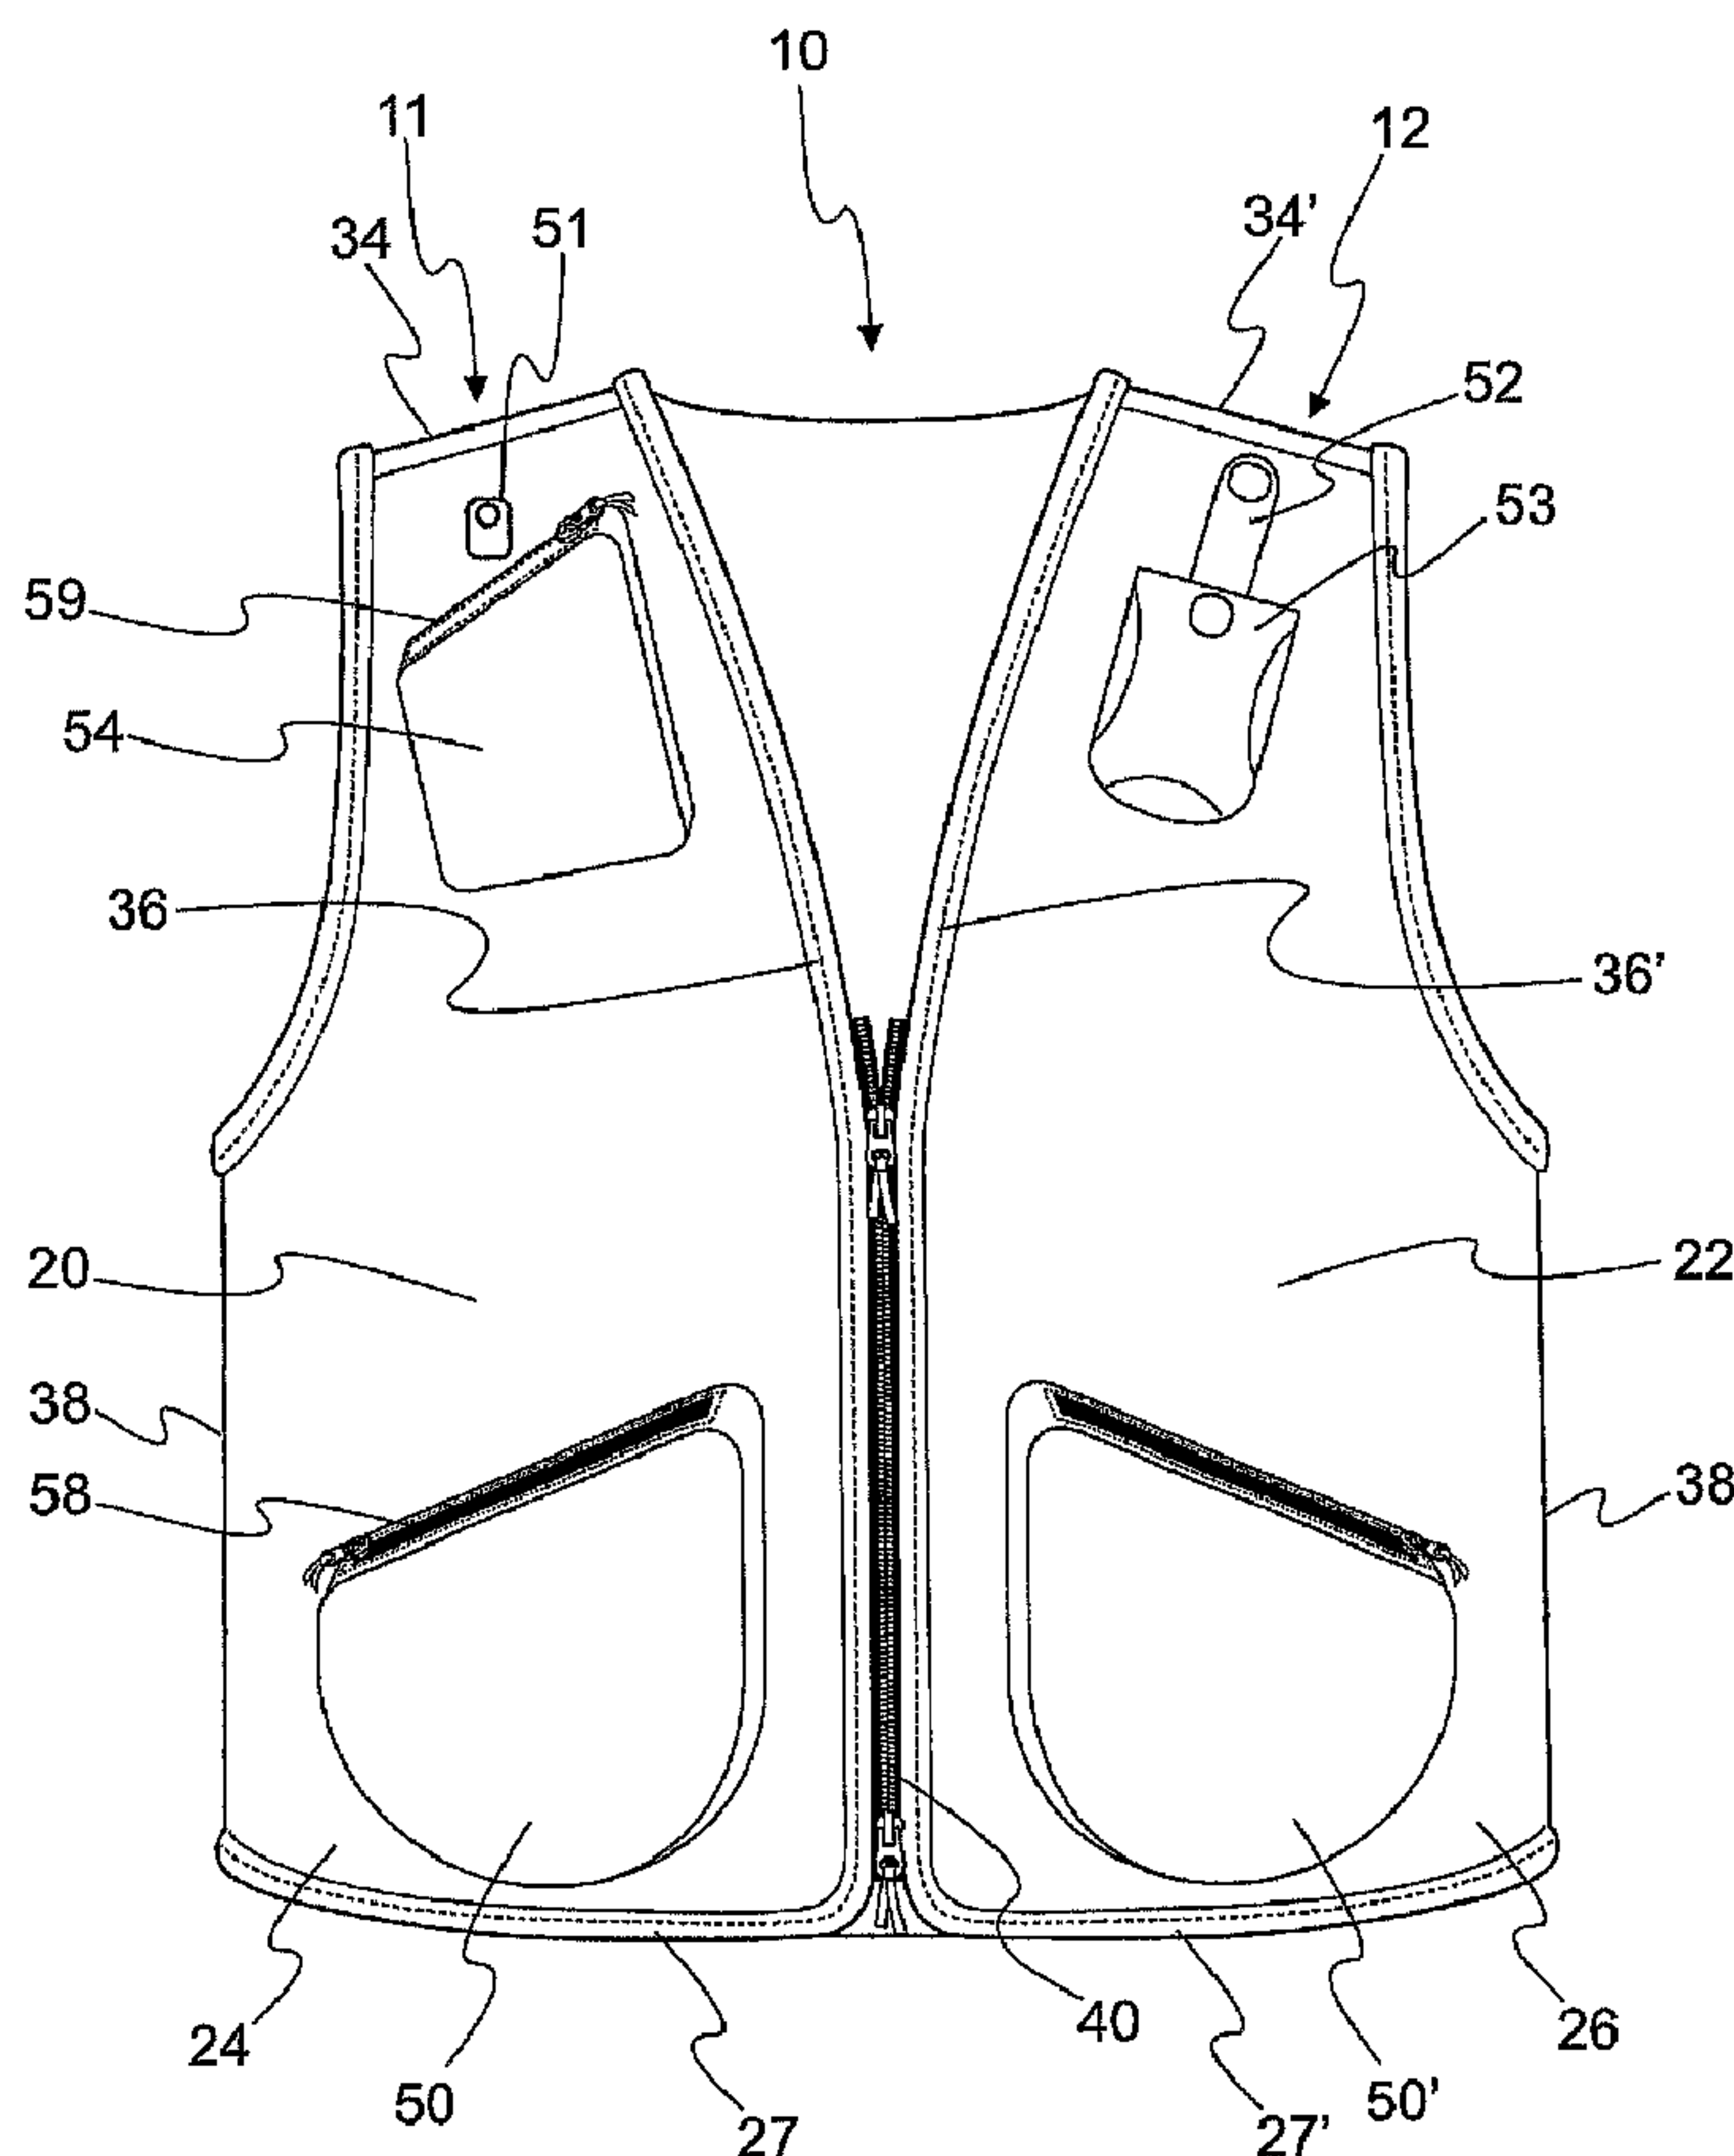

(57) **Abrégé/Abstract:**

A garment apparatus adapted and configured to have the functionality of a backpack that includes at least one pocket fixedly attached to each of an anterior portion and a posterior portion. The at least one pocket on the posterior portion covers a surface area of the posterior portion in an amount of about one percent up to fifty percent of the surface area there.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 June 2006 (15.06.2006)

PCT

(10) International Publication Number
WO 2006/062919 A3

(51) International Patent Classification:

A41D 1/04 (2006.01)

(21) International Application Number:

PCT/US2005/043987

(22) International Filing Date:

6 December 2005 (06.12.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

11/005,526 6 December 2004 (06.12.2004) US

(71) Applicant and

(72) Inventor: HOOD, Tony [US/US]; 5524 Washington Road, #201, Kenosha, Wisconsin 53144 (US).

(74) Agents: WOLFSON, Jeffrey, A. et al.; WINSTON & STRAWN LLP, Patent Department, 1700 K Street, N.W., Washington, District of Columbia 20006-3817 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: GARMENT BACKPACK

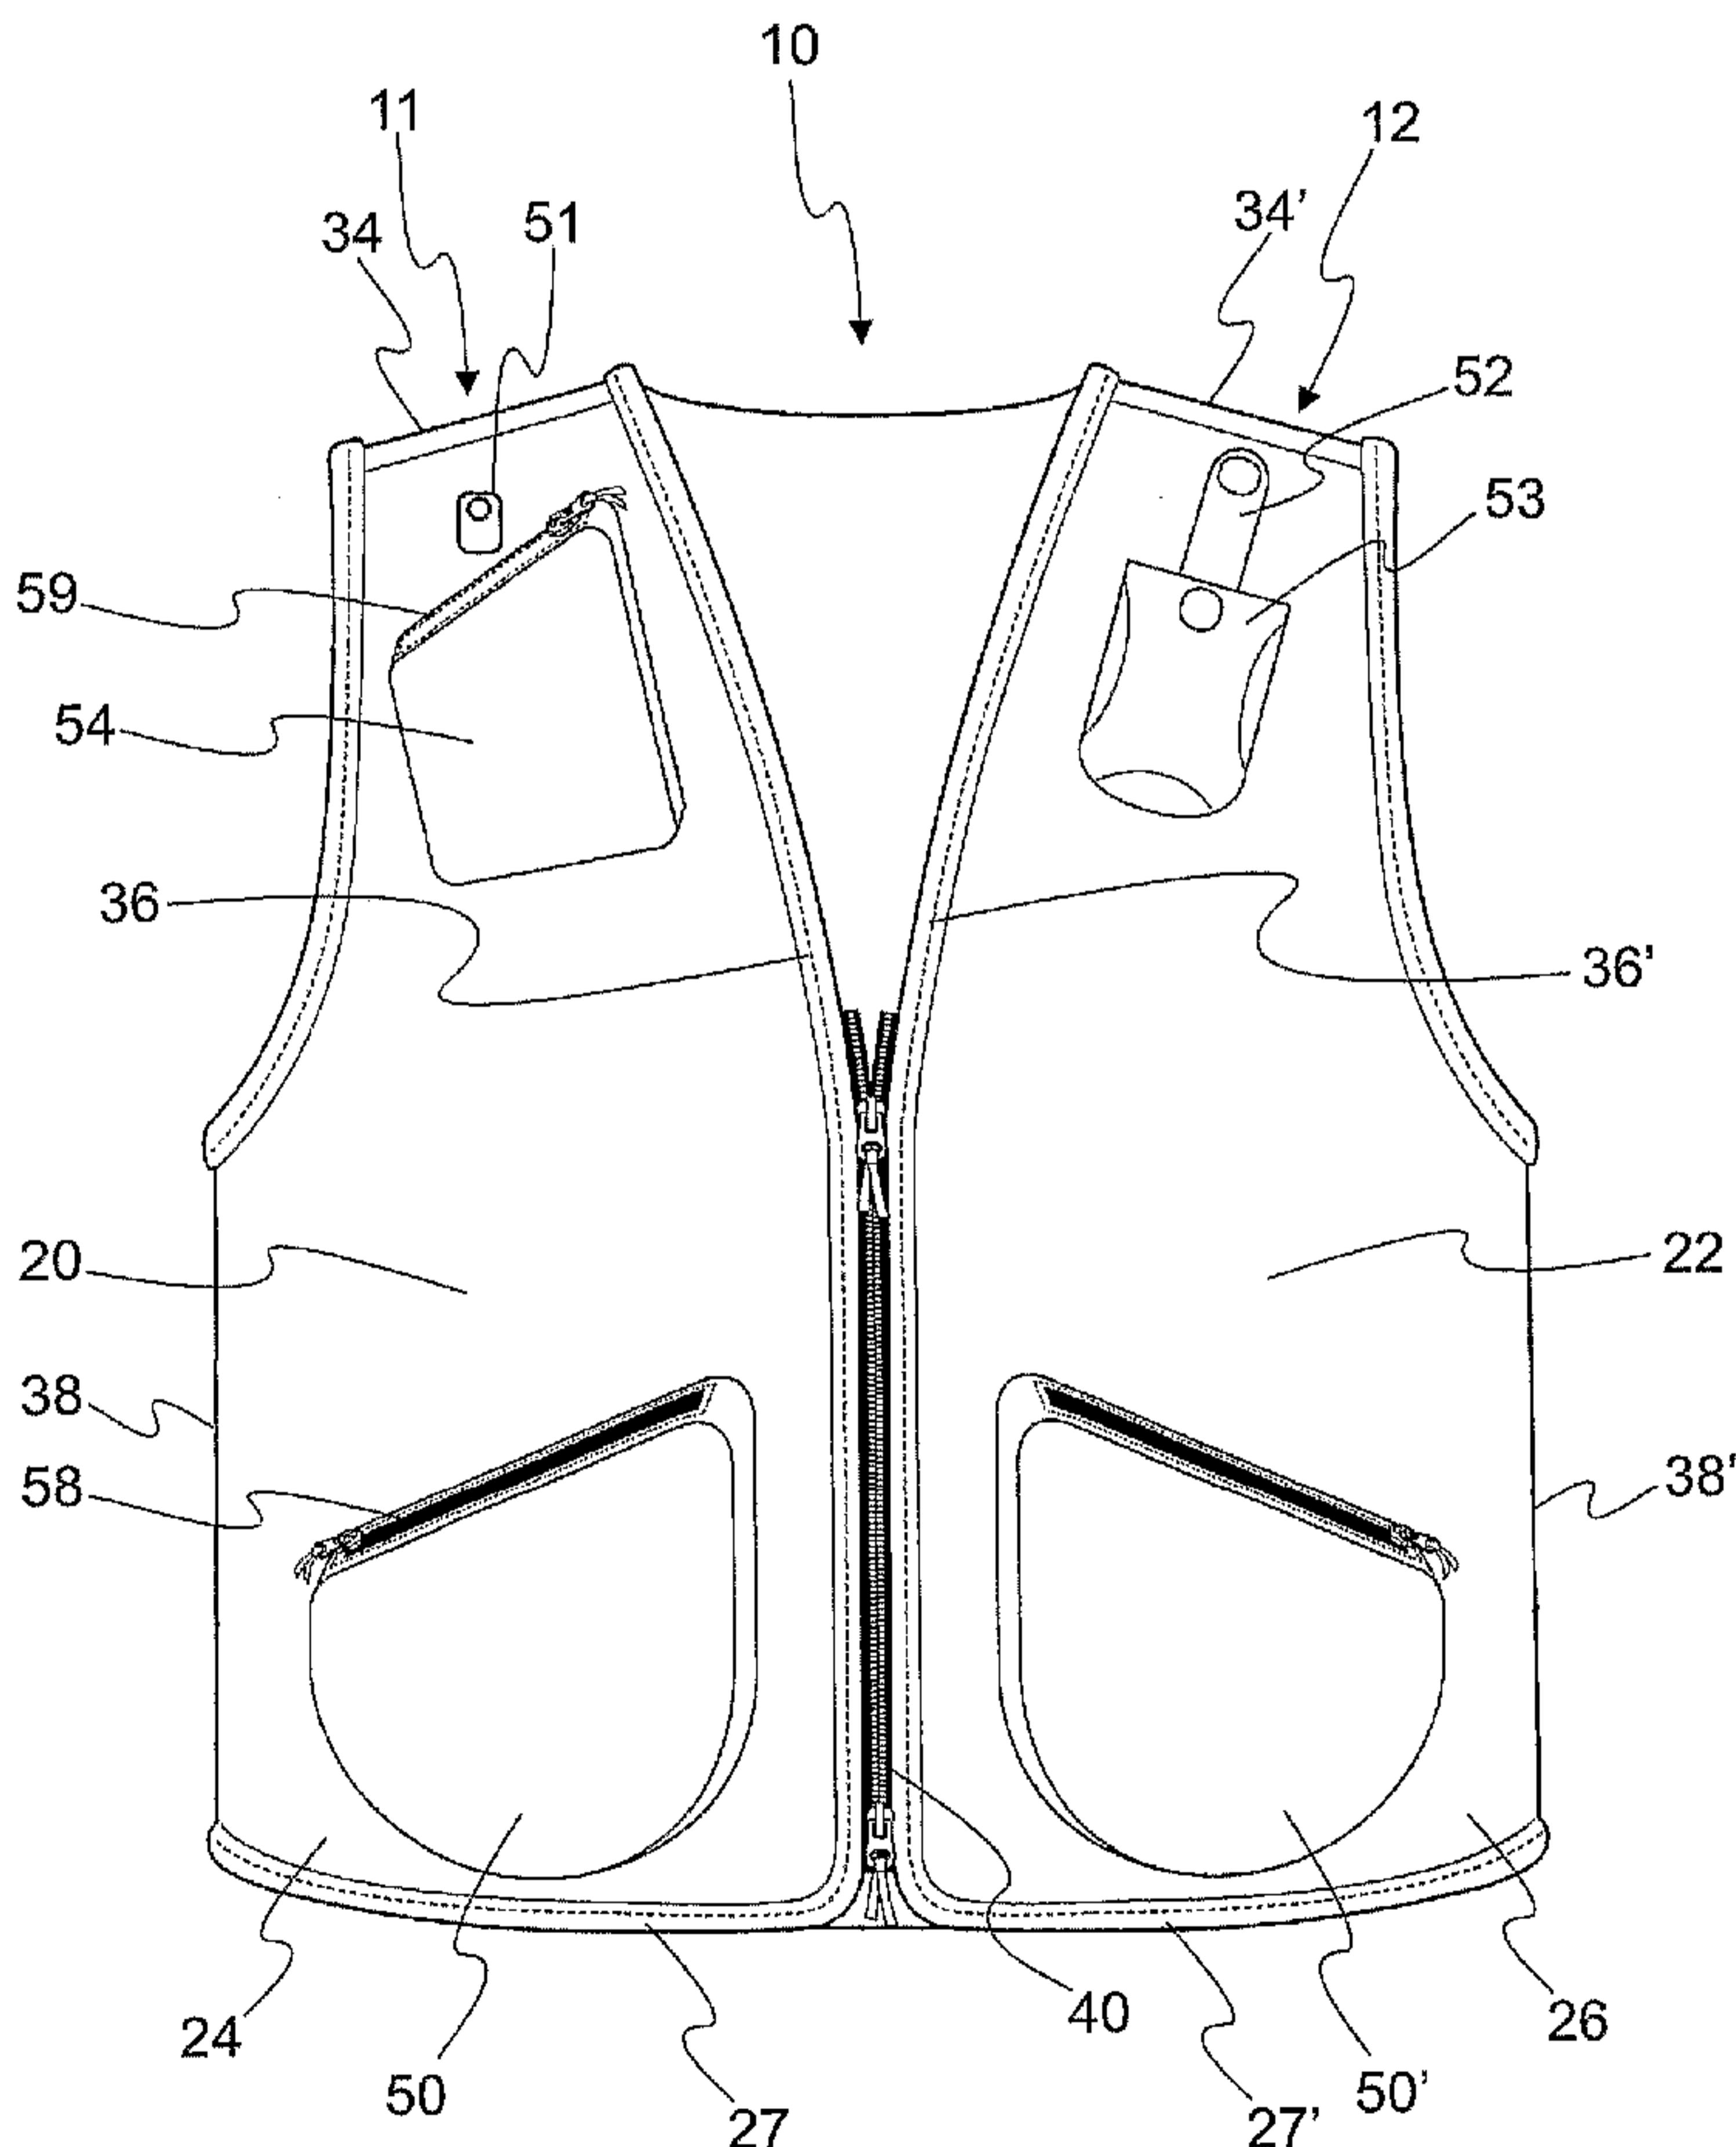

(57) Abstract: A garment apparatus adapted and configured to have the functionality of a backpack that includes at least one pocket fixedly attached to each of an anterior portion and a posterior portion. The at least one pocket on the posterior portion covers a surface area of the posterior portion in an amount of about one percent up to fifty percent of the surface area there.

WO 2006/062919 A3

WO 2006/062919 A3



(88) Date of publication of the international search report:
10 May 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

GARMENT BACKPACK

FIELD OF THE INVENTION

The present invention relates to backpacks, including, but not limited to,
5 backpacks used to carry books, school supplies, and the like.

BACKGROUND OF THE INVENTION

Backpacks are known and commonly used. Typical backpacks, however, are
supported upon a user through use of shoulder straps and belts. This results in back strain and
10 muscle fatigue.

Also typical to currently available backpacks is an arrangement whereby items
carried within a backpack are generally carried posterior to the user, making for a large bulge
extending posteriorly from the user. Backpacks, as their generic name implies, allow
respective users to carry items on their backs, and do not allow for distribution of weight and
15 cargo toward a user's anterior side. This results in uneven weight distribution and
uncomfortable portage of items within a backpack.

SUMMARY OF THE INVENTION

The present invention is directed to a garment apparatus for use as a backpack.
20 A preferred embodiment of the garment apparatus includes an anterior portion that has an
interior side and an exterior side, a surface area, and being divided into a right half and a left
half, each half having a top edge, a medial edge, a bottom edge, and a distal edge. The
anterior portion also includes a releasable fastener to releasably fasten the medial edges of the
right and left halves, and at least one pocket fixedly attached thereto. In an alternative
25 embodiment, the right and left halves of the anterior portion are made of a unitary
construction having an interior side, an exterior side, a surface area, a top edge having a left
side and a right side, a bottom edge, at least two side edges, and at least one pocket fixedly
attached thereto, the garment apparatus being worn by pulling it over the head.

The garment apparatus also includes a posterior portion that has an interior
30 side, an exterior side, a surface area, a right edge, a left edge, a top edge having a right and left
side, and a bottom edge. The posterior portion includes at least one pocket fixedly attached
thereto that covers about 1 percent up to 50 percent of the surface area of the posterior portion,
and which is disposed predominantly adjacent an upper half of the posterior portion. In one
preferred embodiment, the posterior portion includes a second pocket fixedly attached thereto

that covers about 1 percent up to 50 percent of the surface area of the posterior portion, and which is disposed predominantly adjacent a lower half of the posterior portion.

The anterior and posterior portions are joined such that the top edge of the right half of the anterior portion is joined to the right side of the top edge of the posterior portion from a part of the right edge of the posterior portion to the right side of a collar, and the top edge of the left half of the anterior portion is joined to the left side of the top edge of the posterior portion from a part of the left edge of the posterior portion to the left side of the collar, such that an opening or aperture is surrounded by the collar.

Preferably, the garment apparatus further includes at least one resilient section, the resilient section having an anterior edge and a posterior edge. The anterior edge is preferably releasably or fixedly joined to the anterior portion and the posterior edge is preferably releasably or fixedly joined to the posterior portion, with the resilient section comprising a flexible and resilient material.

In one embodiment, the anterior portion includes three to four pockets at least one of which is sized and dimensioned to receive and retain a cell phone. Additionally, at least one of the pockets is sized and dimensioned to receive and retain a camera or CD or DVD player. Preferably, at least one of the pockets includes an internal port that defines a passage from the interior of the pocket through to the interior surface of the garment.

Preferably, the garment apparatus further includes a second releasable fastener that is configured and adapted to releasably fasten the left edge of the posterior portion to the distal edge of the left half of the anterior portion, and the second releasable fastener is also preferably configured and adapted to releasably fasten the right edge of the posterior portion to the distal edge of the right half of the anterior portion, or both. The second releasable fastener preferably includes at least one of a snap, button, zipper, hook and loop fastener, adjustable belt portion, or tie.

The garment apparatus preferably further includes at least one shoulder pad attached to the interior side of the anterior and posterior portions proximal to the joined top edges of the posterior and anterior portions, at least one cushioning material in at least one pocket, at least one interior lining associated with the apparatus, or a combination thereof. Also, the garment apparatus preferably further includes a releasable fastener to releasably fasten at least one of the pockets to help retain or transport items residing therein. More preferably, the releasable fastener comprises at least one of a zipper, snap, button, clip, hook and loop fastener, tie, and drawstring.

In one embodiment, the first pocket that is fixedly attached to the posterior portion is located substantially proximal to the top edge of the posterior portion. In another embodiment, a second pocket is fixedly attached to the posterior portion predominantly in the lower half thereof, the second pocket is located substantially proximal to the bottom edge of the posterior portion. In another embodiment, one of the pockets fixedly attached to the anterior portion is a cell phone pocket configured and dimensioned so as to substantially conform to a cell phone when disposed therein. Preferably, the total pocket volume available on the anterior portion is sufficient to counterbalance the total pocket volume available on the posterior portion.

Another preferred embodiment of the garment apparatus includes an anterior portion having an interior side and an exterior side, a surface area, a top edge having a right side and a left side, a bottom edge, and at least two side edges and at least one pocket fixedly attached thereto, and a posterior portion having an interior side, an exterior side, a surface area, a right edge, a left edge, a top edge having a right and left side, and a bottom edge, and having at least one pocket fixedly attached thereto. The anterior and posterior portions are associated such that the right and left sides of the top edge of the anterior portion is connected adjacent the right and left sides of the top edge of the posterior portion to leave an opening therebetween. The at least one pocket includes an internal port that provides a closeable opening from an inside portion of the pocket to the interior side of the garment apparatus.

The present invention thus discloses a novel apparatus that addresses many of the deficiencies of traditional backpacks.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a preferred embodiment of the apparatus from an anterior view;

Fig. 2 illustrates a preferred embodiment of the apparatus from a lateral view; and

Fig. 3 illustrates a preferred embodiment of the apparatus from a posterior view.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A more ergonomic backpack has now been discovered in that the pockets are distributed more closely over the center of gravity of a wearer, or user, compared to a traditional backpack by being disposed on a garment apparatus. This advantageously permits

a forward shift of weight compared to a conventional backpack. In a preferred embodiment shown in Figs. 1-3, the apparatus 10 includes a garment that includes an anterior portion 20 and a posterior portion 30. Referring initially to Fig. 1, the anterior portion 20 has an interior side or surface (not shown) and an exterior side or surface 22 having a surface area. The
5 anterior portion 20 is divided into a right half 24 and a left half 24', each half having, respectively, a top edge 34,34', a medial edge 36,36', a distal edge 38, 38', and a bottom edge 27,27'. As used herein, the terms "right" and "left" are used with references to the right and left sides of the user's body while wearing the garment apparatus.

Referring to Fig. 3, the posterior portion 30 has an interior side or surface (not
10 shown), an exterior side or surface 31 having a surface area, a right edge 32, a left edge 33, a top edge having a right side 35 and a left side 35', a bottom edge 28, and a collar 15 having a right side 16 and a left side 17.

The anterior portion 20 and the posterior portion 30 are joined such that the top
15 edge 34 of the right half 24 of the anterior portion 20 is joined, preferably fixedly, along a part of the right side of top edge 35 of the posterior portion 30, preferably substantially or entirely from the right edge 32 of the posterior portion 30 to the right side 16 of the collar 15. The anterior portion 20 and the posterior portion 30 are also joined, preferably fixedly, such that the top edge 34' of the left half 26 of the anterior portion 20 is joined along a part of the left side of the top edge 35' of the posterior portion 30, preferably substantially or entirely from
20 the left edge 33 of the posterior portion 30 to the left side 17 of the collar 15.

The respective right and left top attachment areas of the anterior portion 20 and the posterior portion 30 define right and left shoulder portions 11,12 that are preferably configured to rest on the shoulders of the user when the apparatus is worn. In one
25 embodiment, the right and left shoulder portions 11,12 include additional padding preferably sewn therein. Preferably, the padding is attached to the interior surface of both the anterior portion 20 and posterior portion 30 proximal to where the top edges 35,35' of the posterior portion 30 are joined to the top edges 34,34' of an anterior portion 20. In this position, the padding can be located over a user's shoulder to help cushion any load imparted thereon by the weight of cargo within any pockets on the garment apparatus. Additional cushioning material
30 can also be disposed adjacent or around any or all of the pockets disposed on the anterior or posterior portions. Additional cushioning material can disposed within a portion of any or all of the pockets, *e.g.*, lining the interior of a pocket. The portion can be a part or the entire pocket(s), to help protect and cushion the contents contained therein. The cushioning material could also or alternatively be an insulating material to minimize or prevent the transfer of

heat, electricity, or moisture away from or into a pocket. Any suitable material with the desired characteristics can be included or used alone or in combination with any other suitable material for the cushioning material or the interior lining of the apparatus.

In another embodiment, the garment apparatus can include an interior lining, preferably made of a compatible or a similar material as the cushioning material, even though it can provide less of a cushioning effect than the cushioning material simply by, *e.g.*, being a thinner layer or a material with fewer layers. The interior lining is preferably removably attachable to one or more interior surfaces of the garment apparatus. Such a lining can advantageously provide one or more of the following: added warmth to the user, wicking moisture away from the user, or protecting the user from any sharp or jutting edges of the contents contained in the pockets, or any combination of these benefits. For example, the interior lining can be attached via a plurality of buttons or other fastener(s) spaced strategically throughout the interior of the garment apparatus, such as one at each sleeve, at least one fastener at the collar, and at least one fastener disposed on the lower half preferably substantially proximal toward the lower edge of the apparatus.

The anterior portion 20 and the posterior portion 30 are also typically joined such that the distal edge 38 of the right side 24 of the anterior portion 20 is joined or otherwise attached to a part of the right edge 32 of the posterior portion. Similarly, the distal edge 38' of the left side 26 of the anterior portion 20 is joined or otherwise attached to a part of the left side 33 of the posterior portion 30. In one embodiment, these parts can be joined by one or more side attachments, which join the anterior and posterior portions laterally. Preferably, each side attachment is affixed, preferably by stitching or other permanent joining material, to provide lateral support to the user when wearing the garment apparatus. The side attachment can be a separate portion of material from the anterior and posterior portions, or simply a zone where the posterior and anterior portions are joined permanently. Alternatively, as shown in Fig. 2, the side attachment 60 can be simply a releasably engageable fastener that is, for example, a zipper; one or more buttons, clips, or snaps; a hook and loop portion; tie; drawstring; or similar releasable fastening mechanism. In one embodiment, the right and left side attachments are both present and include adjustable expansion fasteners, such as adjustable two-way zippers, that allow the user to control the degree of side attachment, and thus readily tailor the size of the apparatus to the user's build. For example, a zipper can be adjusted such that the side attachment is complete, substantially complete, partially complete, or unfastened, thus advantageously allowing the apparatus to be worn over bulkier clothes or a larger user if needed. These fasteners also provide a way for a user to create a snug fit that

can be beneficial to both comfort and ergonomical distribution of the weight of cargo within the apparatus.

The anterior portion 20 preferably includes a medial releasable fastening mechanism 40 to releasably fasten the medial edge 36 of the right half 24 to the medial edge 36' of the left half 26. The fastening mechanism can include those noted above, and may be the same or different. Preferably, the releasable fastener 40 is an adjustable zipper, e.g., two-way and with a fabric zipper pull, as shown in Fig. 1. In an alternative embodiment, the right and left halves of the anterior portion are made of a unitary construction such that the garment apparatus can be easily pulled over the user's torso rather than fastening the right and left halves. In such an embodiment, no releasable fastener is included on the apparatus to fasten the two integral halves.

The anterior portion 20 preferably includes at least one pocket fixedly attached to the anterior surface 22. In one embodiment, the pockets are releasably attachable to the exterior surface 22 by a fastening mechanism, such as a zipper, clips, or snaps. Preferably, the anterior portion 20 includes at least one large pocket that covers at least about 10% to 40% of the exterior surface 22 of the anterior portion 20, and more preferably covers at least about 20% to 35% of the exterior surface 22. The large pocket is preferably disposed at the lower portion of the anterior portion 20, and includes a top releasable fastener of the types described above, which may be the same or different, to provide easy and convenient access by the user to the contents therein. The large pocket can have any shape such as rounded, square, rectangular, or asymmetric. Preferably, the large pocket is configured and dimensioned to contain relatively large and bulky items, such as a CD player or stack of CDs, or a camera. The large pocket is also preferably made of a material that is sufficient to protect the contents therein from damage due to external forces, for example, scratching of CDs or damage to a CD player. Preferably, one pocket is included on the left half and one on the right half, each being predominantly on a lower half of the anterior portion. These can each be symmetrical or asymmetrical, and can be mirror images of each other if desired to help balance the weight in a symmetrical fashion regardless of the shape of the pockets. In another preferred embodiment, the anterior portion includes these two pockets, as well as a cell phone pocket described herein, and more preferably, the posterior portion includes at least two pockets and preferably at least three where at least one is disposed predominantly in the upper half of the posterior portion and preferably substantially adjacent to the top edge of the posterior portion.

In one embodiment, the large pocket includes an internal port (or channel) that defines a passage from the interior of the large pocket through to the interior surface of the

anterior portion 20. The internal port is preferably reversibly closeable so that it can be closed when not in use, such as by one of the fasteners described herein. Advantageously, the internal port allows an earphone cord to be threaded therethrough such that the ear phone cord can be connected at one end to a device, such as a CD player, contained in the large pocket while substantially the rest of the cord is disposed between the user's body and the interior surface of the anterior portion 20. The opposite end of the cord can exit the interior of the apparatus 10 near the collar 15 for placement adjacent the user's ears. This allows the user to safely wear the earphones while the CD player is contained within the large pocket, thus preventing or substantially reducing the possibility of entanglement of the earphone cord on external objects contacting the wearer.

In one preferred embodiment, which is shown in Fig. 1, the apparatus 10 includes two asymmetrically configured large pockets 50,50' disposed, respectively, from about 0.25 to 2 inches from the bottom edges 27,27' of the right and left sides 24,26. Each of the large pockets 50,50' preferably has a maximum height of about 7 inches near the medial side and a minimum height of about 4 inches, preferably about 5.5 inches, near the distal side. Each pocket also has a width of about 4 to 7 inches, and a depth from the exterior surface 22 of about 1 to 2.5 inches, preferably 1.25 inches to 2 inches. Each of the large pockets 50,50' includes a top zipper 58 with a fabric zipper pull for securing items therein.

Also as depicted in this preferred embodiment of FIG. 1, the anterior portion 20 also preferably includes two side hand pockets disposed at the lower portion of the anterior portion 20 such that the user can comfortably insert the user's hands therein while the user's arms are in a relaxed position. Preferably, each of the side hand pockets is lined with a water-resistant or water-proof material, for example nylon, to help the user retain warmth to the hands inserted therein. The side hand pockets also preferably include a releasable fastener as described herein, which may be the same or different, to secure contents disposed therein other than hands. In a preferred embodiment, the side pockets are disposed substantially at the position of each large pocket, between the large pocket and the interior surface of the anterior portion 20.

The anterior portion 20 preferably includes at least one small pocket that covers from about 1% to 10% of the exterior surface 22 of the anterior portion 20. Preferably, the small pocket is disposed at the upper portion of the anterior portion 20, near the shoulder portions 11,12, and includes a top or side releasable fastener of the types described herein, although it may be the same or different, to provide easy access by the user to the contents therein. The small pocket can have any shape such as rounded, square, rectangular, or

asymmetric, and is preferably configured and dimensioned to contain one or more relatively small items, such as keys, coins, mini-DV tapes, flash sticks or cards, or edibles, *e.g.*, gum, candy, *etc.*

In the preferred embodiment shown in Fig. 1, the garment apparatus 10 includes a small pocket 54 disposed on the right side 24 of the anterior portion 20 between about 2 to about 3 inches from the top edge 34. The small pocket 54 has an asymmetric configuration, preferably having a maximum height of about 5.5 inches near the medial side and a minimum height of about 2.5 inches near the distal side. The small pocket 54 also has a width of about 1.5 inches to 4 inches, preferably about 2 inches to 3.5 inches, and a depth from the exterior surface 22 of about 1 inches to 2.5 inches, preferably from about 1.25 inches to 2 inches. The small pocket 54 includes a top zipper 59 with a fabric zipper pull for securing items therein.

The anterior portion 20 also preferably includes a cell phone pocket that is sufficiently dimensioned to fit standard cell phone sizes, optionally with their own case. The cell phone pocket in one embodiment preferably covers about 1 to 8%, preferably about 2 to 6%, of the exterior surface 22 of the anterior portion 20. Preferably, the cell phone pocket is made of a flexible material, and is configured and dimensioned to provide a substantially snug fit for containing cell phones of various sizes therein. The cell phone pocket is also preferably disposed at the upper portion of the anterior portion 20 such that the cell phone contained therein is relatively close the user's head to allow the user to easily hear ring tones, and to minimize the need to remove it to answer. An upper cell phone pocket also permits use of shorter cords for any wired earpiece or microphone the user might like to include compared to a traditional pocket down by the waist, at the lower edge of the anterior portion. Additionally, the cell phone pocket preferably includes a top or side releasable fastener as described herein. While the cell phone pocket fastener may be any of the fasteners described herein, preferably it is one or more snaps, or a hook and loop portion, to provide rapid and frequent access by the user to the cell phone therein.

In the preferred embodiment shown in Fig. 1, the apparatus 10 includes a cell phone pocket 53 disposed on the left side 26 of the anterior portion 20 between about 2 to about 3 inches from the top edge 34'. The cell phone pocket 53 includes a hook and loop-secured strap 52 that can be pulled over the top of a cell phone to secure the cell phone within the cell phone pocket 53. The cell phone pocket depicted preferably has a maximum height of about 4.5 inches, a maximum width of about 2.5 inches, and a maximum depth of about 1 inch. In one embodiment (not shown), pockets can be made separately available and

dimensioned specifically to fit particular models of cell phone to permit each wearer to customize the garment apparatus to their model cell phone.

The anterior portion 20 can also include a variety of attachment portions disposed on the exterior surface 22 of the anterior portion 20. Such attachment portions can include releasable or non-releasable rings, hooks, straps, loop snaps, or the like to provide rapid access to items such as keys or gloves. In the preferred embodiment shown in Fig. 1, the apparatus 10 includes a fabric snap-secured strap 51 disposed on the upper right side 24 of the anterior portion 20, the strap being about 0.5 inches to 2 inches in length.

The anterior portion 20 also preferably includes at least one interior pocket, and preferably two with one on the right and left sides, disposed in the interior surface of the anterior portion 20. Such interior pocket(s) are preferably configured and dimensioned for containing small items such as a wallet or identification cards, and provide a relatively safer location for these items. Optionally, but preferably, the interior pockets include a top releasable fastener of the types described herein to further secure items and minimize theft.

The posterior portion 30 includes at least one pocket fixedly attached to the exterior surface 31. In one embodiment, the pockets are releasably attachable to the surface 31 by a fastening mechanism, such as a zipper. The posterior portion 30 includes at least one upper back pocket that is predominantly disposed on an upper half thereof, and preferably entirely in the upper half of the posterior portion 30. In a preferred embodiment, the upper back pocket is proximate the shoulder portions 11,12. Preferably, at least one lower back pocket is also disposed predominantly, and preferably entirely, on the lower half of the posterior portion 30. Preferably, the at least one lower back pocket is proximate the bottom edge 28. Multiple top and bottom pockets are preferably staggered with respect to each other, with one being closer to the top or bottom, respectively, than others of the same type. Each of the upper and lower back pockets cover at least about 1% up to 50%, preferably 5% to about 45%, and more preferably 10% to about 40%, of the exterior surface 31 of the posterior portion 30. For example, an upper back pocket can be about 25% to 40% and a lower pocket can be about 15% to 30% of the posterior portion. Preferably, the back pockets include a top releasable fastener of the types described herein. The upper and lower back pockets can be sized and dimensioned to advantageously distribute the total pocket volume of the posterior portion among multiple pockets to minimize or prevent overfilling any one pocket.

Preferably, the upper and lower back pockets have a snug fit such that the contents of each pocket are supported close to the user's body and retained within the pocket to prevent substantial shifting of the weight, thus reducing the carrying strain on the user or

5 overturning of objects that may necessitate transport in a specific direction, *e.g.*, a liquid containing vessel that needs to be carried upright. Preferably, the pockets are made of a resilient material that retains its shape and returns to its shape if modified temporarily to hold cargo therein. The back pockets also preferably include an adjustable fastening mechanism to further aid in securing the contents in the pocket snugly, and preferably to keep portions of the pocket closer to and further from the wearer in contact with the cargo in the pocket. This fastening mechanism preferably retains the cargo substantially proximal, or close, to the user's body as defined by the inner portion of the pocket adjacent the garment apparatus. In one embodiment, for example, the adjustable fastening mechanism includes at least one hook and loop fastener with one end secured to a portion of the outer surface of the pocket and the other end secured to a portion of the outer surface of the posterior member such that the outer surface of the pocket can be pulled and secured close to the posterior member. Various other readily achieved configurations can be implemented by those of ordinary skill in the art in view of the disclosure herein.

15 The upper and lower back pockets are preferably configured and dimensioned to contain larger items therein, such as files, folders, books, pamphlets, water bottles, and the like. The back pockets can also each include dividers and additional compartments therein to help store or retrieve items within the back pockets in a convenient and organized manner. Additionally, the total pocket volume available on the anterior portion 20 is preferably sufficient to counterbalance the total pocket volume available on the posterior portion 30 to provide added comfort to the user while wearing the apparatus. For example, pocket volumes that are within about 20 volume percent of each other, preferably within about 10 volume percent of each other, and more preferably within about 5 volume percent are sufficiently counterbalanced. Of course, counterbalancing is not required and will in part depend on the density of cargo a user places in the pockets.

25 In one embodiment, at least one of the back pockets (on the posterior portion), preferably the lower back pocket, can include an internal port (or channel) that defines a passage from the interior of the back pocket through to the interior surface of the posterior portion. The internal port is preferably reversibly closeable so that it can be closed from either side when not in use, such as by one of the fasteners described herein or a lensing mechanism on the aperture. Advantageously, the internal port allows the user to easily access the contents stored in the back pocket by simply reaching behind to the interior surface of the garment and accessing the pocket contents from the interior surface of the garment rather than from the outside releasable fastener or opening.

The internal port can be an opening that is as wide as the outer aperture that can be disposed on the outer surface of each pocket. In one embodiment, an internal port on at least one pocket can simply be wide enough to permit 1 to 3, preferably 1 to 2, cords or wires to pass therethrough to connect cargo with an item outside the pocket that is in close association with the user of the garment apparatus. For example, a CD player or iPod® could be disposed in the pocket, and a wire or pair of headphone wires can pass from the contained device through the internal port to the inside of the garment apparatus (or in between internal layers thereof) and then up to the wearer's ears for enjoyment without dangling wire(s) to be tangled except between, *e.g.*, the collar of the apparatus and the ears, which is likely to be a few inches at most. Also, a cord can be tied or affixed to an anchor within the pocket, such as cushioning material therein or a cargo item that is larger than the internal port. This cord can pass through the internal port and be connected to, *e.g.*, a valuable piece of jewelry, a hat, or a pair of eyeglasses, to help ensure or even prevent it from accidentally or intentionally being lost or stolen.

In the preferred embodiment shown in Fig. 3, the apparatus 10 includes two upper back pockets 55,65 and two lower back pockets 66,67. The two upper back pockets 55,65 include a large pocket 55 and a small pocket 65, with the small pocket 65 disposed on the outer surface of the large pocket 55. The large pocket 55 has a maximum height of about 10 inches and a maximum depth of about 4 inches, and the small pocket 65 has a maximum height of about 8 inches and a maximum depth of about 2.5 inches. The maximum widths of the large and small pockets 55,65 are both about 12 inches. Preferably, the top of the large pocket 55 is disposed within about 2 inches, preferably from about 0.1 inches to 1 inch, from the shoulder portions 11,12, and the top of the small pocket 65 is disposed within about 2 inches, preferably from about 0.1 inches to 1 inch, from the top of the large pocket 55. The position of the upper back pockets 55,65 on the posterior portion 30 advantageously allows the user to more readily and rapidly access the contents of the pockets over the user's shoulder. Both upper back pockets 55,65 include a top zipper with a fabric zipper pull for securing items therein.

The two lower back pockets 66,67 include a large pocket 66 and a small pocket 67, with the small pocket 67 disposed on the outer surface of the large pocket 66. The large pocket 66 has a maximum height of about 10 inches and a maximum depth of about 4 inches, and the small pocket 67 has a maximum height of about 8.5 inches and a maximum depth of about 1.5 inches. The maximum widths of the large and small pockets 66,67 are both about 14 inches. Preferably, the bottom of the large pocket 66 is disposed about 1 inch from the

bottom edge 28 of the posterior portion 30, and the top of the small pocket 67 is disposed about 4 inches from the top of the large pocket 66. The small pocket 67 includes a top zipper with a fabric zipper pull for securing items therein. An exemplary upper pocket may be about 6 inches to 8 inches by 10 inches, while an exemplary lower pocket is about 8 inches to 9
5 inches by about 12 inches to 16 inches.

The large pocket 66 as shown includes a biased top opening and an optional but preferable flap cover 64 that extends from and covers the top of the large pocket 66. The flap cover 64 also covers the top of the small pocket 67, and is secured to the surface of the small pocket 67 by, *e.g.*, a releasable buckle mechanism 63 or other suitable fastener
10 described herein (not shown). Preferably, the female portion of the buckle mechanism 63 is fixedly attached to the center surface of the small pocket 67, and the male portion of the buckle mechanism 63 is fixedly attached to the center of the lower edge of the cover flap 64. In another embodiment, the cover flap can include multiple buckle mechanisms for securing the cover flap over both the large pocket and the small pocket. Additionally, the large pocket
15 can also include a top zipper or drawstring to provide added security to the items therein.

The preferred embodiments previously described are for exemplary purposes only, and those of ordinary skill in the art can readily determine other suitable configurations where the anterior portion 20 and posterior portion 30 can include on their surfaces any additional combination of pockets with suitable locations, dimensions, and fastening portions
20 described herein, based on the guidance of the description herein. For example, but not intended to limit the invention, the preferred embodiment of Fig. 1 depicts three pockets that decrease in size in a direction from the medial edge to the distal edge of the anterior portion, however, any or all of these pockets can have the same height or decrease in size in the opposite direction if desired. Also, any or all of the additional pockets on the anterior or
25 posterior portions (in addition to the one each on the anterior and posterior portions) can be releasably detachable by the fasteners described herein for removal if not necessary to carry additional cargo within the garment apparatus. Further, the garment apparatus can be constructed in different sizes to fit different users, *e.g.*, small, medium, large, and extra-large men or women, and the pockets (aside from, *e.g.*, the cell phone pocket) can be
30 commensurately larger or smaller depending on the available space on the apparatus.

The apparatus is preferably made of a water-resistant or water-proof, light-weight fabric to minimize or prevent overheating of the user while wearing the apparatus. Preferably, the apparatus comprises a synthetic polymer, more preferably a nylon or neoprene containing material. In other embodiments, the apparatus can include water-resistant or

water-proof materials of heavier weight or thickness to help the user retain additional warmth for colder climate usage. The apparatus can also include removable sleeves and hood for use in colder conditions, although a hood is not as preferred because when present but not worn it would tend to block the anterior upper pocket(s). Portions of the apparatus, for example, one
5 or more of the collar, shoulder portions, side portions, and cell phone pocket or other pocket(s), can be made of a mesh material to increase ventilation for the user or the pocket contents, however, this precludes water-resistance or water-proofing at that location. In other embodiments, the apparatus, or portions thereof, is preferably made of a fire-resistant or fire-proof material, either light-weight or heavy-weight, that prevents or substantially reduces
10 burning of the user while wearing the apparatus upon exposure to flames or extreme heat. Preferably, the apparatus is made of a material that is both water-resistant or water-proof, and fire-resistant or fire-proof, or is made of multiple layers of material, each material having one of these properties.

In some embodiments, the exterior pockets are made of a mesh material, such
15 that the contents within the pockets are at least partially visible from the exterior through the mesh material. Preferably, the mesh material is flexible. In alternative embodiments, the exterior of the pockets can be made of a material that is preferably rigid and clear, opaque, or translucent to also provide a "see-through" characteristic to the pockets. For example, the exterior of the pockets can be made of a substantially clear plastic material.

20 Additionally, some portions of the apparatus can include resilient sections that are made of flexible and resilient material, for example nylon and materials with similar elastic characteristics. Preferably, there are one or two resilient sections to join the anterior and posterior portions on the left or right sides, or both. The resilient section can include an anterior edge and a posterior edge, the anterior edge being joined to the anterior portion and
25 the posterior edge being joined to the posterior portion. In some embodiments, the resilient sections are located proximate the side attachments and/or shoulder portions. In other embodiments, substantially the entire apparatus includes resilient sections. Resilient sections comprising resilient material preferably provide a snug fit when worn by the user. "Snug fit" can advantageously ergonomically distribute weight or cargo retained in the pockets of the
30 garment apparatus, and the term is intended to refer to the garment apparatus conforming to the body of a user, typically where there is some tension on a portion of the resilient section(s) as this is expected to stretch in any necessary locations to facilitate conformation of the garment apparatus to the user.

The garment apparatus can also include reflective material disposed in one or more locations about the external surfaces of the anterior and posterior portions. In one embodiment, the entire garment is made of a reflective material. In other embodiments, the garment includes reflective material disposed on a portion of the trim, on one or more fastening mechanisms, or on one or more patches disposed on select areas of the garment's surfaces, for example, patch 70 disposed on the posterior surface of the garment as shown in Fig. 3. Such reflective materials are preferably arranged and configured so as to increase the visibility of the wearer and the garment apparatus.

The term "about," as used herein, should generally be understood to refer to both the corresponding number and a range of numbers. Moreover, all numerical ranges herein should be understood to include each whole integer within the range.

This application hereby incorporates by reference the entire content of U.S. Non-Provisional Application No. 11/005,526, which was filed on December 6, 2004.

While illustrative embodiments of the invention are disclosed herein, it will be appreciated that numerous modifications and other embodiments can be devised by those of ordinary skill in the art. Features of the embodiments described herein can be combined, separated, interchanged, and/or rearranged to generate other embodiments. Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments that come within the spirit and scope of the present invention.

20

THE CLAIMS

What is claimed is:

5 1. A garment apparatus comprising:
 an anterior portion having an interior side and an exterior side, a surface area, a
top edge having a left and right side, a bottom edge, and at least two side edges and at least
one pocket fixedly attached thereto; and
 a posterior portion having an interior side, an exterior side, a surface area, a
10 right edge, a left edge, a top edge having a right and left side, and a bottom edge, and having
at least one pocket fixedly attached thereto that covers about 1 up to 50 percent of the surface
area of the posterior portion and is disposed predominantly adjacent an upper half of the
posterior portion;
 with the anterior and posterior portions being associated such that the right and
15 left sides of the top edge of the anterior portion are connected adjacent the right and left sides
of the top edge of the posterior portion to leave an opening therebetween.

 2. A garment apparatus comprising:
 an anterior portion having an interior side and an exterior side, a surface area,
20 and being divided into a right half and a left half, each half having a top edge, a medial edge, a
bottom edge, and a distal edge, and having a releasable fastener to releasably fasten the medial
edges of the right and left halves and having at least one pocket fixedly attached to the anterior
portion; and
 a posterior portion having an interior side, an exterior side, a surface area, a
25 right edge, a left edge, a top edge having a right and left side, and a bottom edge, and having
at least one pocket fixedly attached thereto that covers about 1 up to 50 percent of the surface
area of the posterior portion and is disposed predominantly adjacent an upper half of the
posterior portion;
 with the anterior and posterior portions being associated such that the top edge
30 of the right half of the anterior portion is joined to the right side of the top edge of the
posterior portion from a part of the right edge of the posterior portion to the right side of a
collar portion, and the top edge of the left half of the anterior portion is joined to the left side
of the top edge of the posterior portion from a part of the left edge of the posterior portion to
the left side of the collar portion so as to leave an aperture surrounded by the collar portion.

3. The garment apparatus of claim 1 or 2, further comprising at least one resilient section, the resilient section having an anterior edge and a posterior edge, the anterior edge being releasably or fixedly joined to the anterior portion and the posterior edge being
5 releasably or fixedly joined to the posterior portion, the resilient section comprising a flexible and resilient material.

4. The garment apparatus of claim 1 or 2, further comprising a second releasable fastener that is configured and adapted to releasably fasten the left edge of the
10 posterior portion to the distal edge of the left half of the anterior portion, configured and adapted to releasably fasten the right edge of the posterior portion to the distal edge of the right half of the anterior portion, or both, and the second releasable fastener comprises at least one of a snap, button, zipper, hook and loop fastener, adjustable belt portion, or tie.

5. The garment apparatus of claim 1 or 2, further comprising at least one shoulder pad attached to the interior side of the anterior and posterior portions proximal to the joined top edges of the posterior and anterior portions, at least one cushioning material in at least one pocket, at least one interior lining associated with the apparatus, or a combination thereof.
15

6. The garment apparatus of claim 1 or 2, further comprising a releasable fastener to releasably fasten at least one of the pockets to help transport or exchange items residing therein, or an internal port that provides a passage from the inside of an anterior pocket to the inside of the apparatus, or both.
20

7. The garment apparatus of claim 6, wherein the releasable fastener comprises at least one of a zipper, snap, button, clip, hook and loop fastener, tie, and drawstring.
25

8. The garment apparatus of claim 1 or 2, wherein the at least one pocket fixedly attached to the posterior portion is located substantially proximal to the top edge of the posterior portion.
30

9. The garment apparatus of claim 8, which further comprises a second pocket fixedly attached to the posterior portion, the second pocket located predominantly in a lower half of the posterior portion.

5 10. The garment apparatus of claim 9, wherein one of the pockets fixedly attached to the anterior portion is a cell phone pocket configured and dimensioned so as to receive and substantially conform to a cell phone when disposed therein.

10 11. The garment apparatus of claim 1 or 2, wherein the total pocket volume available on the anterior portion is sufficient to counterbalance the total pocket volume available on the posterior portion and wherein the anterior portion includes at least three pockets.

15 12. A garment apparatus comprising:
an anterior portion having an interior side and an exterior side, a surface area, a top edge having a right side and a left side, a bottom edge, and at least two side edges and at least one pocket fixedly attached thereto; and

20 a posterior portion having an interior side, an exterior side, a surface area, a right edge, a left edge, a top edge having a right and left side, and a bottom edge, and having at least one pocket fixedly attached thereto;

with the anterior and posterior portions being associated such that the right and left sides of the top edge of the anterior portion is connected adjacent the right and left sides of the top edge of the posterior portion to leave an opening therebetween,

25 wherein the at least one pocket comprises an internal port that provides a closeable opening from an inside portion of the pocket to the interior side of the garment apparatus.

1 of 3

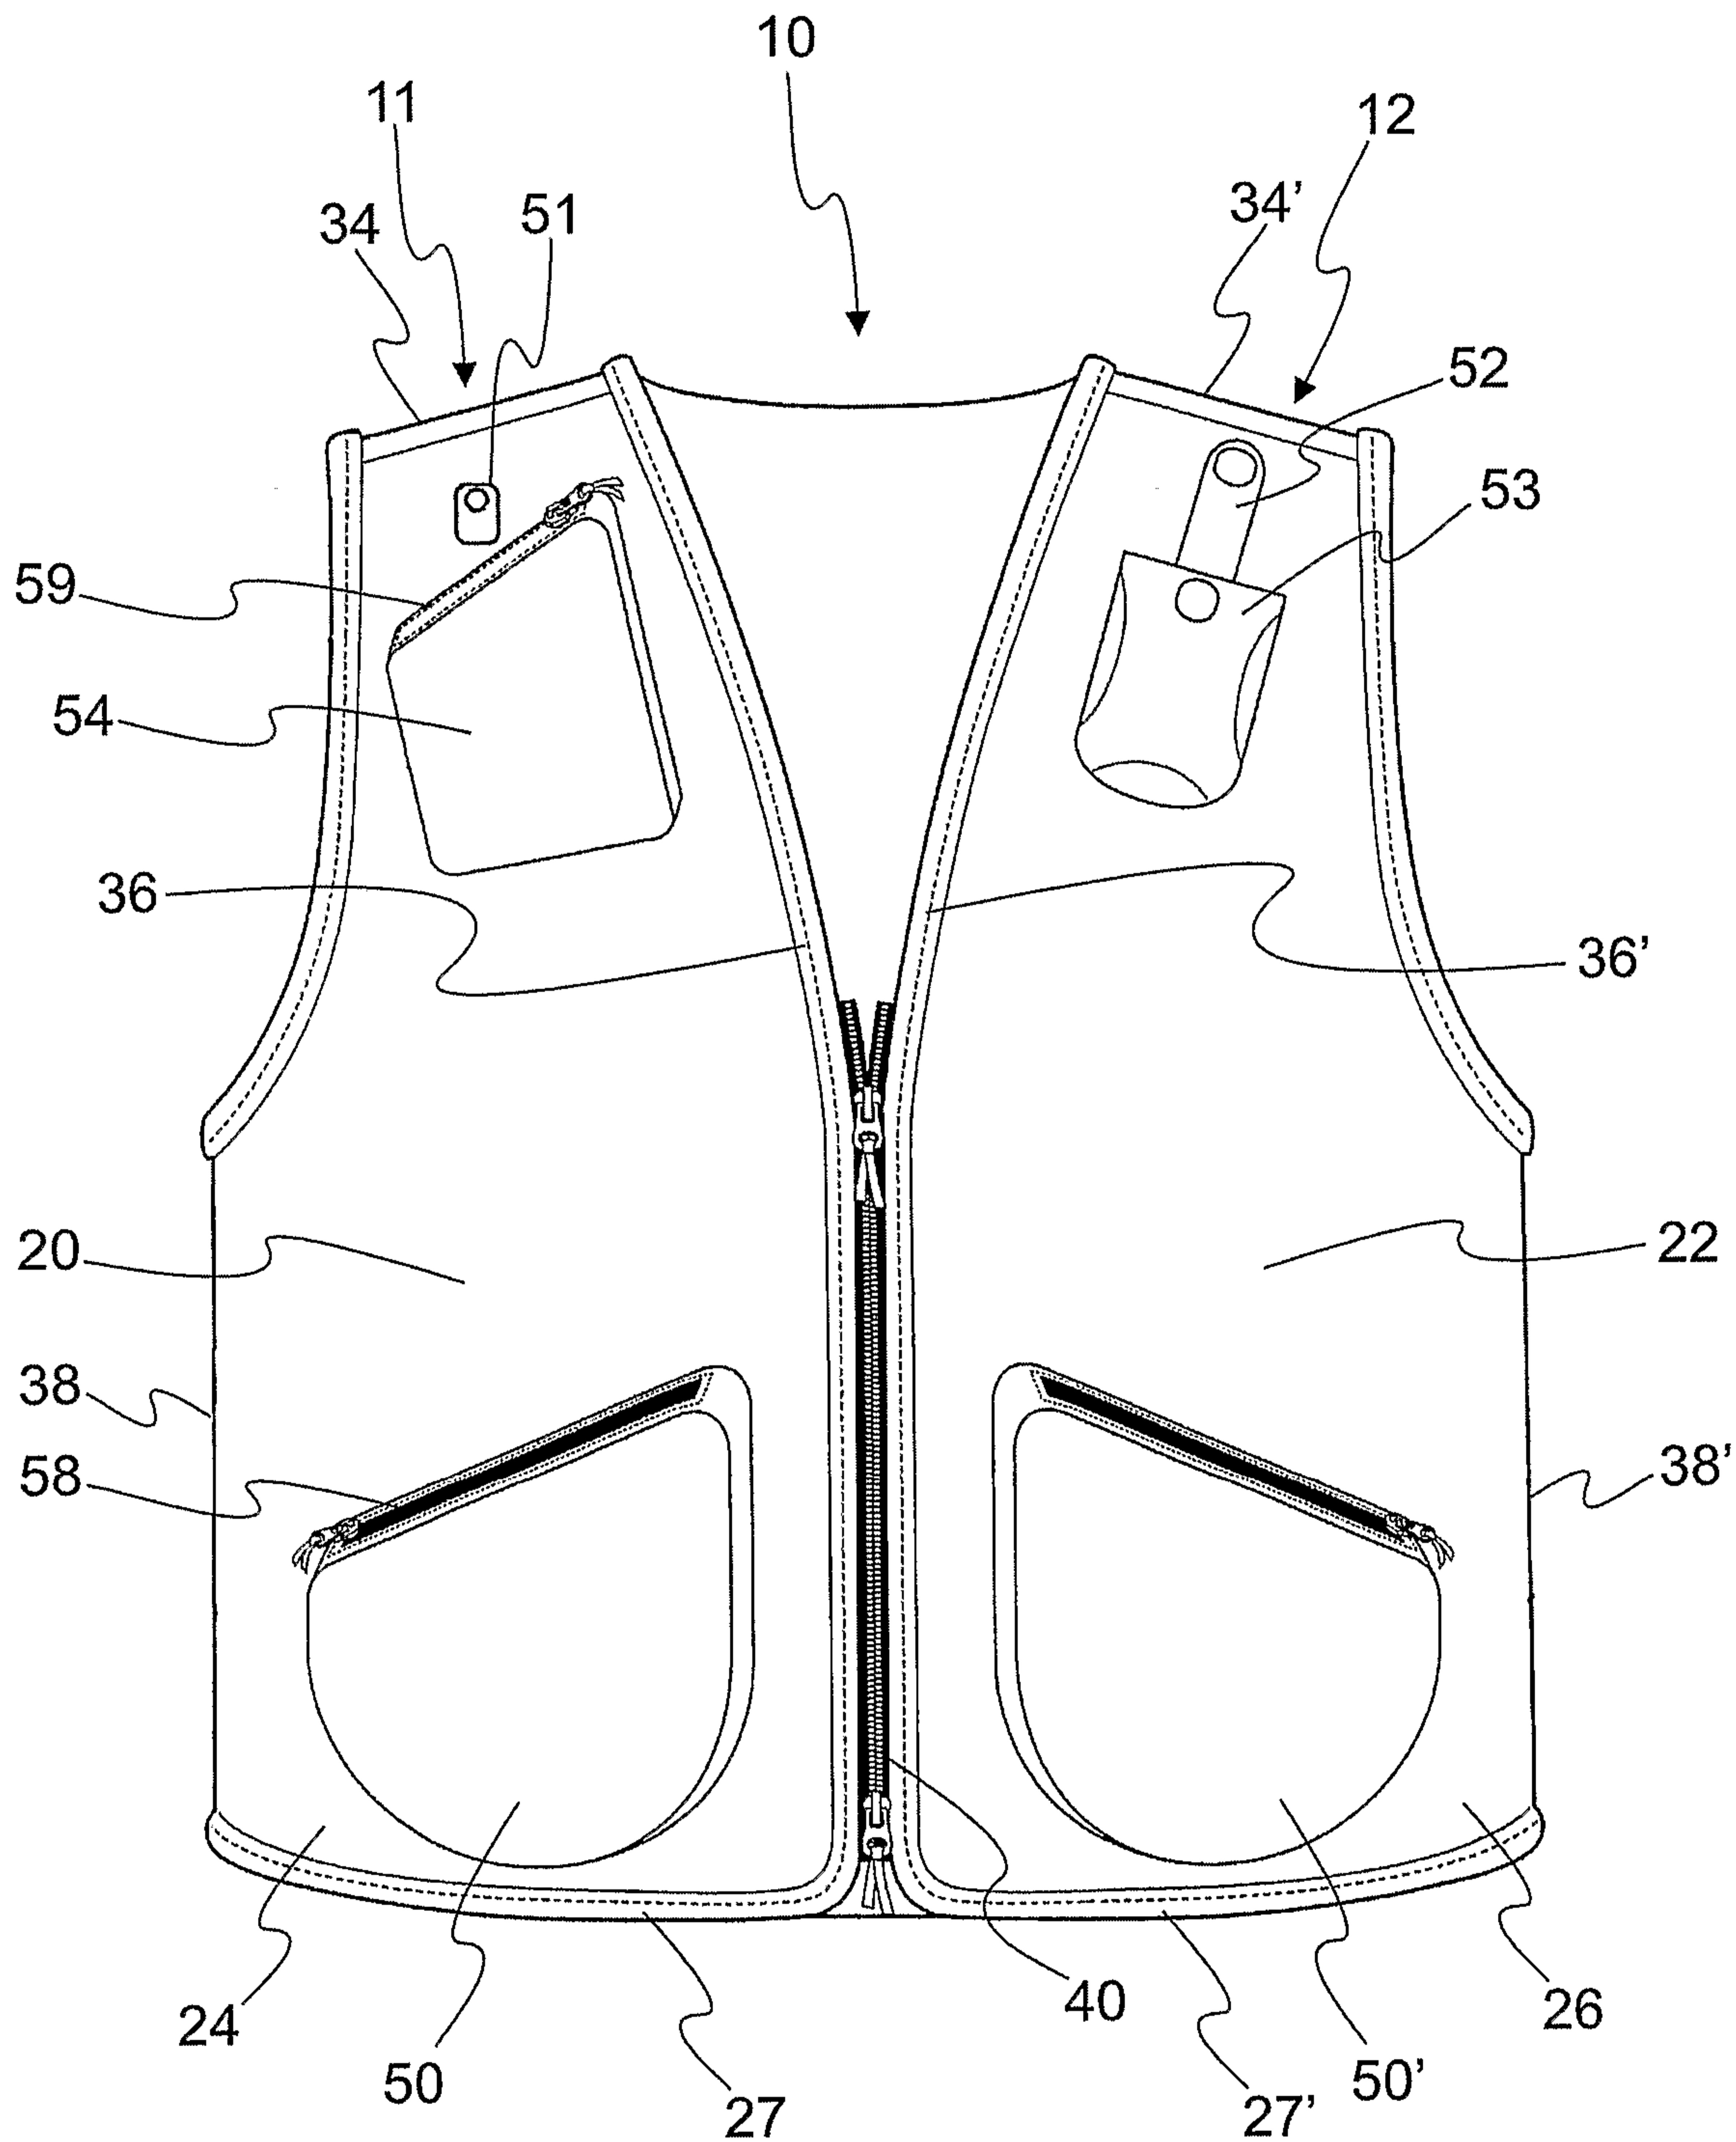


Fig. 1

2 of 3

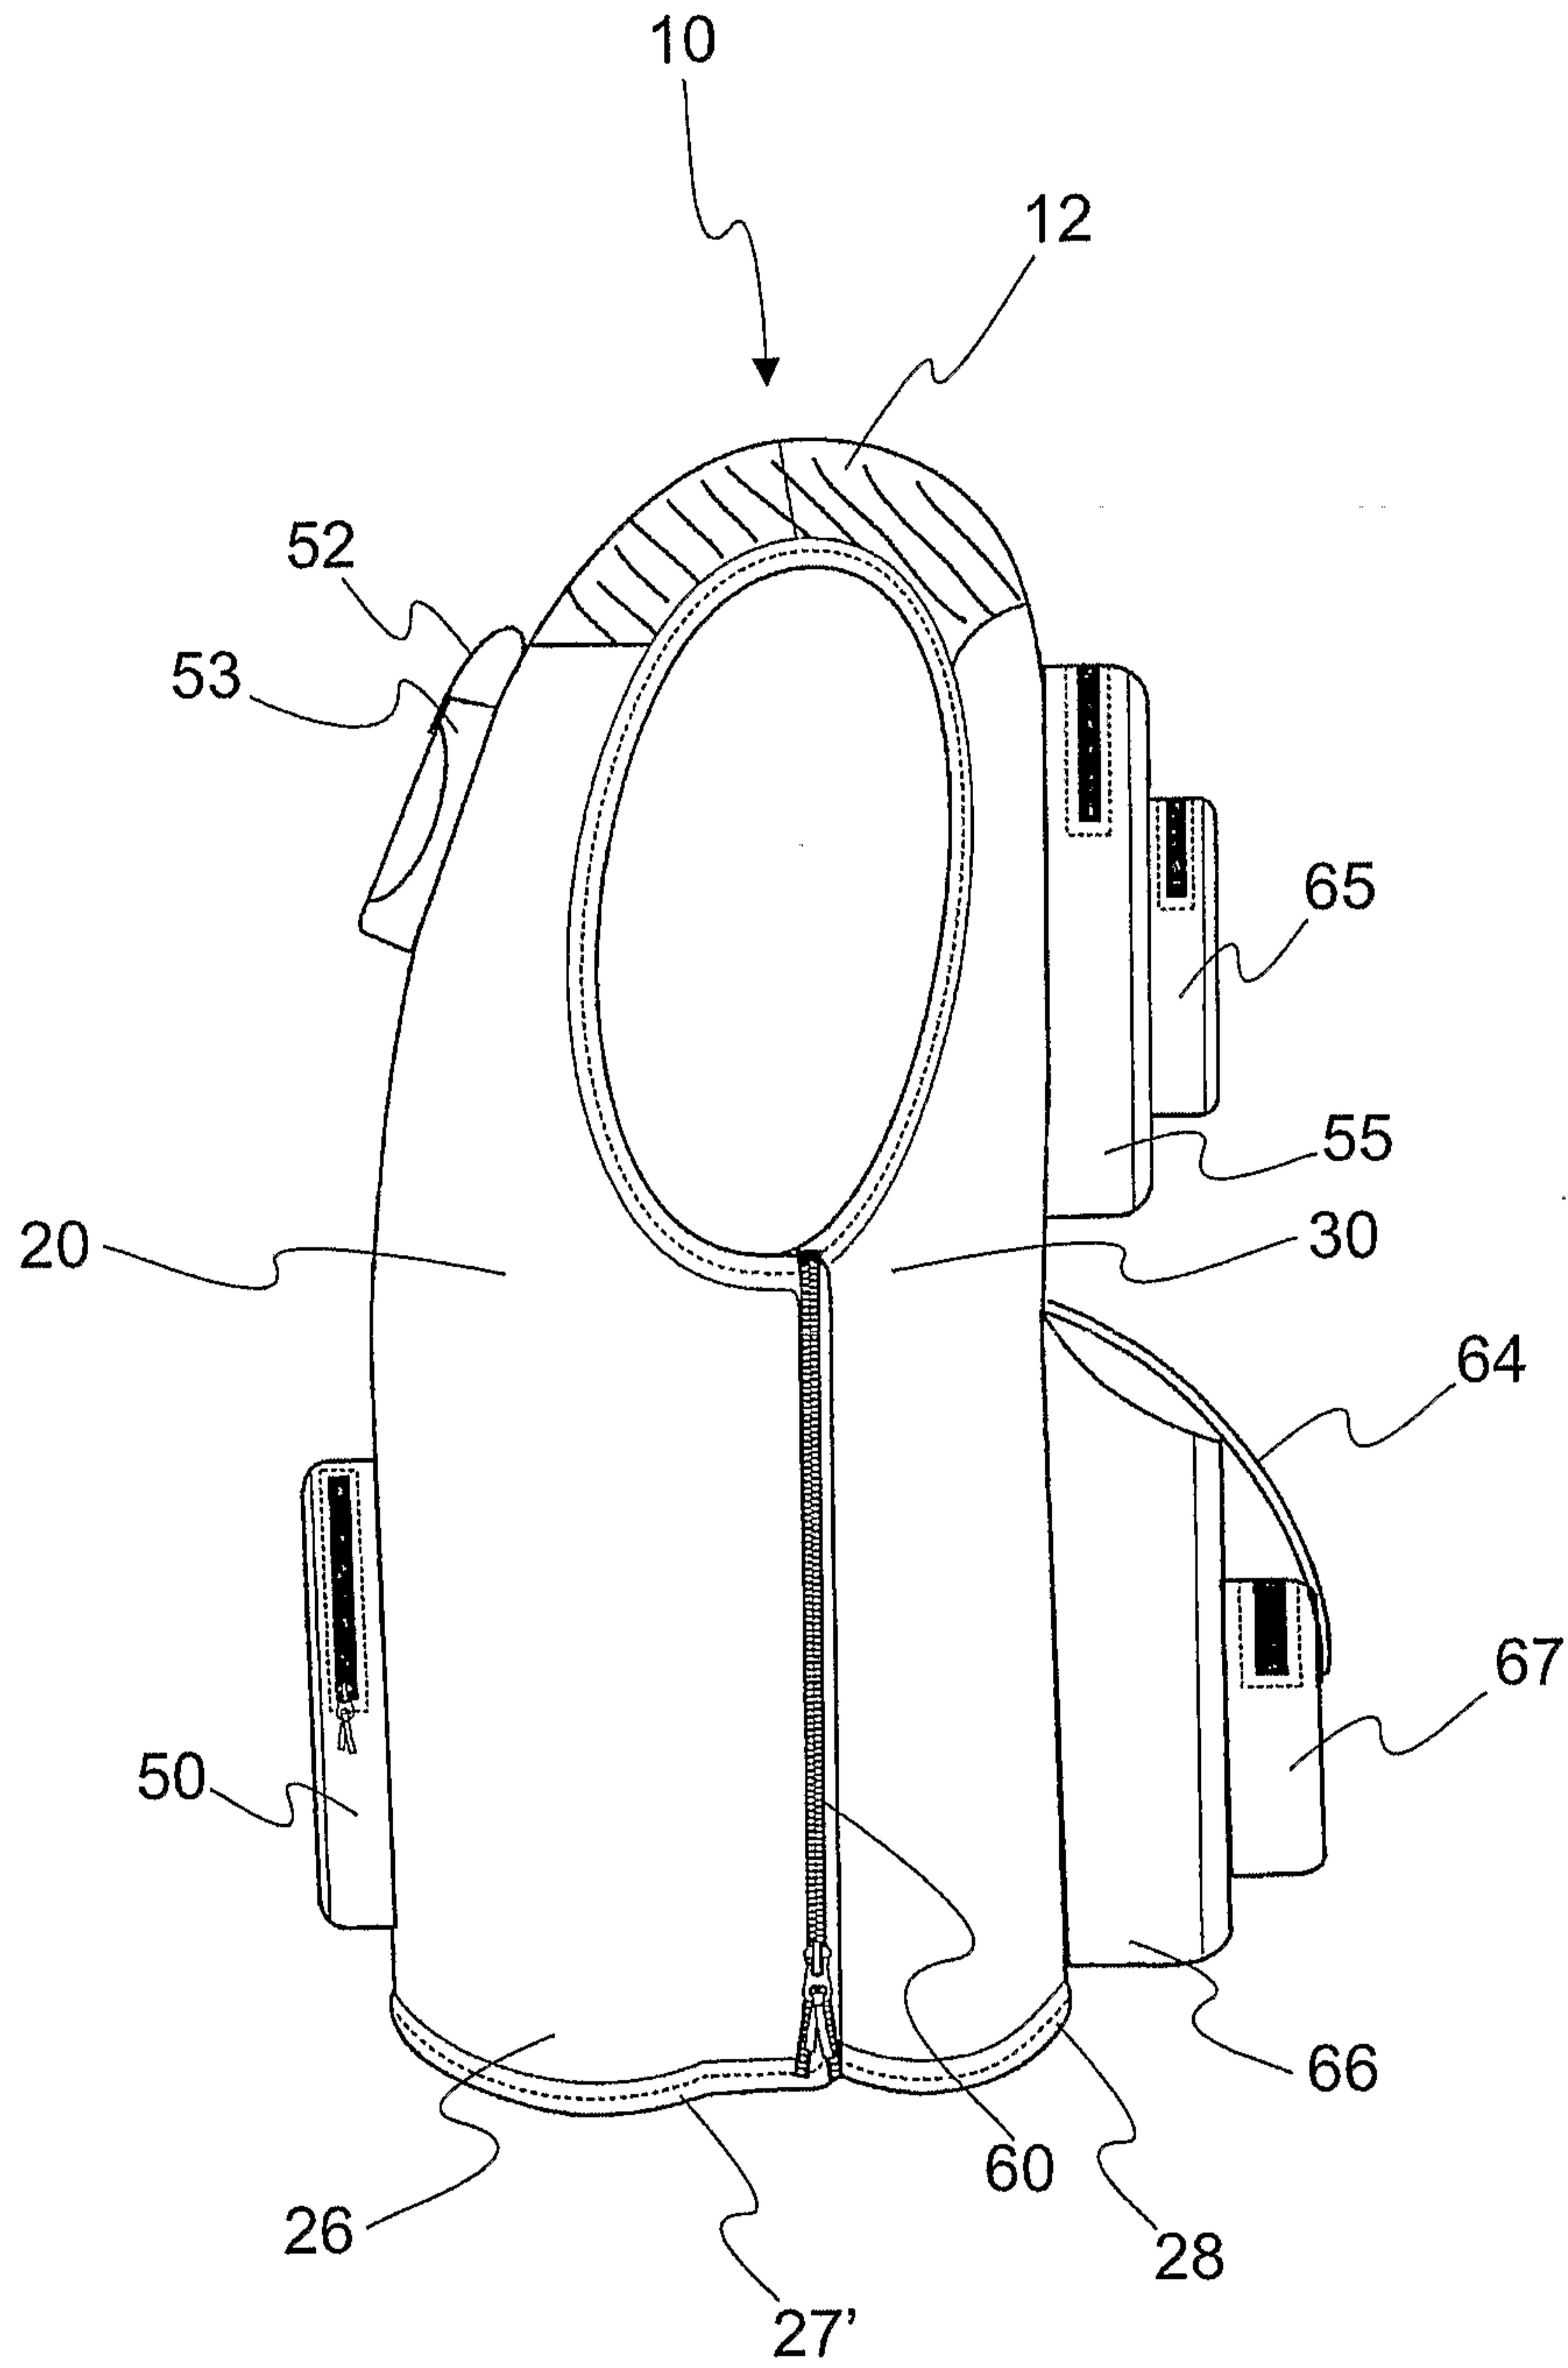


Fig. 2

3 of 3

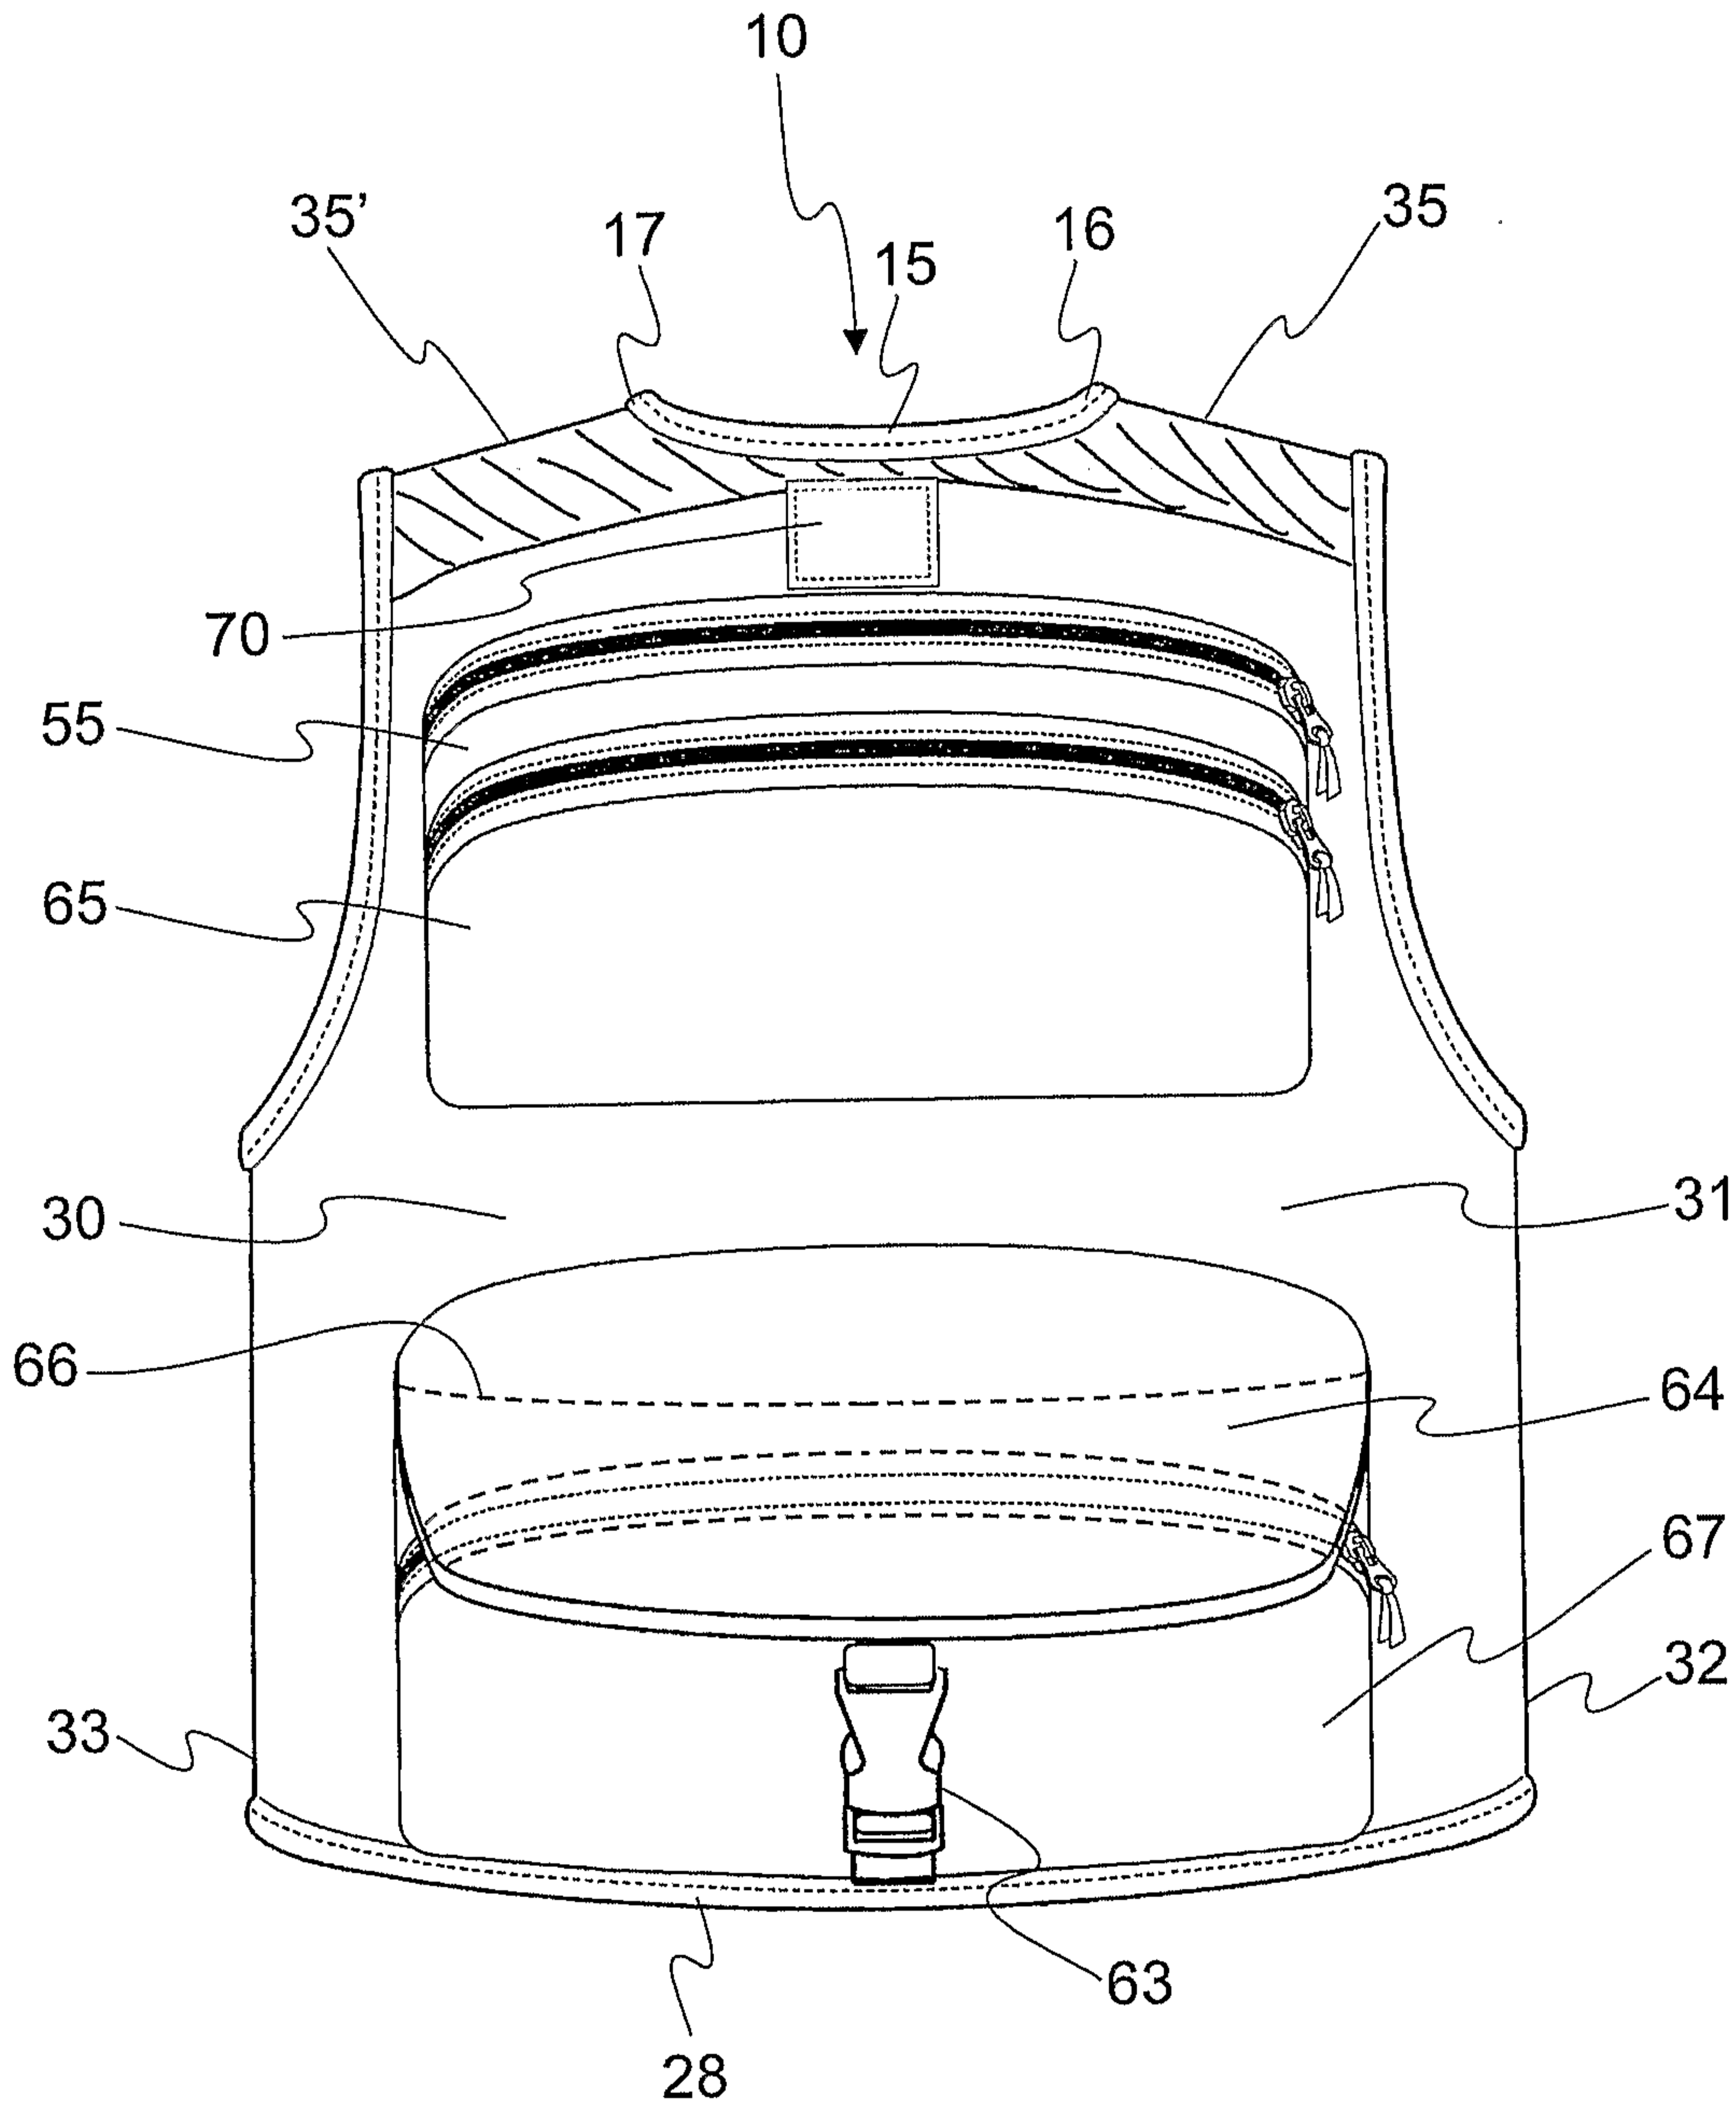


Fig. 3

