

(43) **Pub. Date:** **Dec. 28, 2006**

continuation of application No. 09/946,004, filed on Sep. 4, 2001, now Pat. No. 6,550,615, and which is a continuation of application No. 09/542,661, filed on Apr. 4, 2000, now Pat. No. 6,283,293.

Publication Classification

(51) **Int. Cl.**

B65D 75/00 (2006.01)

B65D 65/00 (2006.01)


(52) **U.S. Cl.** **206/427**; 206/139; 206/193

(57) **ABSTRACT**

A container having a multiplicity of cans therein. The container disclosed is modified from a rectangular, closed wall container to a container with part of the walls removed, thereby allowing easy access to the cans of the container. Applicant discloses a unique relationship between the walls of the opened container and the size of the beverage cans. Applicant also discloses a method for constructing a closed container that may be easily modified to remove the cans of the container.

Related U.S. Application Data

(63) Continuation of application No. 10/997,712, filed on Nov. 24, 2004, which is a continuation of application No. 10/935,209, filed on Sep. 7, 2004, which is a continuation of application No. 10/388,951, filed on Mar. 14, 2003, now Pat. No. 6,789,673, which is a

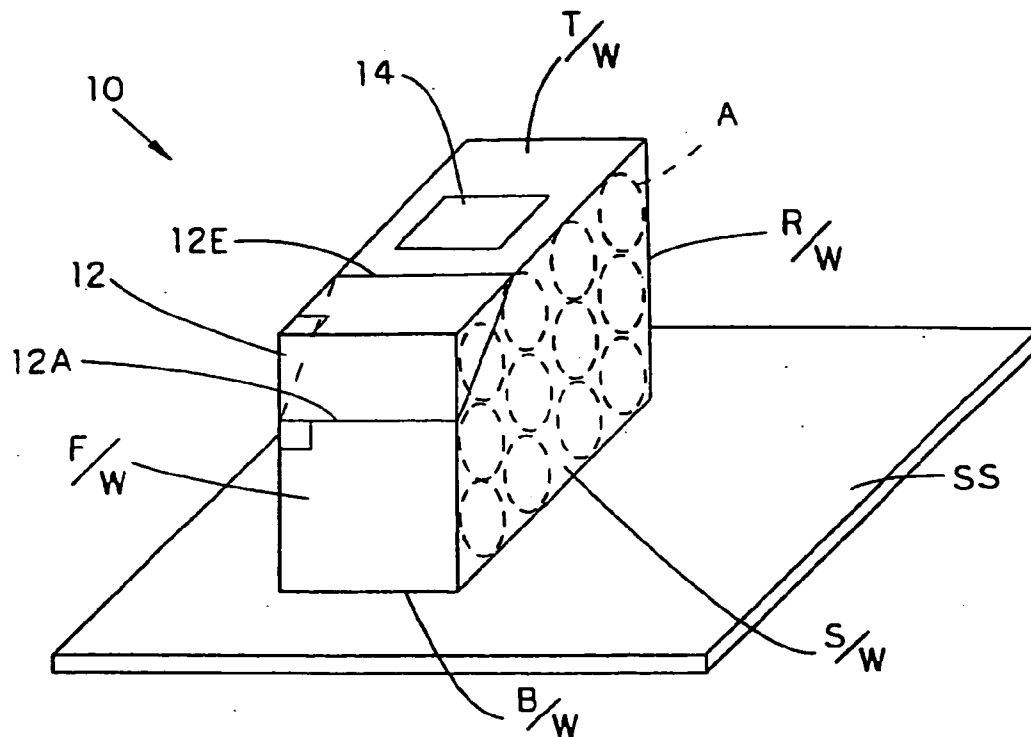

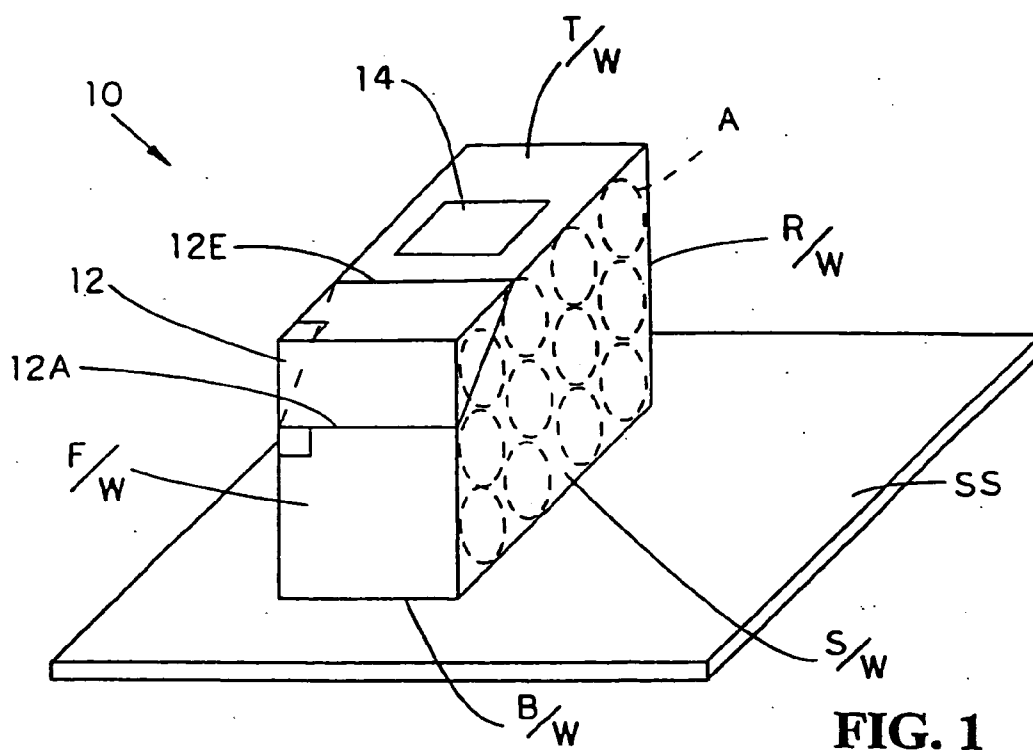


FIG. 1

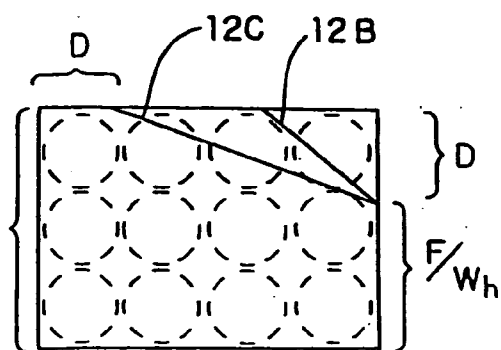


FIG. 2




FIG. 1A

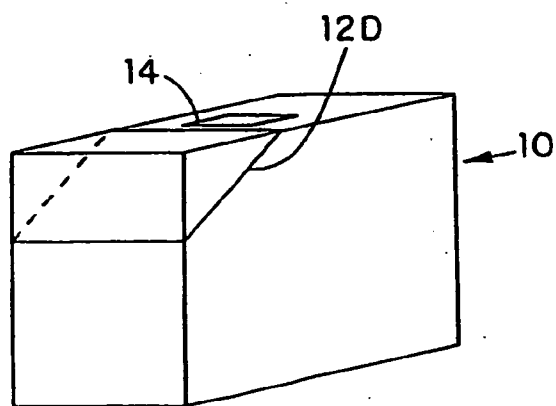


FIG. 3

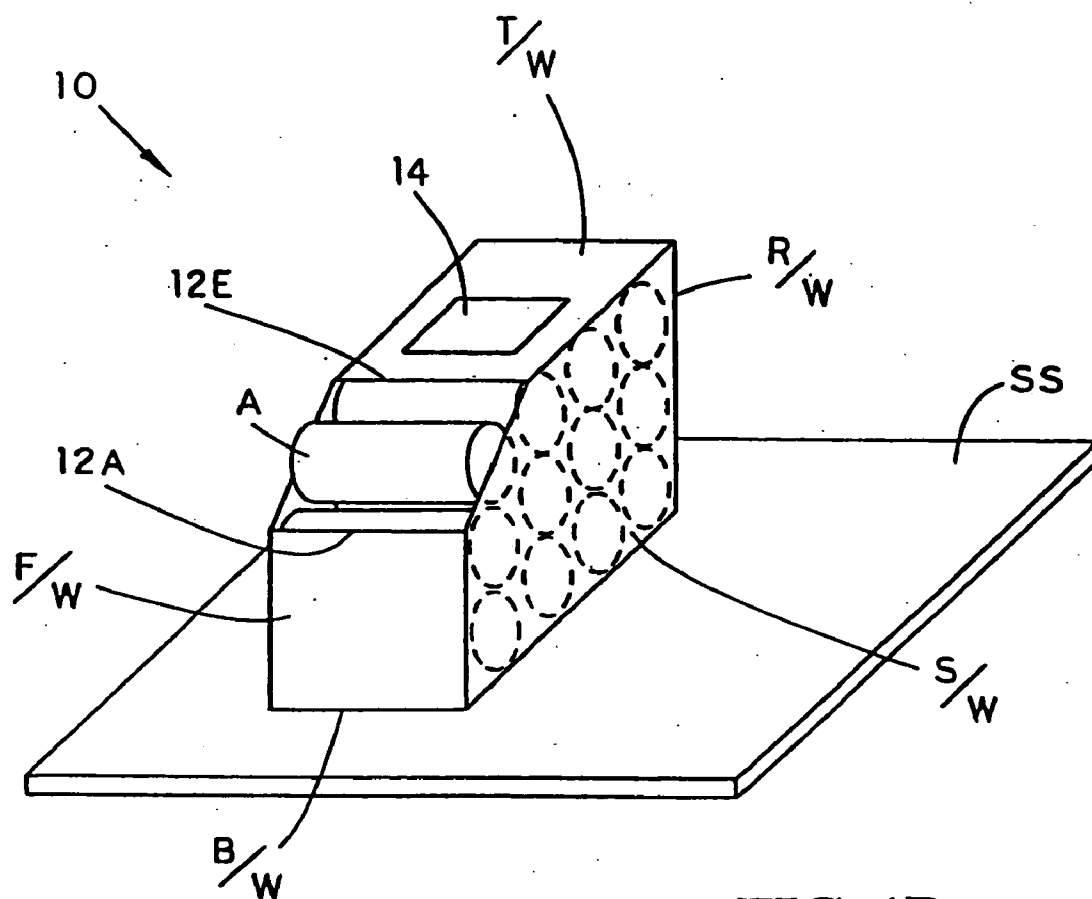


FIG. 1B

CONTAINER FOR PROVIDING EASY ACCESS TO BEVERAGE CANS

[0001] This is a continuation of and claims priority from and incorporates by reference U.S. patent application Ser. No. 10/987,712, filed Nov. 24, 2004, which is a continuation of and claims priority from U.S. patent application Ser. No. 10/935,209, filed Sep. 7, 2004, which is a continuation of and claims priority from U.S. patent application Ser. No. 10/388,951, filed Mar. 14, 2003 (now U.S. Pat. No. 6,789,673, issued Sep. 14, 2004); which is a continuation of and claims priority from U.S. patent application Ser. No. 09/946,004, filed Sep. 4, 2001 (U.S. Pat. No. 6,550,651); which is a continuation of and claims priority from U.S. patent application Ser. No. 09/542,661, filed Apr. 4, 2000 (U.S. Pat. No. 6,283,293).

FIELD OF THE INVENTION

[0002] Beverage can containers, more specifically a beverage can container for providing easy access to the beverage cans contained therein.

BACKGROUND INFORMATION

[0003] Beverages, such as soda or beer, often come in cylindrical, aluminum, typically 12 oz. cans. Traditionally, one could buy a single can or a "six pack." The six pack is simply six cans contained in a typically rectangular paper container or hung on interconnected plastic rings.

[0004] More recently, cans of soda and beer have become available in packs of twelve cans. The twelve pack is typically rectangular cardboard with the cans, usually in a 4x3 matrix arrangement, stacked closely next to one another. The twelve pack has walls typically constructed of light cardboard or thick paperboard, being thicker than writing stock paper but not as robust or thick as corrugated cardboard. These twelve packs presently enjoy popularity with use by Coca-Cola and Pepsi-Cola, the two leading providers of soda as well as by many major domestic beer companies.

[0005] The twelve pack containers provide a convenient means to carry the beverage cans but are not handy for dispensing the cans. Typically, the consumer will purchase the twelve pack, bring it home, tear the pack open and pull out the cans to stack them in the refrigerator, discarding the container. Applicant provides, however, for a modification to the currently available twelve pack to convert the carrying container to a dispensing container. That is, the cans will remain within the carrying container, the container acting, as modified by applicant as a beverage can dispenser.

[0006] An object of Applicant's present invention is to provide for a container for beverage cans which will allow easy access to the beverage cans for easy removal but will also hold the beverage cans therein.

[0007] It is also an object of Applicant's present invention to provide a modification to currently existing beverage can containers so that the containers, as modified, will provide easy access to the cans therein.

[0008] This and other objects are provided for in a generally rectangular, paper beverage can container with a corner removed on a diagonal line across the two side walls, the line running from a front wall to the adjacent top wall.

[0009] There are a number of benefits with Applicant's novel beverage container with a dispensing cutout therein. These include ease of access. This is obtained by placing the twelve pack container on edge with a cutout in the upper corner. Easy and fast accessibility to the cold beverage cans will increase consumption and sales of the product.

[0010] Applicant's invention also provides for gravity feed to enhance access to the beverage cans. This is created by the weight of the cans when the beverage container is placed in a vertical position. This position naturally pushes the cans, under the influence of gravity, towards the front wall of the container. The cutout location is designed to take maximum advantage of this gravity feed.

[0011] Another advantage of Applicant's invention is the ability to effectively utilize space, especially in a refrigerator or kitchen cabinet. By placement of the cutout in the position indicated, the container may be placed vertically to save space.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] **FIG. 1** is a perspective view of the preferred embodiment of applicants invention.

[0013] **FIG. 1A** is side view of a 12 oz. beverage can.

[0014] **FIG. 1B** is a perspective view of the beverage container modified accordingly to Applicant's invention.

[0015] **FIG. 2** is a side elevational view of the preferred embodiment of applicants invention.

[0016] **FIG. 3** is a side elevational view of an embodiment of Applicants invention.

[0017] **FIG. 4** is a two dimensional pattern of a typical paper twelve pack container illustrating the area removed to provide for applicants unique dispenser.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0018] Line 12A shows the position of a line on the front wall of a beverage container from one side wall to the next, the line being straight and meeting the edge between the front wall and the side wall at a 90° angle. The line 12D shows the position of a diagonal line across each of the two side walls between the front wall and the top wall, lines 12D, at 12B and 12C showing a preferred range of the position of line 12D with respect to the top wall. Line 12E is a line across the top wall, one side wall to the next and perpendicular to the edges of the top wall. The beverage container will be cut through along lines 12A, 12D and 12E to remove section 12 from the rest of the container (See **FIG. 1B**). The position of lines 12A, 12D and 12E may be premarked, scored (or otherwise weakened) by the manufacturer of the beverage container so as to direct the consumer to the position for cutting and removing portion 12.

[0019] **FIG. 1** is a perspective view of a modified twelve pack container 10 with cylindrical aluminum 12 oz. beverage cans A packed inside in a 4x3 arrangement and designating two side walls S/W, a top wall T/W, a bottom wall B/W, a front wall F/W and a rear wall R/W. It is noted that the two side walls have the greatest surface area, the top and bottom walls having a surface area between the two side walls and the front and rear walls, which have the least

surface area. A support surface, such as a refrigerator shelf, is designated SS. The top, bottom, front and rear walls are defined when the container is placed on a support surface, as illustrated in **FIG. 1**, with the F/W chosen to provide for the most convenient access. **FIG. 1** also illustrates Applicant's modification, being a cut or removed portion **12**, the removed portion being a corner of the container where the front wall meets the top wall and defined by a diagonal line across the two sidewalls between the front wall and the top wall, and a line across the top wall and across the front wall, this line along which the removed portion is defined designated **12A**.

[0020] **FIG. 2** illustrates a side elevational view of the twelve pack of **FIG. 1** wherein the dimension designated D is the approximate diameter of a 12 oz. aluminum beverage can, typically about 6.6 centimeters. As can be seen in **FIGS. 1 and 2** the typical twelve pack beverage container is a little over 4 diameters long (about 26 cms) and about 3 "diameters" high (about 20 cms) to enclose therein, in a 3x4 matrix, twelve cans. Furthermore it sometimes includes a handle **14** thereon, the handle typically being walls defining a cut out in the top wall for the receipt of a hand thereinto. The height (H) of a typical 12 oz. metal beverage can is about 12.6 cm.

[0021] In **FIG. 2** it is seen that Applicant modifies the standard heavy paper wall twelve pack container by cutting off the corner created by the joinder of the front wall and top wall. This is preferably done in the manner illustrated in **FIGS. 1 and 2**. The preferred height of the front wall defined after the cut across the front wall is less than two diameters but greater than one diameter, more preferably between 1.50 and 1.80 times D. Indeed, the most preferred height of the front wall defining the cut to remove portion **12** is between 1½ diameter and 1¾ diameter. Such dimension allows easy receipt of the second course of cans but is high enough to prevent the second course of cans from falling out when there are still 3 courses in the container.

[0022] The preferred length of the top wall defined after the cut is between 1 and 3 diameters, preferably between 1 and 2 diameters. These cut dimensions are illustrated by lines **12B** and **12C** set forth in **FIG. 2**.

[0023] Cuts along the lines **12A**, **12D** and **12E** may be made with a knife, razor or any other suitable instrument. When the cuts are made as set forth in **FIGS. 1 and 2**, portion **12** can be removed (See **FIG. 1B**) and the single can at the top corner will then be removed and the container placed in the position illustrated in **FIG. 1** for easy dispensing of the remaining cans.

[0024] **FIG. 3** provides for a diagonal cut **12C** across the side walls S/W's that terminates adjacent handle **14**. Handle **14**, in a 4x3 twelve pack is usually at 2 diameters from a top edge (half way across top wall T/W) to provide for proper balance.

[0025] **FIG. 4** illustrates a flattened twelve pack pattern **16** which will fold together to provide for a typical twelve pack with dimension. Handle **14** is illustrated. Scored line **18** is made as part of the process of constructing the container, typically after the outer perimeter **20** defining the pattern **16** of the box is formed. Scored line **18** may be grooves, scratches or notches, or any other means known in the trade to weaken the paperboard such that it is easier for the user

to remove portion twelve. Indeed, with proper scoring in ways known in the trade, it is fairly easy to remove portion twelve without a cutting instrument. Note in **FIG. 4** that folding the pattern **16** will provide for the twelve pack illustrated in **FIGS. 1-3** with the diagonal line **12D** running across the side walls from the front wall F/W to the top wall T/W.

[0026] In an alternate preferred embodiment Applicant provides a twelve pack container with a line marked on the front wall F/W at between 1D and 2D, on the top wall T/W between 1D and 3D and across the two side walls S/W's to define the pattern for removal of a corner **12** of a twelve pack container as illustrated in **FIGS. 1-4** to show a consumer that they may cut the container along the line to convert it into the Applicants novel dispenser container as illustrated.

[0027] Although the invention has been described with reference to specific embodiments, this description is not meant to be construed in a limited sense. Various modifications of the disclosed embodiments, as well as alternative embodiments of the inventions will become apparent to persons skilled in the art upon the reference to the description of the invention. It is, therefore, contemplated that the appended claims will cover such modifications that fall within the scope of the invention.

I claim:

1. A container comprising:

a plurality of walls including a front wall, a rear wall, a top wall, a bottom wall and two side walls, the walls containing a multiplicity of stacked cylindrical cans in substantially perpendicular can columns and can rows, the can columns located between the front wall and the rear wall, there being at least a top can row and a next-to-the-top can row, the top can row including a forward most can adjacent the front wall such that the forward most can is in contact with the front wall, and a rearward most can adjacent the rear wall such that the rearward most can is in contact with the rear wall, each can having a can top, a can bottom, a can height, a can diameter, and a longitudinal axis substantially parallel to the front wall, wherein the top wall and the bottom wall are spaced apart by a whole multiple of the can diameter, the two side walls are spaced apart by the can height, and the front wall and rear wall are spaced apart by a whole multiple of the can diameter;

a removable access portion, the removable access portion comprised of a portion of each of the top wall, the front wall and the two side walls, the removable access portion defined by scored line segments on each of the front, top, and side walls such that removal of the removable access portion leaves a pair of side wall edges running from a location at the front wall that is spaced apart from the top wall to a location at the top wall that is spaced apart from the front wall, which side wall edges expose a substantial part of the can top and the can bottom of the forward most can, for ease of removal of the forward most can, and removal of the removable access portion further provides access to the cans remaining after removal of the forward most can; and

a handle positioned in the top wall;

wherein the scored line segment on the front wall is located such that, after removal of the removable access portion, the front wall retains the cans in the next-to-the-top can row from rolling out of the container when the bottom wall is resting flat on a support surface.

2. A container holding a multiplicity of cylindrical cans, the container comprising:

an even number of the cylindrical cans, each can comprising a can diameter and a can height, each can further comprising a longitudinal axis;

a rear wall having a rear wall height;

a front wall spaced apart from the rear wall by a whole multiple of the can diameter, the front wall having a front wall scored line segment spaced apart from the top wall, the front wall being substantially parallel to the longitudinal axes;

a bottom wall;

a top wall spaced apart from the bottom wall by a whole multiple of the can diameter, the top wall having a top wall scored line segment spaced apart from the front wall; and

two side walls, each of the side walls having a side wall scored line segment running from the front wall at a location that is spaced apart from the top wall to a location at the top wall that is spaced apart from the front wall, the side walls separated by the can height.

3. The container of claim 2 wherein:

the cans are contained in the container and arranged to have a top row having an even number of cans only;

the top wall includes a handle centrally located on the top wall; and

each of the side wall scored line segments runs from the top wall scored line segment to the front wall scored line segment.

4. A container holding a multiplicity of substantially identical items arranged in a plurality of substantially perpendicular rows and columns, each item having an item diameter and an item height, wherein the arrangement has a top row and a next-to-the-top row, and wherein each column has a column width of the item diameter and each row has a row height of the item diameter, comprising:

a rear wall having a rear wall height;

a bottom wall for resting on a support surface;

a front wall spaced apart from the rear wall by a whole multiple of the column width, the front wall having a front wall scored line, at least a portion of the front wall scored line being at a height less than the rear wall height but sufficiently high to restrain the next-to-the-top row of items when the bottom wall is resting on the support surface;

a top wall spaced apart from the bottom wall by a whole multiple of the row height, the top wall having a top wall scored line, at least a portion of the top wall scored line being spaced apart from the front wall;

two side walls, each of the side walls having a side wall scored line running from the front wall, at a location spaced apart from the top wall, to the top wall at a

location spaced apart from the front wall, the side walls separated by the item height; and

wherein each of the items comprises a longitudinal axis substantially parallel to the front wall.

5. A container holding a multiplicity of cylindrical cans, each can having a can diameter and a can height, the container comprising:

a rear wall and a front wall each having a height and being separated by an even whole multiple of the can diameter;

a bottom wall and a top wall separated by a whole multiple of the can diameter;

a handle centrally located in the top wall;

two side walls between the bottom and top walls, the side walls separated by the can height; and

a scored line having (a) a front wall segment that runs on the front wall from one side wall to the other side wall and is spaced apart from the top wall, (b) a top wall segment that runs on the top wall from one side wall to the other side wall and is spaced apart from the front wall, and (c) a side wall segment on each of the side walls that connects the front wall segment with the top wall segment, the scored line defining a removable section of the container;

wherein each of the cans comprises a longitudinal axis, and wherein the front wall is substantially parallel to the longitudinal axis.

6. A method of providing easy access to items arranged in a container in a plurality of substantially perpendicular rows and columns, each item having an item diameter and an item height, wherein the arrangement has a top row and a next-to-the-top row, and wherein each column has a column width of the item diameter and each row has a row height of the item diameter, comprising:

providing a rectangular paper container comprising six rectangular walls including two side walls separated by the item height, a front wall and a rear wall separated by a whole multiple of the column width, a top wall, and a bottom wall adapted to rest on a support surface, the bottom wall and top wall separated by a whole multiple of the row height, the rear wall having a rear wall height;

scoring a front wall score on the front wall, at least a part of the front wall score being made at a height less than the rear wall height but sufficiently high to restrain the next-to-the-top row of items when the bottom wall is resting on the support surface and when the front wall is separated at the front wall score;

scoring a top wall score on the top wall, at least a part of the top wall score being spaced apart from the front wall;

scoring side wall scores on the side walls; and

forming a handle feature in the top wall;

wherein the side wall scores connect the front wall score and the top wall score such that the scores define a section, the removal of which allows easy access to the items, and wherein each of the items comprises a longitudinal axis substantially parallel to the front wall.

7. A container comprising:

an even number only of substantially identical cylindrical items contained within the container, each item having a height and a diameter; and

a rectangular carton, adapted to contain the items in a row and column arrangement of substantially perpendicular rows and columns, the row and column arrangement including a top row and a next-to-the-top row, the rectangular carton including a front wall, a rear wall, a top wall, a bottom wall for resting on a level support surface, and two side walls, the rectangular carton further adapted to enclose the items such that the front wall and rear wall are separated by a whole multiple of the item diameter, the top wall and bottom wall are separated by a whole multiple of the item diameter, and the side walls are separated by the item height, and wherein the carton includes a scored line having a front wall segment running on the front wall and spaced apart from the top wall, a top wall segment running on the top wall and spaced apart from the front wall, and a side wall segment running on each of the side walls and connecting the front wall segment to the top wall segment, the scored line defining a removable section of the container, such that removal of a front wall portion along the front wall segment, removal of a side wall portion along each of the side wall segments, and removal of a top wall portion along the top wall segment provides an opening that allows easy access to the items.

8. A method of manufacturing a container:

providing a paper sheet member;

forming a handle feature on the sheet member;

folding the sheet member around a plurality of items, each of the items having an item height, an item diameter, and a longitudinal axis, such that the folded sheet member defines a generally rectangular container having a top wall, a bottom wall, a front wall, a rear wall, and two side walls containing the items arranged in a plurality of substantially perpendicular rows and columns, the plurality of rows containing at least a top row and a next-to-the-top row, wherein a row height is equal to the item diameter, and wherein the front wall and the rear wall are separated by a whole multiple of the item diameter and the top wall and the bottom wall are separated by a whole multiple of the row height, and the side walls are separated by the item height, and wherein folding the sheet member further comprises orienting the front wall substantially parallel to the longitudinal axes; and

scoring a portion of the sheet member with a score line such that (a) at least a portion of the score line is on the front wall spaced apart from the top wall, (b) at least a portion of the score line is on the top wall spaced apart from the front wall, and (c) at least a portion of the score line is on each of the side walls, wherein the portion of the score line located on each of the side walls connects the portion of the score line that is on the top wall and on the front wall.

9. A container comprising:

a plurality of items, each item comprising an item diameter and an item height, each item further comprising a longitudinal axis;

a rear wall having a rear wall height;

a front wall spaced apart from the rear wall by a whole multiple of the item diameter, the front wall being substantially parallel to the longitudinal axes;

a bottom wall;

a top wall spaced apart from the bottom wall by a whole multiple of the item diameter;

two side walls separated by the item height; and

a scored line having a front wall segment, a top wall segment, and side wall segments, wherein (a) the front wall segment runs on the front wall from one side wall to the other side wall and at least a portion of the front wall segment runs along the front wall at a height that is lower than the rear wall height, (b) the top wall segment runs on the top wall from one side wall to the other side wall and is spaced apart from the front wall, and (c) the side wall segments connect the front wall segment with the top wall segment.

10. A container holding a multiplicity of items, the container comprising:

an even number of the items only, each item comprising an item diameter and an item height, each item further comprising a longitudinal axis;

a rear wall having a rear wall height;

a front wall spaced apart from the rear wall by a whole multiple of the item diameters, the front wall having a front wall scored line segment spaced apart from the top wall, the front wall being substantially parallel to the longitudinal axes;

a bottom wall;

a top wall spaced apart from the bottom wall by a whole multiple of the item diameter and having a top wall scored line segment spaced apart from the front wall; and

two side walls, each of the side walls having a side wall scored line segment running from the front wall to the top wall and connecting the front wall scored line segment and the top wall scored line segment, the side walls separated by the item height.

11. A container holding a multiplicity of substantially identical cans arranged in a plurality of substantially perpendicular rows and columns, each can having a can diameter and a can height, wherein the arrangement has a top row and a next-to-the-top row, and wherein each column has a column width of the can diameter and each row has a row height of the can diameter, comprising:

a rear wall having a rear wall height;

a bottom wall for resting on a support surface having;

a front wall spaced apart from the rear wall by an whole multiple of the column width and having a front wall scored line segment spaced apart from the top wall that defines a front wall edge that is located at a height less than the rear wall height but sufficiently high to restrain the next-to-the-top row of cans when the bottom wall is resting on the support surface and the front wall is separated along the front wall scored line segment;

a top wall spaced apart from the bottom wall by a whole multiple of the row height and having a top wall scored line segment spaced apart from the front wall; and

two side walls, each of the side walls having a side wall scored line segment connecting the front wall scored line segment to the top wall scored line segment, the side walls separated by the can height;

wherein each of the cans comprises a longitudinal axis substantially parallel to the front wall.

12. A container holding a multiplicity of cylindrical cans, each can having a can diameter and a can height, the container comprising:

a rear wall and a front wall spaced apart by a whole multiple of the can diameter;

a bottom wall and a top wall spaced apart by a whole multiple of the can diameter, the top wall including a handle;

two side walls between the bottom and top walls, the side walls spaced apart by the can height; and

a scored line having a front wall segment running on the front wall and spaced apart from the top wall, a top wall segment running on the top wall and spaced apart from the front wall, and side wall segments running on the side walls, the scored line defining a removable section of the container;

wherein each of the cans comprises a longitudinal axis, and wherein the front wall is substantially parallel to the longitudinal axes of the cans.

13. A method of providing easy access to twelve items only that are arranged in a container in a plurality of substantially perpendicular rows and columns, each item having an item diameter and an item height, wherein the arrangement has a top row and a next-to-the-top row, and wherein each column has a column width of the item diameter and each row has a row height of the item diameter, comprising:

providing a rectangular paper container comprising six rectangular walls including two side walls separated by the item height, a front wall and a rear wall separated by a whole multiple of the column width, and a top wall having a handle and a bottom wall adapted to rest on a support surface, the bottom wall and the top wall separated by a whole multiple of the row height, the rear wall having a rear wall height;

scoring a front wall score on the front wall, at least a part of the front wall score being made at a height less than the rear wall height but sufficiently high to restrain the next-to-the-top row of items when the bottom wall is resting on the support surface and when the front wall is separated at the front wall score;

scoring a top wall score on the top wall spaced apart from the front wall; and

scoring side wall scores on the side walls, each of the side wall scores running from the front wall score to the top wall score;

wherein the scores define a section, the removal of which allows easy access to the twelve items, and wherein

each of the items comprises a longitudinal axis substantially parallel to the front wall.

14. A container comprising:

a multiplicity of substantially identical items held in the container in a plurality of rows, each item having an item diameter, an item height, and a longitudinal axis, wherein each row has a row height of the item diameter;

a rear wall and a front wall each being substantially parallel to the longitudinal axes of the items, the rear wall and front wall separated by a whole multiple of the item diameter, the rear wall having a rear wall height;

a bottom wall and a top wall separated by a whole multiple of the row height;

two side walls between the bottom and top walls, the side walls separated by the item height;

the rear, front, bottom, top, and side walls forming a substantially rectangular carton holding the items in an arrangement wherein each row includes a forward most item in contact with the front wall and a rearward most item in contact with the rear wall; and

a scored line having a front wall segment running on the front wall spaced apart from the top wall, a top wall segment running on the top wall spaced apart from the front wall, and a side wall segment running on each of the side walls from a location at the front wall that is spaced apart from the top wall to a location at the top wall that is spaced apart from the front wall, the scored line defining a removable section of the container.

15. The container of claim 14, wherein each of the items comprises a beverage can.

16. The container of claim 14, wherein the multiplicity of substantially identical items is an even number of substantially identical items only.

17. The container of claim 16, wherein each of the items comprises a beverage can.

18. The container of claim 16, and further comprising a handle centrally located on the top wall.

19. The container of claim 18, wherein the plurality of rows includes a top row having an even number of substantially identical items only.

20. A container comprising:

a multiplicity of substantially identical items held in the container in a plurality of rows, each item having an item diameter, an item height, and a longitudinal axis, wherein each row has a row height of the item diameter;

a rear wall and a front wall each being substantially parallel to the longitudinal axes of the items, the rear wall and front wall separated by a whole multiple of the item diameter, the rear wall having a rear wall height;

a bottom wall and a top wall separated by a whole multiple of the row height;

two side walls between the bottom and top walls, the side walls separated by the item height;

the rear, front, bottom, top, and side walls forming a substantially rectangular carton holding the items in an arrangement wherein the plurality of rows comprises a top row and a next-to-the-top row, and each item in the

top row is centered on a corresponding item in the next-to-the-top row to form a plurality of pairs of items wherein, for each pair of items, the longitudinal axes of the items in the pair of items are both in a plane that is substantially parallel to the front and rear walls and to a corresponding plane for each of the other pairs of items; and

a scored line having a front wall segment running on the front wall spaced apart from the top wall, a top wall segment running on the top wall spaced apart from the front wall, and a side wall segment running on each of the side walls from a location at the front wall that is spaced apart from the top wall to a location at the top wall that is spaced apart from the front wall, the scored line defining a removable section of the container.

21. The container of claim 20, wherein each of the items comprises a beverage can.

22. The container of claim 20, wherein the multiplicity of substantially identical items is an even number of substantially identical items only.

23. The container of claim 22, wherein each of the items comprises a beverage can.

24. The container of claim 22, and further comprising a handle centrally located on the top wall.

25. The container of claim 24, wherein the plurality of rows includes a top row having an even number of substantially identical items only.

26. A container comprising:

a multiplicity of substantially identical items held in the container in a plurality of rows, each item having an item diameter, an item height, and a longitudinal axis, wherein each row has a row height of the item diameter;

a rear wall and a front wall each being substantially parallel to the longitudinal axes of the items, the rear

wall and front wall separated by a whole multiple of the item diameter, the rear wall having a rear wall height;

a bottom wall and a top wall separated by a whole multiple of the row height;

two side walls between the bottom and top walls, the side walls separated by the item height;

the rear, front, bottom, top, and side walls forming a substantially rectangular carton holding the items in an arrangement wherein the items in each row, with reference to the front and rear walls, are not staggered with respect to the items in any other row; and

a scored line having a front wall segment running on the front wall spaced apart from the top wall, a top wall segment running on the top wall spaced apart from the front wall, and a side wall segment running on each of the side walls from a location at the front wall that is spaced apart from the top wall to a location at the top wall that is spaced apart from the front wall, the scored line defining a removable section of the container.

27. The container of claim 26, wherein each of the items comprises a beverage can.

28. The container of claim 26, wherein the multiplicity of substantially identical items is an even number of substantially identical items only.

29. The container of claim 28, wherein each of the items comprises a beverage can.

30. The container of claim 28, and further comprising a handle centrally located on the top wall.

31. The container of claim 30, wherein the plurality of rows includes a top row having an even number of substantially identical items only.

* * * * *