

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2011241110 B2**

(54) Title
Devices and methods for reshaping cartilage structures

(51) International Patent Classification(s)
A61B 5/103 (2006.01) **A61F 2/30** (2006.01)
A61F 2/18 (2006.01) **H04L 29/06** (2006.01)
A61F 2/28 (2006.01) **H04L 29/08** (2006.01)

(21) Application No: **2011241110** (22) Date of Filing: **2011.04.15**

(87) WIPO No: **WO11/129900**

(30) Priority Data

(31) Number	(32) Date	(33) Country
61/325,306	2010.04.17	US

(43) Publication Date: **2011.10.20**

(44) Accepted Journal Date: **2015.10.29**

(71) Applicant(s)
Chondrocyte LLC

(72) Inventor(s)
Servell, Pascal;Mordon, Serge;Savage, Jack

(74) Agent / Attorney
Tatlocks Chrysiliou IP, Level 2 294-296 Collins Street, Melbourne, VIC, 3000

(56) Related Art
US 2009/0030358
US 6517557
US 5295950

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 October 2011 (20.10.2011)

(10) International Publication Number
WO 2011/129900 A3

(51) International Patent Classification:

A61F 2/28 (2006.01) A61B 5/103 (2006.01)
A61F 2/18 (2006.01) A61F 2/30 (2006.01)

F-59420 Mouvaux (FR). SAVAGE, Jack [US/US]; 8431 Etienne Way, Sandy, UT 84093 (US).

(21) International Application Number:

PCT/US2011/000688

(74) Agent: MORATH, Daniel, J.; Traskbritt, P.C., 230 South 500 East, Suite 300, P.O. Box 2550, Salt Lake City, UT 84110-2550 (US).

(22) International Filing Date:

15 April 2011 (15.04.2011)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/325,306 17 April 2010 (17.04.2010) US

(71) Applicant (for all designated States except US): NUMENA MEDICAL CORPORATION [US/US]; 8431 Etienne Way, Sandy, UT 84093 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SERVELL, Pascal [US/US]; 6305 Contour Dr., Dallas, TX 75248 (US). MORDON, Serge [FR/FR]; 66 Rue De L'escalette,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,

[Continued on next page]

(54) Title: DEVICES AND METHODS FOR RESHAPING CARTILAGE STRUCTURES

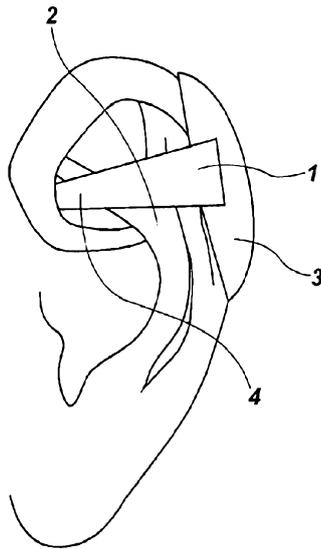


FIG. 4

(57) Abstract: Describe are methods of reshaping a cartilage structure. Such a method comprises creating a virtual three dimensional image of the cartilage structure; manipulating the virtual three dimensional image of the cartilage structure so as to obtain a virtual three dimensional image of a desired final shape of the cartilage structure; creating a virtual prototype of a device to hold the cartilage structure in the desired final shape of the cartilage structure; manufacturing the device; lasing the cartilage structure; and fitting the manufactured device to the cartilage structure.

WO 2011/129900 A3



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

15 March 2012

Published:

— *with international search report (Art. 21(3))*

TITLE OF THE INVENTION

DEVICES AND METHODS FOR RESHAPING CARTILAGE STRUCTURES

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This PCT Application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application No. 61/325,306 filed April 17, 2010.

[0002] Technical Field: The invention relates to devices and methods for reshaping cartilage structures, such as a human or mammalian ear.

[0003] Background: Ear deformations affect 5% of the Caucasian and Latino population or 12.1 million people (5% of 242.3 million). Each year, 4.26 million children are born of white or Latino parents (2.3 million whites and 1 million Hispanics). Of these, approximately 165,000 are born with deformed ears.

[0004] However, according to the American Society of Plastic Surgeons (ASPS), only 29,434 cosmetic ear surgery procedures were performed last year in the US and these were primarily performed on children, leaving the vast majority of the population untreated (it is interesting to note that otoplasty is the only cosmetic procedure performed on children, testifying to the damaging psychological issues stemming from this condition).

[0005] The average child has 85% ear development by 3 years of age and ears are typically fully grown by the age of 7 years (the height continues to grow into adulthood, but the width and distance from ear to scalp changes little). This fact in part explains why this procedure is popular with children as procedures performed from this age onwards will yield permanent results.

[0006] All ears also have surprisingly similar features in terms of size, protrusion from the scalp and angle from the cranium. The following is a list of considered standard sizes: Fully grown ears protrude from the scalp about 1.8 - 2.0 cm at midpoint. Ear length is typically 5.5-6.5 cm. Ear width is typically 3.0-4.5 cm. The ratio between width and length is about 50% to 60%. Helical Rim (Helix) 7 mm or about 10% of the height. Ear vertical axis 15 to 30 degrees posterior (with the top further back than the bottom).

[0007] Features constituting what is considered "normal" ear features are: Scapha angle greater than 90 degrees. Conchal bowl height less than 1.5 cm. Angle head to ear: female less than 21 degrees; male less than 25 degrees.

[0008] Ear deformations typically fall into two broad categories:

[0009] Cartilage deformations: these include: Prominent (or bat) ears which typically is a problem either of an oversized concha, or too wide an antihelical fold angle or a combination of the two. Helical deformations: Constricted ear - hooding or folding of the helical rim; Lop ear - the top of the ear is folded down and forward; Cup ear - malformed protruding ear with the top folded down and a large concha; Shell ear - curve of the outer rim as well as the folds and creases are missing; and Stahl's ear (Spock's ear). There is an extra fold and pointed top.

[0010] Non-cartilage related deformations. These include: Lobe deformations, Macrotia (oversized ears), and Microtia (undersized ears).

[0011] Surgical ear correction: Otoplasty

[0012] The first otoplastic technique to correct protruding ears is attributed to Ely in 1881. Since that report, over 180 surgical techniques have been described in the literature for the correction of protruding ears. These techniques can be subdivided into 3 sub-groups:

[0013] "Suture only" technique: First described by Furnas in 1968 (and still used to this day), this technique is used primarily to set back the ears and involves retracting the skin behind the ear and place 2-3 non-resorbable sutures to retract the position of the ear. The Mustarde method is today the most common.

[0014] Cartilage splitting or weakening technique or "Davis" method: Excision of skin and cartilage to correct conchal hypertrophy.

[0015] Combination of the above two or "converse Wood-Smith" technique: uses a cartilage cutting and suture method to correct and create an anti-helical fold.

[0016] All these surgical techniques tend to be performed on an outpatient basis under sedation, although when dealing with children it is advisable to perform it under general anesthesia. The procedure is generally performed primarily by Facial Plastic Surgeons and, to a lesser extent by Dermatologists, ENT and Maxillofacial Surgeons. It typically takes 2-3 hours to perform and is not without risks.

[0017] Complications from corrective ear surgery:

[0018] Major complications can be divided into two categories: Immediate complications: hematoma and infection which may result in necrosis; and Long-term complications include hypertrophic (keloid) scars, loss of sensitivity (resulting from damage to nerve endings), skin and cartilage necrosis as well as unaesthetic results or recurrence of the ear

deformity. It is important to realize that these complications are responsible for the high (10%) rate of repeat surgeries.

BRIEF SUMMARY OF THE INVENTION

[0019] Embodiments include a device for reshaping cartilage structures, the device comprising a first portion (1) (also referred to herein as a trellis or ear trellis) fitting over the helix of the outer ear and a second portion (2)(also referred to herein as a projection) having a proximal end (3) and a distal end (4), the proximal end (3) of the second portion projecting from and attached to the first portion (1); wherein, when the device is fitted to an ear, the second portion (2) extends from the first portion (1), across the anti-helix and the distal (4) end of the second portion (2) fits into the scapha under the helix at about the lower crura of the anti-helix and/or the fossa triangularis.

[0020] In embodiments, the device (trellis) may be designed so as to fit between the skull and the rear surface of the ear. Certain embodiments of the device may comprise a first surface (5) configured to fit against and be attached to the skull behind the ear, a second surface (6) configured to fit against and be attached to the rear surface of the ear so as to hold the ear in a desired position, and connecting structure (7) configured so as to hold the first surface and the second surface in position relative to one another.

[0021] A method of reshaping a cartilage structure, the method comprising: creating a virtual three dimensional image of the cartilage structure; manipulating the virtual three dimensional image of the cartilage structure so as to obtain a virtual three dimensional image of a desired final shape of the cartilage structure; creating a virtual prototype of a device to hold the cartilage structure in the desired final shape of the cartilage structure; manufacturing the device; lasing the cartilage structure; and fitting the manufactured device to the cartilage structure. In embodiments, fitting the manufacture device to the cartilage structure may include attaching the manufactured device to the cartilage structure an also may include attaching the device to a non-cartilage structure.

[0022] A method of shaping or reshaping a cartilage structure, the method comprising: creating a virtual three dimensional image of the location or cavity to contain the cartilage structure; manipulating the virtual three dimensional image of the location or cavity to contain the cartilage structure so as to obtain a virtual three dimensional image of a desired final shape of the cartilage structure; creating a virtual prototype of a device with an inner surface conforming to the desired final shape of the cartilage structure; manufacturing the device; lasing

the cartilage structure; placing the cartilage in the device and placing the device in culture medium; growing the cartilage to conform to the inner surface of the device; and placing the grown cartilage into the location or cavity.

[0023] Also disclosed is a method of shaping a subject's ear comprising analyzing the ear and determining what the desired shape of the ear is, manufacturing an encasing structure or trellis that includes an inner portion or cavity that is of the desired shape, lasing the ear, encasing at least a portion of the lased ear within the encasing structure so that the lased ear is formed into the desired shape, and allowing the ear thus to form. Structures capable of encasing the ear are known in the art. *See, e.g.* U.S. Pat. App. Pub. 2009/0030358, the entirety of the contents of which are incorporated herein by reference.

[0024] The methods and means described herein are much more effective, of broader applicability (*e.g.*, can be applied to subjects such as a human or mammal), less painful, and less expensive than the prior art methodology.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] FIG. 1 is a depiction of the structures of the outer ear.

[0026] FIG. 2 is a flow chart of one embodiment of a method described herein.

[0027] FIG. 3 is a flow chart of one embodiment of a method described herein.

[0028] FIG. 4 is a depiction of one embodiment of a device described herein.

[0029] FIG. 5 is a depiction of a further embodiment of a device described herein.

DETAILED DESCRIPTION OF THE INVENTION

[0030] Certain embodiments of the invention include a device (a trellis) for reshaping cartilage structures. With reference to FIG. 4, certain embodiments of device may comprise a ear trellis (1) fitting over the helix of the outer ear and a projection (2) originating and attached to the ear trellis (1) at its proximal end (3) and extending across the anti-helix and the distal end (4) fitting into the scapha under the helix at about the lower crura of the anti-helix and/or the fossa triangularis. In certain embodiments, the projection (2) and ear trellis (1) may be formed as a single piece or multiple pieces.

[0031] In certain embodiments, the projection (2) may be of a length or have a bias such that when fitted into an ear, the projection (2) exerts pressure on its distal end (4) and proximal end (3)s so as to force the ear trellis away from the distal end (4) and towards the mastoid. In certain embodiments, the length or the bias of the projection (2) may be adjustable

such that greater or lesser pressure is exerted by the distal end (4) on the ear and/or by the proximal end (3) on the ear trellis. In certain embodiments, the projection (2) may be formed of any suitable material including plastic or metal. In particular embodiments, the projection (2) if formed from a material that is capable of being biased to return to a particular shape such that when the projection (2) is deflected from its biased shape, it exerts pressure to return to its undeflected shape.

[0032] In certain embodiments, the length of the projection (2) may be adjustable. For example the projection (2) may be constructed of one or more pieces that may lock together in one or more configurations to provide different lengths of the overall projection (2). By way of non-limiting example, a first portion (1) of the projection (2) may have one or more holes or depressions and a second portion of the projection (2) may have one or more pins or studs such that the two portions may be fit together to form projections of various lengths. In another non-limiting example, the length of the projection (2) may be adjustable in where along the length of the projection (2) it attaches to the ear trellis, thus providing various lengths of projection (2)s which extend from the ear trellis to the distal end (4).

[0033] In further embodiments, the attachment of the proximal end (3) of the projection (2) to the ear trellis may be adjustable such that the proximal end (3) may be attached to the ear trellis at different and/or multiple locations. By way of non-limiting example, the ear trellis may have multiple attachment points for the projection (2) along its length such that the point of attachment of the projection (2) to the ear trellis is adjustable along the length of the helix to which the ear trellis may be attached.

[0034] In certain embodiments, the distal end (4) of the projection (2) may be molded for comfortable fit in the scapha or may be covered with another material so as to provide additional comfort to the user.

[0035] In certain embodiments, the ear trellis (1) may attach to all or part of the helix. In a particular embodiment, the ear trellis fits around the helix with at least a portion of the ear trellis extending into the scapha. In certain embodiments, the ear trellis grips the helix such that when pressure is applied to the ear trellis from the proximal end (3) of the projection (2), it remains attached to the helix and forces the helix toward the mastoid. In certain embodiments, the ear trellis (1) may be configured to be attached and/or may be attached to the mastoid or the skin covering the mastoid.

[0036] In certain embodiments, the ear trellis may extend further behind or in front of the ear so as to contact and place pressure upon structures other than the helix and/or the scapha.

By way of non-limiting example, the ear trellis might extend to and place pressure upon one or more of the helix, scapha, fossa triangularis, either of the crura of the antihelix, scaphoid fossa, crus of the helix, tragus, antitragus, cybma conchae, and cavum conchae. In examples, the ear trellis may place pressure on any one or more of the aforementioned structures so as to hold it in a desired position.

[0037] In particular embodiments, the trellis to be applied (which need not be affixed to the subject's head) flattens a hyper-curved ear by sandwiching the misshapen ear between a first member and a second member that extend along both the inside and outside of the upper portion of the ear or encase the entire upper portion of the ear so that, after laser application, the ear may be formed to more approximate a desired shape. The first and second members, *e.g.*, in the case when the trellis encases the upper portion of the ear (not shown), may be integrally formed, or may alternatively be two distinct flat, longitudinal members affixed to one another, *via, e.g.*, a hinge, clip, or springed hinge, that act to flatten the ear between the flat longitudinal members or projections. In such a case, the device depicted in FIG. 4 has a second projection (not shown) running generally parallel to the projection, but extending behind the ear to sandwich the ear. Once sized and placed on the subject's ear, the two generally parallel projections act to flatten the upper portion of the ear extending between them thus flattening the hyper-curved portion after laser treatment.

[0038] In embodiments, the device (trellis) may be designed so as to fit between the skull and the rear surface of the ear. With reference to FIG. 5, certain embodiments of the device may comprise a first surface (5) configured to fit against and be attached to the skull behind the ear, a second surface (6) configured to fit against and be attached to the rear surface of the ear so as to hold the ear in a desired position, and connecting structure (7) configured so as to be attached the first surface (5) and the second surface (6) so as to hold the first surface (5) and the second surface (6) in position relative to one another. In certain embodiments, the first surface (5), second surface (6), and connecting structure (7) may be formed as a single piece or multiple pieces.

[0039] In certain embodiments, the first surface (5) may be molded, sculpted, or manufactured so as to fit comfortably against the skin on the skull behind the ear. In embodiments, the second surface (6) may be molded, sculpted, or manufactured so as to provide a surface conforming to a final desired position and shape of the ear. In embodiments, the first surface (5) and the second surface (6) may be fixed in place relative to one another by connecting structure (7) such that when first surface (5) is attached to the skull, or the skin over

the skull, behind the ear, and second surface (6) is attached to the rear of the ear, the ear is held in a desired position and/or configuration.

[0040] In embodiments, the first surface (5) and the second surface (6) may be attached to the skin, skull, or ear in any permanent, semi-permanent, or non-permanent way as desired. Examples of articles or items useful in attaching the device include, but are not limited to, screws, clips, wires, staples, nails, brads, adhesives, tapes, sutures, cements, and glues.

[0041] In further embodiments, the attachment of the first surface (5) and the second surface (6) to the connecting structure (7) may be adjustable such that first surface (5) and the second surface (6) may be attached to the connecting structure (7) at different and/or multiple locations or configurations. By way of non-limiting example, the connecting structure (7) may have multiple attachment points for first surface (5) and the second surface (6) along its length such that the point of attachment of the first surface (5) and the second surface (6) to the connecting structure (7) is adjustable.

[0042] In certain embodiments, the second surface (6) may attach to all or part of the rear surface of the ear. In a particular embodiment, the second surface (6) may fit around the helix with at least a portion of the second surface (6) extending into the scapha. In certain embodiments, the second surface (6) grips the helix such that when the first surface (5) is attached to the skull, or the skin over the skull, behind the ear, the second surface (6) forces the helix toward the mastoid.

[0043] In certain embodiments, the second surface (6) may extend further behind or in front of the ear so as to contact and place pressure upon structures other than the helix and/or the scapha when the first surface (5) is attached to the skull, or the skin over the skull, behind the ear. By way of non-limiting example, the second surface (6) might extend to and place pressure upon one or more of the helix, scapha, fossa triangularis, either of the crura of the antihelix, scaphoid fossa, crus of the helix, tragus, antitragus, cybma conchae, and cavum conchae. In examples, the second surface (6) may place pressure on any one or more of the aforementioned structures so as to hold it in a desired position.

[0044] Certain embodiments of the invention include trellis structures that may fit in and/or around the nose. In certain embodiments, a trellis may include one or more portions that extend into one or more of the nasal cavities. In certain embodiments, a trellis may also contain one or more portions that extend over one or more of the outer surfaces of the nose or the face. In certain embodiments, portions of the trellis that extend into the nasal cavities may be tubular or

hollow in nature so as to allow the passage of air through the trellis and into the upper nasal cavities.

[0045] Certain embodiments of the invention include trellis structures that may close completely or partially around the cartilage structure. For example, the cartilage structure may comprise a whole, or portion of a spinal disc or meniscus of the knee for which the trellis would completely or partially enclose. In certain embodiments, the trellis may have holes in it or be made of a porous material to allow the passage of liquids and/or small molecules through the surface of the trellis.

[0046] In certain embodiments, a trellis may be constructed of any rigid or semi-rigid material such as metal or plastic. In certain embodiments, the trellis may be constructed of one or more pieces such as a back piece (to cover, for example, a portion of the rear surface of the ear or the interior portion of the nasal cavity) and a front piece (to cover, for example, a portion of the front surface of the ear and/or fit in to the scapha or an exterior portion of the nose). The first and second pieces may be joined in any suitable manner such as permanently joining (for example fusing or welding) or non-permanently joining (for example held to together by one or more of pins, clips, hinges, locking mechanisms, etc.). In certain embodiments, the trellis may be designed so as to be easily removable from the underlying cartilage structure.

[0047] Certain embodiments of the invention include methods of forming or reforming cartilage structures in a subject using the devices described herein. The forming or reforming of cartilage structures may take place through the process of chondrogenesis. In certain embodiments, the cartilage structures may be any cartilage containing portion of a subject including, but not limited to, the joints between bones, the rib cage, the ear, the nose, the elbow, the knee, the ankle, the bronchial tubes, the intervertebral discs, and nasal septum. One example of such a method comprises treating a cartilage structure with a laser so as to stimulate chondrogenesis as described by Leclere *et al.* (Aesth. Plast. Surg. 2010 Apr; 34(2):141-6); Mordon *et al.* (Lasers Surg. Med. 2004 34:315-322) and Mordon *et al.* (Lasers Surg. Med. 2006 Aug; 38(7):659-62) the contents of the entirety of each of which are incorporated herein by reference.

[0048] In certain embodiments, the laser used to treat the cartilage structure may be a mid IR laser. In further embodiments, the laser may emit radiation at a wavelength of about 1540nm. In certain embodiments, the laser may be 1540 nm Er:YAG laser such as that available from Quantel Derma GmbH, Erlangen Germany. In additional embodiments, the tip of the may incorporate an integrated cooling device such that when in use the cooled tip of the

device imparts a cooling effect on any tissue or cartilage structure being irradiated by the laser. One non-limiting example of such a cooling tip is the Koolburst, available from Quantel Derma GmbH, Erlangen Germany utilizing the manufacturer's instructions.

[0049] In certain embodiments, lasing of the cartilage structure may deliver about 84 J/cm² cumulative fluence. In certain embodiments, the cumulative fluence may be delivered in a single pulse or by the stacking of several pulses. By way of a non-limiting example, 84 J/cm² cumulative fluence may be achieved by delivering seven stacked pulses of 12 J/cm².

[0050] In certain embodiments, lasing of the cartilage structure may comprise lasing of one or more of the surfaces of the cartilage structure. By way of non-limiting examples, lasing of the ear may comprise lasing of both sides of the ear at the location to be stimulated, for example both sides of the entire helix and concha of the ear; lasing of the nasal septum may comprise lasing both surfaces of the septum; and lasing a spinal disc or meniscus of the knee may comprise lasing all or some of the surfaces of these structures. In further embodiments, locations of a cartilage structure to be lased may include the entire structure or may be limited to particular portions of a cartilage structure in order to achieve a desired localization of chondrogenesis.

[0051] In certain embodiments, the above described trellis or similar devices may be placed on the cartilage structure and left in place until the cartilage structure is effectively reshaped by the trellis or similar device. In certain embodiments, the trellis or similar device may be left in place for a period of 3 to 6 weeks. In particular embodiments, the trellis may be worn continuously for the first 3 weeks and then only at night for an additional 3 weeks.

[0052] In certain embodiments, the trellis may be specifically designed to hold the cartilage structure in a desired shape or grow the structure into a desired shape. In certain embodiments, the cartilage structure to be treated and/or lased may be scanned or imaged in three dimensions so as to create a virtual or electronic version of the cartilage structure. Devices for creating three dimensional virtual images of objects are known in the art and include, but are not limited to MRI, PET, CT, and 3D scanners (hand held or otherwise) such as, but not limited to the hand held Handyscan 3D scanners available from Creaform, Quebec City, Quebec, Canada utilizing the manufacturer's instructions. In certain embodiments, a three dimensional image of the cartilage structure to be shaped may be manipulated using various commercially available software programs so such the final desired form of the cartilage structure is rendered. One example of such software includes, but is not limited to, Mimics Z software available from Z Corp, Burlington, MA.

[0053] In certain embodiments, the cavity or locale which wholly or partially contains the cartilage structure may be scanned so as to create a three dimensional virtual model of the location into which the cartilage structure is desired to fit and/or function. Once a virtual model of the cavity or locale is rendered, the shape of the virtual cavity or locale may be manipulated using various commercially available software programs so such the final desired form of the cartilage structure is rendered.

[0054] Once the final desired form of the cartilage structure is rendered, a virtual prototype trellis according to the invention may be designed to fit and hold the cartilage structure in a desired position or dimension. The virtual prototype trellis may then be manufactured using techniques available in the art. In one non-limiting example, the trellis may be manufactured from the virtual prototype trellis using a 3D printer such as the ones available from Z Corp, Burlington, MA utilizing the manufacturer's instructions.

[0055] In one embodiment of the invention, as depicted in the flow chart presented in FIG. 2, a subject may visit a provider to have the cartilage structure, or a cavity or locale containing a cartilage structure, scanned. A copy of the scan may then be sent to a manufacturer. The sending of the scan may be done in any practical way such as, but not limited to, physically or through electronic means such a memory device or the internet. Either the provider or the manufacturer may manipulate the virtual image created by the scan to produce a virtual image of the final desired form of the cartilage structure. The manufacturer may then create a virtual prototype trellis designed to hold the cartilage structure in the desired position or define the final shape of the cartilage structure. The manufacturer may then manufacture the seller and provide the completed trellis to the provider. The provider or some other entity may laser the cartilage structure as herein described and then cartilage structure may then be fitted with the trellis. The trellis may then be worn by the subject until the cartilage structure assumes the desired final form.

[0056] In certain embodiments, a trellis may be created to define the final shape for a cartilage structure to be inserted into a particular cavity or locale within a subject. As depicted in the flow chart presented in FIG. 3, a three dimensional virtual image of the cavity or locale may be created as described herein. A three dimensional virtual image of the cartilage structure to be placed in the cavity or locale may then be designed and a may then be designed and manufactured to help define the outer limits of the cartilage structure. Cartilage from a subject or a donor may then be obtained and placed into culture within the manufactured trellis. The cartilage in culture may be laser as described herein and/or exposed to various factors known to

effect the growth and maturation of cartilage such as, but not limited to, IGF-I, TGF-beta1, BMP-7, PDGF-AB; and FGF-2. Once the cartilage has assumed the desired shape, it may be removed from culture and placed into the cavity or locale in the subject

[0057] The present invention is further described in the following example, which is offered by way of illustration and are not intended to limit the invention in any manner.

EXAMPLE 1

[0058] Laser-Assisted Cartilage Reshaping for Treating Ear Protrusions

[0059] Materials and Methods

[0060] Twenty-four patients were treated by LACR. All patients were informed of the purpose and possible outcomes of the study, signed forms of consent for the study, and agreed to clinical photography. There were 14 adults and 10 children. The patients' mean age was 16.0 years (range = 6–45 years). Pain was assessed by the patients using a 4-point scale: none, slight, moderate, or severe

[0061] For 21 patients, the 1.54-ImEr:YAG laser (Aramis, Quantel Derma GmbH, Erlangen, Germany) was set at 12 J/cm² per pulse. The treatment consisted of seven stacked pulses (3 ms, 2 Hz, 84 J/cm² cumulative fluence) applied using a 4-mm spot hand piece with integrated cooling (Koolburst, Quantel Derma GmbH, Erlangen, Germany) on both sides of the entire helix and concha. For the remaining three adults, the laser was set at a lower fluence of 10 J/cm² per pulse for a total cumulative fluence of 70 J/cm². The entire helix and concha were irradiated on both sides. Contact cooling made the treatment very tolerable, to the extent that topical anesthesia was not required (although local anesthetic certainly could have been used).

[0062] Twenty-four patients underwent LACR of both ears using our 1.54-Im laser. Immediately after irradiation, a silicone elastomer (Hydro-C, Detax, Ettlingen, Germany) was inserted inside the helix to give it the desired shape. Three minutes later the elastomer hardened and a solid mold was obtained. The entire procedure took no more than 15–20 min per ear. Patients were asked to wear this mold at all times for the first 3 weeks and then only at night for an additional 3 weeks. A non-steroidal anti-inflammatory drug (NSAID) was prescribed to all patients for 3 days. Ears were checked at days 1, 30, 60, and 90 and photographs were taken. Clinical follow-up at 1 year was obtained via direct patient contact (n = 22) or over the telephone (n = 2).

[0063] Results

[0064] Postoperative follow-up was uneventful for all ears, except for six on which minor contact dermatitis developed probably because of inappropriate mold design. This did not require additional therapy and those patients (4 children and 2 adults) stopped wearing the mold leading to incomplete shape correction. There were no cases of infection hematomas or skin necrosis. For the remaining 18 patients (6 children and 9 adults) the expected ear reshaping was achieved (fluence = 84 J/cm²) Table 1; in 3 adults, partial or incomplete reshaping was observed and correlated to a lower fluence (70 J/cm²). Those patients were retreated at months at 84-J/cm² fluence and all achieved suitable reshaping (Table 2). Again, no postoperative discomfort was reported.

Table 1 Our series of 48 reshaped ears using the 1540-nm laser on 24 patients

N	Age (years)	Sex	Fluence (J/cm ²)	Mold	Reshaping	Pain	Follow-up (months)
1	6	M	84/84	A/A	E/E	N/N	Su/St
2	6	M	84/84	A/A	E/E	N/N	Su/St
3	7	W	84/84	A/A	E/E	N/N	Su/St
4	7	W	84/84	A/A	E/E	N/N	Su/St
5	6	W	84/84	A/A	E/E	N/N	Su/St
6	8	W	84/84	A/A	E/E	N/N	Su/St
7	19	W	84/84	A/A	E/E	N/N	Su/St
8	24	W	84/84	A/A	E/E	N/N	Su/St
9	22	W	84/84	A/A	E/E	N/N	Su/St
10	20	W	84/84	A/A	E/E	N/N	Su/St
11	16	W	84/84	A/A	E/E	N/N	Su/St
12	18	M	84/84	A/A	E/E	N/N	Su/St
13	22	M	84/84	A/A	E/E	N/N	Su/St
14	22	W	84/84	A/A	E/E	N/N	Su/St
15	45	W	84/84	A/A	E/E	N/N	Su/St
16	24	W	84/84	I/I	I/I	N/N	MR/MR
17	22	W	84/84	I/I	I/I	N/N	MR/MR
18	8	W	84/84	I/I	I/I	N/N	MR/MR
19	6	W	84/84	I/I	I/I	N/N	MR/MR
20	6	W	84/84	I/I	I/I	N/N	MR/MR
21	8	M	84/84	I/I	I/I	N/N	MR/MR
22	22	M	70/70	A/A	I/I	N/N	SeR/SeR
23	18	W	70/70	A/A	I/I	N/N	SeR/SeR
24	22	W	70/70	A/A	I/I	N/N	SeR/SeR

M man, W woman, R/L right/left, A appropriate, I inappropriate, E expected, I incomplete, N none, S slight, M moderate, Se severe, St stable, SR slight recurrence, MR moderate recurrence, SeR severe recurrence

Table 2 Three patients underwent a second course of reshaping with a new fluence

N	Age (years)	Sex	Fluence (J/cm ²)	Mold	Reshaping	Pain	Follow-up (months)
22	22	M	84/84	A/A	E/E	N/N	Su/St
23	18	W	84/84	A/A	E/E	N/N	Su/St
24	22	W	84/84	A/A	E/E	N/N	Su/St

M male, W woman, A appropriate, E expected, N none, St stable

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A device for reshaping an ear of a subject, the device comprising:
 - a first portion fitting over the helix of the outer ear; and
 - a second portion having a proximal and distal end, the proximal end of the second portion projecting from and attached to the first portion;wherein when the device is fitted onto the ear, the second portion extends from the first portion, across the anti-helix and the distal end of the second portion fits into the scapha under the helix at about the lower crura of the anti-helix and/or the fossa triangularis; and
the device is structured to pull the helix toward the subject's adjacent mastoid bone.

2. A device for reshaping an ear of a subject, the device comprising:
 - a first surface configured to fit against and be attached to the skin over the skull, behind the ear;
 - a second surface configured to fit against and be attached to the rear surface of the ear so as to hold the ear in a desired position;
 - a connecting structure attached between the first surface and the second surface so as to hold the first surface and the second surface in position relative to one another;
 - an arm extending between a proximal end and a distal end, the proximal end of the arm being structurally associated with the second surface and fitting over the helix of the outer ear; andwherein when the device is fitted onto an ear, the arm extends across the anti-helix and the distal end of the arm fits into the scapha under the helix at about the lower crura of the anti-helix and/or the fossa triangularis and the arm sandwiches the ear between, and urges the ear toward, the second surface.

3. The device of any one of the preceding claims, wherein the device pushes the helix of the ear toward the mastoid.

4. The device of claim 1 or claim 3, wherein the second portion is of a length or has a bias such that when associated with an ear, the second portion exerts pressure on its distal and

proximal ends so as to force the first portion and the helix away from the distal end and towards the mastoid.

5. The device of any one of the preceding claims, wherein the first portion comprises multiple potential attachment points for the second portion.

6. The device of any one of the preceding claims, wherein the second portion is adjustable as to its length from its distal end to where it attaches to the first portion.

7. The device of any one of the preceding claims, wherein the first portion comprises one or more projections that extend around the helix and fit into the scapha.

8. A method of reshaping an ear of a subject, the method comprising:
creating a virtual three dimensional image of the ear;
manipulating the virtual three dimensional image of ear so as to obtain a virtual three dimensional image of a desired final shape of the ear;
creating a virtual prototype of the device of any one of claims 1 to 7 to hold the ear in the desired final shape;
manufacturing the device;
lasing the ear of the subject; and
fitting the manufactured device onto the ear.

9. The method according to claim 8, wherein fitting the manufactured device onto the ear comprises attaching the manufactured device to the skin over the skull, behind the ear and to the ear.

10. The method according to claim 9, wherein attaching the device to the skin over the skull comprises gluing, cementing, and/or adhering the device to the skin over the skull.

11. A device for reshaping cartilage structure in a subject's ear, the device comprising:
a first portion fitting over the helix of the subject's outer ear; and

generally parallel second and third portions each having proximal and distal ends, the proximal ends thereof projecting from and attached to the first portion and extending to sandwich the outer ear between said second and third portions;

wherein when the device is associated with an ear, the second and third portions extend from the first portion, across the anti-helix and the distal end of the second portion fits into the scapha under the helix at about the lower crura of the anti-helix and/or the fossa triangularis; and the third portion comprises:

a first surface carrying an adhesive and configured to fit against and be attached to the skin over the skull, behind the ear;

a second surface configured to fit against and be attached to the rear surface of the ear so as to hold the ear in a desired position; and

a connecting structure attached between the first surface and the second surface so as to hold the first surface and the second surface in position relative to one another.

12. A cosmetic method of shaping a subject's ear, the method comprising:
analyzing the ear to determine what the ear's desired shape is,
making the device of any one of claims 1 to 7 that is of the desired shape,
lasing the ear,
encasing at least a portion of the lased ear within the device so that the lased ear is formed into the desired shape, and
allowing the ear thus to form the desired shape.

13. The method according to any one of claims 8 to 10 and 12, wherein the device is maintained on the ear for a period of at least three weeks.

14. A method of reshaping an ear of a subject, the method comprising:
lasing the ear, and
fitting the device of any one of claims 1 to 7 onto the subject's lased ear after lasing the ear.

15. A device for reshaping an ear of a subject into a final desired shape for that ear, the device comprising: a first surface configured to fit against and be adhered to the skin over the

subject's skull behind the subject's ear; a second surface designed and configured to fit against and be attached to the rear surface of the subject's ear so as to hold and maintain the ear in a final desired position relative to the subject's head, wherein the second surface has been molded, sculpted, or manufactured to provide a shaping surface conforming to the ear's final desired shape and wherein the second surface fits around the helix with a portion of the second surface extending into the scapha of the ear; and a connecting structure attaching the first surface and the second surface, designed and configured so as to hold the first surface and the second surface in a desired position relative to one another; wherein the device is rigid and, upon placement onto the subject's ear, is designed and configured to maintain the subject's ear in the final desired position and shape of the ear.

+

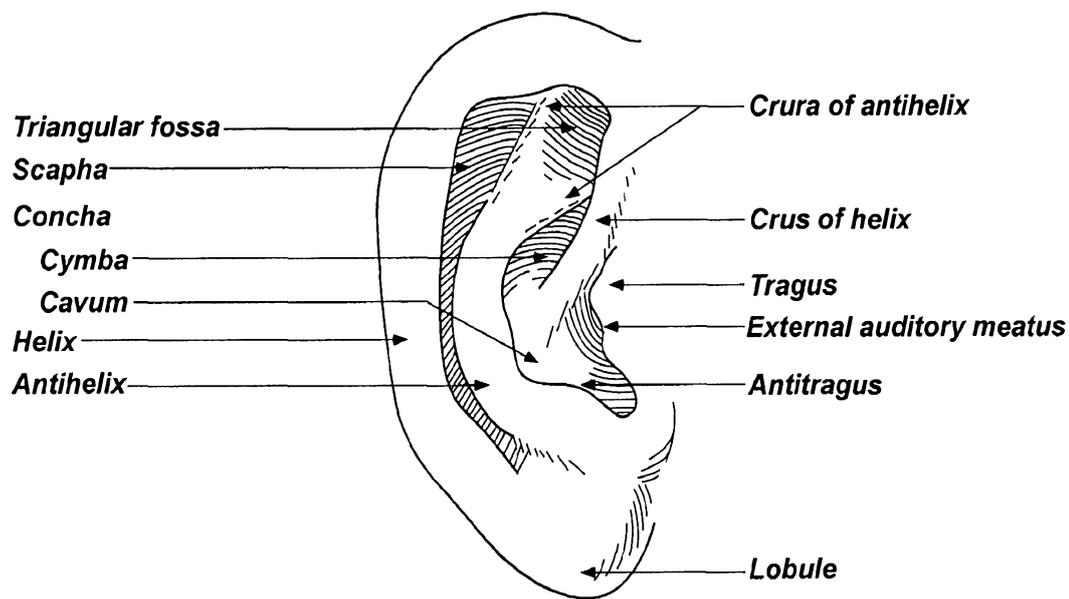


FIG. 1

+

+

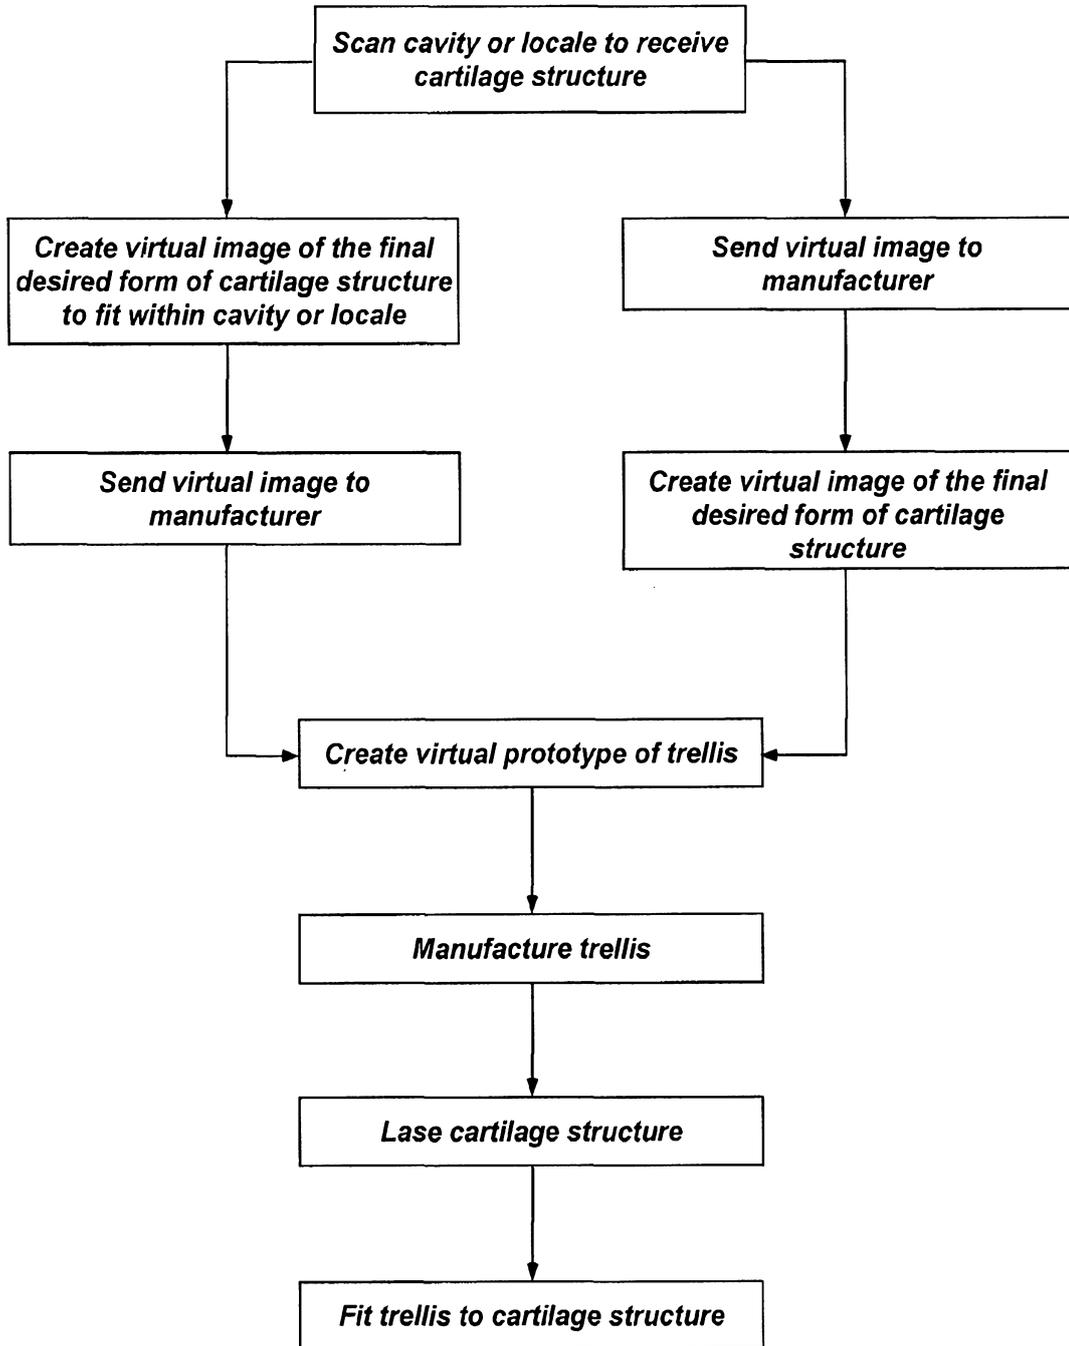


FIG. 2

+

+

3/5

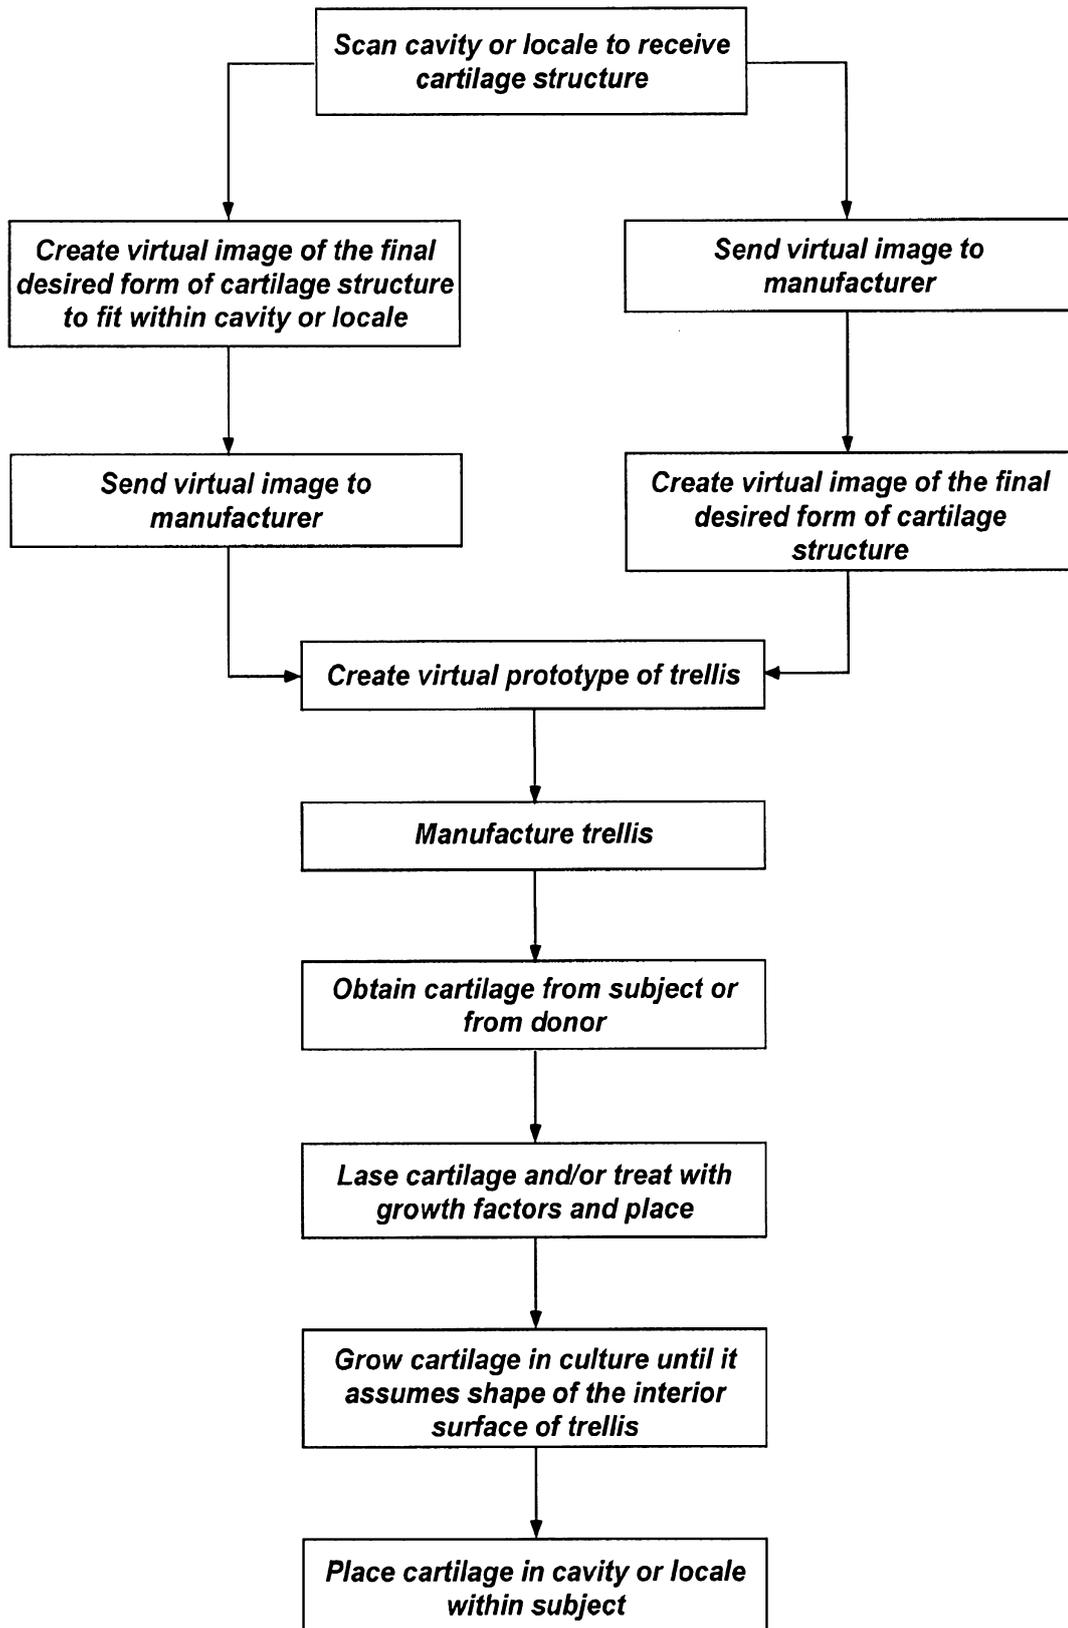


FIG. 3

+

+

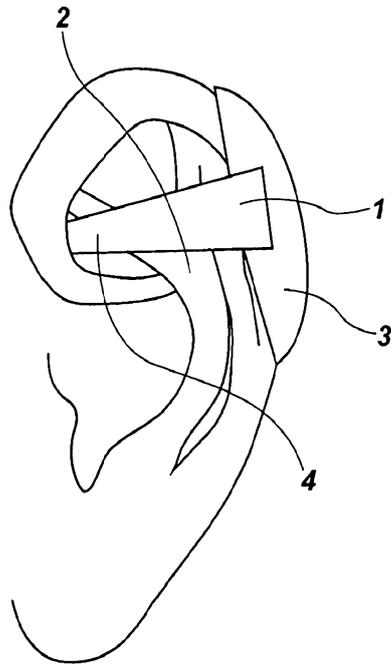


FIG. 4

+

+

5/5

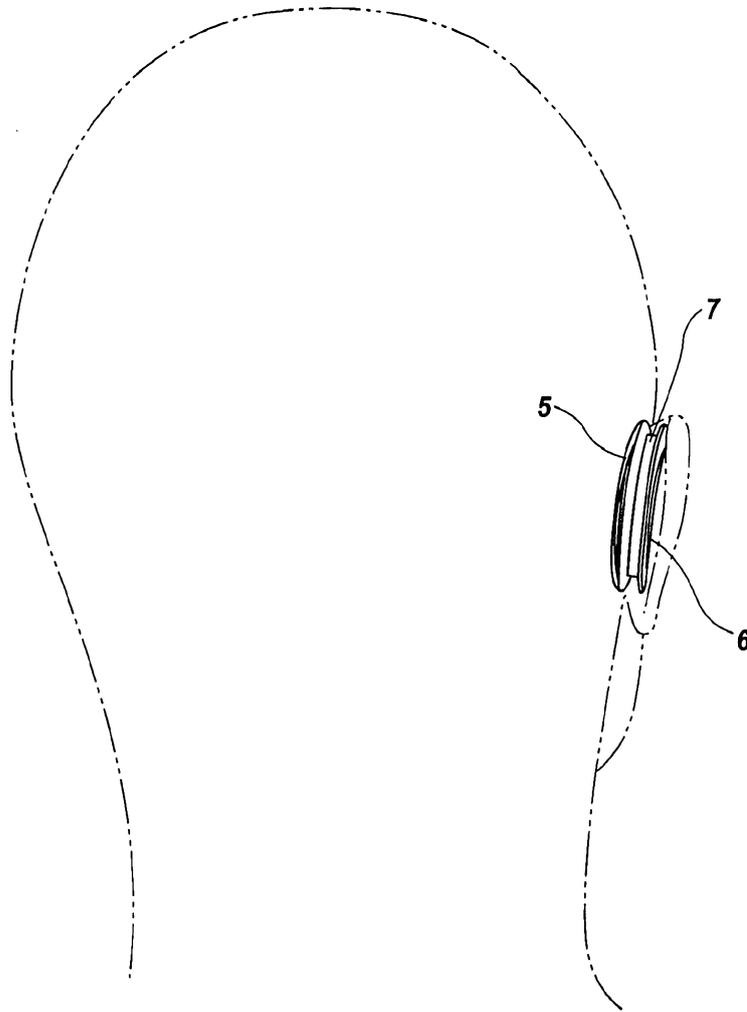


FIG. 5

+